



Spot Check Evaluation

FCC ID : UZ7EM45A1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F),
27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	20
4 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460505-02E	Rev. 01	Initial issue of report	Feb. 12, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A1
FCC ID	UZ7EM45A1
IMEI Code	Conducted: 354708620060822/354708620063123 Conduction: 354708620060426/354708620064352 Radiation: 354708620060269/ 354708620064113 DFS/CBP: 354708620060657/354708620063206
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45A1, FCC ID: UZ7EM45A1) is electrically identical to the reference device (Model: EM45A2, FCC ID: UZ7EM45A2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460505-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45A1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45A2 and FCC ID: UZ7EM45A1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45A1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45A2	Full test	FR460505A	UZ7EM45A1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45A2	Full test	FR460505B	UZ7EM45A1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45A2	Full test	FR460505C	UZ7EM45A1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45A2	Full test	FR460505D	UZ7EM45A1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5500~5720	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5745~5825	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45A2	Full test	FZ460505	UZ7EM45A1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45A2	Full test	FR460505G FR460505H	UZ7EM45A1	Spot check	Y, All test items
22, 24, 27, 90, 96,	PCE (WCDMA)	Band II, IV, V	UZ7EM45A2	Full test	FG460505A	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/12/13/17/25/ 26/30/38/41/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45A2	Full test	FG460505B FG460505C FG460505D FG460505G FG460505J	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B14 (90R)	UZ7EM45A2	Full test	FG460505E	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45A2	Full test	FG460505F	UZ7EM45A1	Spot check	Y, All test items
	CBE (LTE)	B48/48C (Part96)	UZ7EM45A2	Full test	FG460505H FG460505I	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n12/n13/n25/ n26/n30/n38/n41/n66/ n71/n77/n78	UZ7EM45A2	Full test	FG460505K FG460505L FG460505O FG460505R FG460505S	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n14 (90R)	UZ7EM45A2	Full test	FG460505M	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45A2	Full test	FG460505N	UZ7EM45A1	Spot check	Y, All test items
	CBE (NR)	n48/n77/n78 (Part96)	UZ7EM45A2	Full test	FG460505P FG460505Q	UZ7EM45A1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.996	1.004	0.008	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.94	0	3
	99% Bandwidth	0.836	0.845	0.009	3
	Conducted Band Edges	-41.83	-44.27	2.44	3
	Conducted Spurious Emission	-45.65	-48	2.35	3
BT 1Mbps (CH39)	Radiated Band Edges and Radiated Spurious Emission	55.68	56.85	1.17	3
BT	AC Conducted Emission	11.93	10.83	1.1	3
BLE 1Mbps (CH39)	6dB Bandwidth	1.15	1.15	0	3
	99% Bandwidth	2.01	2.014	0.004	3
	Power Spectral Density	-9.33	-9.34	0.01	3
	Conducted Band Edges	-33.74	-33.98	0.24	3
	Conducted Spurious Emission	-51.53	-52.95	1.42	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	47.73	46.09	1.46	3
BLE	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.08	8.08	0	3
	99% Bandwidth	13.467	13.387	0.08	3
	Power Spectral Density	-1.15	-1.27	0.12	3
	Conducted Band Edges	-47.96	-48.2	0.24	3
	Conducted Spurious Emission	-43.67	-45.68	2.01	3
WIFI 2.4G (802.11ax HE20 CH11)	Radiated Band Edges and Spurious Emission	52.29	49.61	2.68	3
WIFI 2.4G	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.29	19.2	0.09	3
WIFI 5G (802.11a CH149)	99% Bandwidth	16.705	16.705	0	3
WIFI 5G (802.11a CH149)	Power Spectral Density	8.3	7.99	0.31	3
WIFI 5G (802.11a CH149)	Unwanted Emissions	16.31	16.31	0	3
WIFI 5G (11ax HE80 Ch42)	Radiated Band Edges and Spurious Emission	50.86	50.93	0.07	3
WIFI 5G	AC Conducted Emission	12.50	11.33	1.17	3
WIFI 5G (802.11a CH116)	DFS	0.851628	0.87852	0.026	3
FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6XD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.00	0.30	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3



FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6CD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.04	0.26	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-65.36	-65.88	0.52	3
6E (802.11ax HE20_Ch233)	Radiated Band Edges and Spurious Emission	66.93	67.17	0.24	3
WIFI 6G	AC Conducted Emission	11.52	12.62	1.1	3
Part 15C NFC	20dB Spectrum Bandwidth	2.48	2.48	0	3
	99% OBW Spectrum Bandwidth	2.10	2.11	0.01	3
	Frequency Stability	-22.9351	-20.8333	2.1018	3
	Field Strength of Fundamental Emissions	58.04	58.19	0.15	3
	Radiated Spurious Emissions	33.28	35.09	1.81	3
	AC Conducted Emissions	11.94	11.86	0.06	3

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 96 SA_n77	Radiated Spurious Emission	-43.4	-43.69	0.29	3
Part 96 SA_n48	End User Device additional requirement	Pass	Pass	-	-
Part96 Band48CA	Equivalent Isotropic Radiated Power	20.99	20.96	0.203	3
	Peak-to-Average Ratio	6.43	6.22	0.21	3
	Occupied Bandwidth	32.80	32.80	0.00	3
	Conducted Band Edge	-40.19	-40.98	0.79	3
	Conducted Spurious Emission	-48.81	-47.65	1.16	3
	Frequency Stability	0.0005	0.0011	0.0006	3



Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	9.32	8.85	0.47	3
	BLE 1Mbps	9.12	8.87	0.25	3
	BLE 2Mbps	9.33	9.00	0.33	3
	11b, 2.4GHz	22.51	22.46	0.05	3
	11g, 2.4GHz	21.97	21.92	0.05	3
	11n HT20, 2.4GHz	21.27	21.20	0.07	3
	11ac VHT20, 2.4GHz	21.31	21.25	0.06	3
	11ax HE20, 2.4GHz	21.33	21.31	0.02	3
	11a, 5.2GHz	22.28	22.15	0.13	3
	11a, 5.3GHz	22.27	22.08	0.19	3
	11a, 5.5GHz	22.41	22.22	0.19	3
	11a, 5.8GHz	22.45	22.39	0.06	3
	11n HT20, 5.2GHz	21.20	21.11	0.09	3
	11n HT20, 5.3GHz	20.56	20.27	0.29	3
	11n HT20, 5.5GHz	21.42	21.01	0.41	3
	11n HT20, 5.8GHz	21.51	21.14	0.37	3
	11ac VHT20, 5.2GHz	21.25	21.16	0.09	3
	11ac VHT20, 5.3GHz	20.62	20.31	0.31	3
	11ac VHT20, 5.5GHz	21.46	21.04	0.42	3
	11ac VHT20, 5.8GHz	21.56	21.17	0.39	3
	11ax HE20, 5.2GHz	21.29	21.20	0.09	3
	11ax HE20, 5.3GHz	20.68	20.38	0.30	3
	11ax HE20, 5.5GHz	21.41	21.09	0.32	3
	11ax HE20, 5.8GHz	21.41	21.06	0.35	3
	11n HT40, 5.2GHz	20.45	20.03	0.42	3
	11n HT40, 5.3GHz	20.22	19.85	0.37	3
	11n HT40, 5.5GHz	20.52	20.33	0.19	3
	11n HT40, 5.8GHz	20.30	20.24	0.06	3
	11ac VHT40, 5.2GHz	20.51	20.08	0.43	3
	11ac VHT40, 5.3GHz	20.27	19.89	0.38	3
	11ac VHT40, 5.5GHz	20.55	20.39	0.16	3
	11ac VHT40, 5.8GHz	20.36	20.32	0.04	3
	11ax HE40, 5.2GHz	20.56	20.14	0.42	3
	11ax HE40, 5.3GHz	20.30	19.94	0.36	3
	11ax HE40, 5.5GHz	20.60	20.44	0.16	3
	11ax HE40, 5.8GHz	20.42	20.35	0.07	3
	11ac VHT80, 5.2GHz	20.25	20.02	0.23	3
	11ac VHT80, 5.3GHz	20.03	19.77	0.26	3
	11ac VHT80, 5.5GHz	20.18	20.01	0.17	3
	11ac VHT80, 5.8GHz	19.83	19.79	0.04	3
	11ax HE80, 5.2GHz	20.31	20.05	0.26	3
	11ax HE80, 5.3GHz	20.07	19.79	0.28	3
	11ax HE80, 5.5GHz	20.21	20.03	0.18	3
	11ax HE80, 5.8GHz	19.85	19.82	0.03	3
	11ac VHT160, 5.3GHz	19.21	19.11	0.10	3
	11ac VHT160, 5.5GHz	19.48	19.24	0.24	3
	11ax HE160, 5.3GHz	19.23	19.14	0.09	3
	11ax HE160, 5.5GHz	19.52	19.28	0.24	3
	6CD Indoor 11a, U-NII-5	7.13	7.06	0.07	3
	6CD Indoor 11a, U-NII-6	7.63	7.61	0.02	3
	6CD Indoor 11a, U-NII-7	6.43	6.38	0.05	3
	6CD Indoor 11a, U-NII-8	5.80	5.71	0.09	3
	6CD Indoor 11ax HE20, U-NII-5	10.68	10.47	0.21	3
	6CD Indoor 11ax HE20, U-NII-6	11.19	11.12	0.07	3



6CD Indoor 11ax HE20, U-NII-7	9.90	9.86	0.04	3
6CD Indoor 11ax HE20, U-NII-8	9.18	8.91	0.27	3
6CD Indoor 11ax HE40, U-NII-5	13.56	13.40	0.16	3
6CD Indoor 11ax HE40, U-NII-6	14.02	13.89	0.13	3
6CD Indoor 11ax HE40, U-NII-7	12.74	12.65	0.09	3
6CD Indoor 11ax HE40, U-NII-8	12.41	12.34	0.07	3
6CD Indoor 11ax HE80, U-NII-5	16.49	16.28	0.21	3
6CD Indoor 11ax HE80, U-NII-6	16.36	16.34	0.02	3
6CD Indoor 11ax HE80, U-NII-7	16.05	15.96	0.09	3
6CD Indoor 11ax HE80, U-NII-8	15.84	15.78	0.06	3
6CD Indoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Indoor 11ax HE160, U-NII-6	16.48	16.09	0.39	3
6CD Indoor 11ax HE160, U-NII-7	16.71	16.43	0.28	3
6CD Indoor 11ax HE160, U-NII-8	16.80	16.50	0.30	3
6CD Outdoor 11a, U-NII-5	17.02	16.53	0.49	3
6CD Outdoor 11a, U-NII-7	16.69	16.62	0.07	3
6CD Outdoor 11ax HE20, U-NII-5	16.95	16.55	0.40	3
6CD Outdoor 11ax HE20, U-NII-7	16.61	16.26	0.35	3
6CD Outdoor 11ax HE40, U-NII-5	16.90	16.60	0.30	3
6CD Outdoor 11ax HE40, U-NII-7	16.52	16.22	0.30	3
6CD Outdoor 11ax HE80, U-NII-5	16.85	16.52	0.33	3
6CD Outdoor 11ax HE80, U-NII-7	16.43	16.13	0.30	3
6CD Outdoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Outdoor 11ax HE160, U-NII-7	16.42	16.20	0.22	3

Conducted power for Licensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	WCDMA II	23.97	23.79	0.18	3
	WCDMA IV	23.92	23.88	0.04	3
	WCDMA V	23.98	23.66	0.32	3
	LTE B2	23.66	23.24	0.42	3
	LTE B4	23.56	23.32	0.24	3
	LTE B5	23.69	23.35	0.34	3
	LTE B5B	23.65	23.52	0.13	3
	LTE B7	22.8	22.61	0.19	3
	LTE B7C	22.79	22.75	0.04	3
	LTE B12	23.89	23.65	0.24	3
	LTE B13	23.71	23.31	0.4	3
	LTE B14	23.83	23.38	0.45	3
	LTE B17	23.82	23.43	0.39	3
	LTE B25	23.68	23.19	0.49	3
	LTE B26L	23.47	23.26	0.21	3
	LTE B26H	23.71	23.26	0.45	3
	LTE B30	23.69	23.57	0.12	3
	LTE B66	23.60	23.28	0.32	3
	LTE B71	22.76	22.72	0.04	3
	LTE B38	22.77	22.70	0.07	3
	LTE B41	26.01	26.00	0.01	3
	LTE B38C	22.63	22.59	0.04	3
	LTE B41C	25.73	25.62	0.11	3
	LTE B48 part96	21.85	21.82	0.03	3
	LTE B48C part96	21.55	21.52	0.03	3
	LTE B66B	23.49	23.27	0.22	3
	LTE B66C	23.32	23.21	0.11	3



N13	24.27	23.96	0.31	3
N14	24.26	23.98	0.28	3
N26 L	24.45	24.06	0.39	3
N26 H	24.49	24.02	0.47	3
ENDC_48A_n66A	24.22	24.18	0.04	3
N77 270 MIMO	24.70	24.36	0.34	3
N78 270 MIMO	24.61	24.32	0.29	3
N77 part96 MIMO	22.31	22.25	0.06	3
N78 part96 MIMO	22.26	22.19	0.07	3
N77 27Q MIMO	24.45	24.12	0.33	3
N78 27Q MIMO	24.11	23.86	0.25	3
ENDC_5A_n2A	24.72	24.27	0.45	3
ENDC_12A_n25A	24.74	24.29	0.45	3
ENDC_2A_n5A	24.39	24.31	0.08	3
ENDC_2A_n7A	23.85	23.51	0.34	3
ENDC_2A_n12A	24.52	24.25	0.27	3
ENDC_2A_n30A	23.65	23.58	0.07	3
ENDC_2A_n38A	23.59	23.45	0.14	3
ENDC_2A_n41A	26.56	26.45	0.11	3
ENDC_2A_n71A	23.39	23.31	0.08	3
ENDC_2A_N77A 270	26.23	26.17	0.06	3
ENDC_2A_N78A 270	26.01	25.94	0.07	3
ENDC_2A_N77A 27Q	25.99	25.75	0.24	3
ENDC_2A_N78A 27Q	25.81	25.47	0.34	3
ENDC_2A_N77A part96	22.85	22.62	0.23	3
ENDC_2A_N78A part96	22.76	22.58	0.18	3
ENDC_2A_N48A part96	22.04	22.01	0.03	3

6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.03	4.55	3.39	0.35	-0.85	4.90	2.54	24.00	Pass	4.5	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	7.91	6.82	0.35	-0.85	8.26	5.97	24.00	Pass	8	8
HE40	MCS0	1	003	5965	Full	0.00	0.00	10.63	10.08	0.35	-0.85	10.98	9.23	24.00	Pass	11	11
HE80	MCS0	1	007	5985	Full	0.00	0.00	13.43	13.02	0.35	-0.85	13.78	12.17	24.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6515	0.03	0.04	4.81	4.31	0.75	-2.44	5.56	1.87	24.00	Pass	5.5	5.5



U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.41	7.67	0.75	-2.44	9.16	5.23	24.00	Pass	9	9
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.21	10.45	0.75	-2.44	11.96	8.01	24.00	Pass	12	12
HE80	MCS0	1	103	6465	Full	0.00	0.00	13.63	12.91	0.75	-2.44	14.38	10.47	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	13.37	12.72	0.75	-2.44	14.12	10.28	24.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	3.54	3.14	1.02	0.16	4.56	3.30	24.00	Pass	4	4

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	7.19	6.43	1.02	0.16	8.21	6.59	24.00	Pass	7.5	7.5
HE40	MCS0	1	123	6565	Full	0.00	0.00	9.97	9.19	1.02	0.16	10.99	9.35	24.00	Pass	10.5	10.5
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.33	12.45	1.02	0.16	14.35	12.61	24.00	Pass	14	14
HE160	MCS0	1	175	6825	Full	0.00	0.00	13.25	13.51	1.02	0.16	14.27	13.67	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	7095	0.03	0.04	2.72	2.58	0.70	1.66	3.42	4.24	24.00	Pass	3.5	3.5

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	229	7095	Full	0.00	0.00	5.85	5.76	0.70	1.66	6.55	7.42	24.00	Pass	6.5	6.5
HE40	MCS0	1	227	7085	Full	0.00	0.00	9.27	9.26	0.70	1.66	9.97	10.92	24.00	Pass	10	10
HE80	MCS0	1	199	6945	Full	0.00	0.00	12.98	12.45	0.70	1.66	13.68	14.11	24.00	Pass	13.5	13.5
HE160	MCS0	1	207	6985	Full	0.00	0.00	13.22	13.58	0.70	1.66	13.92	15.24	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	4.60	3.43	7.06	0.35		7.41	24.00	Pass	4.5	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6515	0.03	0.04	4.84	4.35	7.61	0.75		8.36	24.00	Pass	5.5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	117	6535	0.03	0.04	3.57	3.17	6.38	1.02		7.40	24.00	Pass	4	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	7095	0.03	0.04	2.74	2.65	5.71	1.66		7.37	24.00	Pass	3.5	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	049	6195	Full	0.00	0.00	7.96	6.89	10.47	0.35		10.82	24.00	Pass	8	
HE40	MCS0	2	003	5965	Full	0.00	0.00	10.67	10.10	13.40	0.35		13.75	24.00	Pass	11	
HE80	MCS0	2	007	5985	Full	0.00	0.00	13.49	13.04	16.28	0.35		16.63	24.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	24.00	Pass	14	

U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.44	7.76	11.12	0.75		11.87	24.00	Pass	9	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.24	10.48	13.89	0.75		14.64	24.00	Pass	12	
HE80	MCS0	2	103	6465	Full	0.00	0.00	13.68	12.95	16.34	0.75		17.09	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	13.40	12.74	16.09	0.75		16.84	24.00	Pass	14	



U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	7.22	6.44	9.86	1.02		10.88	24.00	Pass	7.5	
HE40	MCS0	2	123	6565	Full	0.00	0.00	10.02	9.22	12.65	1.02		13.67	24.00	Pass	10.5	
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.35	12.51	15.96	1.02		16.98	24.00	Pass	14	
HE160	MCS0	2	175	6825	Full	0.00	0.00	13.29	13.55	16.43	1.02		17.45	24.00	Pass	14	

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	229	7095	Full	0.00	0.00	5.88	5.91	8.91	1.66		10.57	24.00	Pass	6.5	
HE40	MCS0	2	227	7085	Full	0.00	0.00	9.33	9.32	12.34	1.66		14.00	24.00	Pass	10	
HE80	MCS0	2	199	6945	Full	0.00	0.00	13.02	12.50	15.78	1.66		17.44	24.00	Pass	13.5	
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.36	13.62	16.50	1.66		18.16	24.00	Pass	14	

<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	049	6195	0.03	0.04	14.00	12.85	0.35	-0.85	14.35	12.00	30.00	Pass	14	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	13.99	12.97	0.35	-0.85	14.34	12.12	30.00	Pass	14	14
HE40	MCS0	1	051	6205	Full	0.00	0.00	14.02	13.03	0.35	-0.85	14.37	12.18	30.00	Pass	14	14
HE80	MCS0	1	055	6225	Full	0.00	0.00	13.88	13.01	0.35	-0.85	14.23	12.16	30.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	181	6855	0.03	0.04	13.58	13.45	1.02	0.16	14.60	13.61	30.00	Pass	14	14



U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	13.63	12.76	1.02	0.16	14.65	12.92	30.00	Pass	14	14
HE40	MCS0	1	123	6565	Full	0.00	0.00	13.57	12.76	1.02	0.16	14.59	12.92	30.00	Pass	14	14
HE80	MCS0	1	167	6785	Full	0.00	0.00	13.37	12.76	1.02	0.16	14.39	12.92	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	13.37	12.91	1.02	0.16	14.39	13.07	30.00	Pass	14	14

<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	049	6195	0.03	0.04	14.05	12.92	16.53	0.35		16.88	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	14.02	13.00	16.55	0.35		16.90	30.00	Pass	14	
HE40	MCS0	2	051	6205	Full	0.00	0.00	14.06	13.07	16.60	0.35		16.95	30.00	Pass	14	
HE80	MCS0	2	055	6225	Full	0.00	0.00	13.92	13.05	16.52	0.35		16.87	30.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	30.00	Pass	14	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	181	6855	0.03	0.04	13.63	13.60	16.62	1.02		17.64	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	117	6535	Full	0.00	0.00	13.68	12.78	16.26	1.02		17.28	30.00	Pass	14	
HE40	MCS0	2	123	6565	Full	0.00	0.00	13.59	12.79	16.22	1.02		17.24	30.00	Pass	14	
HE80	MCS0	2	167	6785	Full	0.00	0.00	13.40	12.83	16.13	1.02		17.15	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	13.42	12.95	16.20	1.02		17.22	30.00	Pass	14	

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 05, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 05, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 05, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 05, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 05, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 05, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)



MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	Apr 17, 2024	Nov. 05, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 02, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 02, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 02, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 10, 2024	Oct. 20, 2024	Sep. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC RF Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jun. 25, 2024 ~ Aug. 16, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	8
1.4 Testing Location	8
1.5 Test Software.....	8
1.6 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	15
2.5 EUT Operation Test Setup	15
2.6 Measurement Results Explanation Example.....	15
3 TEST RESULT	16
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	16
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Unwanted Emissions Measurement	23
3.5 AC Conducted Emission Measurement.....	28
3.6 Antenna Requirements.....	30
4 LIST OF MEASURING EQUIPMENT	31
5 MEASUREMENT UNCERTAINTY	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460505F	Rev. 01	Initial issue of report	Sep. 05, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 1.98 dB at 2485.64 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 12.50 dB at 2.794 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI / SN Code	Conducted: 24128000613410 Conduction: 352991990029245/352991990029427 Radiation: 352991990055075/352991990055281
HW Version	EV2.5
SW Version	13-32-02.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 8 + 10> <5180 MHz ~ 5240 MHz> 802.11a : 22.28 dBm / 0.1690 W 802.11n HT20 : 21.20 dBm / 0.1318 W 802.11n HT40 : 20.45 dBm / 0.1109 W 802.11ac VHT20: 21.25 dBm / 0.1334 W 802.11ac VHT40: 20.51 dBm / 0.1125 W 802.11ac VHT80: 20.25 dBm / 0.1059 W 802.11ax HE20: 21.29 dBm / 0.1346 W 802.11ax HE40: 20.56 dBm / 0.1138 W 802.11ax HE80: 20.31 dBm / 0.1074 W <5260 MHz ~ 5320 MHz> 802.11a : 22.27 dBm / 0.1687 W 802.11n HT20 : 20.56 dBm / 0.1138 W 802.11n HT40 : 20.22 dBm / 0.1052 W 802.11ac VHT20: 20.62 dBm / 0.1153 W 802.11ac VHT40: 20.27 dBm / 0.1064 W 802.11ac VHT80: 20.03 dBm / 0.1007 W 802.11ac VHT160: 19.21 dBm / 0.0834 W 802.11ax HE20: 20.68 dBm / 0.1169 W 802.11ax HE40: 20.30 dBm / 0.1072 W 802.11ax HE80: 20.07 dBm / 0.1016 W 802.11ax HE160: 19.23 dBm / 0.0838 W <5500 MHz ~ 5720 MHz > 802.11a : 22.41 dBm / 0.1742 W 802.11n HT20 : 21.42 dBm / 0.1387 W 802.11n HT40 : 20.52 dBm / 0.1127 W 802.11ac VHT20: 21.46 dBm / 0.1400 W 802.11ac VHT40: 20.55 dBm / 0.1135 W 802.11ac VHT80: 20.18 dBm / 0.1042 W 802.11ac VHT160: 19.48 dBm / 0.0887 W 802.11ax HE20: 21.41 dBm / 0.1384 W 802.11ax HE40: 20.60 dBm / 0.1148 W 802.11ax HE80: 20.21 dBm / 0.1050 W 802.11ax HE160: 19.52 dBm / 0.0895 W <5745 MHz ~ 5825 MHz> 802.11a : 22.45 dBm / 0.1758 W 802.11n HT20 : 21.51 dBm / 0.1416 W 802.11n HT40 : 20.30 dBm / 0.1072 W 802.11ac VHT20: 21.56 dBm / 0.1432 W 802.11ac VHT40: 20.36 dBm / 0.1086 W 802.11ac VHT80: 19.83 dBm / 0.0962 W 802.11ax HE20: 21.41 dBm / 0.1384 W 802.11ax HE40: 20.42 dBm / 0.1102 W 802.11ax HE80: 19.85 dBm / 0.0966 W

99% Occupied Bandwidth	MIMO <Ant. 8 + 10> <5180 MHz ~ 5240 MHz> 802.11a : 16.876 MHz 802.11ac VHT20 : 17.829 MHz 802.11ac VHT40 : 36.267 MHz 802.11ac VHT80 : 75.886 MHz 802.11ax HE20: 19.067 MHz 802.11ax HE40: 37.981 MHz 802.11ax HE80: 77.410 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.762 MHz 802.11ac VHT20 : 17.867 MHz 802.11ac VHT40 : 36.267 MHz 802.11ac VHT80 : 75.962 MHz 802.11ac VHT160 : 155.581 MHz 802.11ax HE20: 19.086 MHz 802.11ax HE40: 37.981 MHz 802.11ax HE80: 77.562 MHz 802.11ax HE160: 157.257 MHz <5500 MHz ~ 5720 MHz> 802.11a : 16.724 MHz 802.11ac VHT20 : 17.829 MHz 802.11ac VHT40 : 36.229 MHz 802.11ac VHT80 : 75.886 MHz 802.11ac VHT160 : 155.581 MHz 802.11ax HE20: 19.067 MHz 802.11ax HE40: 37.981 MHz 802.11ax HE80: 77.562 MHz 802.11ax HE160: 157.257 MHz <5745 MHz ~ 5825 MHz> 802.11a : 16.705 MHz 802.11ac VHT20 : 17.829 MHz 802.11ac VHT40 : 36.267 MHz 802.11ac VHT80 : 75.886 MHz 802.11ax HE20: 19.048 MHz 802.11ax HE40: 37.981 MHz 802.11ax HE80: 77.638 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 8> : monopole Antenna with gain -1.98 dBi <Ant. 10> : monopole Antenna with gain -0.65 dBi <5260 MHz ~ 5320 MHz> <Ant. 8> : monopole Antenna with gain -1.66 dBi <Ant. 10> : monopole Antenna with gain -0.34 dBi <5500 MHz ~ 5720 MHz> <Ant. 8> : monopole Antenna with gain -0.76 dBi <Ant. 10> : monopole Antenna with gain -1.15 dBi <5745 MHz ~ 5825 MHz> <Ant. 8> : monopole Antenna with gain -0.62 dBi <Ant. 10> : monopole Antenna with gain -0.32 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. WLAN MIMO support CDD mode.
2. For 802.11n HT20/HT40 & 11ac VHT20/VHT40 mode, the whole testing have assessed 11ac VHT20/VHT40 to cover 11n HT20/HT40 by referring to the higher output power.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power > partial RU, therefore the full RU perform full test, and partial RU verify PSD/Bandedge/Spurious.
4. The device does not support 802.11ax channel puncturing.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	50 ^{##}	5250
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20 (Cover 11n HT20)	MCS0
802.11ac VHT40 (Cover 11n HT40)	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

AC Conducted Emission	Mode 1 : WLAN 5G Link + BT Link + AC Adapter 1 + Battery + USB Cable1
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1	

RSE Co-location modes
WIFI 5G_11ax HE80 CH42_TX + WIFI 2.4G_11ax HE20 CH11_TX + LTE Band 48 Link
WIFI 5G_11ax HE80 CH42_TX + WIFI 2.4G_11ax HE20 CH11_TX + BLE 2M CH39_TX + LTE Band 48 Link
WIFI 5G_11ax HE80 CH42_TX + WIFI 2.4G_11ax HE20 CH11_TX + RFID Tx
WIFI 5G_11ax HE80 CH42_TX + WIFI 2.4G_11ax HE20 CH11_TX + BLE 2Mbps CH39_TX + RFID T x



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

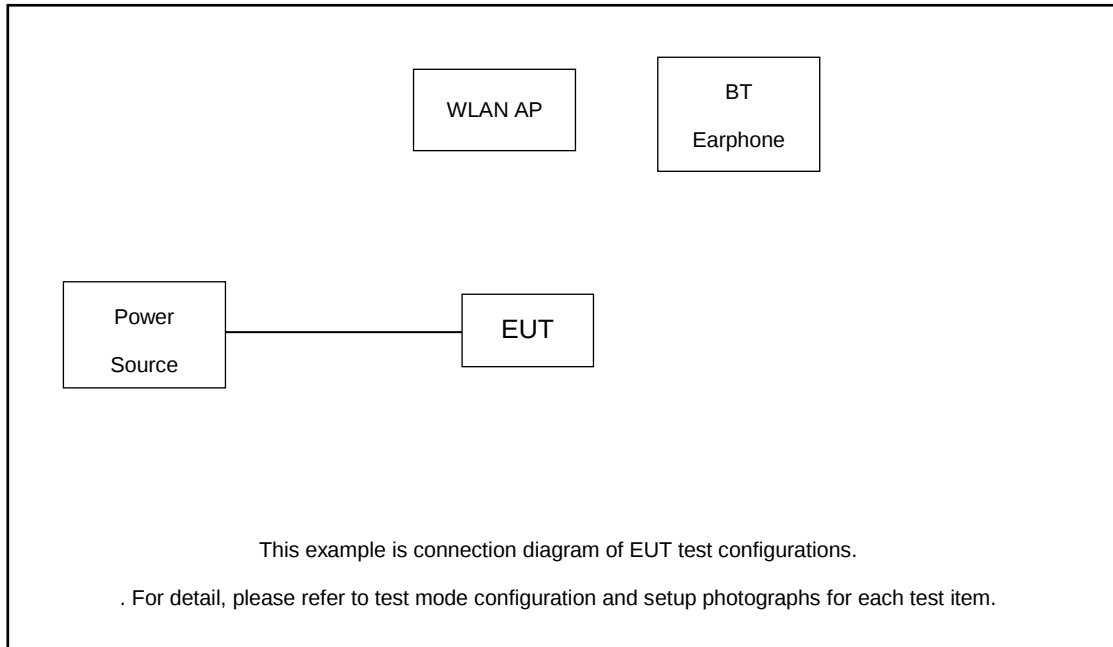

Radiated Emission:

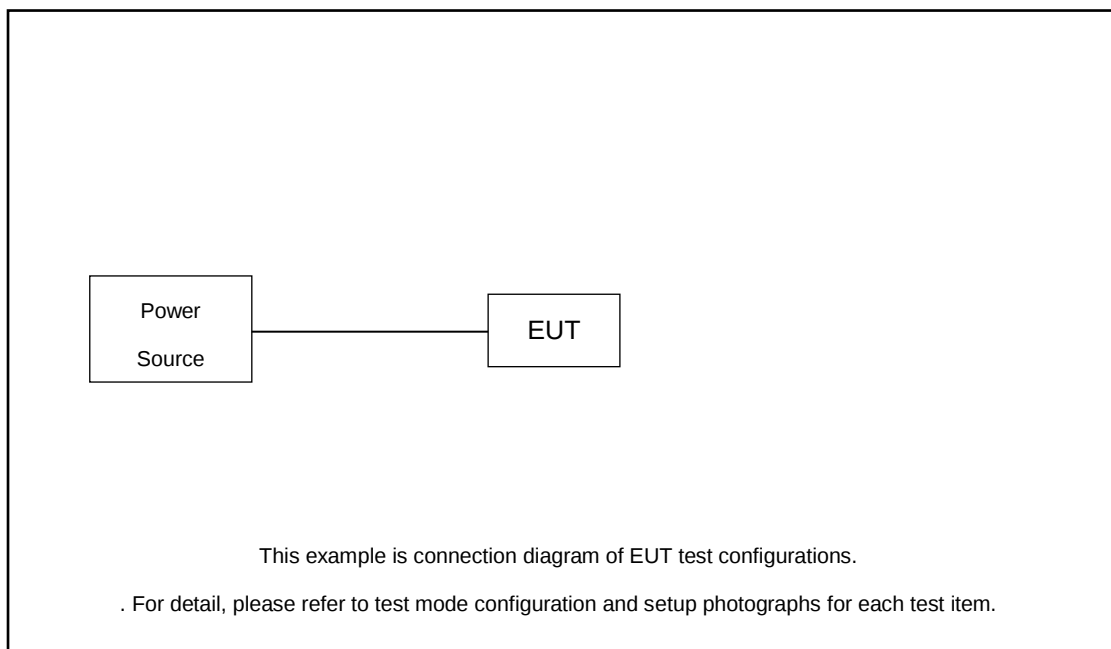

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 14.58 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 14.58 + 10 = 24.58 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 * RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup

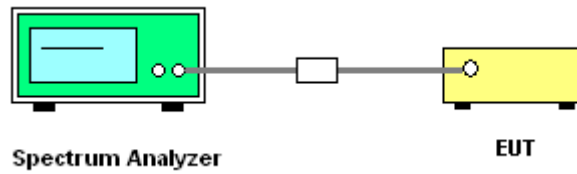

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

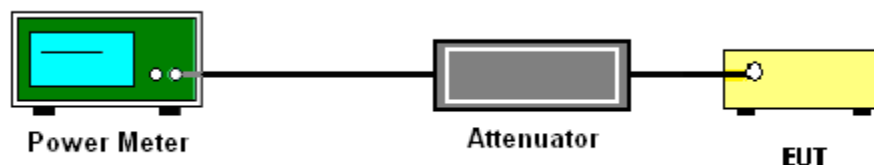

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

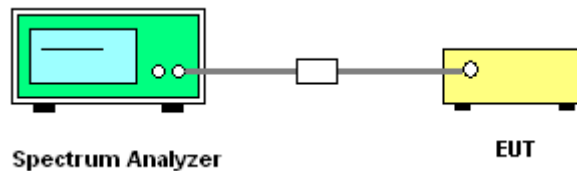

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log (d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

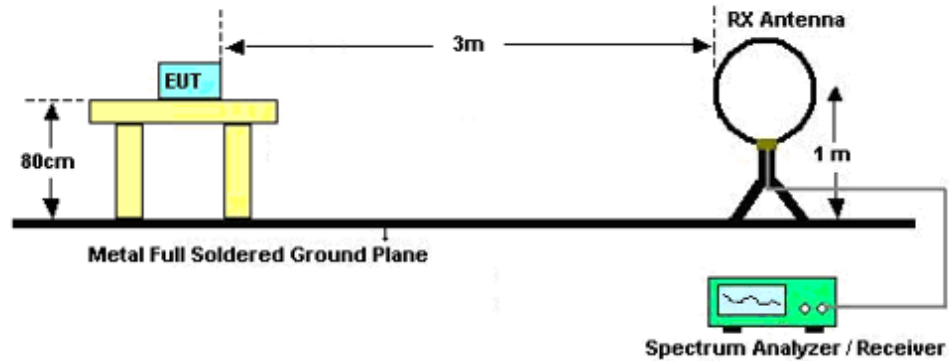

For radiated emissions from 30MHz to 1GHz

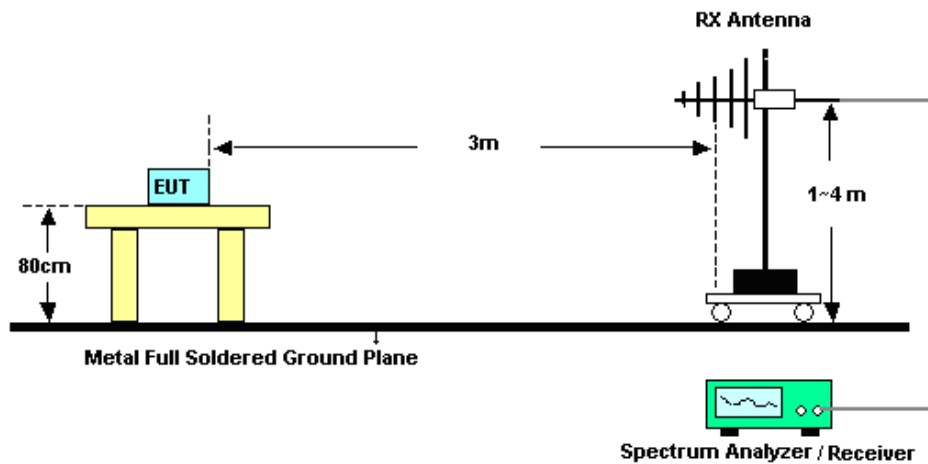

For radiated emissions above 1GHz

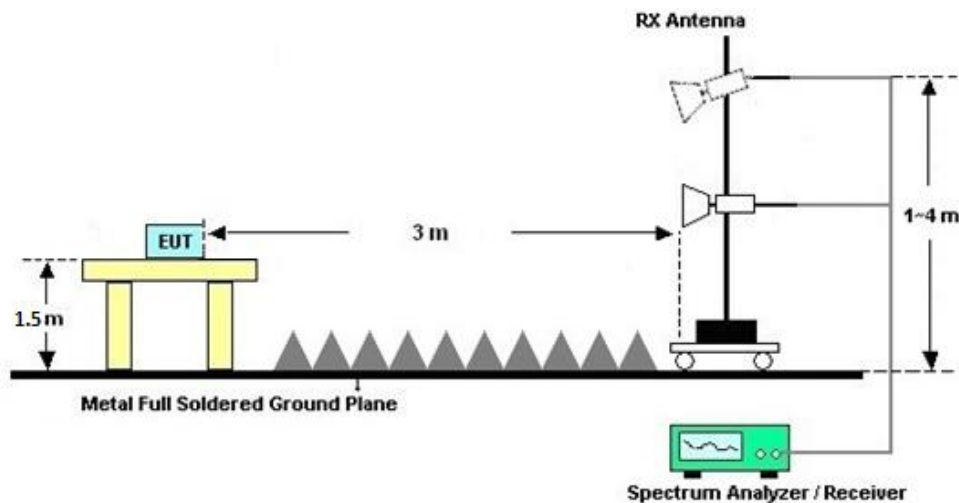

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

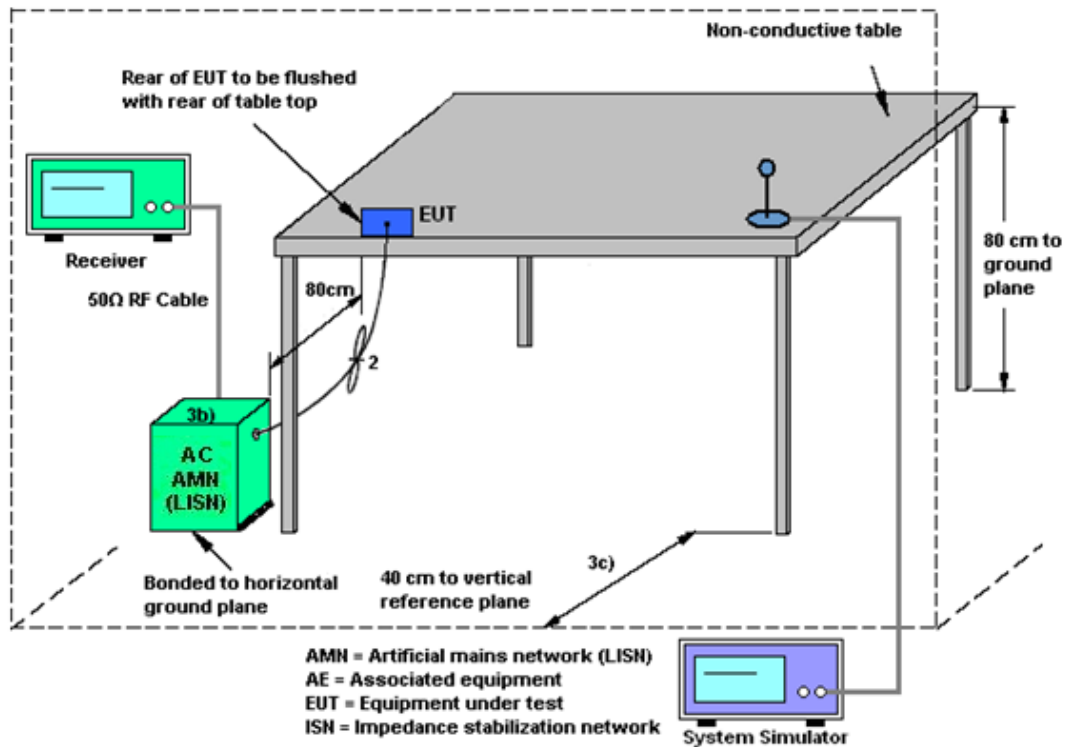

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<CDD Modes>						
	Ant. 8 (dBi)	Ant. 10 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
UNII-1	-1.98	-0.65	-0.65	1.72	0.00	0.00
UNII-2A	-1.66	-0.34	-0.34	2.04	0.00	0.00
UNII-2C	-0.76	-1.15	-0.76	2.06	0.00	0.00
UNII-3	-0.62	-0.32	-0.32	2.54	0.00	0.00



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Ma x 30dBm	Jan. 02, 2024	Aug. 16, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 16, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 16, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 16, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 16, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 16, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 16, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 16, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 16, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5G Hz	Oct. 11, 2023	Aug. 16, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 16, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 16, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 16, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 18, 2024	Jun. 25, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jun. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Jun. 25, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jun. 25, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 10, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 10, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 10, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 10, 2024	Jul. 03, 2025	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2024.8.10	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC <5180 MHz ~ 5240 MHz> MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10		
11a	6Mbps	2	36	5180	0.04	0.03	19.37	18.75	22.08	24.00		-0.65			Pass
11a	6Mbps	2	44	5220	0.04	0.03	19.28	18.64	21.98	24.00		-0.65			Pass
11a	6Mbps	2	48	5240	0.04	0.03	19.33	19.21	22.28	24.00		-0.65			Pass
HT20	MCS0	2	36	5180	0.00	0.00	18.35	17.99	21.18	24.00		-0.65			Pass
HT20	MCS0	2	44	5220	0.00	0.00	18.36	17.82	21.11	24.00		-0.65			Pass
HT20	MCS0	2	48	5240	0.00	0.00	18.31	18.07	21.20	24.00		-0.65			Pass
HT40	MCS0	2	38	5190	0.00	0.00	17.61	17.27	20.45	24.00		-0.65			Pass
HT40	MCS0	2	46	5230	0.00	0.00	17.51	16.94	20.24	24.00		-0.65			Pass
VHT20	MCS0	2	36	5180	0.00	0.00	18.40	18.06	21.24	24.00		-0.65			Pass
VHT20	MCS0	2	44	5220	0.00	0.00	18.40	17.88	21.16	24.00		-0.65			Pass
VHT20	MCS0	2	48	5240	0.00	0.00	18.36	18.12	21.25	24.00		-0.65			Pass
VHT40	MCS0	2	38	5190	0.00	0.00	17.65	17.34	20.51	24.00		-0.65			Pass
VHT40	MCS0	2	46	5230	0.00	0.00	17.56	17.00	20.30	24.00		-0.65			Pass
VHT80	MCS0	2	42	5210	0.00	0.00	17.35	17.13	20.25	24.00		-0.65			Pass
VHT160	MCS0	2	50	5250	0.00	0.00	16.58	15.79	19.21	24.00		-0.65			Pass

TEST RESULTS DATA
Average Power Table

FCC <5180 MHz ~ 5240 MHz> MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
HE20	MCS0	2	36	5180	Full	0.00	0.00	18.48	18.07	21.29	24.00	-0.65		Pass	
HE20	MCS0	2	36	5180	26/0	0.00	0.00	8.72	8.25	11.50	24.00	-0.65		Pass	
HE20	MCS0	2	36	5180	52/37	0.00	0.00	11.86	11.28	14.59	24.00	-0.65		Pass	
HE20	MCS0	2	36	5180	106/53	0.00	0.00	15.37	14.92	18.16	24.00	-0.65		Pass	
HE20	MCS0	2	44	5220	Full	0.00	0.00	18.48	17.95	21.23	24.00	-0.65		Pass	
HE20	MCS0	2	44	5220	26/0	0.00	0.00	9.21	8.52	11.89	24.00	-0.65		Pass	
HE20	MCS0	2	44	5220	52/37	0.00	0.00	11.93	11.06	14.53	24.00	-0.65		Pass	
HE20	MCS0	2	44	5220	106/53	0.00	0.00	15.32	14.76	18.06	24.00	-0.65		Pass	
HE20	MCS0	2	48	5240	Full	0.00	0.00	18.39	18.16	21.29	24.00	-0.65		Pass	
HE20	MCS0	2	48	5240	26/8	0.00	0.00	9.14	8.29	11.75	24.00	-0.65		Pass	
HE20	MCS0	2	48	5240	52/40	0.00	0.00	11.83	11.32	14.59	24.00	-0.65		Pass	
HE20	MCS0	2	48	5240	106/54	0.00	0.00	15.26	14.72	18.01	24.00	-0.65		Pass	
HE40	MCS0	2	38	5190	Full	0.00	0.00	17.71	17.38	20.56	24.00	-0.65		Pass	
HE40	MCS0	2	38	5190	242/61	0.00	0.00	14.86	14.02	17.47	24.00	-0.65		Pass	
HE40	MCS0	2	46	5230	Full	0.00	0.00	17.60	17.04	20.34	24.00	-0.65		Pass	
HE40	MCS0	2	46	5230	242/62	0.00	0.00	14.72	13.89	17.34	24.00	-0.65		Pass	
HE80	MCS0	2	42	5210	Full	0.00	0.00	17.41	17.18	20.31	24.00	-0.65		Pass	
HE80	MCS0	2	42	5210	484/65	0.04	0.04	14.90	14.03	17.50	24.00	-0.65		Pass	
HE160	MCS0	2	50	5250	Full	0.00	0.00	16.60	15.80	19.23	24.00	-0.65		Pass	
HE160	MCS0	2	50	5250	996/67	0.07	0.05	14.25	13.19	16.76	24.00	-0.65		Pass	
HE160	MCS0	2	50	5250	996/68	0.07	0.05	14.52	13.38	17.00	24.00	-0.65		Pass	

TEST RESULTS DATA
Average Power Table

FCC<5260 MHz ~ 5320 MHz>MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
11a	6Mbps	2	52	5260	0.04	0.03	19.57	18.53	22.09	23.77	-0.34					30.00	Pass
11a	6Mbps	2	60	5300	0.04	0.03	19.49	17.98	21.81	23.85	-0.34					30.00	Pass
11a	6Mbps	2	64	5320	0.04	0.03	19.77	18.68	22.27	23.84	-0.34					30.00	Pass
HT20	MCS0	2	52	5260	0.00	0.00	18.17	16.82	20.56	23.98	-0.34					30.00	Pass
HT20	MCS0	2	60	5300	0.00	0.00	18.30	16.63	20.56	23.98	-0.34					30.00	Pass
HT20	MCS0	2	64	5320	0.00	0.00	17.97	16.59	20.34	23.98	-0.34					30.00	Pass
HT40	MCS0	2	54	5270	0.00	0.00	17.64	16.52	20.13	23.98	-0.34					30.00	Pass
HT40	MCS0	2	62	5310	0.00	0.00	17.90	16.38	20.22	23.98	-0.34					30.00	Pass
VHT20	MCS0	2	52	5260	0.00	0.00	18.20	16.87	20.60	23.98	-0.34					30.00	Pass
VHT20	MCS0	2	60	5300	0.00	0.00	18.37	16.69	20.62	23.98	-0.34					30.00	Pass
VHT20	MCS0	2	64	5320	0.00	0.00	18.04	16.64	20.41	23.98	-0.34					30.00	Pass
VHT40	MCS0	2	54	5270	0.00	0.00	17.67	16.56	20.16	23.98	-0.34					30.00	Pass
VHT40	MCS0	2	62	5310	0.00	0.00	17.95	16.43	20.27	23.98	-0.34					30.00	Pass
VHT80	MCS0	2	58	5290	0.00	0.00	17.43	16.56	20.03	23.98	-0.34					30.00	Pass
VHT160	MCS0	2	50	5250	0.00	0.00	16.58	15.79	19.21	23.98	-0.34					30.00	Pass

TEST RESULTS DATA
Average Power Table

FCC <5260 MHz ~ 5320 MHz> MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
HE20	MCS0	2	52	5260	Full	0.00	0.00	18.24	16.96	20.66	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	52	5260	26/0	0.00	0.00	8.25	7.76	11.02	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	52	5260	52/37	0.00	0.00	11.76	10.39	14.14	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	52	5260	106/53	0.00	0.00	15.13	13.76	17.51	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	60	5300	Full	0.00	0.00	18.42	16.77	20.68	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	60	5300	26/0	0.00	0.00	8.86	8.09	11.50	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	60	5300	52/37	0.00	0.00	11.92	9.98	14.07	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	60	5300	106/53	0.00	0.00	15.24	13.82	17.60	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	64	5320	Full	0.00	0.00	18.09	16.73	20.47	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	64	5320	26/8	0.00	0.00	8.09	7.21	10.68	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	64	5320	52/40	0.00	0.00	11.96	10.08	14.13	23.98	-0.34				30.00	Pass	
HE20	MCS0	2	64	5320	106/54	0.00	0.00	14.66	13.18	16.99	23.98	-0.34				30.00	Pass	
HE40	MCS0	2	54	5270	Full	0.00	0.00	17.72	16.59	20.20	23.98	-0.34				30.00	Pass	
HE40	MCS0	2	54	5270	242/61	0.00	0.00	14.95	13.63	17.35	23.98	-0.34				30.00	Pass	
HE40	MCS0	2	62	5310	Full	0.00	0.00	17.98	16.48	20.30	23.98	-0.34				30.00	Pass	
HE40	MCS0	2	62	5310	242/62	0.00	0.00	15.05	13.69	17.43	23.98	-0.34				30.00	Pass	
HE80	MCS0	2	58	5290	Full	0.00	0.00	17.49	16.58	20.07	23.98	-0.34				30.00	Pass	
HE80	MCS0	2	58	5290	484/66	0.04	0.04	14.83	13.19	17.10	23.98	-0.34				30.00	Pass	
HE160	MCS0	2	50	5250	Full	0.00	0.00	16.60	15.80	19.23	23.98	-0.34				30.00	Pass	
HE160	MCS0	2	50	5250	996/67	0.07	0.05	14.25	13.19	16.76	23.98	-0.34				30.00	Pass	
HE160	MCS0	2	50	5250	996/68	0.07	0.05	14.52	13.38	17.00	23.98	-0.34				30.00	Pass	

TEST RESULTS DATA
Average Power Table

FCC <5500 MHz ~ 5720 MHz >MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
11a	6Mbps	2	100	5500	0.04	0.03	19.62	18.48	22.10	23.83		-0.76			30.00	Pass	
11a	6Mbps	2	116	5580	0.04	0.03	19.85	18.73	22.34	23.79		-0.76			30.00	Pass	
11a	6Mbps	2	140	5700	0.04	0.03	19.52	18.74	22.16	23.81		-0.76			30.00	Pass	
HT20	MCS0	2	100	5500	0.00	0.00	18.19	16.80	20.56	23.98		-0.76			30.00	Pass	
HT20	MCS0	2	116	5580	0.00	0.00	18.28	17.26	20.81	23.98		-0.76			30.00	Pass	
HT20	MCS0	2	140	5700	0.00	0.00	18.30	17.85	21.09	23.98		-0.76			30.00	Pass	
HT40	MCS0	2	102	5510	0.00	0.00	17.44	16.28	19.91	23.98		-0.76			30.00	Pass	
HT40	MCS0	2	110	5550	0.00	0.00	17.48	16.36	19.97	23.98		-0.76			30.00	Pass	
HT40	MCS0	2	134	5670	0.00	0.00	17.81	17.18	20.52	23.98		-0.76			30.00	Pass	
VHT20	MCS0	2	100	5500	0.00	0.00	18.26	16.86	20.63	23.98		-0.76			30.00	Pass	
VHT20	MCS0	2	116	5580	0.00	0.00	18.32	17.31	20.85	23.98		-0.76			30.00	Pass	
VHT20	MCS0	2	140	5700	0.00	0.00	18.37	17.89	21.15	23.98		-0.76			30.00	Pass	
VHT40	MCS0	2	102	5510	0.00	0.00	17.50	16.35	19.97	23.98		-0.76			30.00	Pass	
VHT40	MCS0	2	110	5550	0.00	0.00	17.55	16.42	20.03	23.98		-0.76			30.00	Pass	
VHT40	MCS0	2	134	5670	0.00	0.00	17.86	17.20	20.55	23.98		-0.76			30.00	Pass	
VHT80	MCS0	2	106	5530	0.00	0.00	17.42	16.45	19.97	23.98		-0.76			30.00	Pass	
VHT80	MCS0	2	122	5610	0.00	0.00	17.39	16.94	20.18	23.98		-0.76			30.00	Pass	
VHT160	MCS0	2	114	5570	0.00	0.00	16.93	15.95	19.48	23.98		-0.76			30.00	Pass	

FCC U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
11a	6Mbps	2	144	5720	0.04	0.03	19.63	19.15	22.41	23.80	-0.76					30.00	Pass
HT20	MCS0	2	144	5720	0.00	0.00	18.45	18.36	21.42	23.98	-0.76					30.00	Pass
HT40	MCS0	2	142	5710	0.00	0.00	17.48	17.05	20.28	23.98	-0.76					30.00	Pass
VHT20	MCS0	2	144	5720	0.00	0.00	18.50	18.40	21.46	23.98	-0.76					30.00	Pass
VHT40	MCS0	2	142	5710	0.00	0.00	17.54	17.08	20.33	23.98	-0.76					30.00	Pass
VHT80	MCS0	2	138	5690	0.00	0.00	17.27	16.89	20.09	23.98	-0.76					30.00	Pass

TEST RESULTS DATA
Average Power Table

FCC <5500 MHz ~ 5720 MHz >MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
HE20	MCS0	2	100	5500	Full	0.00	0.00	18.18	16.81	20.56	23.98		-0.76				30.00	Pass
HE20	MCS0	2	100	5500	26/0	0.00	0.00	7.85	7.25	10.57	23.98		-0.76				30.00	Pass
HE20	MCS0	2	100	5500	52/37	0.00	0.00	11.38	10.25	13.86	23.98		-0.76				30.00	Pass
HE20	MCS0	2	100	5500	106/53	0.00	0.00	14.86	13.18	17.11	23.98		-0.76				30.00	Pass
HE20	MCS0	2	116	5580	Full	0.00	0.00	18.24	17.27	20.79	23.98		-0.76				30.00	Pass
HE20	MCS0	2	116	5580	26/0	0.00	0.00	8.25	7.52	10.91	23.98		-0.76				30.00	Pass
HE20	MCS0	2	116	5580	52/37	0.00	0.00	11.72	10.22	14.04	23.98		-0.76				30.00	Pass
HE20	MCS0	2	116	5580	106/53	0.00	0.00	14.78	13.86	17.35	23.98		-0.76				30.00	Pass
HE20	MCS0	2	140	5700	Full	0.00	0.00	18.28	17.83	21.07	23.98		-0.76				30.00	Pass
HE20	MCS0	2	140	5700	26/8	0.00	0.00	8.83	7.85	11.38	23.98		-0.76				30.00	Pass
HE20	MCS0	2	140	5700	52/40	0.00	0.00	11.96	10.88	14.46	23.98		-0.76				30.00	Pass
HE20	MCS0	2	140	5700	106/54	0.00	0.00	15.36	14.39	17.91	23.98		-0.76				30.00	Pass
HE40	MCS0	2	102	5510	Full	0.00	0.00	17.56	16.38	20.02	23.98		-0.76				30.00	Pass
HE40	MCS0	2	102	5510	242/61	0.00	0.00	14.75	13.36	17.12	23.98		-0.76				30.00	Pass
HE40	MCS0	2	110	5550	Full	0.00	0.00	17.58	16.45	20.06	23.98		-0.76				30.00	Pass
HE40	MCS0	2	110	5550	242/61	0.00	0.00	14.77	13.32	17.12	23.98		-0.76				30.00	Pass
HE40	MCS0	2	134	5670	Full	0.00	0.00	17.90	17.26	20.60	23.98		-0.76				30.00	Pass
HE40	MCS0	2	134	5670	242/62	0.00	0.00	15.45	14.36	17.95	23.98		-0.76				30.00	Pass
HE80	MCS0	2	106	5530	Full	0.00	0.00	17.48	16.50	20.03	23.98		-0.76				30.00	Pass
HE80	MCS0	2	106	5530	484/65	0.04	0.04	14.75	13.06	17.00	23.98		-0.76				30.00	Pass
HE80	MCS0	2	122	5610	Full	0.00	0.00	17.42	16.97	20.21	23.98		-0.76				30.00	Pass
HE80	MCS0	2	122	5610	484/66	0.04	0.04	14.82	13.43	17.20	23.98		-0.76				30.00	Pass
HE160	MCS0	2	114	5570	Full	0.00	0.00	16.98	15.98	19.52	23.98		-0.76				30.00	Pass
HE160	MCS0	2	114	5570	996/67	0.07	0.05	14.28	12.89	16.65	23.98		-0.76				30.00	Pass
HE160	MCS0	2	114	5570	996/68	0.07	0.05	14.93	13.23	17.17	23.98		-0.76				30.00	Pass

FCC U-NII-2C straddle channel MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10				
HE20	MCS0	2	144	5720	Full	0.00	0.00	18.46	18.34	21.41	23.98	-0.76				30.00	Pass	
HE20	MCS0	2	144	5720	26/8	0.00	0.00	8.44	7.45	10.98	23.98	-0.76				30.00	Pass	
HE20	MCS0	2	144	5720	52/40	0.00	0.00	11.18	10.21	13.73	23.98	-0.76				30.00	Pass	
HE20	MCS0	2	144	5720	106/54	0.00	0.00	14.62	13.82	17.25	23.98	-0.76				30.00	Pass	
HE40	MCS0	2	142	5710	Full	0.00	0.00	17.58	17.11	20.36	23.98	-0.76				30.00	Pass	
HE40	MCS0	2	142	5710	242/62	0.00	0.00	15.06	14.17	17.65	23.98	-0.76				30.00	Pass	
HE80	MCS0	2	138	5690	Full	0.00	0.00	17.32	16.92	20.13	23.98	-0.76				30.00	Pass	
HE80	MCS0	2	138	5690	484/66	0.04	0.04	14.32	13.30	16.85	23.98	-0.76				30.00	Pass	

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz>MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	149	5745	0.04	0.03	19.62	19.25	22.45	30.00		-0.32		Pass
11a	6Mbps	2	157	5785	0.04	0.03	19.62	18.61	22.16	30.00		-0.32		Pass
11a	6Mbps	2	165	5825	0.04	0.03	19.64	18.94	22.32	30.00		-0.32		Pass
HT20	MCS0	2	149	5745	0.00	0.00	18.54	18.45	21.51	30.00		-0.32		Pass
HT20	MCS0	2	157	5785	0.00	0.00	18.43	17.65	21.07	30.00		-0.32		Pass
HT20	MCS0	2	165	5825	0.00	0.00	18.55	18.07	21.33	30.00		-0.32		Pass
HT40	MCS0	2	151	5755	0.00	0.00	17.53	16.64	20.12	30.00		-0.32		Pass
HT40	MCS0	2	159	5795	0.00	0.00	17.53	17.03	20.30	30.00		-0.32		Pass
VHT20	MCS0	2	149	5745	0.00	0.00	18.58	18.52	21.56	30.00		-0.32		Pass
VHT20	MCS0	2	157	5785	0.00	0.00	18.50	17.70	21.13	30.00		-0.32		Pass
VHT20	MCS0	2	165	5825	0.00	0.00	18.59	18.14	21.38	30.00		-0.32		Pass
VHT40	MCS0	2	151	5755	0.00	0.00	17.55	16.66	20.14	30.00		-0.32		Pass
VHT40	MCS0	2	159	5795	0.00	0.00	17.59	17.09	20.36	30.00		-0.32		Pass
VHT80	MCS0	2	155	5775	0.00	0.00	17.29	16.30	19.83	30.00		-0.32		Pass

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz> MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
HE20	MCS0	2	149	5745	Full	0.00	0.00	18.42	18.37	21.41	30.00		-0.32		Pass
HE20	MCS0	2	149	5745	26/0	0.00	0.00	7.76	7.61	10.70	30.00		-0.32		Pass
HE20	MCS0	2	149	5745	52/37	0.00	0.00	10.88	10.20	13.56	30.00		-0.32		Pass
HE20	MCS0	2	149	5745	106/53	0.00	0.00	14.18	13.56	16.89	30.00		-0.32		Pass
HE20	MCS0	2	157	5785	Full	0.00	0.00	18.32	17.58	20.98	30.00		-0.32		Pass
HE20	MCS0	2	157	5785	26/0	0.00	0.00	7.68	7.35	10.53	30.00		-0.32		Pass
HE20	MCS0	2	157	5785	52/37	0.00	0.00	11.24	10.08	13.71	30.00		-0.32		Pass
HE20	MCS0	2	157	5785	106/53	0.00	0.00	14.02	13.14	16.61	30.00		-0.32		Pass
HE20	MCS0	2	165	5825	Full	0.00	0.00	18.44	17.99	21.23	30.00		-0.32		Pass
HE20	MCS0	2	165	5825	26/8	0.00	0.00	8.25	7.83	11.06	30.00		-0.32		Pass
HE20	MCS0	2	165	5825	52/40	0.00	0.00	11.07	10.23	13.68	30.00		-0.32		Pass
HE20	MCS0	2	165	5825	106/54	0.00	0.00	14.72	13.98	17.38	30.00		-0.32		Pass
HE40	MCS0	2	151	5755	Full	0.00	0.00	17.59	16.70	20.18	30.00		-0.32		Pass
HE40	MCS0	2	151	5755	242/61	0.00	0.00	14.86	13.76	17.36	30.00		-0.32		Pass
HE40	MCS0	2	159	5795	Full	0.00	0.00	17.65	17.15	20.42	30.00		-0.32		Pass
HE40	MCS0	2	159	5795	242/62	0.00	0.00	15.02	13.69	17.42	30.00		-0.32		Pass
HE80	MCS0	2	155	5775	Full	0.00	0.00	17.31	16.32	19.85	30.00		-0.32		Pass
HE80	MCS0	2	155	5775	484/65	0.04	0.04	14.95	13.52	17.31	30.00		-0.32		Pass
HE80	MCS0	2	155	5775	484/66	0.04	0.04	14.95	13.70	17.38	30.00		-0.32		Pass



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]
11A-CDD	Ant8	5180	21.06	5169.40	5190.46
	Ant10	5180	19.25	5170.30	5189.55
	Ant8	5220	20.06	5209.69	5229.74
	Ant10	5220	19.06	5210.54	5229.60
	Ant8	5240	20.44	5229.69	5250.12
	Ant10	5240	20.58	5229.64	5250.22
	Ant8	5260	19.72	5249.73	5269.46
	Ant10	5260	18.91	5250.64	5269.55
	Ant8	5300	19.72	5289.78	5309.50
	Ant10	5300	19.29	5290.35	5309.65
	Ant8	5320	20.01	5309.69	5329.70
	Ant10	5320	19.25	5310.35	5329.60
	Ant8	5500	19.20	5490.30	5509.50
	Ant10	5500	19.25	5490.35	5509.60
	Ant8	5580	19.68	5569.83	5589.50
	Ant10	5580	19.01	5570.59	5589.60
	Ant8	5700	19.10	5690.35	5709.46
	Ant10	5700	19.29	5690.35	5709.65
	Ant8	5720	19.06	5710.40	5729.46
	Ant10	5720	19.34	5710.35	5729.70
	Ant8	5745	19.01	5735.35	5754.36
	Ant10	5745	19.29	5735.35	5754.65
	Ant8	5785	19.10	5775.40	5794.50
	Ant10	5785	19.20	5775.35	5794.55
	Ant8	5825	19.10	5815.35	5834.46
	Ant10	5825	19.29	5815.35	5834.65
11AC20MIMO	Ant8	5180	20.25	5170.02	5190.27
	Ant10	5180	20.49	5169.64	5190.12
	Ant8	5220	20.58	5209.73	5230.31
	Ant10	5220	20.01	5209.97	5229.98
	Ant8	5240	20.77	5229.88	5250.65
	Ant10	5240	20.15	5229.92	5250.08
	Ant8	5260	20.10	5249.92	5270.03
	Ant10	5260	20.20	5249.88	5270.08
	Ant8	5300	20.20	5289.88	5310.08
	Ant10	5300	19.96	5289.92	5309.89
	Ant8	5320	20.44	5309.97	5330.41
	Ant10	5320	20.20	5309.92	5330.12
	Ant8	5500	20.72	5489.78	5510.51
	Ant10	5500	20.15	5489.92	5510.08
	Ant8	5580	20.39	5569.97	5590.36
	Ant10	5580	20.30	5569.97	5590.27
	Ant8	5700	20.44	5689.83	5710.27



	Ant10	5700	20.20	5689.78	5709.98
	Ant8	5720	20.15	5710.07	5730.22
	Ant10	5720	20.30	5710.02	5730.31
	Ant8	5745	20.20	5734.92	5755.12
	Ant10	5745	20.20	5734.88	5755.08
	Ant8	5785	20.34	5774.73	5795.08
	Ant10	5785	20.06	5775.02	5795.08
	Ant8	5825	20.10	5814.97	5835.08
	Ant10	5825	20.01	5815.02	5835.03
11AC40MIMO	Ant8	5190	39.83	5170.04	5209.87
	Ant10	5190	39.73	5170.13	5209.87
	Ant8	5230	39.83	5210.13	5249.96
	Ant10	5230	39.64	5210.13	5249.77
	Ant8	5270	40.02	5250.04	5290.06
	Ant10	5270	39.83	5250.23	5290.06
	Ant8	5310	40.50	5289.85	5330.34
	Ant10	5310	39.73	5290.13	5329.87
	Ant8	5510	39.73	5490.13	5529.87
	Ant10	5510	39.83	5490.13	5529.96
	Ant8	5550	39.73	5530.23	5569.96
	Ant10	5550	40.21	5529.85	5570.06
	Ant8	5670	39.73	5650.13	5689.87
	Ant10	5670	39.73	5650.23	5689.96
	Ant8	5710	39.92	5690.13	5730.06
	Ant10	5710	39.92	5690.13	5730.06
	Ant8	5755	39.83	5735.13	5774.96
	Ant10	5755	39.83	5735.04	5774.87
	Ant8	5795	40.30	5774.85	5815.15
	Ant10	5795	39.83	5775.13	5814.96
11AC80MIMO	Ant8	5210	82.32	5168.74	5251.07
	Ant10	5210	81.75	5169.12	5250.88
	Ant8	5290	82.52	5248.93	5331.45
	Ant10	5290	81.94	5249.12	5331.07
	Ant8	5530	81.94	5489.12	5571.07
	Ant10	5530	81.75	5488.93	5570.69
	Ant8	5610	81.56	5569.31	5650.88
	Ant10	5610	81.94	5569.31	5651.26
	Ant8	5690	81.94	5649.31	5731.26
	Ant10	5690	81.56	5649.31	5730.88
	Ant8	5775	81.94	5734.12	5816.07
	Ant10	5775	81.94	5734.12	5816.07
11AC160MIMO	Ant8	5250	165.03	5167.48	5332.52
	Ant10	5250	164.27	5167.87	5332.13
	Ant8	5570	164.65	5487.87	5652.52
	Ant10	5570	165.03	5487.48	5652.52
11AX20MIMO	Ant8	5180	21.53	5169.69	5191.22
	Ant10	5180	21.06	5169.45	5190.51
	Ant8	5220	21.01	5209.45	5230.46
	Ant10	5220	20.91	5209.45	5230.36
	Ant8	5240	21.53	5229.30	5250.84



	Ant10	5240	20.91	5229.54	5250.46
	Ant8	5260	21.15	5249.49	5270.65
	Ant10	5260	21.15	5249.59	5270.74
	Ant8	5300	21.87	5289.11	5310.98
	Ant10	5300	20.91	5289.49	5310.41
	Ant8	5320	21.11	5309.35	5330.46
	Ant10	5320	21.25	5309.40	5330.65
	Ant8	5500	21.11	5489.59	5510.70
	Ant10	5500	20.87	5489.54	5510.41
	Ant8	5580	21.01	5569.49	5590.51
	Ant10	5580	20.82	5569.54	5590.36
	Ant8	5700	21.15	5689.40	5710.55
	Ant10	5700	21.11	5689.54	5710.65
	Ant8	5720	21.20	5709.45	5730.65
	Ant10	5720	21.25	5709.30	5730.55
	Ant8	5745	21.15	5734.35	5755.51
	Ant10	5745	21.01	5734.49	5755.51
	Ant8	5785	21.15	5774.40	5795.55
	Ant10	5785	20.91	5774.54	5795.46
	Ant8	5825	21.15	5814.49	5835.65
	Ant10	5825	21.44	5814.40	5835.84
11AX40MIMO	Ant8	5190	40.50	5169.85	5210.34
	Ant10	5190	40.11	5169.94	5210.06
	Ant8	5230	40.59	5209.56	5250.15
	Ant10	5230	40.40	5209.85	5250.25
	Ant8	5270	40.78	5249.56	5290.34
	Ant10	5270	40.50	5249.85	5290.34
	Ant8	5310	40.40	5289.75	5330.15
	Ant10	5310	40.59	5289.56	5330.15
	Ant8	5510	40.50	5489.75	5530.25
	Ant10	5510	40.69	5489.66	5530.34
	Ant8	5550	40.50	5529.75	5570.25
	Ant10	5550	40.30	5529.85	5570.15
	Ant8	5670	40.21	5649.94	5690.15
	Ant10	5670	40.59	5649.75	5690.34
	Ant8	5710	40.59	5689.66	5730.25
	Ant10	5710	41.07	5689.37	5730.44
	Ant8	5755	40.78	5734.66	5775.44
	Ant10	5755	40.59	5734.75	5775.34
	Ant8	5795	40.78	5774.66	5815.44
	Ant10	5795	40.69	5774.75	5815.44
11AX80MIMO	Ant8	5210	81.75	5169.31	5251.07
	Ant10	5210	81.56	5169.31	5250.88
	Ant8	5290	82.71	5248.93	5331.64
	Ant10	5290	82.32	5248.93	5331.26
	Ant8	5530	82.52	5488.74	5571.26
	Ant10	5530	81.56	5489.12	5570.69
	Ant8	5610	82.13	5569.12	5651.26
	Ant10	5610	82.32	5569.12	5651.45
	Ant8	5690	82.13	5649.31	5731.45



	Ant10	5690	82.13	5648.93	5731.07
	Ant8	5775	82.13	5734.12	5816.26
	Ant10	5775	82.32	5733.93	5816.26
11AX160MIMO	Ant8	5250	164.65	5167.48	5332.13
	Ant10	5250	164.65	5168.25	5332.90
	Ant8	5570	164.65	5488.25	5652.90
	Ant10	5570	165.03	5487.48	5652.52



Test Graphs

