

FCC RF Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A2
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 90(R)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 24, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Feature of Equipment Under Test	5
1.3 Maximum ERP Power, and Emission Designator	6
1.4 Testing Site	7
1.5 Test Software	8
1.6 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Conducted Output Power and ERP	13
3.3 Peak-to-Average Ratio	14
3.4 Occupied Bandwidth	15
3.5 Conducted Band Edge Measurement	16
3.6 Emission Mask	17
3.7 Conducted Spurious Emission Measurement	18
3.8 Frequency Stability Measurement	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505M	Rev. 01	Initial issue of report	Sep. 05, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.2	§2.1046	Conducted Output Power	—	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.3	-	Peak-to-Average Ratio	—	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	—	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)(3)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.6	§2.1051 §90.210(n)	Emission Mask	Mask B	PASS	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
4.4	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 13.48 dB at 1584.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI Code	Conducted: 352991990028965/352991990029377 Radiation: 352991990029096/352991990029708
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. 5G NR n14 supports SA mode only.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	5G NR n14: 788 MHz ~ 798 MHz
Rx Frequency	5G NR n14: 758 MHz ~ 768 MHz
Bandwidth	n14: 5MHz / 10MHz
SCS	15kHz
Antenna Gain	Ant.0: -2.00 dBi Ant.1: -2.87 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Note: The maximum ERP is calculated from max output power and max antenna gain, so only the maximum ERP of Antenna 0 is shown in the report.

1.3 Maximum ERP Power, and Emission Designator

5G NR n14		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	790.5~795.5	0.1023	4M47G7D	0.0800	4M49W7D
10	793	0.1026	9M27G7D	0.0785	9M28W7D

1.4 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Note: Test data subcontracted: Conducted test cases in section 3.2~3.8 of this report.

1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 90(R)
- ♦ ANSI C63.26
- ♦ KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X/Y-Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel			
		1.4	3	5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output	14	-	-	V		-	-		V	V			V			V	V	V	
Power	14	-	-	V	V	-	-	V	V	V	V	V	V		V		V		
Peak-to-Average Ratio	14	-	-	V	V	-	-	V	V						V		V		
26dB and 99% Bandwidth	14	-	-	V	V	-	-		V	V	V	V			V		V		
Conducted	14	-	-	V		-	-	V	V				V		V	V		V	
Band Edge	14	-	-		V	-	-	V	V				V		V		V		
Emission Mask	14	-	-	V		-	-	V	V				V		V	V	V	V	
	14	-	-		V	-	-	V	V				V		V		V		
Conducted	14	-	-	V		-	-	V	V				V			V	V	V	
Spurious	14	-	-		V	-	-	V	V				V				V		
Emission																			
Frequency Stability	14	-	-	V	V	-	-		V						V		V		
E.R.P	14	-	-	V		-	-		V	V			V			V	V	V	
	14	-	-		V	-	-	V	V	V	V	V	V		V		V		
Radiated Spurious Emission	14	Worst Case																V	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.5V.; High Voltage =4.41V																		

2.2 Connection Diagram of Test System

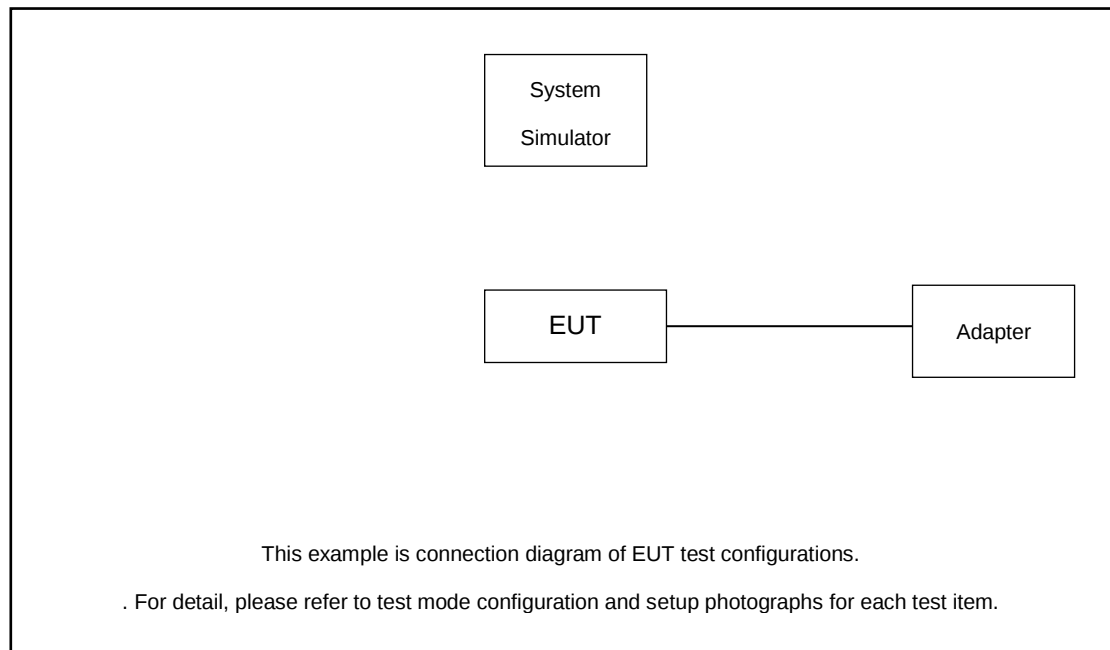

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

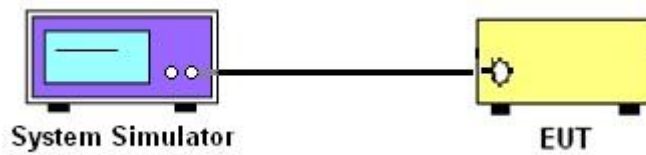

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

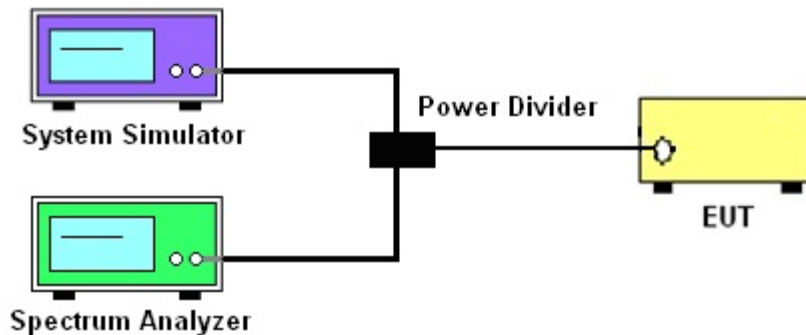

3.1.4 Frequency Stability

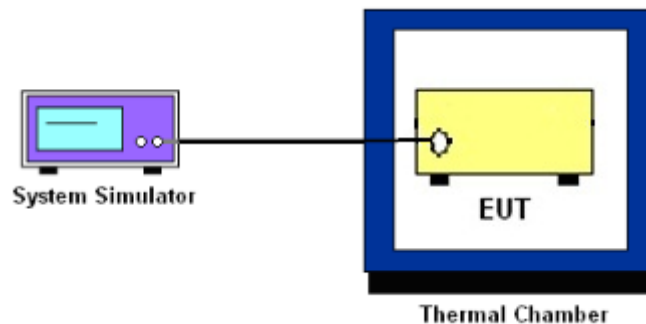

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP

3.2.1 Description of the Conducted Output Power Measurement and ERP

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge Measurement

3.5.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

3.6 Emission Mask

3.6.1 Description of Emission Mask

<Emission Mask B>.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.7 Conducted Spurious Emission Measurement

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and base station via power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- $[43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 1.25 ppm of the center frequency.

3.8.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

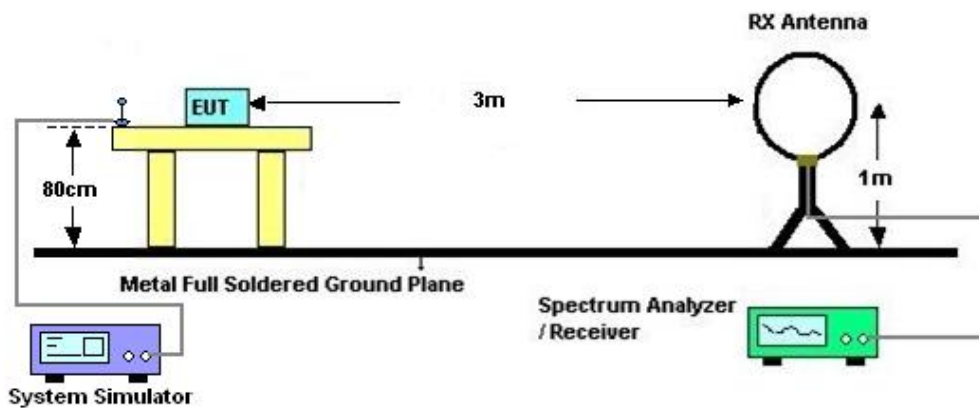

4.2.2 For radiated test from 30MHz to 1GHz

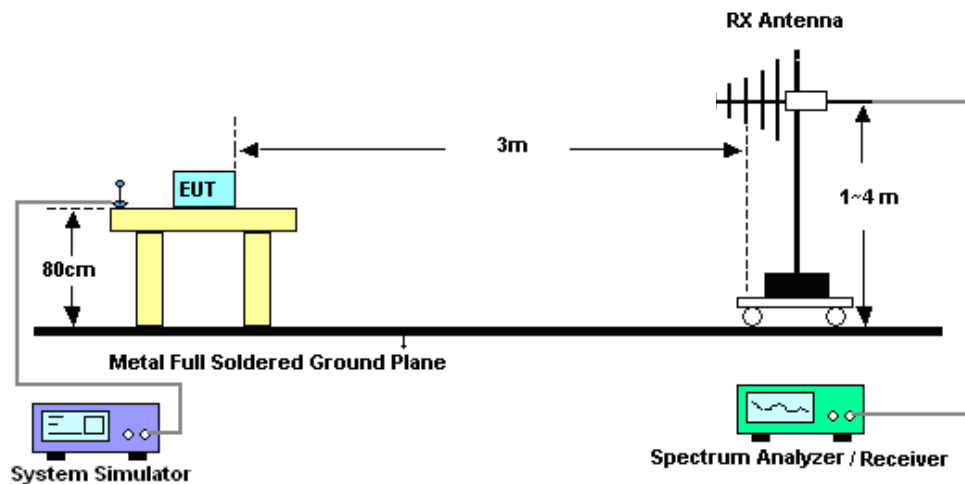

4.2.3 For radiated test above 1GHz

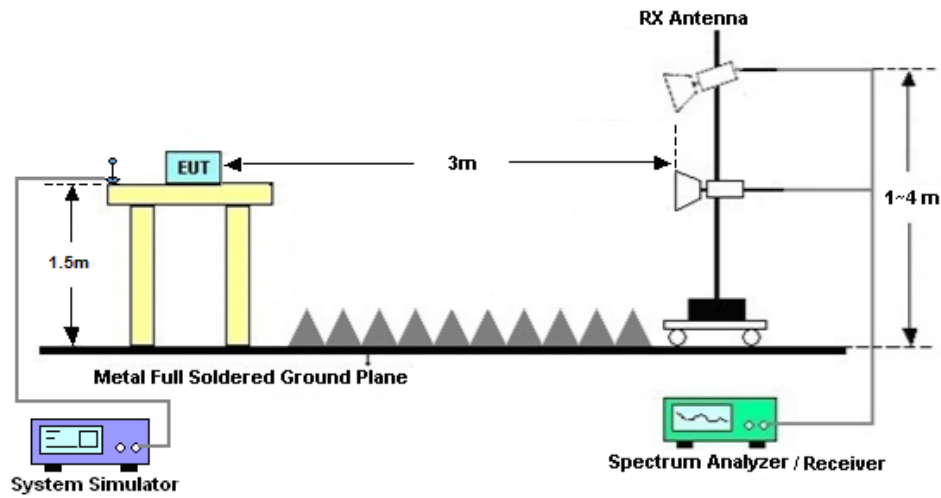

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 24, 2024~ Jul. 05, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.0 077	0.4GHz~26.5GHz	Dec. 25, 2023	Jun. 24, 2024~ Jul. 05, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H20140818 03	-40~+150°C	Jul. 04, 2025	Jun. 24, 2024~ Jul. 05, 2024	Jul. 03, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H20140818 03	-40~+150°C	Jul. 03, 2024		Jul. 02, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747107 9	10Hz-44G,MAX 30dB	Oct. 10, 2023	Jul. 05, 2024~ Aug. 21, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	Apr. 18, 2024	Jul. 05, 2024~ Aug. 21, 2024	Apr. 17, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Jul. 05, 2024~ Aug. 21, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 05, 2024~ Aug. 21, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	Jul. 05, 2024~ Aug. 21, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Jul. 05, 2024~ Aug. 21, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40 GA	060728	18~40GHz	Jan. 02, 2024	Jul. 05, 2024~ Aug. 21, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18 GA	060840	1Ghz-18Ghz	Oct. 11, 2023	Jul. 05, 2024~ Aug. 21, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18 GA	060892	1Ghz-18Ghz	Oct. 11, 2023	Jul. 05, 2024~ Aug. 21, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F10409000 4	N/A	NCR	Jul. 05, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 05, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 05, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	± 2.83 dB
--	---------------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	± 2.83 dB
--	---------------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	± 2.82 dB
--	---------------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	LiangHuaCong	Temperature :	24~26°C
		Relative Humidity :	50~53%




Software Version: 23.06.1602

FR1 N14


Transmitter Conducted Output Power And ERP, ($G_T - L_C$)=-2dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@1	24.08	19.93	0.0984
14	15	5	158100	790.5	DFT-s-OFDM 16 QAM	1@1	23.11	18.96	0.0787
14	15	5	158600	793	DFT-s-OFDM QPSK	1@1	24.02	19.87	0.0971
14	15	5	158600	793	DFT-s-OFDM 16 QAM	1@1	23.07	18.92	0.0780
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@1	24.25	20.1	0.1023
14	15	5	159100	795.5	DFT-s-OFDM 16 QAM	1@1	23.18	19.03	0.0800
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	25@12	24.06	19.91	0.0979
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	1@1	23.96	19.81	0.0957
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	1@50	23.95	19.8	0.0955
14	15	10	158600	793	DFT-s-OFDM QPSK	25@12	24.01	19.86	0.0968
14	15	10	158600	793	DFT-s-OFDM QPSK	1@1	24.26	20.11	0.1026
14	15	10	158600	793	DFT-s-OFDM QPSK	1@50	24.02	19.87	0.0971
14	15	10	158600	793	DFT-s-OFDM 16 QAM	25@12	22.96	18.81	0.0760
14	15	10	158600	793	DFT-s-OFDM 16 QAM	1@1	23.1	18.95	0.0785
14	15	10	158600	793	DFT-s-OFDM 16 QAM	1@50	23.04	18.89	0.0774
14	15	10	158600	793	DFT-s-OFDM 64 QAM	25@12	21.57	17.42	0.0552
14	15	10	158600	793	DFT-s-OFDM 64 QAM	1@1	21.63	17.48	0.0560
14	15	10	158600	793	DFT-s-OFDM 64 QAM	1@50	21.53	17.38	0.0547
14	15	10	158600	793	DFT-s-OFDM 256 QAM	25@12	19.45	15.3	0.0339
14	15	10	158600	793	DFT-s-OFDM 256 QAM	1@1	19.1	14.95	0.0313
14	15	10	158600	793	DFT-s-OFDM 256 QAM	1@50	19.28	15.13	0.0326
14	15	10	158600	793	CP-OFDM QPSK	26@13	22.48	18.33	0.0681
14	15	10	158600	793	CP-OFDM QPSK	1@1	22.59	18.44	0.0698
14	15	10	158600	793	CP-OFDM QPSK	1@50	22.6	18.45	0.0700




Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0000	PASS	NV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0079	PASS	LV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0069	PASS	HV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0073	PASS	-30℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0067	PASS	-20℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0121	PASS	-10℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0018	PASS	0℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0006	PASS	10℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0000	PASS	20℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0107	PASS	30℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0009	PASS	40℃
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0120	PASS	50℃




Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0000	PASS	NV
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0045	PASS	LV
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0019	PASS	HV
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0019	PASS	-30℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0084	PASS	-20℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0032	PASS	-10℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0030	PASS	0℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0107	PASS	10℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0000	PASS	20℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	30℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0015	PASS	40℃
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	0.0019	PASS	50℃



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
14	15	5	158600	793.0	DFT-s-OFDM PI/2 BPSK	25@0	3.85	13	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	5.68	13	PASS
14	15	10	158600	793.0	DFT-s-OFDM PI/2 BPSK	50@0	4.26	13	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	5.77	13	PASS



**N14(5M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH**



**N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH**




**N14(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH**




**N14(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH**





Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
14	15	5	158600	793.0	CP-OFDM QPSK	25@0	4.4688	4.967
14	15	5	158600	793.0	CP-OFDM 16 QAM	25@0	4.4894	4.94
14	15	5	158600	793.0	CP-OFDM 64 QAM	25@0	4.4612	4.859
14	15	5	158600	793.0	CP-OFDM 256 QAM	25@0	4.4811	4.898
14	15	10	158600	793.0	CP-OFDM QPSK	52@0	9.2743	9.842
14	15	10	158600	793.0	CP-OFDM 16 QAM	52@0	9.2794	9.83
14	15	10	158600	793.0	CP-OFDM 64 QAM	52@0	9.2708	9.752
14	15	10	158600	793.0	CP-OFDM 256 QAM	52@0	9.277	9.856




**N14(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH**




**N14(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH**

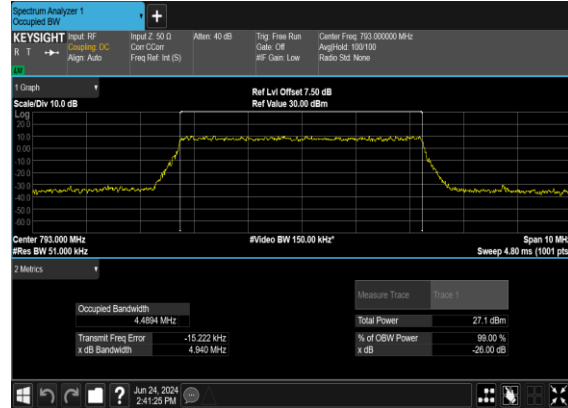


**N14(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH**

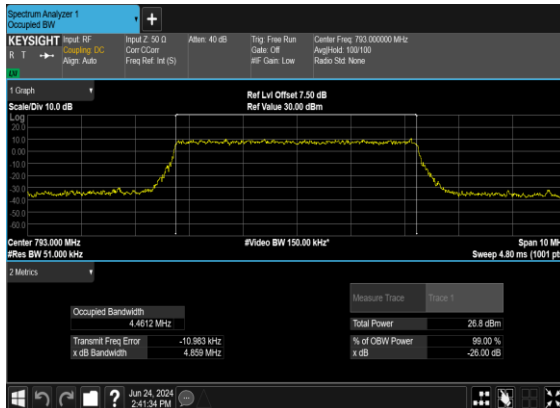


**N14(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH**

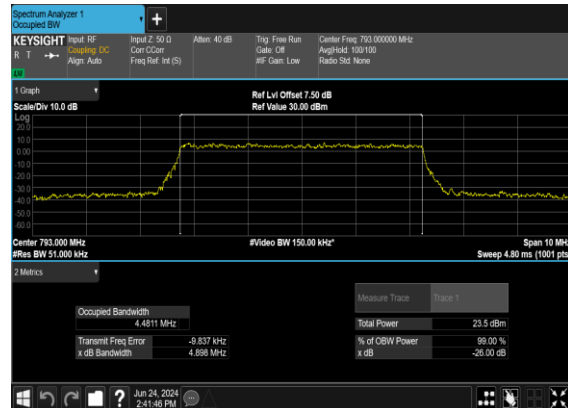




N14(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

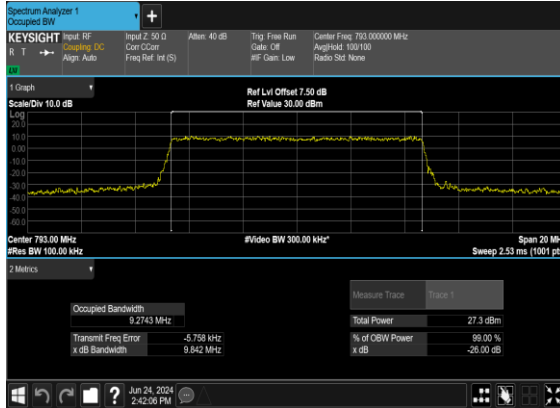


N14(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH




N14(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

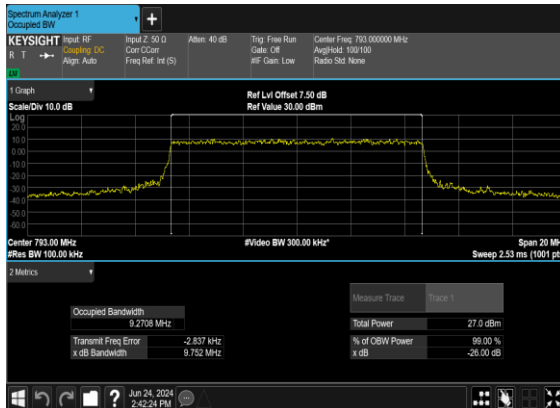


N14(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

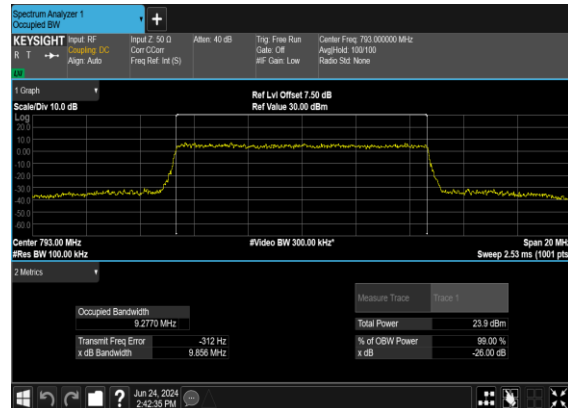


**Emission Mask**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Limit (dBm/MHz)	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




SPORTON LAB.


14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	see graph	PASS




N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

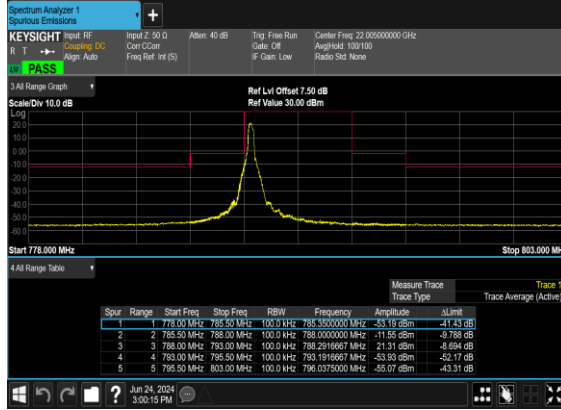


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

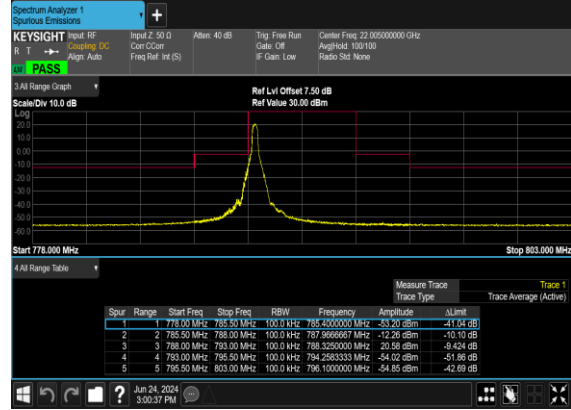


N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Low_CH

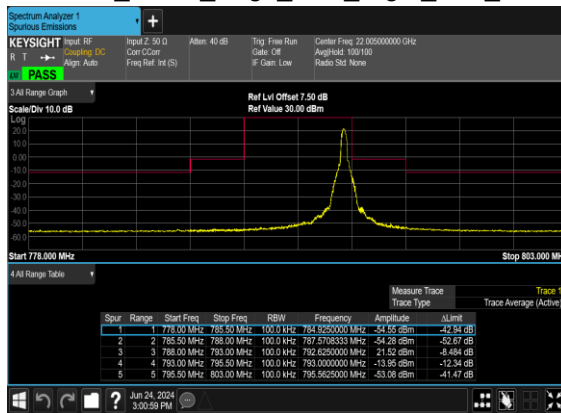


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

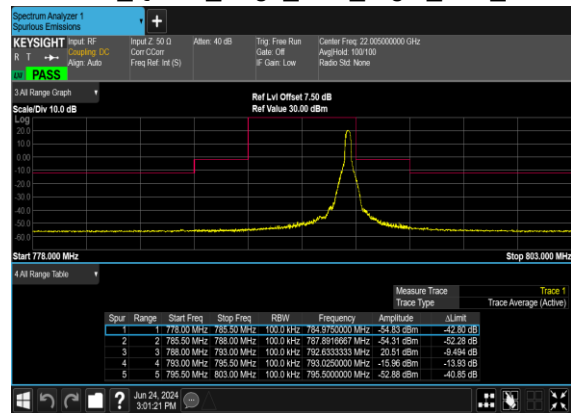





N14(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

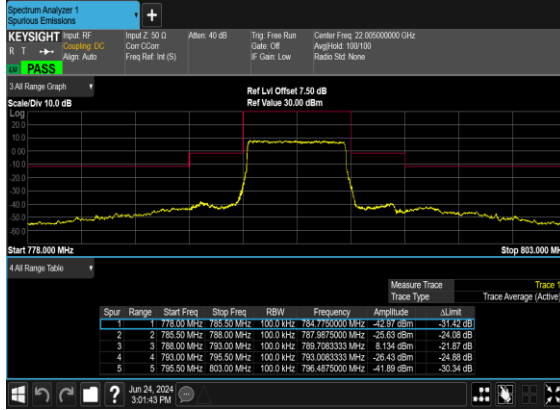


N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

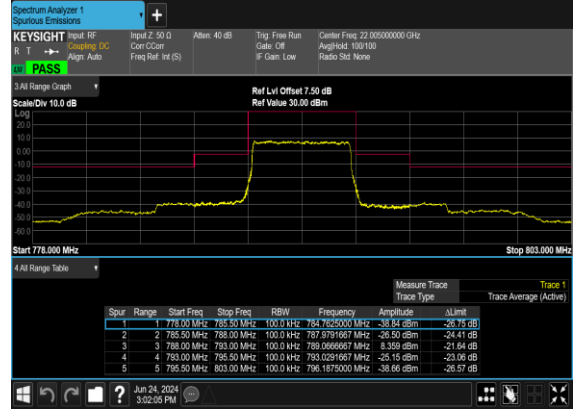


N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

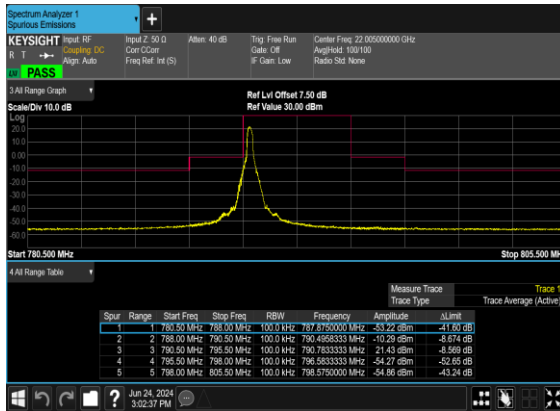


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

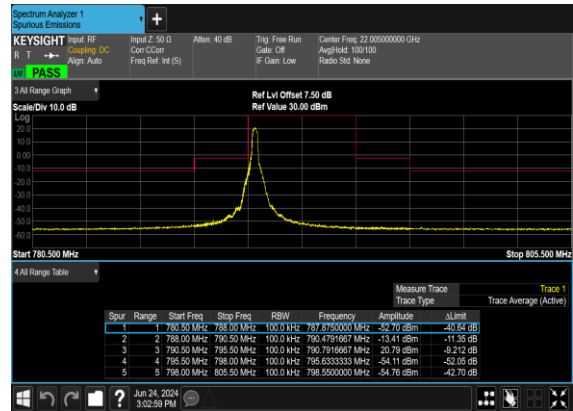





N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH

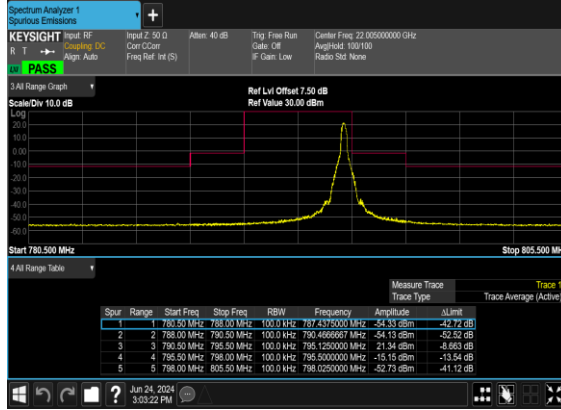


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

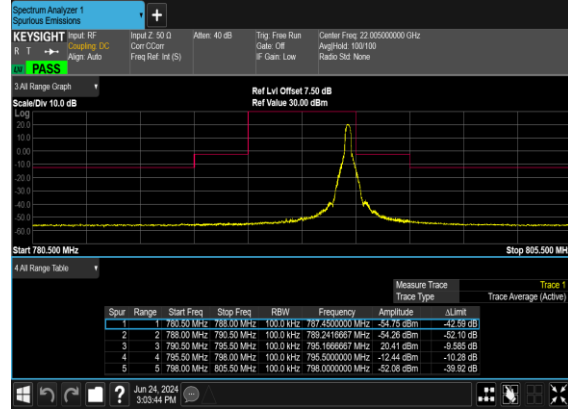


N14(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Mid_CH

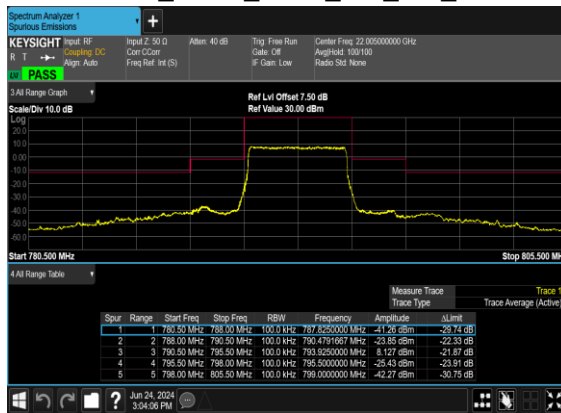


N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

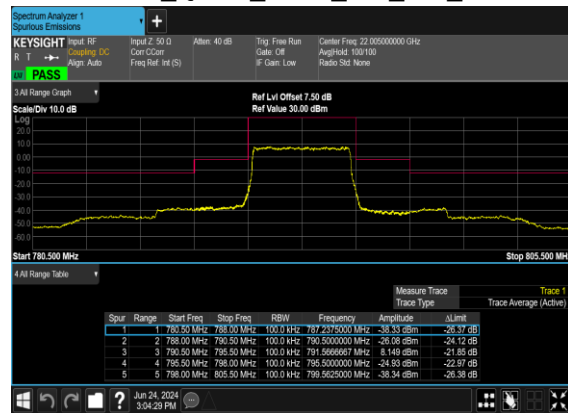





N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

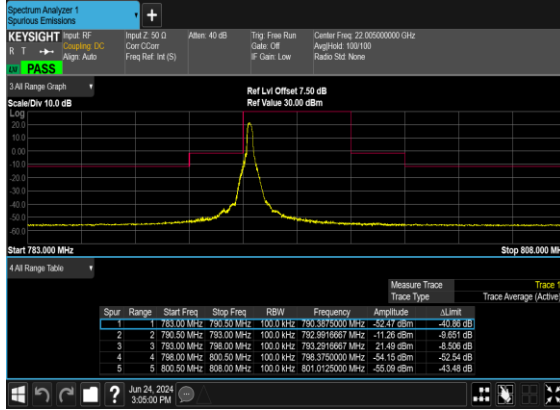


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

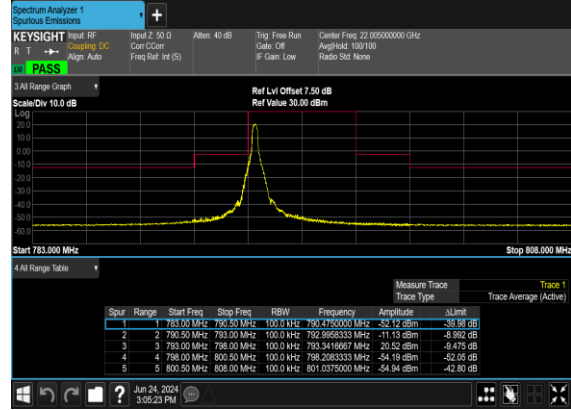


N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

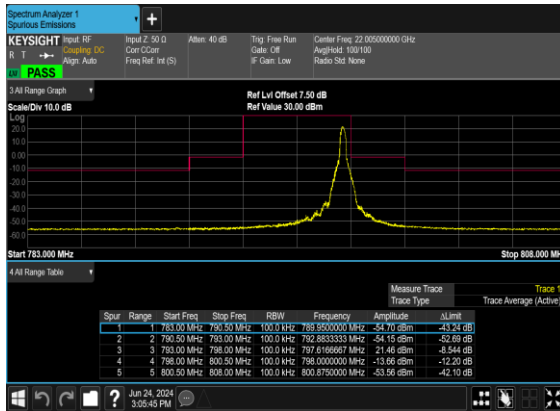


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

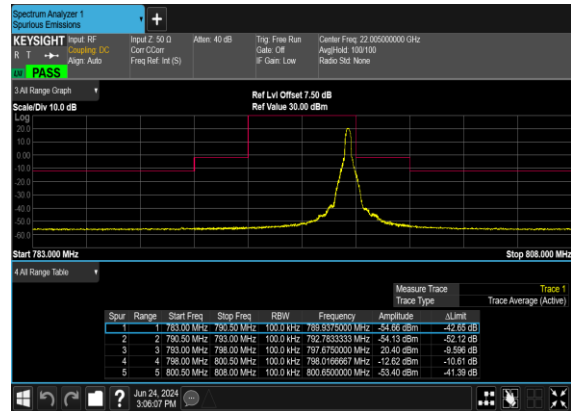





N14(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

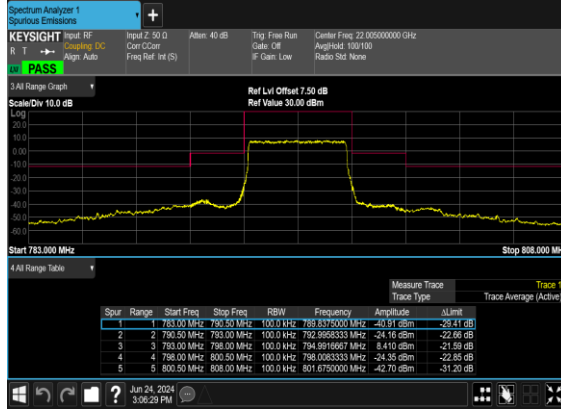


N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

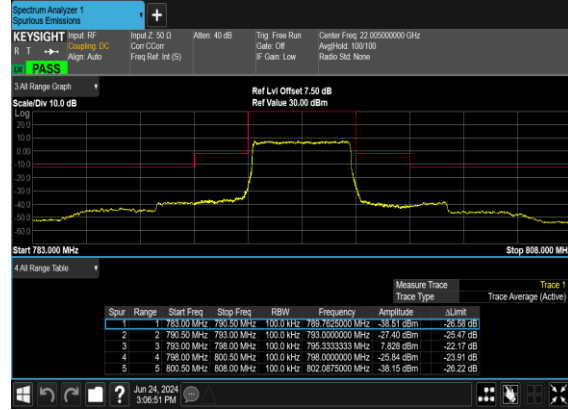


N14(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

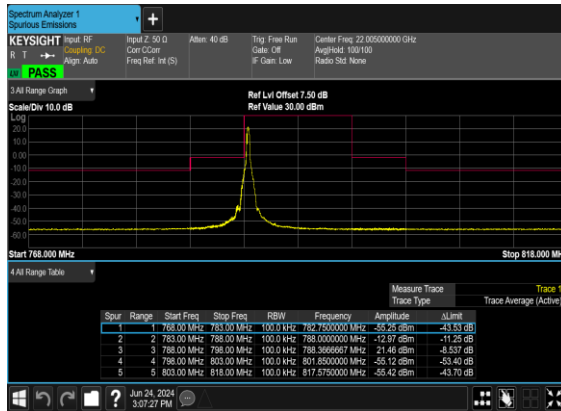


N14(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

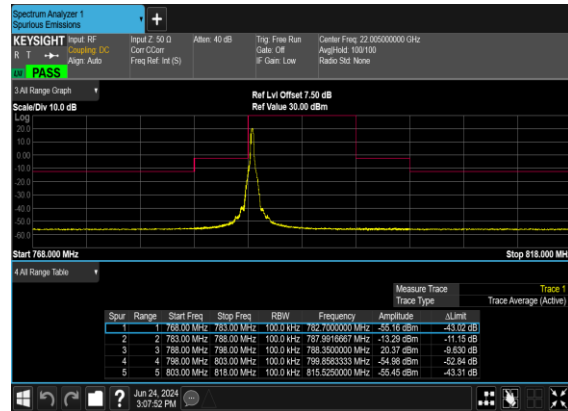





N14(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH

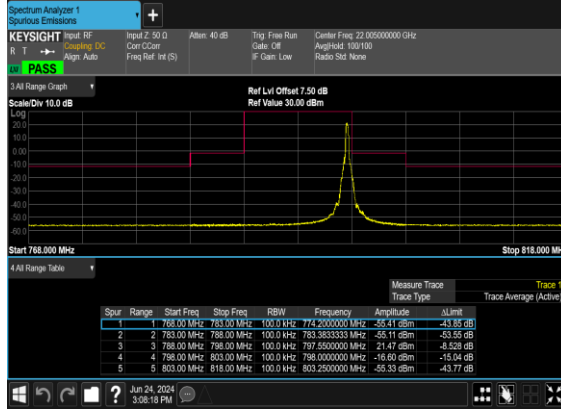


N14(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

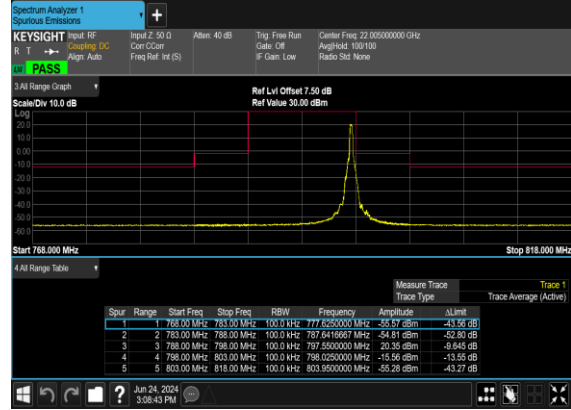


N14(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Mid_CH

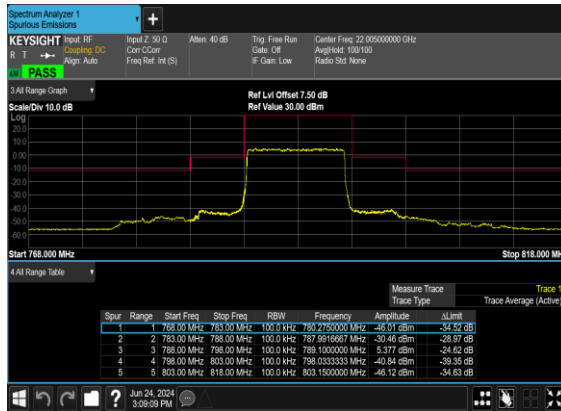

N14(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

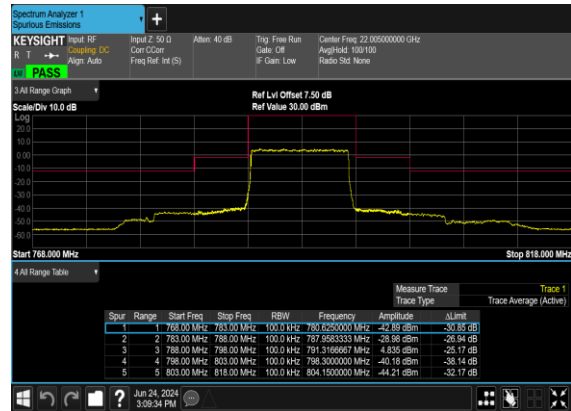



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS



N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH



N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH



N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH







N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

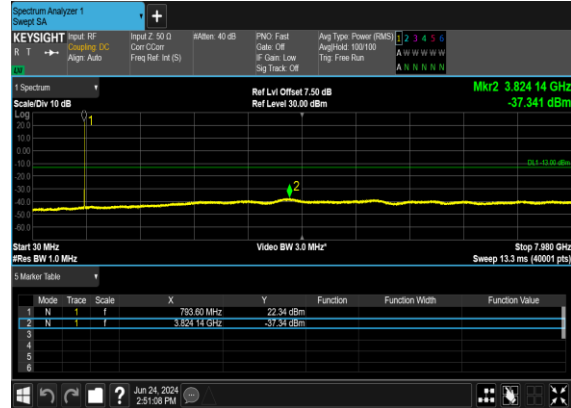


N14(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

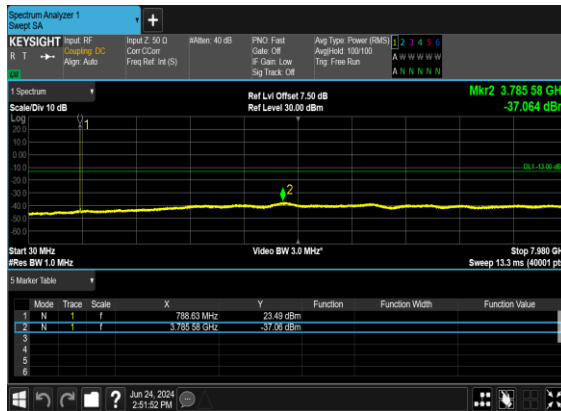


N14(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

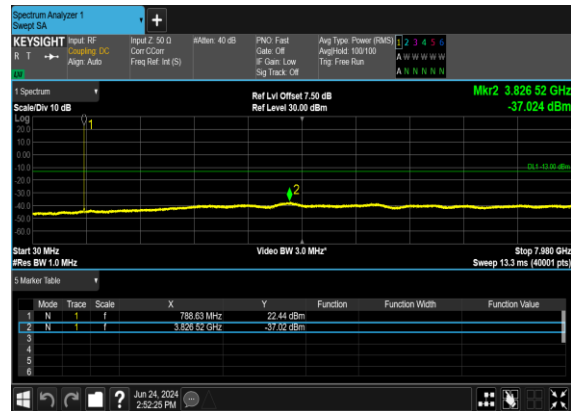




Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	see graph	PASS




N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

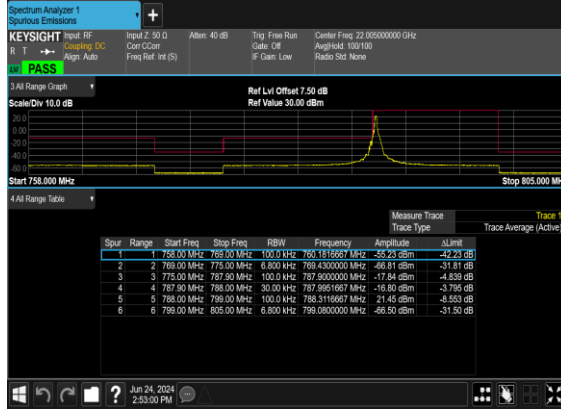


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

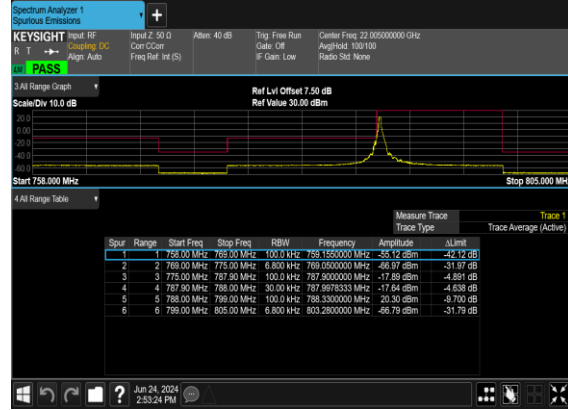


N14(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

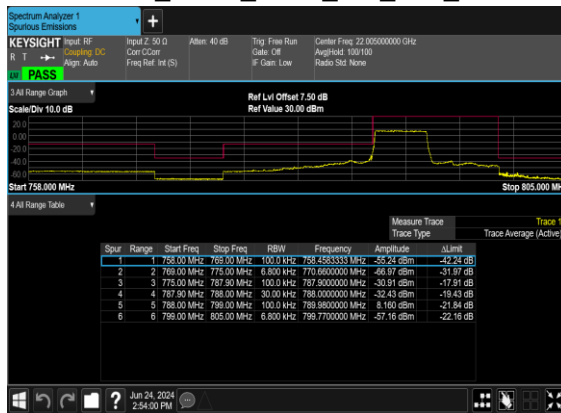


N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

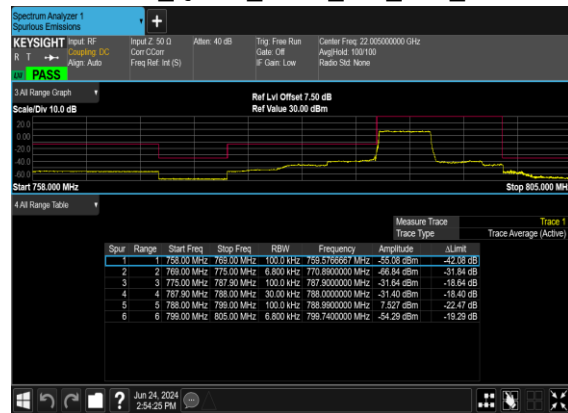





N14(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

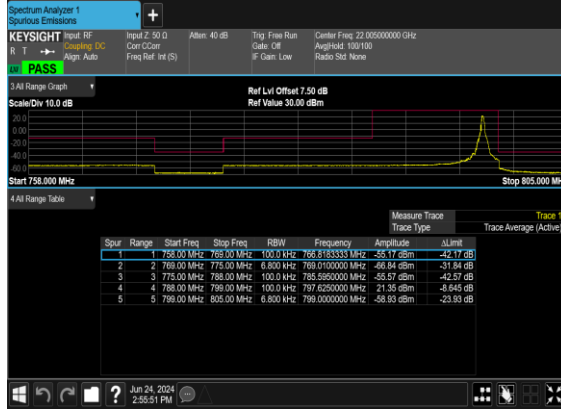


N14(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

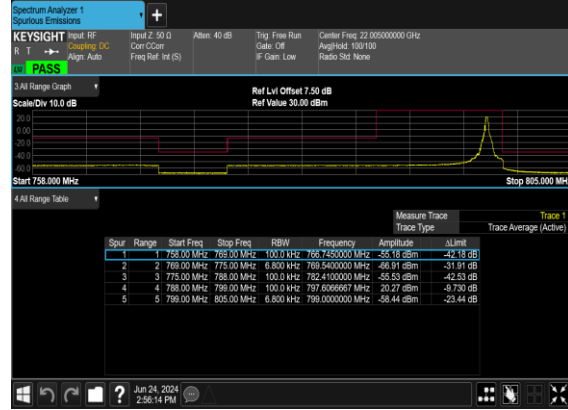


N14(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

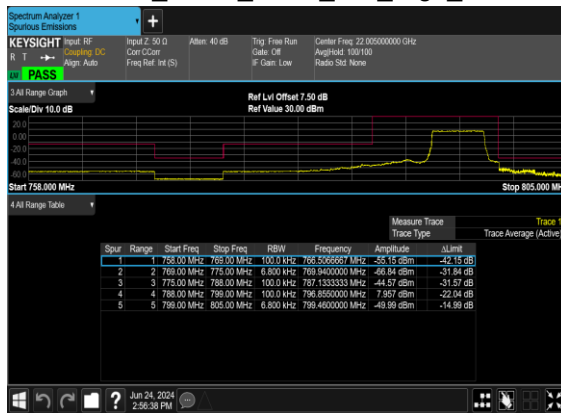

N14(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

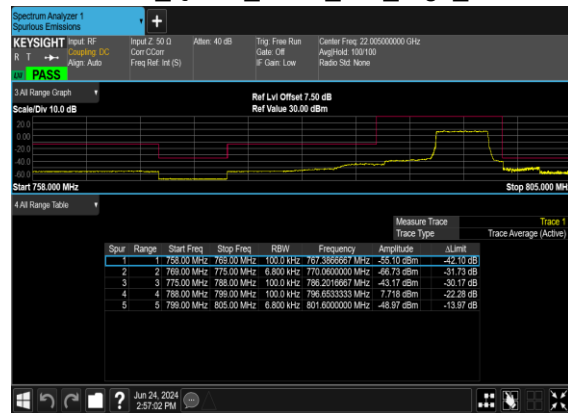




**N14(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH**




**N14(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH**




**N14(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH**

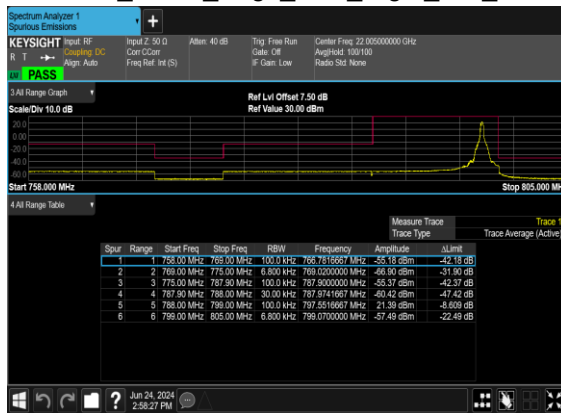


**N14(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH**

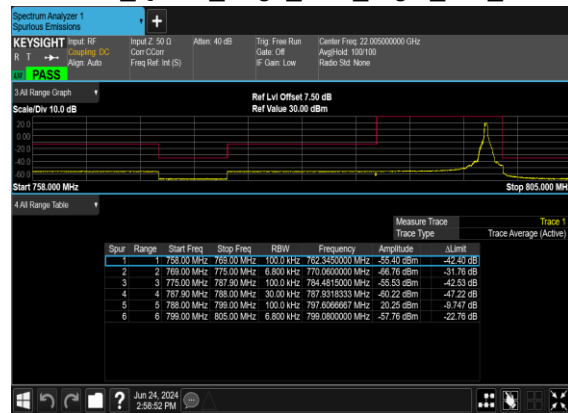




N14(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Mid_CH

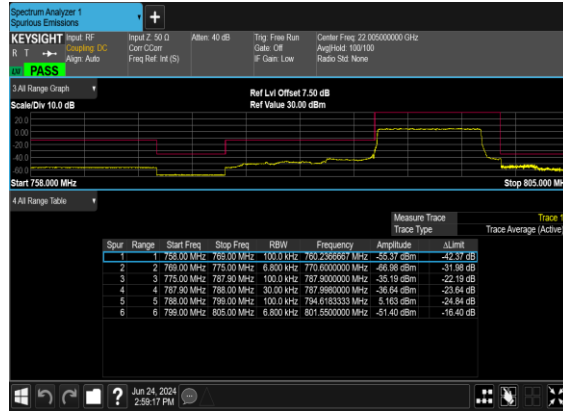

N14(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

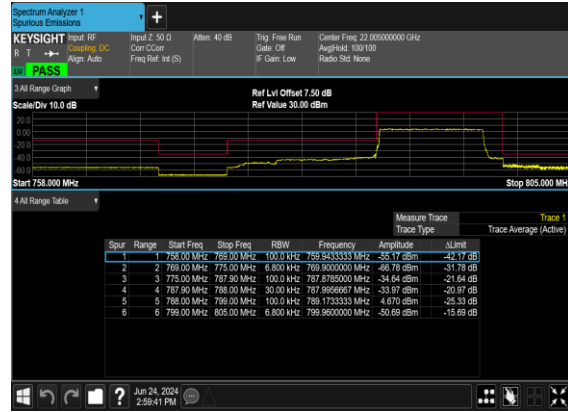

Appendix B. Test Results of Radiated Test

Field Strength of Spurious Radiated

Test Engineer :	Bruce Zhao	Temperature :	23~25°C
		Relative Humidity :	41~42%

For Ant 0

SA n14 / NR 5MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-57.32	-42.15	-15.17	-59.95	1.09	5.87	H
	2368	-62.03	-13	-49.03	-64.43	1.37	5.92	H
	3152	-58.85	-13	-45.85	-62.74	1.64	7.68	H
	1576	-56.25	-42.15	-14.10	-58.88	1.09	5.87	V
	2368	-60.37	-13	-47.37	-62.77	1.37	5.92	V
	3152	-59.10	-13	-46.10	-62.99	1.64	7.68	V
Middle	1584	-57.94	-42.15	-15.79	-60.57	1.09	5.87	H
	2376	-62.36	-13	-49.36	-64.76	1.37	5.92	H
	3160	-59.52	-13	-46.52	-63.41	1.64	7.68	H
	1584	-56.75	-42.15	-14.60	-59.38	1.09	5.87	V
	2376	-60.23	-13	-47.23	-62.63	1.37	5.92	V
	3160	-59.41	-13	-46.41	-63.30	1.64	7.68	V
Highest	1584	-56.36	-42.15	-14.21	-58.99	1.09	5.87	H
	2384	-61.68	-13	-48.68	-64.08	1.37	5.92	H
	3176	-59.89	-13	-46.89	-63.78	1.64	7.68	H
	1584	-55.63	-42.15	-13.48	-58.26	1.09	5.87	V
	2384	-60.08	-13	-47.08	-62.48	1.37	5.92	V
	3176	-59.91	-13	-46.91	-63.80	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			

SA n14 / NR 10MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-57.53	-42.15	-15.38	-60.16	1.09	5.87	H
	2368	-61.71	-13	-48.71	-64.11	1.37	5.92	H
	3152	-59.36	-13	-46.36	-63.25	1.64	7.68	H
	1576	-56.98	-42.15	-14.83	-59.61	1.09	5.87	V
	2368	-60.05	-13	-47.05	-62.45	1.37	5.92	V
	3152	-59.04	-13	-46.04	-62.93	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			

For Ant 1

SA n14 / NR 5MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-66.04	-42.15	-23.89	-68.67	1.09	5.87	H
	2368	-61.14	-13	-48.14	-63.54	1.37	5.92	H
	3152	-59.86	-13	-46.86	-63.75	1.64	7.68	H
	1576	-65.57	-42.15	-23.42	-68.20	1.09	5.87	V
	2368	-60.48	-13	-47.48	-62.88	1.37	5.92	V
	3152	-59.94	-13	-46.94	-63.83	1.64	7.68	V
Middle	1584	-66.83	-42.15	-24.68	-69.46	1.09	5.87	H
	2376	-62.49	-13	-49.49	-64.89	1.37	5.92	H
	3160	-60.24	-13	-47.24	-64.13	1.64	7.68	H
	1584	-66.05	-42.15	-23.90	-68.68	1.09	5.87	V
	2376	-60.89	-13	-47.89	-63.29	1.37	5.92	V
	3160	-60.31	-13	-47.31	-64.20	1.64	7.68	V
Highest	1584	-66.31	-42.15	-24.16	-68.94	1.09	5.87	H
	2384	-61.50	-13	-48.50	-63.90	1.37	5.92	H
	3176	-60.06	-13	-47.06	-63.95	1.64	7.68	H
	1584	-65.22	-42.15	-23.07	-67.85	1.09	5.87	V
	2384	-59.86	-13	-46.86	-62.26	1.37	5.92	V
	3176	-60.55	-13	-47.55	-64.44	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			

SA n14 / NR 10MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-66.14	-42.15	-23.99	-68.77	1.09	5.87	H
	2368	-62.20	-13	-49.20	-64.60	1.37	5.92	H
	3152	-59.80	-13	-46.80	-63.69	1.64	7.68	H
	1576	-64.52	-42.15	-22.37	-67.15	1.09	5.87	V
	2368	-60.48	-13	-47.48	-62.88	1.37	5.92	V
	3152	-59.82	-13	-46.82	-63.71	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			