

06_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r =$

41.2

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.739 W/kg; SAR (10g) = 0.478 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.766 W/kg; SAR (10g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

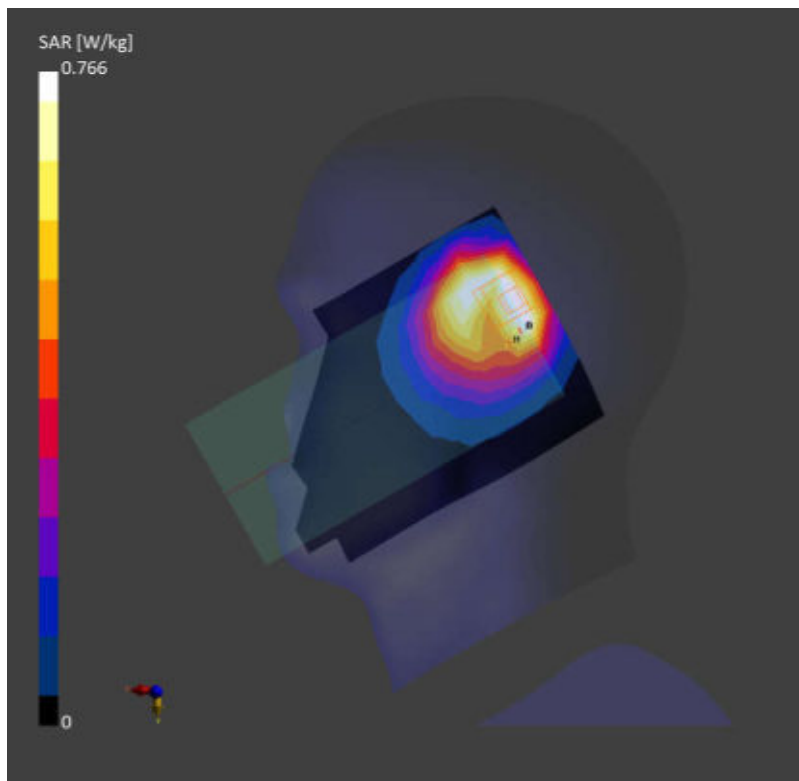

07_LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.577 W/kg; SAR (10g) = 0.376 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.784 W/kg; SAR (10g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

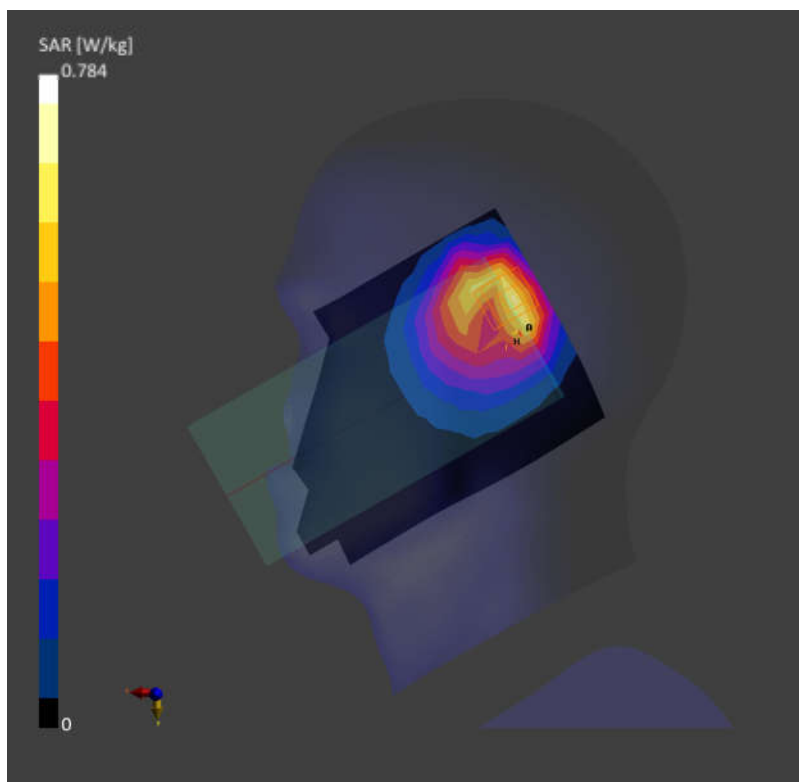

08_FR1 n26_20M_QPSK_50RB_28Offset_Right Cheek_0mm_Ch166300

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.861 W/kg; SAR (10g) = 0.560 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.848 W/kg; SAR (10g) = 0.492 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

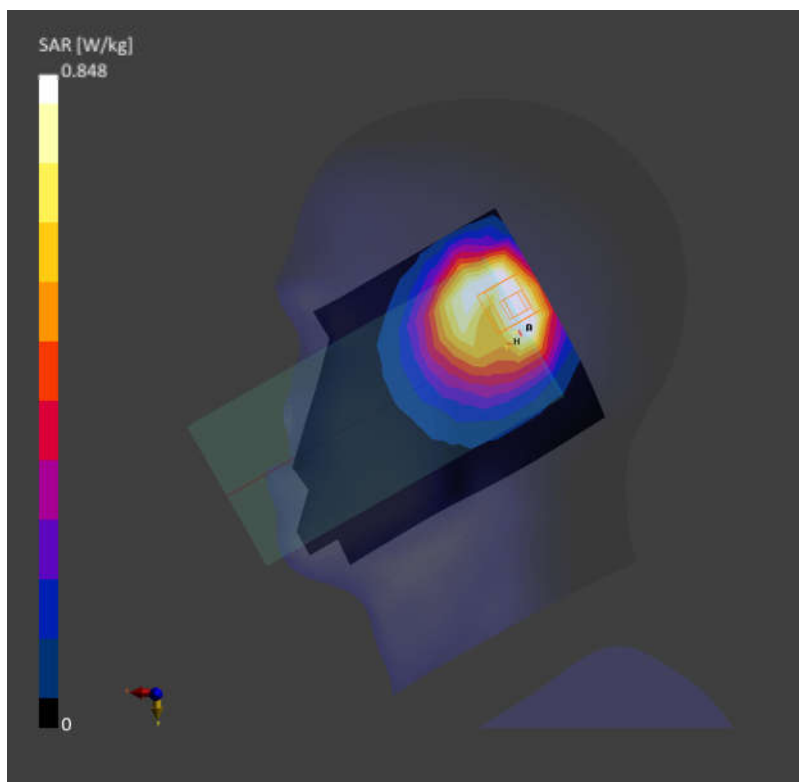

09_WCDMA IV_RMC 12.2Kbps_Left Cheek_0mm_Ch1513

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.25$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.928 W/kg; SAR (10g) = 0.507 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

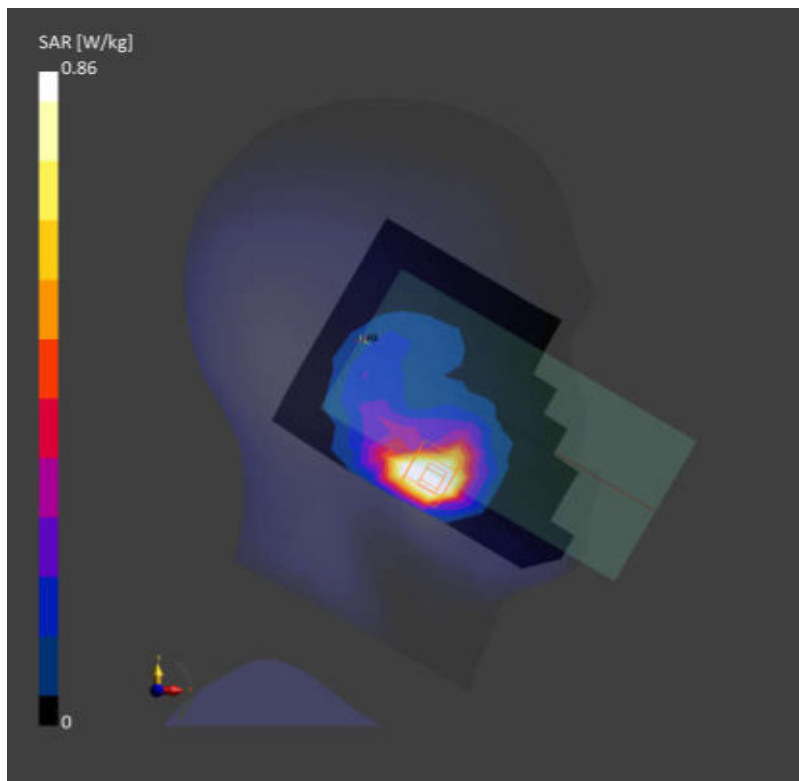

10_LTE Band 66_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch132572

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.775 W/kg; SAR (10g) = 0.427 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.419 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

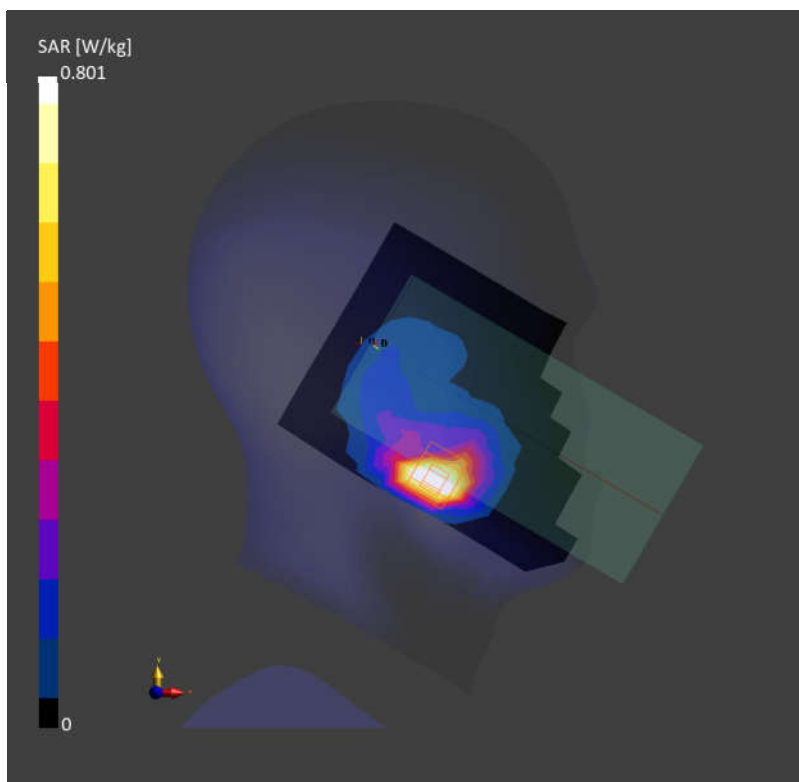

11_FR1 n66_40M_QPSK_108RB_54Offset_Left Cheek_0mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.809 W/kg; SAR (10g) = 0.446 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.861 W/kg; SAR (10g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

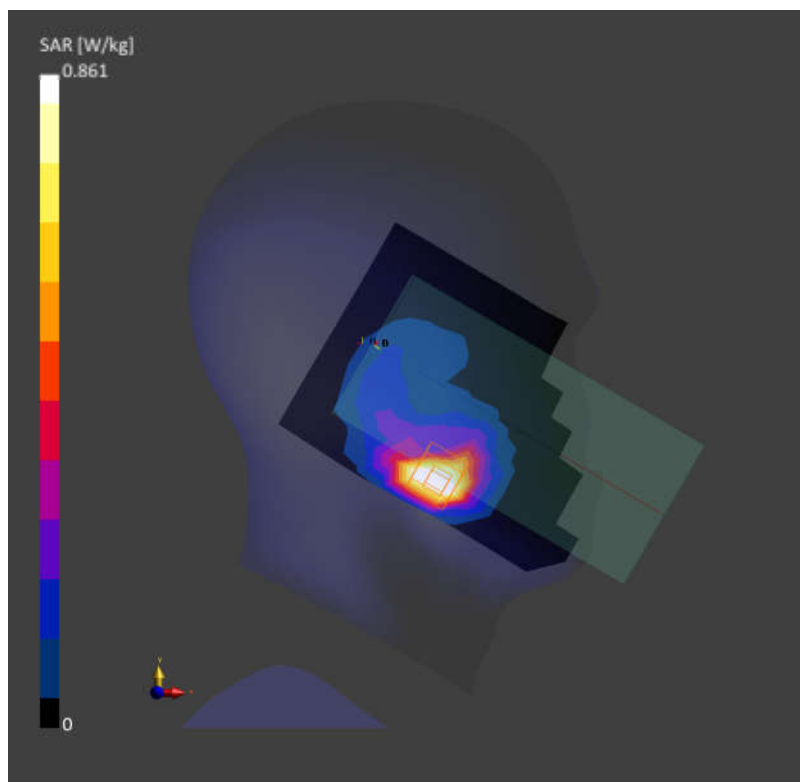

12_GSM1900_GPRS (2 Tx slots)_Leftt Cheek_0mm_Ch512

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1)

Frequency: 1850.200 MHz; DutyCycle: 1:4.15

Medium: HSL Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10090-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.774 W/kg; SAR (10g) = 0.416 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.797 W/kg; SAR (10g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

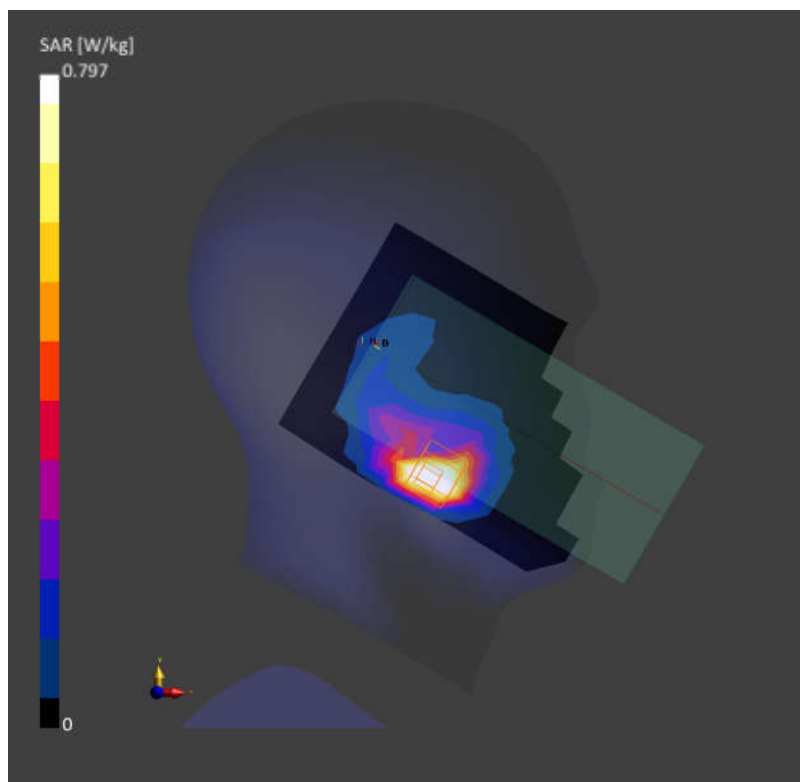

13_WCDMA II_RMC 12.2Kbps_Left Cheek_0mm_Ch9262


Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.749 W/kg; SAR (10g) = 0.404 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.747 W/kg; SAR (10g) = 0.374 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 84.1 %

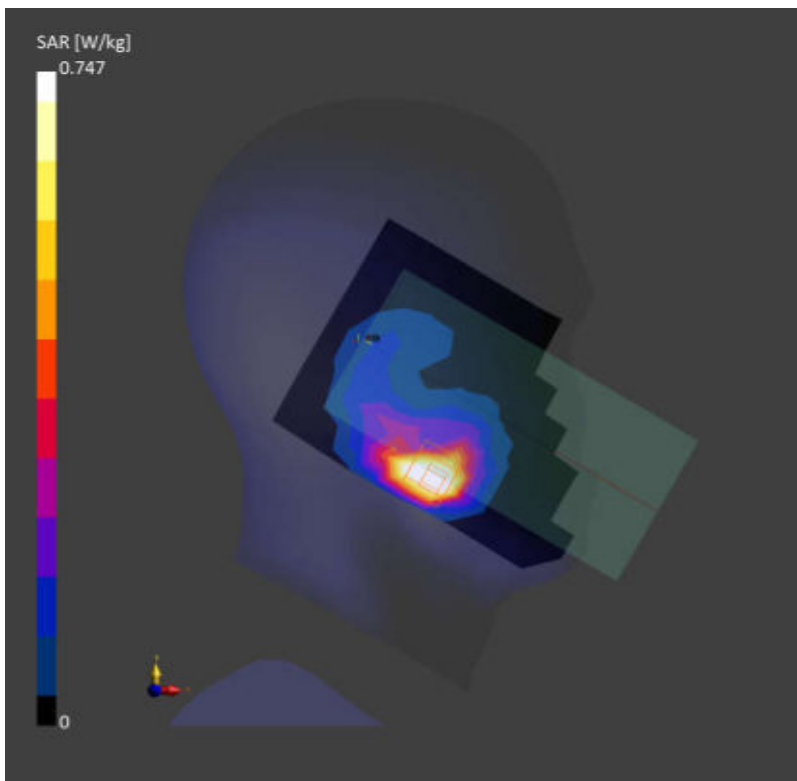

14_LTE Band 2_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch18700

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.412 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.850 W/kg; SAR (10g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 89.2 %

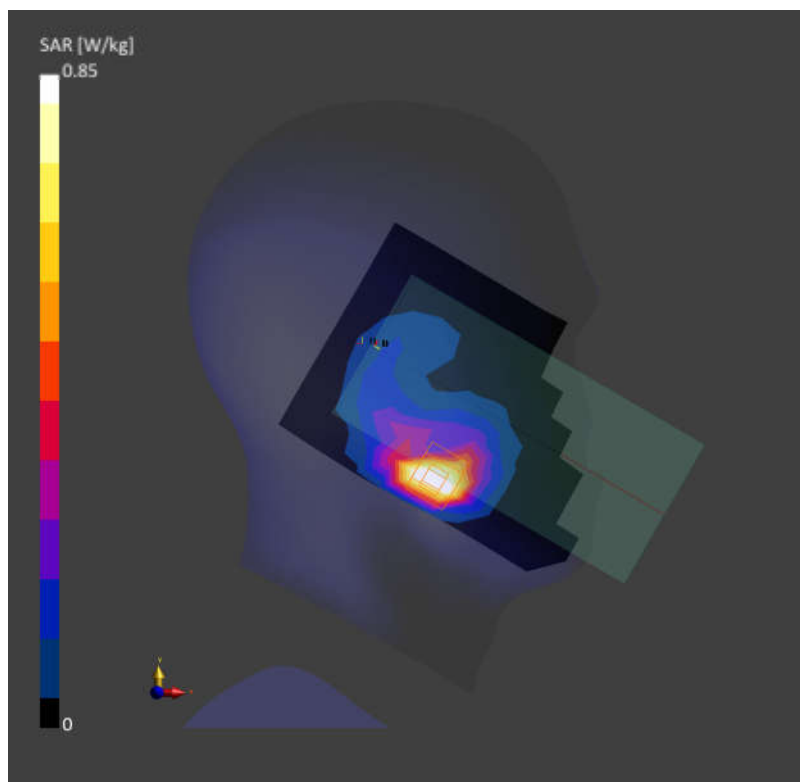

15_FR1 n2_20M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch372000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.749 W/kg; SAR (10g) = 0.408 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.798 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

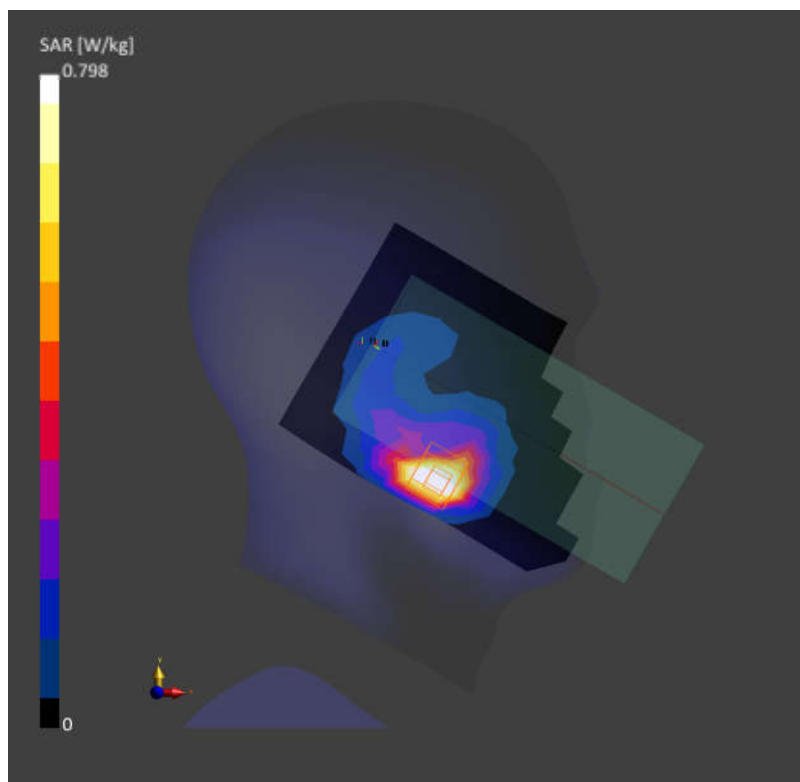

16_LTE Band 7_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead

- Measurement Software: 16.4.0.5005

- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.871 W/kg; SAR (10g) = 0.408 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.879 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

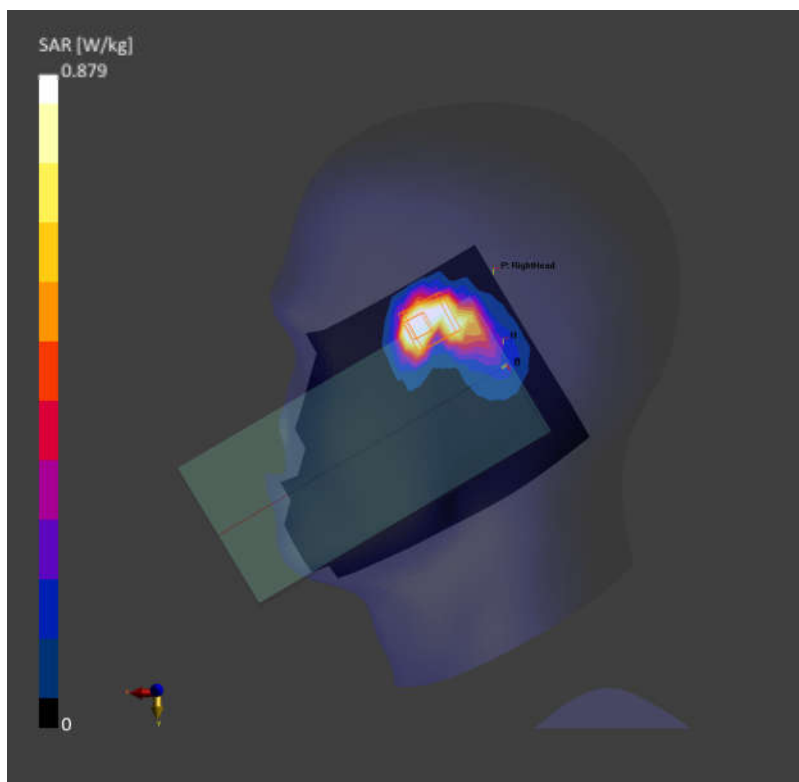

17_LTE Band 41_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 2680.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.873 W/kg; SAR (10g) = 0.391 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.761 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

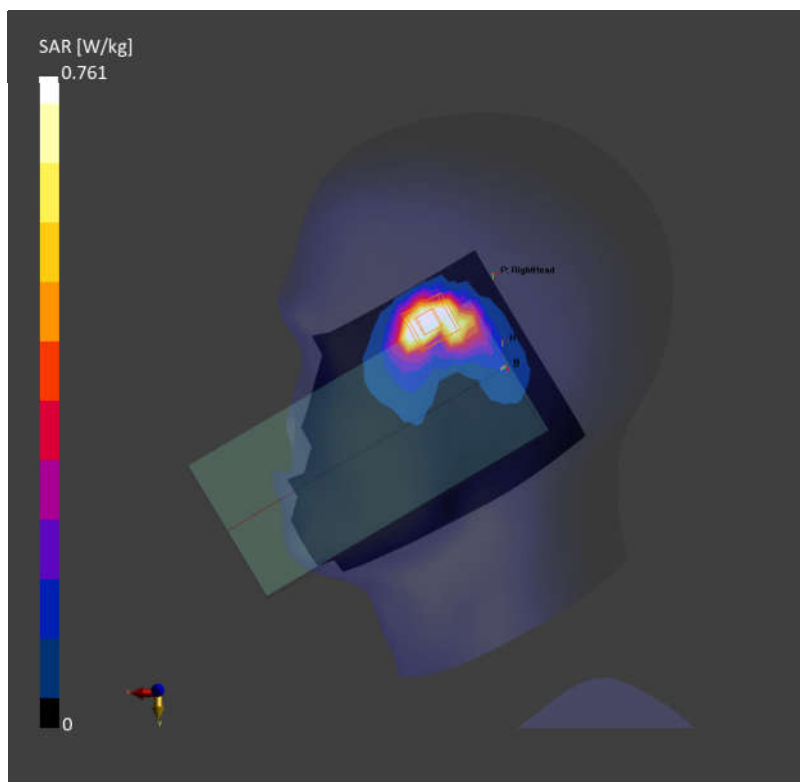

18_FR1 n7_40M_QPSK_108RB_54Offset_Right Cheek_0mm_Ch507000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead

- Measurement Software: 16.4.0.5005

- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.870 W/kg; SAR (10g) = 0.399 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.893 W/kg; SAR (10g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

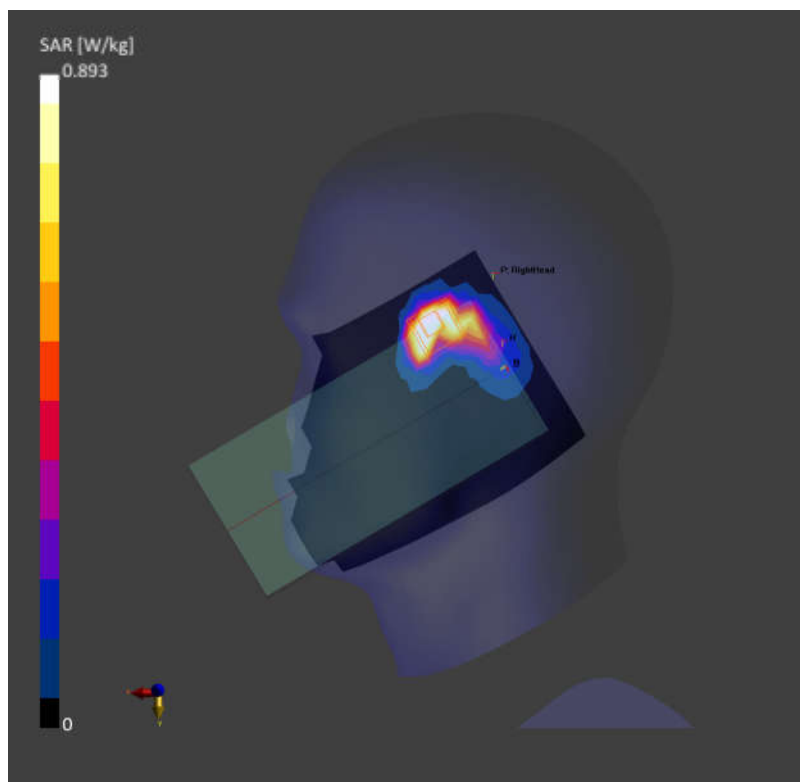

19_FR1 n41_100M_QPSK_135RB_69Offset_Right Cheek_0mm_Ch518598

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.811 W/kg; SAR (10g) = 0.367 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.798 W/kg; SAR (10g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

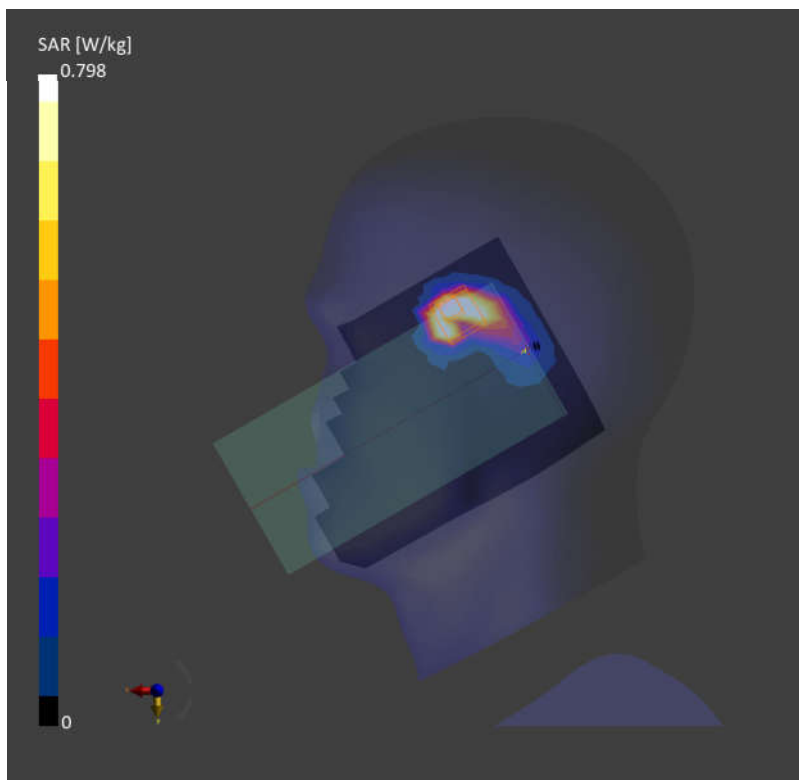

20_LTE Band 42_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch42990

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.27, 7.06, 7.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.383 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.894 W/kg; SAR (10g) = 0.407 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

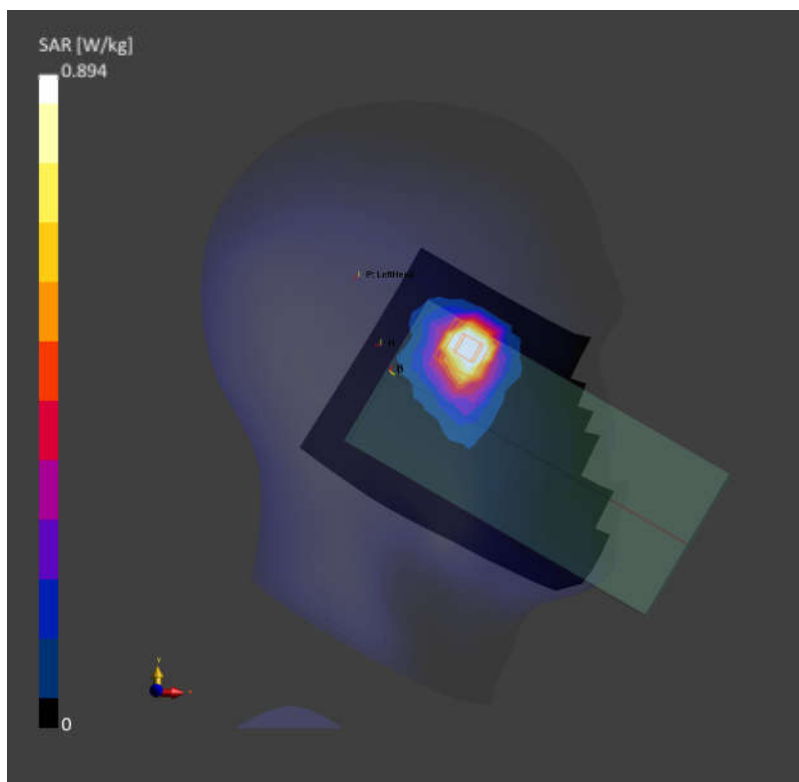

21_FR1 n77_100M_QPSK_1RB_1Offset_LeftCheek_0mm_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7729; ConvF(7.16, 7.1, 7.05); Calibrated: 2024-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.333 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

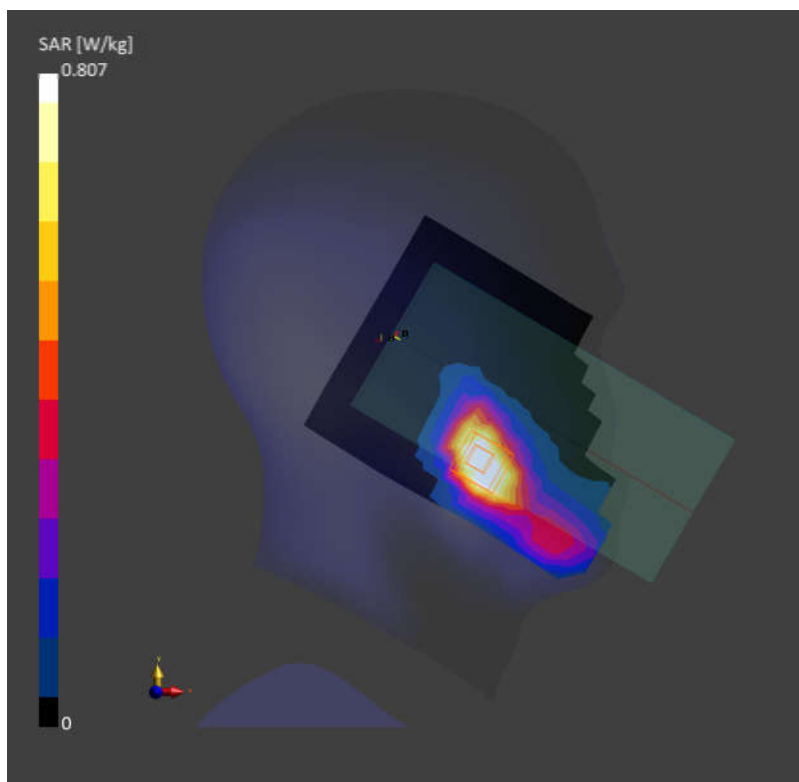

22_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2437.000 MHz; Duty Cycle: 1:1.017

Medium: HSL Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.65, 7.44, 7.77); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.759 W/kg; SAR (10g) = 0.366 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.783 W/kg; SAR (10g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

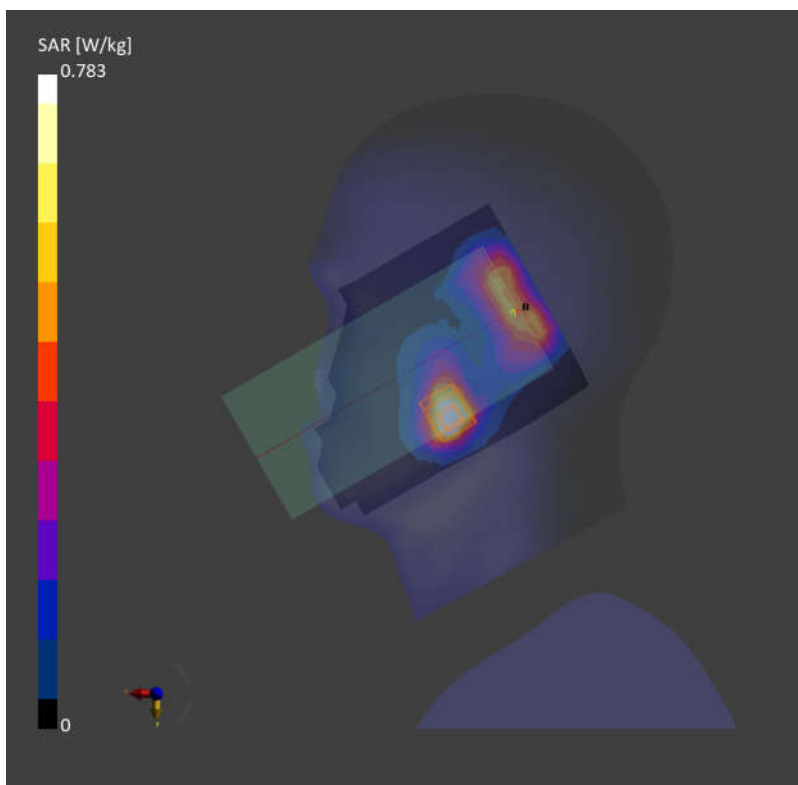

23_Bluetooth_1Mbps_Left Tilted_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL_2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 40.394$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.44, 6.79, 7.48); Calibrated: 2024/1/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1650; Calibrated: 2023/9/13
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0993 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.867 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 0.0963 W/kg

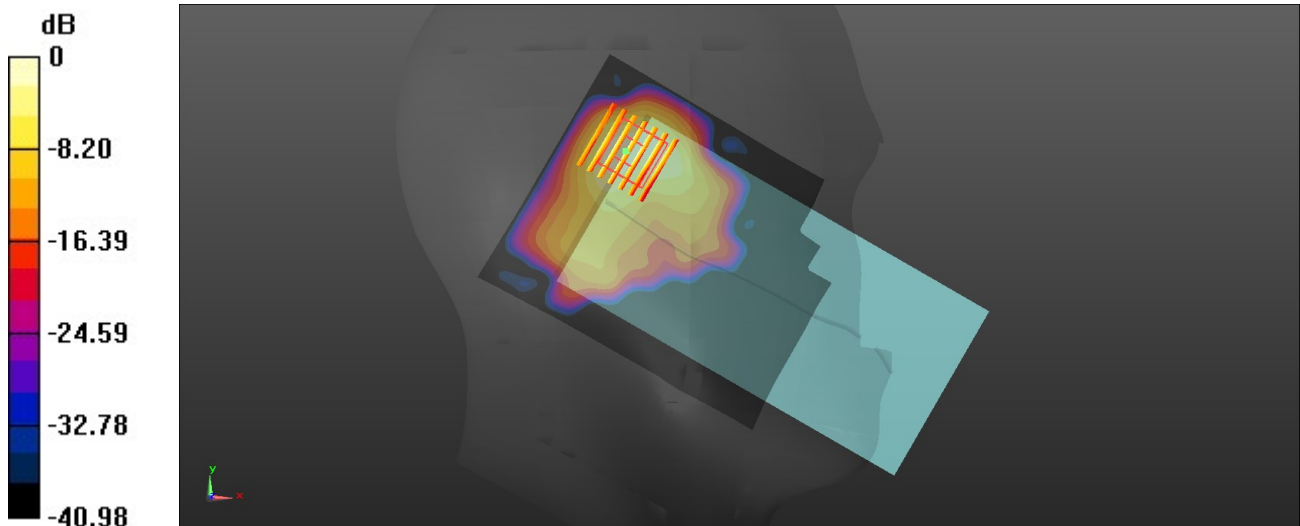

0 dB = 0.0963 W/kg = -10.05 dBW/kg

24_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch50


Communication System: IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)
Frequency: 5250.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f= 5250.000$ MHz; $\sigma= 4.64$ S/m; $\epsilon_r = 35.6$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(6.22, 6.05, 6.32); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.923 W/kg; SAR (10g) = 0.318 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.09 dB
SAR (1g) = 0.783 W/kg; SAR (10g) = 0.307 W/kg
Smallest distance from peaks to all points 3 dB below = 7.9 mm
Ratio of SAR at M2 to SAR at M1 = 71.0 %

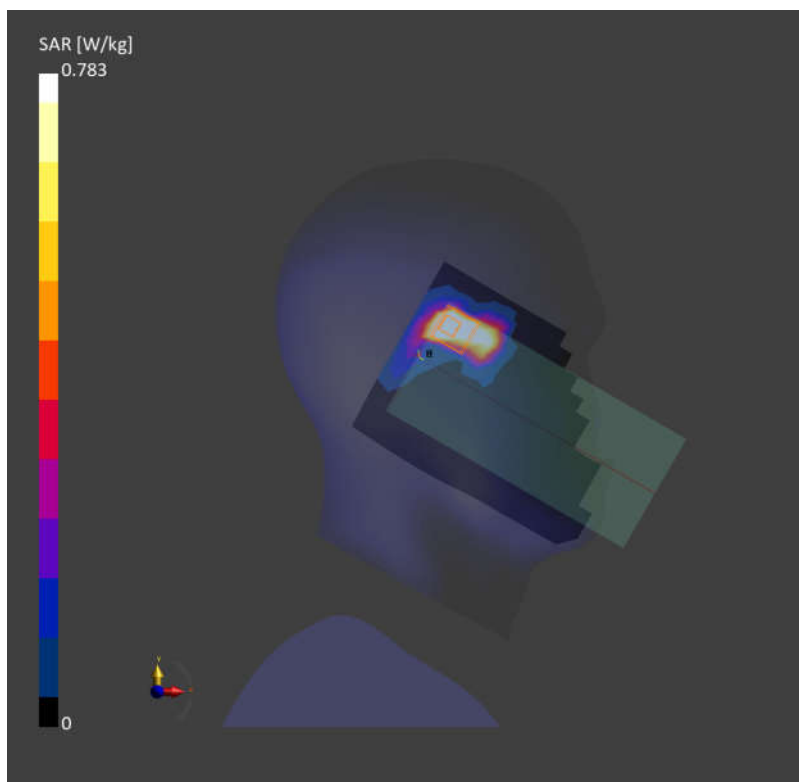

25_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch114


Communication System: IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)
Frequency: 5570.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f= 5570.000$ MHz; $\sigma= 4.84$ S/m; $\epsilon_r = 35.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.51, 5.36, 5.6); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.706 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.763 W/kg; SAR (10g) = 0.278 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 66.7 %

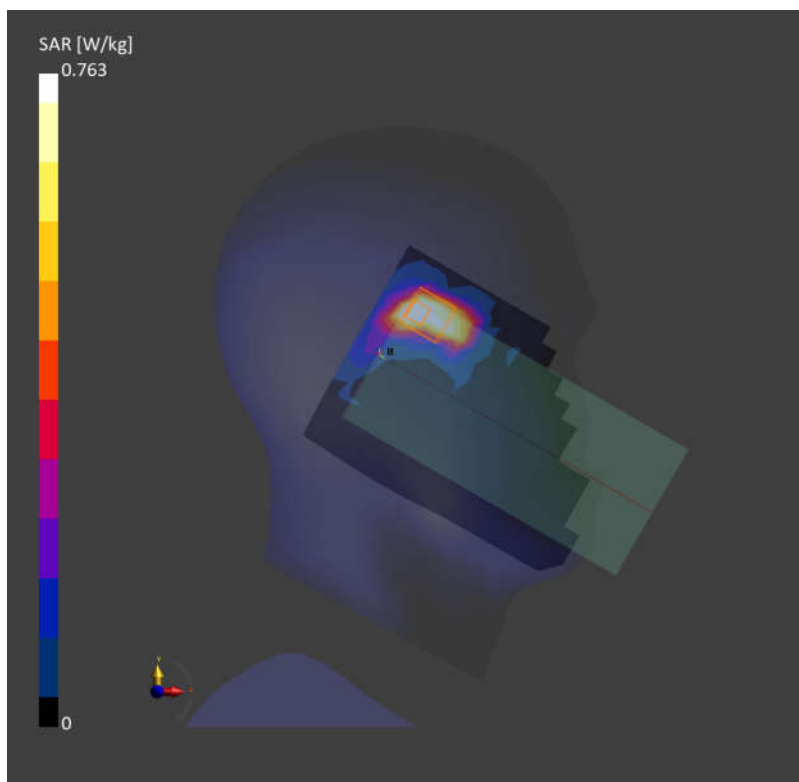

26_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 34.8$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.57, 5.42, 5.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.571 W/kg; SAR (10g) = 0.189 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.732 W/kg; SAR (10g) = 0.249 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 65.9 %

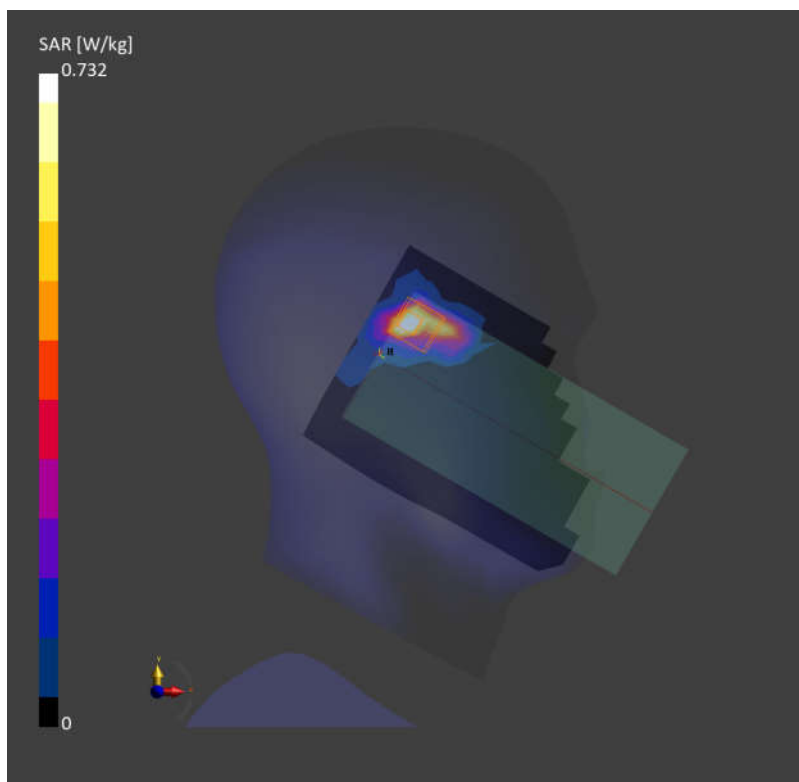

27_LTE Band 71_20M_QPSK_1RB_0Offset_Back_10mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10177-CAJ

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.285 W/kg; SAR (10g) = 0.193 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

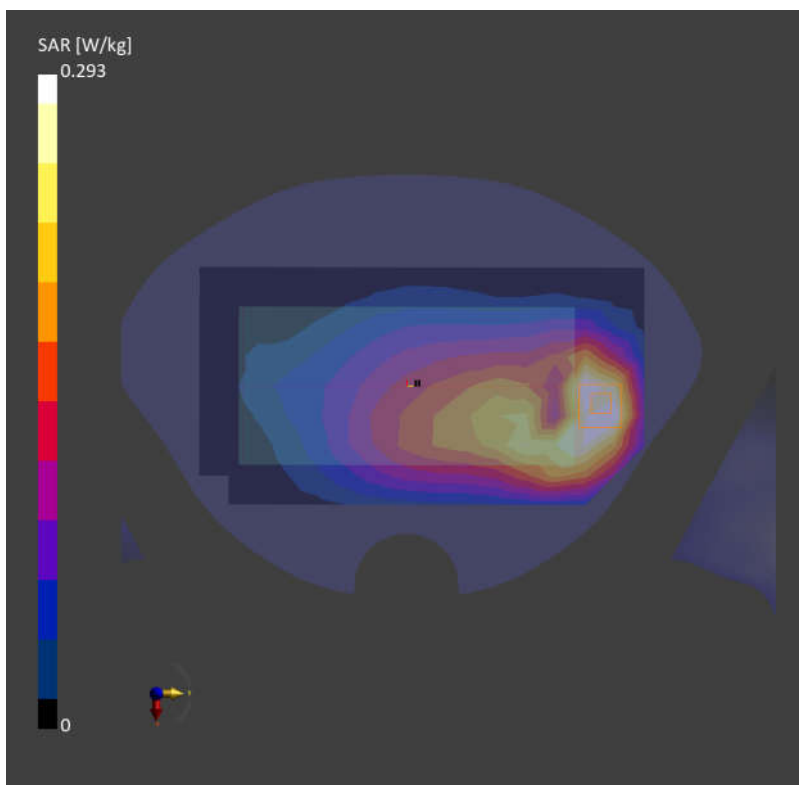

28_LTE Band 13_10M_QPSK_1RB_0Offset_Back_10mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10177-CAJ

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.277 W/kg; SAR (10g) = 0.186 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.296 W/kg; SAR (10g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

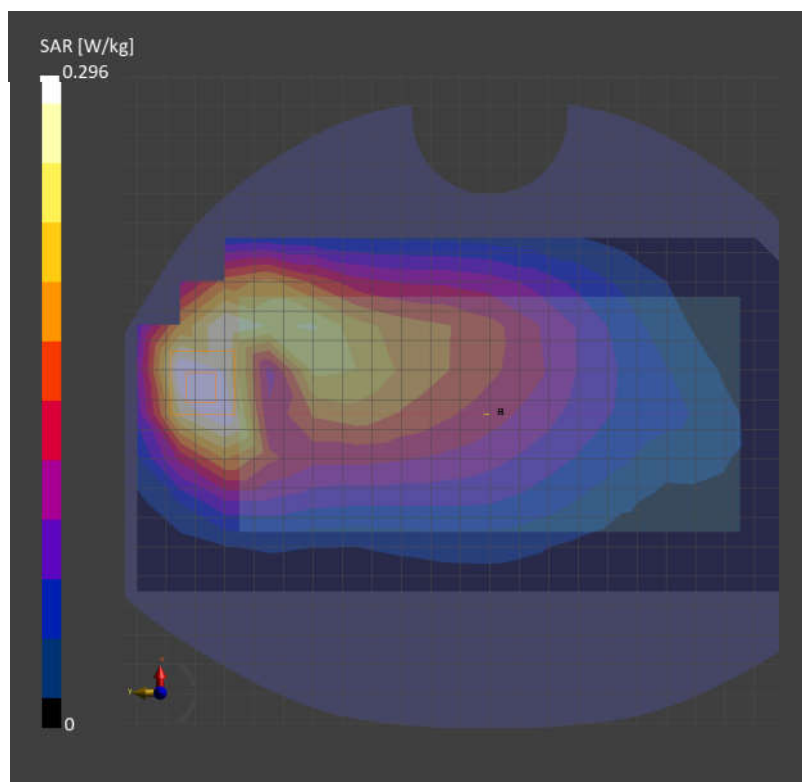

29_LTE Band 17_10M_QPSK_1RB_0Offset_Back_10mm_Ch23790

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 710.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 710.000$ MHz; $\sigma = 0.981$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10177-CAJ

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.183 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

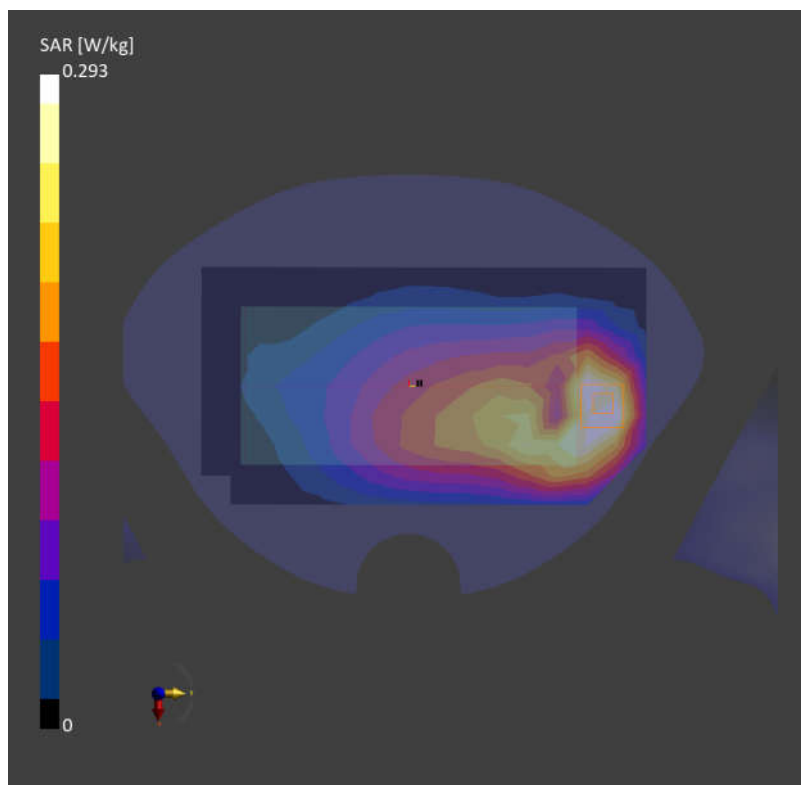

30_FR1 n71_20M_QPSK_50RB_28Offset_Back_10mm_Ch136100

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.439 W/kg; SAR (10g) = 0.281 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.429 W/kg; SAR (10g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

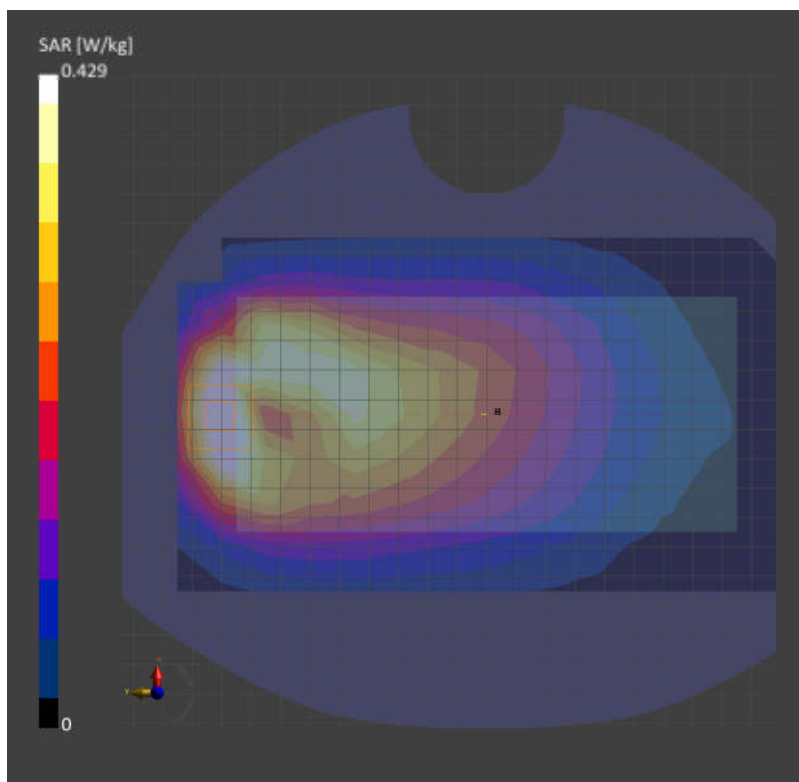

31_GSM850_GPRS (2 Tx slots)_Top Side_10mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 836.400 MHz; Duty Cycle: 1:4.15

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10024-DAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.331 W/kg; SAR (10g) = 0.201 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.372 W/kg; SAR (10g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

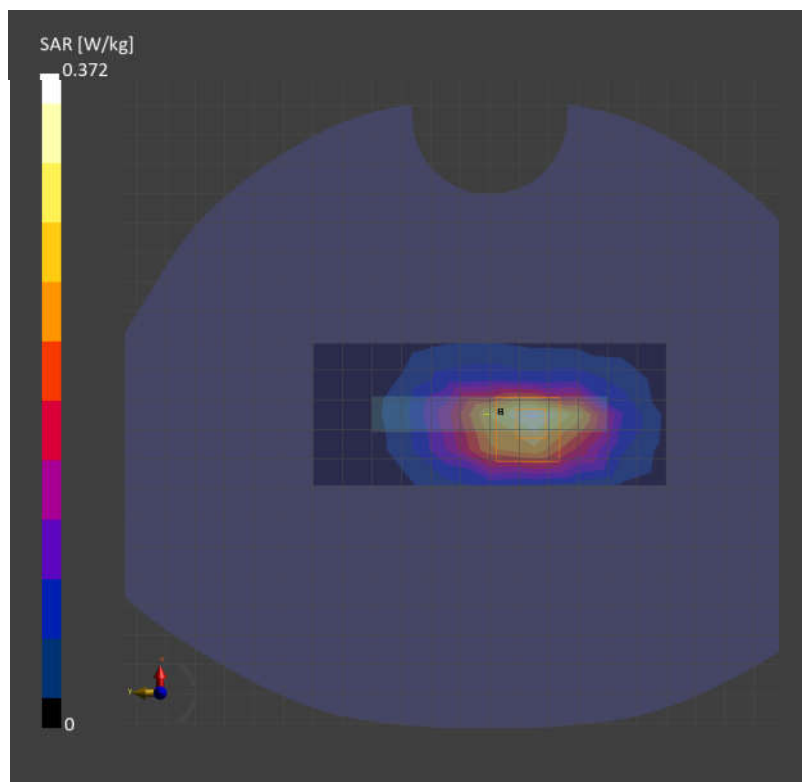

32_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r =$

41.2

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.340 W/kg; SAR (10g) = 0.214 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.330 W/kg; SAR (10g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 87.5 %

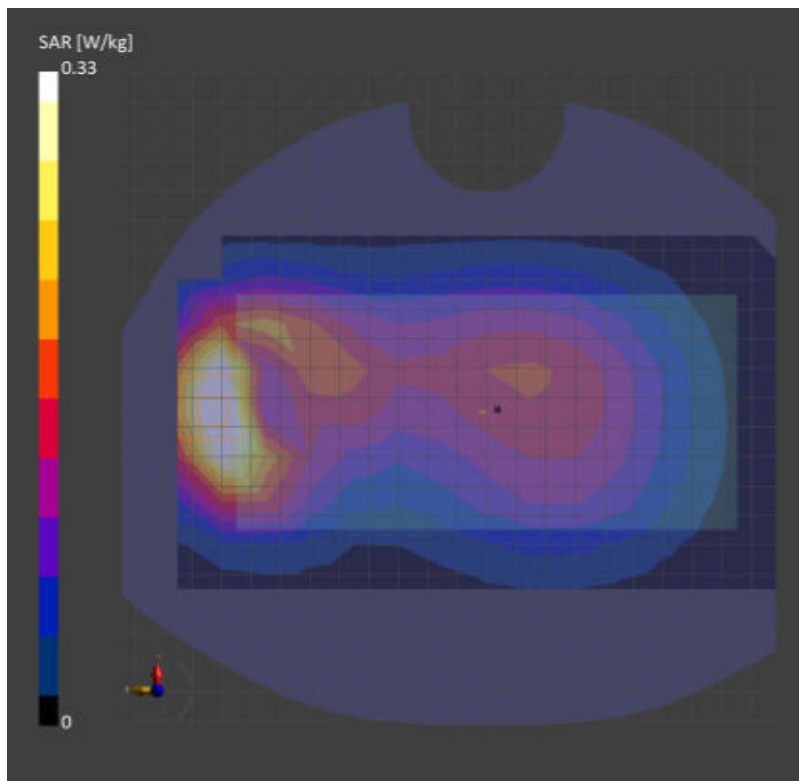

33_LTE Band 26_15M_QPSK_1RB_0Offset_Top Side_10mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.149 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

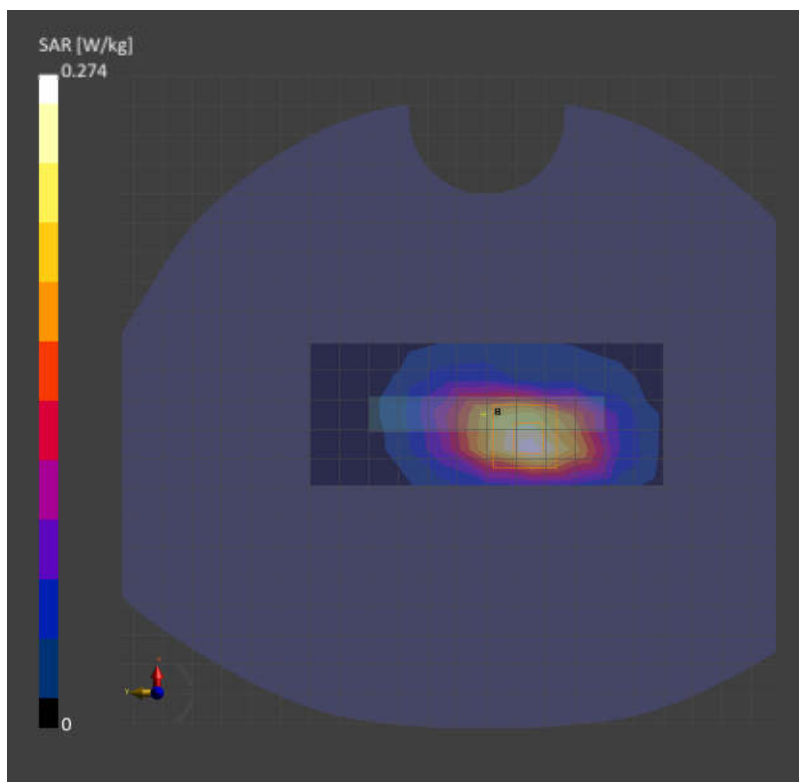

34_FR1 n26_20M_QPSK_50RB_28Offset_Back_10mm_Ch166300

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.348 W/kg; SAR (10g) = 0.222 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.365 W/kg; SAR (10g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

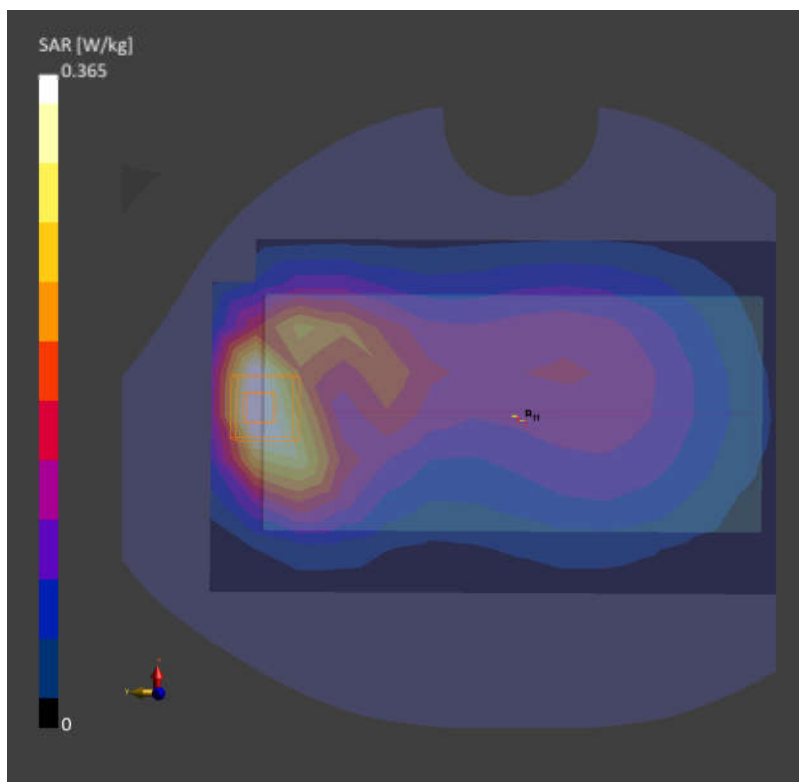

35_RFID_Front_10mm

Communication System: UID 0, RFID (0); Frequency: 902.75 MHz; Duty Cycle: 1:1.15

Medium: HSL_900 Medium parameters used: $f = 902.75$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 41.611$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4-SN3857; ConvF(9.29, 8.23, 9.75); Calibrated: 2024/1/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1650; Calibrated: 2023/9/13
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.419 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.90 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 0.443 W/kg

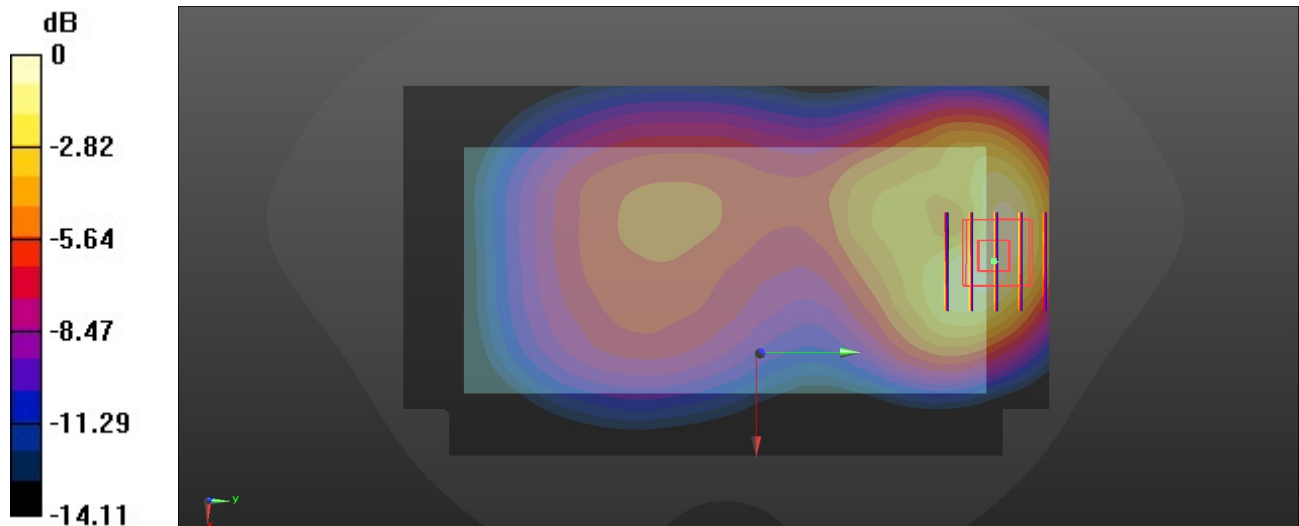

0 dB = 0.443 W/kg = -3.54 dBW/kg

36_WCDMA IV_RMC 12.2Kbps_Left Side_10mm_Ch1413


Communication System: UMTS-FDD (WCDMA); Frequency: 1732.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.8$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.942 W/kg; SAR (10g) = 0.521 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.886 W/kg; SAR (10g) = 0.551 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 84.1 %

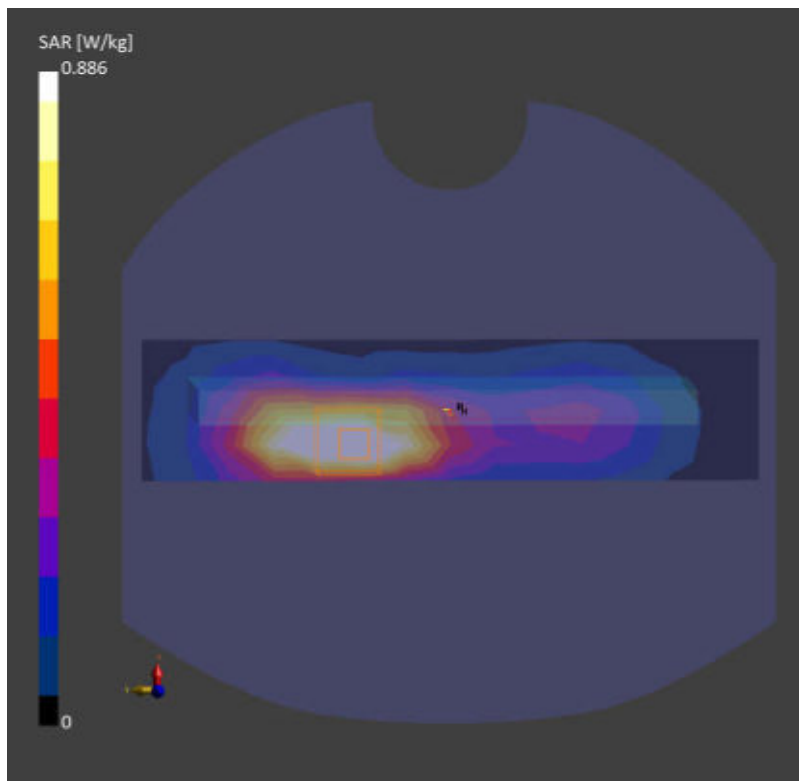

37_LTE Band 66_20M_QPSK_1RB_0Offset_Left Side_10mm_Ch132572

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.796 W/kg; SAR (10g) = 0.466 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.6 %

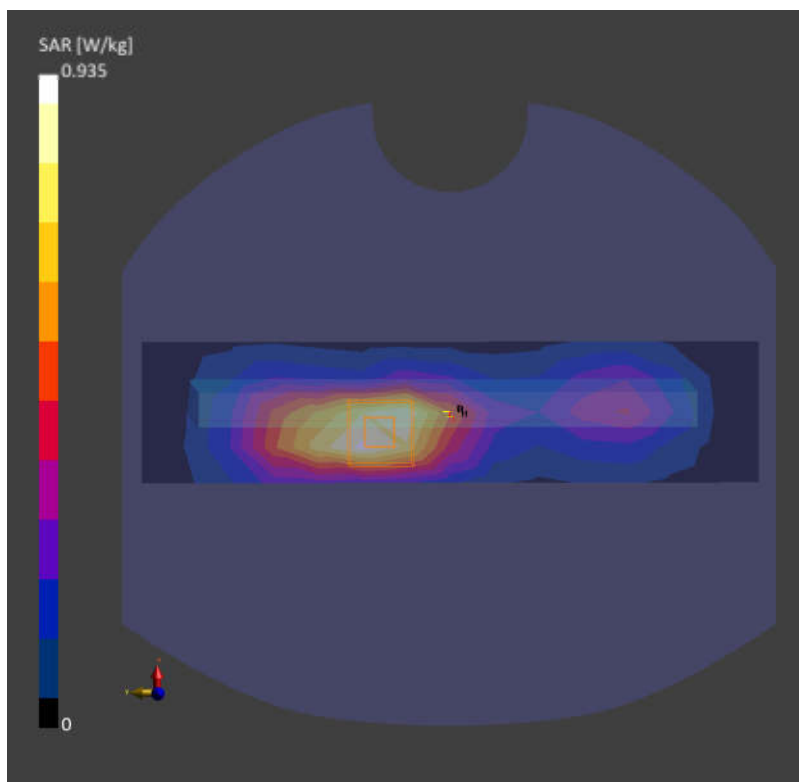

38_FR1 n66_40M_QPSK_1RB_1Offset_Left Side_10mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.376 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

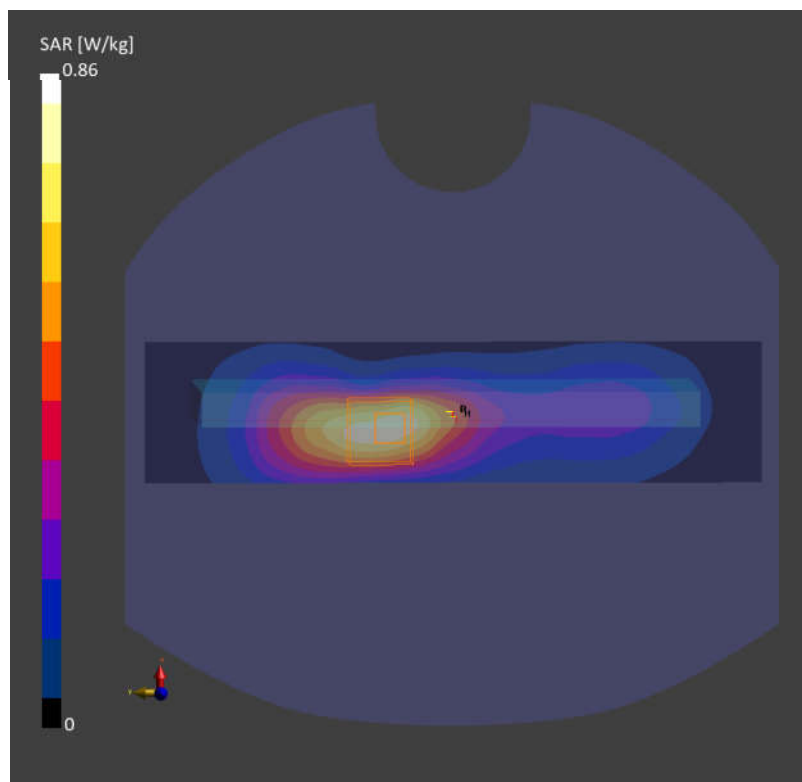

39_GSM1900_GPRS (2 Tx slots)_Left Side_10mm_Ch661

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 1880.000 MHz; Duty Cycle: 1:4.15

Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10024-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.447 W/kg; SAR (10g) = 0.253 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.563 W/kg; SAR (10g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

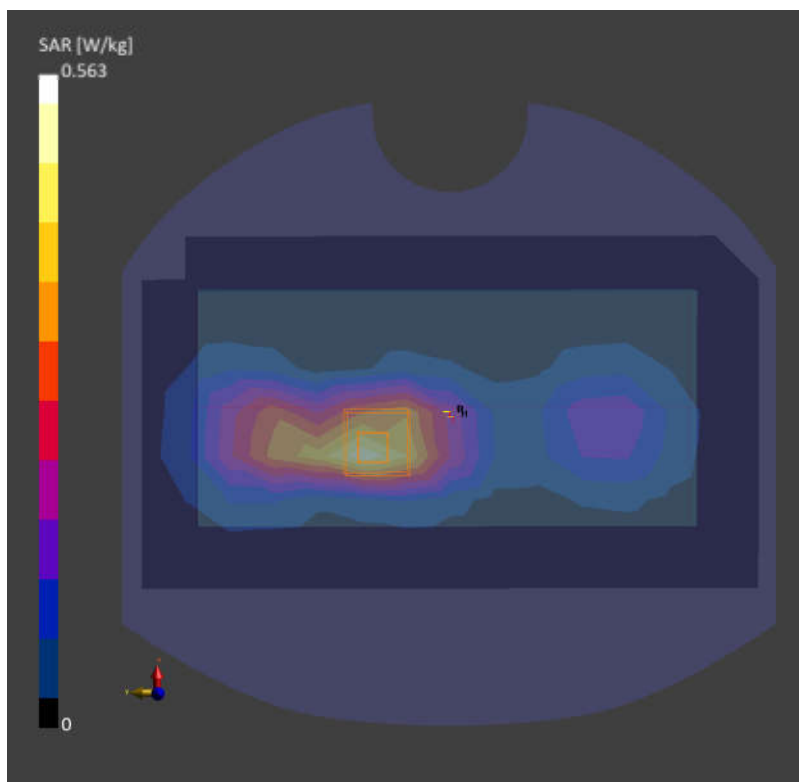

40_WCDMA II_RMC 12.2Kbps_Left Side_10mm_Ch9400

Communication System: UMTS-FDD (WCDMA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r =$

39.2

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.887 W/kg; SAR (10g) = 0.495 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.834 W/kg; SAR (10g) = 0.547 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

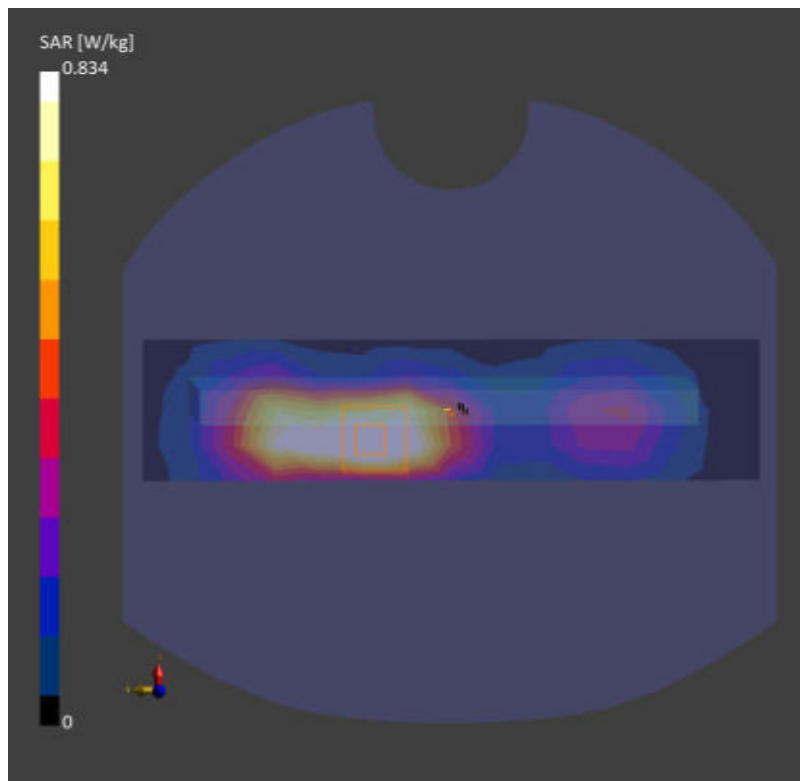

41_LTE Band 2_20M_QPSK_1RB_0Offset_Left Side_10mm_Ch18700

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.747 W/kg; SAR (10g) = 0.431 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.894 W/kg; SAR (10g) = 0.493 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

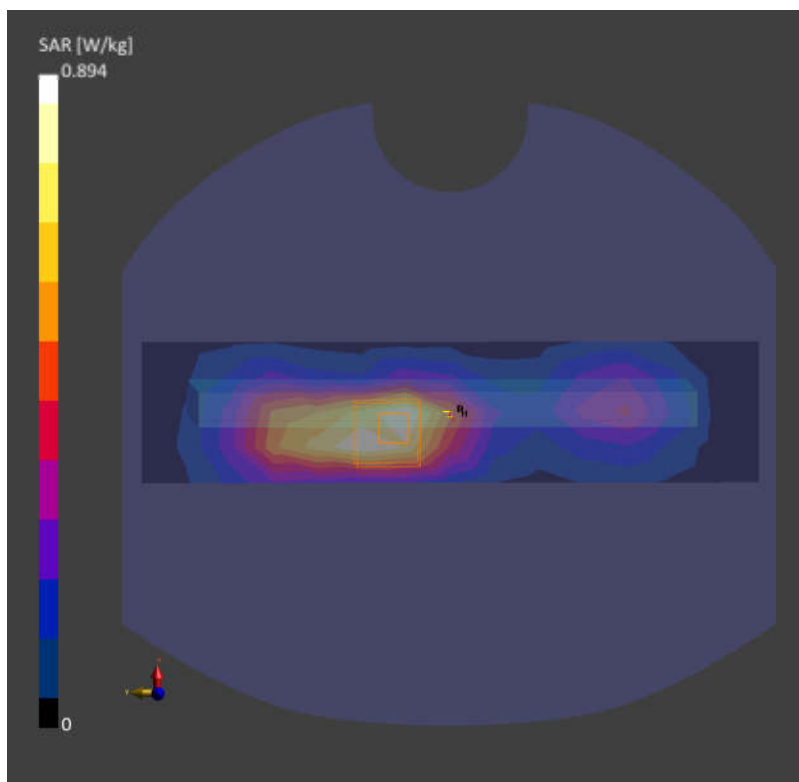

42_FR1 n2_20M_QPSK_1RB_1Offset_Left Side_10mm_Ch372000

Communication System: 5G NR (DFT-s-OFDM, 1RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.736 W/kg; SAR (10g) = 0.425 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

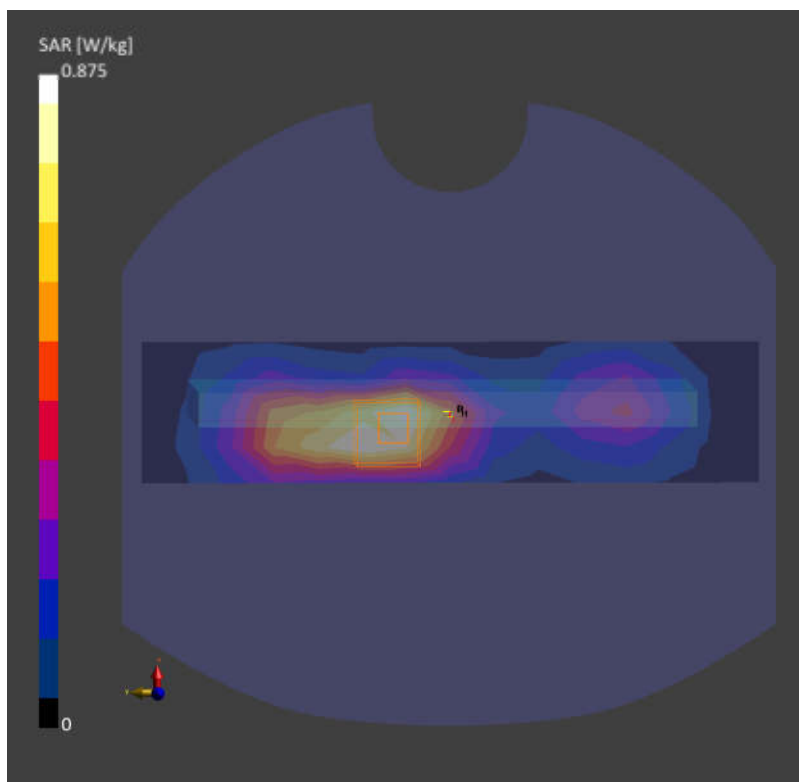

43_LTE Band 7_20M_QPSK_1RB_0Offset_Left Side_10mm_Ch21350

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.444 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

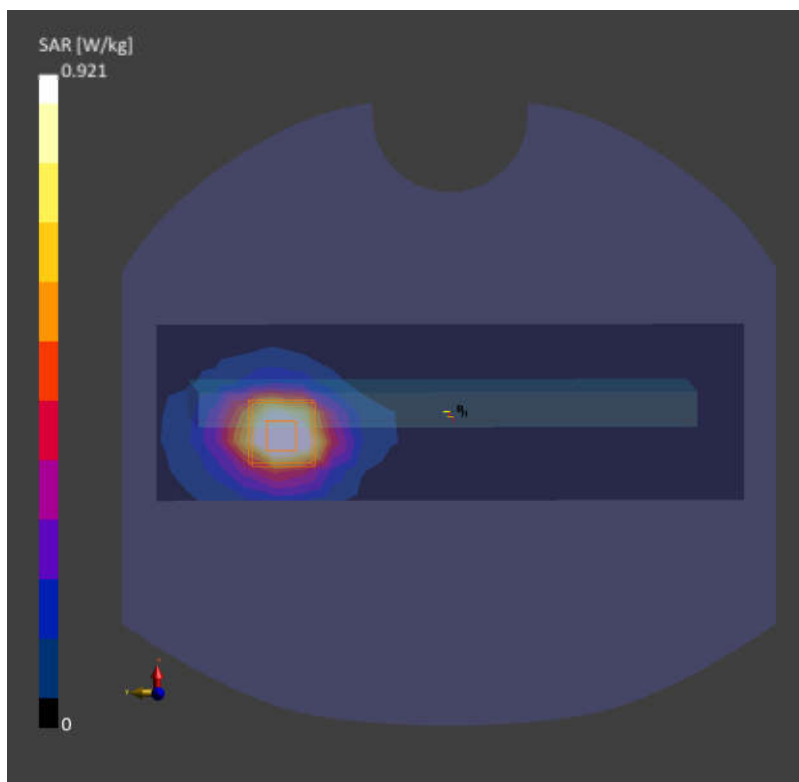

44_LTE Band 41_20M_QPSK_1RB_0Offset_Left Side_10mm_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 2680.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.861 W/kg; SAR (10g) = 0.415 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.844 W/kg; SAR (10g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

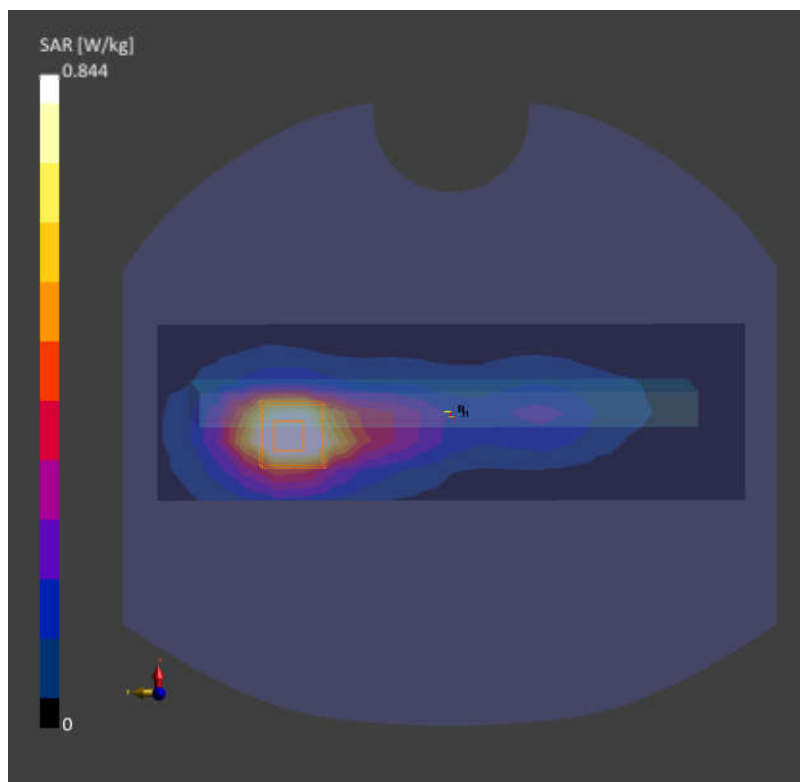

45_FR1 n7_40M_QPSK_108RB_54Offset_Left Side_10mm_Ch507000

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.784 W/kg; SAR (10g) = 0.373 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.872 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

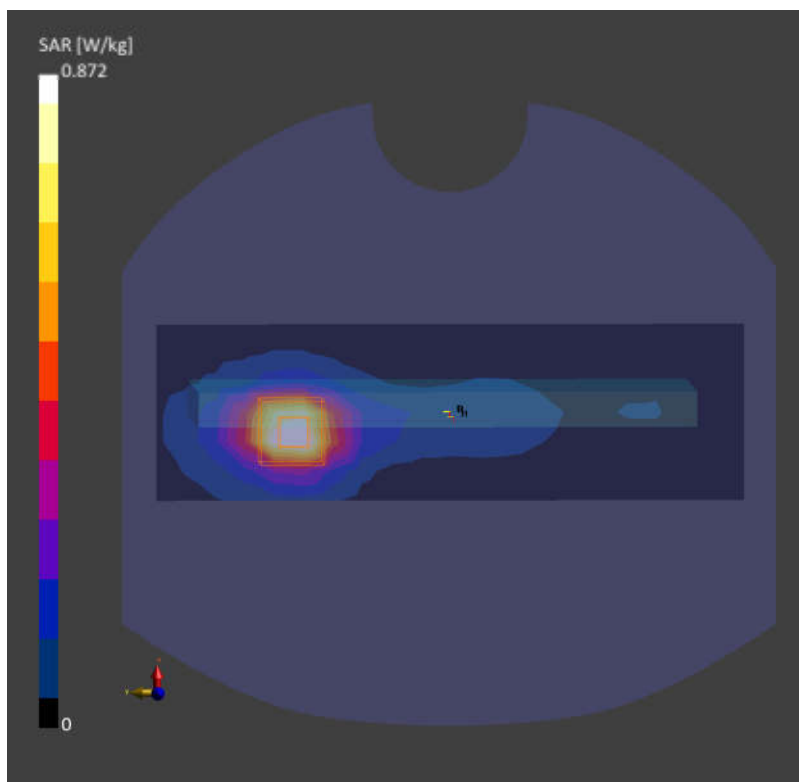

46_FR1 n41_100M_QPSK_135RB_69Offset_Left Side_10mm_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.821 W/kg; SAR (10g) = 0.435 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.793 W/kg; SAR (10g) = 0.342 W/kg
Smallest distance from peaks to all points 3 dB below = 10.5 mm
Ratio of SAR at M2 to SAR at M1 = 84.8 %

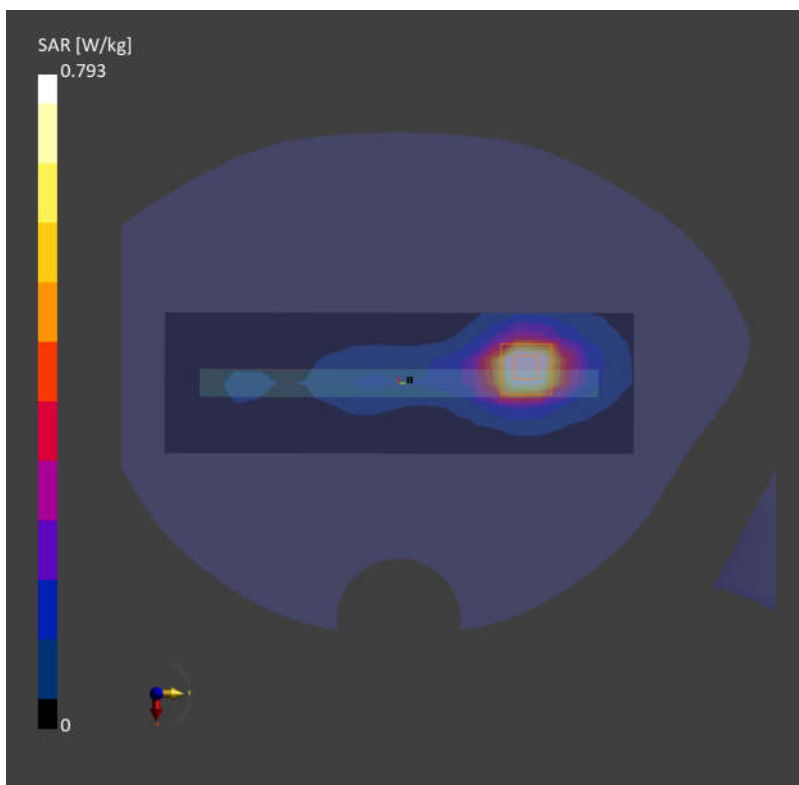

47_LTE Band 42_20M_QPSK_1RB_0Offset_Front_10mm_Ch42590

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

Frequency: 3500.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.78$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.27, 7.06, 7.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.590 W/kg; SAR (10g) = 0.276 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

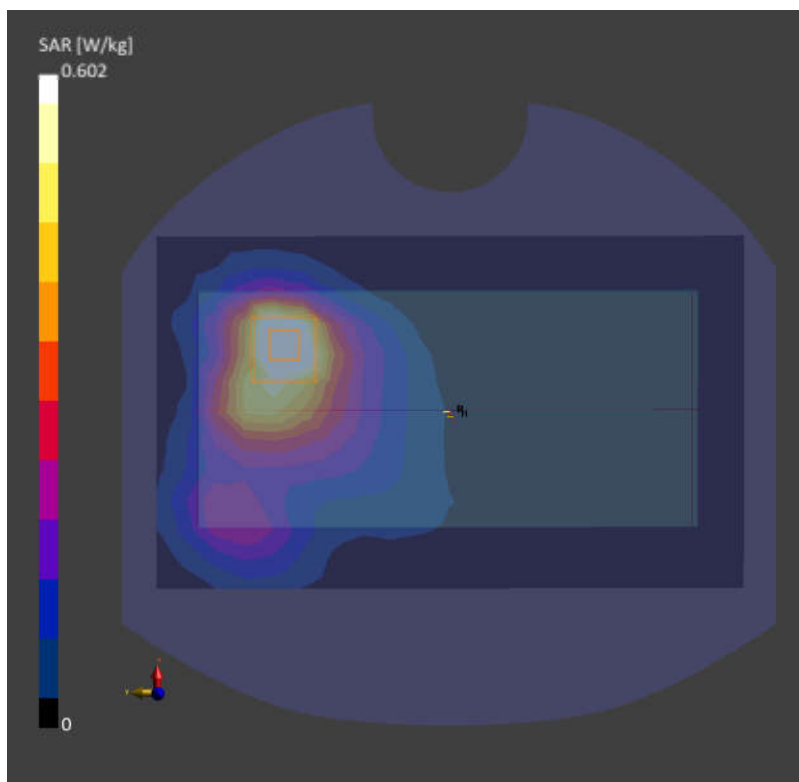

48_FR1 n77 Part 27Q_100M_QPSK_1RB_1Offset_Left Side_10mm_Ch633334

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3500.010 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.27, 7.06, 7.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.819 W/kg; SAR (10g) = 0.350 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.799 W/kg; SAR (10g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

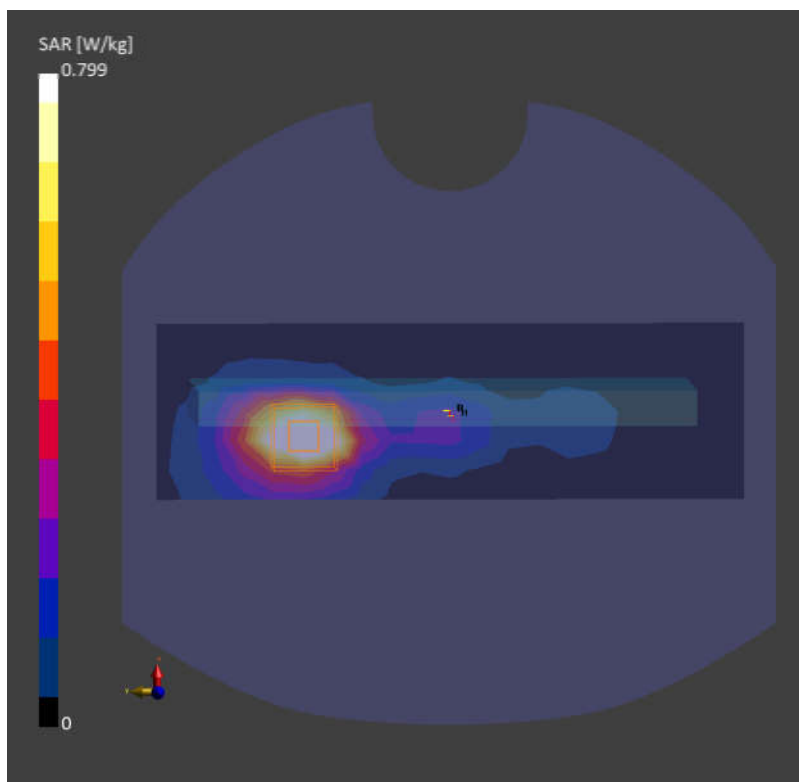

49_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2412.000 MHz; Duty Cycle: 1:1.017

Medium: HSL Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.65, 7.44, 7.77); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.656 W/kg; SAR (10g) = 0.333 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.752 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

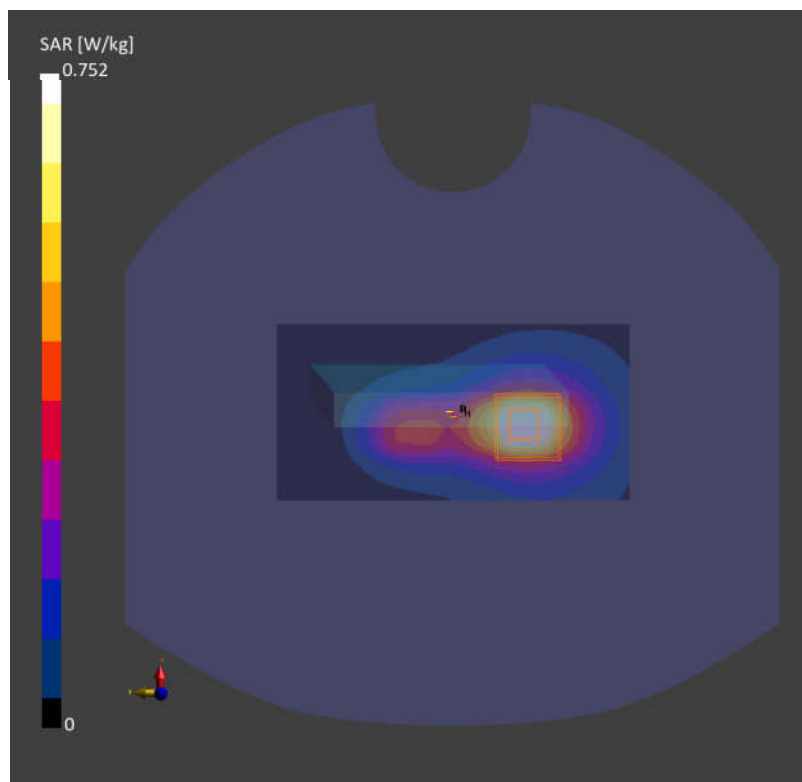

50_Bluetooth_1Mbps_Top Side_10mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL_2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 40.394$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.44, 6.79, 7.48); Calibrated: 2024/1/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1650; Calibrated: 2023/9/13
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0304 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.083 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.0306 W/kg

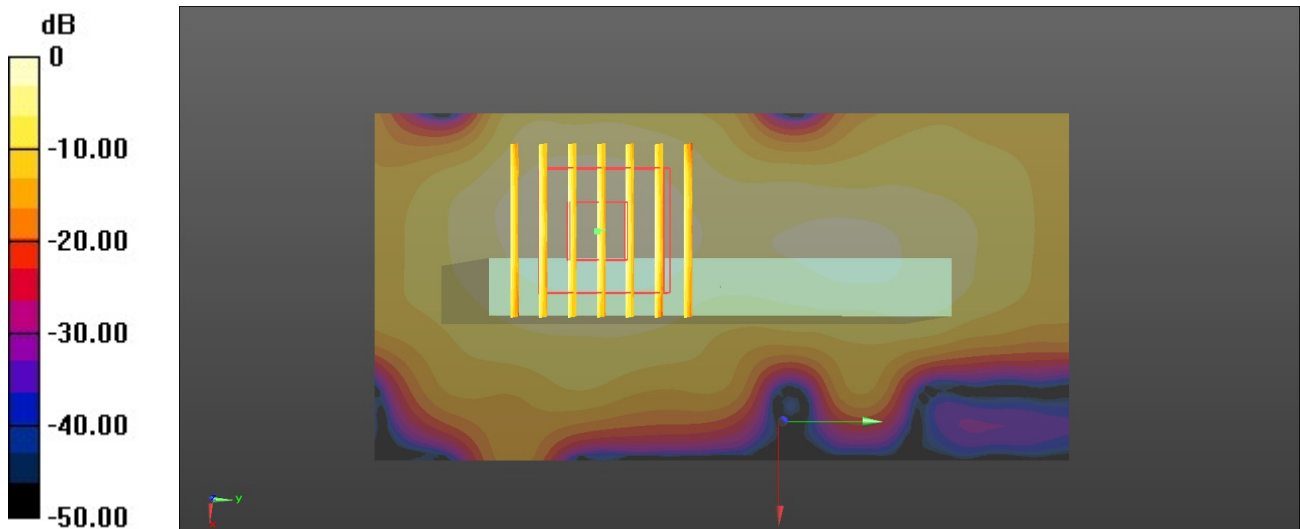

0 dB = 0.0306 W/kg = -14.87 dBW/kg

51_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch48

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)

Frequency: 5240.000MHz; Duty Cycle: 1:1.007

Medium: HSL Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(6.22, 6.05, 6.32); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.279 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.728 W/kg; SAR (10g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

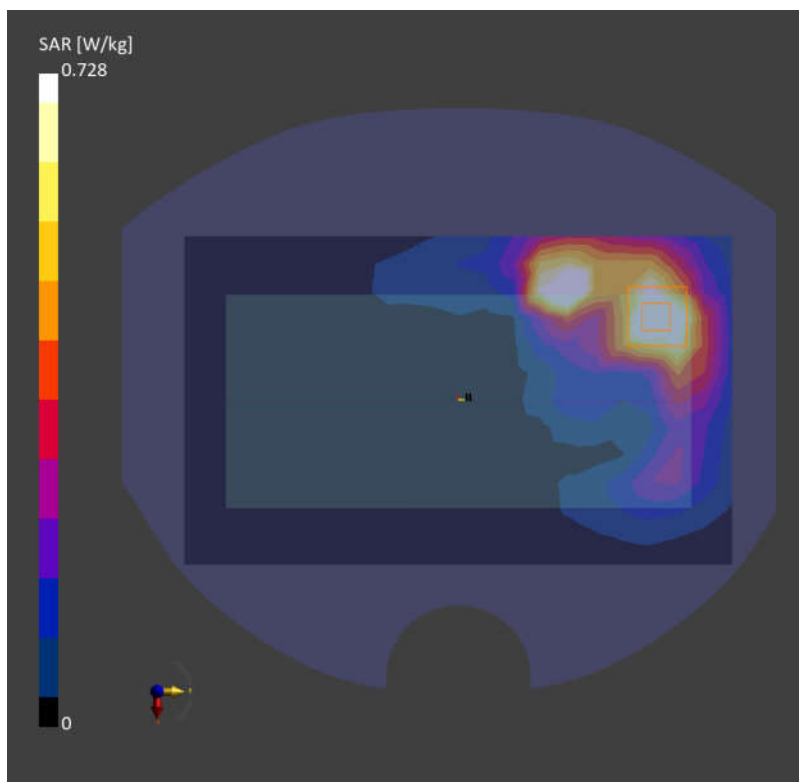

52_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch165

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)

Frequency: 5825.000MHz; Duty Cycle: 1:1.007

Medium: HSL Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.57, 5.42, 5.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.878 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.754 W/kg; SAR (10g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

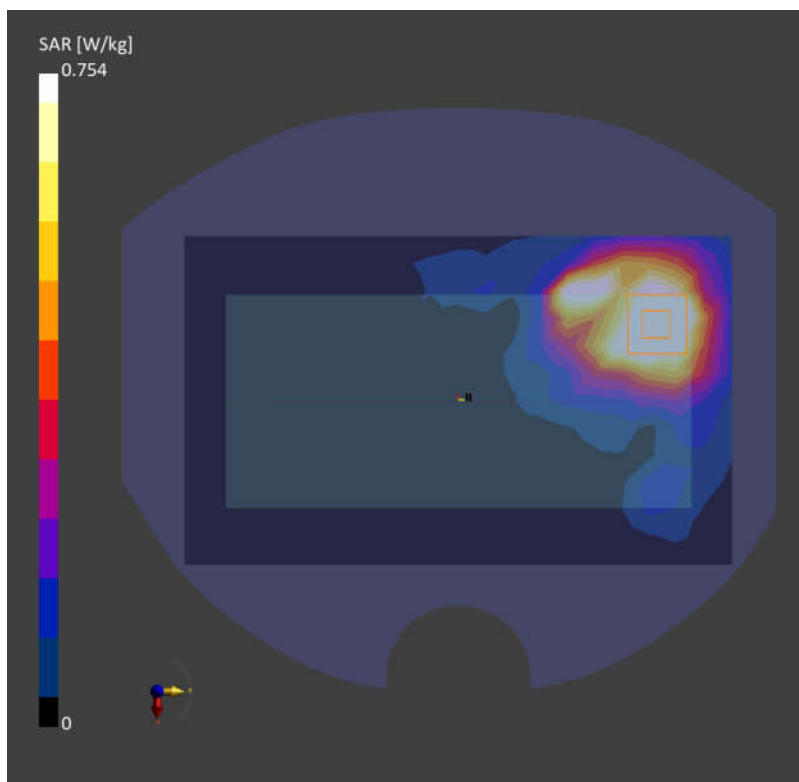

53_LTE Band 71_20M_QPSK_1RB_0Offset_Back_15mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.168 W/kg; SAR (10g) = 0.113 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.167 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

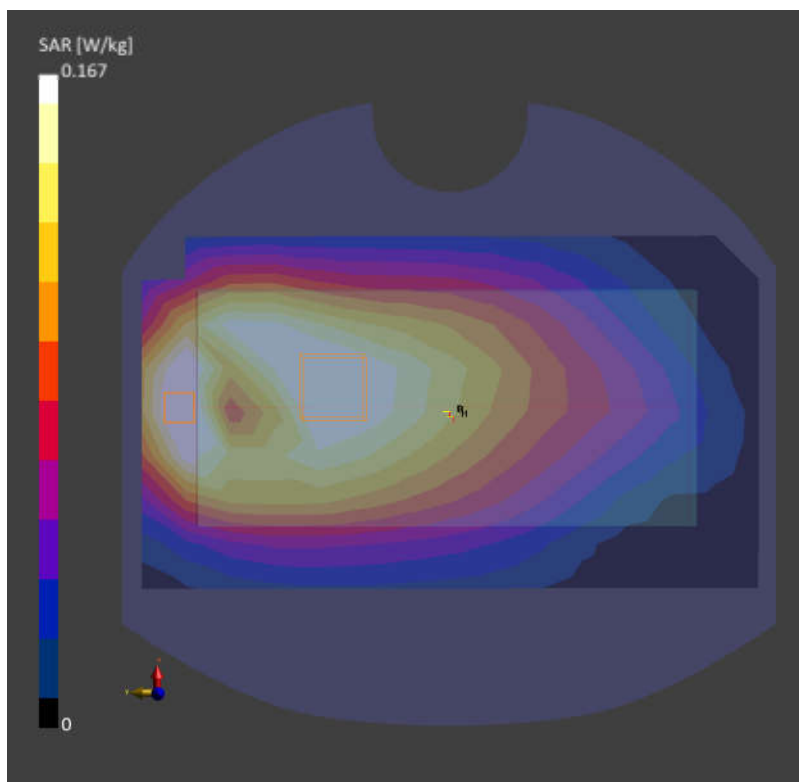

54_LTE Band 13_10M_QPSK_1RB_0Offset_Back_15mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.157 W/kg; SAR (10g) = 0.104 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.157 W/kg; SAR (10g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 87.8 %

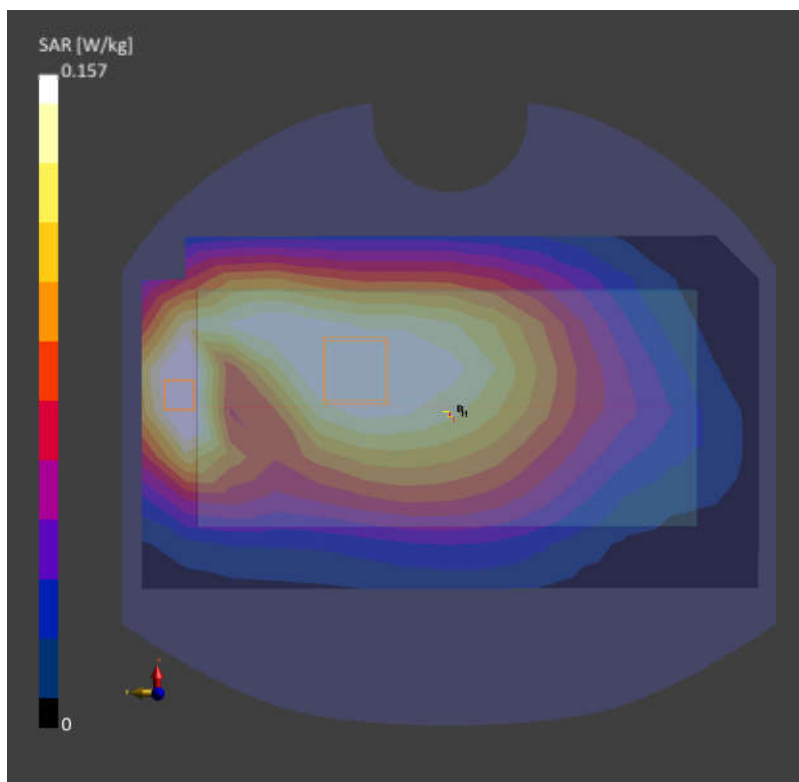

55_LTE Band 17_10M_QPSK_1RB_0Offset_Back_15mm_Ch23790

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 710.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 710.000$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.165 W/kg; SAR (10g) = 0.113 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

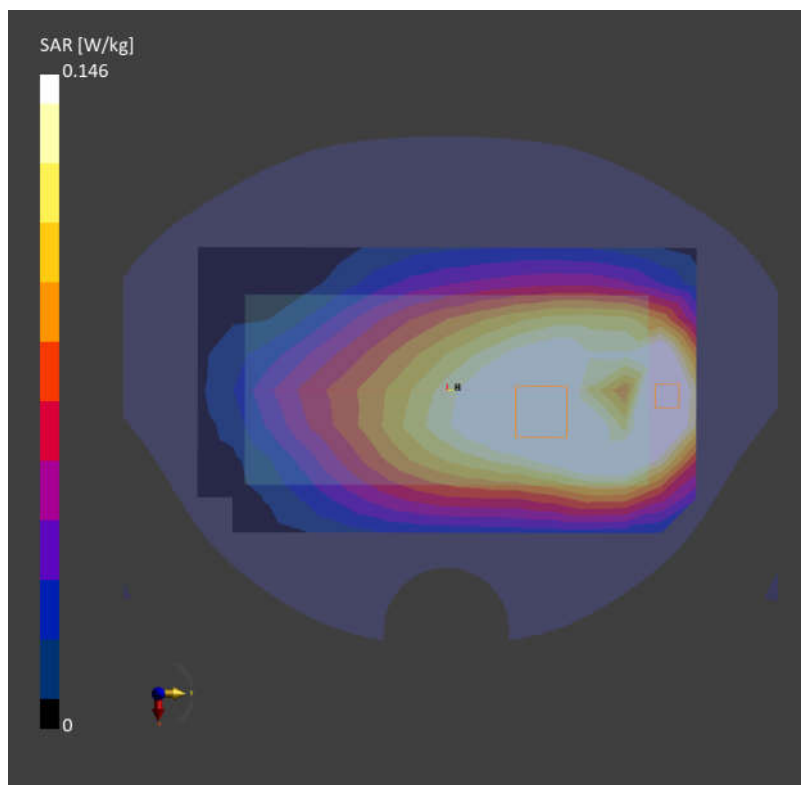

56_FR1 n71_20M_QPSK_50RB_28Offset_Back_15mm_Ch136100

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.49, 10.2, 10.66); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.253 W/kg; SAR (10g) = 0.180 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.259 W/kg; SAR (10g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.4 %

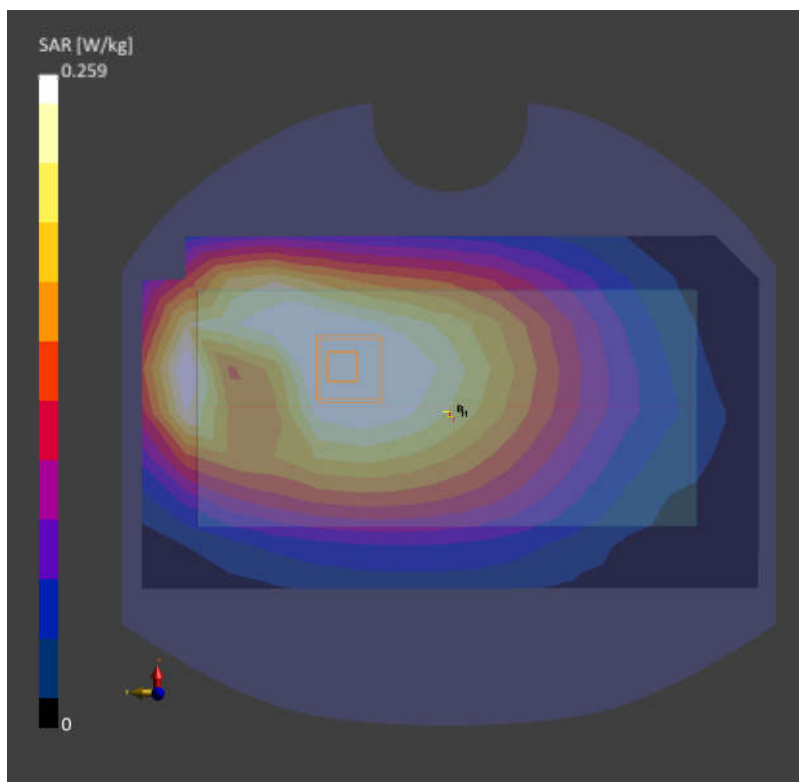

57_GSM850_GPRS (2 Tx slots)_Back_15mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 836.400 MHz; Duty Cycle: 1:4.15

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10024-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.207 W/kg; SAR (10g) = 0.132 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.200 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

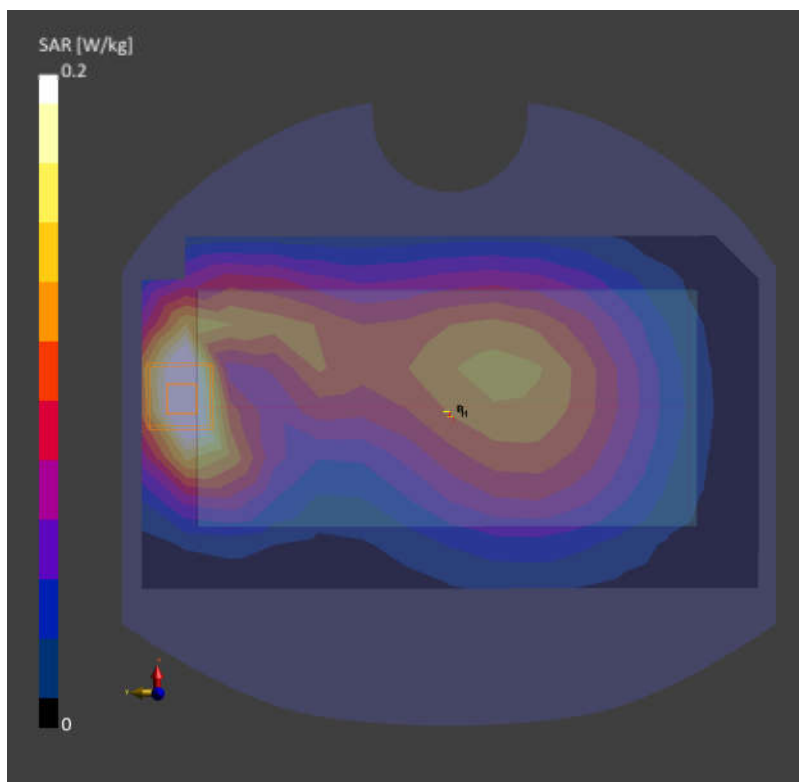

58_WCDMA V_RMC 12.2Kbps_Back_15mm_Ch4182

Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r =$

41.2

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.138 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.0 %

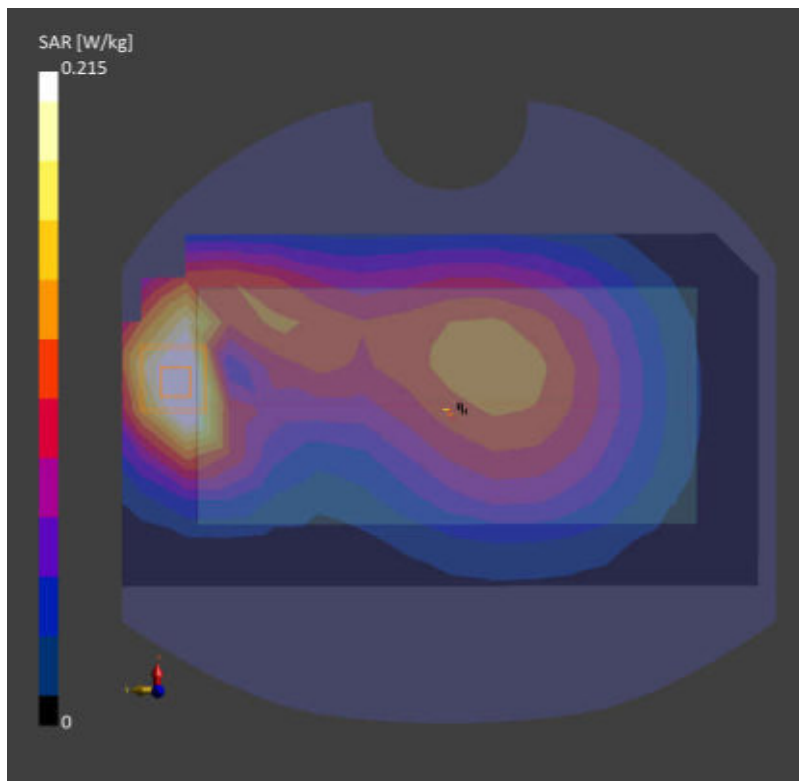

59_LTE Band 26_15M_QPSK_1RB_0Offset_Back_15mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.111 W/kg; SAR (10g) = 0.075 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.171 W/kg; SAR (10g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.8 %

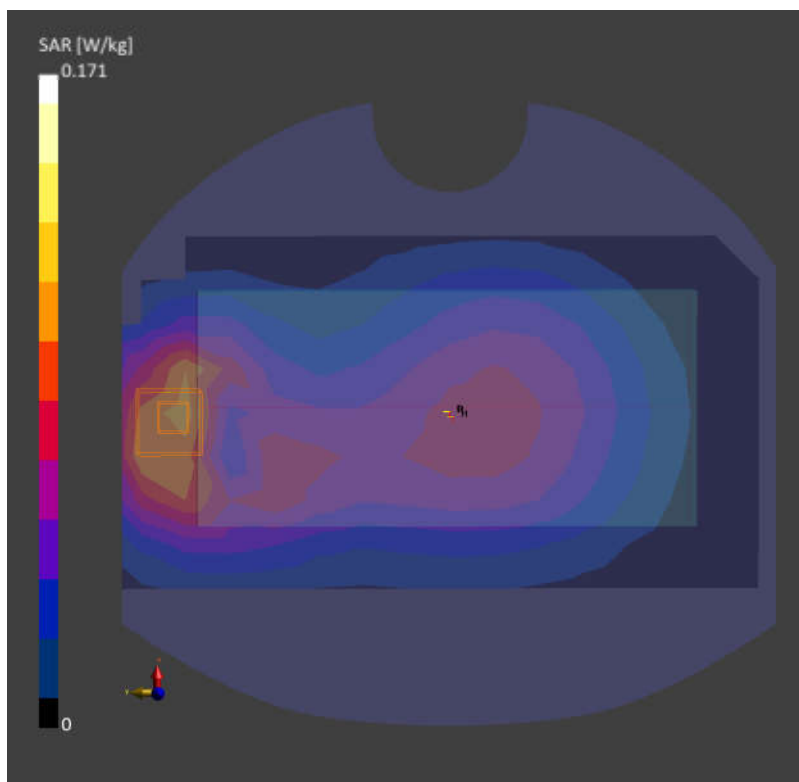

60_FR1 n26_20M_QPSK_50RB_28Offset_Back_15mm_Ch166300

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 9.94, 10.38); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.176 W/kg; SAR (10g) = 0.112 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.172 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

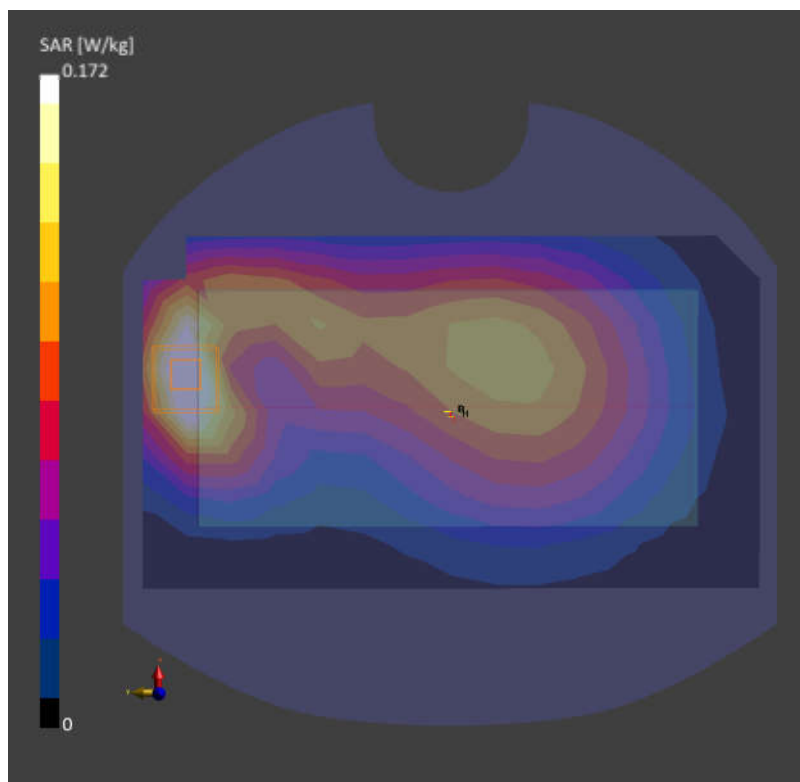

61_RFID_Front_15mm

Communication System: UID 0, RFID (0); Frequency: 902.75 MHz; Duty Cycle: 1:1.15

Medium: HSL_900 Medium parameters used: $f = 902.75$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 41.611$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4-SN3857; ConvF(9.29, 8.23, 9.75); Calibrated: 2024/1/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1650; Calibrated: 2023/9/13
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.378 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.83 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.381 W/kg

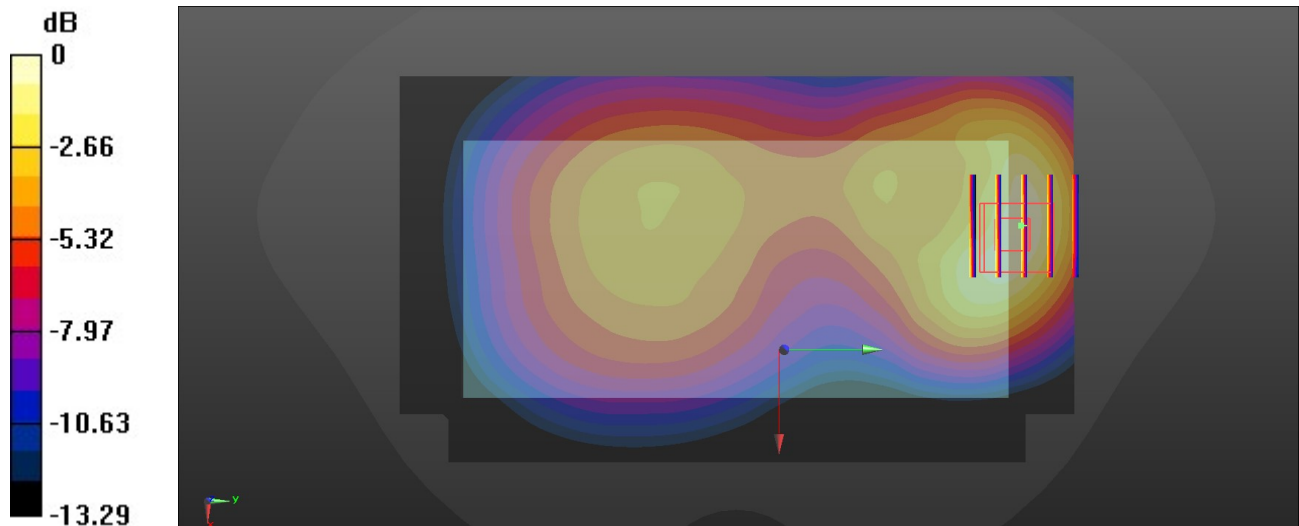

0 dB = 0.381 W/kg = -4.19 dBW/kg

62_WCDMA IV_RMC 12.2Kbps_Back_15mm_Ch1413

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.600 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.524 W/kg; SAR (10g) = 0.308 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.508 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

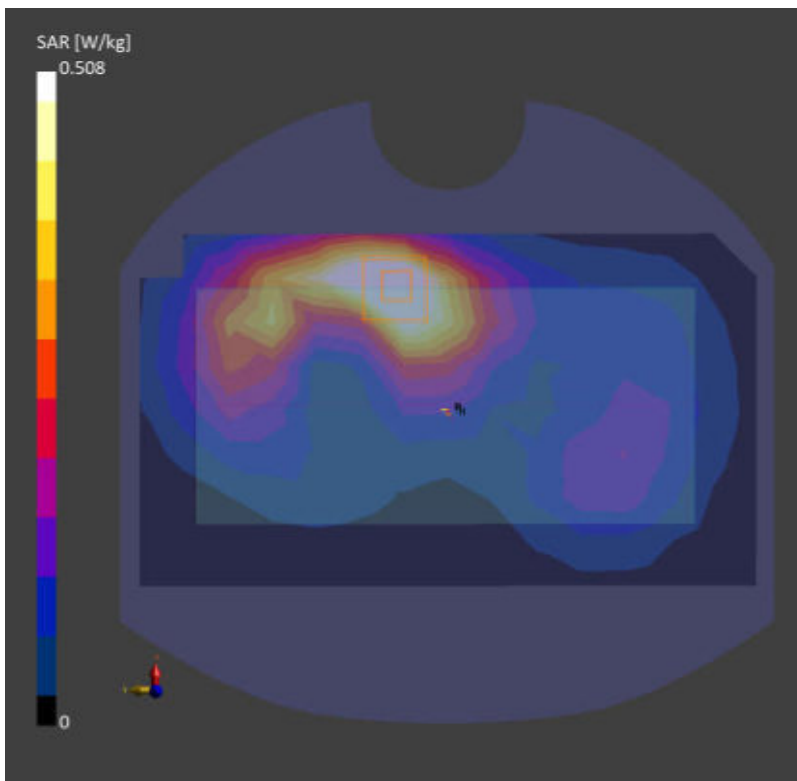

63_LTE Band 66_20M_QPSK_1RB_0Offset_Back_15mm_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.430 W/kg; SAR (10g) = 0.256 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

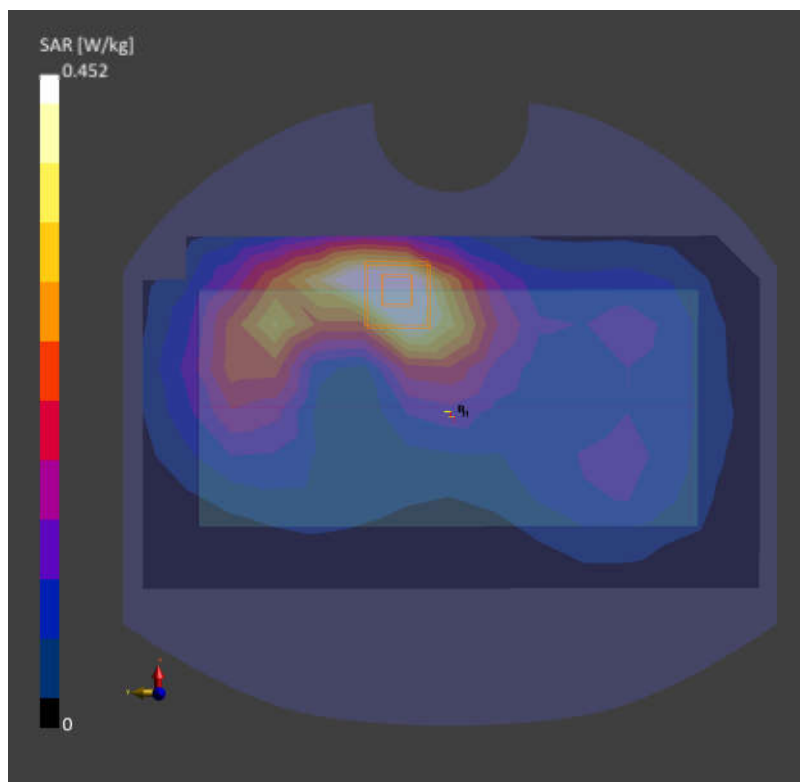

64_FR1 n66_40M_QPSK_108RB_54Offset_Back_15mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.59, 8.35, 8.73); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.468 W/kg; SAR (10g) = 0.270 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.459 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

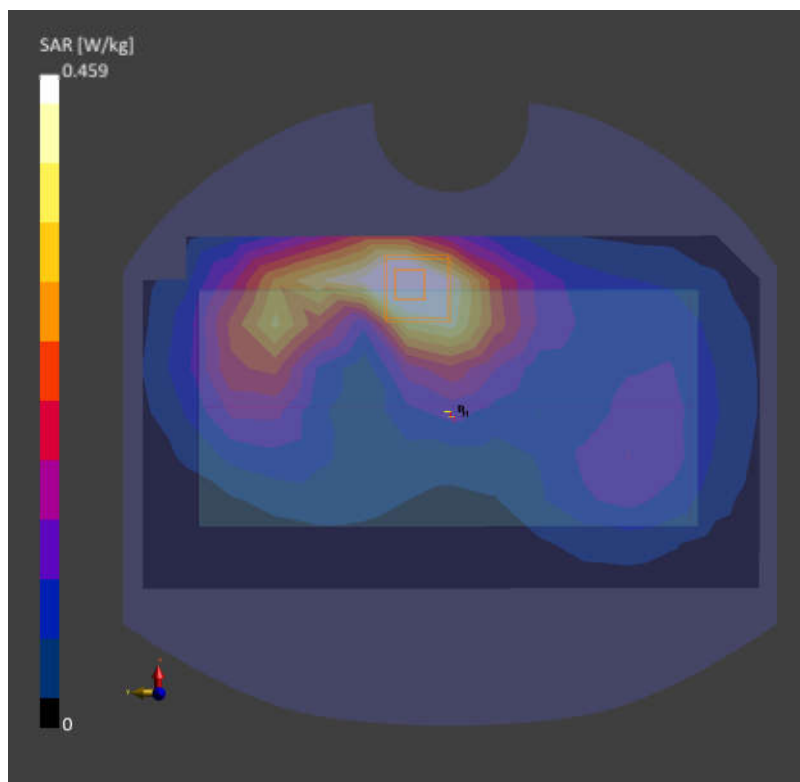

65_GSM1900_GPRS (2 Tx slots)_Back_15mm_Ch661

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 1880.000 MHz; Duty Cycle: 1:4.15

Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10024-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.175 W/kg; SAR (10g) = 0.104 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

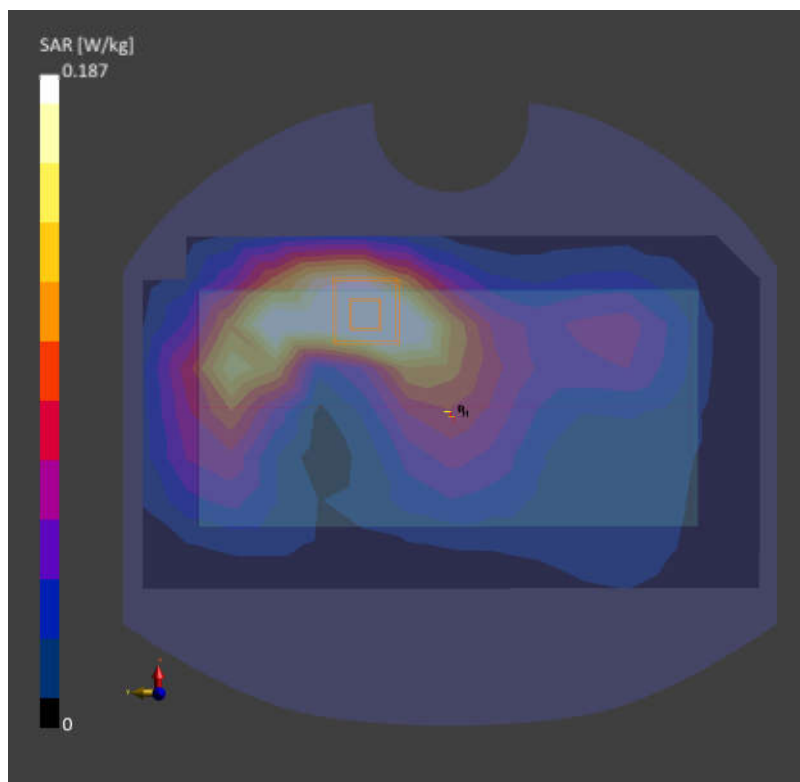

66_WCDMA II_RMC 12.2Kbps_Back_15mm_Ch9400

Communication System: UMTS-FDD (WCDMA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.228 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

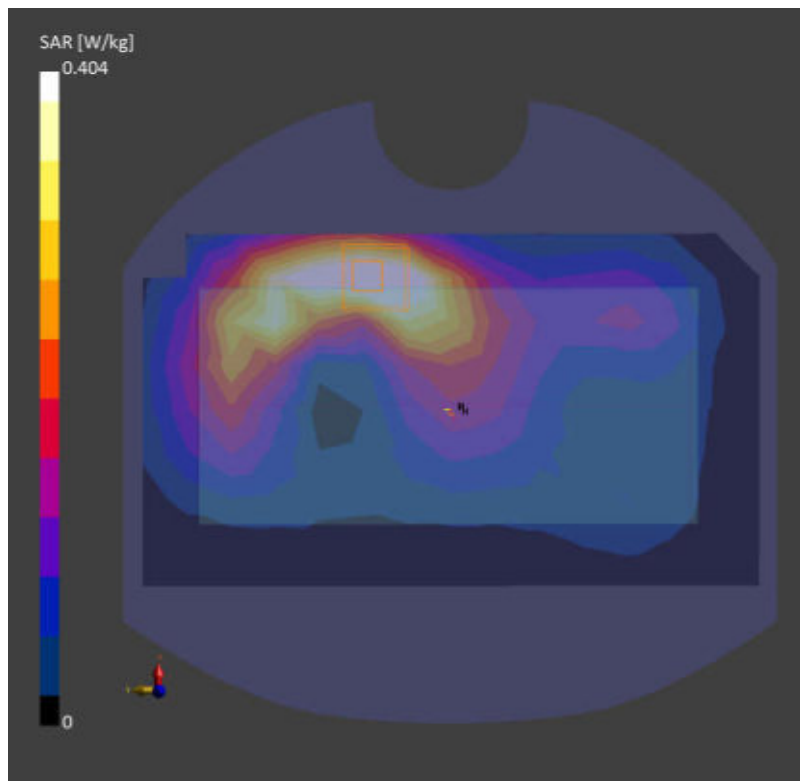

67_LTE Band 2_20M_QPSK_1RB_0Offset_Back_15mm_Ch18900

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.392 W/kg; SAR (10g) = 0.228 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

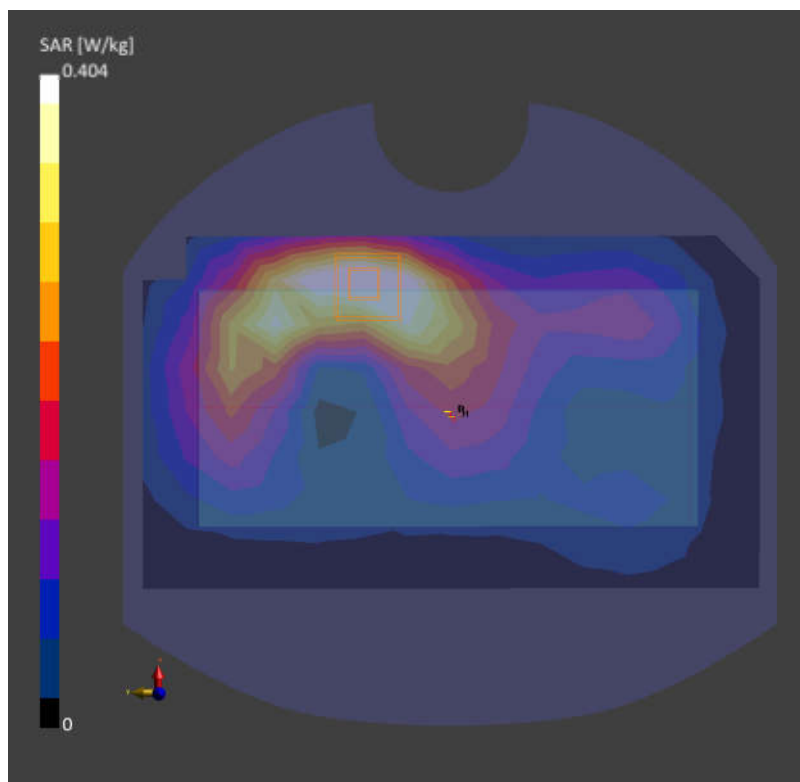

68_FR1 n2_20M_QPSK_50RB_28Offset_Back_15mm_Ch376000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.35, 8.11, 8.48); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.421 W/kg; SAR (10g) = 0.242 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.421 W/kg; SAR (10g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

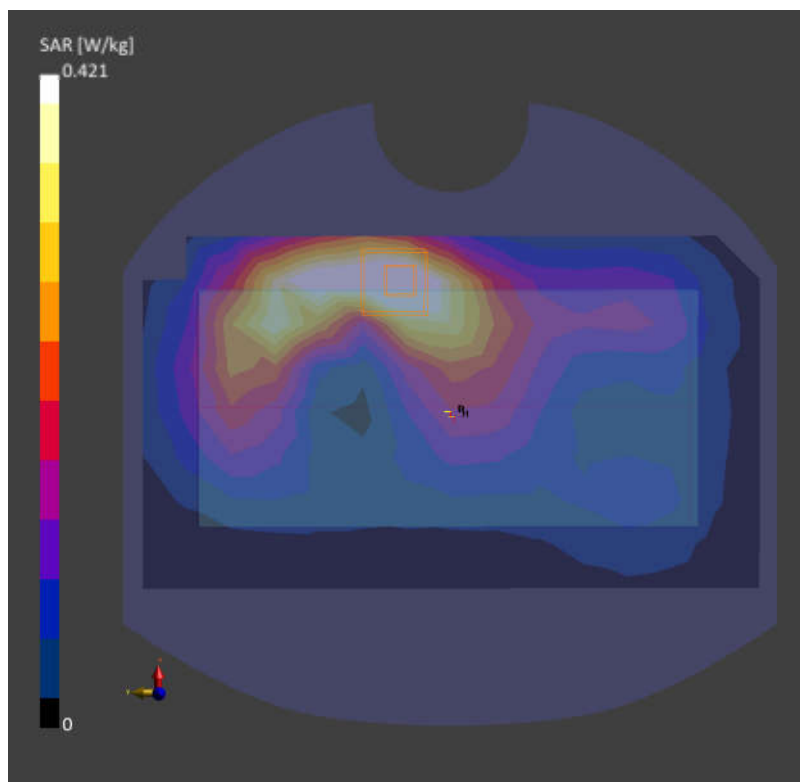

69_LTE Band 7_20M_QPSK_1RB_0Offset_Back_15mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.224 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.422 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

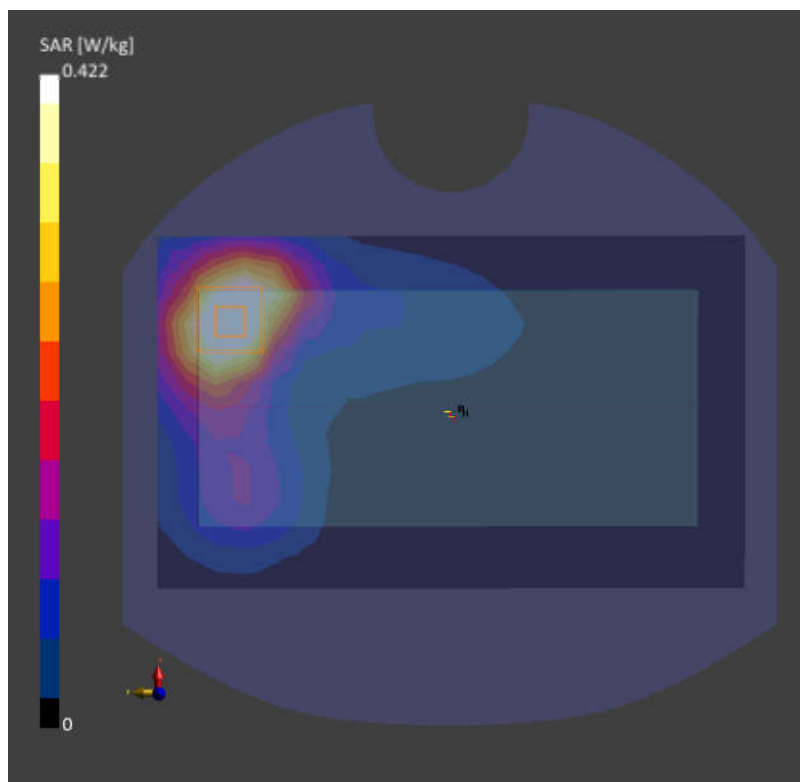

70_LTE Band 41_20M_QPSK_1RB_0Offset_Back_15mm_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.69, 7.48, 7.81); Calibrated: 2024-06-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.338 W/kg; SAR (10g) = 0.181 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.349 W/kg; SAR (10g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

