



FCC RADIO TEST REPORT

FCC ID : UZ7KC50A22
Equipment : KC50A22 Kiosk Computer
Brand Name : Zebra
Model Name : KC50A22
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 14, 2024 and testing was performed from May 14, 2024 to Jul. 10, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	8
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 Test Result	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	18
3.6 AC Conducted Emission Measurement.....	22
3.7 Antenna Requirements.....	24
4 List of Measuring Equipment.....	25
5 Measurement Uncertainty	27
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR450112C	01	Initial issue of report	Aug. 01, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	1.08 dB under the limit at 2483.52 MHz
3.6	15.207	AC Conducted Emission	Pass	7.02 dB under the limit at 13.15 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Mila Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	KC50A22 Kiosk Computer
Brand Name	Zebra
Model Name	KC50A22
FCC ID	UZ7KC50A22
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	REV:PT
SW Version	13-30-02.00-TG-U00-STD-ATH-04
OS Version	Android 13
MFD	10MAY24
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	ZEBRA	Model Name	PS000088A01
USB C-C Cable	Brand Name	ZEBRA	Part Number	CBL-EC5X-USBC3A-01
Stand	Brand Name	ZEBRA	Part Number	3PTY-SC-2000-CF2-01
Printer	Brand Name	ZEBRA	Model Name	ZD230t
2nd display	Brand Name	ZEBRA	Model Name	TD50-15F00
Edge scanner	Brand Name	ZEBRA	Part Number	ZFLX-SCNR-E00
Edge LED Light Bar	Brand Name	ZEBRA	Part Number	ZFLX-LTBAR-200
USB Cable	Brand Name	ZEBRA	Part Number	300283-002

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard									
Tx/Rx Frequency Range		2412 MHz ~ 2462 MHz							
Maximum Output Power to Antenna		MIMO <Ant. 1+2> 802.11b : 26.46 dBm / 0.4426 W 802.11g : 24.96 dBm / 0.3133 W 802.11n HT20 : 24.76 dBm / 0.2992 W 802.11ac VHT20 : 24.86 dBm / 0.3062 W 802.11ax HE20 : 24.96 dBm / 0.3133 W							
99% Occupied Bandwidth		MIMO <Ant. 1> 802.11b: 13.24 MHz 802.11g: 16.78 MHz 802.11ac VHT20 : 17.63 MHz 802.11ax HE20: 19.08 MHz MIMO <Ant. 2> 802.11b: 13.24 MHz 802.11g: 16.48 MHz 802.11ac VHT20 : 17.63 MHz 802.11ax HE20: 19.03 MHz							
Antenna Type / Gain		<Ant. 1>: PIFA Antenna with gain 2.81 dBi <Ant. 2>: Coupling Antenna with gain 2.80 dBi							
Type of Modulation		802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)							
Antenna Function Description		<table><tr><td></td><td>Ant. 1</td><td>Ant. 2</td></tr><tr><td>802.11 b/g/n/ac/ax MIMO</td><td>V</td><td>V</td></tr></table>			Ant. 1	Ant. 2	802.11 b/g/n/ac/ax MIMO	V	V
	Ant. 1	Ant. 2							
802.11 b/g/n/ac/ax MIMO	V	V							

Remark:

1. MIMO Ant. 1+2 Directional Gain is a calculated result from MIMO Ant. 1 and MIMO Ant. 2. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 1 + Ant. 2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 1 (dBi)	Ant 2 (dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4GHz	2.81	2.80	2.81	5.82	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT1} = 2.81$ dBi; $G_{ANT2} = 2.80$ dBi

Directional gain of power measurement = $\max(2.81, 2.80) + 0 = 2.81$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(2.81 \text{ dBi} / 20)} + 10^{(2.80 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 5.82 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)



1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

This device support 26/52/106/242-tone RU channel.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11ac VHT20	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + Scan Bar Code + USB C-C Cable Display with 2nd display + USB Cable with Printer + AC Adapter + LAN Link with Notebook + Edge USB-C with (Edge scanner + (Data Link with USB Flash Drive (USB to SD Card)) + Edge LED Light Bar + Mouse) + Stand
Remark:	Data Link with USB Flash Drive means data application transferred mode between EUT and USB Flash Drive.

Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11ax HE20
Low	01	01	01
Middle	06	06	06
High	11	11	11


Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

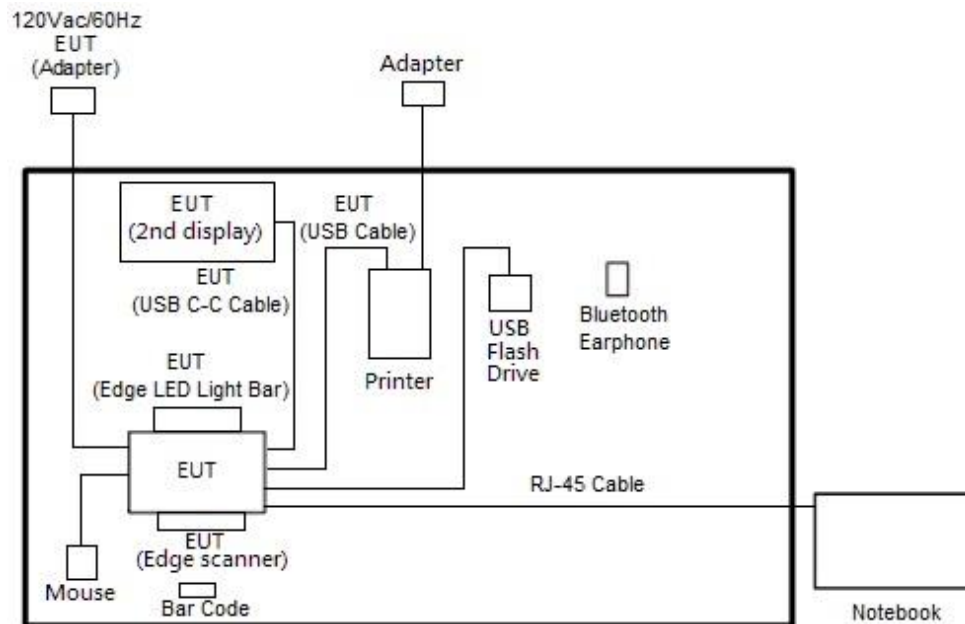

<WLAN Tx Mode>

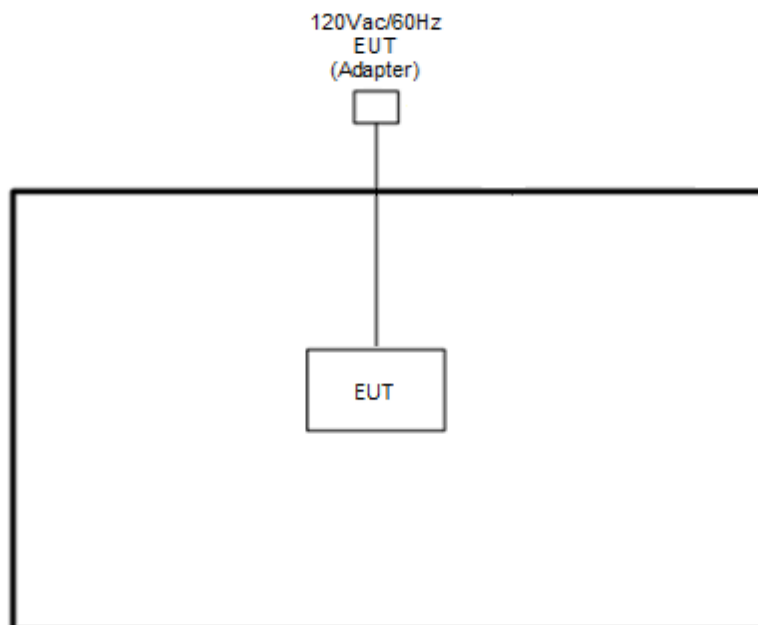

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Mouse	ACER	MOANUOA	FCC DoC	Shielded, 1.7m	N/A
5.	Bar Code	N/A	N/A	N/A	N/A	N/A
6.	USB Flash Drive	SanDisk	E4BDC	FCC DoC	N/A	N/A
7.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.211.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

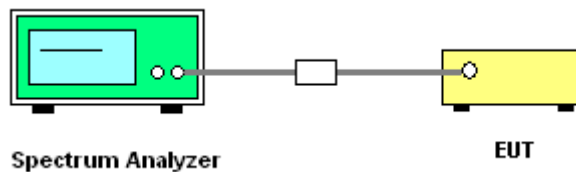

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

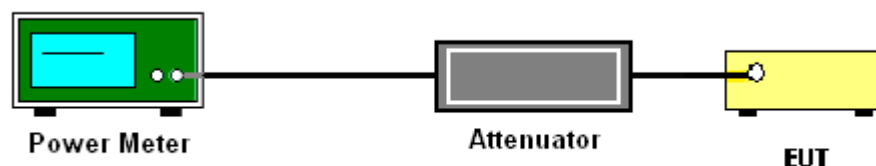

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit .

3.3.4 Test Setup

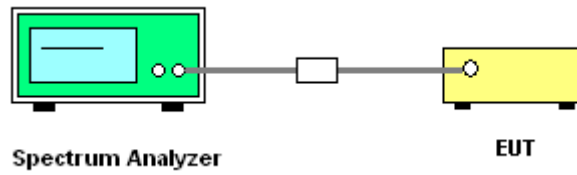

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

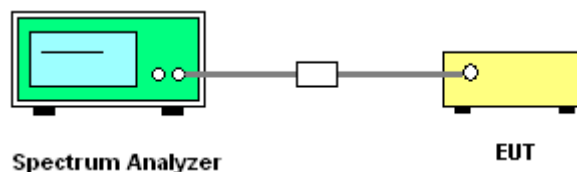

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

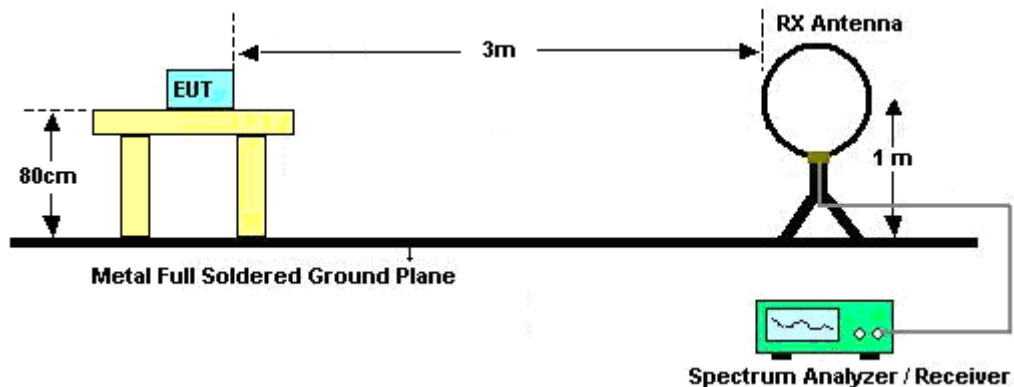


For radiated emissions from 30MHz to 1GHz

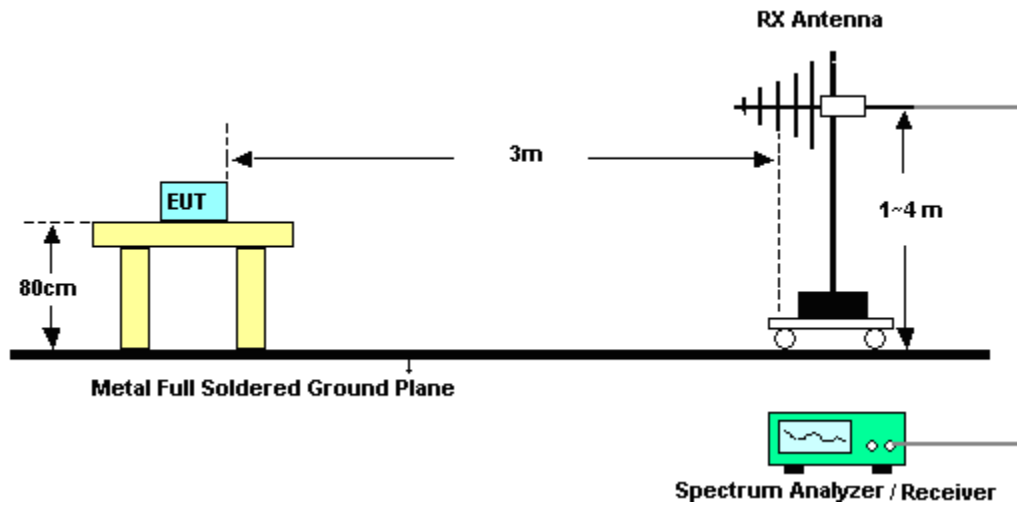

For radiated test from 1GHz to 18GHz

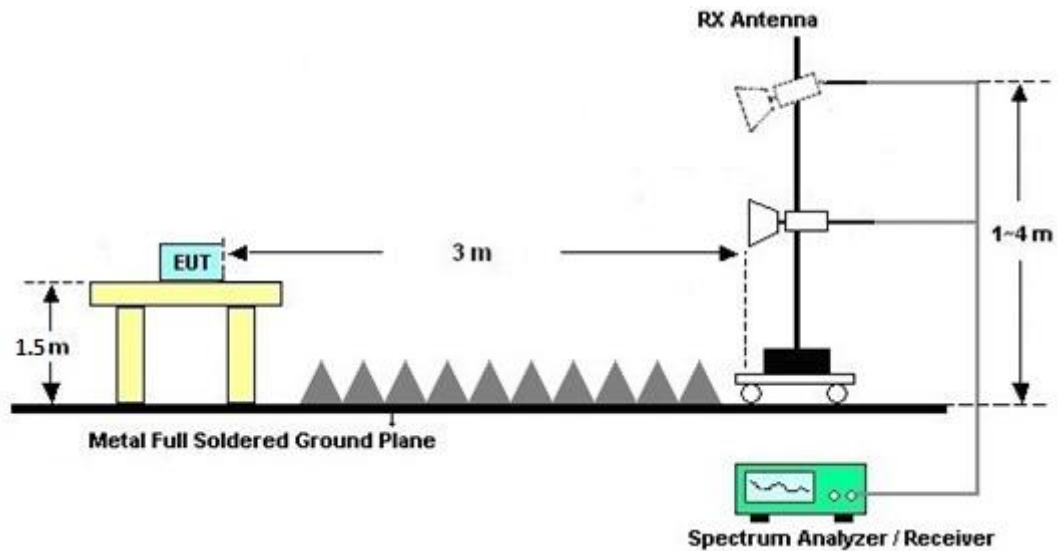

For radiated test above 18GHz

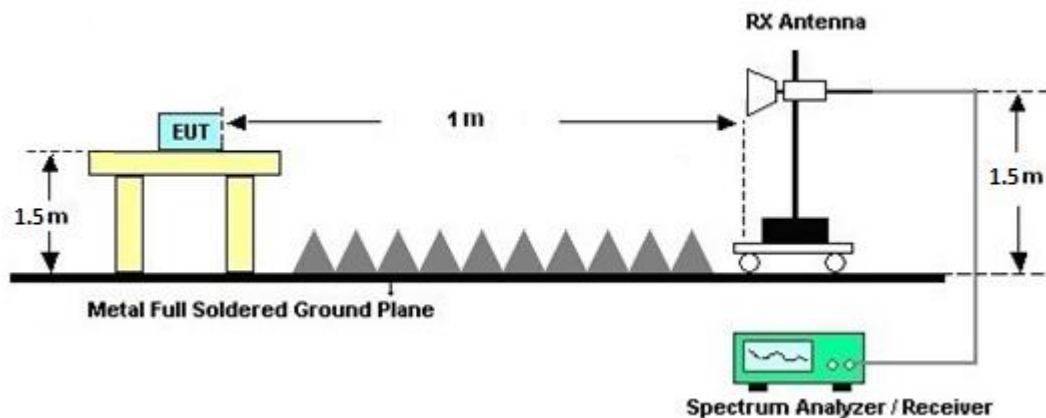



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

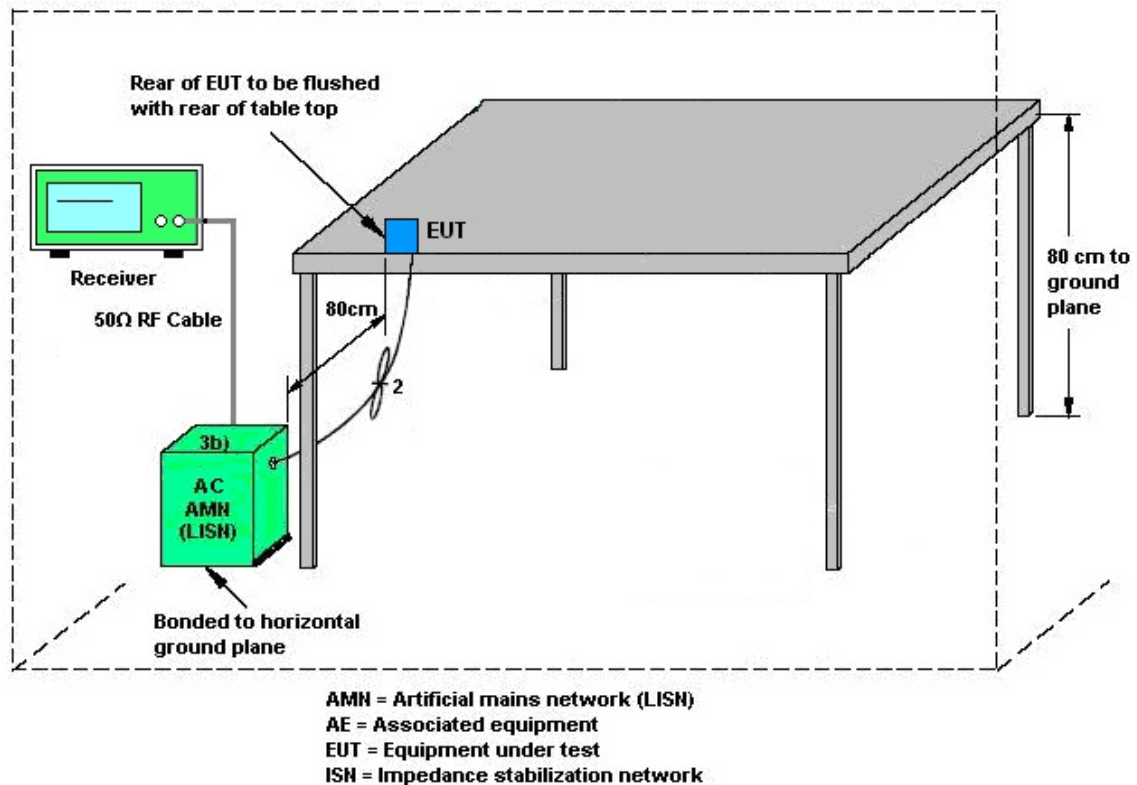

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 26, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 26, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz~200MHz	Oct. 20, 2023	Jun. 26, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Jun. 26, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Jun. 26, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Jun. 26, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Jun. 26, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Sep. 12, 2023	May 14, 2024~Jul. 10, 2024	Sep. 11, 2024	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	May 14, 2024~Jul. 10, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	May 14, 2024~Jul. 10, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 12, 2023	May 14, 2024~Jul. 10, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jul. 10, 2023	May 14, 2024~Jun. 17, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 18, 2024	Jun. 17, 2024~Jun. 25, 2024	May 17, 2025	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Jun. 25, 2024~Jul. 10, 2024	Jun. 23, 2025	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	May 14, 2024~Jul. 10, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Sep. 06, 2023	May 14, 2024~Jul. 10, 2024	Sep. 05, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Aug. 31, 2023	May 14, 2024~Jul. 10, 2024	Aug. 30, 2024	Radiation (03CH22-HY)
EMI Test Receiver	Keysight	N9038B	MY62210111	20Hz~8.4GHz	Aug. 23, 2023	May 14, 2024~Jul. 10, 2024	Aug. 22, 2024	Radiation (03CH22-HY)
Hygrometer	TECEPIL	DTM-303A	TP211469	N/A	Jan. 03, 2024	May 14, 2024~Jul. 10, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 14, 2024~Jul. 10, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 14, 2024~Jul. 10, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 14, 2024~Jul. 10, 2024	N/A	Radiation (03CH22-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	May 14, 2024~ Jul. 10, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 14, 2024~ Jul. 10, 2024	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804 611/2,804615/ 2	N/A	Oct. 24, 2023	May 14, 2024~ Jul. 10, 2024	Oct. 23, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May 14, 2024~ Jul. 09, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jan. 10, 2024	May 14, 2024~ Jul. 09, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300485 (BOX4)	N/A	Apr. 08, 2024	May 14, 2024~ Jul. 09, 2024	Apr. 07, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	May 14, 2024~ Jul. 09, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24041 1	N/A	Conducted Other Test Item	N/A	May 14, 2024~ Jul. 09, 2024	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li and Kevin Xiao	Temperature:	21~25	°C
Test Date:	2024/5/14~2024/7/9	Relative Humidity:	51~54	%

MIMO<Ant. 1+2>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	2	1	2412	13.24	12.99	8.06	8.06	0.50	Pass
11b	1Mbps	2	6	2437	13.04	13.19	8.07	8.08	0.50	Pass
11b	1Mbps	2	11	2462	13.04	13.24	8.07	8.06	0.50	Pass
11g	6Mbps	2	1	2412	16.43	16.38	16.31	16.30	0.50	Pass
11g	6Mbps	2	6	2437	16.78	16.48	16.06	16.31	0.50	Pass
11g	6Mbps	2	11	2462	16.38	16.43	16.30	16.33	0.50	Pass
VHT20	MCS0	2	1	2412	17.58	17.53	17.29	17.29	0.50	Pass
VHT20	MCS0	2	6	2437	17.63	17.63	17.54	17.30	0.50	Pass
VHT20	MCS0	2	11	2462	17.53	17.58	17.30	17.54	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	23.60	23.30	26.46	30.00		2.81		29.27		36.00		Pass
11b	1Mbps	2	6	2437	22.10	21.60	24.87	30.00		2.81		27.68		36.00		Pass
11b	1Mbps	2	11	2462	19.80	19.80	22.81	30.00		2.81		25.62		36.00		Pass
11g	6Mbps	2	1	2412	19.70	19.70	22.71	30.00		2.81		25.52		36.00		Pass
11g	6Mbps	2	6	2437	21.80	22.10	24.96	30.00		2.81		27.77		36.00		Pass
11g	6Mbps	2	11	2462	19.00	19.20	22.11	30.00		2.81		24.92		36.00		Pass
HT20	MCS0	2	1	2412	18.40	18.40	21.41	30.00		2.81		24.22		36.00		Pass
HT20	MCS0	2	6	2437	21.70	21.80	24.76	30.00		2.81		27.57		36.00		Pass
HT20	MCS0	2	11	2462	17.60	18.00	20.81	30.00		2.81		23.62		36.00		Pass
VHT20	MCS0	2	1	2412	18.50	18.50	21.51	30.00		2.81		24.32		36.00		Pass
VHT20	MCS0	2	6	2437	21.80	21.90	24.86	30.00		2.81		27.67		36.00		Pass
VHT20	MCS0	2	11	2462	17.70	18.10	20.91	30.00		2.81		23.72		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	0.69	0.15	3.70	5.82		8.00		Pass
11b	1Mbps	2	6	2437	-1.03	-1.61	1.98	5.82		8.00		Pass
11b	1Mbps	2	11	2462	-3.35	-3.45	-0.34	5.82		8.00		Pass
11g	6Mbps	2	1	2412	-7.01	-7.44	-4.00	5.82		8.00		Pass
11g	6Mbps	2	6	2437	-4.51	-3.84	-0.83	5.82		8.00		Pass
11g	6Mbps	2	11	2462	-6.86	-7.84	-3.85	5.82		8.00		Pass
VHT20	MCS0	2	1	2412	-7.78	-7.33	-4.32	5.82		8.00		Pass
VHT20	MCS0	2	6	2437	-3.99	-4.56	-0.98	5.82		8.00		Pass
VHT20	MCS0	2	11	2462	-7.81	-7.43	-4.42	5.82		8.00		Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	2	1	2412	Full	18.98	18.93	18.90	18.53	0.50	Pass
HE20	MCS0	2	6	2437	Full	19.08	19.03	18.79	18.87	0.50	Pass
HE20	MCS0	2	11	2462	Full	18.93	18.93	18.84	18.88	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	18.60	18.60	21.61	30.00		2.81		24.42		36.00		Pass
HE20	MCS0	2	1	2412	26/0	11.80	10.90	14.38	30.00		2.81		17.19		36.00		Pass
HE20	MCS0	2	1	2412	52/37	12.50	11.70	15.13	30.00		2.81		17.94		36.00		Pass
HE20	MCS0	2	1	2412	106/53	15.80	15.40	18.61	30.00		2.81		21.42		36.00		Pass
HE20	MCS0	2	6	2437	Full	21.90	22.00	24.96	30.00		2.81		27.77		36.00		Pass
HE20	MCS0	2	6	2437	26/4	13.90	13.90	16.91	30.00		2.81		19.72		36.00		Pass
HE20	MCS0	2	6	2437	52/38	15.60	15.40	18.51	30.00		2.81		21.32		36.00		Pass
HE20	MCS0	2	6	2437	106/53	18.20	18.00	21.11	30.00		2.81		23.92		36.00		Pass
HE20	MCS0	2	11	2462	Full	17.80	18.20	21.01	30.00		2.81		23.82		36.00		Pass
HE20	MCS0	2	11	2462	26/8	9.80	10.60	13.23	30.00		2.81		16.04		36.00		Pass
HE20	MCS0	2	11	2462	52/40	12.70	13.20	15.97	30.00		2.81		18.78		36.00		Pass
HE20	MCS0	2	11	2462	106/54	14.80	15.60	18.23	30.00		2.81		21.04		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	-6.56	-6.71	-3.55	5.82		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-6.59	-7.41	-3.58	5.82		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-6.77	-6.81	-3.76	5.82		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-7.27	-8.07	-4.26	5.82		8.00		Pass
HE20	MCS0	2	6	2437	Full	-4.54	-4.43	-1.42	5.82		8.00		Pass
HE20	MCS0	2	6	2437	26/4	-4.98	-4.46	-1.45	5.82		8.00		Pass
HE20	MCS0	2	6	2437	52/38	-5.12	-4.71	-1.70	5.82		8.00		Pass
HE20	MCS0	2	6	2437	106/53	-4.56	-5.13	-1.55	5.82		8.00		Pass
HE20	MCS0	2	11	2462	Full	-7.94	-7.19	-4.18	5.82		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-8.58	-7.46	-4.45	5.82		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-8.54	-7.41	-4.40	5.82		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-8.48	-7.22	-4.21	5.82		8.00		Pass

Measured power density (dBm) has offset with cable loss.


**6dB and 99% Occupied Bandwidth**

<802.11b>

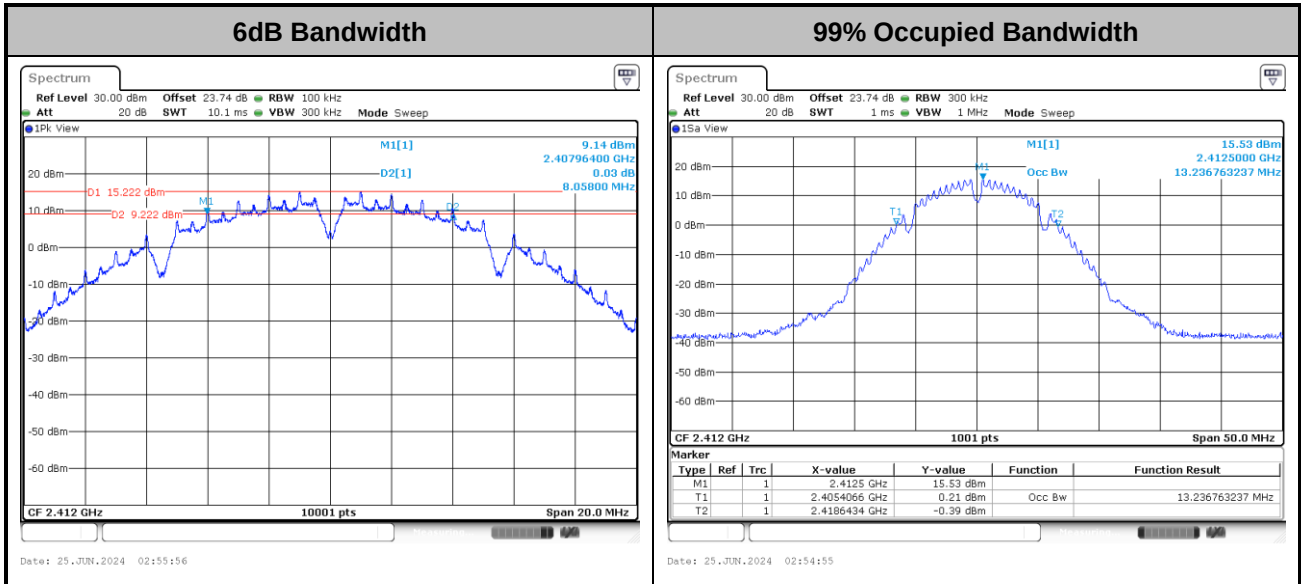

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

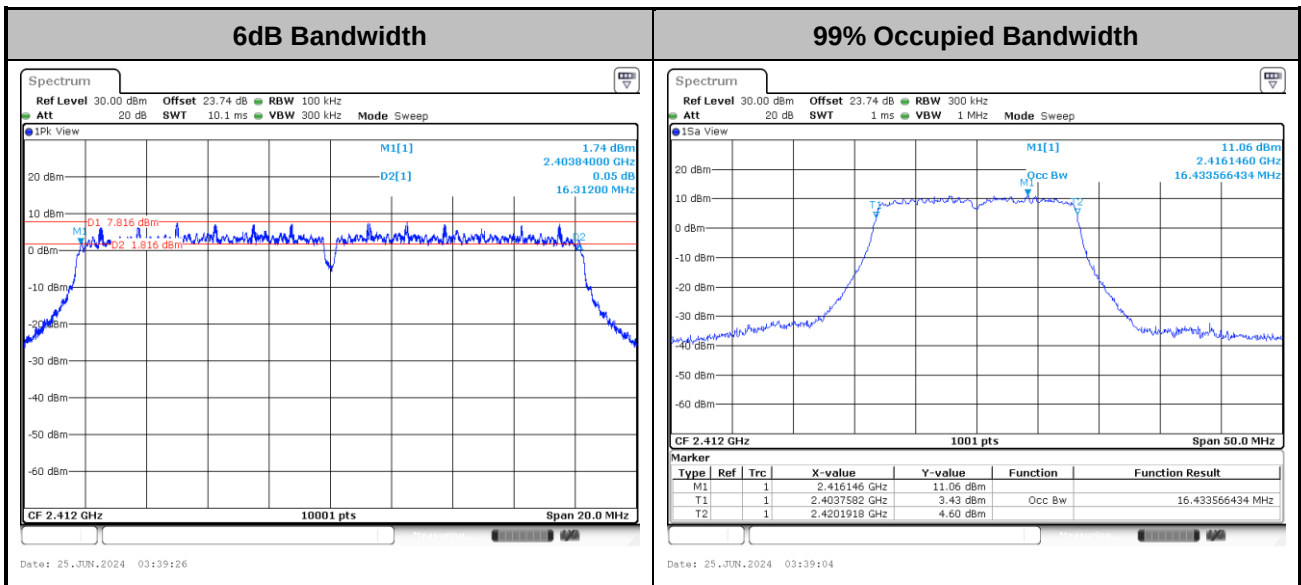

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT20>

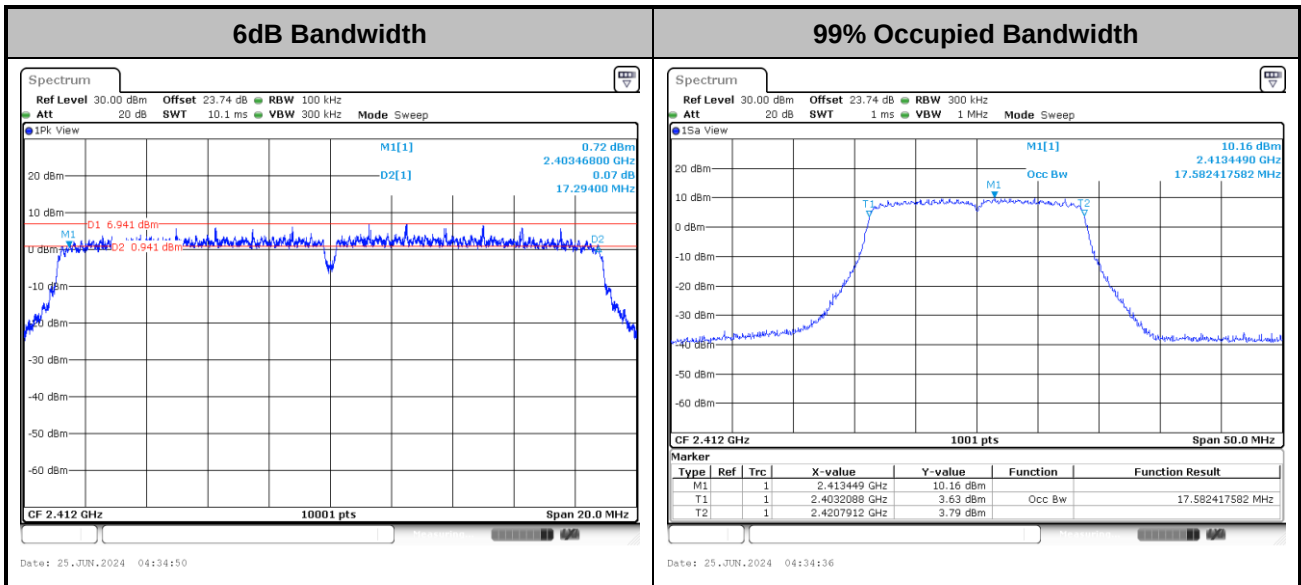

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE20>

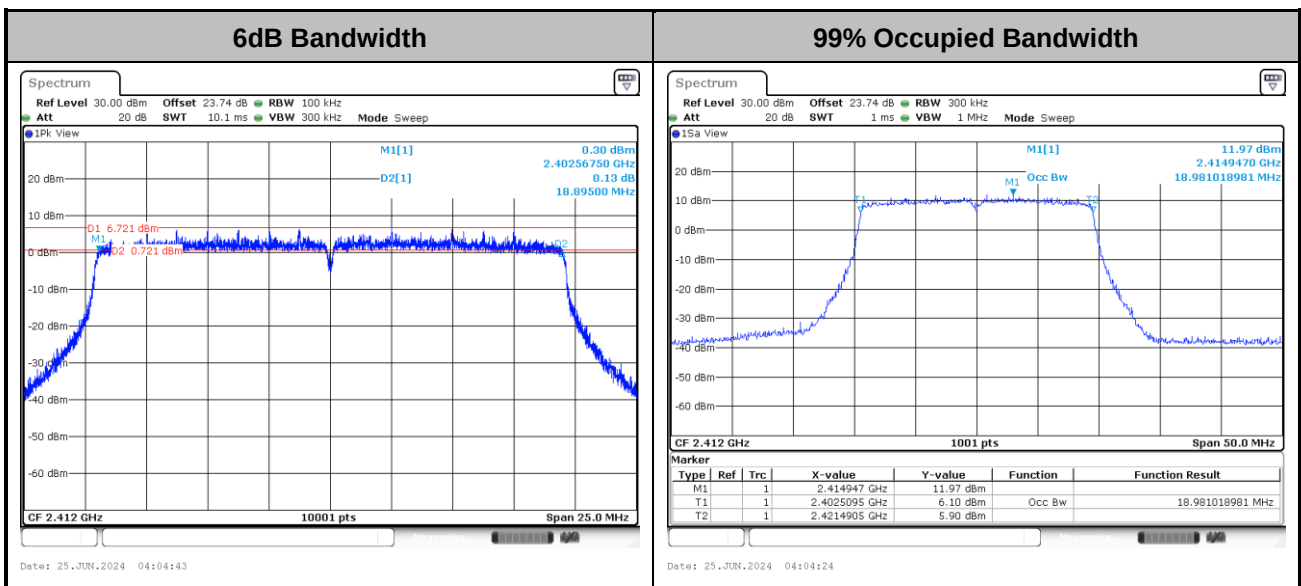



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Power Spectral Density(dBm/3kHz)**

<802.11b>

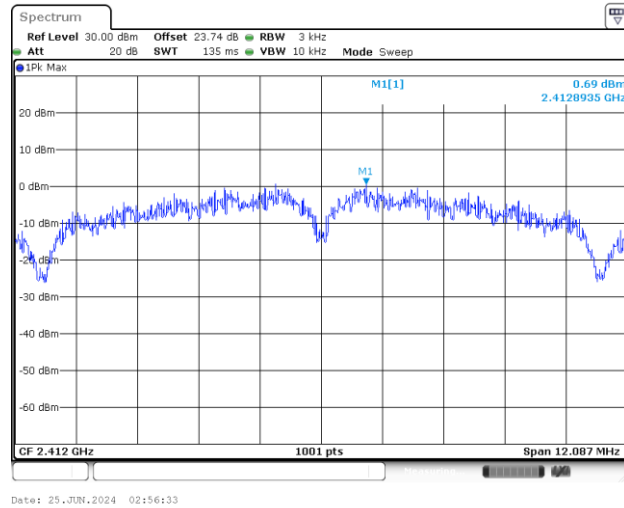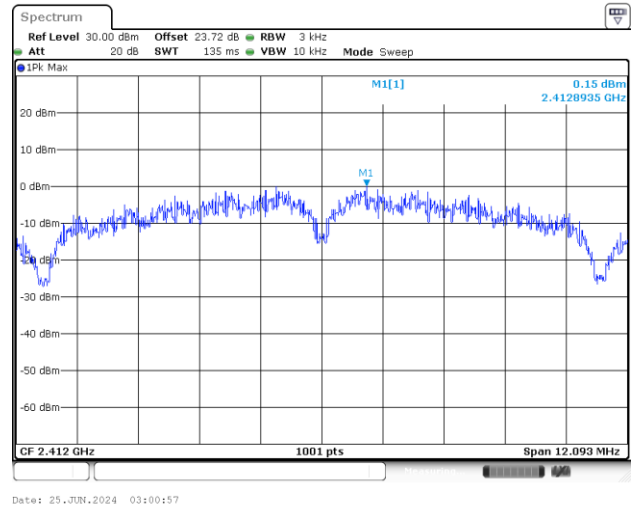Maximum Power Density Plot (dBm/3kHz)**MIMO Ant 1****MIMO Ant 2**

<802.11g>

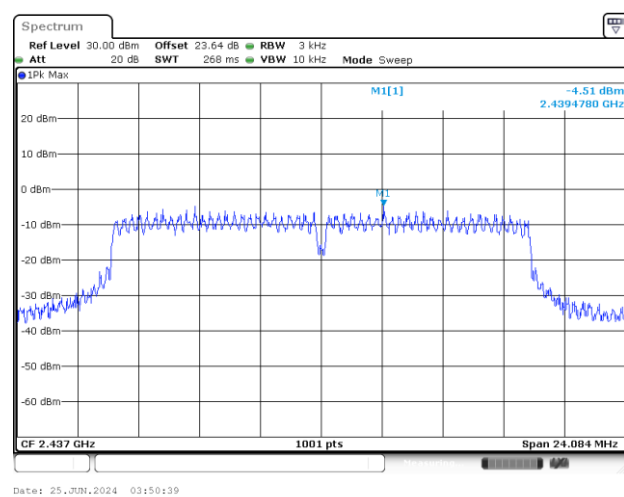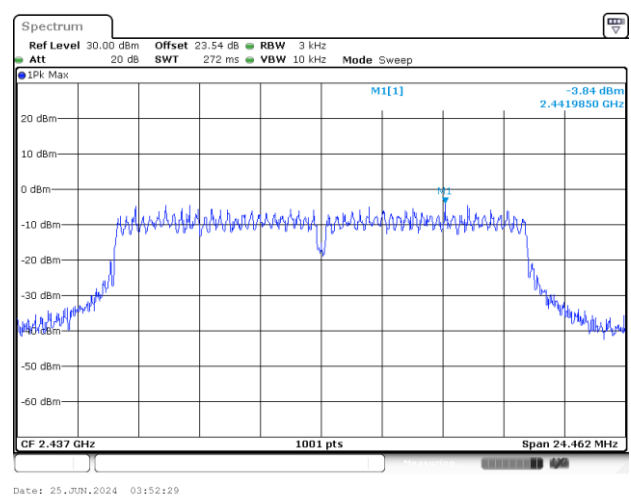
Maximum Power Density Plot (dBm/3kHz)**MIMO Ant 1****MIMO Ant 2**




<802.11ac VHT20>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

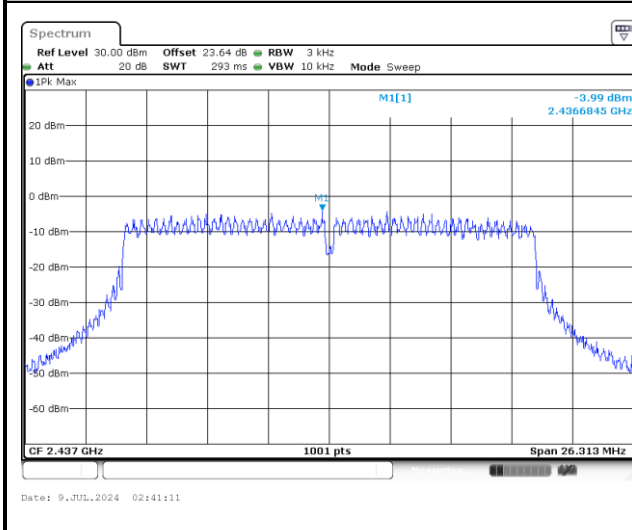


MIMO Ant 2

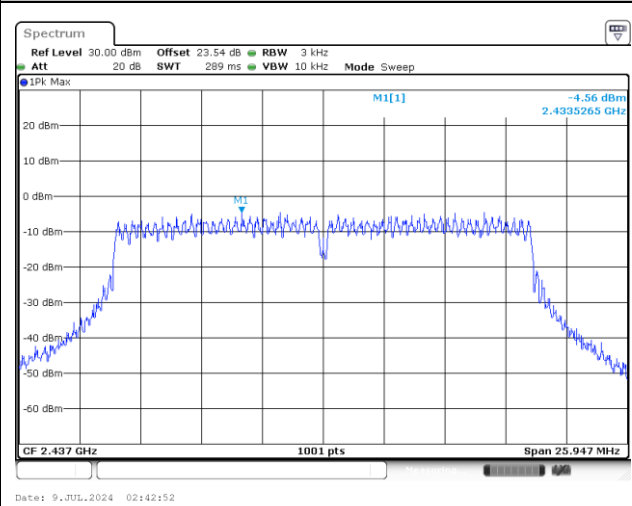


<802.11ax HE20>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

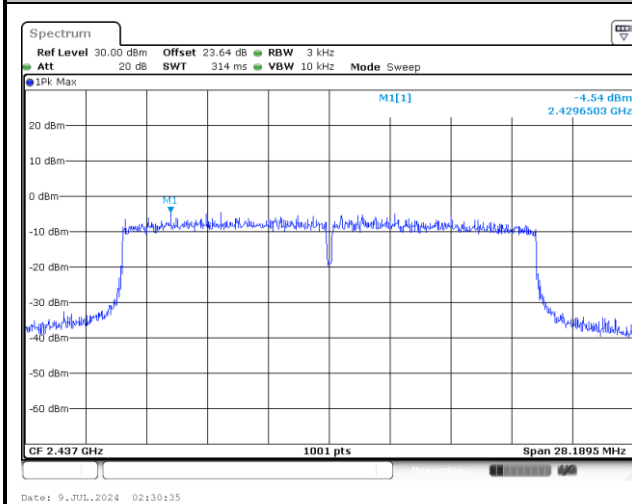

MIMO Ant 2

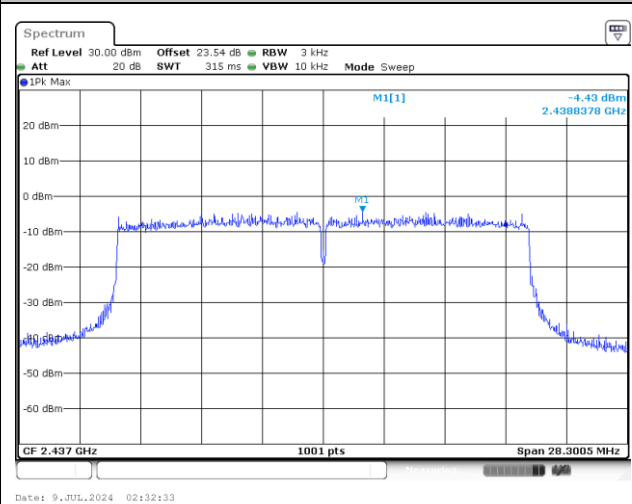


**Band Edges and Spurious Emission**


Number of TX = 2, Ant. 1 (Measured)

Test Mode : 802.11b


Test Channel : 01

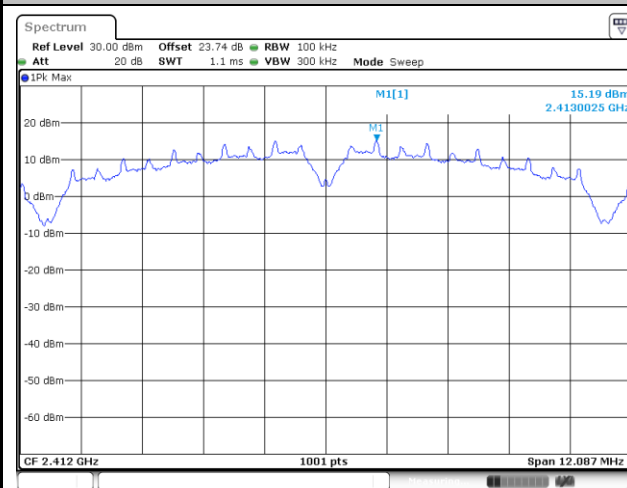100kHz PSD reference Level


Date: 25.JUN.2024 02:57:30

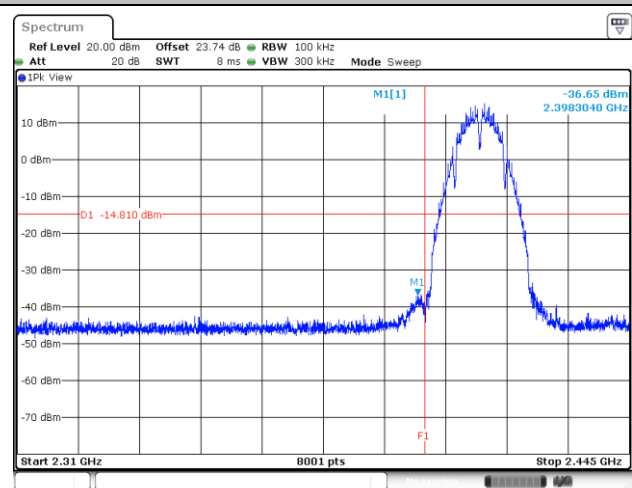Low Channel Plot

Date: 25.JUN.2024 02:58:39

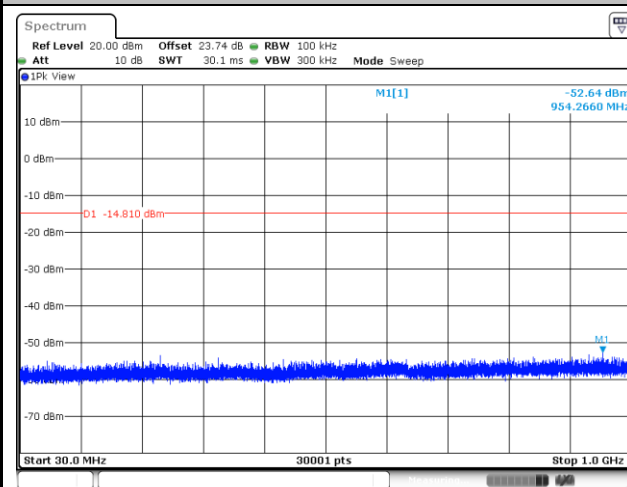Spurious Emission 30MHz~1GHz

Date: 25.JUN.2024 02:57:52

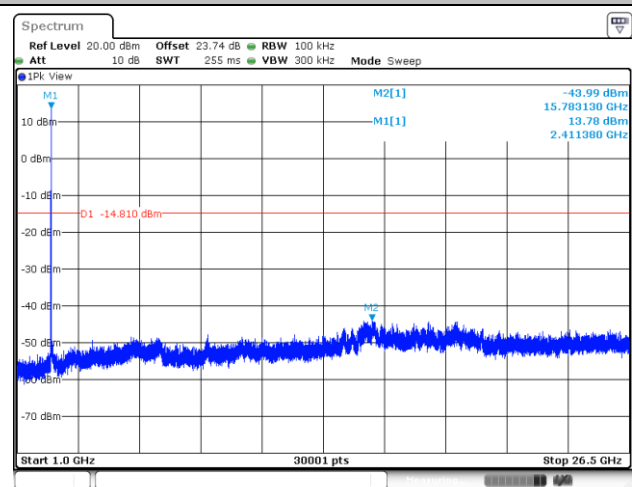Spurious Emission 1GHz~26.5GHz


Date: 25.JUN.2024 02:58:25



Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

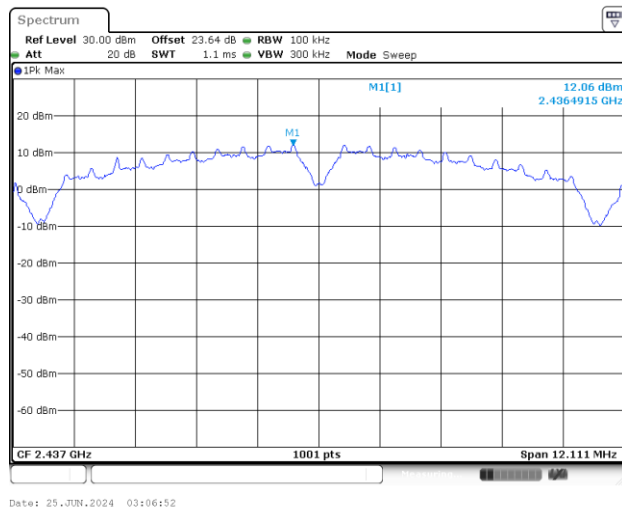


Middle Channel Plot

Spurious Emission 30MHz~1GHz

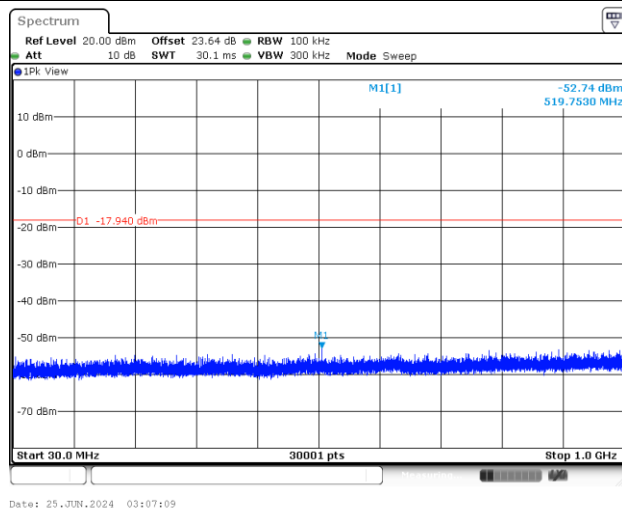

Spurious Emission 1GHz~26.5GHz

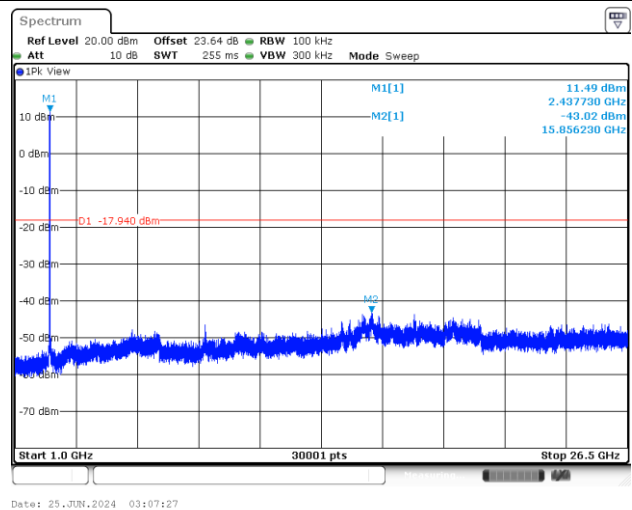




Test Mode : 802.11b


Test Channel : 11

100kHz PSD reference Level

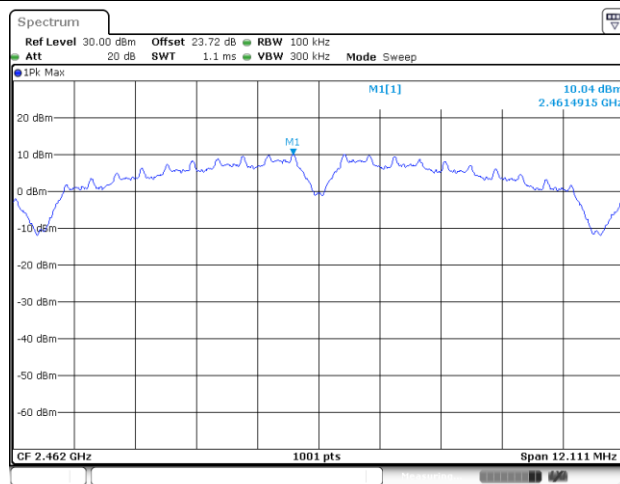


Date: 25 JUN 2024 03:12:19

High Channel Plot

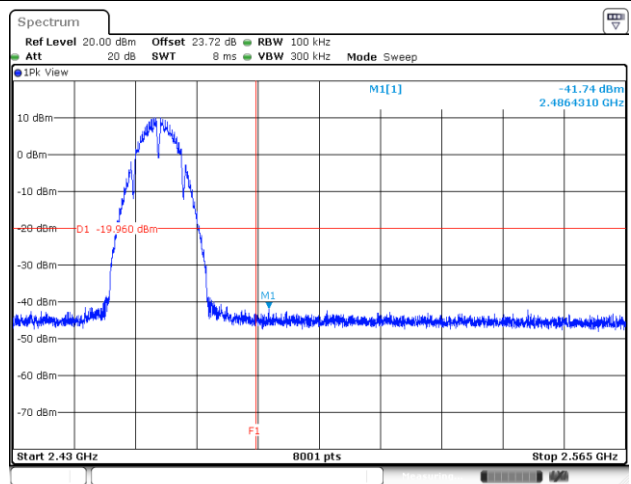


Date: 25 JUN 2024 03:13:06

Spurious Emission 30MHz~1GHz

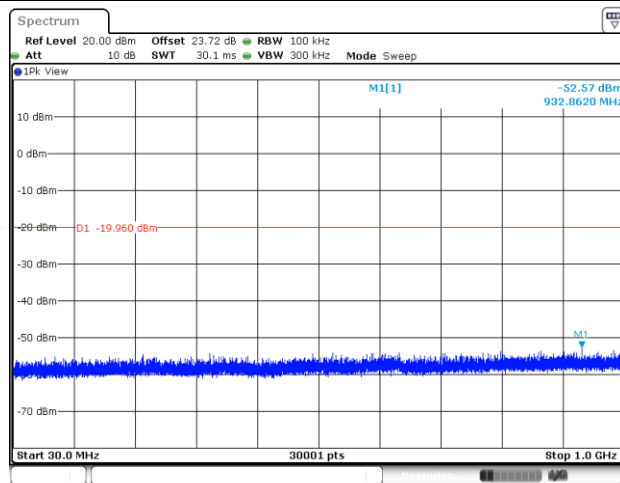

Date: 25 JUN 2024 03:12:37

Spurious Emission 1GHz~26.5GHz

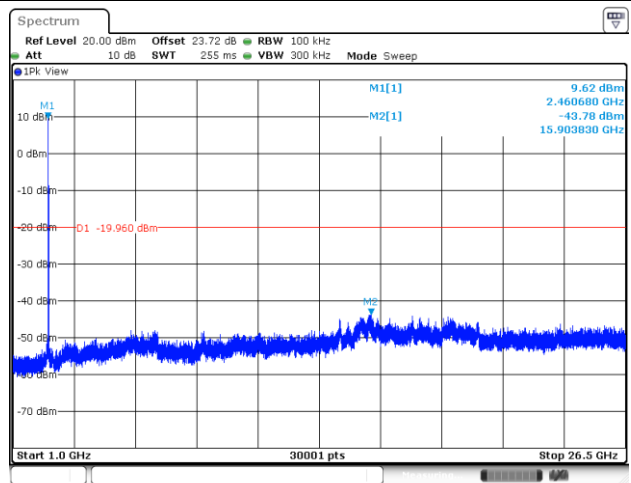


Date: 25 JUN 2024 03:12:54



Test Mode : 802.11g


Test Channel : 01

100kHz PSD reference Level

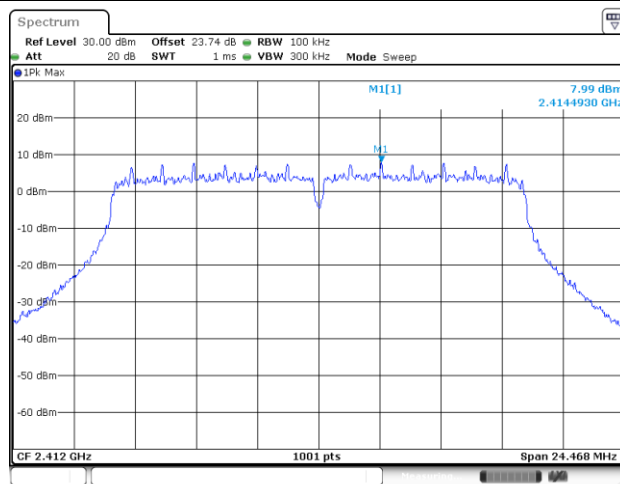


Date: 25 JUN. 2024 03:40:01

Low Channel Plot

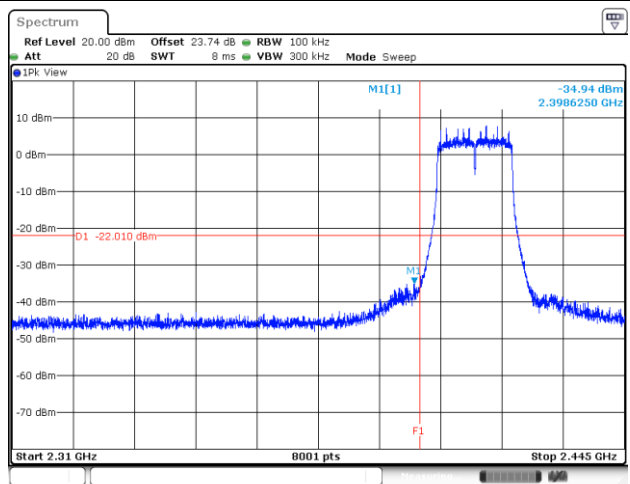


Date: 26 JUN. 2024 02:08:52

Spurious Emission 30MHz~1GHz

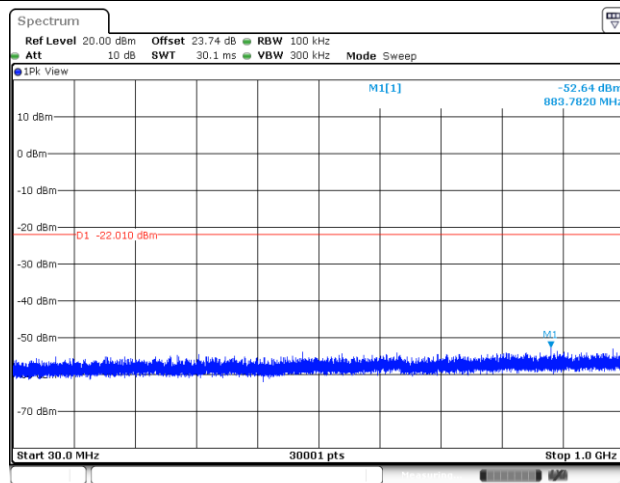

Date: 25 JUN. 2024 03:40:59

Spurious Emission 1GHz~26.5GHz

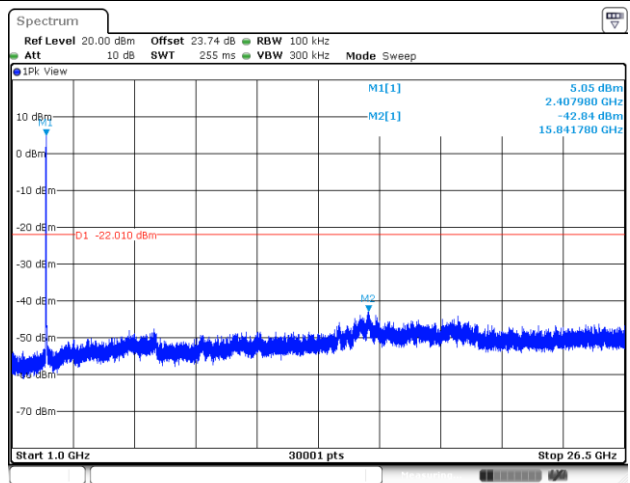


Date: 25 JUN. 2024 03:41:36



Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

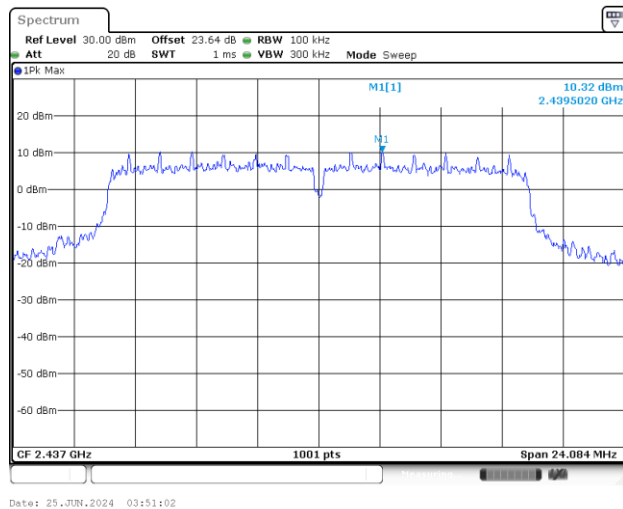


Middle Channel Plot

Spurious Emission 30MHz~1GHz

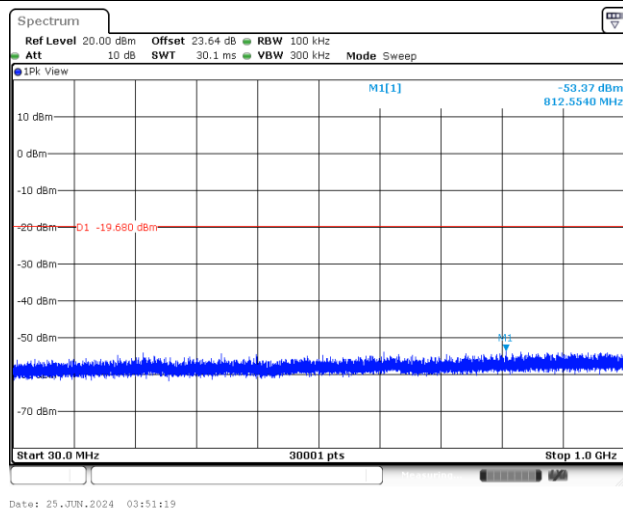

Spurious Emission 1GHz~26.5GHz

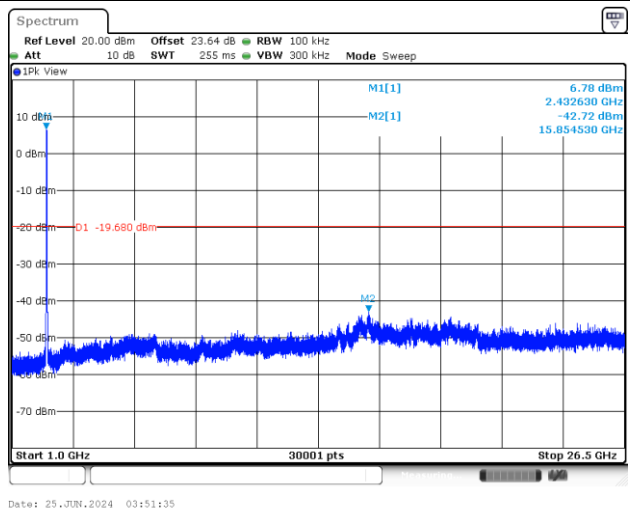





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

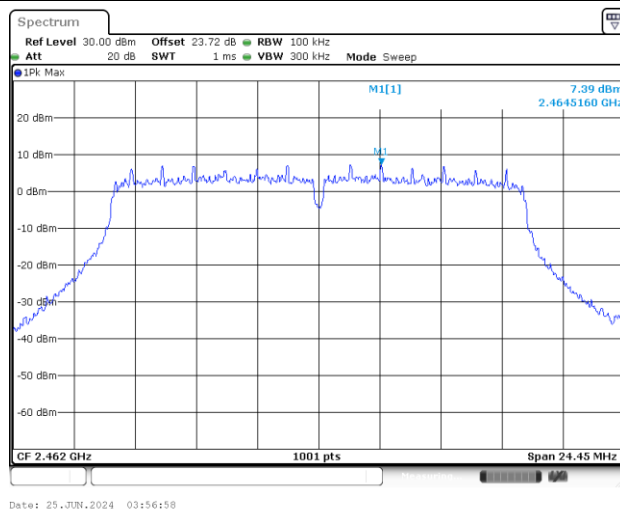


High Channel Plot

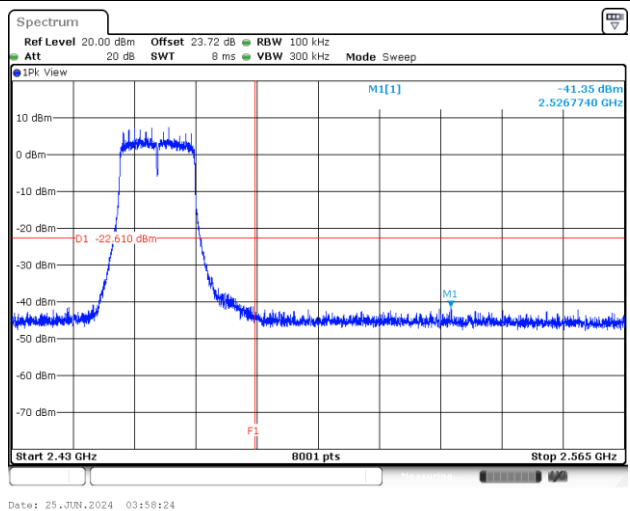

Spurious Emission 30MHz~1GHz

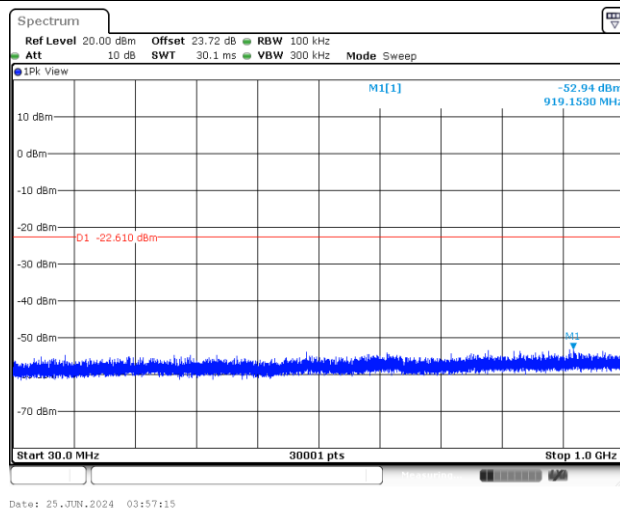

Spurious Emission 1GHz~26.5GHz

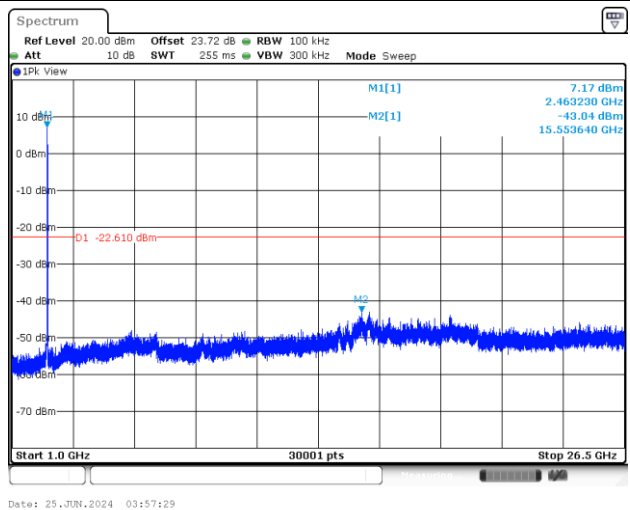





Test Mode : 802.11ac VHT20

Test Channel : 01


100kHz PSD reference Level

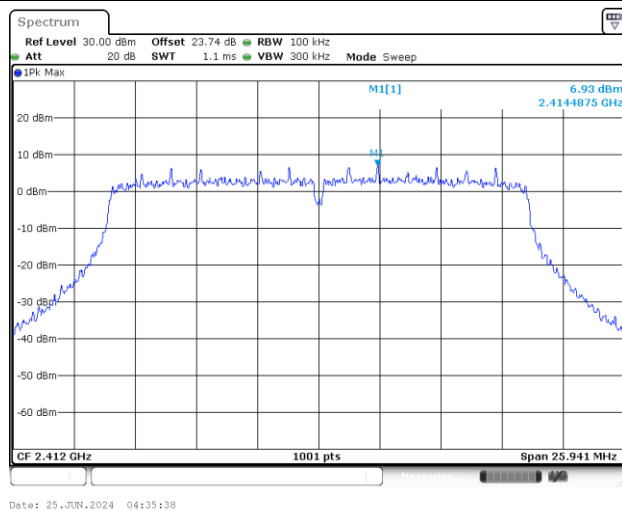


Low Channel Plot

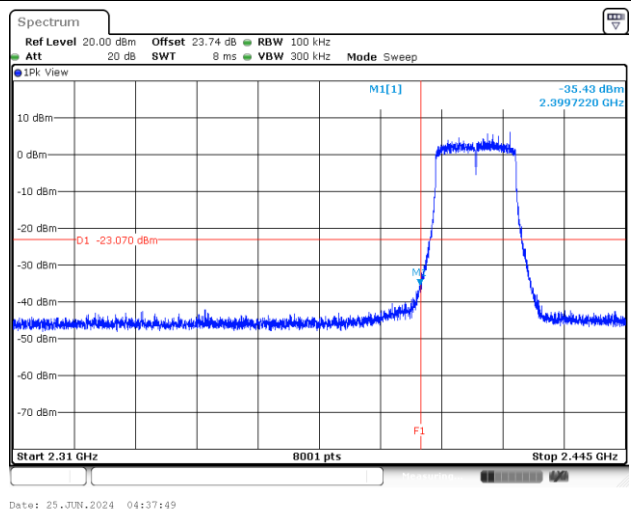

Spurious Emission 30MHz~1GHz

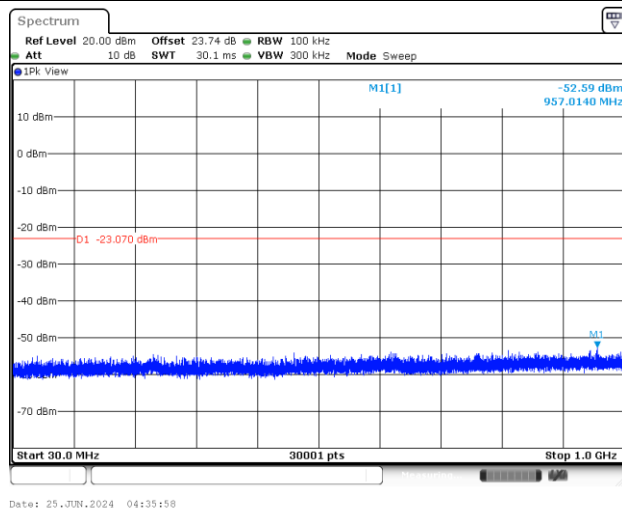

Spurious Emission 1GHz~26.5GHz

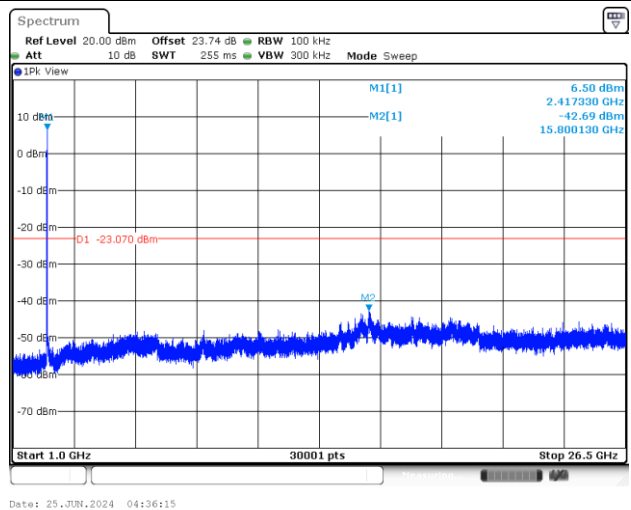




Test Mode : 802.11ac VHT20


Test Channel : 06

100kHz PSD reference Level

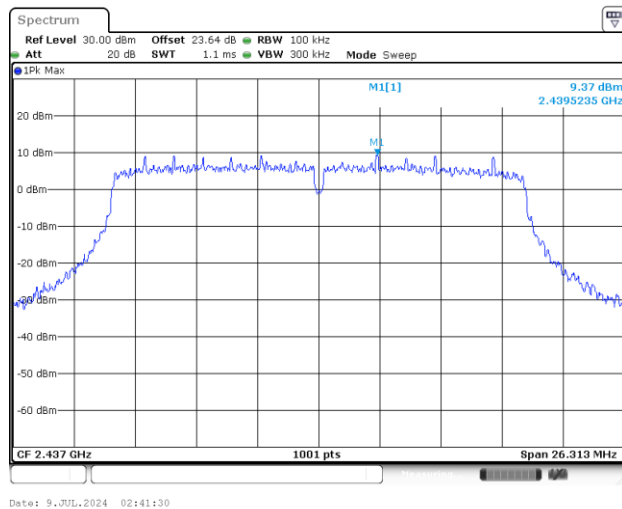


Middle Channel Plot

Spurious Emission 30MHz~1GHz

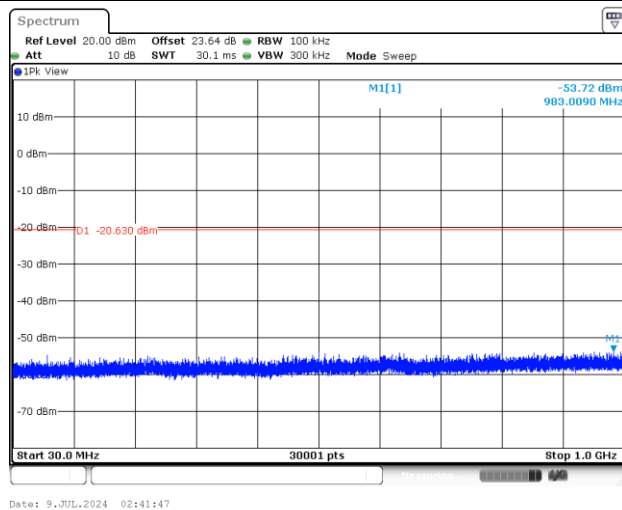

Spurious Emission 1GHz~26.5GHz

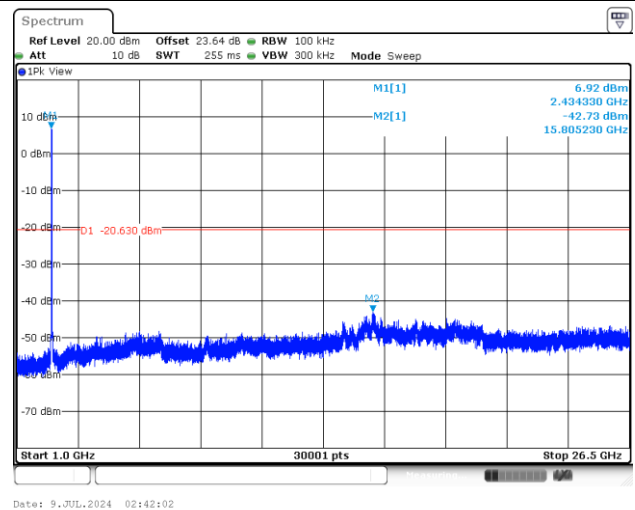




Test Mode : 802.11ac VHT20


Test Channel : 11

100kHz PSD reference Level

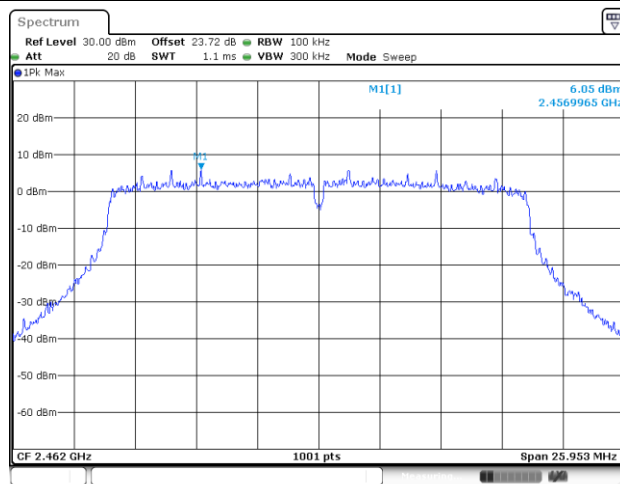


Date: 25 JUN 2024 04:49:37

High Channel Plot

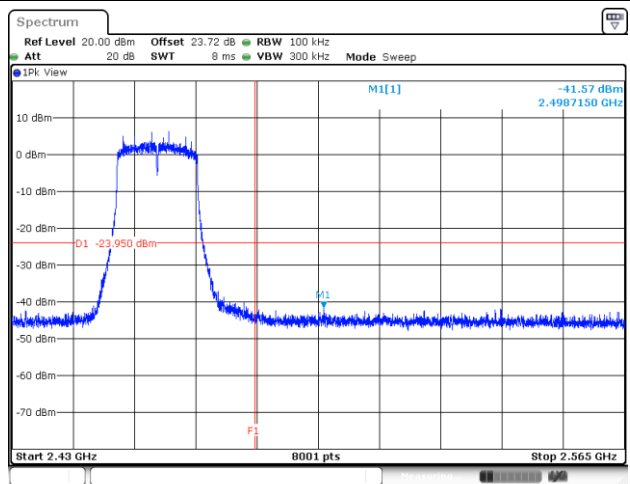


Date: 25 JUN 2024 04:50:21

Spurious Emission 30MHz~1GHz

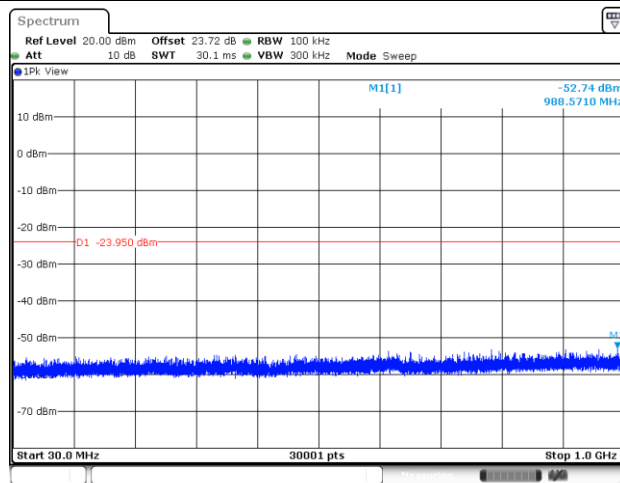

Date: 25 JUN 2024 04:49:53

Spurious Emission 1GHz~26.5GHz

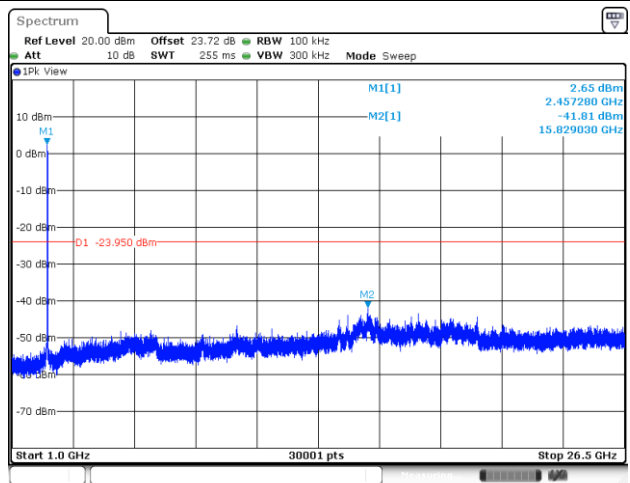


Date: 25 JUN 2024 04:50:08



Test Mode : 802.11ax HE20_Full RU


Test Channel : 01

100kHz PSD reference Level

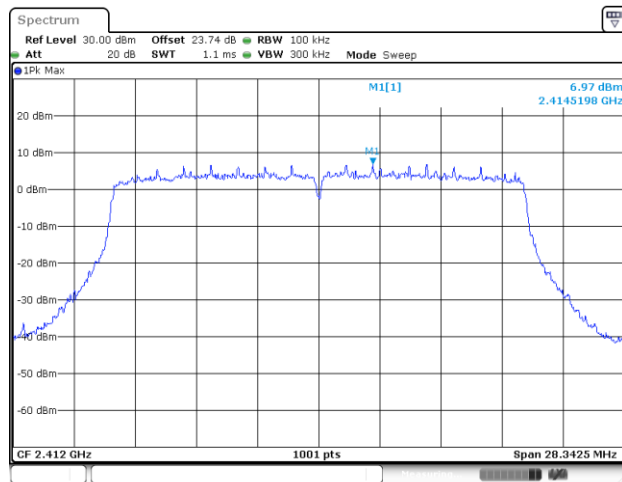


Date: 25 JUN. 2024 04:05:26

Low Channel Plot

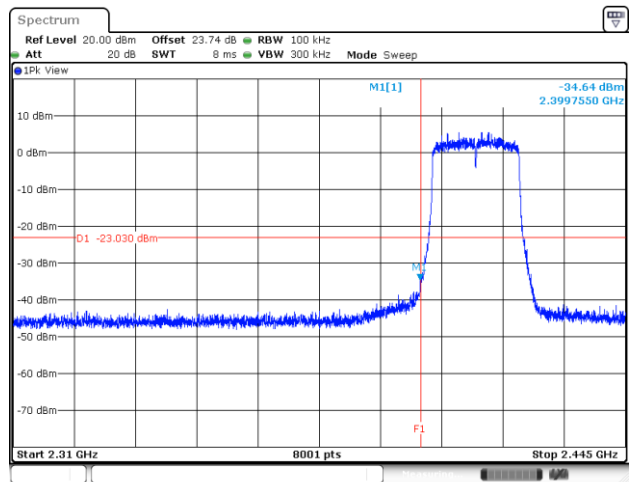


Date: 25 JUN. 2024 04:06:29

Spurious Emission 30MHz~1GHz

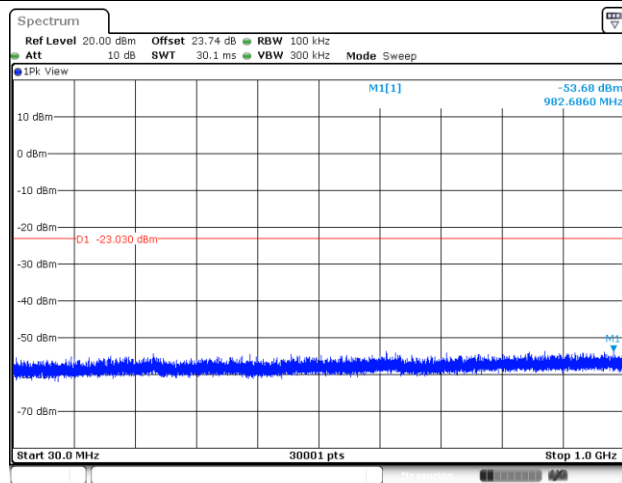

Date: 25 JUN. 2024 04:05:45

Spurious Emission 1GHz~26.5GHz

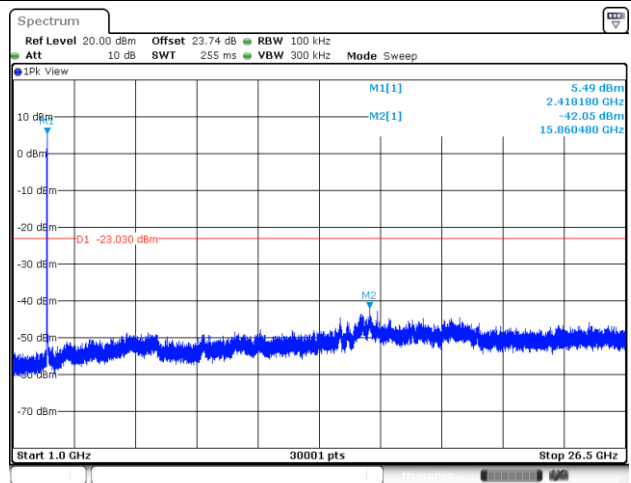


Date: 25 JUN. 2024 04:06:06



Test Mode : 802.11ax HE20_Full RU


Test Channel : 06

100kHz PSD reference Level

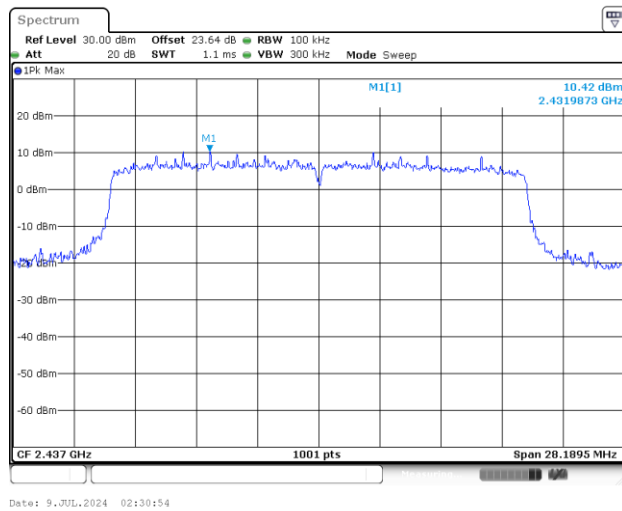


Middle Channel Plot

Spurious Emission 30MHz~1GHz

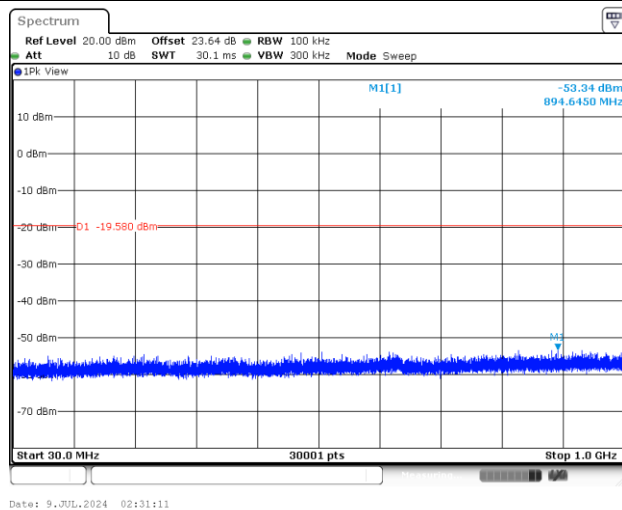

Spurious Emission 1GHz~26.5GHz

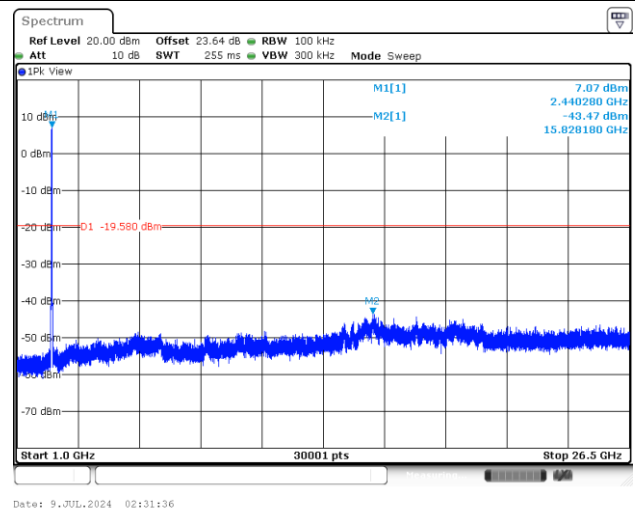




Test Mode : 802.11ax HE20_Full RU


Test Channel : 11

100kHz PSD reference Level

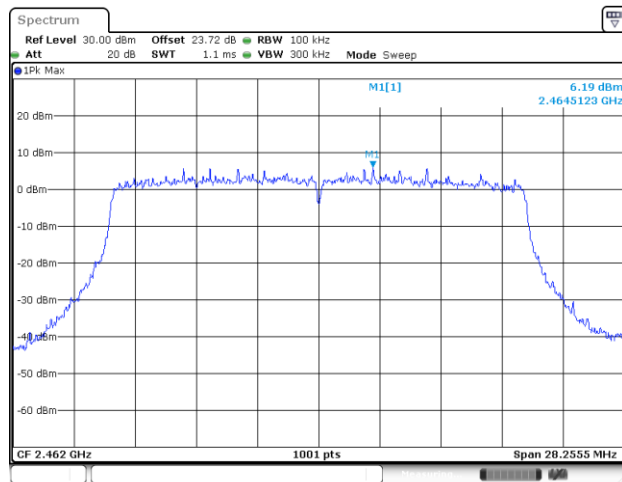


Date: 25 JUN 2024 04:19:42

High Channel Plot

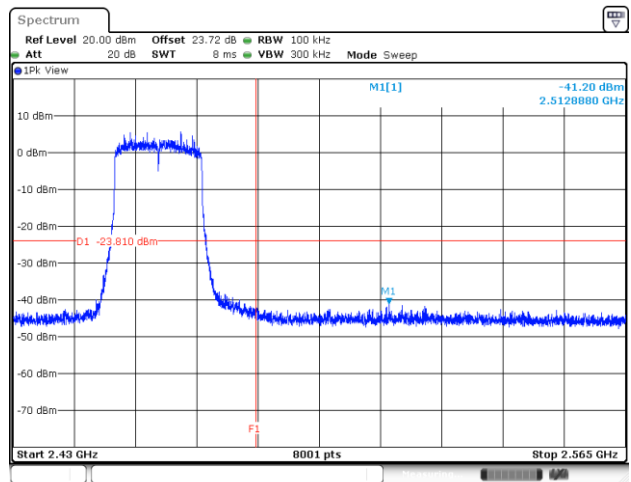


Date: 25 JUN 2024 04:21:43

Spurious Emission 30MHz~1GHz

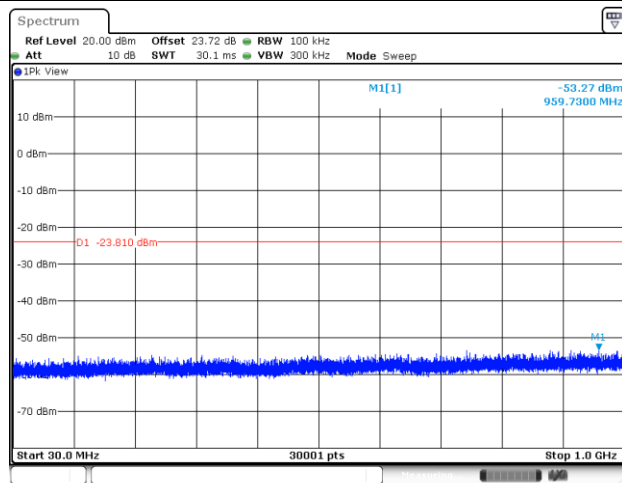

Date: 25 JUN 2024 04:21:16

Spurious Emission 1GHz~26.5GHz

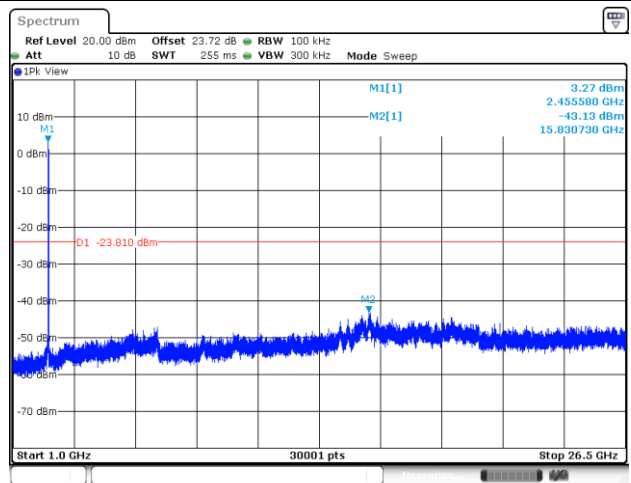

Date: 25 JUN 2024 04:21:32




Number of TX = 2, Ant. 2 (Measured)


Test Mode : 802.11b

Test Channel : 01


100kHz PSD reference Level

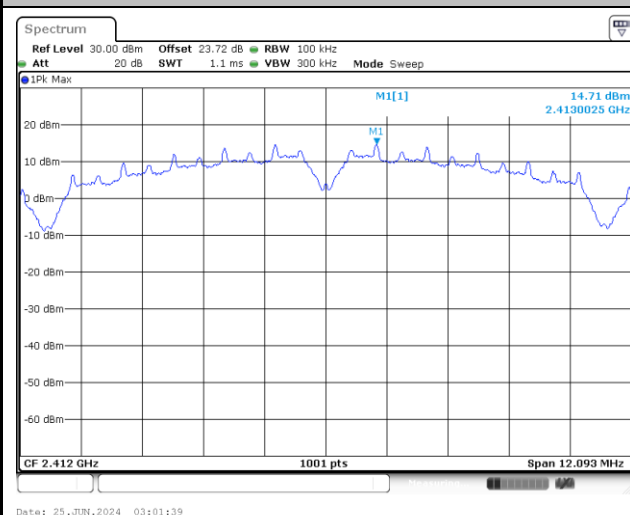


Low Channel Plot

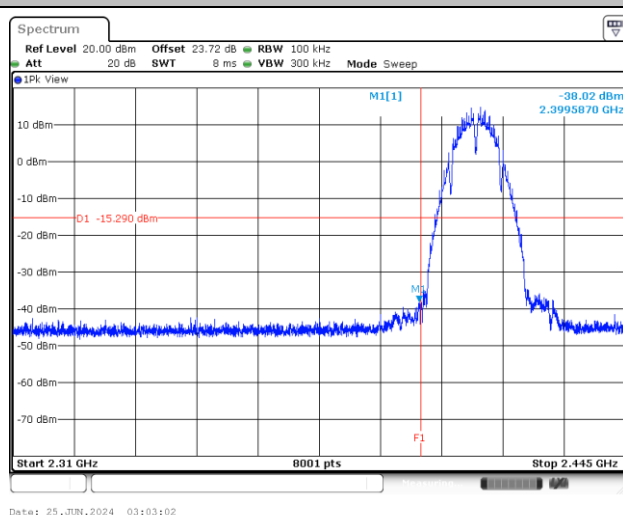

Spurious Emission 30MHz~1GHz

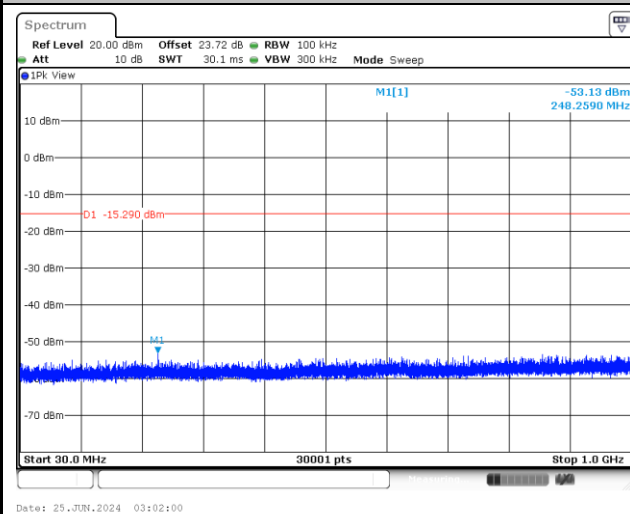

Spurious Emission 1GHz~26.5GHz

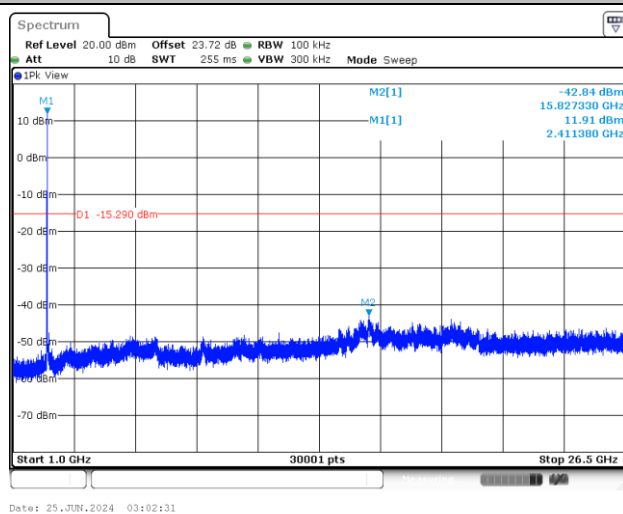




Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

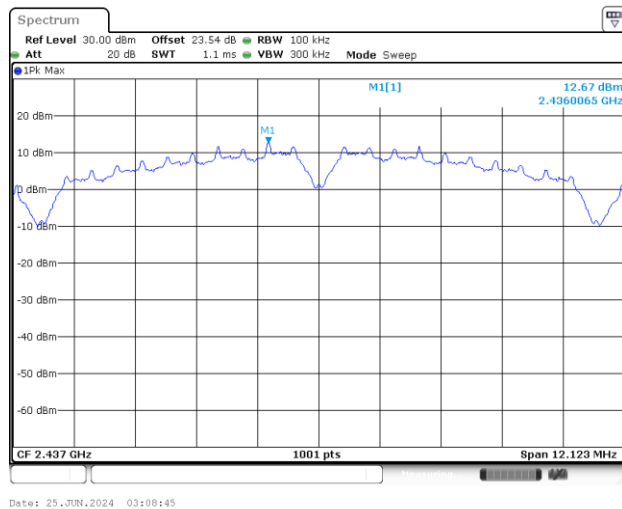


Middle Channel Plot

Spurious Emission 30MHz~1GHz

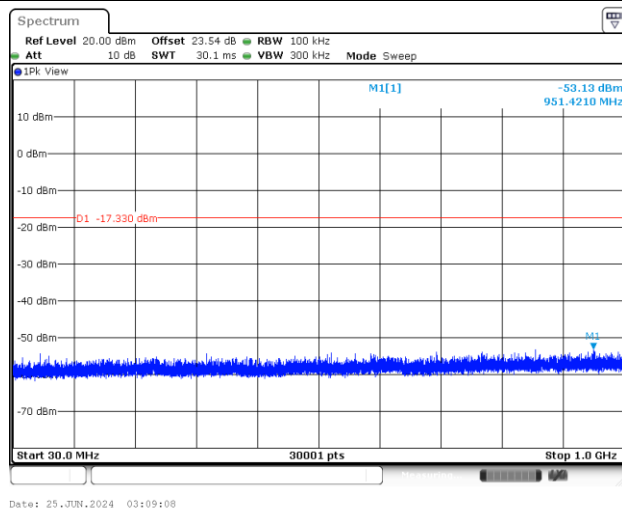

Spurious Emission 1GHz~26.5GHz

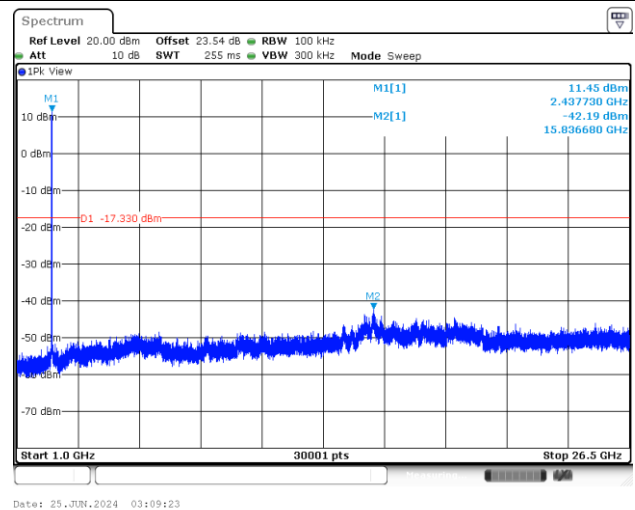





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

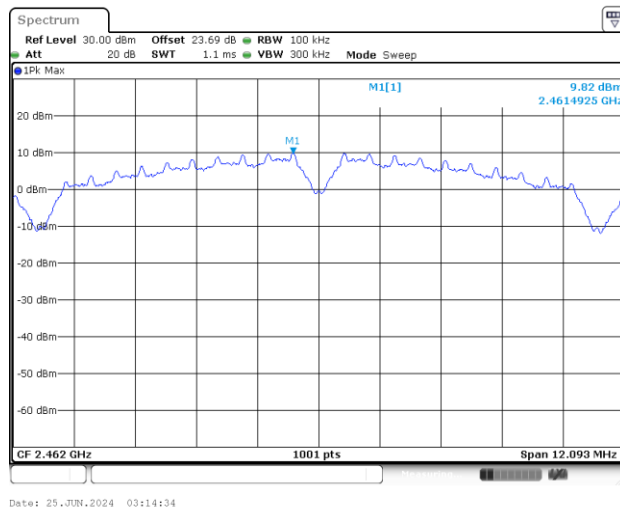


High Channel Plot

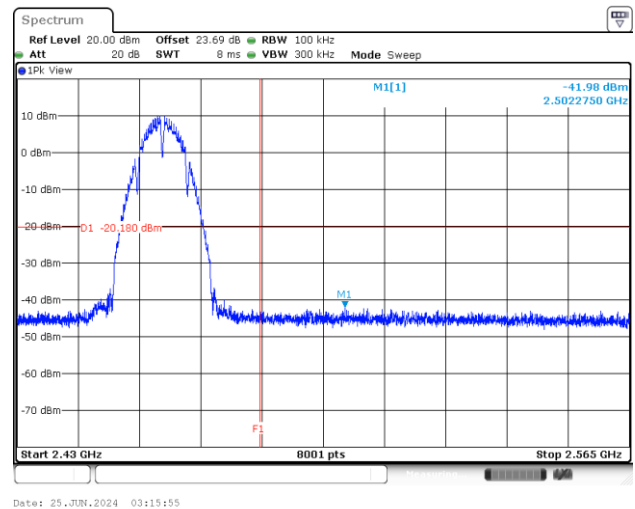

Spurious Emission 30MHz~1GHz

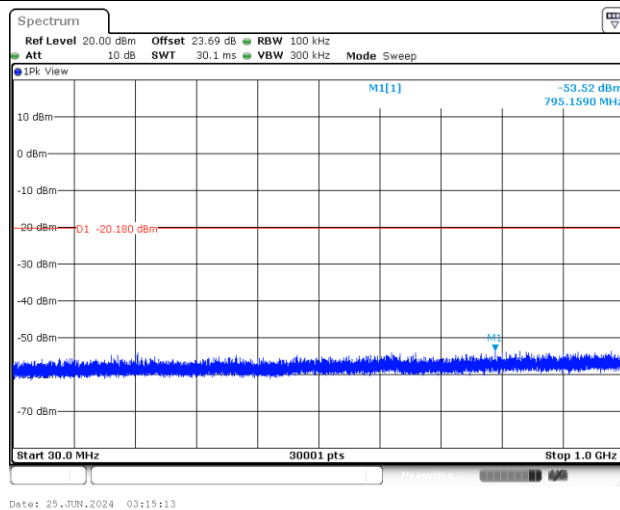

Spurious Emission 1GHz~26.5GHz

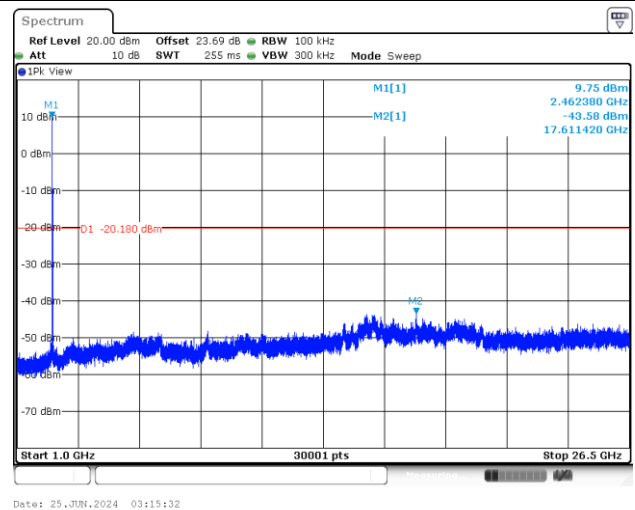





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

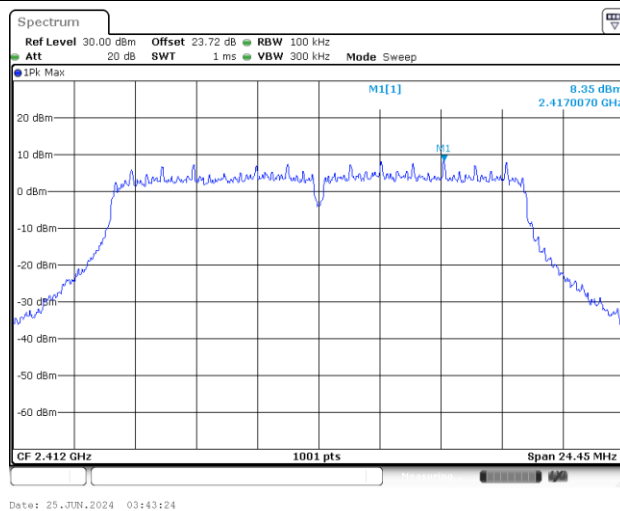


Low Channel Plot

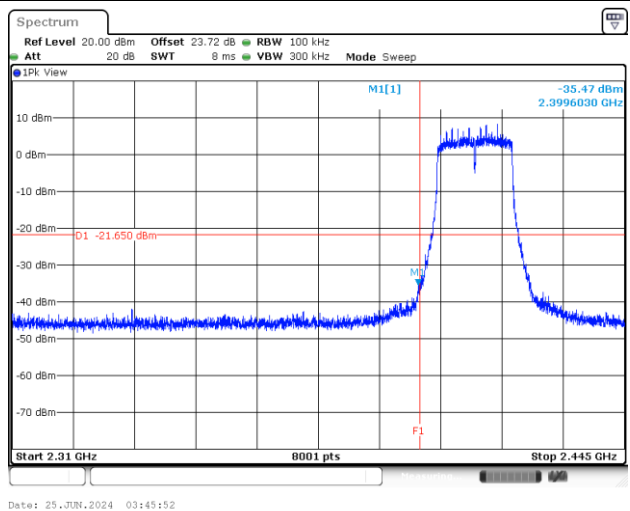

Spurious Emission 30MHz~1GHz

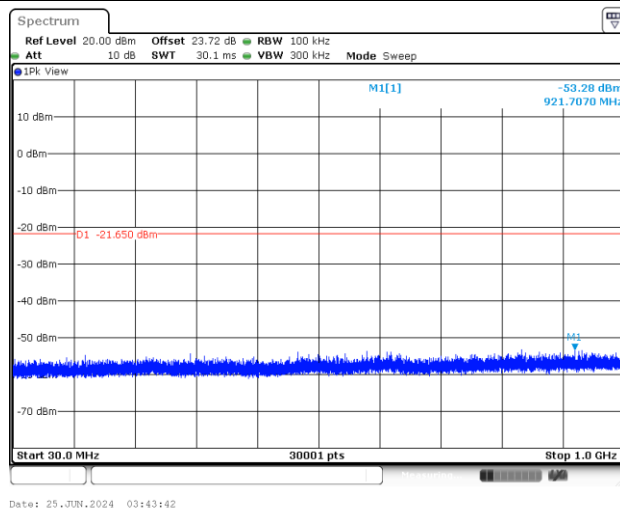

Spurious Emission 1GHz~26.5GHz

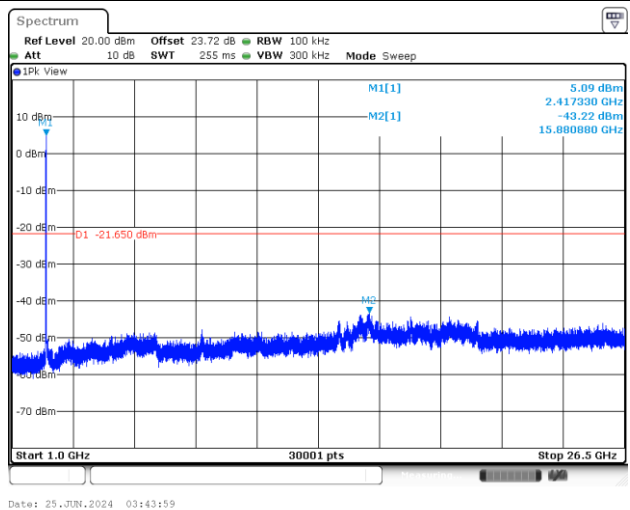




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

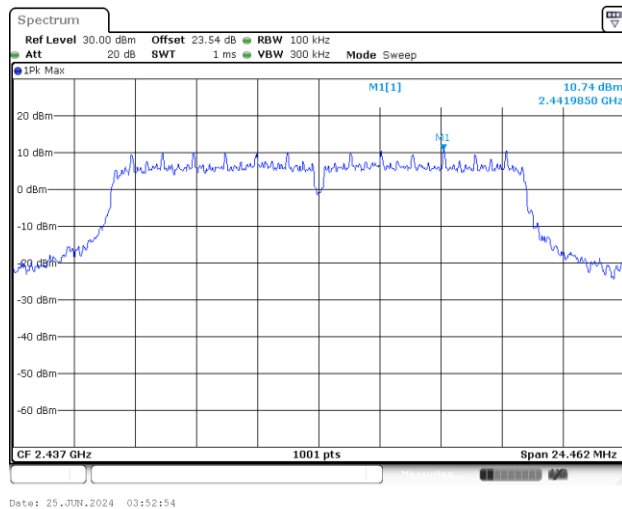


Middle Channel Plot

Spurious Emission 30MHz~1GHz

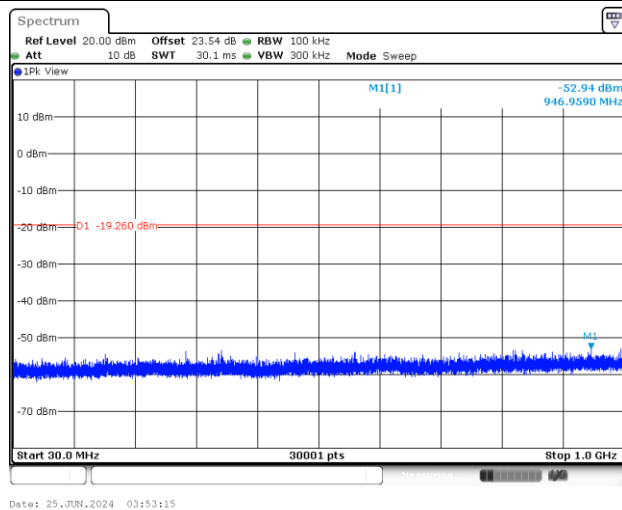

Spurious Emission 1GHz~26.5GHz

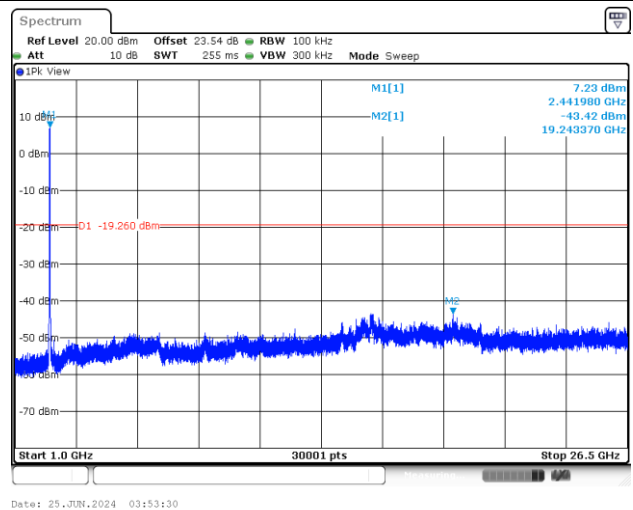





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

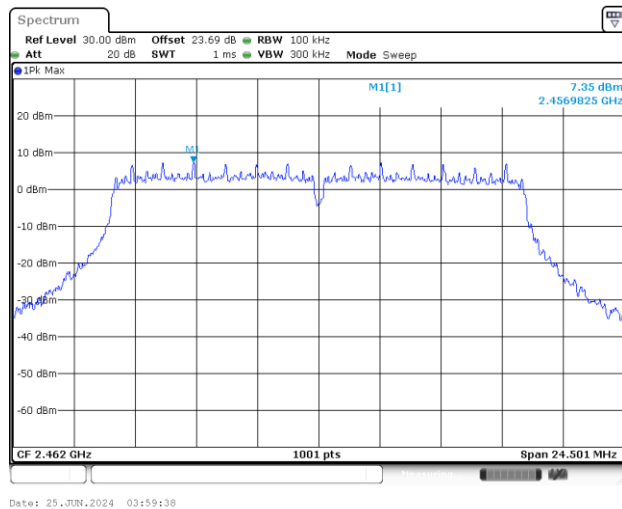


High Channel Plot

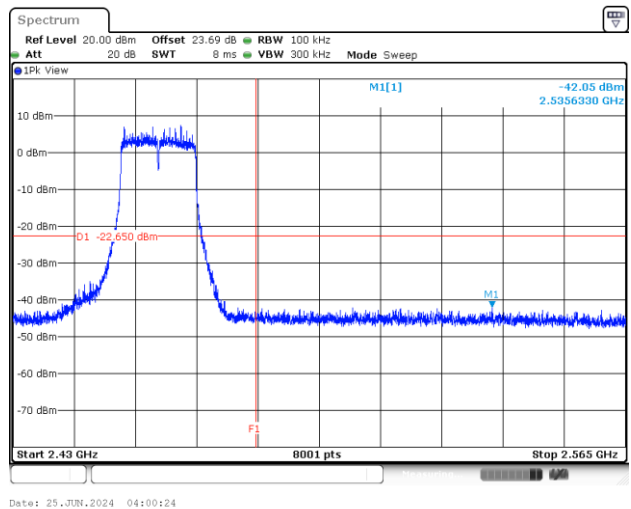

Spurious Emission 30MHz~1GHz

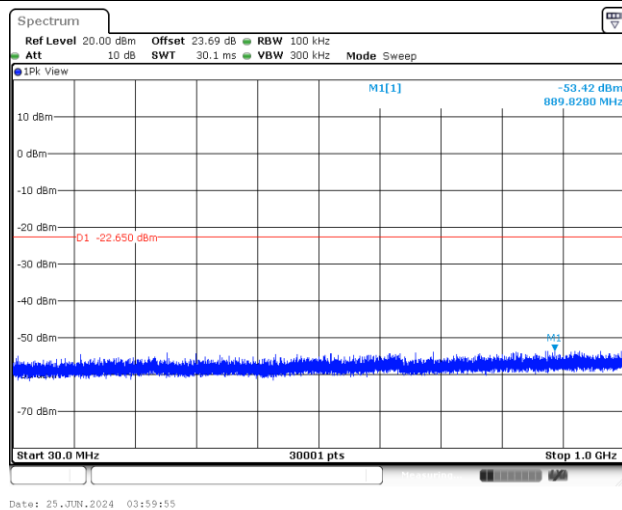

Spurious Emission 1GHz~26.5GHz

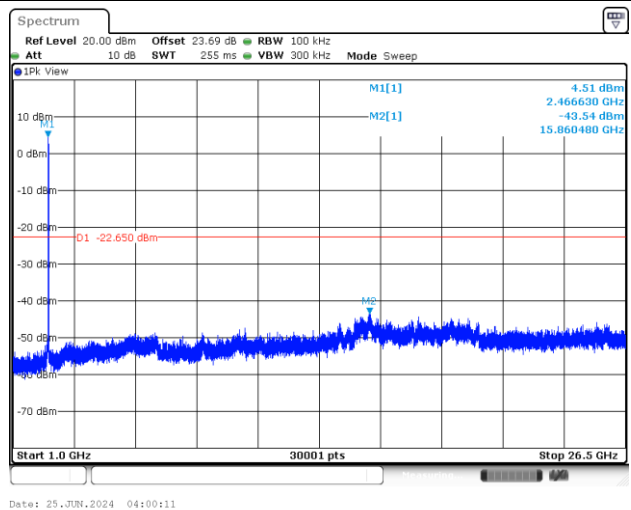





Test Mode : 802.11ac VHT20

Test Channel : 01


100kHz PSD reference Level

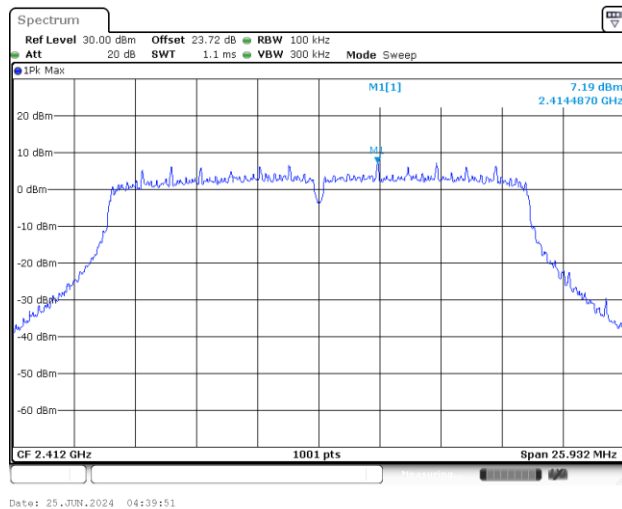


Low Channel Plot

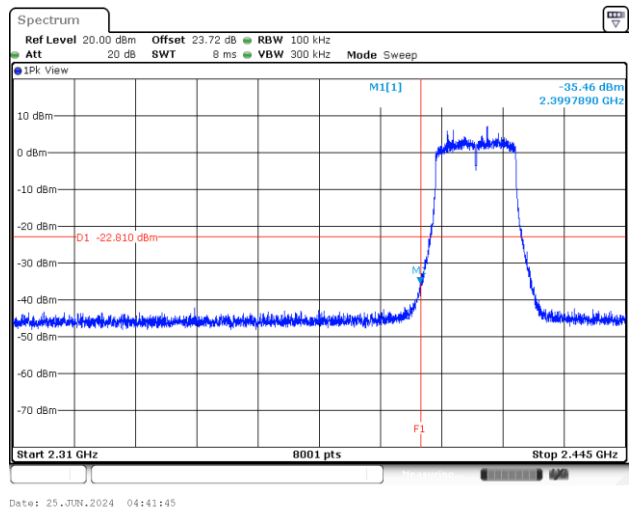

Spurious Emission 30MHz~1GHz

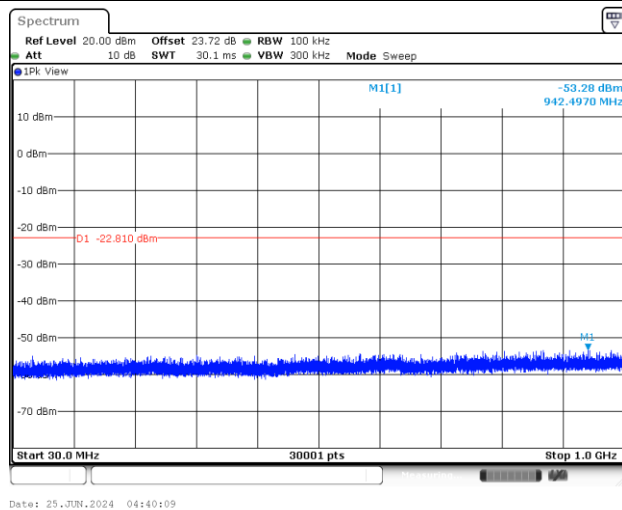

Spurious Emission 1GHz~26.5GHz

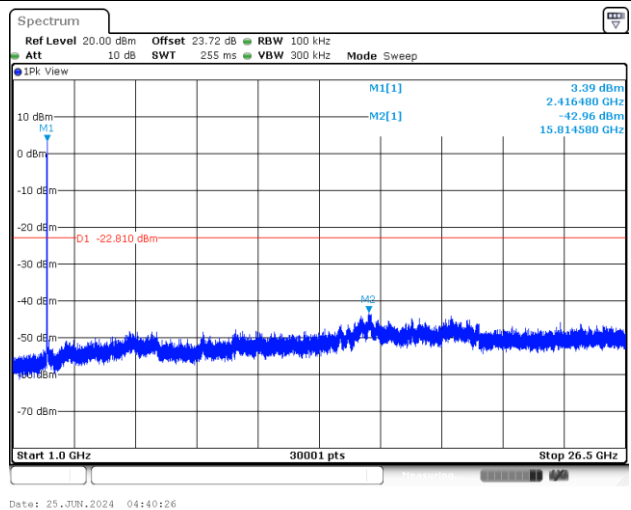




Test Mode : 802.11ac VHT20


Test Channel : 06

100kHz PSD reference Level

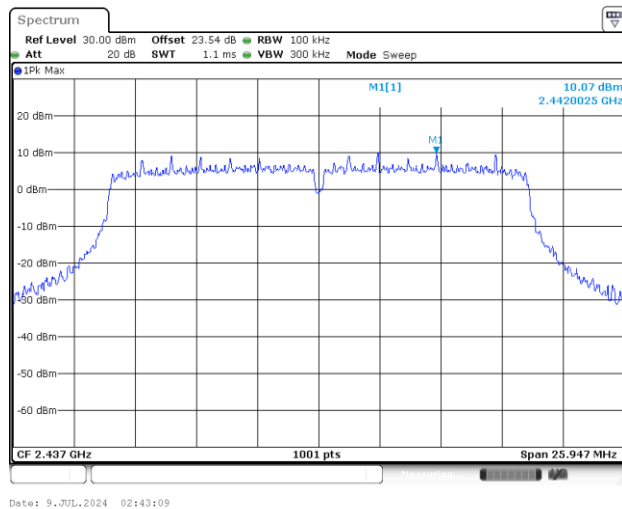


Middle Channel Plot

Spurious Emission 30MHz~1GHz

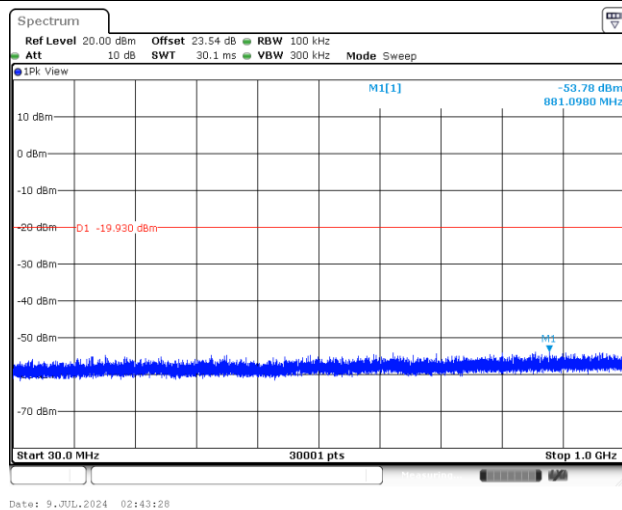

Spurious Emission 1GHz~26.5GHz

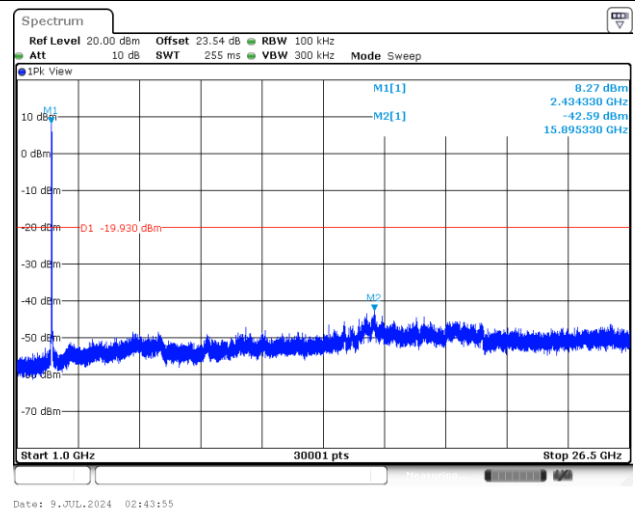




Test Mode : 802.11ac VHT20


Test Channel : 11

100kHz PSD reference Level

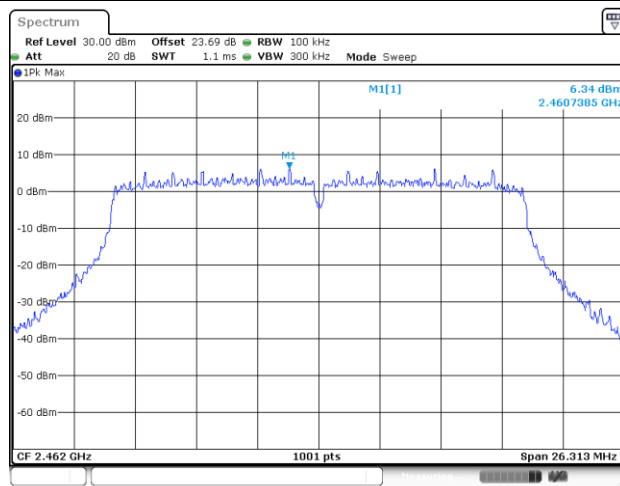


Date: 25 JUN 2024 04:51:35

High Channel Plot

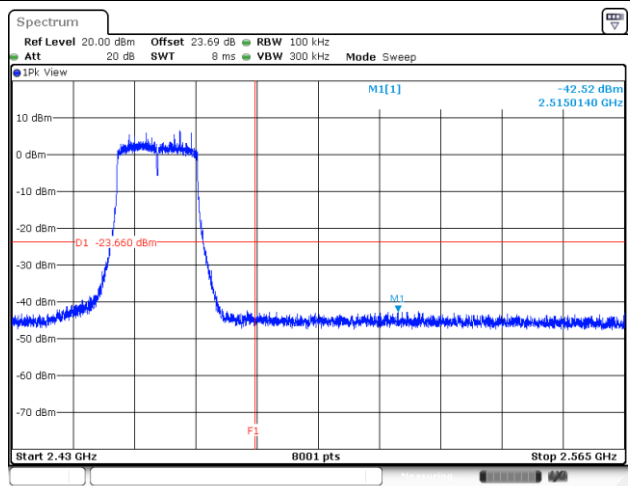


Date: 25 JUN 2024 04:53:03

Spurious Emission 30MHz~1GHz

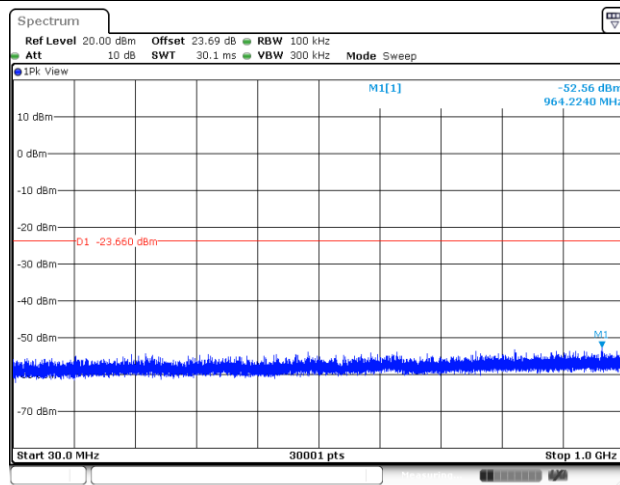

Date: 25 JUN 2024 04:52:26

Spurious Emission 1GHz~26.5GHz

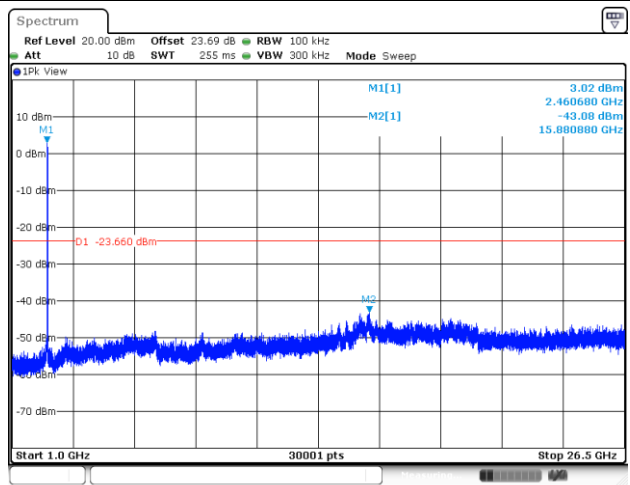


Date: 25 JUN 2024 04:52:43




Test Mode : 802.11ax HE20_Full RU

Test Channel : 01


100kHz PSD reference Level

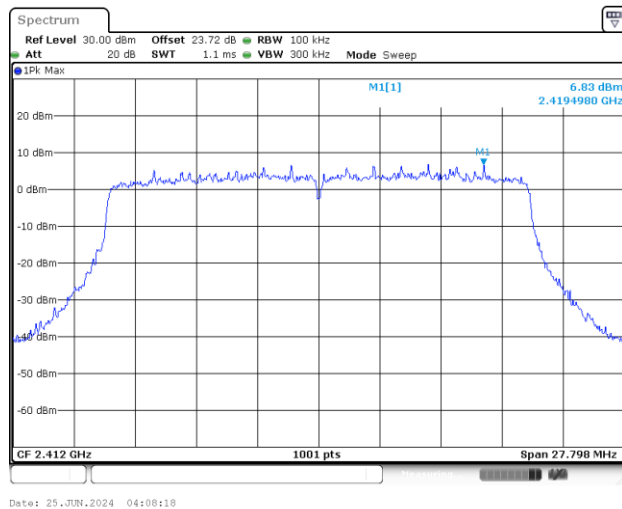


Low Channel Plot

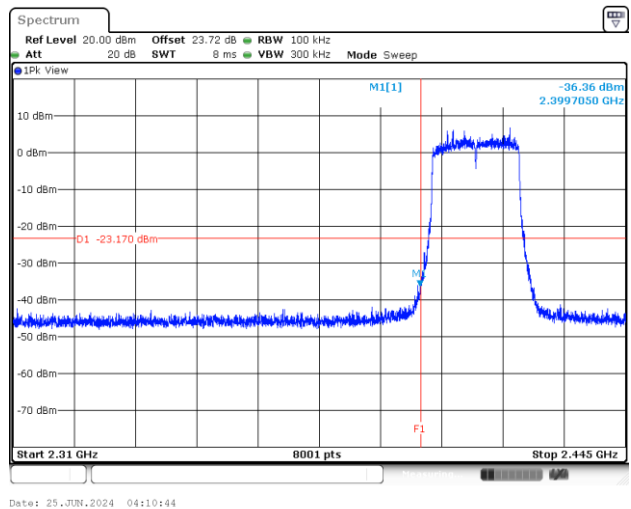

Spurious Emission 30MHz~1GHz

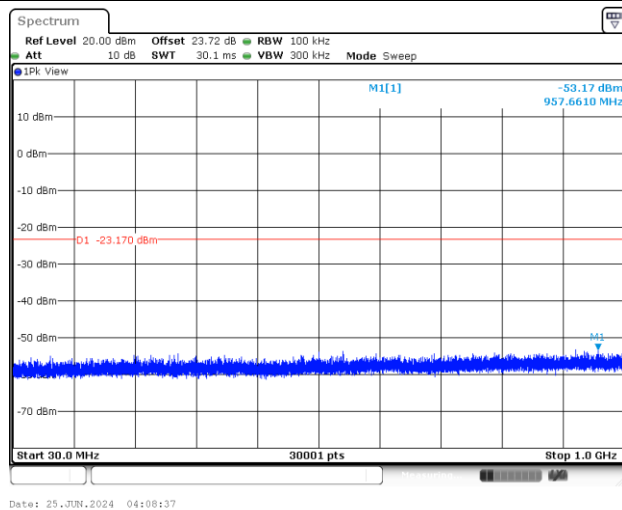

Spurious Emission 1GHz~26.5GHz

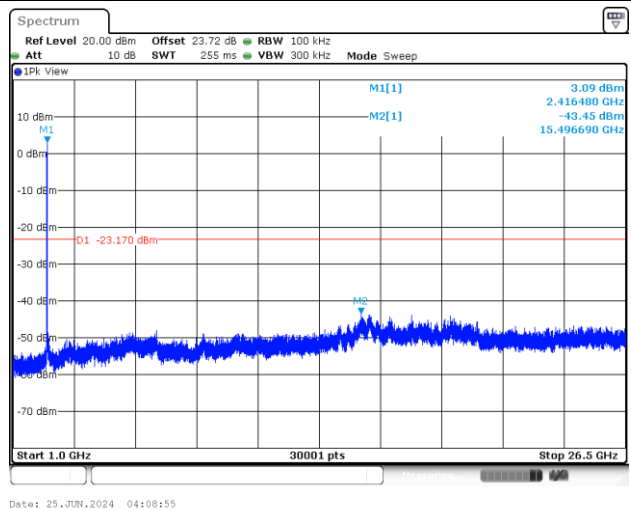




Test Mode : 802.11ax HE20_Full RU


Test Channel : 06

100kHz PSD reference Level

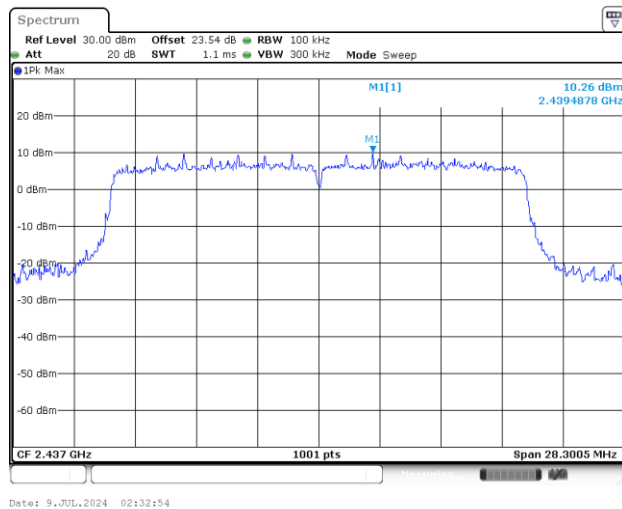


Middle Channel Plot

Spurious Emission 30MHz~1GHz

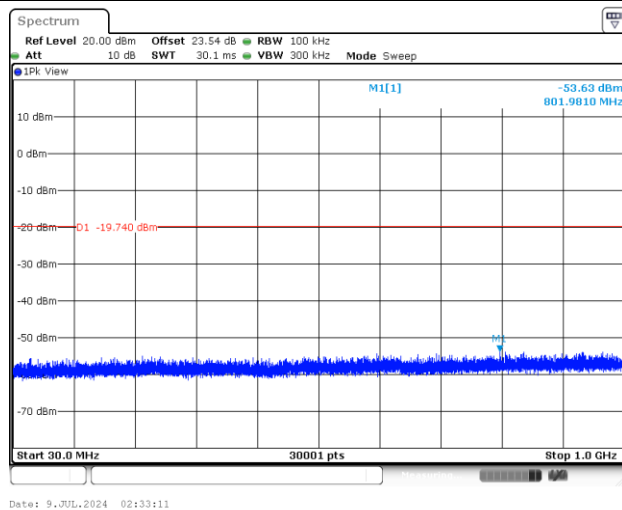

Spurious Emission 1GHz~26.5GHz

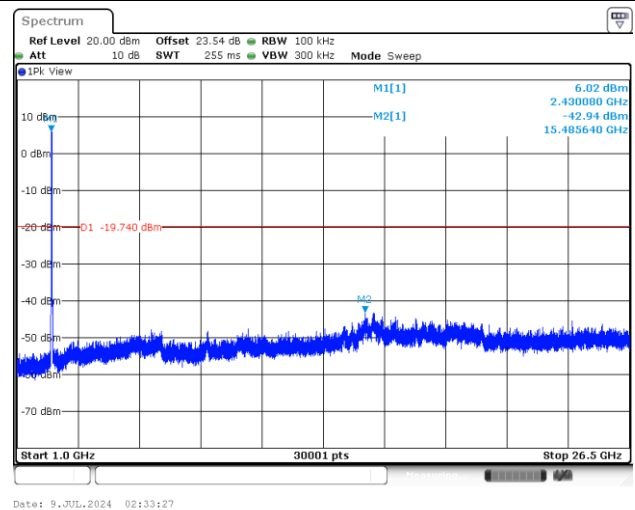




Test Mode : 802.11ax HE20_Full RU


Test Channel : 11

100kHz PSD reference Level

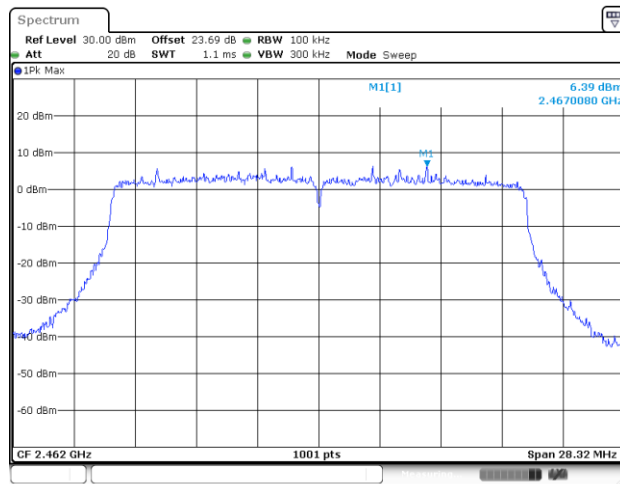


Date: 25.JUN.2024 04:24:49

High Channel Plot

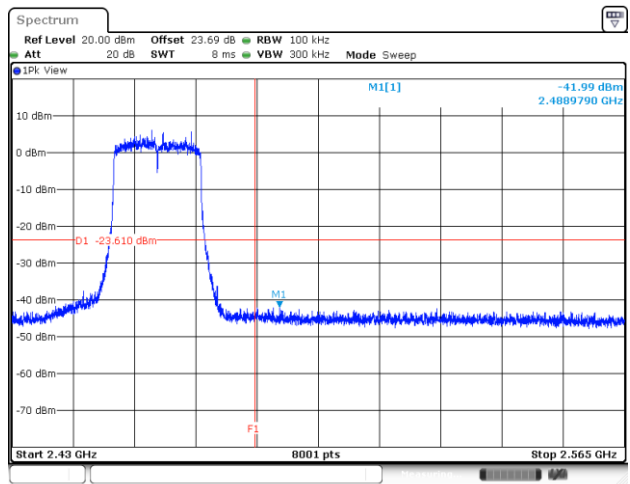


Date: 25.JUN.2024 04:25:52

Spurious Emission 30MHz~1GHz

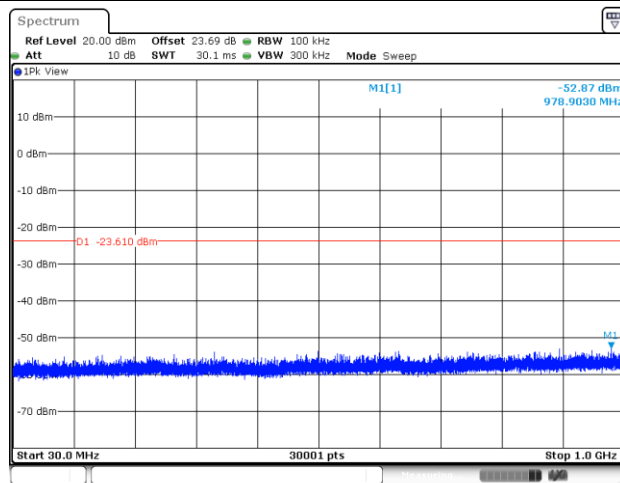

Date: 25.JUN.2024 04:25:19

Spurious Emission 1GHz~26.5GHz

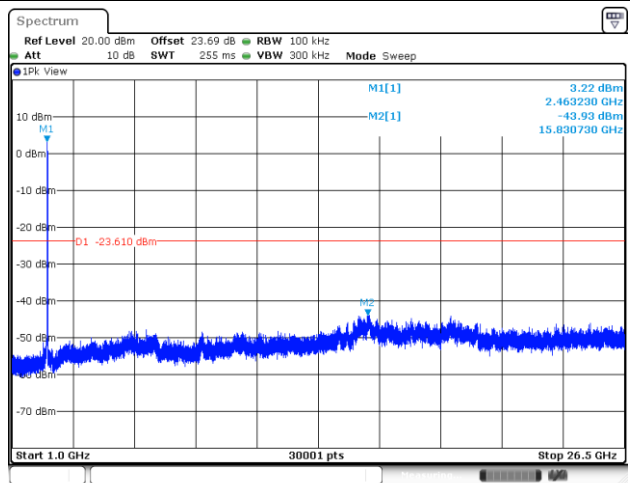

Date: 25.JUN.2024 04:25:35




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.3~24.7℃
		Relative Humidity :	40.4~48.9%

EUT Information

Report NO : 450112
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

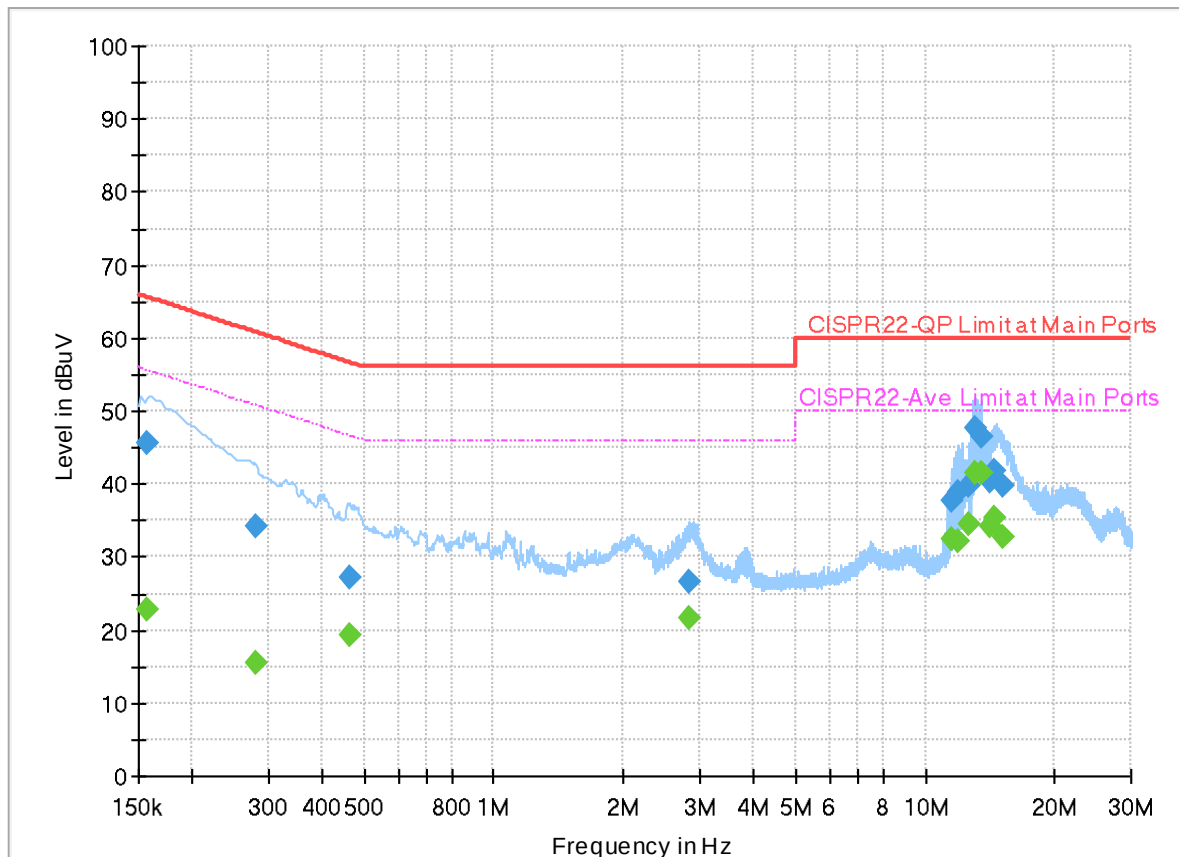

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	22.86	55.63	32.77	L1	OFF	19.9
0.156750	45.74	---	65.63	19.89	L1	OFF	19.9
0.280770	---	15.55	50.79	35.24	L1	OFF	19.9
0.280770	34.26	---	60.79	26.53	L1	OFF	19.9
0.462840	---	19.18	46.64	27.46	L1	OFF	19.9
0.462840	27.05	---	56.64	29.59	L1	OFF	19.9
2.835150	---	21.54	46.00	24.46	L1	OFF	20.0
2.835150	26.52	---	56.00	29.48	L1	OFF	20.0
11.564070	---	32.34	50.00	17.66	L1	OFF	20.1
11.564070	37.63	---	60.00	22.37	L1	OFF	20.1
11.936670	---	32.07	50.00	17.93	L1	OFF	20.1
11.936670	38.96	---	60.00	21.04	L1	OFF	20.1
12.659730	---	34.51	50.00	15.49	L1	OFF	20.1
12.659730	39.76	---	60.00	20.24	L1	OFF	20.1
13.059870	---	41.41	50.00	8.59	L1	OFF	20.1
13.059870	47.53	---	60.00	12.47	L1	OFF	20.1
13.558920	---	41.46	50.00	8.54	L1	OFF	20.1
13.558920	46.47	---	60.00	13.53	L1	OFF	20.1
14.155440	---	34.12	50.00	15.88	L1	OFF	20.1

14.155440	40.20	---	60.00	19.80	L1	OFF	20.1
14.550000	---	35.43	50.00	14.57	L1	OFF	20.1
14.550000	41.81	---	60.00	18.19	L1	OFF	20.1
15.148500	---	32.88	50.00	17.12	L1	OFF	20.1
15.148500	39.68	---	60.00	20.32	L1	OFF	20.1

EUT Information

Report NO : 450112
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

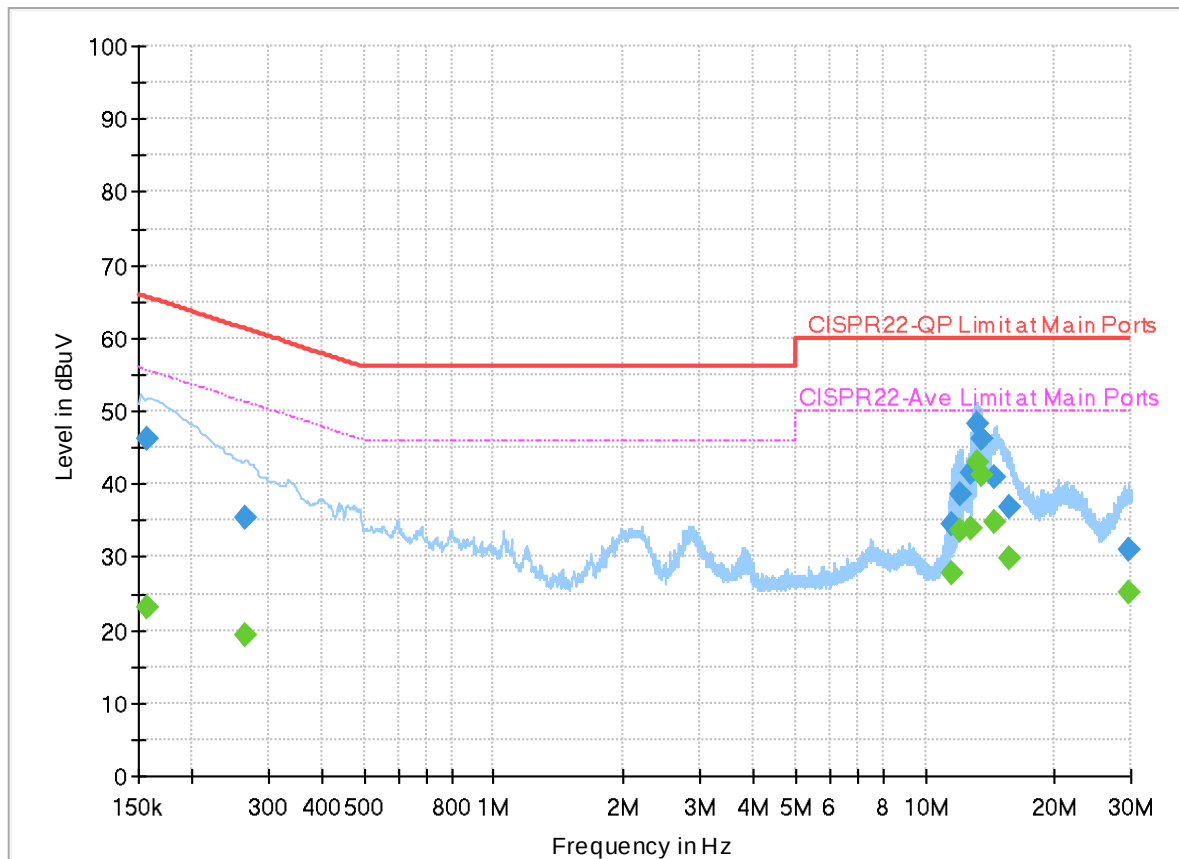

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	23.01	55.63	32.62	N	OFF	19.9
0.156750	46.26	---	65.63	19.37	N	OFF	19.9
0.264750	---	19.36	51.28	31.92	N	OFF	19.9
0.264750	35.40	---	61.28	25.88	N	OFF	19.9
11.571000	---	27.77	50.00	22.23	N	OFF	20.1
11.571000	34.50	---	60.00	25.50	N	OFF	20.1
12.032610	---	33.48	50.00	16.52	N	OFF	20.1
12.032610	38.62	---	60.00	21.38	N	OFF	20.1
12.766830	---	33.82	50.00	16.18	N	OFF	20.1
12.766830	41.44	---	60.00	18.56	N	OFF	20.1
13.152570	---	42.98	50.00	7.02	N	OFF	20.1
13.152570	48.27	---	60.00	11.73	N	OFF	20.1
13.561710	---	41.23	50.00	8.77	N	OFF	20.1
13.561710	46.12	---	60.00	13.88	N	OFF	20.1
14.550000	---	34.93	50.00	15.07	N	OFF	20.1
14.550000	41.02	---	60.00	18.98	N	OFF	20.1
15.744750	---	29.80	50.00	20.20	N	OFF	20.2
15.744750	36.90	---	60.00	23.10	N	OFF	20.2
29.617350	---	25.04	50.00	24.96	N	OFF	20.2

29.617350	30.97	---	60.00	29.03	N	OFF	20.2
-----------	-------	-----	-------	-------	---	-----	------



Appendix C. Radiated Spurious Emission

Test Engineer :	Ken Kuo, Bank Lin, Fred Tseng, and Karl Hou	Temperature :	20.8~24.8°C
		Relative Humidity :	52.4~63.8%

MIMO<Ant. 1+2>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.2	56.28	-17.72	74	43.36	26.91	18.36	32.35	277	39	P	H
		2390	46.58	-7.42	54	33.67	26.9	18.36	32.35	277	39	A	H
	*	2412	121.27	-	-	108.26	26.98	18.4	32.37	277	39	P	H
	*	2414	117.76	-	-	104.76	26.96	18.41	32.37	277	39	A	H
		2484.952	53.92	-20.08	74	40.9	26.9	18.53	32.41	277	39	P	H
		2484.952	44.44	-9.56	54	31.42	26.9	18.53	32.41	277	39	A	H
		2388.88	54.52	-19.48	74	41.6	26.91	18.36	32.35	263	7	P	V
		2389.04	45.14	-8.86	54	32.22	26.91	18.36	32.35	263	7	A	V
	*	2412	117.16	-	-	104.15	26.98	18.4	32.37	263	7	P	V
	*	2412	113.99	-	-	100.98	26.98	18.4	32.37	263	7	A	V
		2484.424	53.35	-20.65	74	40.33	26.9	18.53	32.41	263	7	P	V
		2485.04	42.14	-11.86	54	29.12	26.9	18.53	32.41	263	7	A	V
802.11b CH 06 2437MHz		2389.68	53.96	-20.04	74	41.05	26.9	18.36	32.35	280	37	P	H
		2390	43.72	-10.28	54	30.81	26.9	18.36	32.35	280	37	A	H
	*	2437	119.26	-	-	106.39	26.8	18.45	32.38	280	37	P	H
	*	2437	116.05	-	-	103.18	26.8	18.45	32.38	280	37	A	H
		2483.6	52.53	-21.47	74	39.51	26.9	18.53	32.41	280	37	P	H
		2483.52	43.07	-10.93	54	30.05	26.9	18.53	32.41	280	37	A	H
		2387.6	51.78	-22.22	74	38.85	26.92	18.36	32.35	294	7	P	V
		2390	41.87	-12.13	54	28.96	26.9	18.36	32.35	294	7	A	V
	*	2437	114.17	-	-	101.3	26.8	18.45	32.38	294	7	P	V
	*	2437	110.99	-	-	98.12	26.8	18.45	32.38	294	7	A	V
		2486.56	51.42	-22.58	74	38.39	26.9	18.54	32.41	294	7	P	V
		2483.52	40.98	-13.02	54	27.96	26.9	18.53	32.41	294	7	A	V



802.11b CH 11 2462MHz		2386.96	54.2	-19.8	74	41.26	26.93	18.36	32.35	251	39	P	H
		2386.16	46.28	-7.72	54	33.34	26.94	18.35	32.35	251	39	A	H
	*	2462	117.23	-	-	104.34	26.8	18.49	32.4	251	39	P	H
	*	2462	114.02	-	-	101.13	26.8	18.49	32.4	251	39	A	H
		2484.08	52.56	-21.44	74	39.54	26.9	18.53	32.41	251	39	P	H
		2484	42.49	-11.51	54	29.47	26.9	18.53	32.41	251	39	A	H
		2388.72	53.1	-20.9	74	40.18	26.91	18.36	32.35	220	5	P	V
		2386.16	44.71	-9.29	54	31.77	26.94	18.35	32.35	220	5	A	V
	*	2462	114.13	-	-	101.24	26.8	18.49	32.4	220	5	P	V
	*	2462	110.96	-	-	98.07	26.8	18.49	32.4	220	5	A	V
		2484.08	51.4	-22.6	74	38.38	26.9	18.53	32.41	220	5	P	V
		2484.16	40.95	-13.05	54	27.93	26.9	18.53	32.41	220	5	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	52.51	-21.49	74	40.56	32.4	13.05	33.5	123	360	P	H
		4824	47.37	-6.63	54	35.42	32.4	13.05	33.5	123	360	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4824	54.27	-19.73	74	42.32	32.4	13.05	33.5	294	344	P	V
		4824	49.71	-4.29	54	37.76	32.4	13.05	33.5	294	344	A	V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 06 2437MHz		4874	52.83	-21.17	74	40.7	32.55	13.07	33.49	100	43	P	H
		4874	48.64	-5.36	54	36.51	32.55	13.07	33.49	100	43	A	H
		7311	56.23	-17.77	74	38.57	37.5	16	35.84	154	360	P	H
		7311	49.9	-4.1	54	32.24	37.5	16	35.84	154	360	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	51.33	-22.67	74	39.2	32.55	13.07	33.49	206	344	P	V
		4874	45.9	-8.1	54	33.77	32.55	13.07	33.49	206	344	A	V
		7311	55.46	-18.54	74	37.8	37.5	16	35.84	272	0	P	V
		7311	50.11	-3.89	54	32.45	37.5	16	35.84	272	0	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 11 2462MHz		4924	48.87	-25.13	74	36.6	32.65	13.1	33.48	199	34	P	H	
		4924	43.3	-10.7	54	31.03	32.65	13.1	33.48	199	34	A	H	
		7386	56.05	-17.95	74	38.42	37.43	16.09	35.89	158	1	P	H	
		7386	50.59	-3.41	54	32.96	37.43	16.09	35.89	158	1	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
		4924	48.38	-25.62	74	36.11	32.65	13.1	33.48	304	344	P	V	
		4924	42.14	-11.86	54	29.87	32.65	13.1	33.48	304	344	A	V	
		7386	55.52	-18.48	74	37.89	37.43	16.09	35.89	377	32	P	V	
		7386	49.88	-4.12	54	32.25	37.43	16.09	35.89	377	32	A	V	
														V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.8	55.27	-18.73	74	42.36	26.9	18.36	32.35	357	43	P	H
		2389.38	44.37	-9.63	54	31.45	26.91	18.36	32.35	357	43	A	H
	*	2412	116.51	-	-	103.5	26.98	18.4	32.37	357	43	P	H
	*	2412	108.85	-	-	95.84	26.98	18.4	32.37	357	43	A	H
		2484.6	53.61	-20.39	74	40.59	26.9	18.53	32.41	357	43	P	H
		2485.568	43.06	-10.94	54	30.04	26.9	18.53	32.41	357	43	A	H
		2389.065	55.97	-18.03	74	43.05	26.91	18.36	32.35	349	0	P	V
		2389.905	43.5	-10.5	54	30.59	26.9	18.36	32.35	349	0	A	V
	*	2412	115.56	-	-	102.55	26.98	18.4	32.37	349	0	P	V
	*	2412	107.79	-	-	94.78	26.98	18.4	32.37	349	0	A	V
		2483.544	52.27	-21.73	74	39.25	26.9	18.53	32.41	349	0	P	V
		2485.656	42.13	-11.87	54	29.11	26.9	18.53	32.41	349	0	A	V
802.11g CH 06 2437MHz		2388.88	53.73	-20.27	74	40.81	26.91	18.36	32.35	258	39	P	H
		2390	43.93	-10.07	54	31.02	26.9	18.36	32.35	258	39	A	H
	*	2437	120.8	-	-	107.93	26.8	18.45	32.38	258	39	P	H
	*	2437	113	-	-	100.13	26.8	18.45	32.38	258	39	A	H
		2483.84	54.93	-19.07	74	41.91	26.9	18.53	32.41	258	39	P	H
		2483.52	44.84	-9.16	54	31.82	26.9	18.53	32.41	258	39	A	H
		2383.76	52.16	-21.84	74	39.2	26.96	18.35	32.35	271	1	P	V
		2387.76	41.97	-12.03	54	29.04	26.92	18.36	32.35	271	1	A	V
	*	2437	118.38	-	-	105.51	26.8	18.45	32.38	271	1	P	V
	*	2437	110.58	-	-	97.71	26.8	18.45	32.38	271	1	A	V
		2483.76	56.53	-17.47	74	43.51	26.9	18.53	32.41	271	1	P	V
		2483.52	43.61	-10.39	54	30.59	26.9	18.53	32.41	271	1	A	V



802.11g CH 11 2462MHz		2389.8	53.64	-20.36	74	40.73	26.9	18.36	32.35	327	36	P	H
		2386.912	43	-11	54	30.06	26.93	18.36	32.35	327	36	A	H
	*	2462	117.54	-	-	104.65	26.8	18.49	32.4	327	36	P	H
	*	2462	109.77	-	-	96.88	26.8	18.49	32.4	327	36	A	H
		2483.72	62.35	-11.65	74	49.33	26.9	18.53	32.41	327	36	P	H
		2483.52	50.31	-3.69	54	37.29	26.9	18.53	32.41	327	36	A	H
		2388.736	52.83	-21.17	74	39.91	26.91	18.36	32.35	245	360	P	V
		2389.952	42.93	-11.07	54	30.02	26.9	18.36	32.35	245	360	A	V
	*	2462	115.14	-	-	102.25	26.8	18.49	32.4	245	360	P	V
	*	2462	107.72	-	-	94.83	26.8	18.49	32.4	245	360	A	V
		2483.6	60.2	-13.8	74	47.18	26.9	18.53	32.41	245	360	P	V
		2483.52	48.83	-5.17	54	35.81	26.9	18.53	32.41	245	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	46.47	-27.53	74	34.52	32.4	13.05	33.5	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4824	44.9	-29.1	74	32.95	32.4	13.05	33.5	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 06 2437MHz		4874	48.9	-25.1	74	36.77	32.55	13.07	33.49	235	26	P	H
		4874	39.07	-14.93	54	26.94	32.55	13.07	33.49	235	26	A	H
		7311	60.79	-13.21	74	43.13	37.5	16	35.84	153	0	P	H
		7311	50.55	-3.45	54	32.89	37.5	16	35.84	153	0	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	46.19	-27.81	74	34.06	32.55	13.07	33.49	-	-	P	V
		7311	58.15	-15.85	74	40.49	37.5	16	35.84	391	32	P	V
		7311	48.97	-5.03	54	31.31	37.5	16	35.84	391	32	A	V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 01 2412MHz		2389.8	60.03	-13.97	74	47.12	26.9	18.36	32.35	269	43	P	H
		2390	46.3	-7.7	54	33.39	26.9	18.36	32.35	269	43	A	H
	*	2412	119.98	-	-	106.97	26.98	18.4	32.37	269	43	P	H
	*	2412	109.55	-	-	96.54	26.98	18.4	32.37	269	43	A	H
		2483.632	52.53	-21.47	74	39.51	26.9	18.53	32.41	269	43	P	H
		2483.544	42.25	-11.75	54	29.23	26.9	18.53	32.41	269	43	A	H
		2389.695	58.06	-15.94	74	45.15	26.9	18.36	32.35	236	0	P	V
		2390	44.62	-9.38	54	31.71	26.9	18.36	32.35	236	0	A	V
	*	2412	115.86	-	-	102.85	26.98	18.4	32.37	236	0	P	V
	*	2412	106.1	-	-	93.09	26.98	18.4	32.37	236	0	A	V
		2483.544	52.99	-21.01	74	39.97	26.9	18.53	32.41	236	0	P	V
		2483.544	42.13	-11.87	54	29.11	26.9	18.53	32.41	236	0	A	V
802.11ax HE20 Full CH 06 2437MHz		2389.52	59.33	-14.67	74	46.42	26.9	18.36	32.35	360	37	P	H
		2390	45.65	-8.35	54	32.74	26.9	18.36	32.35	360	37	A	H
	*	2437	121.27	-	-	108.4	26.8	18.45	32.38	360	37	P	H
	*	2437	111.4	-	-	98.53	26.8	18.45	32.38	360	37	A	H
		2483.84	62.61	-11.39	74	49.59	26.9	18.53	32.41	360	37	P	H
		2483.52	47.5	-6.5	54	34.48	26.9	18.53	32.41	360	37	A	H
		2390	60.91	-13.09	74	48	26.9	18.36	32.35	268	0	P	V
		2390	44.02	-9.98	54	31.11	26.9	18.36	32.35	268	0	A	V
	*	2437	119.7	-	-	106.83	26.8	18.45	32.38	268	0	P	V
	*	2437	111.04	-	-	98.17	26.8	18.45	32.38	268	0	A	V
		2483.52	58.77	-15.23	74	45.75	26.9	18.53	32.41	268	0	P	V
		2483.52	45.64	-8.36	54	32.62	26.9	18.53	32.41	268	0	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 11 2462MHz		2375.36	52.78	-21.22	74	39.8	27	18.33	32.35	100	46	P	H
		2387.368	42	-12	54	29.06	26.93	18.36	32.35	100	46	A	H
	*	2462	116.85	-	-	103.96	26.8	18.49	32.4	100	46	P	H
	*	2462	107.29	-	-	94.4	26.8	18.49	32.4	100	46	A	H
		2484.2	67.21	-6.79	74	54.19	26.9	18.53	32.41	100	46	P	H
		2483.52	52.24	-1.76	54	39.22	26.9	18.53	32.41	100	46	A	H
		2387.064	52.63	-21.37	74	39.69	26.93	18.36	32.35	249	0	P	V
		2387.824	42.22	-11.78	54	29.29	26.92	18.36	32.35	249	0	A	V
	*	2462	116.24	-	-	103.35	26.8	18.49	32.4	249	0	P	V
	*	2462	106.3	-	-	93.41	26.8	18.49	32.4	249	0	A	V
		2483.64	65.6	-8.4	74	52.58	26.9	18.53	32.41	249	0	P	V
		2483.52	51.27	-2.73	54	38.25	26.9	18.53	32.41	249	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

[illegible]