


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	2.4G (Ant. 1) + 5G (Ant. 6) CTX

Horizontal

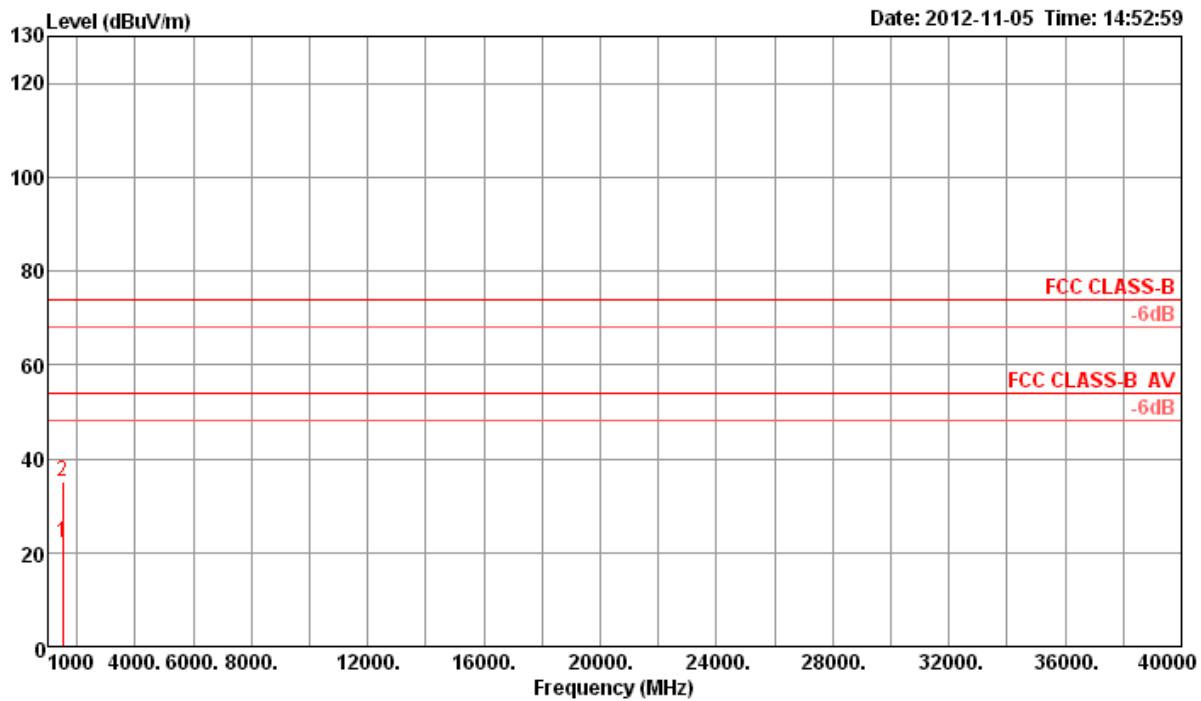

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	1497.50	22.07	54.00	-31.93	30.51	1.73	25.37	35.54	Average	100	41	HORIZONTAL
2	1498.97	35.20	74.00	-38.80	43.64	1.73	25.37	35.54	Peak	100	41	HORIZONTAL

Vertical

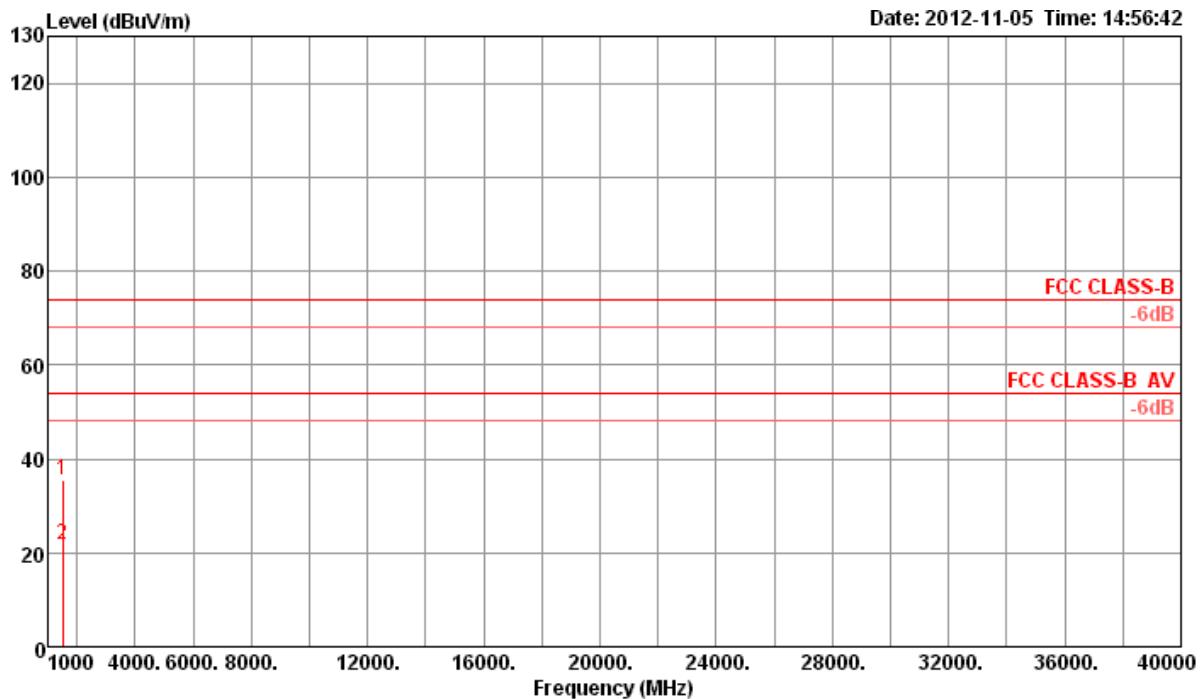

Freq	Level	Limit	Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1497.59	35.33	74.00	-38.67	43.77	1.73	25.37	35.54	Peak	100	20 VERTICAL
2	1498.39	21.89	54.00	-32.11	30.32	1.73	25.38	35.54	Average	100	41 VERTICAL