



FCC RADIO TEST REPORT

FCC ID : UZ7MC345A
Equipment : Mobile Computer
Brand Name : ZEBRA
Model Name : MC345A
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Oct. 25, 2024 and testing was performed from Nov. 12, 2024 to Dec. 25, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	7
1.3 Modification of EUT	8
1.4 Testing Location	8
1.5 Applicable Standards	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	12
3 Conducted Test Result	13
3.1 Measuring Instruments.....	13
3.2 Conducted Output Power and ERP/EIRP	14
3.3 Peak-to-Average Ratio	15
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	16
3.5 Conducted Band Edge	17
3.6 Conducted Spurious Emission	18
3.7 Frequency Stability	19
4 Radiated Test Items	20
4.1 Measuring Instruments.....	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test.....	21
4.4 Field Strength of Spurious Radiation Measurement	22
5 List of Measuring Equipment.....	23
6 Measurement Uncertainty	24
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG4O2228A	01	Initial issue of report	Jan. 15, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	34.70 dB under the limit at 2540.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng
Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Computer
Brand Name	ZEBRA
Model Name	MC345A
FCC ID	UZ7MC345A
Sample 1	SKU 9 (Brick+SE5800+38 Keypad)
Sample 2	SKU 10 (Gun+SE4770+29 Keypad)
Sample 3	SKU 11 (Gun+SE5500+47 Keypad)
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	EV
SW Version	14-10-10.00-UG-U00-PRD-NEM-04
MFD	14SEP24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Support band and evaluated information	
Supported band	Band II, Band IV, Band V
Evaluated and Tested band	Band II, Band IV, Band V

Band Power Class	
	PC3
WCDMA Band II	V
WCDMA Band IV	V
WCDMA Band V	V



Stage	MC34 WWAN SKU list				
Configuration	SKU3	SKU6	SKU9	SKU10	SKU11
WW/WL	WWAN	WWAN	WWAN	WWAN	WWAN
Form Factor	FA	FA	FA	FA	FA
SKU	Prem	Prem+	Prem+	Prem	Prem+
Brick / Gun	Gun	Gun	Brick	Gun	Gun
DDR size	6GB	6GB	6GB	6GB	6GB
UFS size	64GB	128GB	128GB	64GB	128GB
Scan engine	SE5500	SE5800	SE5800	SE4770	SE5500
FF Camera	None	5MP (PN)	5MP (PN)	None	5MP (PN)
RF Camera		13MP (PN)	13MP (PN)		13MP (PN)
Keypad	47	47	38	29	47
Battery	7000mAh	7000mAh	7000mAh	7000mAh	7000mAh
Region (ROW or NA)	NA	NA	NA	NA	NA

Specification of Accessories				
Adapter USB Wall Charger	Brand Name	Zebra	Model Number	PWR-WUA5V12W0US
Battery 1 Standard Battery (7000mAh)	Brand Name	Zebra	Model Number	BT-000375
			Manufacturer	TWS
Battery 2 Standard Battery (7000mAh)	Brand Name	Zebra	Model Number	BT-000375
			Manufacturer	Inventus
Battery 3 BLE Battery (7000mAh)	Brand Name	Zebra	Model Number	BT-000444
Battery 4 BLE Battery (7000mAh)	Brand Name	Zebra	Model Number	BT-000375
Type C USB Cable	Brand Name	Zebra	Model Number	CBL-TC5X-USBC2A-01
USB Cable Cup	Brand Name	Zebra	Model Number	CBL-MC33-USBCCHG-01
Soft Holster for Gun Type	Brand Name	Zebra	Model Number	SG-MC3021212-01R
Soft Holster for Brick Type	Brand Name	Zebra	Model Number	SG-MC3X-SHLSTB-01
USB-C PTT Headset	Brand Name	Zebra	Model Number	HDST-USBC-PTT1-01
USB-C to 3.5mm adapter	Brand Name	Zebra	Model Number	ADP-USBC-35MM1-01
3.5mm To Quick Disconnect (QD) Adapter Cable	Brand Name	Zebra	Model Number	ADP-35M-QDCBL1-01
3.5mm PTT Headset	Brand Name	Zebra	Model Number	HDST-35MM-PTT1-01
3.5mm PTT HS2100 Headset	Brand Name	Zebra	Model Number	HS2100
Quick Disconnect (QD) Cable	Brand Name	Zebra	Model Number	CBL-HS2100-QDC1-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency	WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz
Maximum Output Power to Antenna	WCDMA: Band V: 24.32 dBm Band II: 23.85 dBm Band IV: 24.56 dBm
Antenna Type	<Ant. 1> : PIFA Antenna
Antenna Gain	<Ant. 1> : Cellular Band: -0.78 dBi PCS Band: -0.02 dBi AWS Band: -0.08 dBi
Type of Modulation	WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Eric Wu
Temperature (°C)	19.6~21.6
Relative Humidity (%)	35.9~37.9

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH21-HY (TAF Code: 3786)
Test Engineer	Fred Tseng, Ray Lung and Sky Chang
Temperature (°C)	18~26
Relative Humidity (%)	50~70
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Battery 1 Standard Battery (7000mAh).

2.2 Connection Diagram of Test System

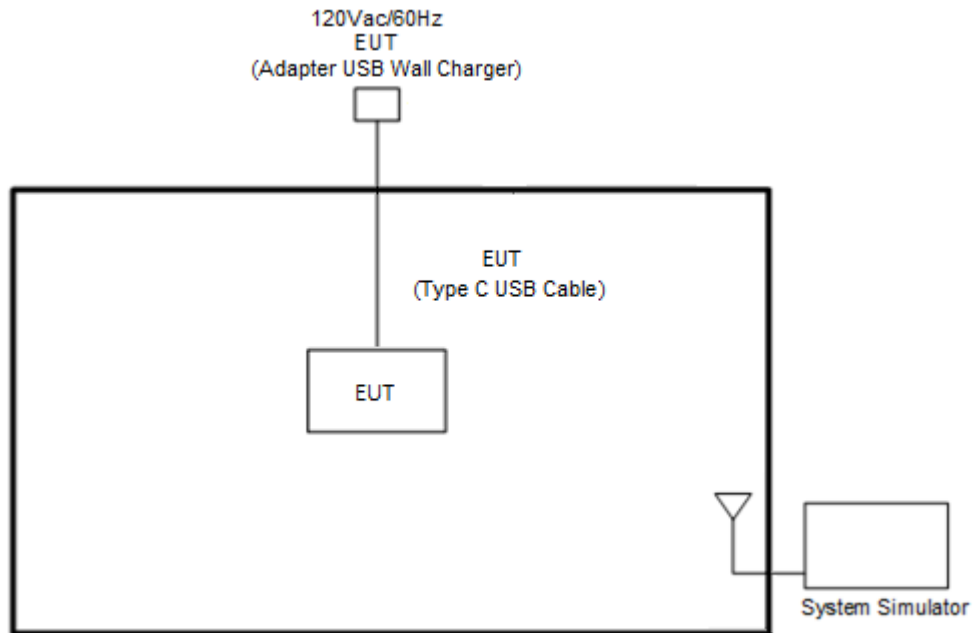

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

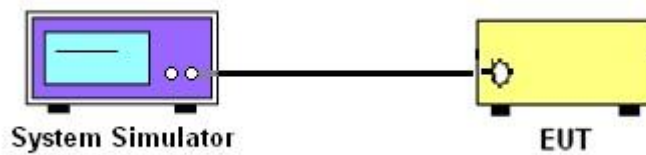

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

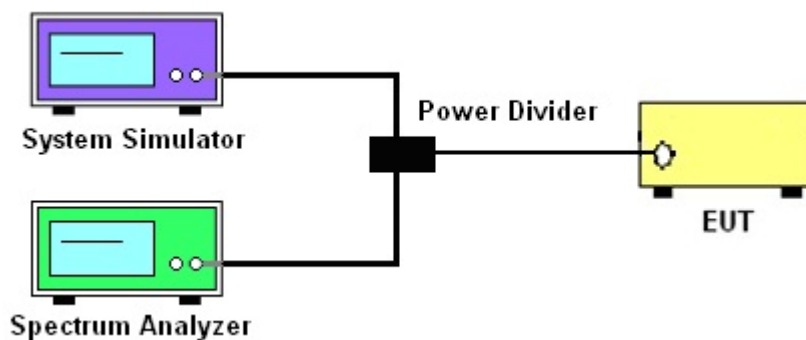

3.1.4 Frequency Stability

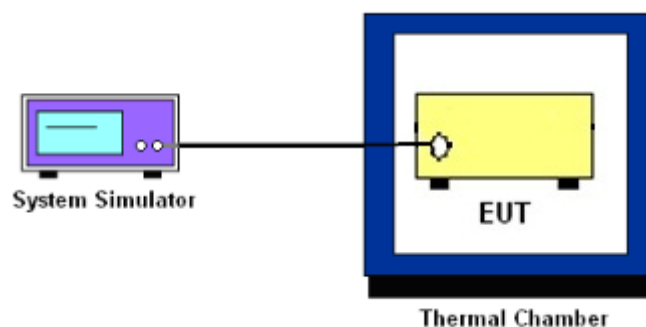

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

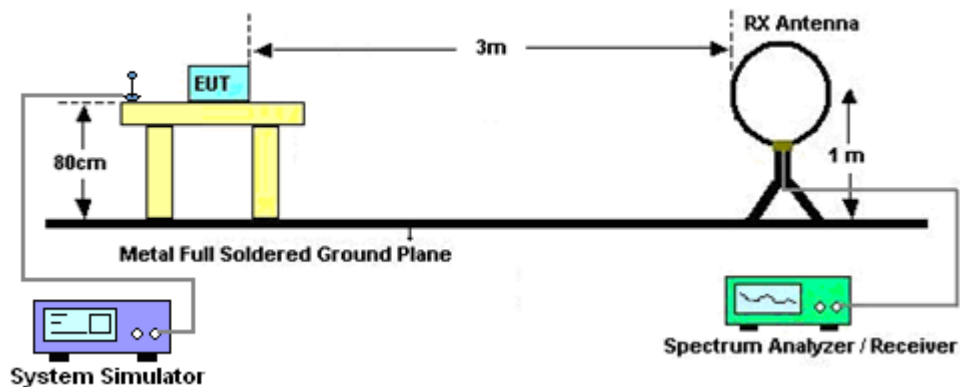


For radiated test from 30MHz to 1GHz

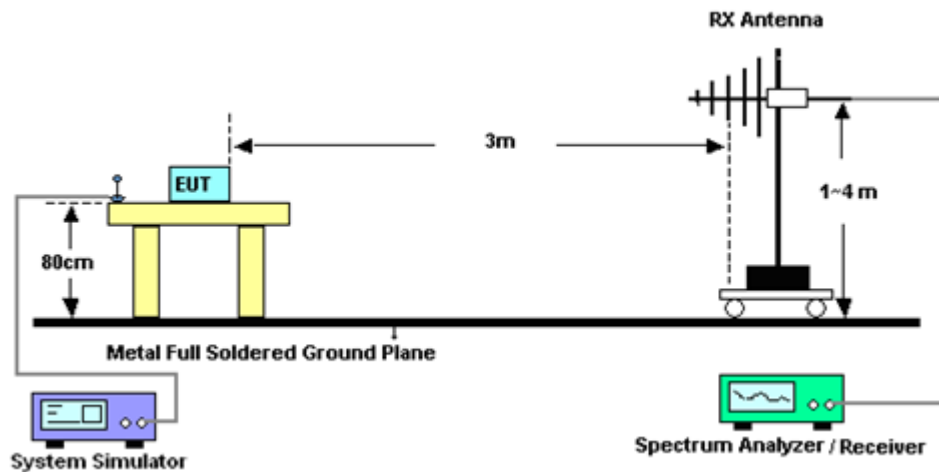

For radiated test from 1GHz to 18GHz

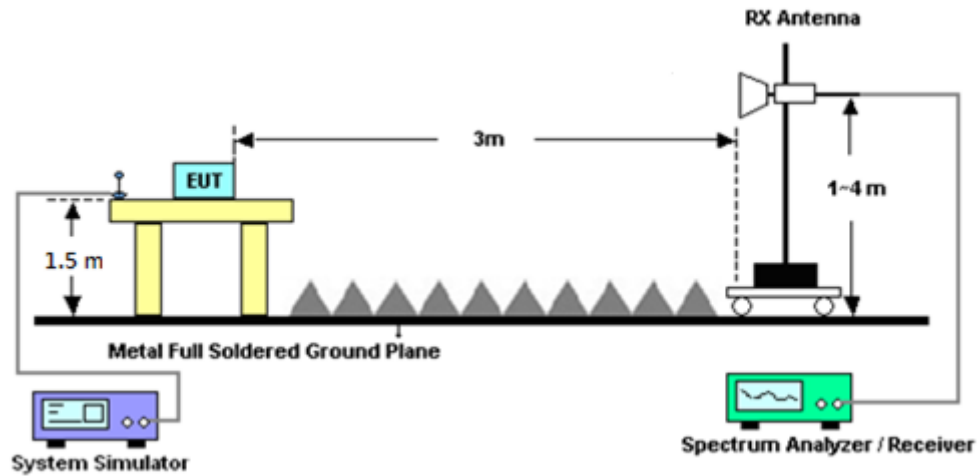

For radiated test above 18GHz

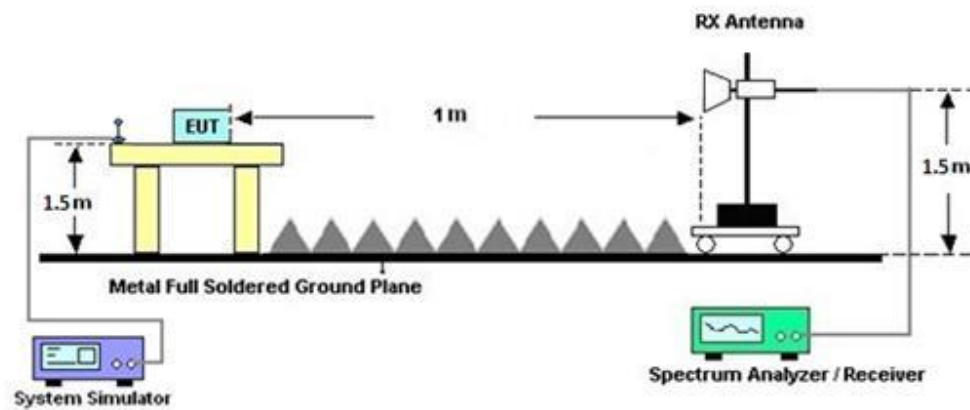

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Nov. 19, 2024~ Dec. 25, 2024	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00800N1D01N -06	41912 & 05	30MHz~1GHz	Feb. 04, 2024	Nov. 19, 2024~ Dec. 25, 2024	Feb. 03, 2025	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18E N	1GHz~18GHz	Jul. 11, 2024	Nov. 19, 2024~ Dec. 25, 2024	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Nov. 19, 2024~ Dec. 25, 2024	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Nov. 19, 2024~ Dec. 25, 2024	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Nov. 19, 2024~ Dec. 25, 2024	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Nov. 19, 2024~ Dec. 25, 2024	Sep. 01, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 06, 2024	Nov. 19, 2024~ Dec. 25, 2024	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Nov. 19, 2024~ Dec. 25, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,80 4612/2,8039 54/2	30MHz~40GHz	Aug. 12, 2024	Nov. 19, 2024~ Dec. 25, 2024	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECEPEL	DTM-303A	TP211568	N/A	Oct. 21, 2024	Nov. 19, 2024~ Dec. 25, 2024	Oct. 20, 2025	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 19, 2024~ Dec. 25, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Nov. 19, 2024~ Dec. 25, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 19, 2024~ Dec. 25, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Nov. 19, 2024~ Dec. 25, 2024	N/A	Radiation (03CH21-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~40GHz	Sep. 25, 2024	Nov. 12, 2024~ Nov. 28, 2024	Sep. 24, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 09, 2024	Nov. 12, 2024~ Nov. 28, 2024	Apr. 08, 2025	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 08, 2024	Nov. 12, 2024~ Nov. 28, 2024	Aug. 07, 2025	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	LHU-113	1012005860	-20°C~85°C	Dec. 13, 2023	Nov. 12, 2024~ Nov. 28, 2024	Dec. 12, 2024	Conducted (TH03-HY)
Hygrometer	TECEPEL	DTM-303B	TP200886	N/A	Mar. 14, 2024	Nov. 12, 2024~ Nov. 28, 2024	Mar. 13, 2025	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.141 dB
--	----------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.330 dB
--	----------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.680 dB
--	----------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & ERP / EIRP)

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -0.78 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.23	23.91	24.32	21.39	0.1377
HSDPA Subtest-1	23.16	22.92	23.28		
HSDPA Subtest-2	23.13	22.91	23.24		
HSDPA Subtest-3	22.72	22.40	22.79		
HSDPA Subtest-4	22.68	22.42	22.82		
HSUPA Subtest-1	22.66	22.41	22.79		
HSUPA Subtest-2	21.23	20.92	21.27		
HSUPA Subtest-3	22.22	21.91	22.25		
HSUPA Subtest-4	21.24	20.92	21.25		
HSUPA Subtest-5	23.23	22.92	23.26		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -0.02 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.85	23.59	23.75	23.83	0.2415
HSDPA Subtest-1	22.57	22.64	22.59		
HSDPA Subtest-2	22.52	22.61	22.54		
HSDPA Subtest-3	22.02	22.08	22.01		
HSDPA Subtest-4	21.98	22.07	21.99		
HSUPA Subtest-1	22.01	22.08	22.00		
HSUPA Subtest-2	20.49	20.58	20.50		
HSUPA Subtest-3	21.47	21.57	21.49		
HSUPA Subtest-4	20.48	20.58	20.51		
HSUPA Subtest-5	22.51	22.58	22.49		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.08 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.22	24.05	24.56	24.48	0.2805
HSDPA Subtest-1	23.11	23.04	23.51		
HSDPA Subtest-2	23.13	23.04	23.51		
HSDPA Subtest-3	22.61	22.53	23.01		
HSDPA Subtest-4	22.68	22.54	23.00		
HSUPA Subtest-1	22.64	22.51	22.98		
HSUPA Subtest-2	21.13	21.05	21.49		
HSUPA Subtest-3	22.18	22.01	22.43		
HSUPA Subtest-4	21.12	21.03	21.45		
HSUPA Subtest-5	23.20	23.03	23.53		
Limit	EIRP < 1W			Result	Pass









A2. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.16	3.56	3.44	PASS
Middle CH	3.44	3.28	3.48	
Highest CH	3.32	3.36	3.44	

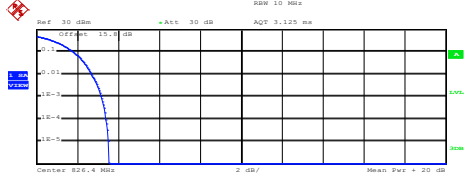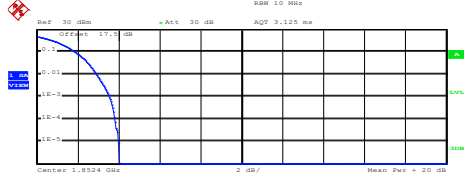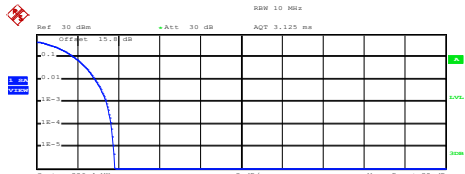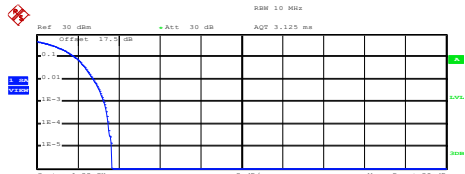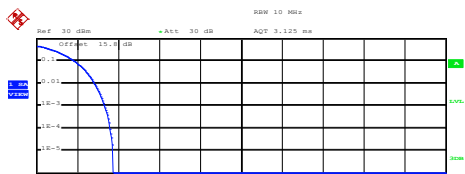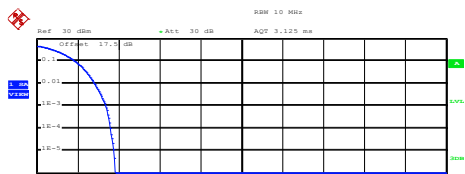

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 828.4 MHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.05 dBm Peak 26.58 dBm Crest 3.53 dB 10 % 1.80 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.40 dB Date: 14.NOV.2024 14:28:30	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.8524 GHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.92 dBm Peak 26.93 dBm Crest 4.01 dB 10 % 1.88 dB 1 % 2.92 dB .1 % 3.56 dB .01 % 3.84 dB Date: 14.NOV.2024 14:48:13
Middle Channel	Middle Channel
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 838.4 MHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.82 dBm Peak 26.65 dBm Crest 3.83 dB 10 % 1.84 dB 1 % 2.88 dB .1 % 3.44 dB .01 % 3.64 dB Date: 14.NOV.2024 14:28:47	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.88 GHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.91 dBm Peak 26.58 dBm Crest 3.67 dB 10 % 1.84 dB 1 % 2.76 dB .1 % 3.28 dB .01 % 3.48 dB Date: 14.NOV.2024 14:48:31
Highest Channel	Highest Channel
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 848.6 MHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.98 dBm Peak 26.72 dBm Crest 3.75 dB 10 % 1.88 dB 1 % 2.84 dB .1 % 3.32 dB .01 % 3.60 dB Date: 14.NOV.2024 14:29:04	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.9076 GHz, 2 dB, Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.82 dBm Peak 26.65 dBm Crest 3.83 dB 10 % 1.88 dB 1 % 2.80 dB .1 % 3.36 dB .01 % 3.60 dB Date: 14.NOV.2024 14:48:50


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

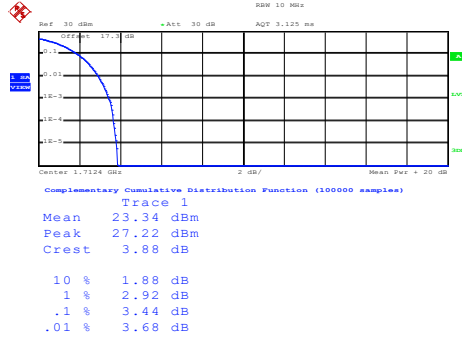


Date: 14.NOV.2024 15:02:09

Middle Channel

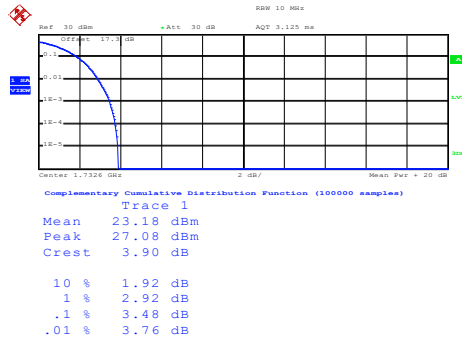

Date: 14.NOV.2024 15:02:24

Highest Channel

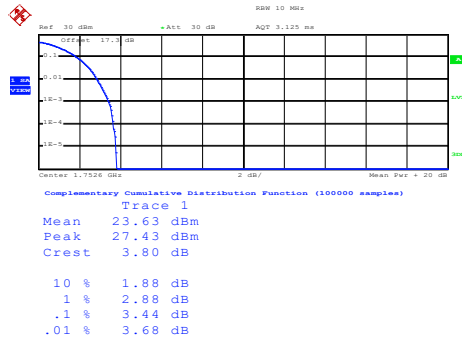

Date: 14.NOV.2024 15:02:42




26dB Bandwidth

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.70	4.72
Middle CH	4.71	4.72	4.71
Highest CH	4.70	4.71	4.72



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

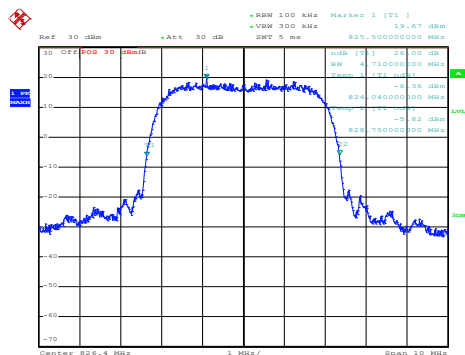

Date: 14.NOV.2024 14:14:45


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

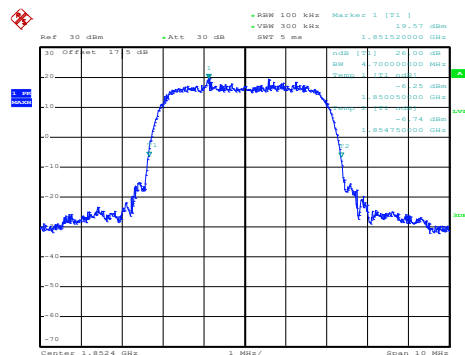


Date: 14.NOV.2024 14:31:44

Middle Channel

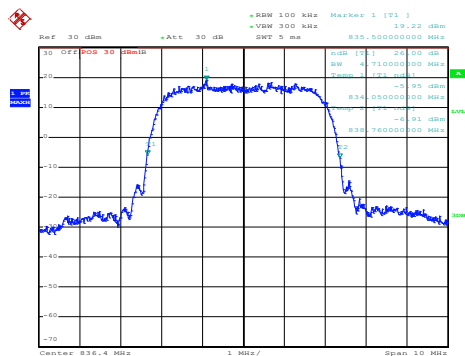


Date: 14.NOV.2024 14:15:48

Middle Channel

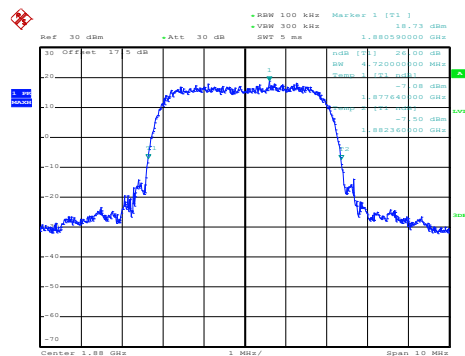


Date: 14.NOV.2024 14:32:29

Highest Channel

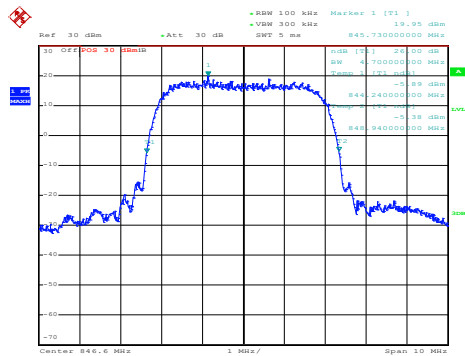

Date: 14.NOV.2024 14:16:30


Highest Channel

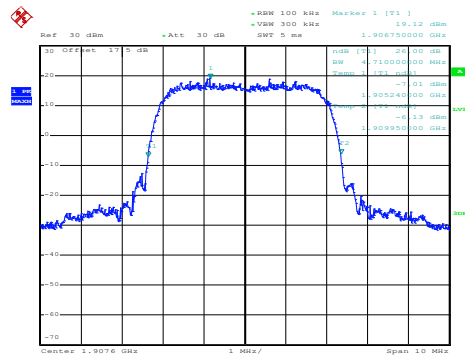

Date: 14.NOV.2024 14:33:22


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

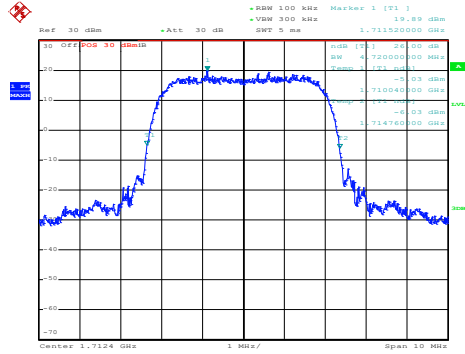


Date: 14.NOV.2024 14:51:52

Middle Channel

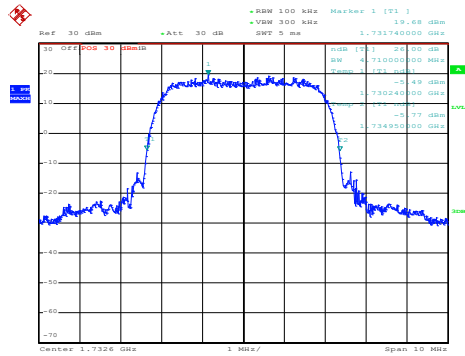

Date: 14.NOV.2024 14:52:30

Highest Channel

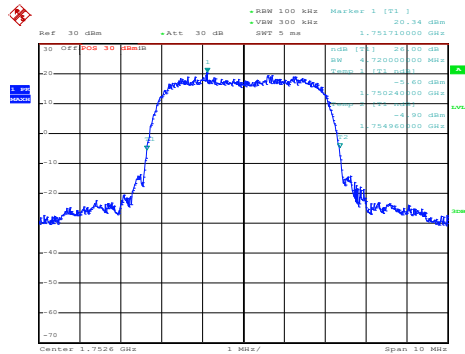

Date: 14.NOV.2024 14:53:08


**Occupied Bandwidth**

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.16	4.16	4.15
Middle CH	4.15	4.17	4.16
Highest CH	4.15	4.15	4.16



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

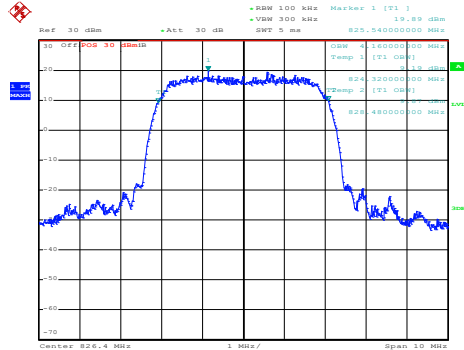

Date: 14.NOV.2024 14:21:07


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

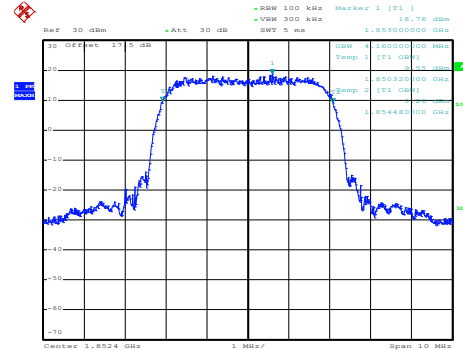


Date: 14.NOV.2024 14:36:22

Middle Channel

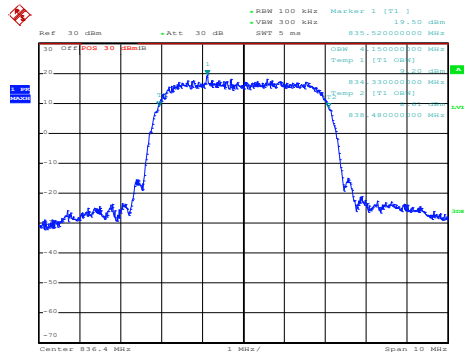


Date: 14.NOV.2024 14:21:51

Middle Channel

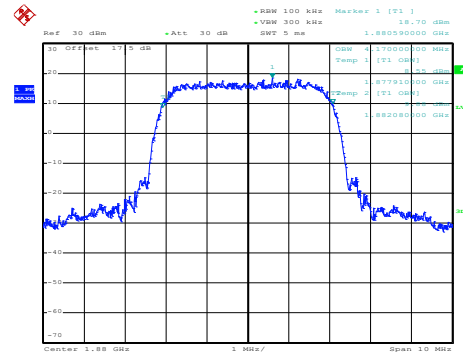


Date: 14.NOV.2024 14:38:42

Highest Channel

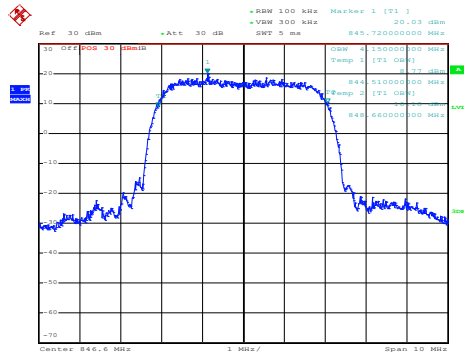

Date: 14.NOV.2024 14:22:58


Highest Channel

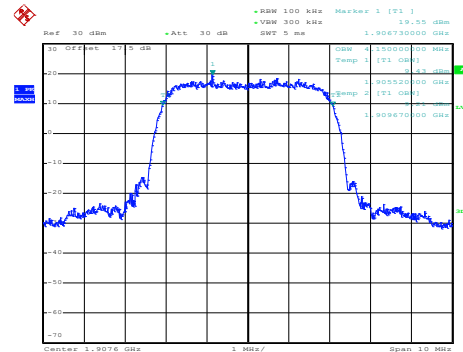

Date: 14.NOV.2024 14:40:17


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

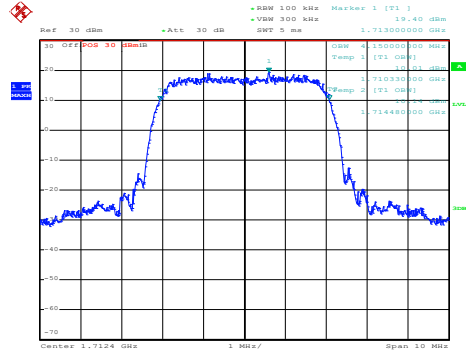


Date: 14.NOV.2024 14:54:46

Middle Channel

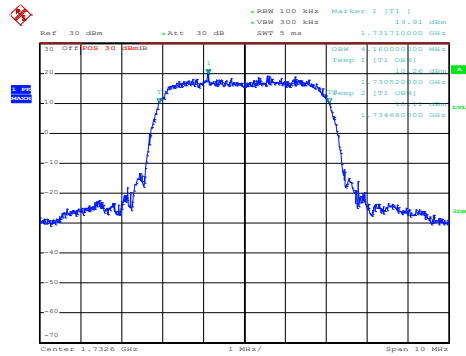

Date: 14.NOV.2024 14:55:23

Highest Channel

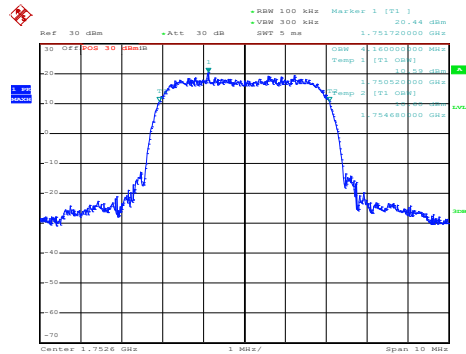


Date: 14.NOV.2024 14:56:01



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

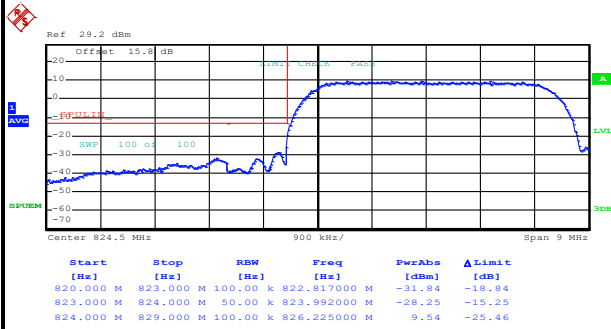

Date: 12.NOV.2024 16:05:49


Highest Band Edge

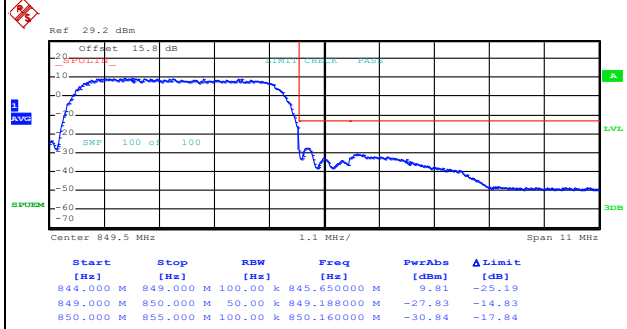

Date: 12.NOV.2024 16:08:54


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

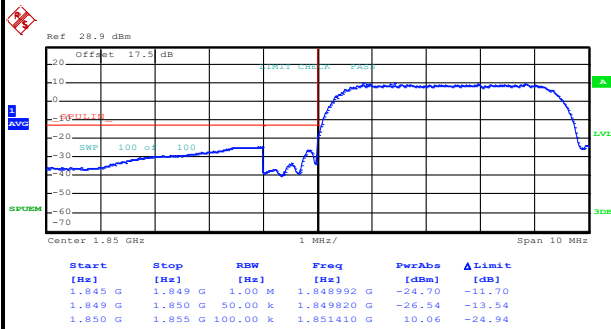

Date: 12.NOV.2024 16:13:34

Highest Band Edge

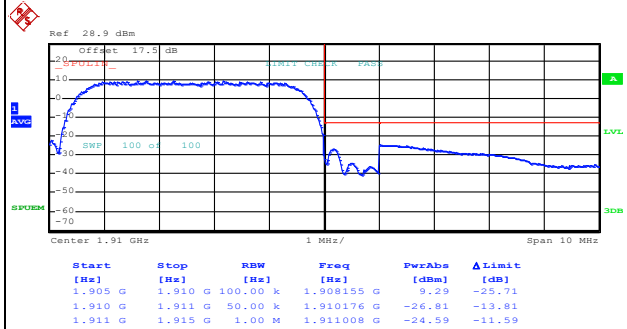


Date: 12.NOV.2024 16:16:33




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

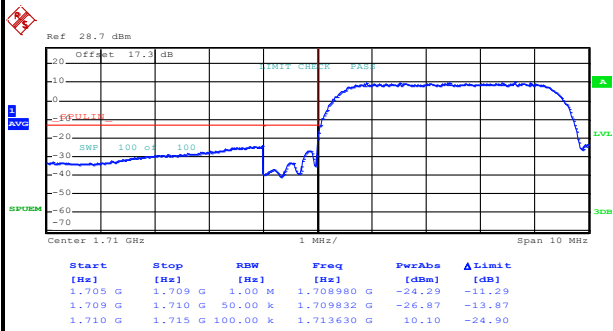


Date: 12.NOV.2024 16:24:28


Highest Band Edge

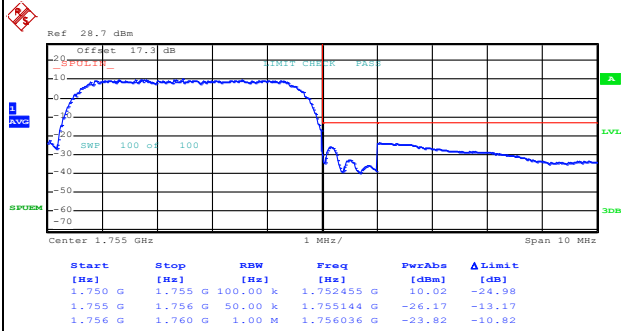


Date: 12.NOV.2024 16:27:31

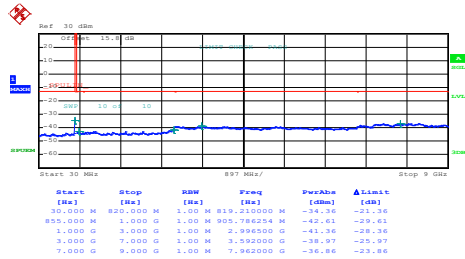**Conducted Spurious Emission****WCDMA Band V (RMC 12.2Kbps)****Lowest Channel**


Date: 14.NOV.2024 14:25:29

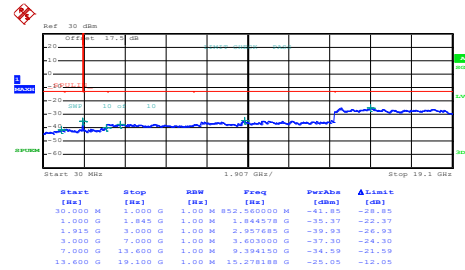WCDMA Band II (RMC 12.2Kbps)**Lowest Channel**


Date: 14.NOV.2024 14:45:08

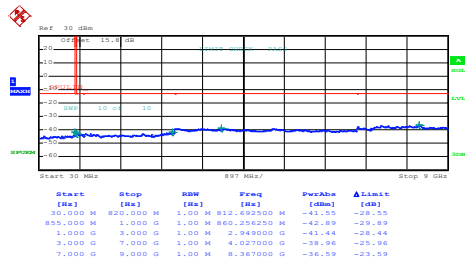Middle Channel


Date: 14.NOV.2024 14:26:31

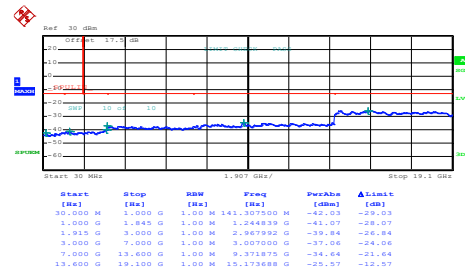Middle Channel

Date: 14.NOV.2024 14:46:04

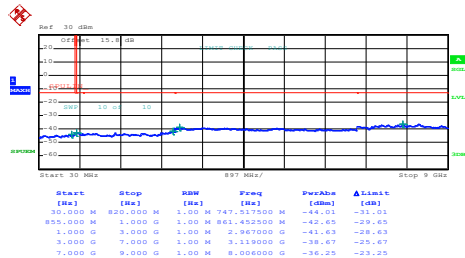Highest Channel

Date: 14.NOV.2024 14:27:26

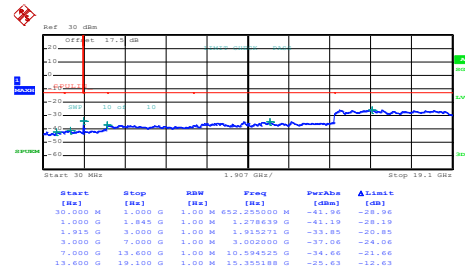
Highest Channel

Date: 14.NOV.2024 14:47:20




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

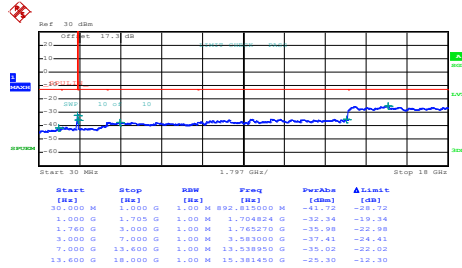


Date: 14.NOV.2024 14:58:44

Middle Channel

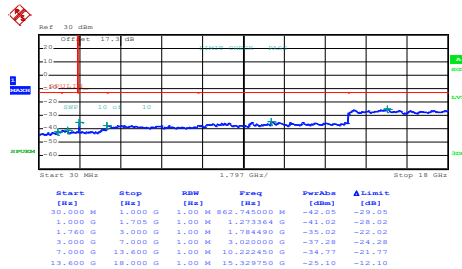

Date: 14.NOV.2024 14:59:39

Highest Channel

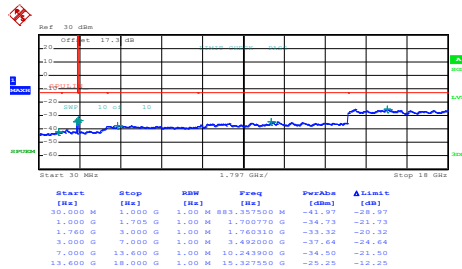

Date: 14.NOV.2024 15:00:32

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0120	PASS
40	Normal Voltage	0.0132	
30	Normal Voltage	0.0072	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0024	
0	Normal Voltage	0.0048	
-10	Normal Voltage	0.0060	
-20	Normal Voltage	0.0036	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0012	
20	Minimum Voltage	0.0024	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0085	PASS
40	Normal Voltage	0.0059	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0016	
0	Normal Voltage	0.0048	
-10	Normal Voltage	0.0027	
-20	Normal Voltage	0.0037	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0011	
20	Minimum Voltage	0.0005	

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0208	PASS
40	Normal Voltage	0.0179	
30	Normal Voltage	0.0127	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0052	
0	Normal Voltage	0.0104	
-10	Normal Voltage	0.0133	
-20	Normal Voltage	0.0121	
20	Maximum Voltage	0.0029	
20	Normal Voltage	0.0012	
20	Minimum Voltage	0.0023	

Note:

1. Normal Voltage = 3.8V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

<Sample 1>

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	WCDMA B5	H	2540	-49.02	RMS	26.90	-23.96	0.56	-95.23	42.71	-13.00	-36.02	H	Ant1
1	Part 24E	WCDMA B2	H	5723	-54.53	RMS	33.59	-21.67	0.64	-95.23	28.14	-13.00	-41.53	H	Ant1
1	Part 27L	WCDMA B4	H	7010	-56.19	RMS	36.30	-20.92	0.37	-95.23	23.29	-13.00	-43.19	V	Ant1

<Sample 2>

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	WCDMA B5	H	2540	-48.10	RMS	26.90	-23.96	0.56	-95.23	43.63	-13.00	-35.10	V	Ant1

<Sample 3>

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	WCDMA B5	H	2540	-47.70	RMS	26.90	-23.96	0.56	-95.23	44.03	-13.00	-34.70	V	Ant1




<Sample 1>

Ant1

Part 22H Mode 1

WCDMA B5 Ch4132

L

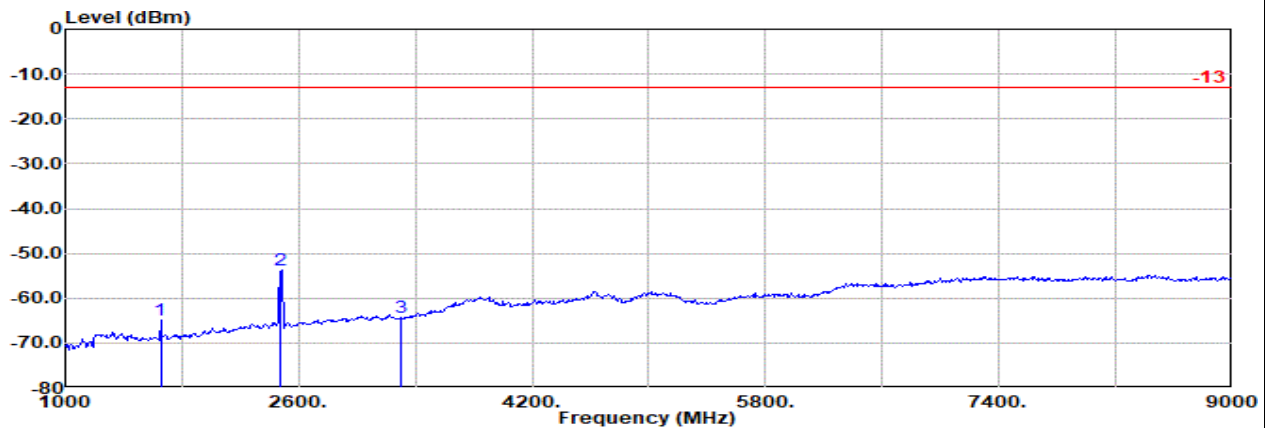


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: WCDMA B5 Ch4132

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1653.00	-64.82	RMS	24.67	-25.14	0.63	-95.23	0.00	-13.00	-51.82	Horizontal
2	2479.00	-53.61	RMS	26.59	-24.06	0.59	-95.23	38.50	-13.00	-40.61	Horizontal
3	3306.00	-64.44	RMS	28.02	-22.72	0.40	-95.23	25.09	-13.00	-51.44	Horizontal

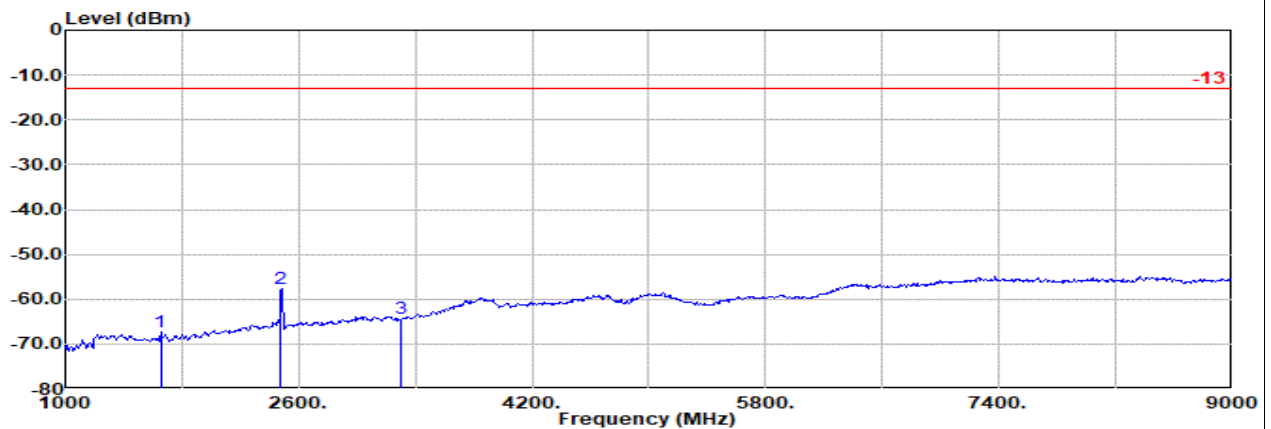


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical


: WCDMA B5 Ch4132

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1653.00	-67.21	RMS	24.67	-25.14	0.63	-95.23	27.86	-13.00	-54.21	Vertical
2	2479.00	-57.53	RMS	26.59	-24.06	0.59	-95.23	34.58	-13.00	-44.53	Vertical
3	3306.00	-64.36	RMS	28.02	-22.72	0.40	-95.23	25.17	-13.00	-51.36	Vertical

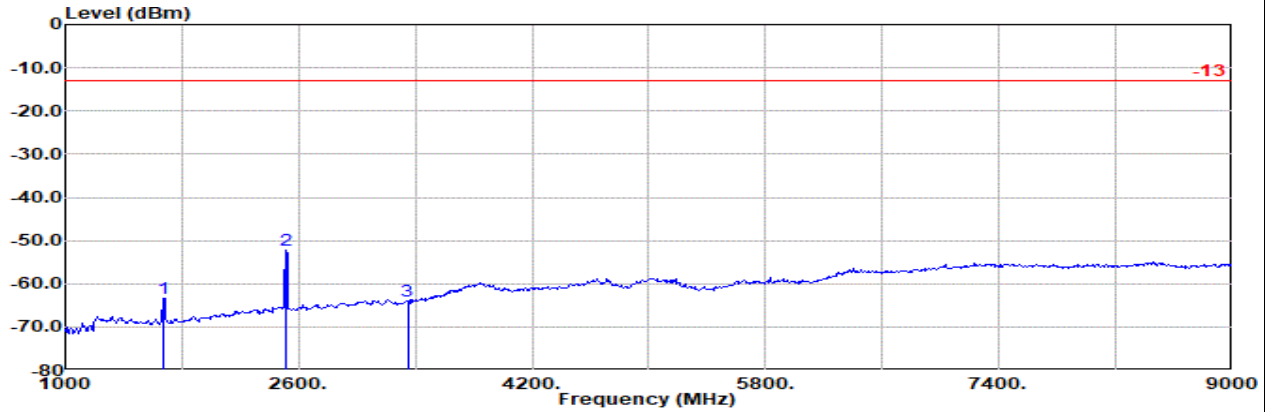Ant1
Part 22H Mode 1
WCDMA B5 Ch4182
M


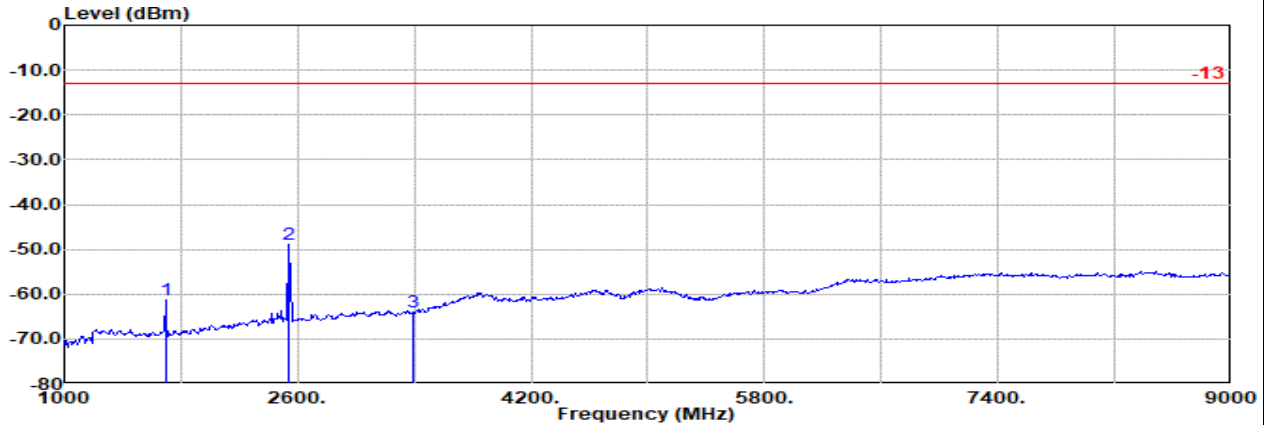
Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal
 : WCDMA B5 Ch4182
 Plane :

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dBuV	dBm	dB	
1	1673.00	-63.47	RMS	24.66	-25.12	0.62	-95.23	31.60	-13.00	-50.47	Horizontal
2	2509.00	-52.22	RMS	26.79	-24.02	0.58	-95.23	39.66	-13.00	-39.22	Horizontal
3	3346.00	-63.98	RMS	28.18	-22.68	0.39	-95.23	25.36	-13.00	-50.98	Horizontal

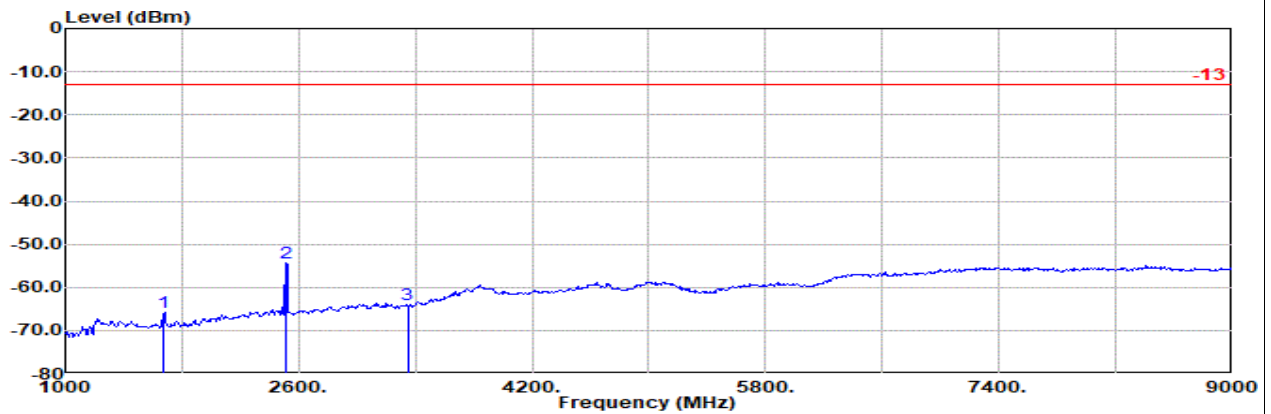


Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical
 : WCDMA B5 Ch4182
 Plane :

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dBuV	dBm	dB	
1	1673.00	-65.73	RMS	24.66	-25.12	0.62	-95.23	29.34	-13.00	-52.73	Vertical
2	2509.00	-54.43	RMS	26.79	-24.02	0.58	-95.23	37.45	-13.00	-41.43	Vertical
3	3346.00	-64.12	RMS	28.18	-22.68	0.39	-95.23	25.22	-13.00	-51.12	Vertical

Ant1
Part 22H Mode 1
WCDMA B5 Ch4233
H


Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal
: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-61.41	RMS	24.77	-25.09	0.61	-95.23	33.53	-13.00	-48.41	Horizontal
2	2540.00	-49.02	RMS	26.90	-23.96	0.56	-95.23	42.71	-13.00	-36.02	Horizontal
3	3386.00	-63.97	RMS	28.27	-22.63	0.37	-95.23	25.25	-13.00	-50.97	Horizontal

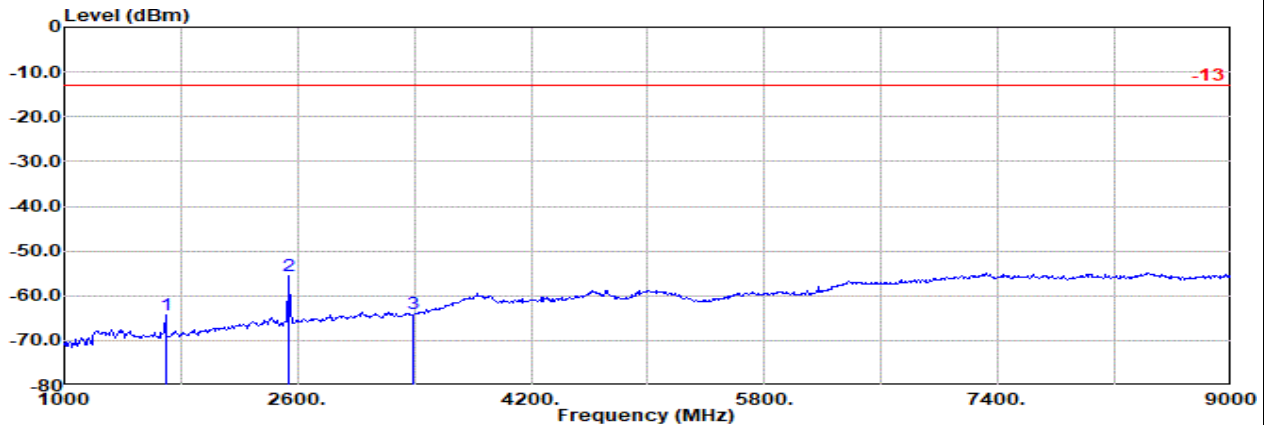

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical
: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-64.37	RMS	24.77	-25.09	0.61	-95.23	30.57	-13.00	-51.37	Vertical
2	2540.00	-55.59	RMS	26.90	-23.96	0.56	-95.23	36.14	-13.00	-42.59	Vertical
3	3386.00	-64.04	RMS	28.27	-22.63	0.37	-95.23	25.18	-13.00	-51.04	Vertical




Ant1

Part 24E Mode 1

WCDMA B2 Ch9262

L

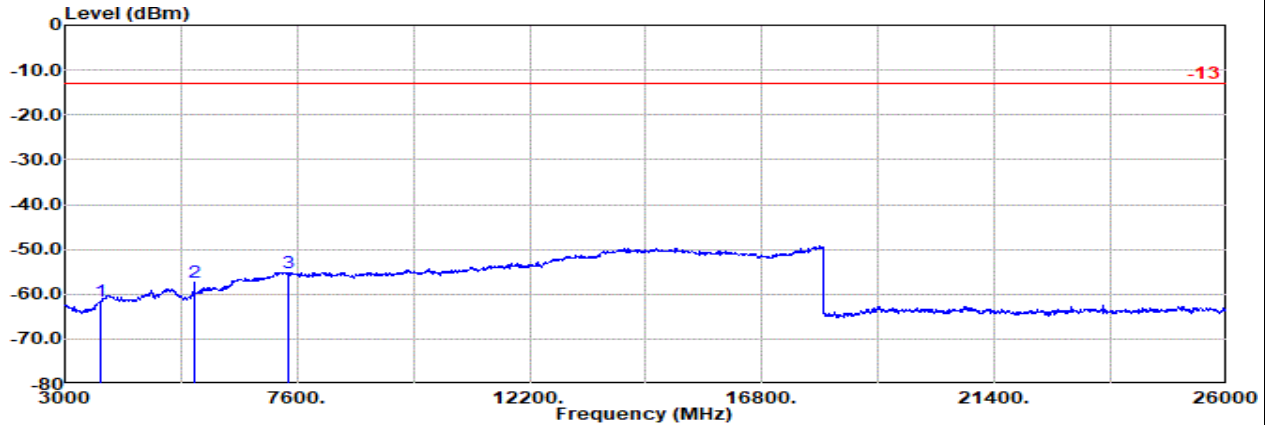


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1224_240624 Horizontal

: WCDMA B2 Ch9262

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3705.00	-61.59	RMS	29.64	-22.25	0.26	-95.23	25.99	-13.00	-48.59	Horizontal
2	5557.00	-57.50	RMS	32.81	-21.78	0.66	-95.23	26.04	-13.00	-44.50	Horizontal
3	7410.00	-55.28	RMS	36.80	-20.72	0.74	-95.23	23.13	-13.00	-42.28	Horizontal

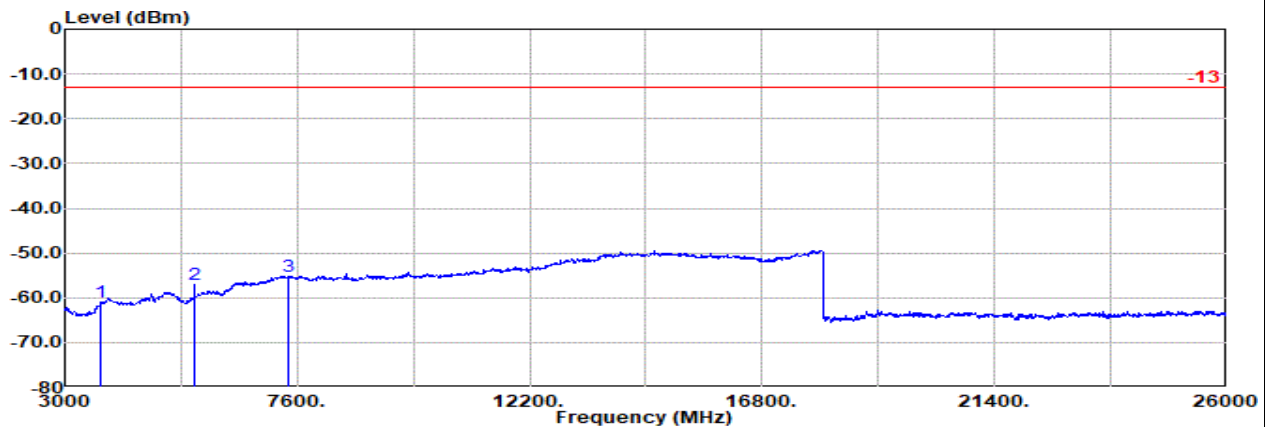

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1224_240624 Vertical

: WCDMA B2 Ch9262

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3705.00	-60.83	RMS	29.64	-22.25	0.26	-95.23	26.75	-13.00	-47.83	Vertical
2	5557.00	-57.02	RMS	32.81	-21.78	0.66	-95.23	26.52	-13.00	-44.02	Vertical
3	7410.00	-55.33	RMS	36.80	-20.72	0.74	-95.23	23.08	-13.00	-42.33	Vertical




Ant1

Part 24E Mode 1

WCDMA B2 Ch9400

M

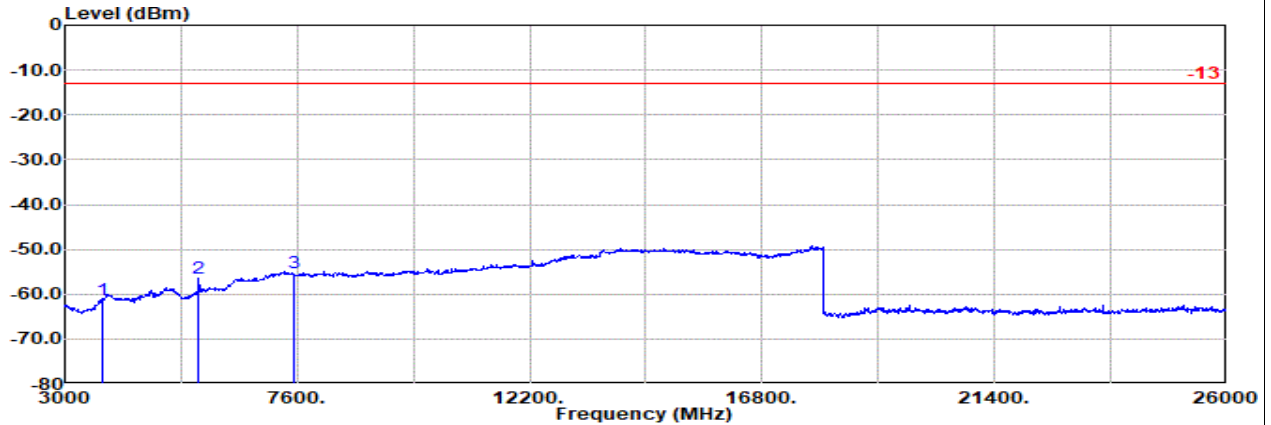


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1224_240624 Horizontal

: WCDMA 1900 Ch9400

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-61.16	RMS	30.02	-22.18	0.28	-95.23	25.95	-13.00	-48.16	Horizontal
2	5640.00	-56.38	RMS	33.14	-21.73	0.67	-95.23	26.77	-13.00	-43.38	Horizontal
3	7520.00	-55.32	RMS	36.66	-20.69	0.70	-95.23	23.24	-13.00	-42.32	Horizontal

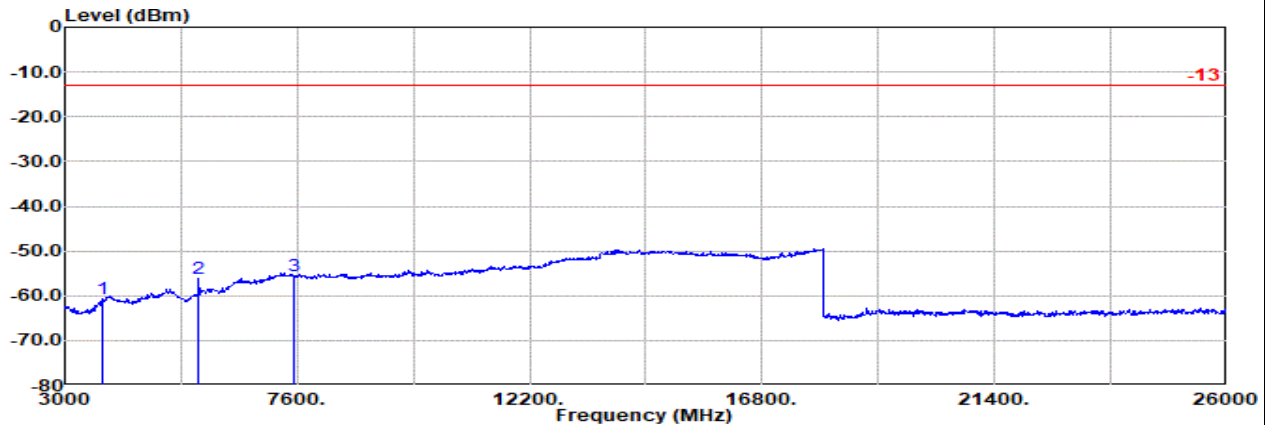

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1224_240624 Vertical

: WCDMA 1900 Ch9400

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-60.77	RMS	30.02	-22.18	0.28	-95.23	26.34	-13.00	-47.77	Vertical
2	5640.00	-56.10	RMS	33.14	-21.73	0.67	-95.23	27.05	-13.00	-43.10	Vertical
3	7520.00	-55.58	RMS	36.66	-20.69	0.70	-95.23	22.98	-13.00	-42.58	Vertical




Ant1


Part 24E Mode 1

WCDMA B2 Ch9538

H

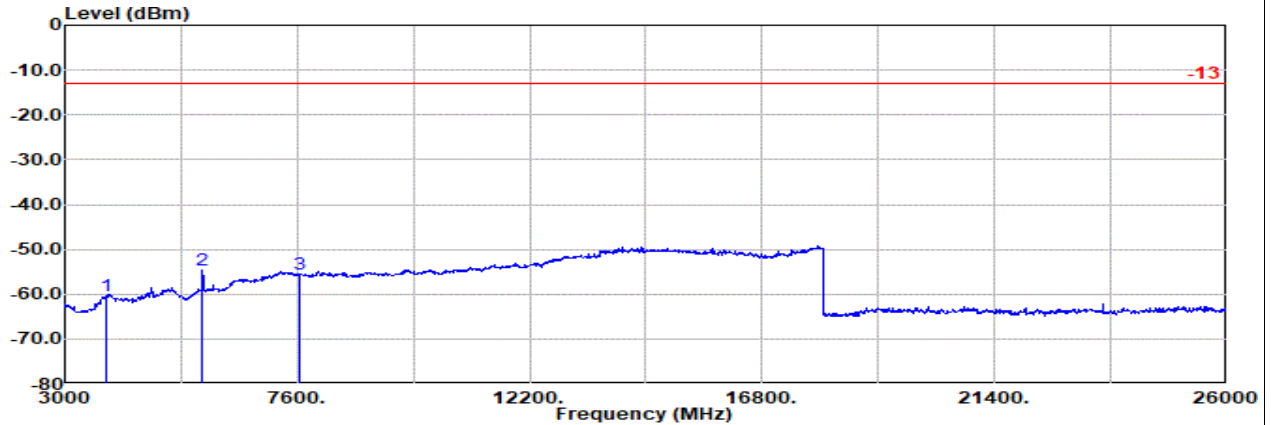

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-60.52	RMS	30.28	-22.12	0.33	-95.23	26.22	-13.00	-47.52	Horizontal
2	5723.00	-54.53	RMS	33.59	-21.67	0.64	-95.23	28.14	-13.00	-41.53	Horizontal
3	7630.00	-55.48	RMS	36.60	-20.72	0.64	-95.23	23.23	-13.00	-42.48	Horizontal

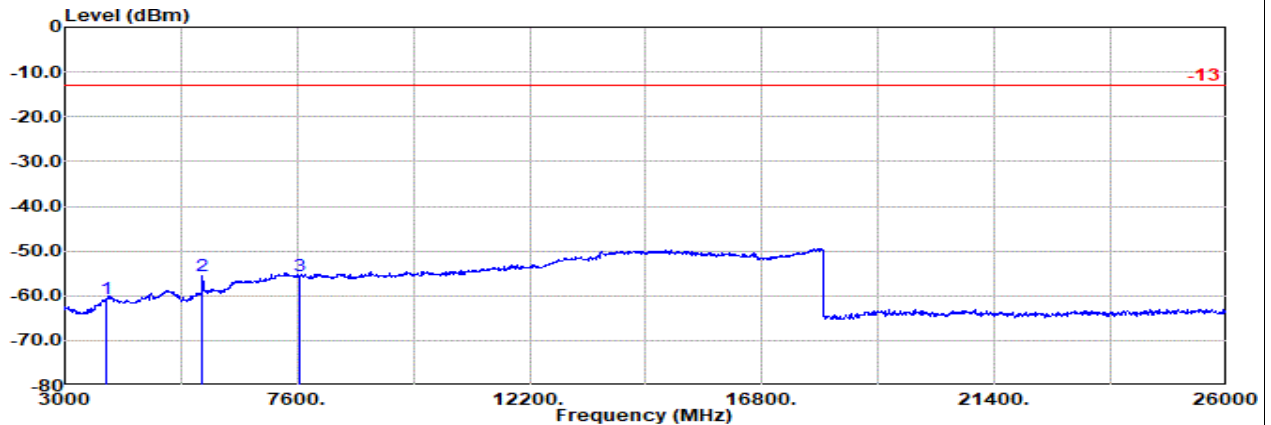

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-60.60	RMS	30.28	-22.12	0.33	-95.23	26.14	-13.00	-47.60	Vertical
2	5723.00	-55.70	RMS	33.59	-21.67	0.64	-95.23	26.97	-13.00	-42.70	Vertical
3	7630.00	-55.60	RMS	36.60	-20.72	0.64	-95.23	23.11	-13.00	-42.60	Vertical




Ant1

Part 27L Mode 1

WCDMA B4 Ch1312

L

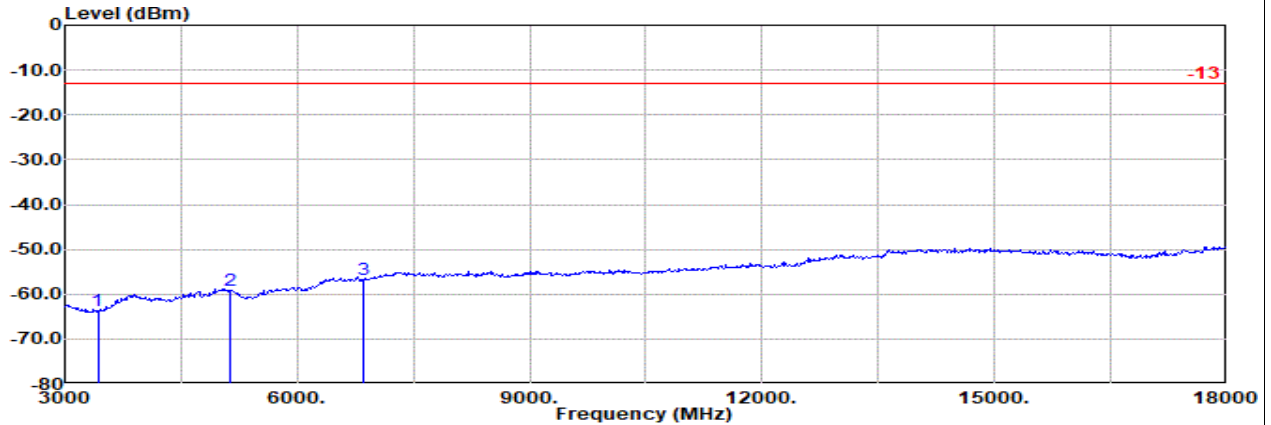


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: WCDMA B4 Ch1312

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3425.00	-63.83	RMS	28.40	-22.60	0.63	-95.23	24.97	-13.00	-50.83	Horizontal
2	5137.00	-59.03	RMS	32.67	-21.47	0.39	-95.23	24.61	-13.00	-46.03	Horizontal
3	6850.00	-56.65	RMS	36.30	-20.94	0.33	-95.23	22.89	-13.00	-43.65	Horizontal

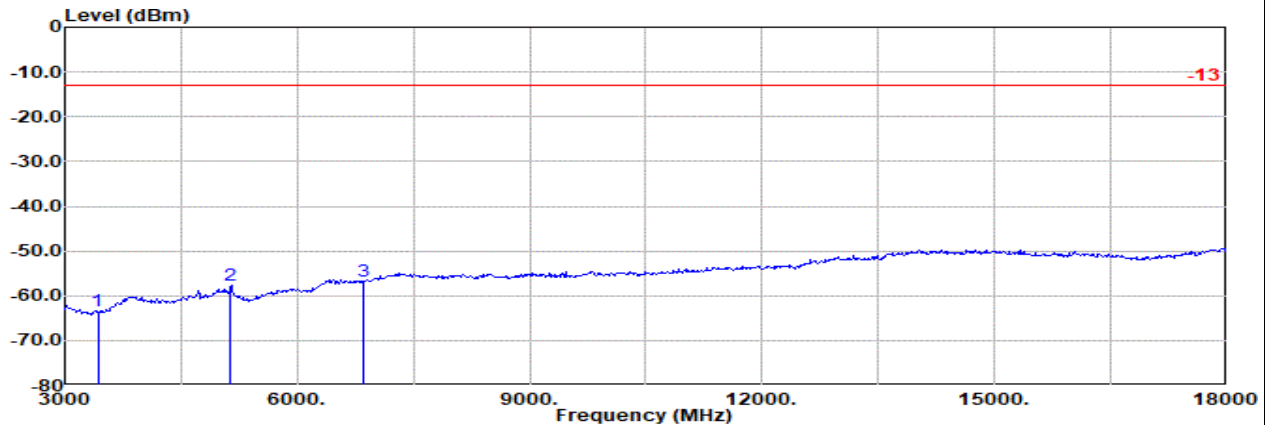


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical


: WCDMA B4 Ch1312

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3425.00	-63.43	RMS	28.40	-22.60	0.63	-95.23	25.37	-13.00	-50.43	Vertical
2	5137.00	-57.68	RMS	32.67	-21.47	0.39	-95.23	25.96	-13.00	-44.68	Vertical
3	6850.00	-56.65	RMS	36.30	-20.94	0.33	-95.23	22.89	-13.00	-43.65	Vertical

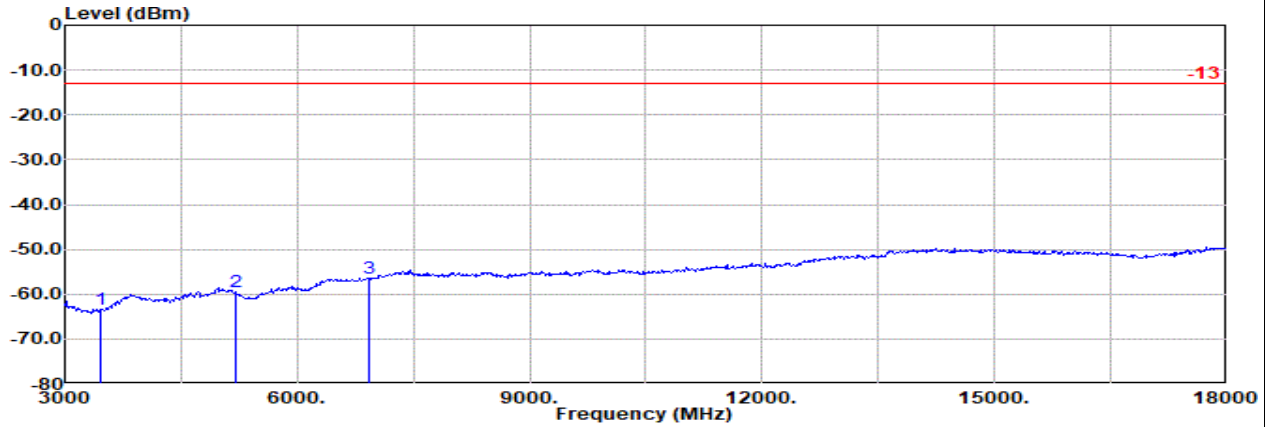Ant1
Part 27L Mode 1
WCDMA B4 Ch1413
M


Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal
: WCDMA B4 Ch1413

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dBuV	dBm	dB	
1	3465.00	-63.27	RMS	28.59	-22.57	0.53	-95.23	25.41	-13.00	-50.27	Horizontal
2	5198.00	-59.61	RMS	32.60	-21.53	0.39	-95.23	24.16	-13.00	-46.61	Horizontal
3	6930.00	-56.52	RMS	36.30	-20.93	0.35	-95.23	22.99	-13.00	-43.52	Horizontal

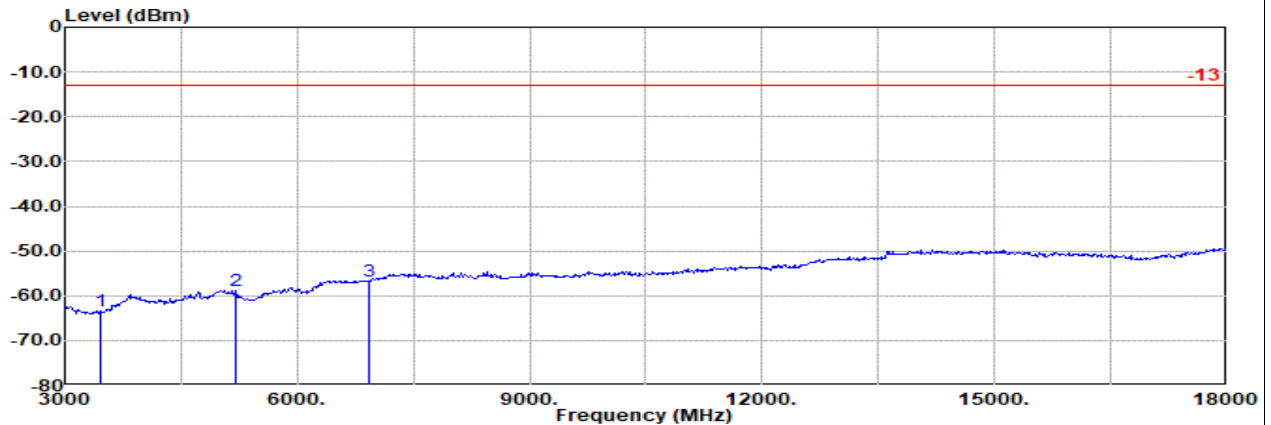

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical
: WCDMA B4 Ch1413

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dBuV	dBm	dB	
1	3465.00	-63.44	RMS	28.59	-22.57	0.53	-95.23	25.24	-13.00	-50.44	Vertical
2	5198.00	-59.00	RMS	32.60	-21.53	0.39	-95.23	24.77	-13.00	-46.00	Vertical
3	6930.00	-56.83	RMS	36.30	-20.93	0.35	-95.23	22.68	-13.00	-43.83	Vertical




Ant1

Part 27L Mode 1

WCDMA B4 Ch1513

H

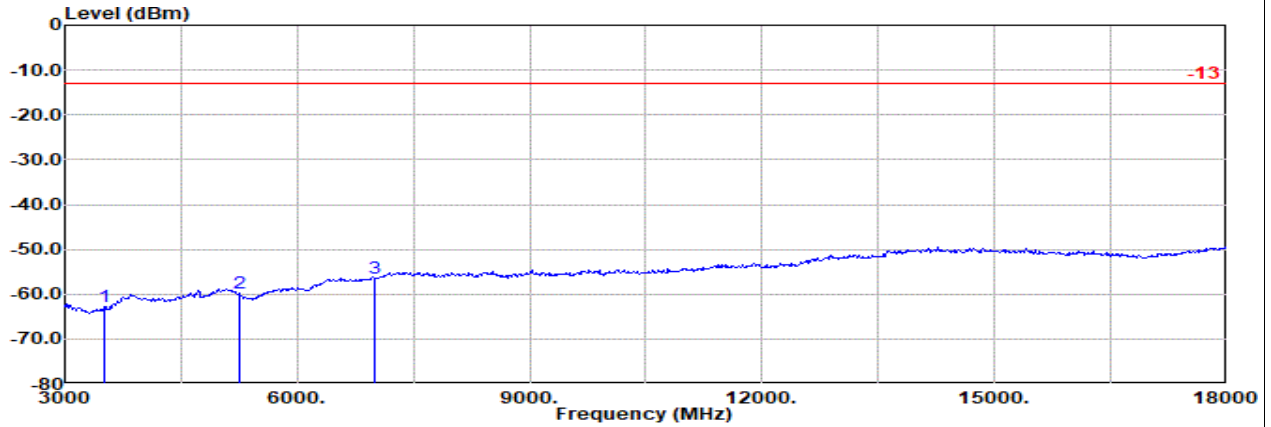


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: WCDMA B4 Ch1513

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-62.78	RMS	28.84	-22.54	0.44	-95.23	25.71	-13.00	-49.78	Horizontal
2	5258.00	-59.79	RMS	32.38	-21.59	0.44	-95.23	24.21	-13.00	-46.79	Horizontal
3	7010.00	-56.30	RMS	36.30	-20.92	0.37	-95.23	23.18	-13.00	-43.30	Horizontal

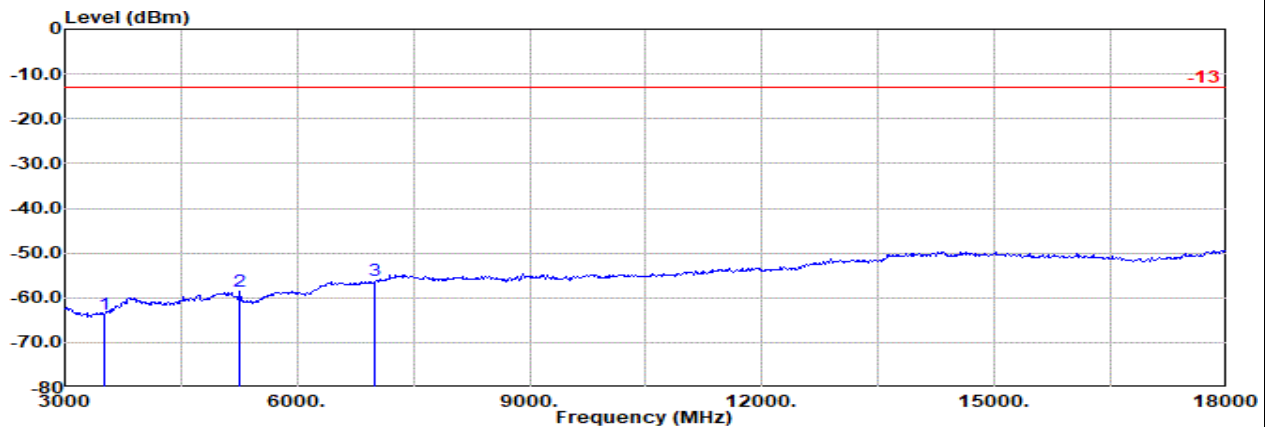

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical

: WCDMA B4 Ch1513

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-63.64	RMS	28.84	-22.54	0.44	-95.23	24.85	-13.00	-50.64	Vertical
2	5258.00	-58.51	RMS	32.38	-21.59	0.44	-95.23	25.49	-13.00	-45.51	Vertical
3	7010.00	-56.19	RMS	36.30	-20.92	0.37	-95.23	23.29	-13.00	-43.19	Vertical




Ant1

Part 22H Mode 1


WCDMA B5 Ch4233

L

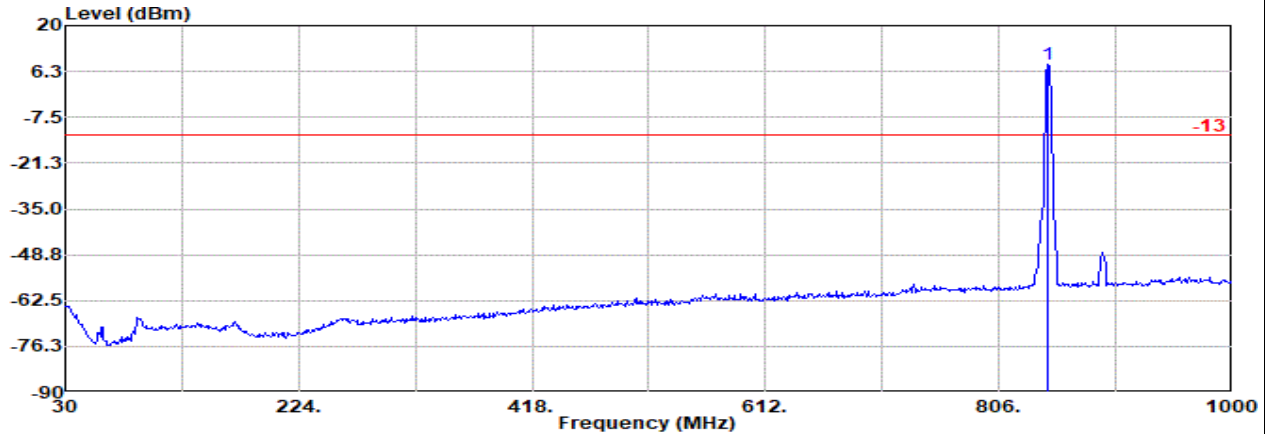

Site : 03CH21-HY
Condition: -13 3m CBL 6111D & 00800N1D01N-06_41912&05 Horizontal
: WCDMA B5 Ch4233
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
1	847.00	8.54	RMS	28.28	0.00	0.00	-95.23	75.49	-13.00	21.54	Horizontal

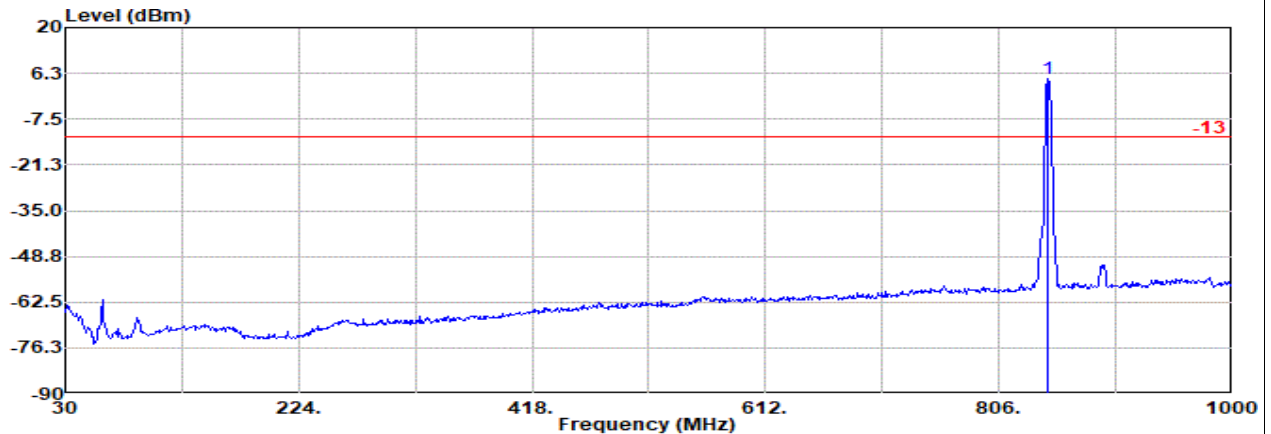

Site : 03CH21-HY
Condition: -13 3m CBL 6111D & 00800N1D01N-06_41912&05 Vertical
: WCDMA B5 Ch4233
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
1	847.00	4.47	RMS	28.28	0.00	0.00	-95.23	71.42	-13.00	17.47	Vertical

Remark: #1 is fundamental signal which can be ignored.




<Sample 2>

Ant1

Part 22H Mode 1

WCDMA B5 Ch4233

H

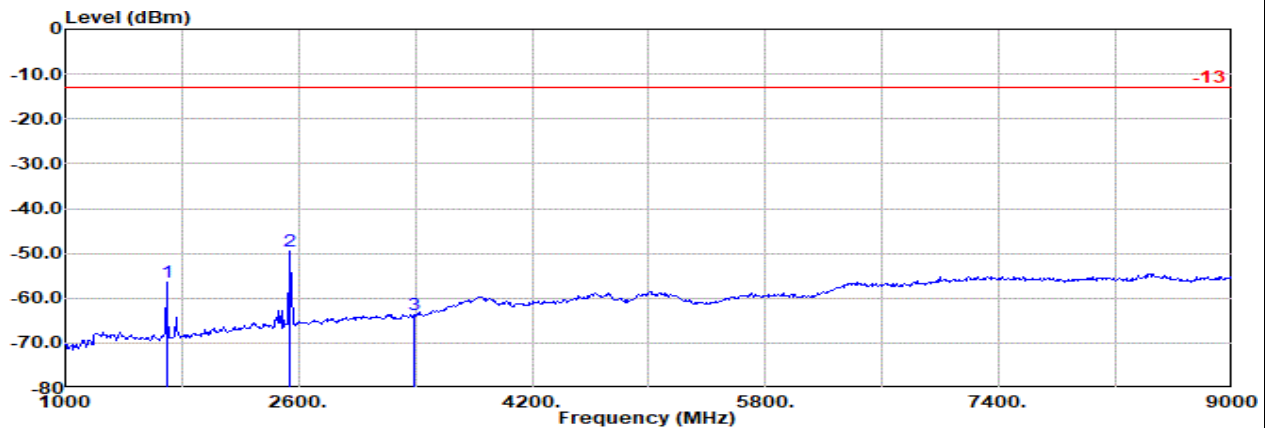


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-56.58	RMS	24.77	-25.09	0.61	-95.23	38.36	-13.00	-43.58	Horizontal	
2	2540.00	-49.51	RMS	26.90	-23.96	0.56	-95.23	42.22	-13.00	-36.51	Horizontal	
3	3386.00	-63.76	RMS	28.27	-22.63	0.37	-95.23	25.46	-13.00	-50.76	Horizontal	

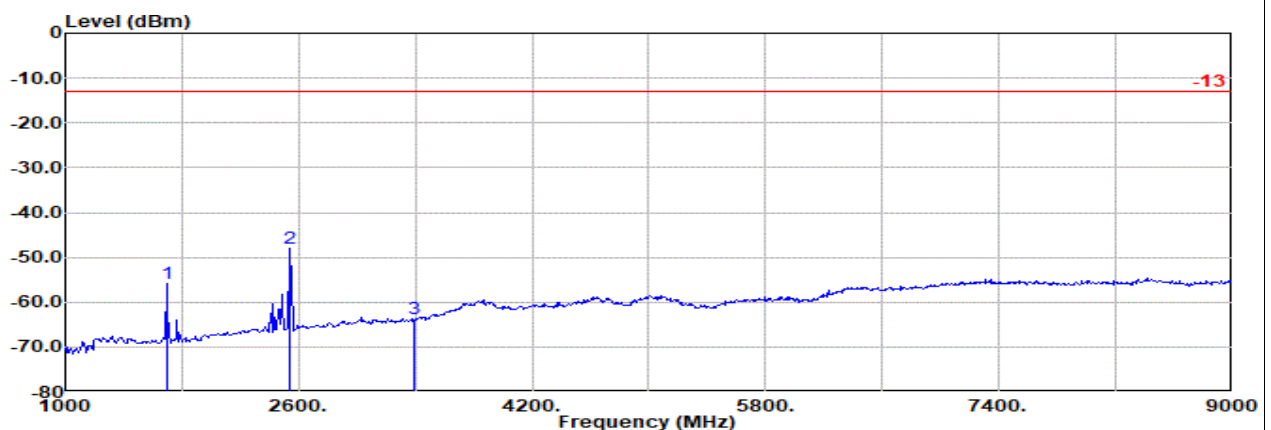

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical

: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-55.73	RMS	24.77	-25.09	0.61	-95.23	39.21	-13.00	-42.73	Vertical	
2	2540.00	-48.10	RMS	26.90	-23.96	0.56	-95.23	43.63	-13.00	-35.10	Vertical	
3	3386.00	-63.72	RMS	28.27	-22.63	0.37	-95.23	25.50	-13.00	-50.72	Vertical	




Ant1

Part 22H Mode 1


WCDMA B5 Ch4233

H

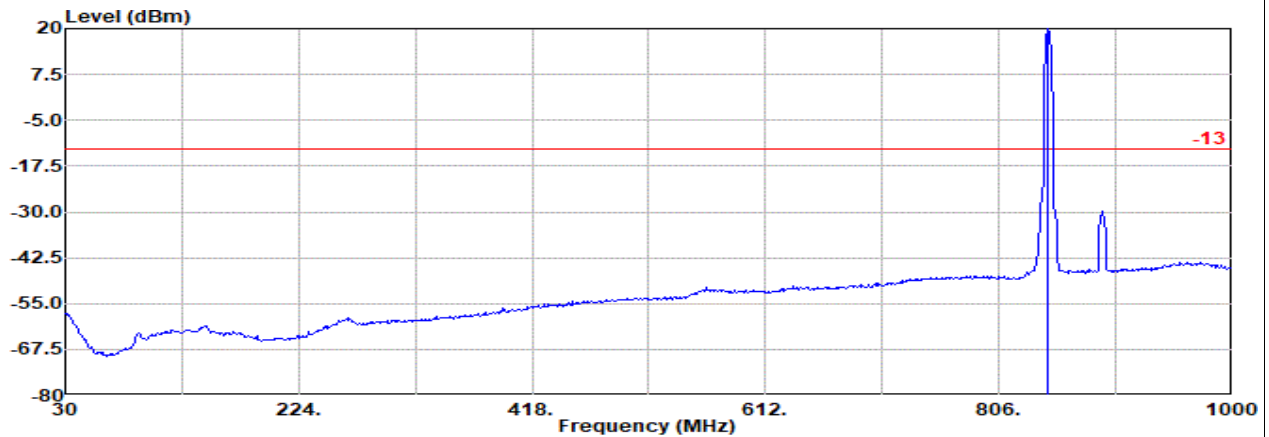

Site : 03CH21-HY
Condition: -13 3m LF_55606&08_241127 Horizontal
: WCDMA B5 Ch4233
: #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	846.60	20.35	RMS	28.99	5.13	0.00	-95.23	81.47	-13.00	33.35	Horizontal

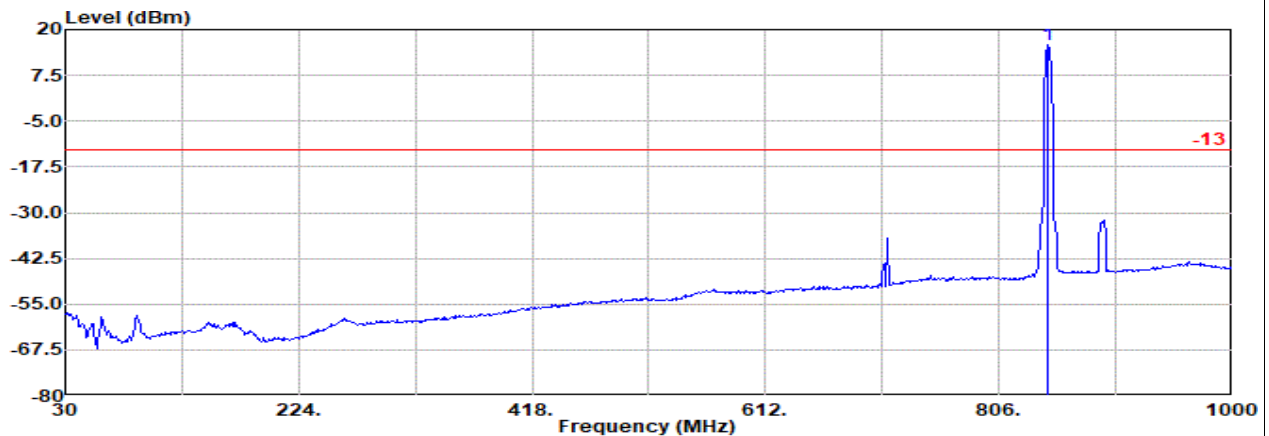

Site : 03CH21-HY
Condition: -13 3m LF_55606&08_241127 Vertical
: WCDMA B5 Ch4233
: #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	846.60	15.70	RMS	28.99	5.13	0.00	-95.23	76.82	-13.00	28.70	Vertical

Remark: #1 is fundamental signal which can be ignored.




<Sample 3>

Ant1

Part 22H Mode 1

WCDMA B5 Ch4233

H

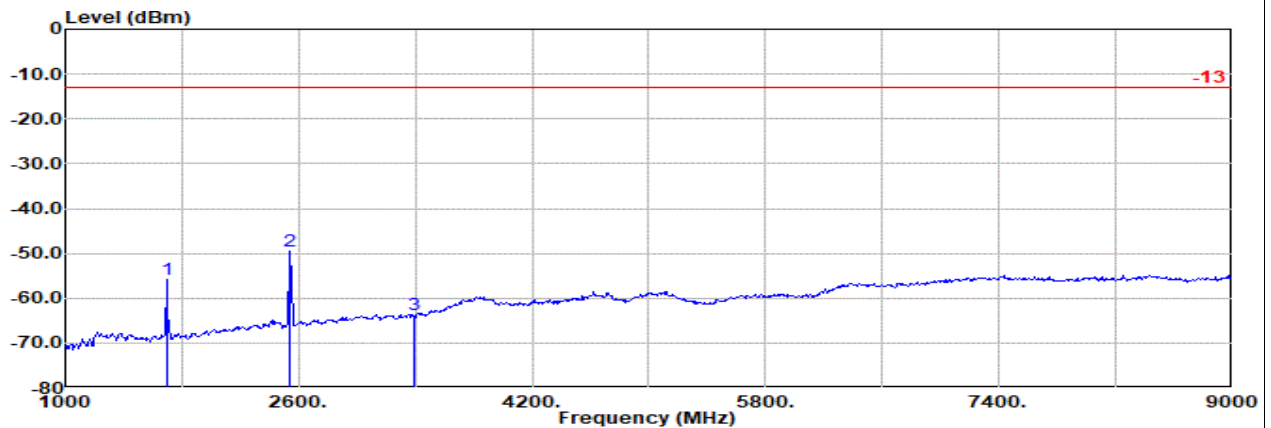


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-55.97	RMS	24.77	-25.09	0.61	-95.23	38.97	-13.00	-42.97	Horizontal
2	2540.00	-49.62	RMS	26.90	-23.96	0.56	-95.23	42.11	-13.00	-36.62	Horizontal
3	3386.00	-63.69	RMS	28.27	-22.63	0.37	-95.23	25.53	-13.00	-50.69	Horizontal

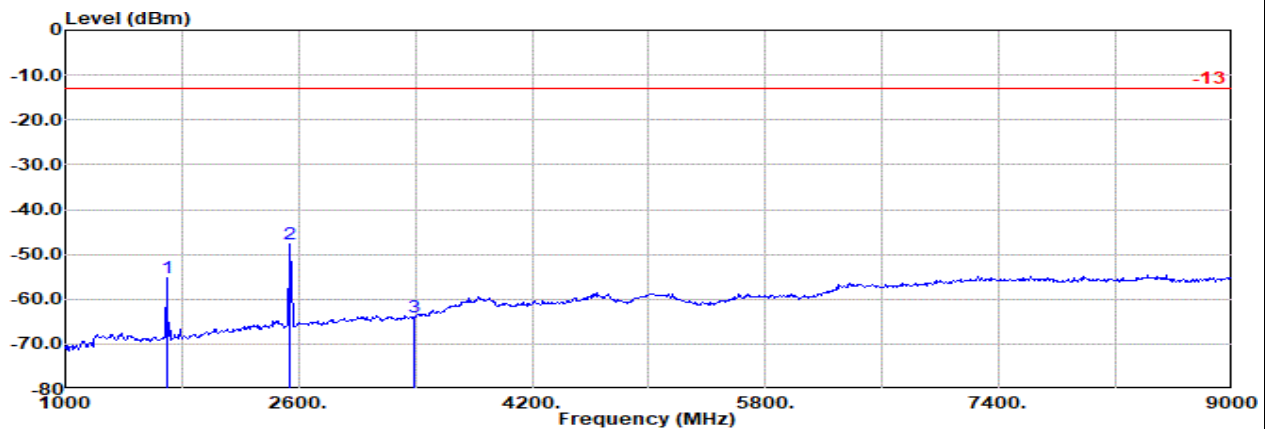

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_240711 Vertical

: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-55.31	RMS	24.77	-25.09	0.61	-95.23	39.63	-13.00	-42.31	Vertical
2	2540.00	-47.70	RMS	26.90	-23.96	0.56	-95.23	44.03	-13.00	-34.70	Vertical
3	3386.00	-64.00	RMS	28.27	-22.63	0.37	-95.23	25.22	-13.00	-51.00	Vertical




Ant1

Part 22H Mode 1

WCDMA B5 Ch4233

H

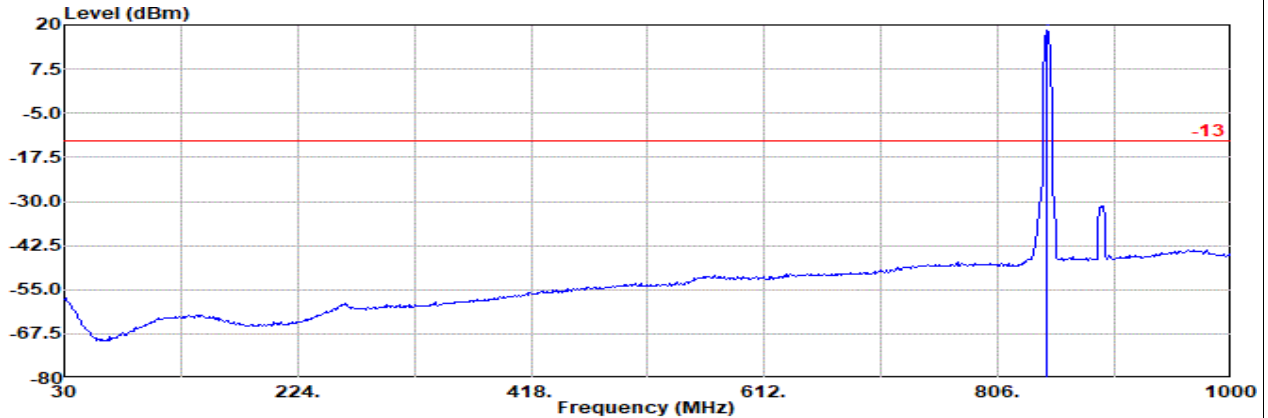

Site : 03CH21-HY


Condition: -13 3m LF_55606&08_241127 Horizontal

: WCDMA B5 Ch4233

: #1 is fundamental signal which can be ignored.

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	846.60	18.55	RMS	28.99	5.13	0.00	-95.23	79.67	-13.00	31.55	Horizontal

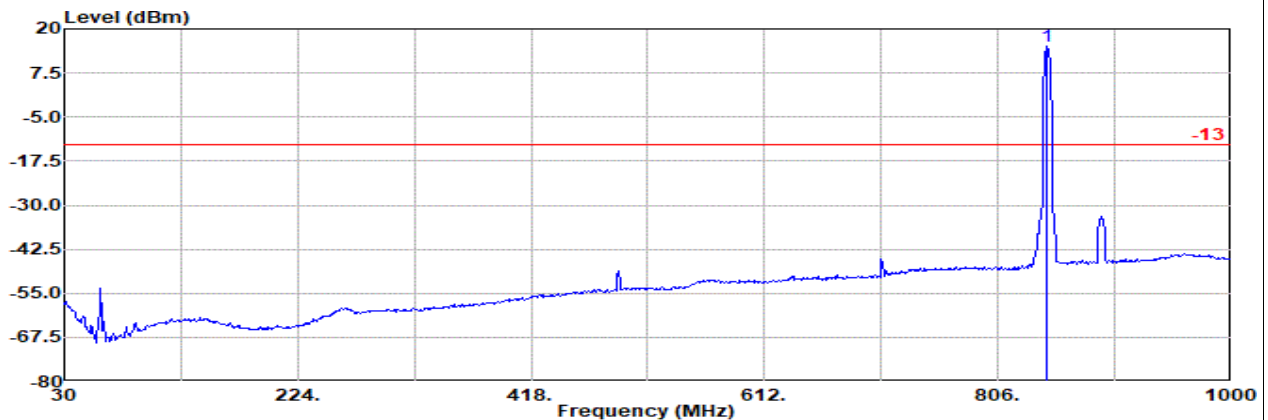

Site : 03CH21-HY

Condition: -13 3m LF_55606&08_241127 Vertical

: WCDMA B5 Ch4233

: #1 is fundamental signal which can be ignored.

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	846.60	15.01	RMS	28.99	5.13	0.00	-95.23	76.13	-13.00	28.01	Vertical

Remark: #1 is fundamental signal which can be ignored.