

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/5

#53_FR1 n71 Ant 1_20M_BPSK_1_1_Back_5mm_Ch136100

Communication System: UID 10931 - AAB, 5G NR; Frequency: 680.5 MHz

Medium: HSL_750_241105 Medium parameters used : $f = 680.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.32$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 680.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.46 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.280 W/kg

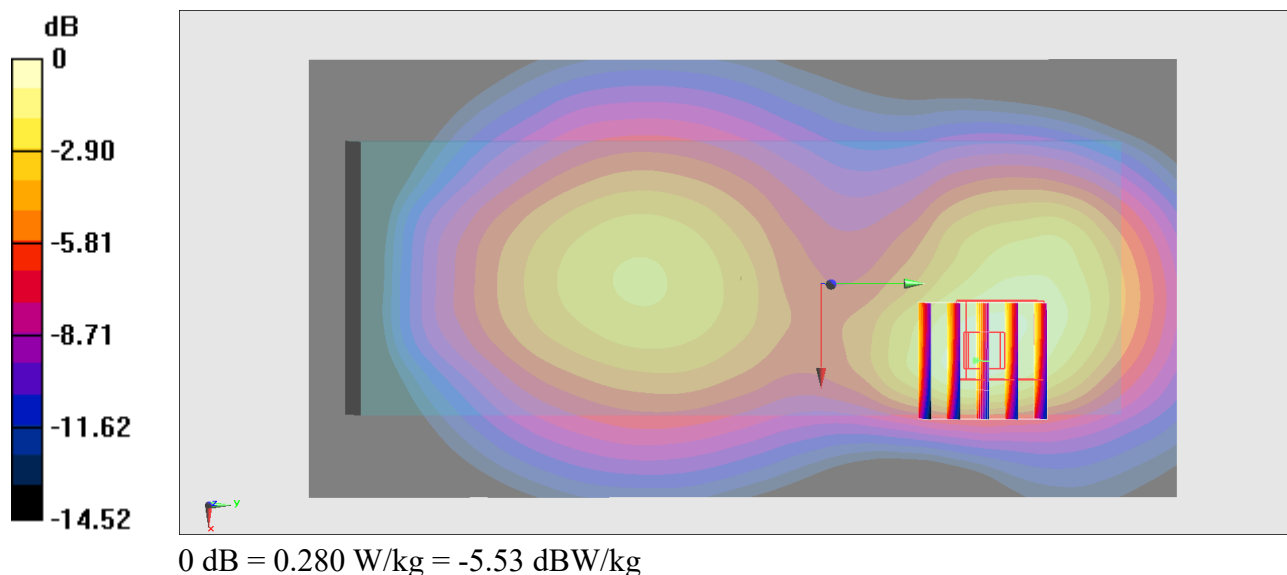

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/4

#54_FR1 n41 Ant 5_100M_BPSK_1_1_Back_5mm_Ch518598

Communication System: UID 10866 - AAD, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_2600_241104 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 39.576$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.29, 7.2, 7.7) @ 2592.99 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.60 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.472 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 1.20 W/kg

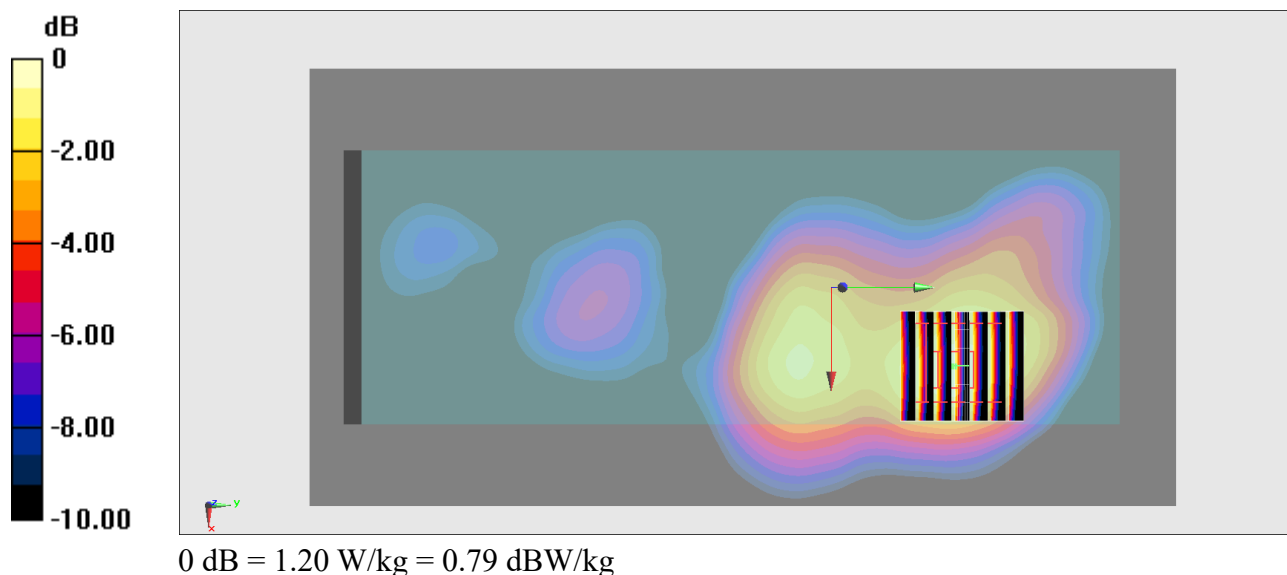

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/7

#55_FR1 n48 Ant 8_40M_BPSK_1_1_Right Side_0mm_Ch641666

Communication System: UID 10903 - AAB, 5G NR ; Frequency: 3624.99 MHz

Medium: HSL_3700_241107 Medium parameters used : $f = 3625$ MHz; $\sigma = 3.135$ S/m; $\epsilon_r = 38.41$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.3, 6.22, 6.66) @ 3624.99 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 17.71 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 77%

Maximum value of SAR (measured) = 1.34 W/kg

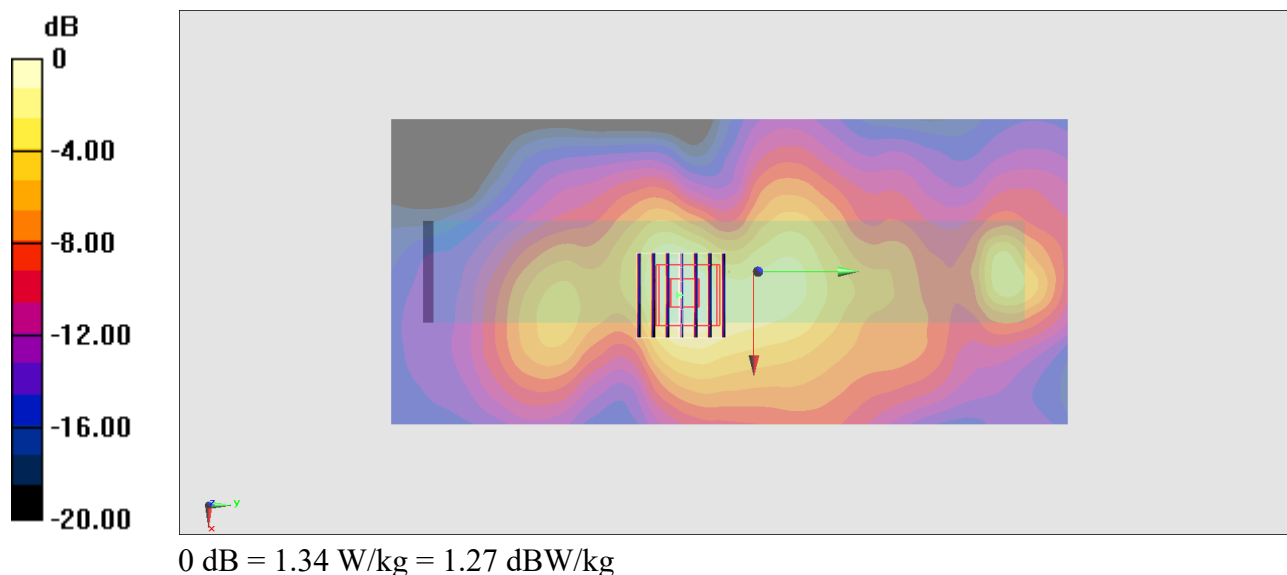

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/7

#56_FR1 n77 Ant 8_100M_BPSK_1_1_Right Side_0mm_Ch656000

Communication System: UID 10973 - AAA, 5G NR; Frequency: 3840 MHz

Medium: HSL_3900_241107 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 38.126$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.12, 6.05, 6.47) @ 3840 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.53 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 14.99 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 1.53 W/kg

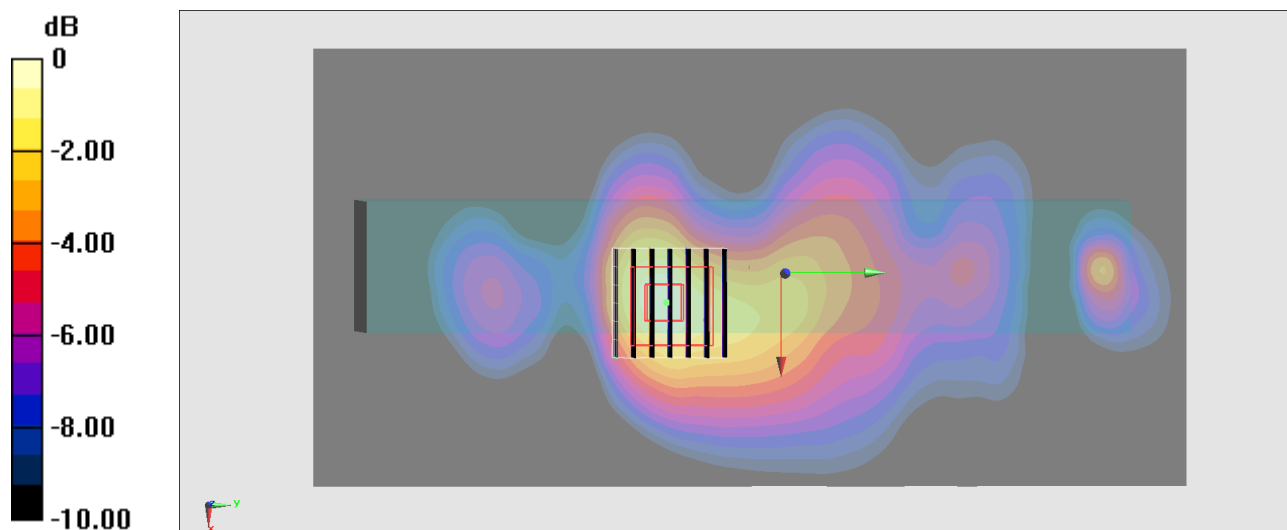

0 dB = 1.53 W/kg = 1.85 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/29

#57_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch1

Communication System: UID 10415 - AAA, IEEE 802.11b ; Frequency: 2412 MHz

Medium: HSL_2450_241129 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 39.625$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.51, 6.73, 8.77) @ 2412 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.777 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.339 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 0.759 W/kg

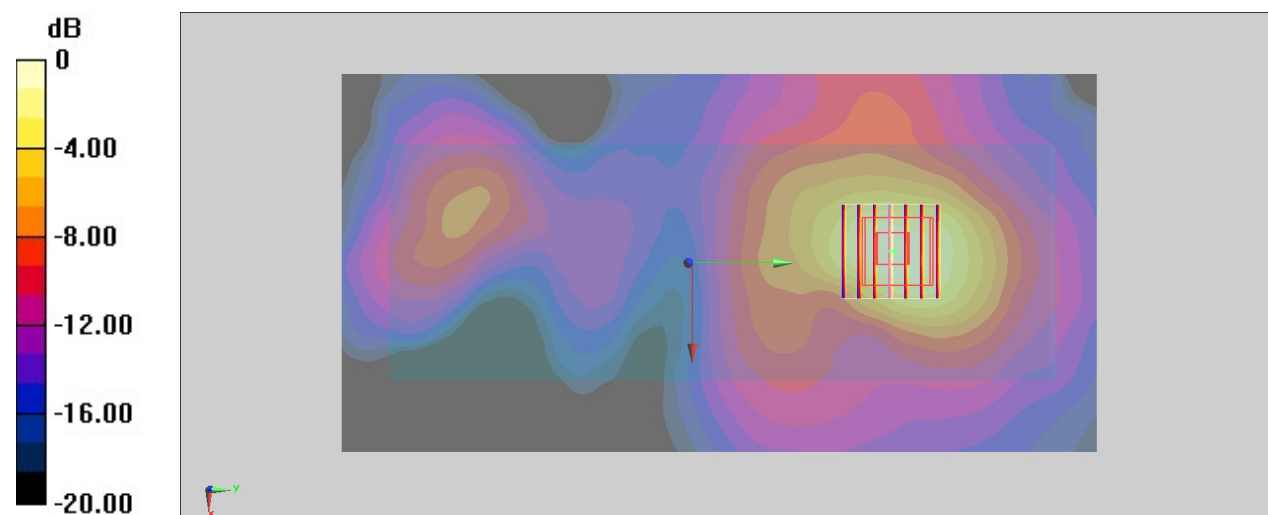

0 dB = 0.759 W/kg = -1.20 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/30

#58_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch58

Communication System: UID 10544 - AAD, IEEE 802.11ac; Frequency: 5290 MHz

Medium: HSL_5G_241130 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.724$ S/m; $\epsilon_r = 36.292$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.46, 4.11, 5.36) @ 5290 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 8.125 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 1.52 W/kg

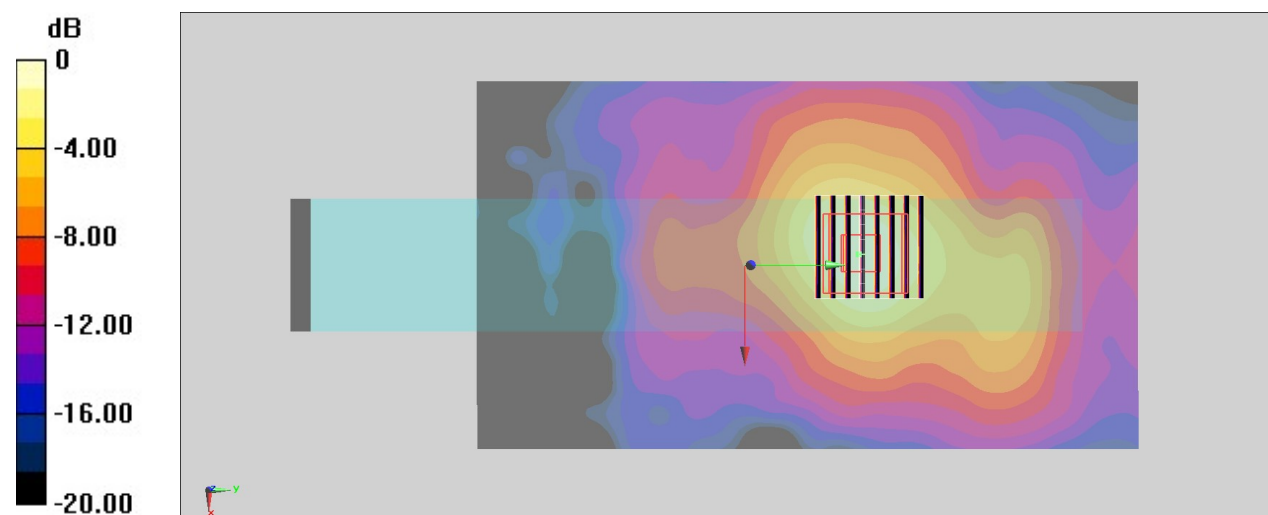

0 dB = 1.52 W/kg = 1.82 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/30

#59_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch122

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5610 MHz

Medium: HSL_5G_241130 Medium parameters used : $f = 5610$ MHz; $\sigma = 5.043$ S/m; $\epsilon_r = 35.852$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(3.96, 3.67, 4.73) @ 5610 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.469 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 1.43 W/kg

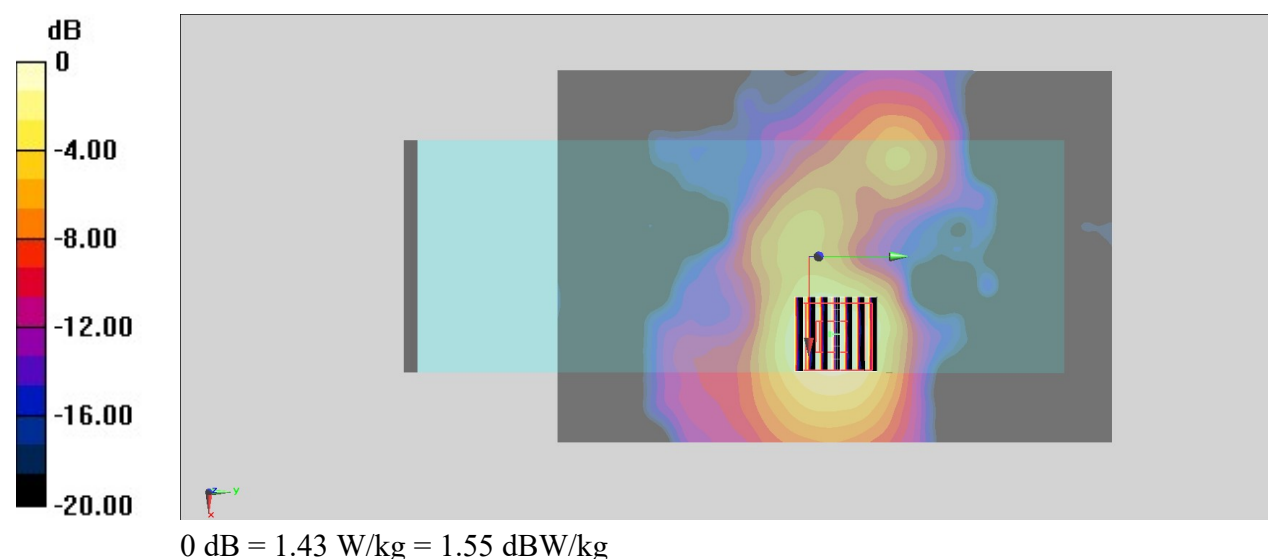

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/1

#60_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_5G_241201 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.196$ S/m; $\epsilon_r = 35.531$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5775 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.75 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.147 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 1.42 W/kg

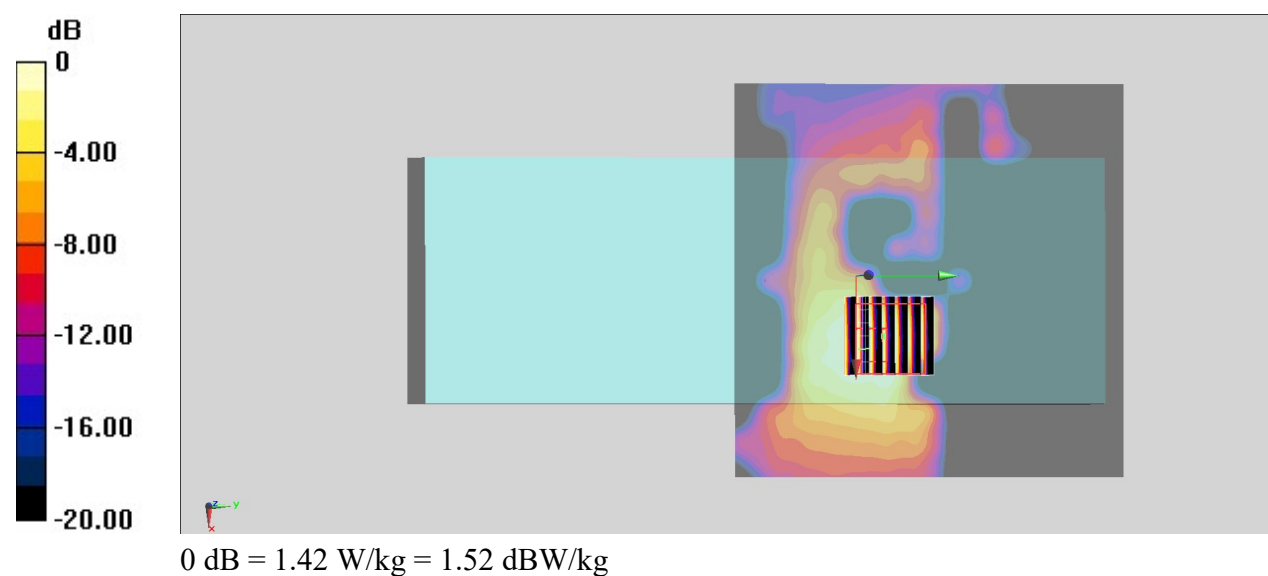

Date: 2024-12-08

#61_WLAN6GHz_802.11ax-HE160 MCS0_Right Side_0mm_Ch47

Communication System: 802.11ax; Frequency: 6185.000 MHz

Medium: HSL_6G_241208 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.25, 4.81, 6.16); Calibrated: 2024-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2024-03-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 170.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.052 W/kg;


Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.146 W/kg; SAR (8g) = 0.064 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.6 %

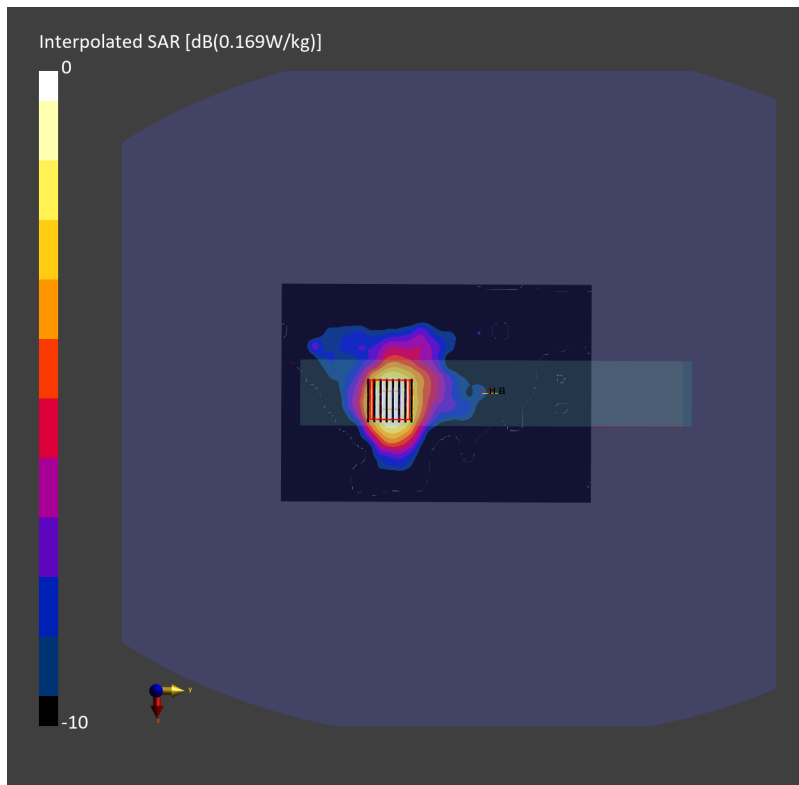psAPD (1.0cm², sq) = 1.46 [W/m²]; psAPD (4.0cm², sq) = 1.29 [W/m²]

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/6

#62_Bluetooth_1Mbps_Back_0mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_2450_241206 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 39.552$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.51, 6.73, 8.77) @ 2402 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x241x1): Interpolated grid: dx=1.200 mm, dy=1.200 mmReference Value = 0 V/m; Power Drift = **not measured****Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg**

Maximum value of SAR (interpolated) = 0 W/kg

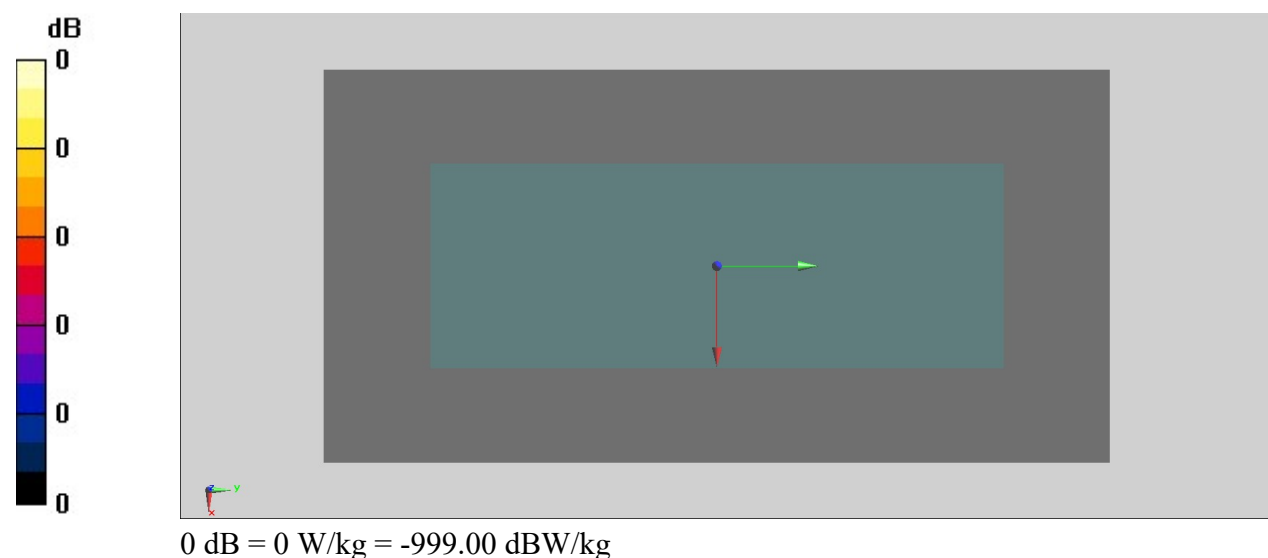

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#63_WCDMA II Ant 1_RMC 12.2Kbps_Back_0mm_Ch9538

Communication System: UID 10011 - CAB,WCDMA; Frequency: 1907.6 MHz

Medium: HSL_1900_241209 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 38.834$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.41, 7.32, 7.83) @ 1907.6 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.938 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 4.36 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 3.56 W/kg

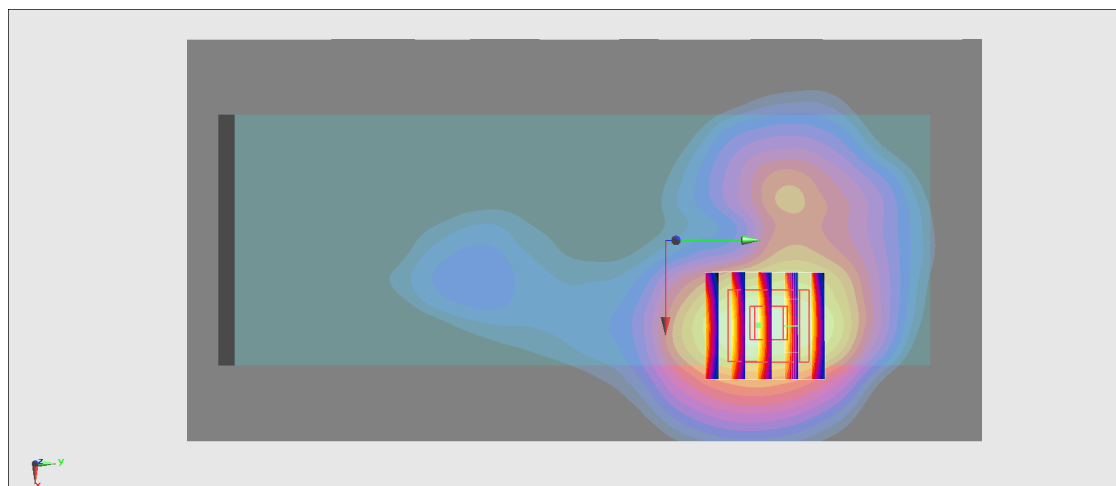

0 dB = 3.56 W/kg = 5.51 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#64_WCDMA IV Ant 1_RMC 12.2Kbps_Back_0mm_Ch1513

Communication System: UID 10011 - CAB,WCDMA; Frequency: 1752.6 MHz

Medium: HSL_1750_241209 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 40.403$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.64, 7.55, 8.07) @ 1752.6 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.85 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.397 V/m; Power Drift = 0.15 dB



Peak SAR (extrapolated) = 5.18 W/kg

SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.54 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 4.22 W/kg

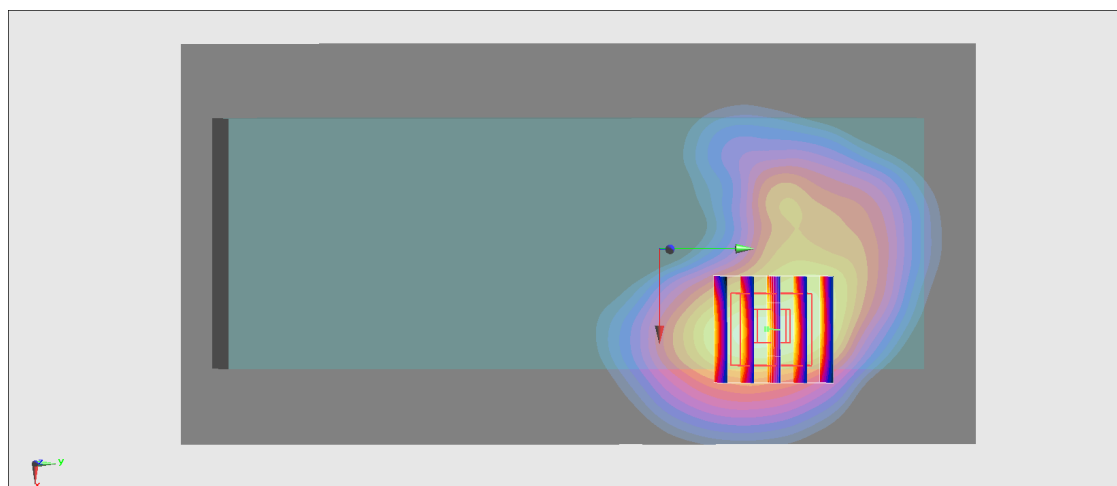

0 dB = 4.22 W/kg = 6.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#65_WCDMA V_Ant 1_RMC 12.2Kbps_Back_0mm_Ch4182

Communication System: UID 10011 - CAB,WCDMA; Frequency: 836.4 MHz

Medium: HSL_850_241208 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.064$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(8.96, 8.85, 9.47) @ 836.4 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.34 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.680 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 2.05 W/kg

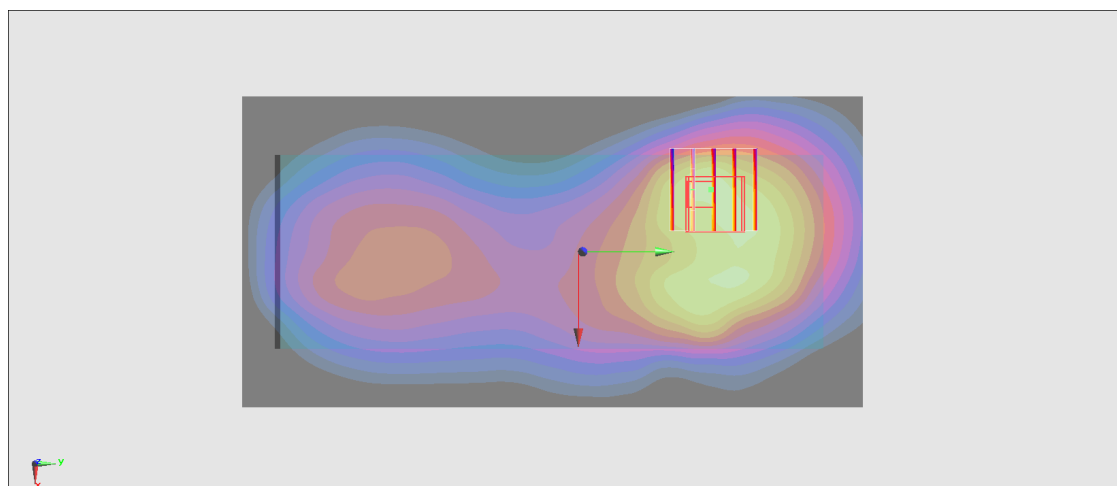

0 dB = 2.05 W/kg = 3.12 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/10

#66_LTE Band 7 Ant 5_20M_QPSK_1_0_Back_0mm_Ch21100

Communication System: UID 10169 - CAE, LTE-FDD; Frequency: 2535 MHz

Medium: HSL_2600_241210 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.912$ S/m; $\epsilon_r = 39.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.29, 7.2, 7.7) @ 2535 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.81 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.435 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 1.36 W/kg

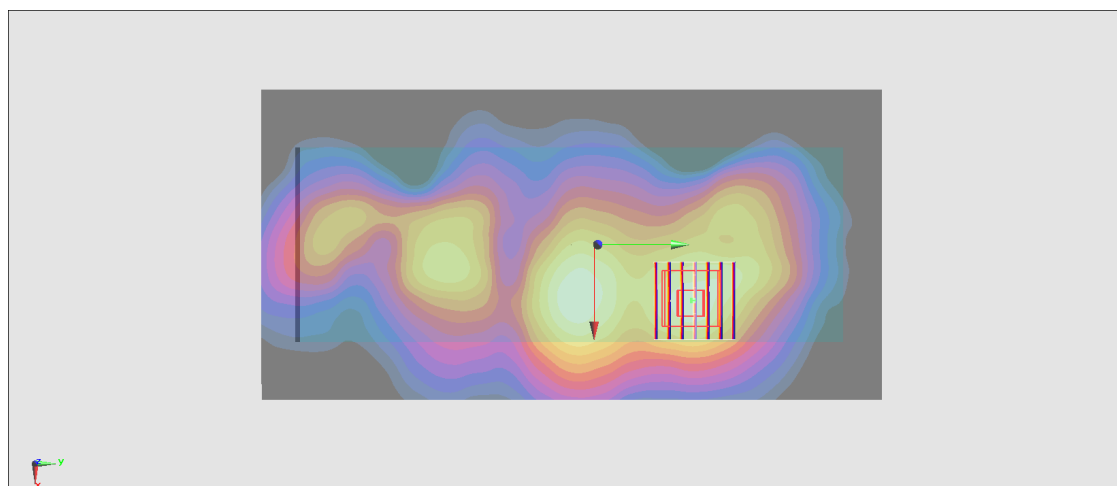

0 dB = 1.36 W/kg = 1.34 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#67_LTE Band 12 Ant 1_10M_QPSK_1_0_Back_0mm_Ch23095

Communication System: UID 10175 - CAG, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 42.671$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 707.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.468 V/m; Power Drift = -0.00 dB



Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.475 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 1.41 W/kg

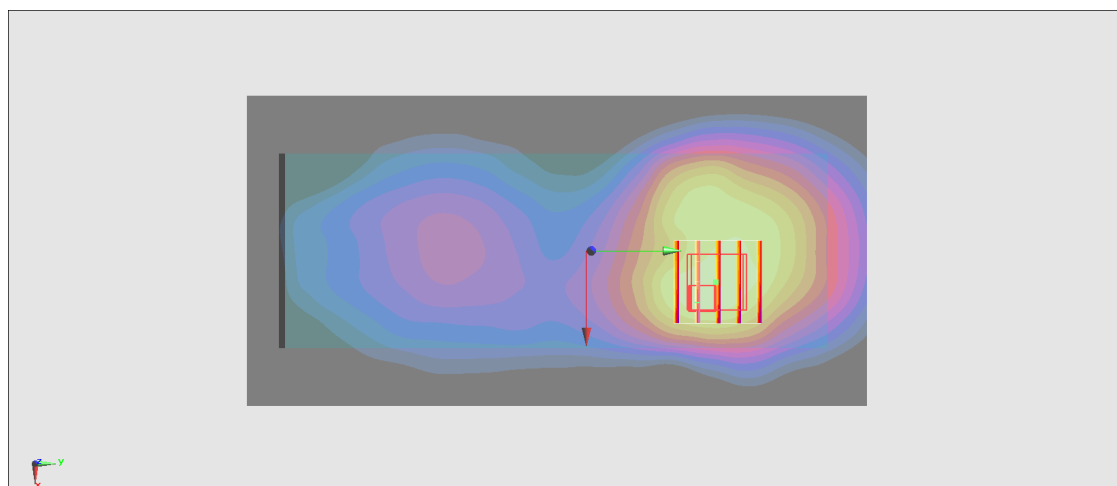

0 dB = 1.41 W/kg = 1.49 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab



Date: 2024/12/8

#68_LTE Band 13 Ant 1_10M_QPSK_1_0_Back_0mm_Ch23230

Communication System: UID 10175 - CAG, LTE-FDD; Frequency: 782 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 42.195$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 782 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

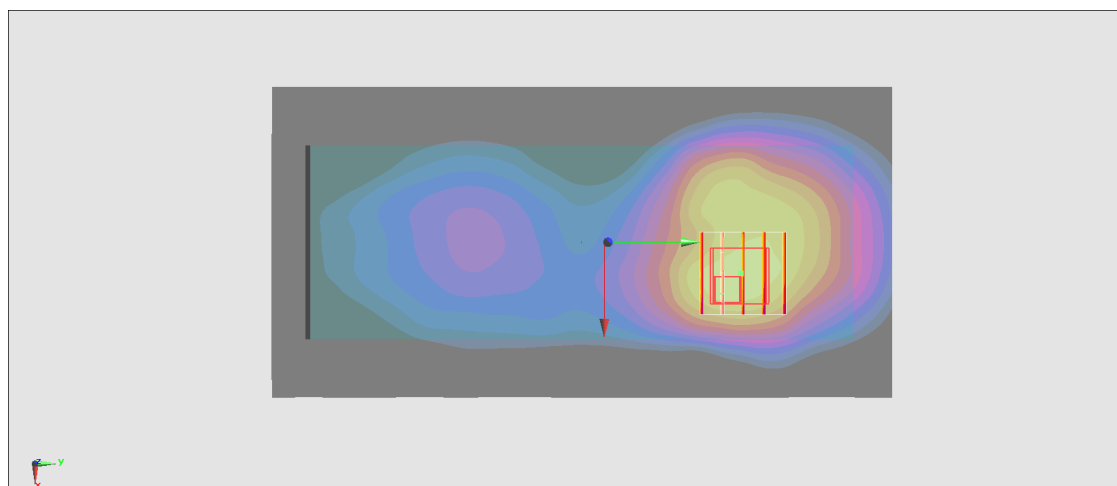Area Scan (81x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.08 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.47 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 2.67 W/kg **SAR(1 g) = 1.21 W/kg ; SAR(10 g) = 0.726 W/kg** Smallest distance from peaks to all points 3 dB below = 8.3 mm Ratio of SAR at M2 to SAR at M1 = 56.4% Maximum value of SAR (measured) = 2.08 W/kg 0 dB = 2.08 W/kg = 3.18 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#69_LTE Band 14 Ant 1_10M_QPSK_1_0_Back_0mm_Ch23330

Communication System: UID 10175 - CAG, LTE-FDD; Frequency: 793 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 793$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.157$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 793 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.44 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.714 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 1.93 W/kg

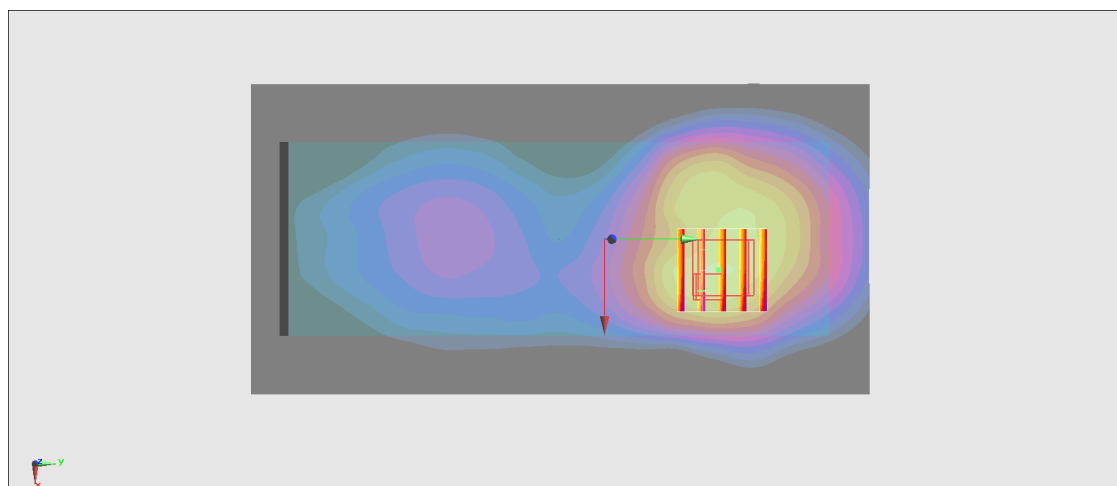

0 dB = 1.93 W/kg = 2.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#70_LTE Band 25 Ant 1_20M_QPSK_1_0_Back_0mm_Ch26340

Communication System: UID 10169 - CAE, LTE-FDD; Frequency: 1880 MHz

Medium: HSL_1900_241209 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 38.961$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.41, 7.32, 7.83) @ 1880 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.95 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.727 V/m; Power Drift = -0.08 dB



Peak SAR (extrapolated) = 5.09 W/kg

SAR(1 g) = 3 W/kg; SAR(10 g) = 1.59 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 4.26 W/kg

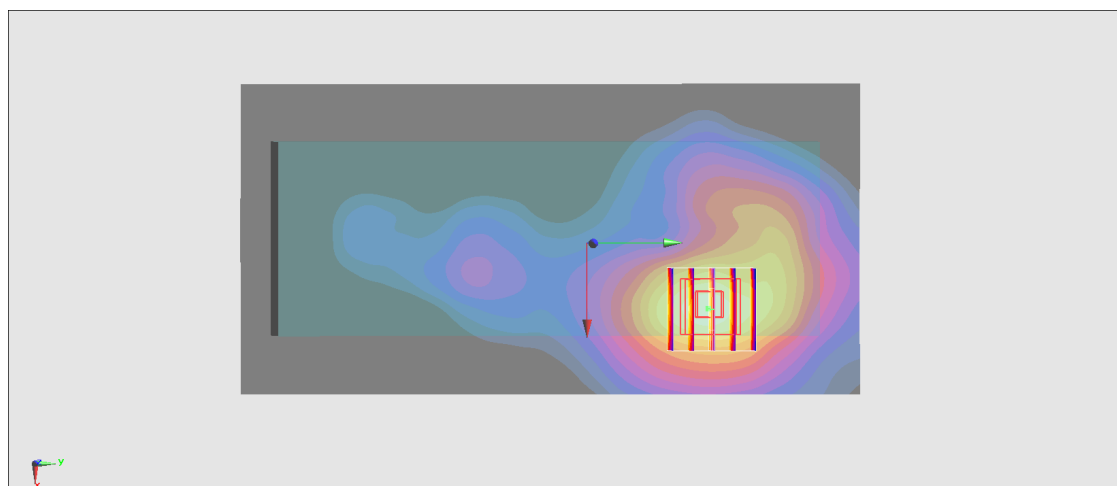

0 dB = 4.26 W/kg = 6.29 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#71_LTE Band 26 Ant 1_15M_QPSK_1_0_Back_0mm_Ch26865

Communication System: UID 10181 - CAE, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_850_241208 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.091$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(8.96, 8.85, 9.47) @ 831.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.891 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.566 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 1.31 W/kg

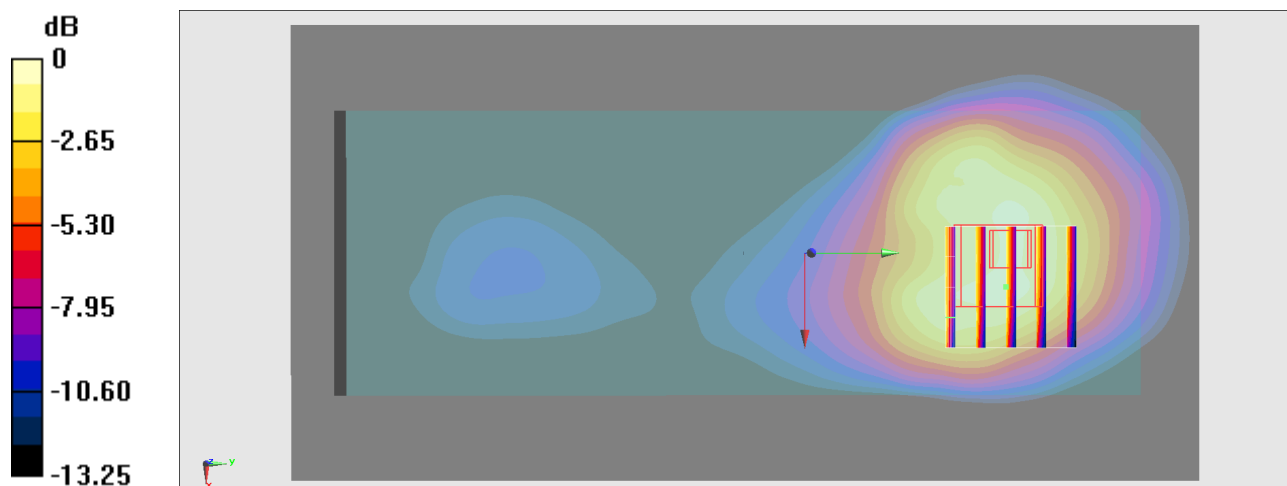

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/10

#72_LTE Band 30 Ant 5_10M_QPSK_1_0_Back_0mm_Ch27710

Communication System: UID 10175 - CAG, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_2300_241210 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.842$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.09, 7, 7.49) @ 2310 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.26 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 1.41 W/kg; SAR(10 g) = 0.728 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 2.18 W/kg

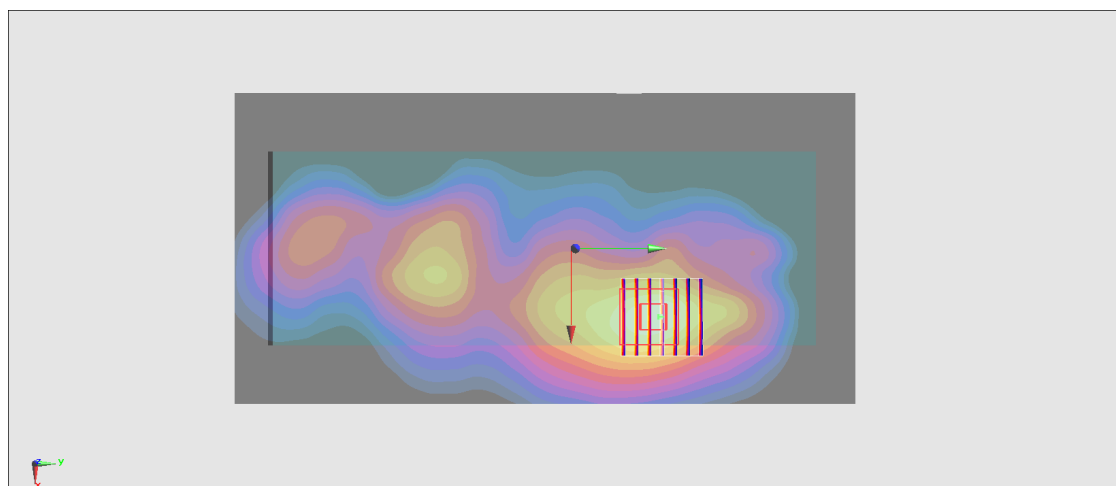

0 dB = 2.18 W/kg = 3.38 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#73_LTE Band 66 Ant 1_20M_QPSK_1_0_Back_0mm_Ch132072

Communication System: UID 10169 - CAE, LTE-FDD; Frequency: 1720 MHz

Medium: HSL_1750_241209 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.64, 7.55, 8.07) @ 1720 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.43 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.421 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 7.47 W/kg

SAR(1 g) = 4.08 W/kg; SAR(10 g) = 2.2 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 6.12 W/kg

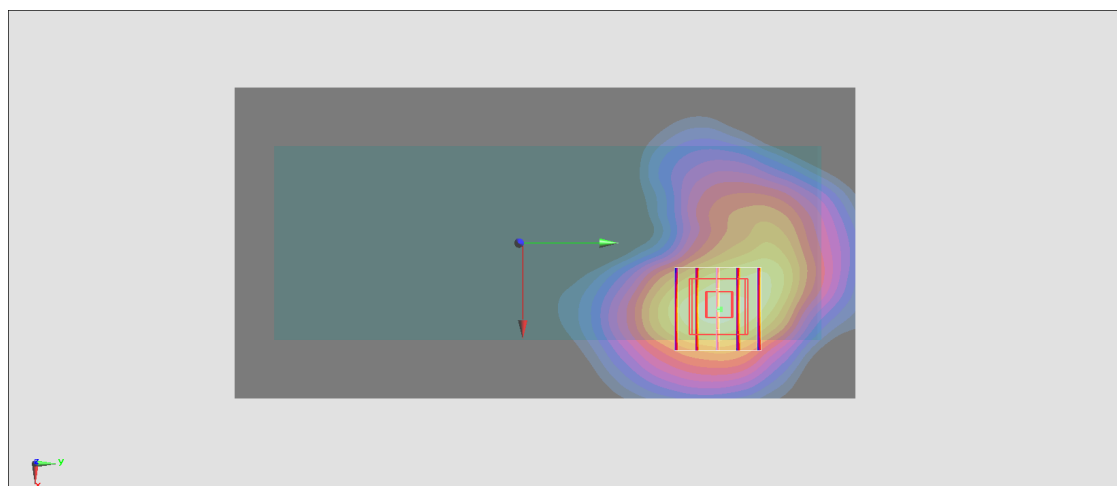

0 dB = 6.12 W/kg = 7.87 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/5

#74_LTE Band 71 Ant 1_20M_QPSK_1_0_Back_0mm_Ch133297

Communication System: UID 10169 - CAE, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_750_241105 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 680.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.609 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.320 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 0.973 W/kg

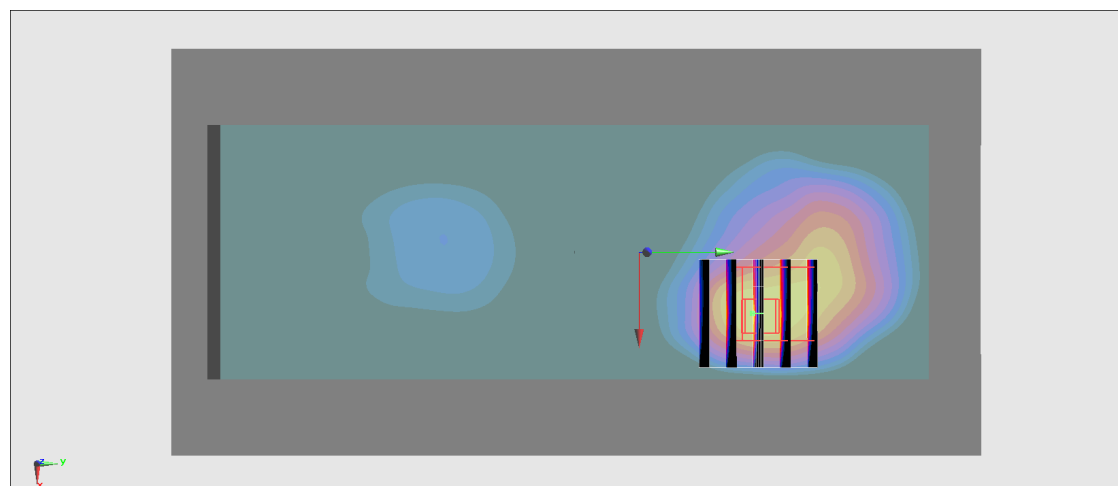

0 dB = 0.973 W/kg = -0.12 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/4

#75_LTE Band 41 Ant 5_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 10435 - AAF, LTE-TDD; Frequency: 2593 MHz

Medium: HSL_2600_241104 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.29, 7.2, 7.7) @ 2593 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.640 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.32 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.556 W/kg

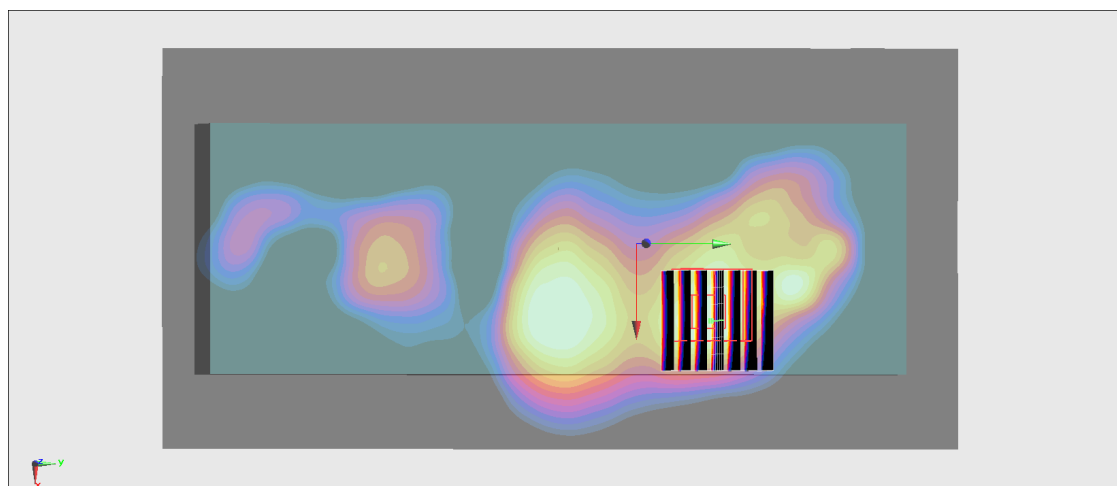

0 dB = 0.556 W/kg = -2.55 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

#76_LTE Band 48 Ant 8_20M_QPSK_1_0_Back_0mm_Ch56640

Communication System: UID 10435 - AAF, LTE-TDD; Frequency: 3690 MHz

Medium: HSL_3700_241211 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.093$ S/m; $\epsilon_r = 37.716$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.3, 6.22, 6.66) @ 3690 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 11.89 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 1.50 W/kg

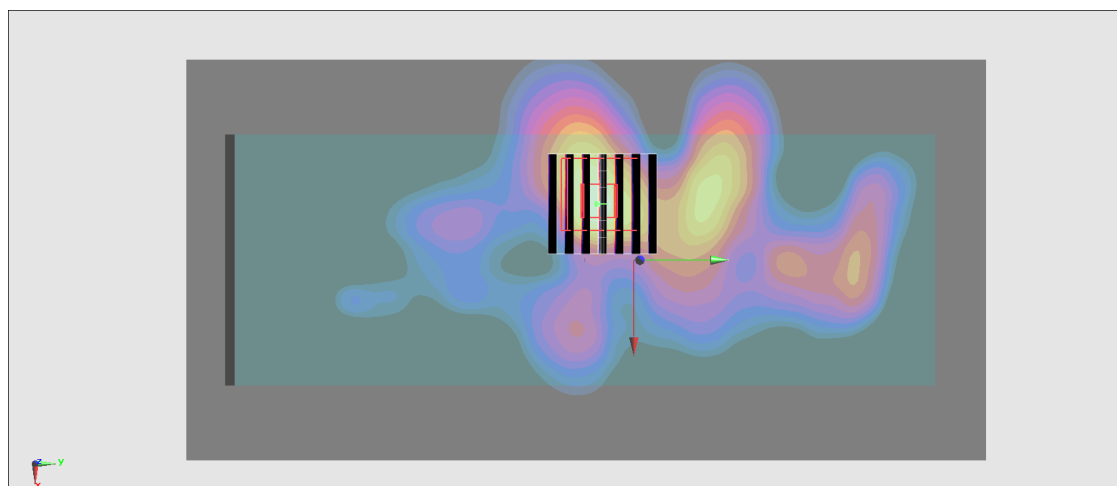

0 dB = 1.50 W/kg = 1.76 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/10

#77_FR1 n7 Ant 5_40M_BPSK_1_1_Back_0mm_Ch507000

Communication System: UID 10934 - AAB, 5G NR; Frequency: 2535 MHz

Medium: HSL_2600_241210 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.912$ S/m; $\epsilon_r = 39.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.29, 7.2, 7.7) @ 2535 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.72 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.19 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 1.65 W/kg; SAR(10 g) = 0.819 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 2.66 W/kg

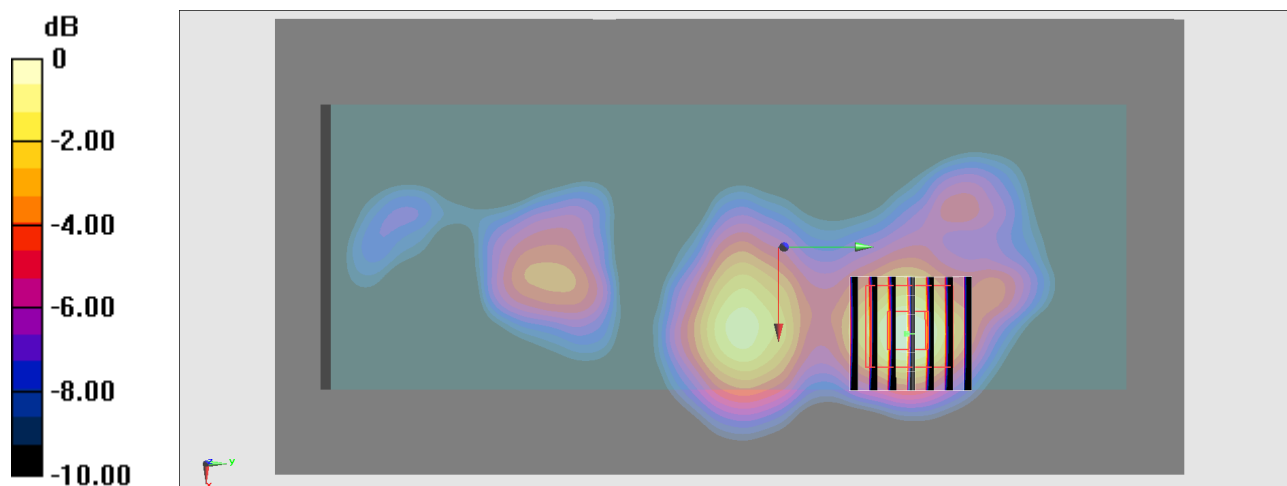

0 dB = 2.66 W/kg = 4.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#78_FR1 n12 Ant 1_15M_BPSK_1_1_Back_0mm_Ch141500

Communication System: UID 10930 - AAB, 5G NR; Frequency: 707.5 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 42.671$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 707.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.925 V/m; Power Drift = -0.18 dB



Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.652 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 1.78 W/kg

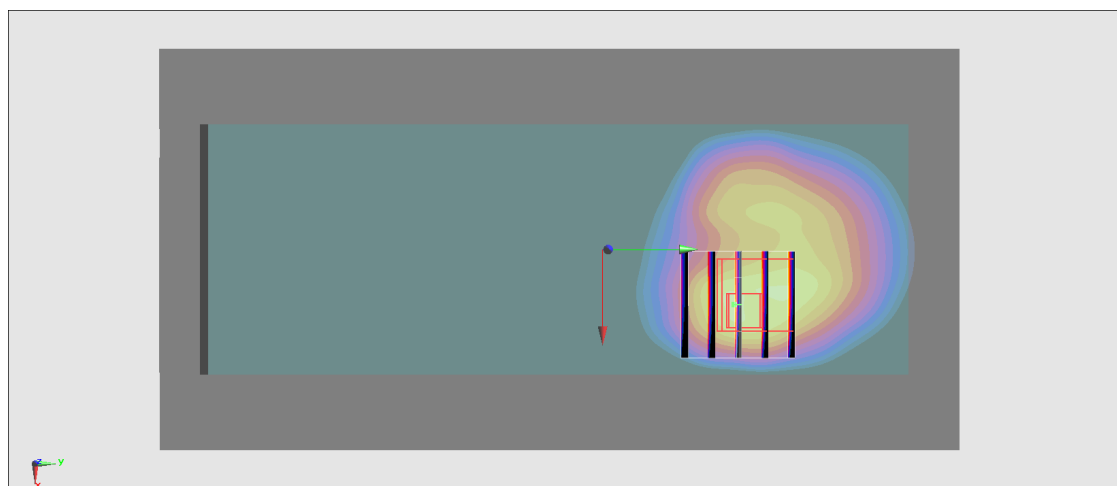

0 dB = 1.78 W/kg = 2.50 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab



Date: 2024/11/5

#79_FR1 n13 Ant 1_10M_BPSK_1_1_Back_0mm_Ch156400

Communication System: UID 10929 - AAB, 5G NR; Frequency: 782 MHz

Medium: HSL_750_241105 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 42.195$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 782 MHz; Calibrated: 2024/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

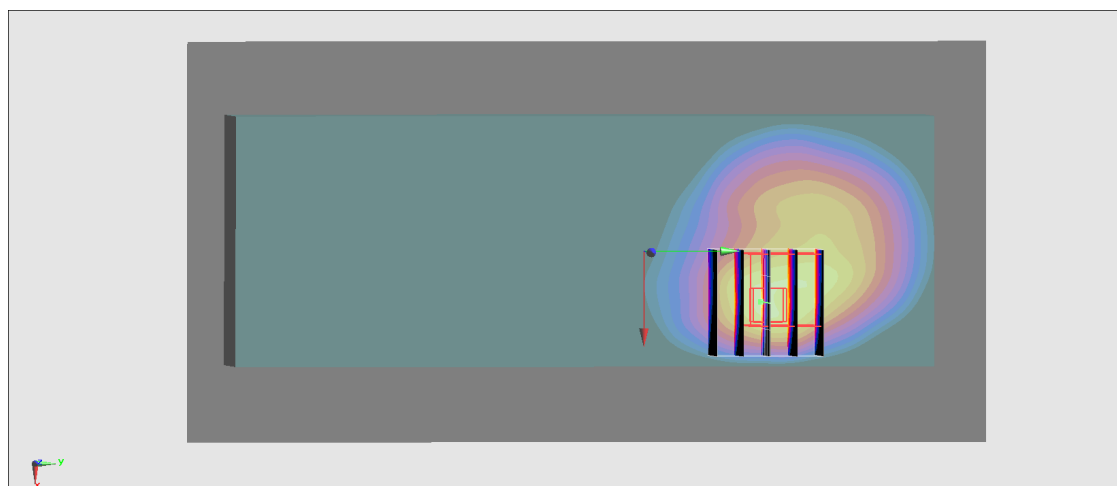Area Scan (81x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.78 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.92 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 2.92 W/kg **SAR(1 g) = 1.45 W/kg ; SAR(10 g) = 0.838 W/kg** Smallest distance from peaks to all points 3 dB below = 9.3 mm Ratio of SAR at M2 to SAR at M1 = 48.7% Maximum value of SAR (measured) = 2.31 W/kg 0 dB = 2.31 W/kg = 3.64 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#80_FR1 n14 Ant 1_10M_BPSK_1_1_Back_0mm_Ch158600

Communication System: UID 10929 - AAB, 5G NR; Frequency: 793 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 793$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.157$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 793 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 1.55 W/kg; SAR(10 g) = 0.914 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 2.90 W/kg

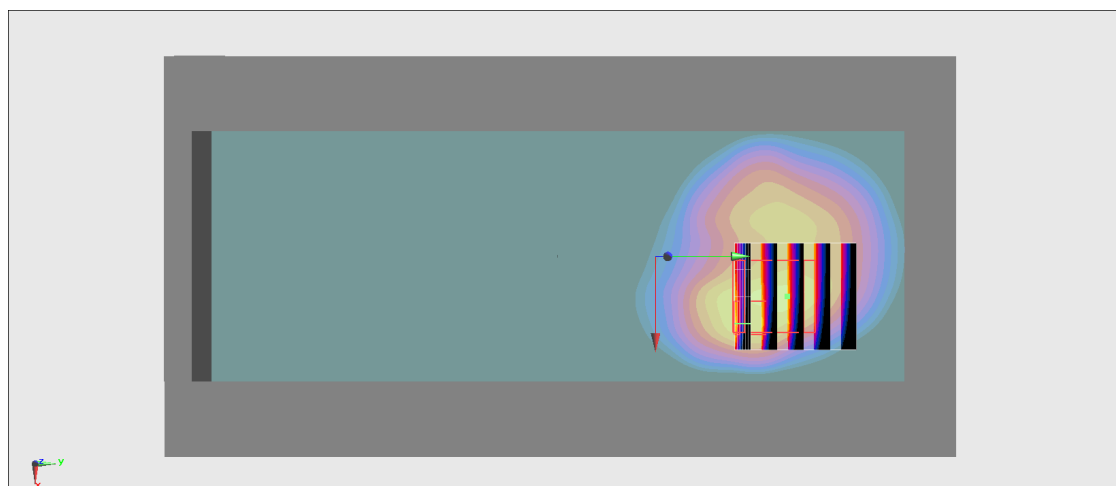

0 dB = 2.90 W/kg = 4.62 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#81_FR1 n25 Ant 1_40M_BPSK_1_1_Back_0mm_Ch379000

Communication System: UID 10934 - AAB, 5G NR; Frequency: 1895 MHz

Medium: HSL_1900_241209 Medium parameters used: $f = 1895$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 38.889$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.41, 7.32, 7.83) @ 1895 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.78 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.322 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 4.70 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.47 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 3.93 W/kg

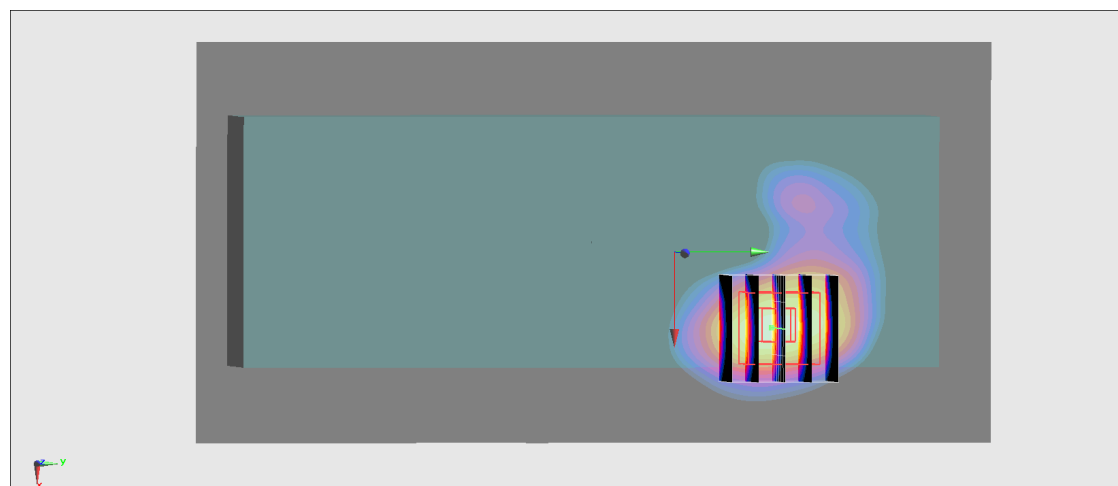

0 dB = 3.93 W/kg = 5.94 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#82_FR1 n26 Ant 1_20M_BPSK_1_1_Back_0mm_Ch166300

Communication System: UID 10931 - AAB, 5G NR; Frequency: 831.5 MHz

Medium: HSL_850_241208 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.091$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(8.96, 8.85, 9.47) @ 831.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.87 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.85 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.838 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 2.32 W/kg

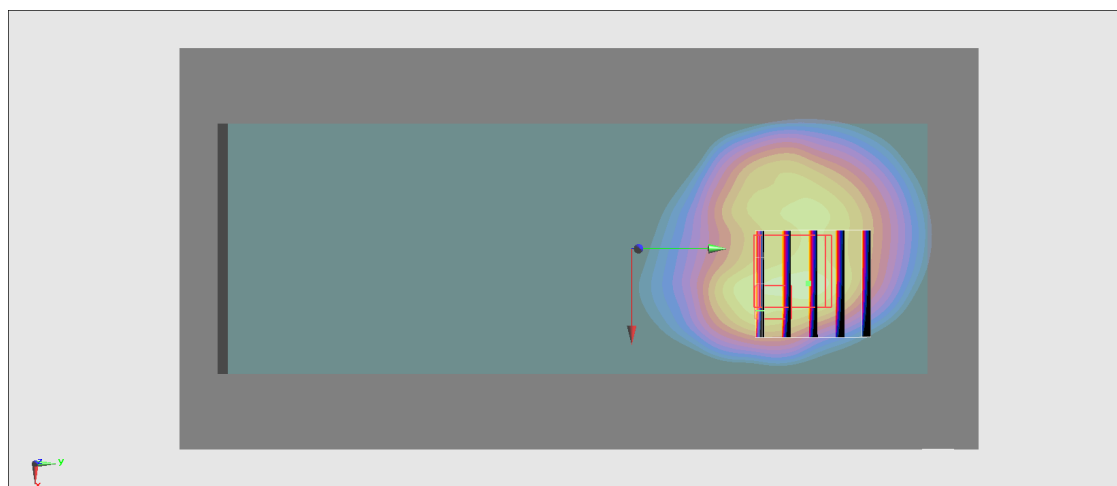

0 dB = 2.32 W/kg = 3.65 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/10

#83_FR1 n30 Ant 5_10M_BPSK_1_1_Back_0mm_Ch462000

Communication System: UID 10929 - AAB, 5G NR; Frequency: 2310 MHz

Medium: HSL_2300_241210 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.842$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.09, 7, 7.49) @ 2310 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.35 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.833 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 0.993 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 2.91 W/kg

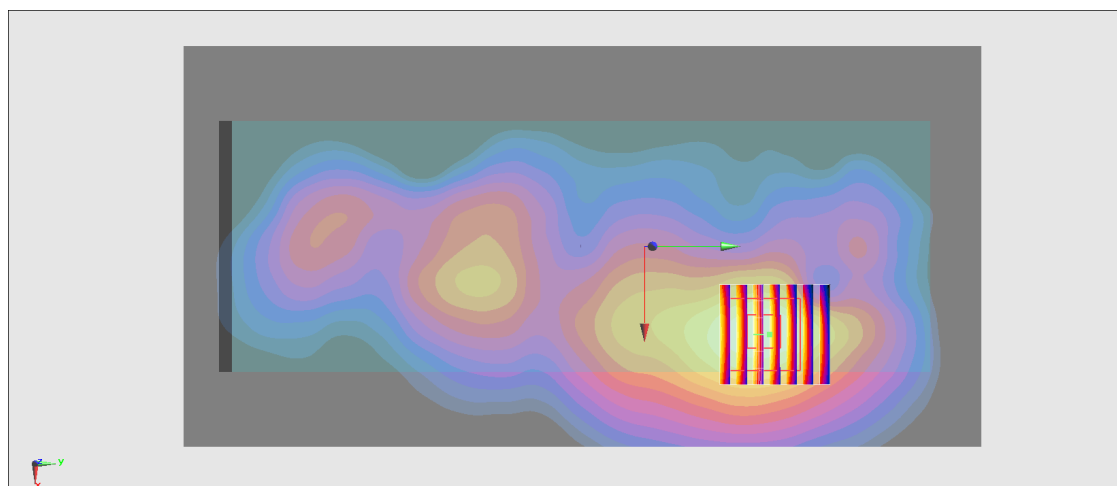

0 dB = 2.91 W/kg = 4.64 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/9

#84_FR1 n66 Ant 1_40M_BPSK_1_1_Back_0mm_Ch349000

Communication System: UID 10934 - AAB, 5G NR; Frequency: 1745 MHz

Medium: HSL_1750_241209 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.443$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.64, 7.55, 8.07) @ 1745 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.76 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.320 V/m; Power Drift = -0.19 dB



Peak SAR (extrapolated) = 5.86 W/kg

SAR(1 g) = 3.3 W/kg; SAR(10 g) = 1.8 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 4.80 W/kg

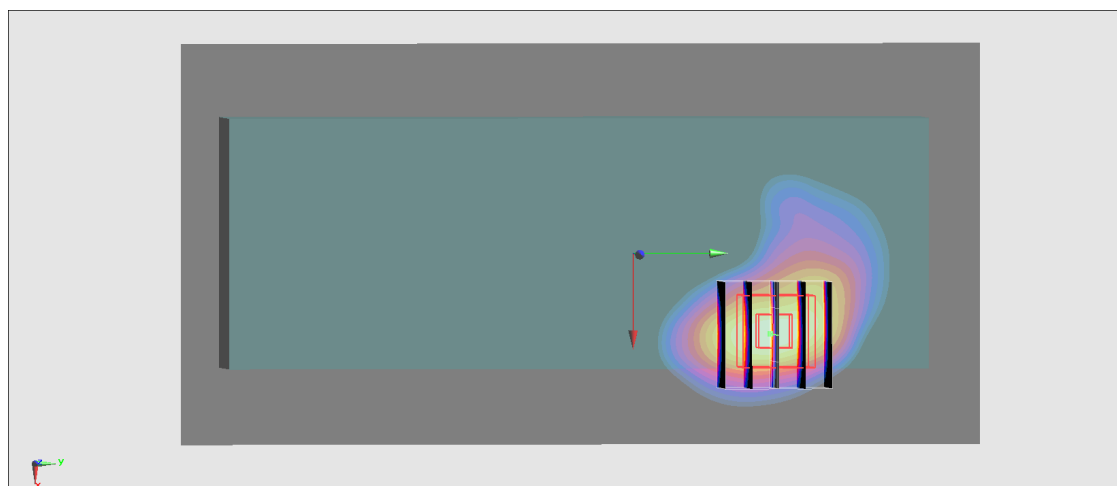

0 dB = 4.80 W/kg = 6.81 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/8

#85_FR1 n71 Ant 1_20M_BPSK_1_1_Back_0mm_Ch136100

Communication System: UID 10931 - AAB, 5G NR; Frequency: 680.5 MHz

Medium: HSL_750_241208 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 9.09, 9.72) @ 680.5 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.760 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.39 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 1.24 W/kg

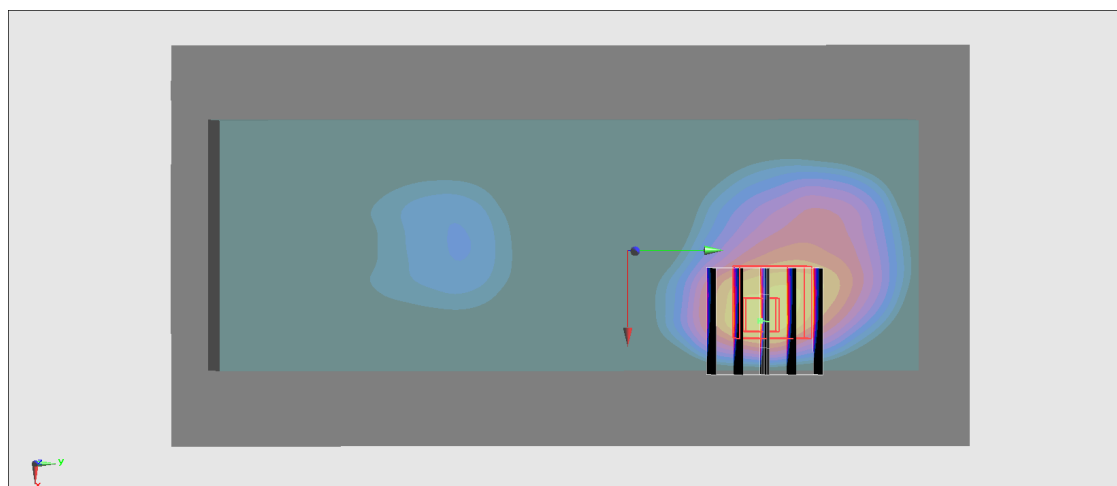

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/10

#86_FR1 n41 Ant 2_100M_BPSK_1_1_Back_0mm_Ch518598

Communication System: UID 10866 - AAD, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_2600_241210 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.29, 7.2, 7.7) @ 2592.99 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.80 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.502 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 4.20 W/kg

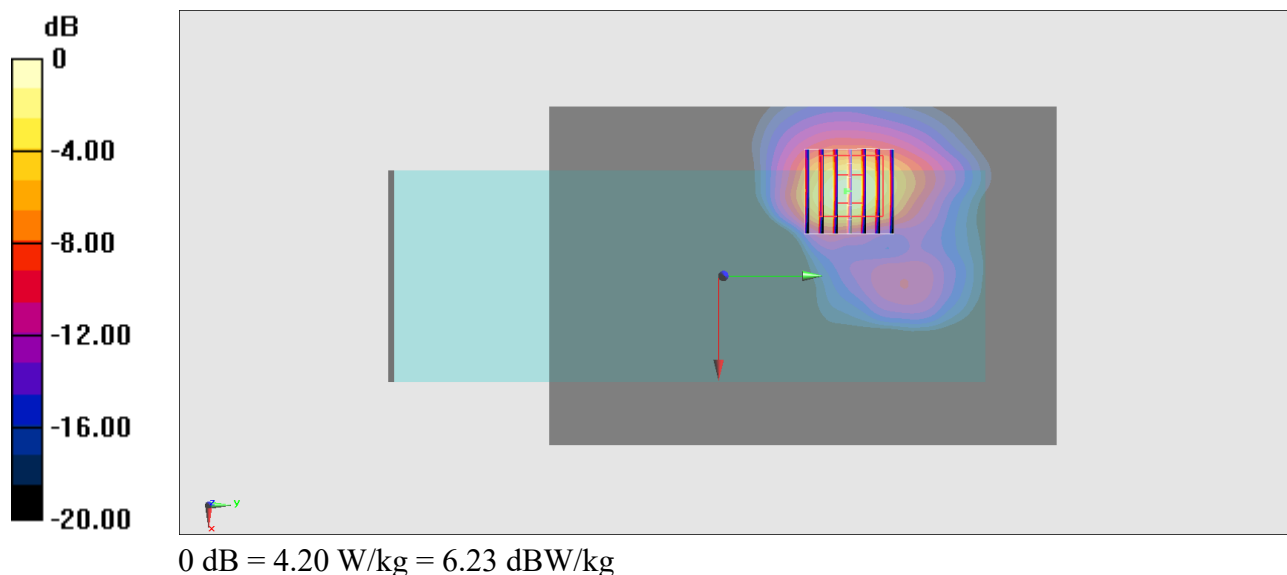

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

#87_FR1 n48 Ant 8_40M_BPSK_1_1_Right Side_0mm_Ch641666

Communication System: UID 10903 - AAB, 5G NR; Frequency: 3624.99 MHz

Medium: HSL_3700_241211 Medium parameters used: $f = 3625$ MHz; $\sigma = 3.025$ S/m; $\epsilon_r = 37.777$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.3, 6.22, 6.66) @ 3624.99 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.11 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 41.45 V/m; Power Drift = -0.18 dB



Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 3.34 W/kg; SAR(10 g) = 1.46 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.8%

Maximum value of SAR (measured) = 7.96 W/kg

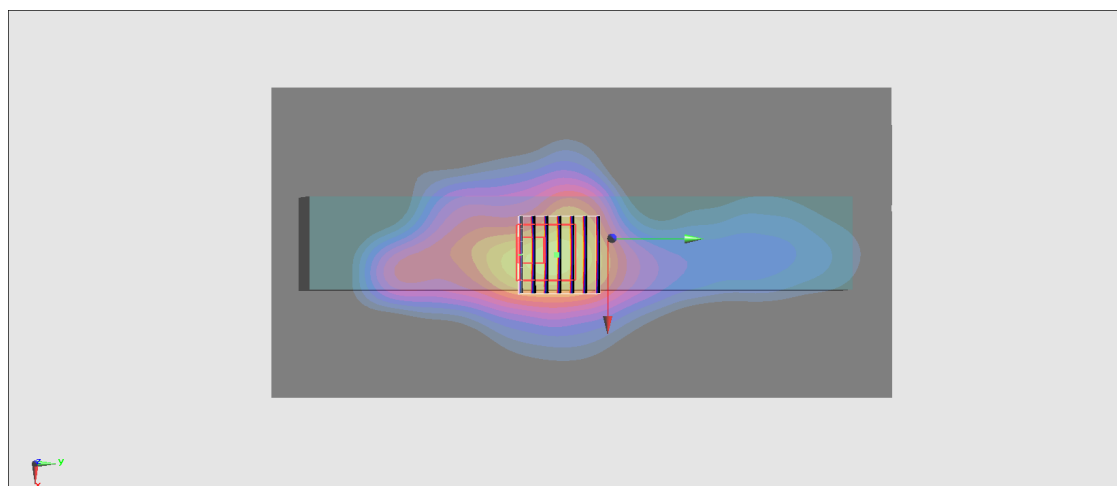

0 dB = 7.96 W/kg = 9.01 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

#88_FR1 n77 Ant 8_100M_BPSK_1_1_Right Side_0mm_Ch656000

Communication System: UID 10866 - AAD, 5G NR; Frequency: 3840 MHz

Medium: HSL_3900_241211 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.249$ S/m; $\epsilon_r = 37.578$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.12, 6.05, 6.47) @ 3840 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2024/7/15
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 3.91 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 35.36 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 4.96 W/kg; SAR(10 g) = 1.88 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 13.2 W/kg

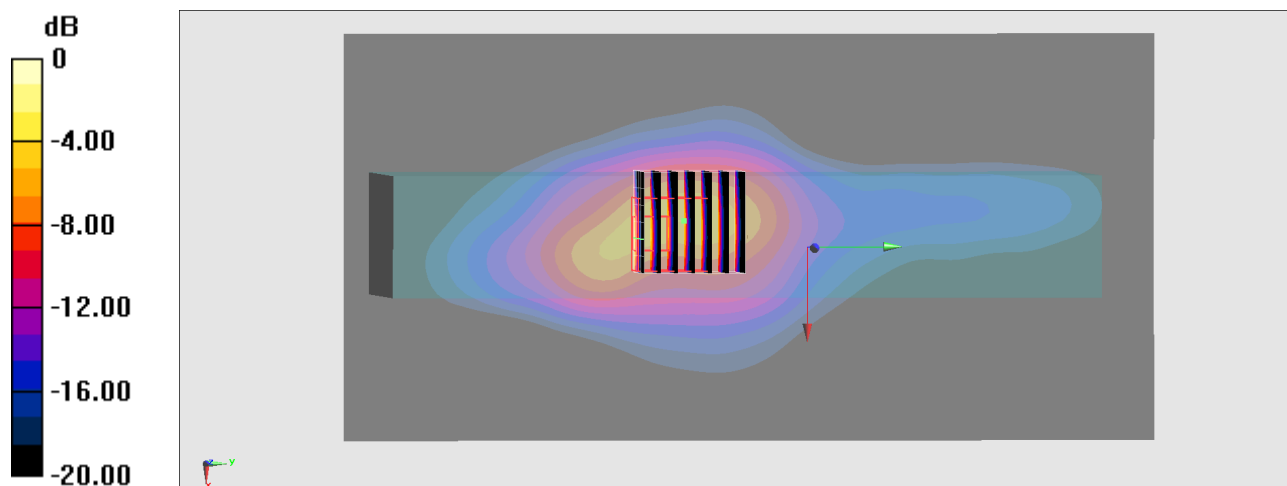

0 dB = 13.2 W/kg = 11.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2024/12/4

#89_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch1

Communication System: UID 10415 - AAA, IEEE 802.11b ; Frequency: 2412MHz

Medium: HSL_2450_241204 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.746 \text{ S/m}$; $\epsilon_r = 39.229$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.51, 6.73, 8.77) @ 2412 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

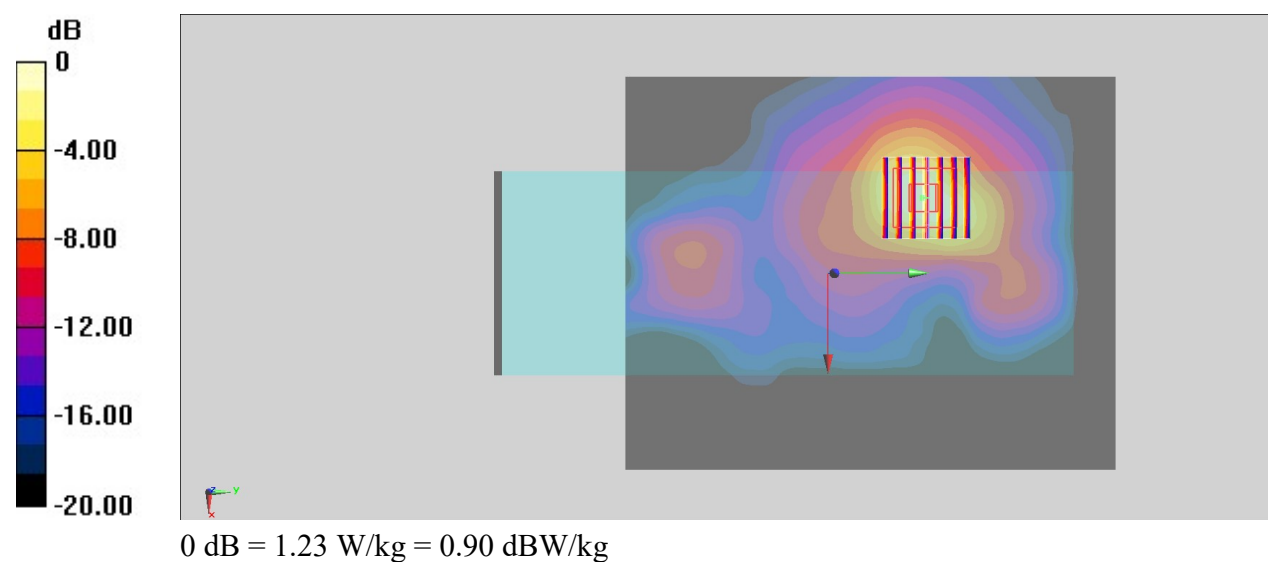Area Scan (121x151x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 1.26 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.302 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 1.42 W/kg **SAR(1 g) = 0.848 W/kg ; SAR(10 g) = 0.450 W/kg** Smallest distance from peaks to all points 3 dB below = 11.3 mm Ratio of SAR at M2 to SAR at M1 = 61.6% Maximum value of SAR (measured) = 1.23 W/kg 

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/5

#90_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch58

Communication System: UID 10544 - AAD, IEEE 802.11ac; Frequency: 5290 MHz

Medium: HSL_5G_241205 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 36.147$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.46, 4.11, 5.36) @ 5290 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 13.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.671 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 5.33 W/kg; SAR(10 g) = 1.23 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 14.8 W/kg

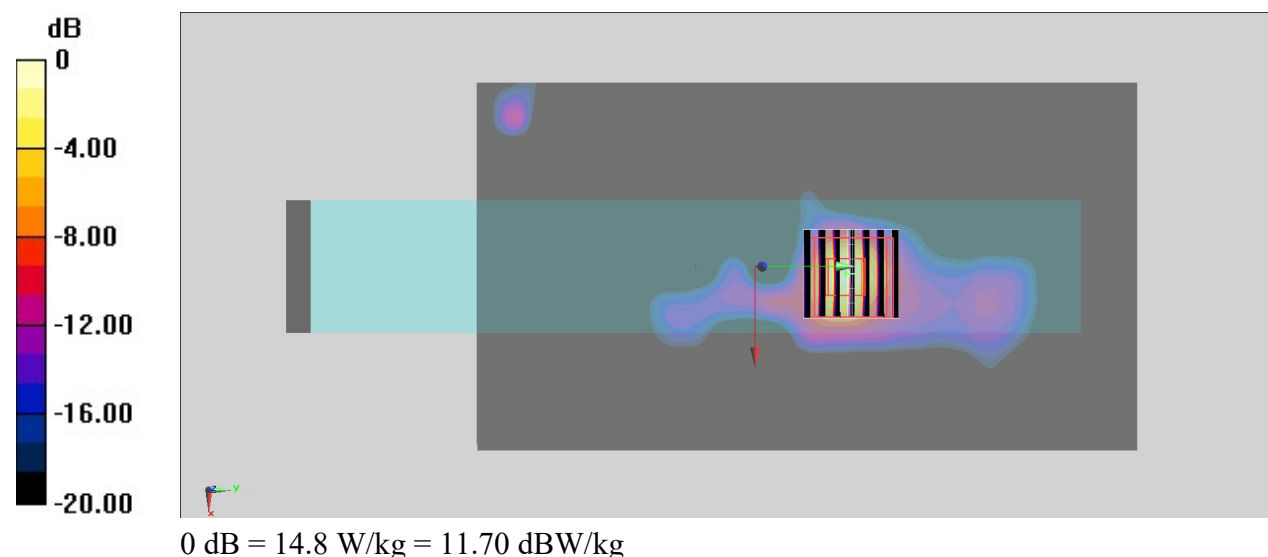

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/5

#91_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch122

Communication System: UID 10544 - AAD, IEEE 802.11ac ; Frequency: 5610 MHz

Medium: HSL_5G_241205 Medium parameters used : $f = 5610$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.814$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(3.96, 3.67, 4.73) @ 5610 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 21.4 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.485 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 38.2 W/kg

SAR(1 g) = 7.47 W/kg; SAR(10 g) = 1.6 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 22.0 W/kg

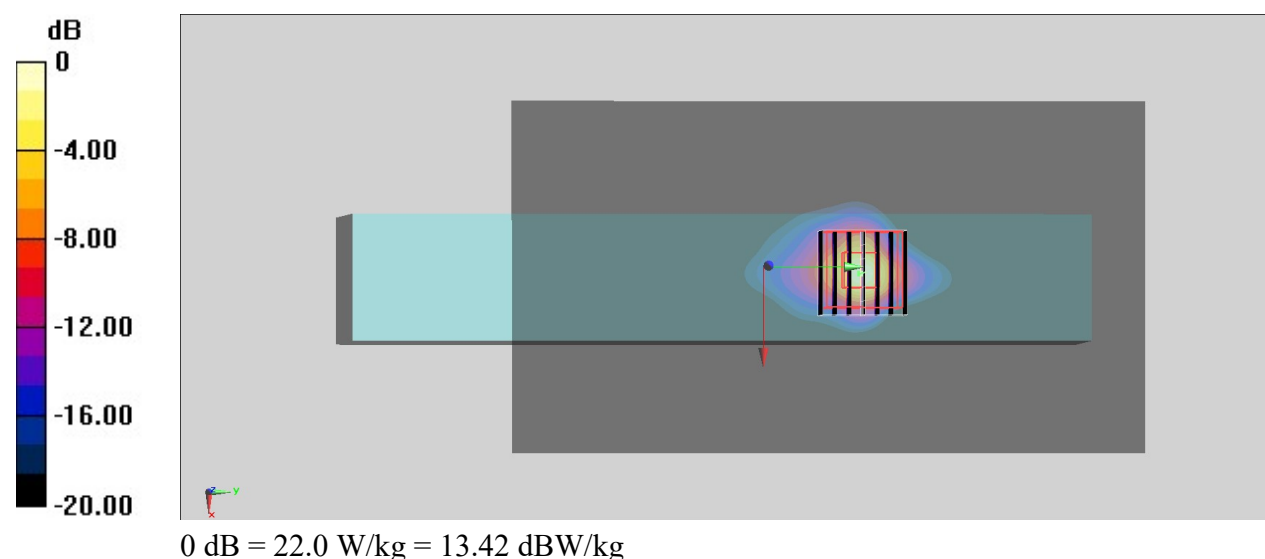

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/5

#92_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac; Frequency: 5775 MHz

Medium: HSL_5G_241205 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 35.537$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5775 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.91 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.126 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 1.91 W/kg

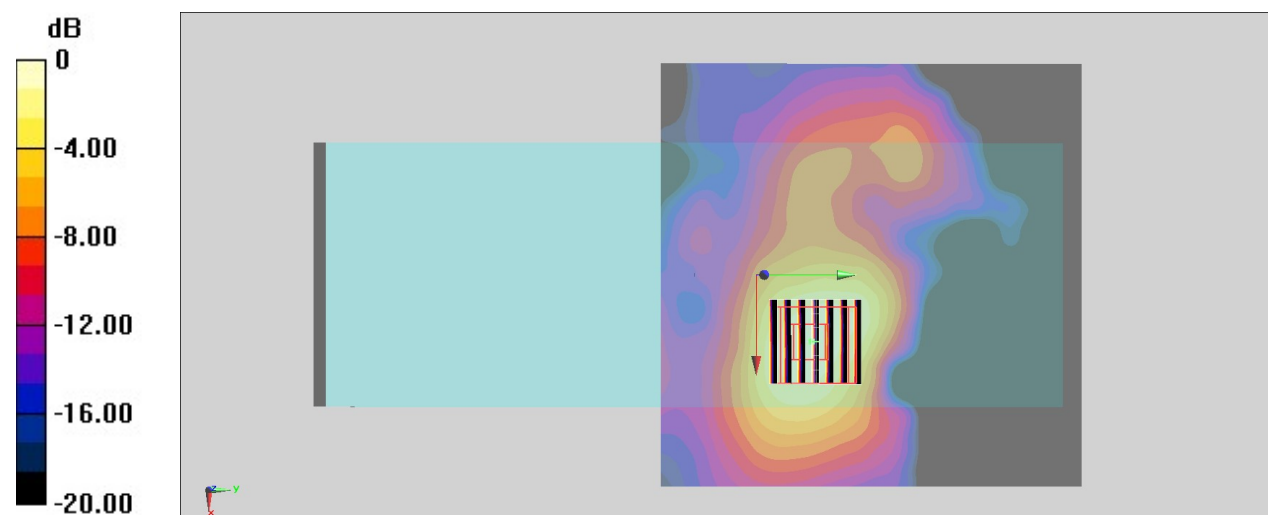

0 dB = 1.91 W/kg = 2.81 dBW/kg

Date: 2024-12-08

#93_WLAN6GHz_802.11ax-HE160 MCS0_Right Side_0mm_Ch47

Communication System: 802.11ax; Frequency: 6185.000 MHz

Medium: HSL_6G_241208 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.25, 4.81, 6.16); Calibrated: 2024-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2024-03-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (68.0 mm x 68.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.879 W/kg; SAR (10g) = 0.217 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.981 W/kg; SAR (8g) = 0.273 W/kg; SAR (10g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.5 %

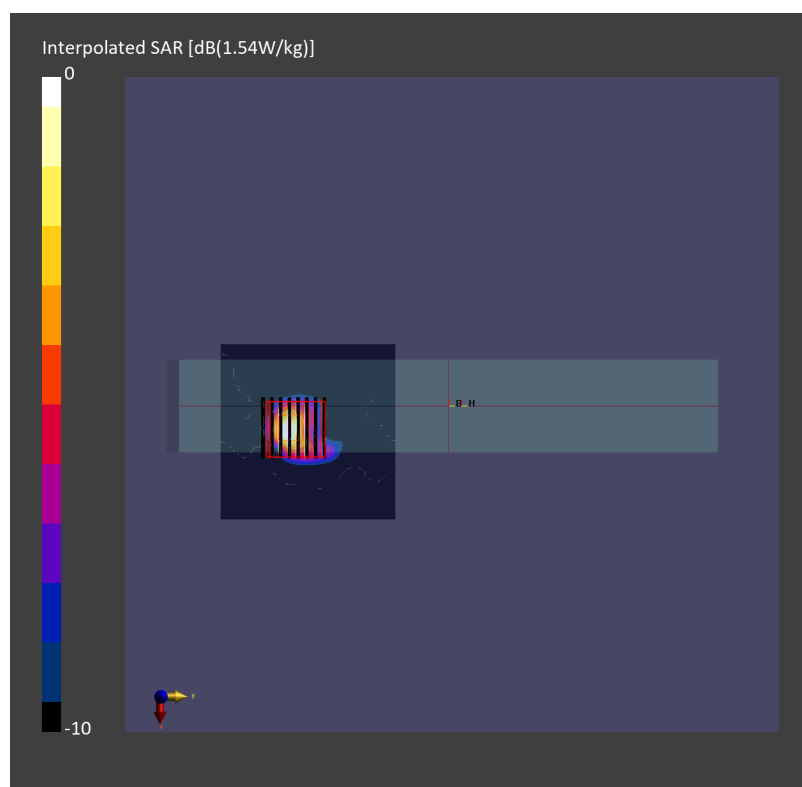psAPD (1.0cm², sq) = 9.81 [W/m²]; psAPD (4.0cm², sq) = 5.46 [W/m²]

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/6

#94_Bluetooth_1Mbps_Back_0mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_2450_241206 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 39.552$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.51, 6.73, 8.77) @ 2402 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x241x1): Interpolated grid: dx=1.200 mm, dy=1.200 mmReference Value = 0 V/m; Power Drift = **not measured****Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg**

Maximum value of SAR (interpolated) = 0 W/kg

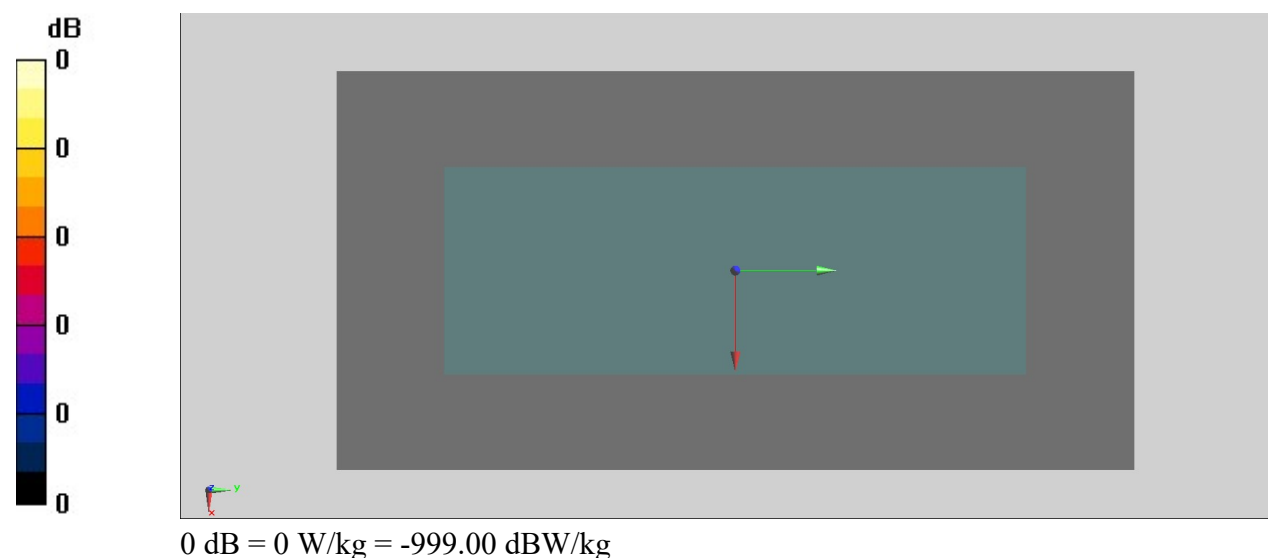

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/22

#95_NFC_Back_0mm_13.56MHz

Communication System: NFC; Frequency: 13.56 MHz

Medium: HSL_13_241122 Medium parameters used: $f = 14$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 53.45$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(14.84, 14.84, 14.84) @ 13.56 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.19 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 0.138 W/kg

