

Appendix F. SAR Test Setup Photos

Hotspot Exposure Condition_Brick Type



Front at 10 mm



Back at 10 mm



Left Side at 10 mm



Right Side at 10 mm



Top Side at 10 mm

Hotspot Exposure Condition_Gun Type



Front at 10 mm



Top Side at 10 mm



Left Side at 10 mm



Right Side at 10 mm

Body-worn Exposure Condition_Brick Type



Front at 5 mm



Back at 5 mm



Front with Rigid holster at 0 mm



Back with Soft holster at 0 mm



Front with Soft holster at 0 mm

Body-worn Exposure Condition_Gun Type



Front at 15 mm



Front with Rigid holster at 0 mm



Left Side with Soft holster at 0 mm



Right Side with Soft holster at 0 mm


Product Specific Exposure Condition_Brick Type



Front at 0 mm



Back at 0 mm

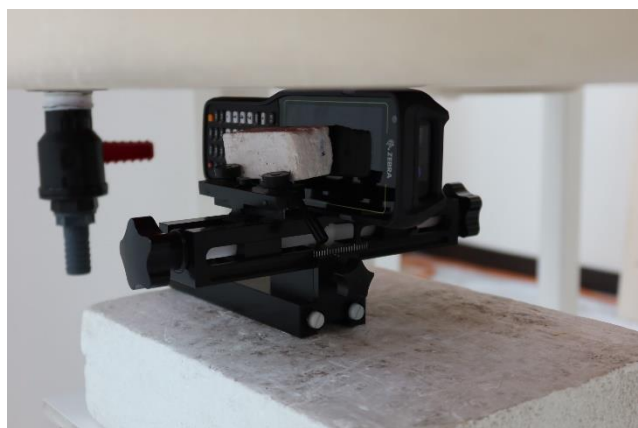

Left Side at 0 mm



Right Side at 0 mm



Top Side at 0 mm

Product Specific Exposure Condition_Gun Type



Back at 0 mm



Right Side at 0 mm


PD Test Setup Photo_Brick Type




Front at 2 mm



Back at 2 mm

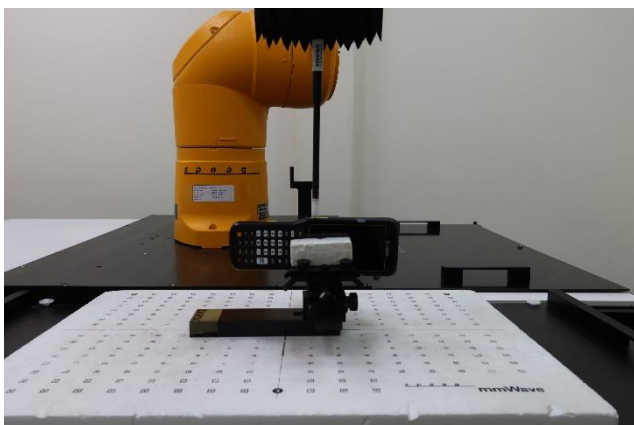

Left Side at 2 mm

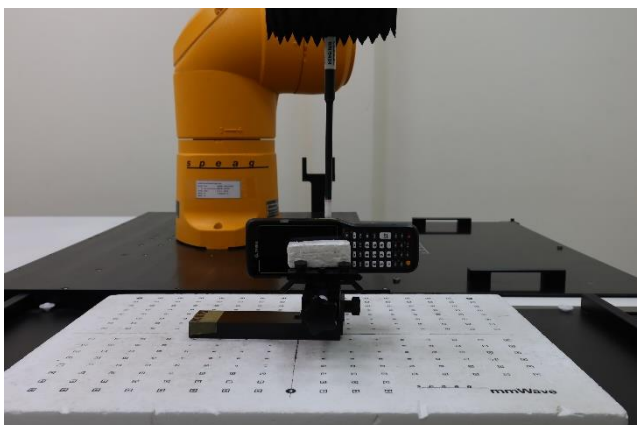


Right Side at 2 mm

PD Test Setup Photo_Gun Type



Front at 15 mm

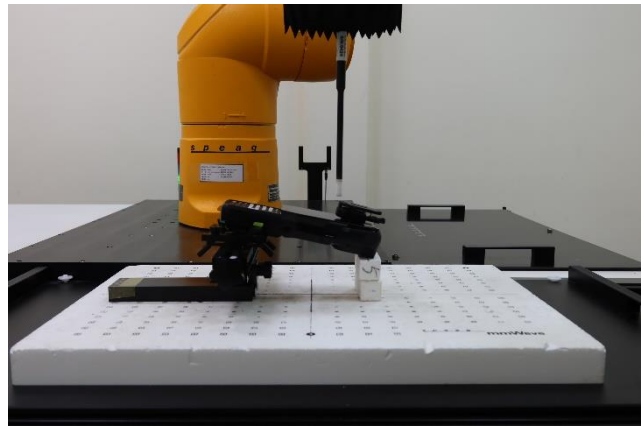

Front with Rigid holster at 2 mm



Left Side with Soft holster at 2 mm




Right Side with Soft holster at 2 mm




Back at 2 mm

Supplemental PD Test Setup Photo_Brick Type

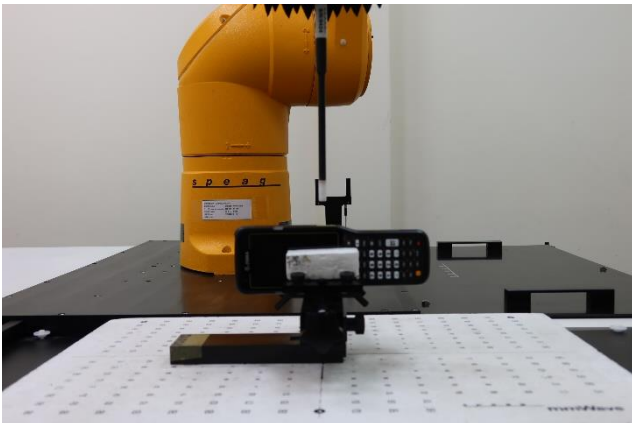

Right Side at 25 mm

Supplemental PD Test Setup Photo_Gun Type

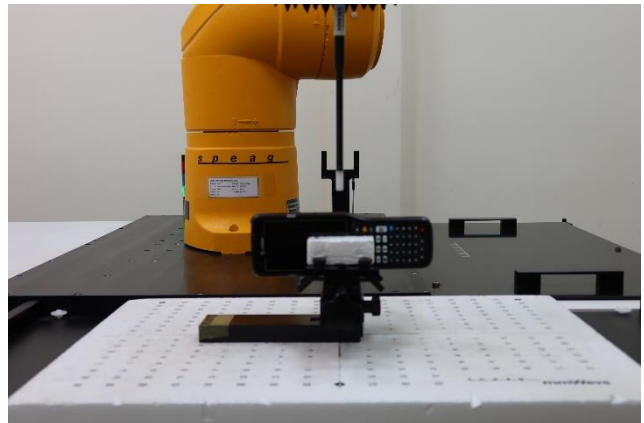

Right Side at 25 mm

Supplemental SAR Setup Photo_Brick Type



Left Side at 25 mm



Right Side at 25 mm

Supplemental SAR Setup Photo_Gun Type



Left Side at 25 mm



Right Side at 25 mm