



A D T

FCC TEST REPORT (Bluetooth)

REPORT NO.: RF120522E09-2

MODEL NO.: MC92N0

FCC ID: UZ7MC92N0

RECEIVED: May 22, 2012

TESTED: June 01 to 11, 2012

ISSUED: July 31, 2012

APPLICANT: Motorola Solutions, Inc.

ADDRESS: One Motorola Plaza Holtsville NY 11742-1300 USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT (BLUETOOTH).....	8
3.2 DESCRIPTION OF TEST MODES	12
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	13
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4 TEST PROCEDURES AND RESULTS	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	18
4.1.2 TEST INSTRUMENTS.....	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS.....	20
4.1.7 TEST RESULTS TEST RESULTS	21
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	23
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	23
4.2.2 TEST INSTRUMENTS.....	24
4.2.3 TEST PROCEDURES	26
4.2.4 DEVIATION FROM TEST STANDARD	26
4.2.5 TEST SETUP	27
4.2.6 EUT OPERATING CONDITIONS.....	27
4.2.7 TEST RESULTS	28
4.3 NUMBER OF HOPPING FREQUENCY USED	35
4.3.1 LIMIT OF HOPPING FREQUENCY USED	35
4.3.2 TEST INSTRUMENTS.....	35
4.3.3 TEST PROCEDURES	35
4.3.4 DEVIATION FROM TEST STANDARD	35
4.3.5 TEST SETUP	36
4.3.6 TEST RESULTS	36
4.4 DWELL TIME ON EACH CHANNEL.....	38
4.4.1 LIMIT OF DWELL TIME USED	38
4.4.2 TEST INSTRUMENTS.....	38
4.4.3 TEST PROCEDURES	38
4.4.4 DEVIATION FROM TEST STANDARD	39
4.4.5 TEST SETUP	39



A D T

4.4.6	TEST RESULTS	40
4.5	CHANNEL BANDWIDTH	44
4.5.1	LIMITS OF CHANNEL BANDWIDTH.....	44
4.5.2	TEST INSTRUMENTS.....	44
4.5.3	TEST PROCEDURE.....	44
4.5.4	DEVIATION FROM TEST STANDARD	44
4.5.5	TEST SETUP	45
4.5.6	EUT OPERATING CONDITION	45
4.5.7	TEST RESULTS	46
4.6	HOPPING CHANNEL SEPARATION	47
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	47
4.6.2	TEST INSTRUMENTS.....	47
4.6.3	TEST PROCEDURES	47
4.6.4	DEVIATION FROM TEST STANDARD	47
4.6.5	TEST SETUP	47
4.6.6	TEST RESULTS	48
4.7	MAXIMUM OUTPUT POWER	49
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	49
4.7.2	INSTRUMENTS.....	49
4.7.3	TEST PROCEDURES	49
4.7.4	DEVIATION FROM TEST STANDARD	49
4.7.5	TEST SETUP	50
4.7.6	EUT OPERATING CONDITION	50
4.7.7	TEST RESULTS	51
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT	52
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	52
4.8.2	TEST INSTRUMENTS.....	52
4.8.3	TEST PROCEDURE.....	52
4.8.4	DEVIATION FROM TEST STANDARD	52
4.8.5	TEST SETUP	52
4.8.6	EUT OPERATING CONDITION	52
4.8.7	TEST RESULTS	53
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	56
6	INFORMATION ON THE TESTING LABORATORIES	57
7	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	58



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120522E09-2	Original release	July 31, 2012



A D T

1 CERTIFICATION

PRODUCT : Mobile Computer
BRAND NAME : MOTOROLA
MODEL NO. : MC92N0
TEST SAMPLE : ENGINEERING SAMPLE
APPLICANT : Motorola Solutions, Inc.
TESTED DATE : June 01 to 11, 2012
STANDARDS : FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (Model: MC92N0) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, DATE: July 31, 2012
(Midoli Peng, Specialist)

APPROVED BY : May Chen, DATE: July 31, 2012
(May Chen, Deputy Manager)



A D T

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.97dB at 0.15000MHz.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -7.4dB at 304.5MHz.
15.247(d)	Conducted Out-Band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz)	3.84 dB
Radiated emissions (6GHz -18GHz)	4.09 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



A D T

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT (BLUETOOTH)

PRODUCT	Mobile Computer
MODEL NO.	MC92N0
POWER SUPPLY	DC 7.4V from battery DC 12V to direct charging adapter
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK
MODULATION TECHNOLOGY	FHSS
DATE RATE	Up to 3Mbps
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
MAX. OUTPUT POWER	2.891 mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Battery x 1 (Part No.: 21-65587-03)

NOTE:

1. There are Bluetooth 2.1 + EDR technology and WLAN 802.11 a/b/g/n technology used for the EUT. and the functions of EUT listed as below table:

Function	Report No.
WLAN	RF120522E09 (15.247) RF120522E09-1(15.407) RF120522E09-3(DFS)
Bluetooth	RF120522E09-2



2. The EUT configuration list:

Scanner	With CR	Without CR	Keypad			
			53 key	43 key	33 key	28 key
SE4500	V	-	V	V	V	V
SE4500	-	V	V	V	V	V
SE4600	V	-	V	V	V	V
SE4600	-	V	V	V	V	V
SE965	V	-	V	V	V	V
SE965	-	V	V	V	V	V
SE1524	V	-	V	V	V	V
SE1524		V	V	V	V	V

CR : Condensation Resistant

3. The Version of EUT information are as below:

Mobile Computer	OS Version	07.00.2806
	OEM Name	MOTOROLA MC92N0G
	OEM Version	00.20.0005
Wireless(Fusion)	Part Number	31-FUSION-X2.00
	Version	X_2.00.0.0.040E
XW2DMT	Version	X_2.00.0.0.28
	Fusion	X_2.00.0.0.040E
BTRegTest Ver4.1	Version	4.1



A D T

4. The associated devices(optional) of EUT information are as below:

Product	Brand	Model	S/N
28keypad	NA	KYPD-MC9XMR000-01R	40A11W40H
33keypad	NA	KYPD-MC9XMX000-01R	40B52K50A
43keypad	NA	KYPD-MC9XMT000-01R	40A11R93G
53keypad	NA	KYPD-MC9XMS000-01R	40B63U43F
Product	Brand	Model	P/N
Headset	MOTOROLA	RCH50	RCH50
Headset	VXI	VR10	50-11300-050R
Power adapter (for Direct charging)	HIPRO	HP-A0502R3D	PWRS-14000-148R
Direct charging adapter	SYMBOL	ADP9000-110R	NA
AC Line cord	NA	NA	23844-00-00R
USB cable	NA	NA	25-62166-01R

5. The EUT could be supplied with a direct charging and battery as below table:

Direct charging adapter (not for sale together)	
Brand:	SYMBOL
Part No.:	ADP9000-110R
I/O Ports:	RS232 Port * 1 RJ45 Port *2
Associated Devices:	USB cable (unshielded, 1.8m without core) USB cable (Part No.: 25-62166-01r)
Power Adapter (for Direct charging, and not for sale together)	
Brand:	HIPRO
Model No.:	HP-A0502R3D
Part No.:	PWRS-14000-148R
Input power :	100-240V, 50-60Hz, 2.4A
Output power :	+12V , 4.16A AC Line cord (unshielded, 2.2m without core) (Part No.: 23844-00-00R)
Battery	
Brand:	SYMBOL
Part No.:	21-65587-03
Rating:	7.4V, 2200mAh, 16.3Wh



A D T

6. The antennas provided to the EUT, please refer to the following table:

WLAN Antenna Spec.			
Antenna	Type	Connector	Gain (dBi)
Lant (Aux)	PIFA	NA	4.07 (2.4GHz) 4.96 (5GHz)
Rant (Main)	PIFA	NA	6.03 (2.4GHz) 4.51 (5GHz)
Bluetooth Antenna Spec			
Type	Connector	Gain (dBi)	
Chip	NA	-3.31	

Note: This report chose the max. Antenna gain to do final test.

7. The EUT was pre-tested in chamber under following test modes :

Mode	Axis	Scanner	Headset	Keypad	CR	Power
Mode A	X-Y	SE4500	RCH50	53 Key	Without CR	Battery
Mode B	X-Y	SE1524	RCH50	53 Key	Without CR	Battery
Mode C	X-Y	SE965	RCH50	53 Key	Without CR	Battery
Mode D	X-Y	SE4600	RCH50	53 Key	Without CR	Battery
Mode E	X-Z	SE4500	RCH50	53 Key	Without CR	Battery
Mode F	Y-Z	SE4500	RCH50	53 Key	Without CR	Battery
Mode G	X-Y	SE4500	RCH50	53 Key	Without CR	Direct charging
Mode H	X-Y	SE4500	VR10	53 Key	Without CR	Direct charging
Mode I	X-Y	SE4500	VR10	28 Key	Without CR	Direct charging
Mode J	X-Y	SE4500	VR10	43 Key	Without CR	Direct charging
Mode K	X-Y	SE4500	VR10	33 Key	Without CR	Direct charging
Mode L	X-Y	SE4500	VR10	43 Key	With CR	Direct charging
Mode M	X-Z	SE4500	VR10	43 Key	Without CR	Direct charging
Mode N	Y-Z	SE4500	VR10	43 Key	Without CR	Direct charging

The worse radiated emission (Below 1GHz) was found in **Mode J** and the worse radiated emission (Above 1GHz) was found in **Mode N**. Therefore only the test data of the modes were recorded in this report.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

79 channels are provided for Bluetooth.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



A D T

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	OB	
1	√	-	-	-	-	EUT(Y-Z) + Scanner (SE1524) + Headset(RCH50) + Keypad(53) + Direct charging & Without CR
2	-	√	-	-	-	EUT(X-Y) + Scanner (SE4500) + Headset(VR10) + Keypad(43) + Direct charging & Without CR
3	-	-	√	√	√	EUT(Y-Z) + Scanner (SE4500) + Headset(VR10) + Keypad(43) + Direct charging & Without CR

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz

RE ³ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0	FHSS	8DPSK	DH5

RADIATED EMISSION TEST (BELOW 1 GHZ):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0	FHSS	8DPSK	DH5



A D T

RADIATED EMISSION TEST (ABOVE 1 GHZ):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	25deg. C, 61%RH	120Vac, 60Hz	Timmy Hu
RE<1G	24deg. C, 71%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	21deg. C, 67%RH	120Vac, 60Hz	Evan Huang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For conducted emission test					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	DELL	DCSCMF	9KKB32S	FCC DoC
2	MONITOR	DELL	E2210Hc	CN-OG337R-6418 0-97S-OQDS	FCC DoC
3	PRINTER	EPSON	LQ-300+II	G88Y074083	FCC DoC
4	MODEM	ACEEX	1414	0206026778	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-71619-99B-0476	FCC DoC
6	MOUSE	DELL	M056UOA	FOROOBF9	FCC DoC
7	HEADSET	Motorola	RCH50	NA	NA


For other test items					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	iPod shuffle	Apple	MC749TA/A	CC4DMFJUDFDM	NA
3	HEADSET	VXI	VR10	NA	NA

For conducted emission test					
No.	Signal cable description				
1	USB cable (unshielded, 1.8m with one core)				
2	VGA cable. (1.8m with two cores)				
3	USB cable.(1.8m)				
4	RS232 cable.(1.1m)				
5	USB cable.(1.8m with one core)				
6	USB cable.(1.8m)				
7	Audio cable (1m with one core)				
For other test items					
No.	Signal cable description				
1	USB cable (unshielded, 1.8m with one core)				
2	USB cable (shielded, 0.1m)				
3	Audio cable (1.1m with one core)				

NOTE: All power cords of the above support units are non shielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted emission test:

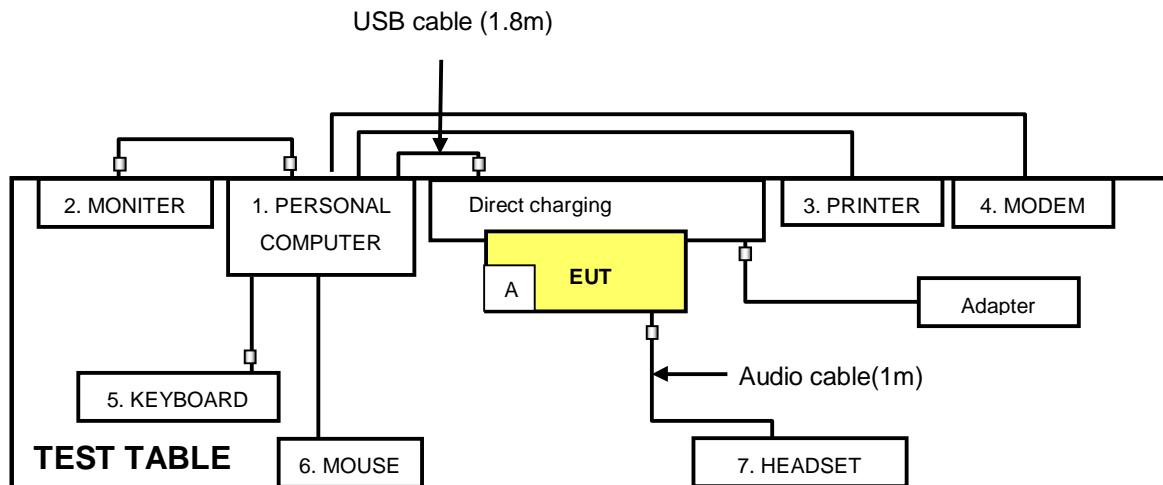

NOTE: 1. Item A is the SD Card.

For other test items

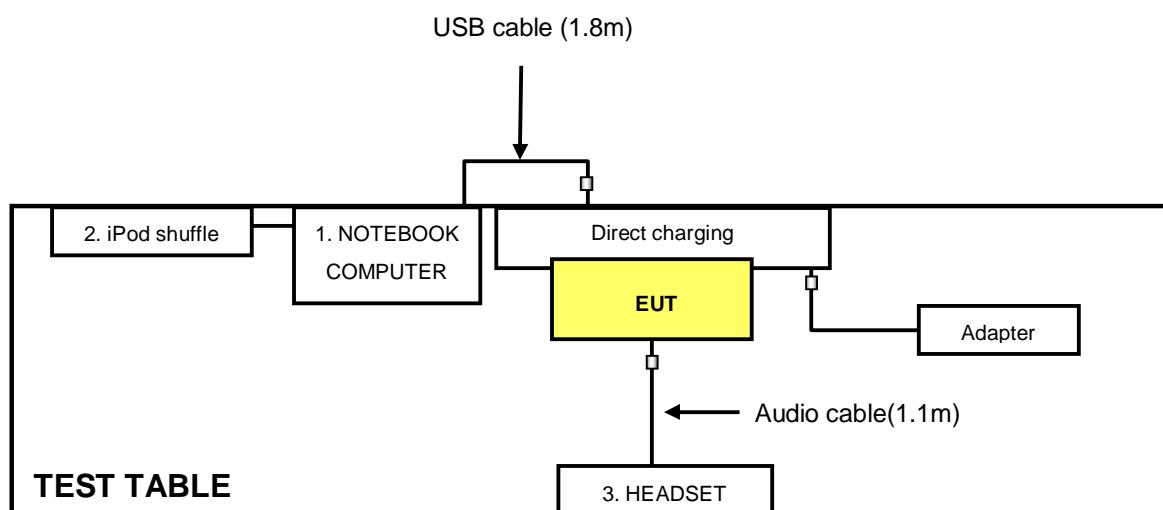



A D T

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Mar. 01, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software ADT	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: June 11, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

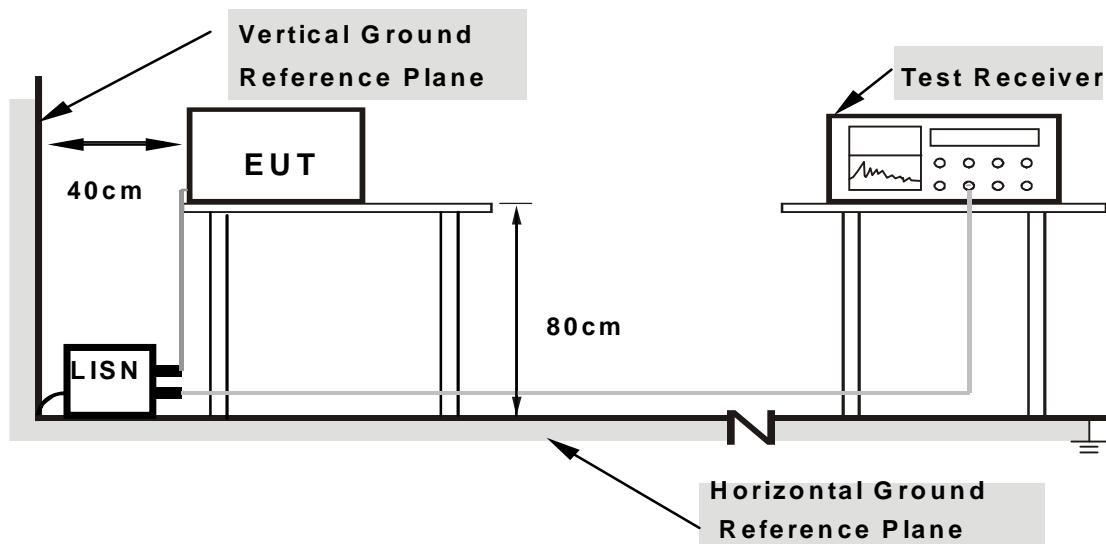

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “BTRegTest Ver 4.1.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH		9 kHz	
-------	----------	---------------	--	-------	--

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)		
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.06	52.22	40.47	52.28	40.53	66.00	56.00	-13.72	-15.47
2	0.18906	0.06	44.08	32.62	44.14	32.68	64.08	54.08	-19.94	-21.40
3	0.42344	0.07	42.69	34.34	42.76	34.41	57.38	47.38	-14.62	-12.97
4	0.46641	0.08	42.95	34.19	43.03	34.27	56.58	46.58	-13.55	-12.31
5	0.56016	0.08	36.86	30.04	36.94	30.12	56.00	46.00	-19.06	-15.88
6	0.70859	0.10	33.32	25.98	33.42	26.08	56.00	46.00	-22.58	-19.92

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

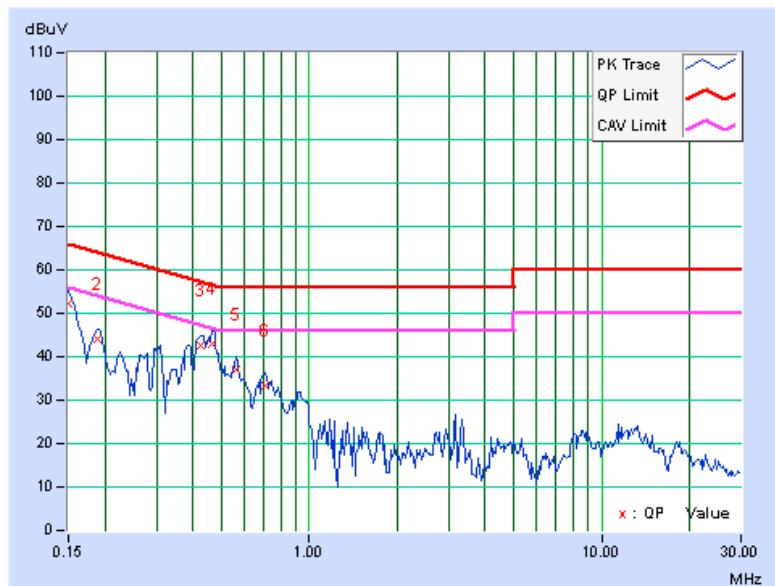


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.07	53.96	41.95	54.03	42.02	66.00	56.00	-11.97	-13.98
2	0.18516	0.07	47.03	32.04	47.10	32.11	64.25	54.25	-17.15	-22.14
3	0.42344	0.08	42.88	35.04	42.96	35.12	57.38	47.38	-14.42	-12.26
4	0.45859	0.08	41.48	33.13	41.56	33.21	56.72	46.72	-15.15	-13.50
5	0.55625	0.09	34.90	25.46	34.99	25.55	56.00	46.00	-21.01	-20.45
6	0.70469	0.10	32.42	24.49	32.52	24.59	56.00	46.00	-23.48	-21.41

REMARKS:

6. Q.P. and AV. are abbreviations of quasi-peak and average individually.
7. The emission levels of other frequencies were very low against the limit.
8. Margin value = Emission level - Limit value
9. Correction factor = Insertion loss + Cable loss
10. Emission Level = Correction Factor + Reading Value.

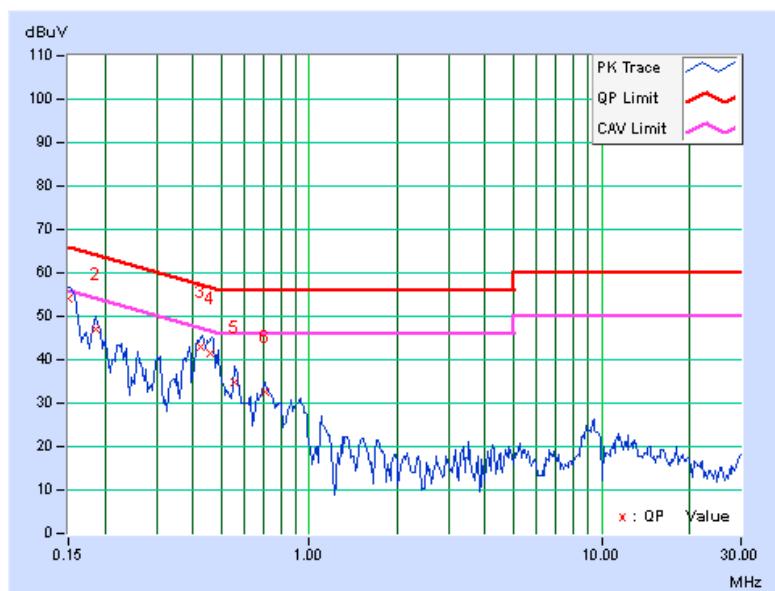



4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

For below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
*R&S Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in 966 Chamber No. G.
5. The FCC Site Registration No. is 966073.
6. The VCCI Site Registration No. is G-137.
7. The CANADA Site Registration No. is IC 7450H-2.
8. Tested Date: June 01, 2012



A D T

For above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: June 01, 2012



A D T

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 1MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

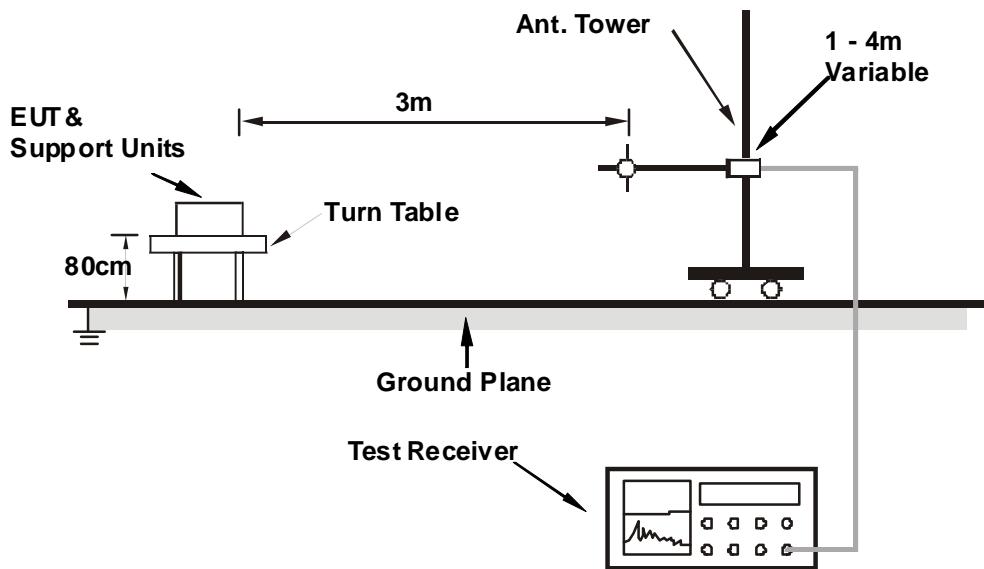

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	221.96	36.3 QP	46.0	-9.7	1.50 H	276	24.15	12.12
2	304.50	38.6 QP	46.0	-7.4	1.00 H	254	23.16	15.41
3	478.59	33.5 QP	46.0	-12.5	1.50 H	360	13.68	19.85
4	605.18	35.7 QP	46.0	-10.3	1.50 H	242	12.94	22.73
5	696.96	33.5 QP	46.0	-12.5	1.00 H	222	9.60	23.93
6	747.88	37.2 QP	46.0	-8.8	1.00 H	316	12.31	24.87

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	225.75	35.8 QP	46.0	-10.2	1.00 V	173	23.48	12.29
2	242.09	38.5 QP	46.0	-7.6	2.00 V	193	25.45	13.00
3	294.91	36.9 QP	46.0	-9.1	1.50 V	344	21.78	15.09
4	319.66	37.4 QP	46.0	-8.6	1.50 V	309	21.63	15.80
5	475.27	36.0 QP	46.0	-10.1	2.00 V	207	16.18	19.77
6	521.69	34.5 QP	46.0	-11.6	2.00 V	179	13.55	20.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.0 PK	74.0	-30.0	1.06 H	102	12.34	31.66
2	2390.00	13.9 AV	54.0	-40.1	1.06 H	102	-17.76	31.66
3	*2402.00	92.0 PK			1.06 H	100	60.30	31.70
4	*2402.00	90.5 AV			1.06 H	100	58.80	31.70
5	4804.00	56.3 PK	74.0	-17.7	1.02 H	213	17.40	38.90
6	4804.00	26.2 AV	54.0	-27.8	1.02 H	213	-12.70	38.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	1.00 V	70	24.84	31.66
2	2390.00	26.4 AV	54.0	-27.6	1.00 V	70	-5.26	31.66
3	*2402.00	90.1 PK			1.00 V	70	58.40	31.70
4	*2402.00	60.0 AV			1.00 V	70	28.30	31.70
5	4804.00	54.7 PK	74.0	-19.3	1.39 V	133	15.80	38.90
6	4804.00	24.6 AV	54.0	-29.4	1.39 V	133	-14.30	38.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.8 PK			1.22 H	114	62.97	31.83
2	*2441.00	64.7 AV			1.22 H	114	32.87	31.83
3	4882.00	60.9 PK	74.0	-13.1	1.13 H	206	21.73	39.17
4	4882.00	30.8 AV	54.0	-23.2	1.13 H	206	-8.37	39.17
5	7323.00	59.2 PK	74.0	-14.8	1.70 H	264	12.57	46.63
6	7323.00	29.1 AV	54.0	-24.9	1.70 H	264	-17.53	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.2 PK			1.17 V	348	58.37	31.83
2	*2441.00	60.1 AV			1.17 V	348	28.27	31.83
3	4882.00	59.1 PK	74.0	-14.9	1.28 V	132	19.93	39.17
4	4882.00	29.0 AV	54.0	-25.0	1.28 V	132	-10.17	39.17
5	7323.00	58.0 PK	74.0	-16.0	1.29 V	173	11.37	46.63
6	7323.00	27.9 AV	54.0	-26.1	1.29 V	173	-18.73	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.5 PK			1.21 H	114	60.55	31.95
2	*2480.00	62.4 AV			1.21 H	114	30.45	31.95
3	2483.50	56.1 PK	74.0	-17.9	1.21 H	114	24.13	31.97
4	2483.50	26.0 AV	54.0	-28.0	1.21 H	114	-5.97	31.97
5	4960.00	55.8 PK	74.0	-18.2	1.00 H	212	16.38	39.42
6	4960.00	25.7 AV	54.0	-28.3	1.00 H	212	-13.72	39.42
7	7440.00	59.3 PK	74.0	-14.7	1.76 H	252	12.74	46.56
8	7440.00	29.4 AV	54.0	-24.6	1.76 H	252	-17.16	46.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	88.9 PK			1.12 V	346	56.95	31.95
2	*2480.00	58.8 AV			1.12 V	346	26.85	31.95
3	2483.50	56.1 PK	74.0	-17.9	1.12 V	345	24.13	31.97
4	2483.50	26.0 AV	54.0	-28.0	1.12 V	345	-5.97	31.97
5	4960.00	54.2 PK	74.0	-19.8	1.28 V	133	14.78	39.42
6	4960.00	24.1 AV	54.0	-29.9	1.28 V	133	-15.32	39.42
7	7440.00	58.4 PK	74.0	-15.6	1.25 V	182	11.84	46.56
8	7440.00	28.3 AV	54.0	-25.7	1.25 V	182	-18.26	46.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.

**BT_8DPSK**

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.27 H	101	24.24	31.66
2	2390.00	25.8 AV	54.0	-28.2	1.27 H	101	-5.86	31.66
3	*2402.00	91.6 PK			1.27 H	101	59.90	31.70
4	*2402.00	61.5 AV			1.27 H	101	29.80	31.70
5	4804.00	66.3 PK	74.0	-7.7	1.00 H	205	27.40	38.90
6	4804.00	36.2 AV	54.0	-17.8	1.00 H	205	-2.70	38.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.16 V	336	25.04	31.66
2	2390.00	26.6 AV	54.0	-27.4	1.16 V	336	-5.06	31.66
3	*2402.00	88.1 PK			1.16 V	336	56.40	31.70
4	*2402.00	58.0 AV			1.16 V	336	26.30	31.70
5	4804.00	64.7 PK	74.0	-9.3	1.21 V	160	25.80	38.90
6	4804.00	34.6 AV	54.0	-19.4	1.21 V	160	-4.30	38.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + 20log(duty cycle).



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	93.4 PK			1.27 H	101	61.57	31.83
2	*2441.00	63.3 AV			1.27 H	101	31.47	31.83
3	4882.00	62.3 PK	74.0	-11.7	1.01 H	210	23.13	39.17
4	4882.00	32.2 AV	54.0	-21.8	1.01 H	210	-6.97	39.17
5	7323.00	58.7 PK	74.0	-15.3	1.78 H	240	12.07	46.63
6	7323.00	28.6 AV	54.0	-25.4	1.78 H	240	-18.03	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	89.2 PK			1.16 V	343	57.37	31.83
2	*2441.00	59.1 AV			1.16 V	343	27.27	31.83
3	4882.00	60.2 PK	74.0	-13.8	1.21 V	154	21.03	39.17
4	4882.00	30.1 AV	54.0	-23.9	1.21 V	154	-9.07	39.17
5	7323.00	58.1 PK	74.0	-15.9	1.19 V	202	11.47	46.63
6	7323.00	28.0 AV	54.0	-26.0	1.19 V	202	-18.63	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.8 PK			1.20 H	116	59.85	31.95
2	*2480.00	61.7 AV			1.20 H	116	29.75	31.95
3	2483.50	55.8 PK	74.0	-18.2	1.20 H	116	23.83	31.97
4	2483.50	25.7 AV	54.0	-28.3	1.20 H	116	-6.27	31.97
5	4960.00	59.7 PK	74.0	-14.3	1.00 H	215	20.28	39.42
6	4960.00	29.6 AV	54.0	-24.4	1.00 H	215	-9.82	39.42
7	7440.00	59.7 PK	74.0	-14.3	1.75 H	266	13.14	46.56
8	7440.00	29.6 AV	54.0	-24.4	1.75 H	266	-16.96	46.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	88.0 PK			1.14 V	346	56.05	31.95
2	*2480.00	57.9 AV			1.14 V	346	25.95	31.95
3	2483.50	56.1 PK	74.0	-17.9	1.14 V	346	24.13	31.97
4	2483.50	26.0 AV	54.0	-28.0	1.14 V	346	-5.97	31.97
5	4960.00	58.8 PK	74.0	-15.2	1.18 V	154	19.38	39.42
6	4960.00	28.7 AV	54.0	-25.3	1.18 V	154	-10.72	39.42
7	7440.00	57.7 PK	74.0	-16.3	1.24 V	195	11.14	46.56
8	7440.00	27.6 AV	54.0	-26.4	1.24 V	195	-18.96	46.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012

4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.3.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.3.5 TEST SETUP




4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




A D T

GFSK

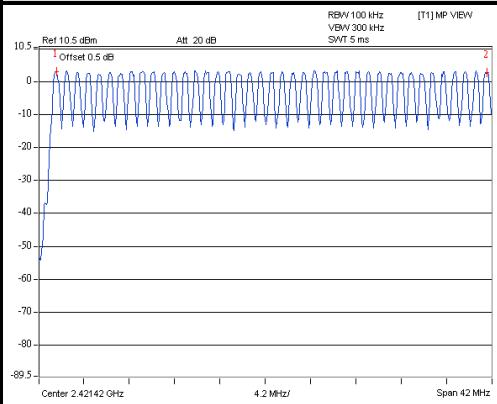

8DPSK

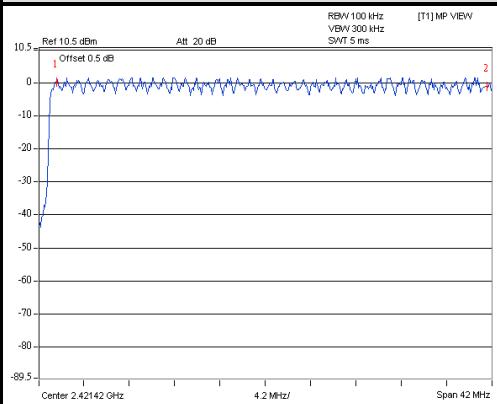



4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012

4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.




A D T

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP





4.4.6 TEST RESULTS

For GFSK:


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) *6.32=322.32 times	0.45	145.04	400
DH3	25 (times / 5 sec) *6.32=158 times	1.74	274.92	400
DH5	17 (times / 5 sec) *6.32=107.44 times	2.94	315.87	400

NOTE: Test plots of the transmitting time slot are shown on next page.




A D T

DH1

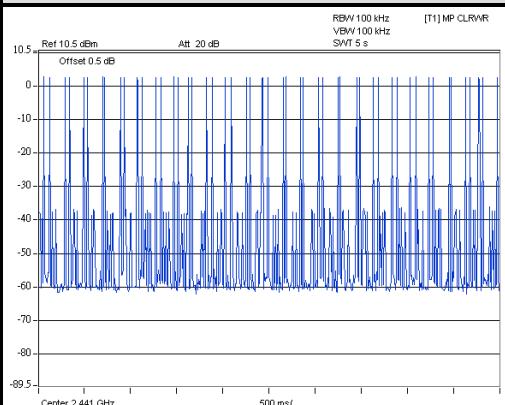


A D T

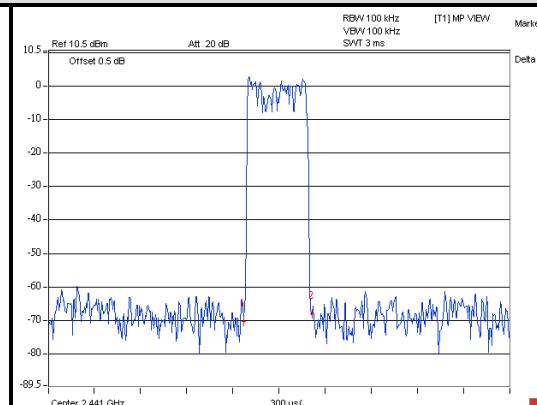


A D T

DH3

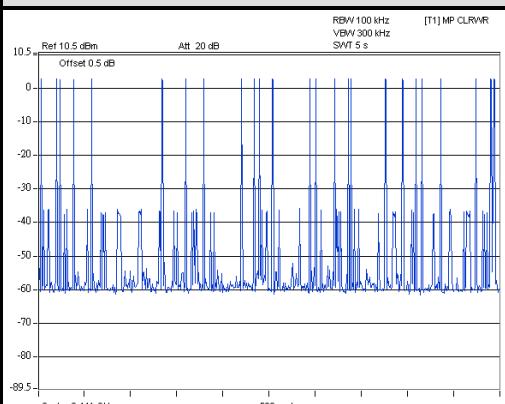


A D T

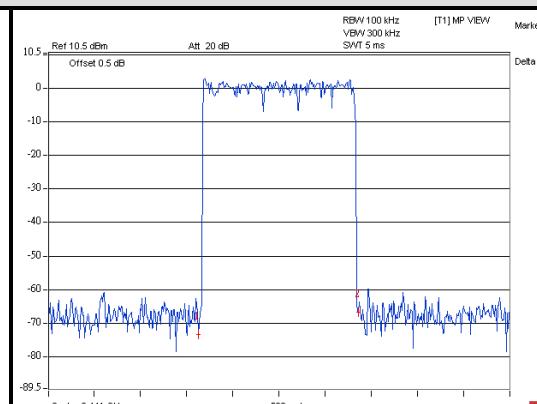


A D T

DH5

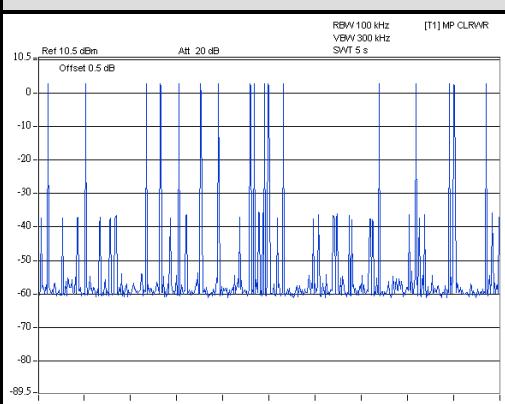

A D T

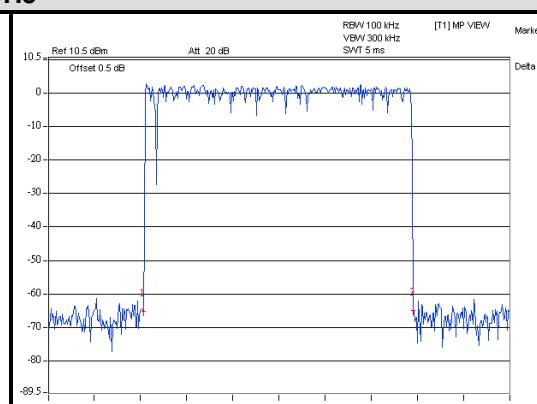

A D T



For 8DPSK:



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.294	92.904	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.73	295.21	400
DH5	17 (times / 5 sec) *6.32=107.44 times	2.9	311.58	400

NOTE: Test plots of the transmitting time slot are shown on next page.





A D T



DH1

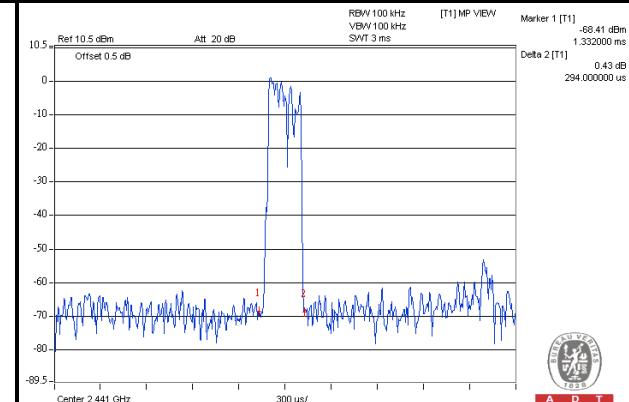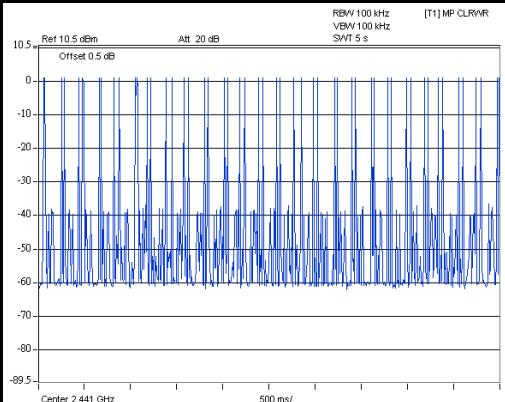

DH3

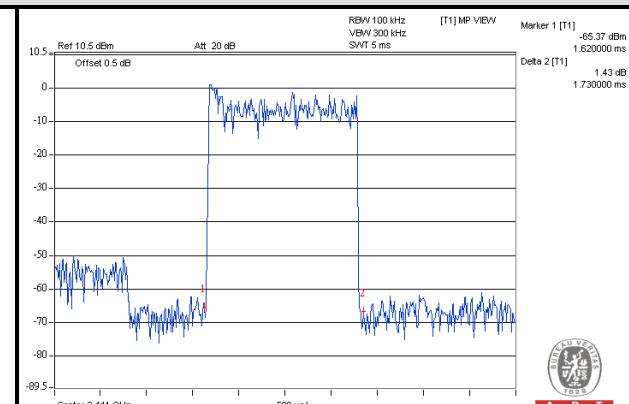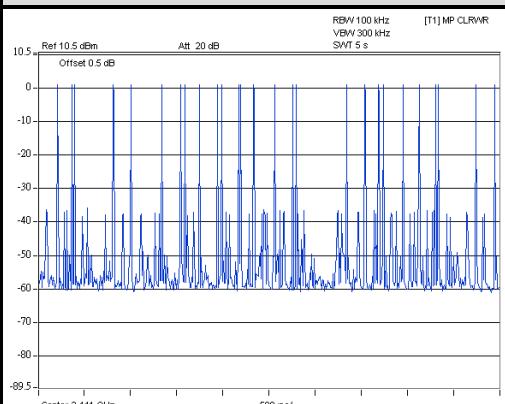

DH5

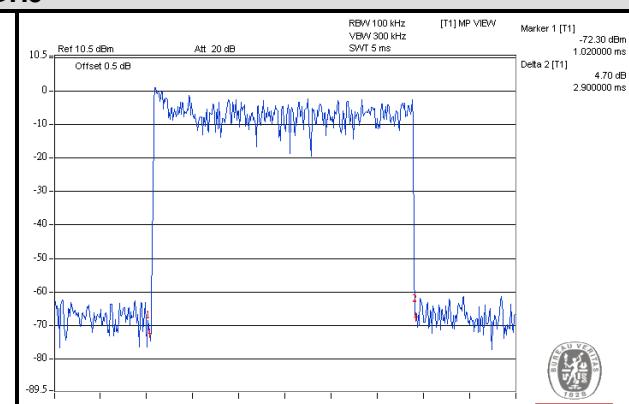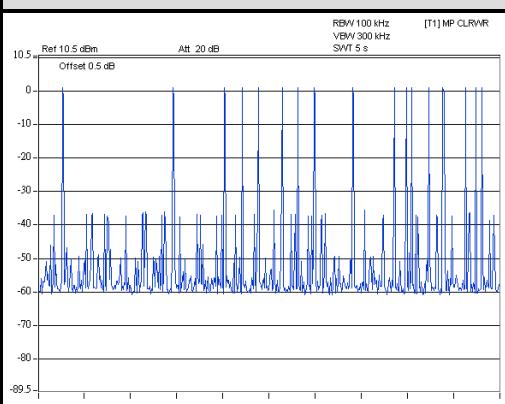



4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012


4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.5.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	
		GFSK	8DPSK
0	2402	0.99	1.32
39	2441	0.97	1.33
78	2480	0.98	1.31

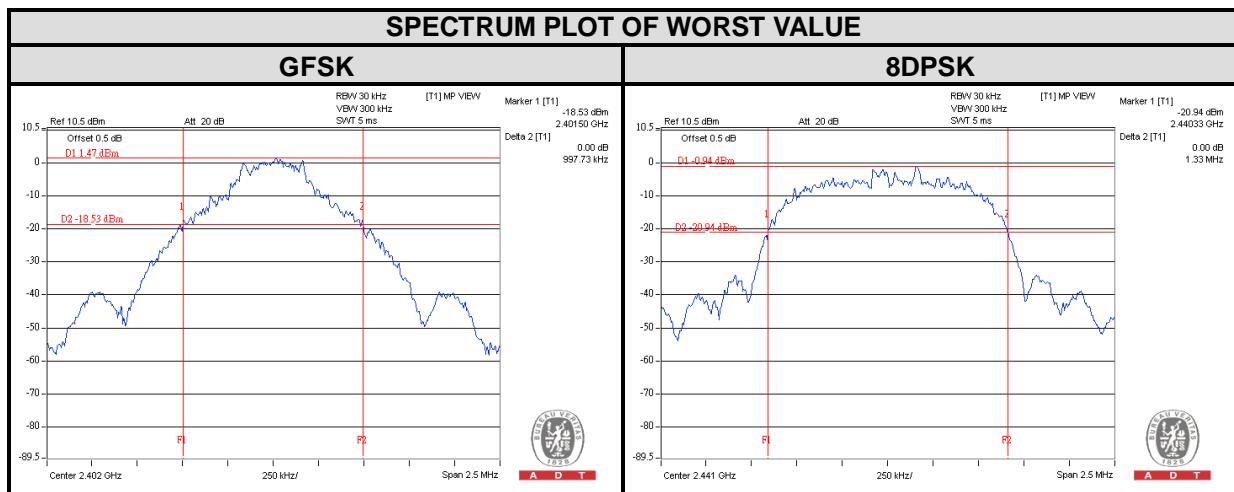



4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	1000036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012


4.6.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

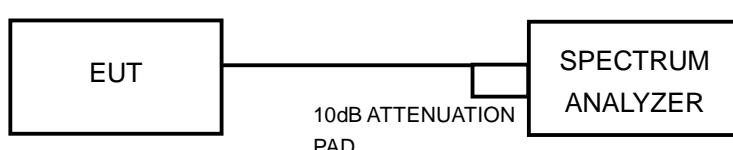




A D T

4.6.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)		20dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)		PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.99	1.32	0.66	0.88	PASS
39	2441	1.01	1.00	0.97	1.33	0.64	0.88	PASS
78	2480	1.01	1.01	0.98	1.31	0.65	0.87	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.

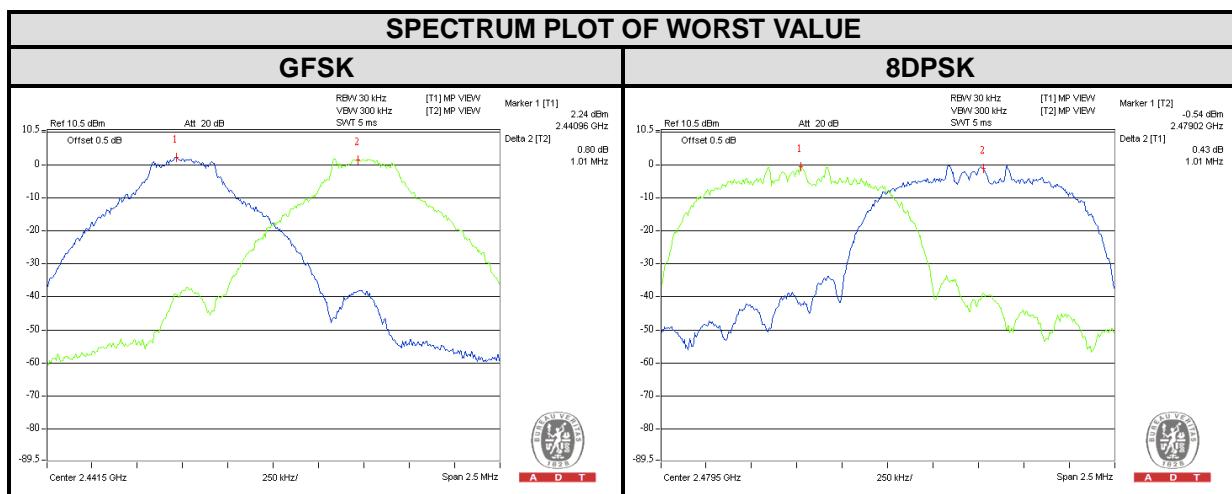



4.7 MAXIMUM OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

4.7.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012


4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.7.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	OUTPUT POWER (mW)		OUTPUT POWER (dBm)		POWER LIMIT (mW)	PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	2.339	2.891	3.69	4.61	125	PASS
39	2441	2.291	2.831	3.60	4.52	125	PASS
78	2480	2.183	2.710	3.39	4.33	125	PASS

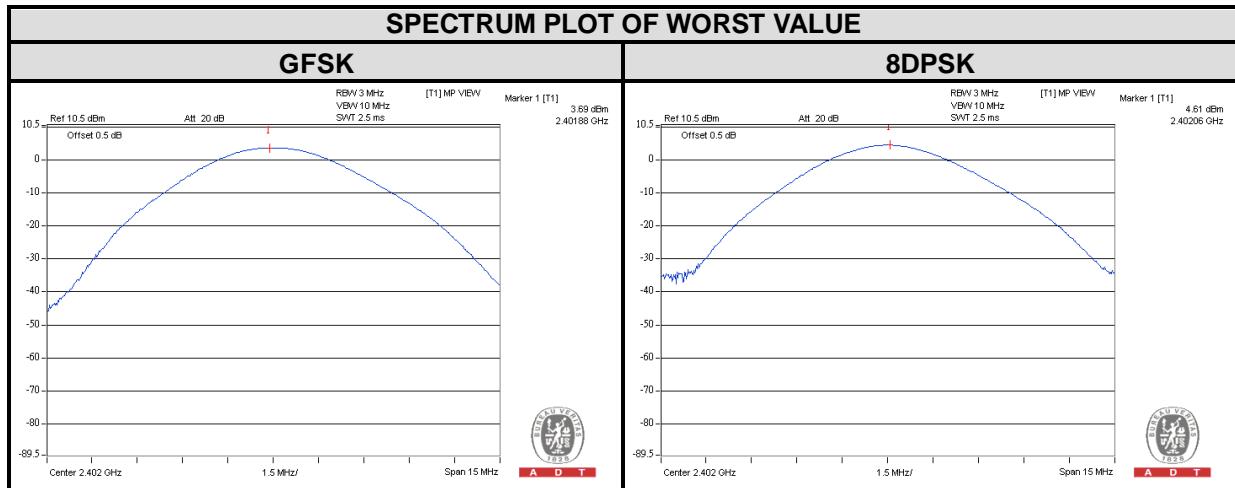



4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 06, 2012


4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP



4.8.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.8.7 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

GFSK


Hopping disabled_Low Channel

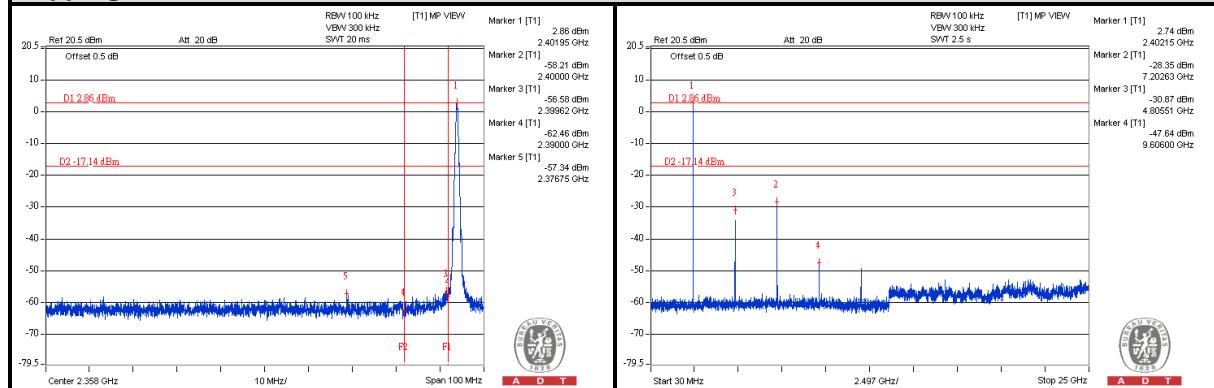


Hopping disabled_High Channel

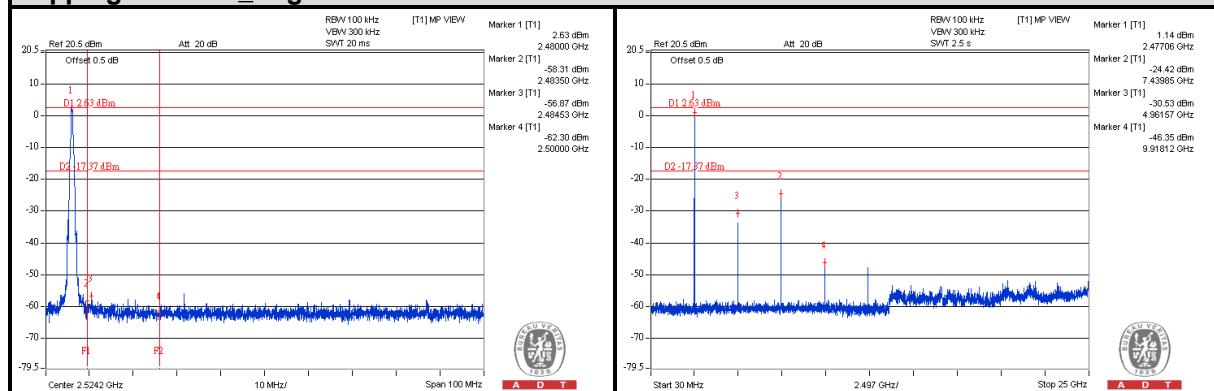

Hopping enabled_Low Channel

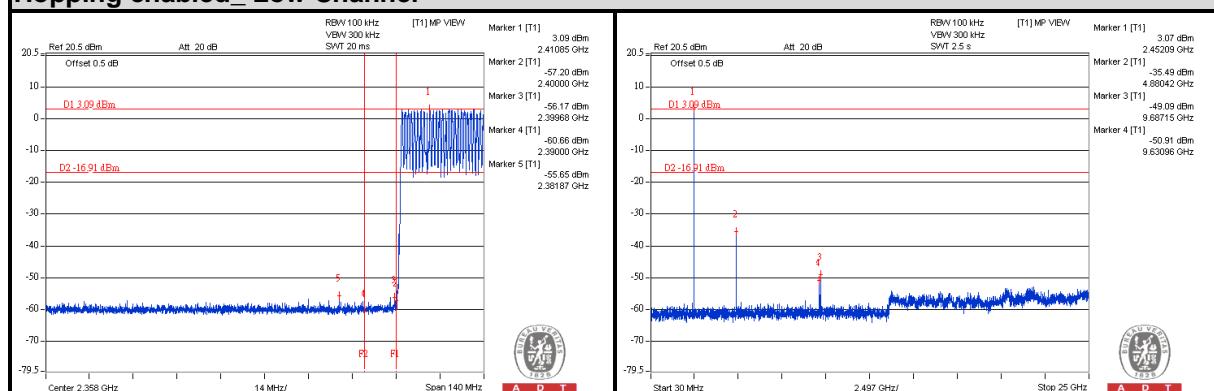

Hopping enabled_High Channel

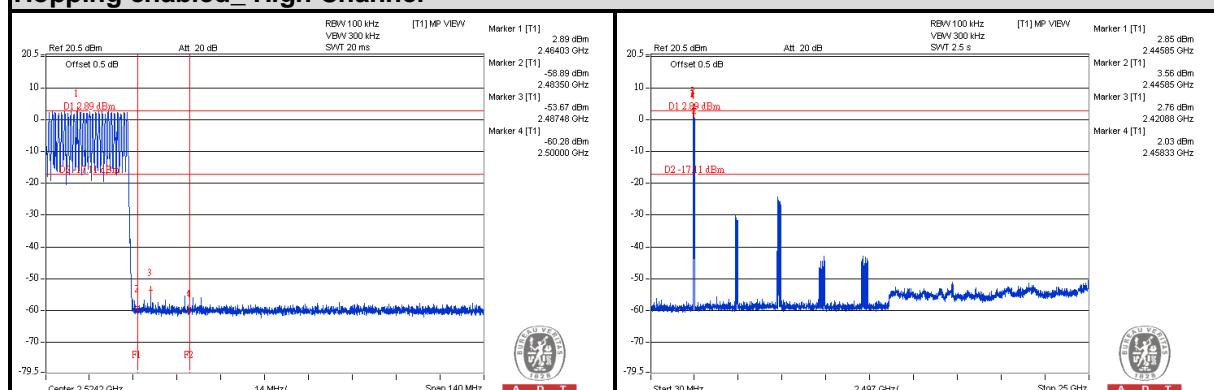





A D T

8DPSK


Hopping disabled_ Low Channel

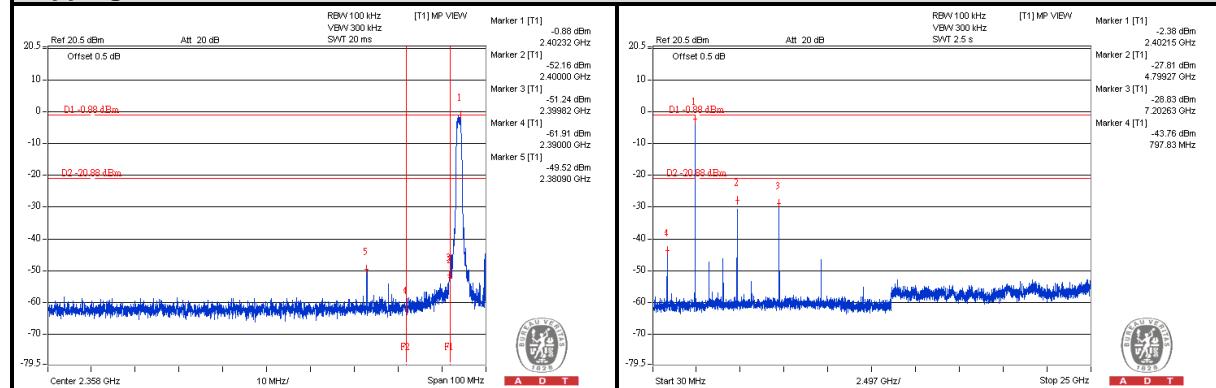


Hopping disabled_ High Channel

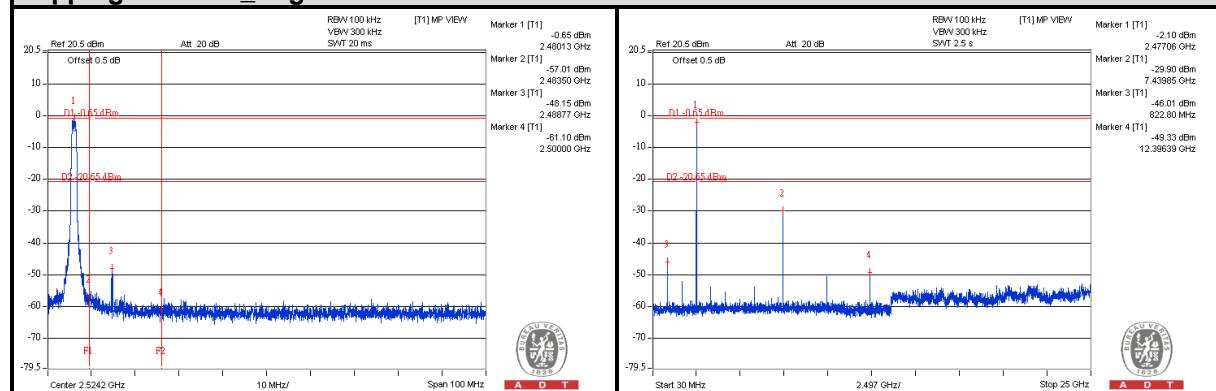

Hopping enabled_ Low Channel

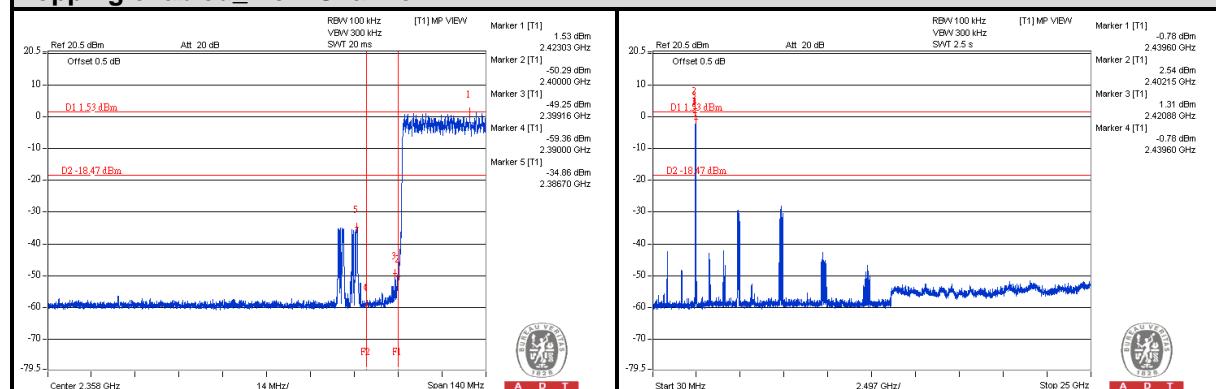

Hopping enabled_ High Channel

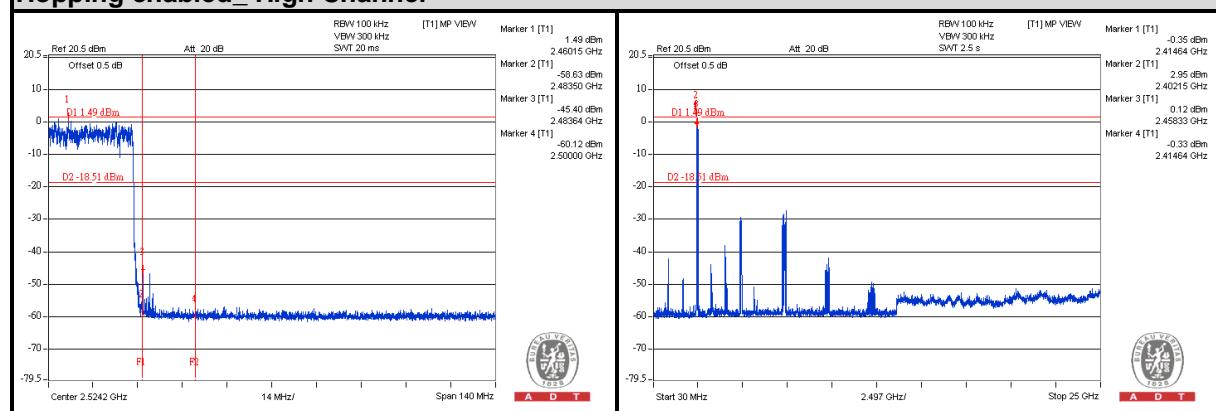



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---