



SAR TEST REPORT (15.407)

REPORT NO.: SA980313L03-1

MODEL NO.: MC9598

RECEIVED: Mar. 13, 2009

TESTED: Mar. 25 ~ Mar. 27, 2009

ISSUED: Apr. 02, 2009

APPLICANT: Motorola, Inc.

ADDRESS: One Motorola Plaza, Holtsville, NY 11742-1300
USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 40 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS	6
2.3 GENERAL INFORMATION OF THE SAR SYSTEM	7
2.4 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	10
3. DESCRIPTION OF SUPPORT UNITS	13
4. DESCRIPTION OF TEST MODES AND CONFIGURATIONS	14
4.1. DESCRIPTION OF TEST MODE	14
4.2. SUMMARY OF TEST RESULTS	15
5. TEST RESULTS	16
5.1 TEST PROCEDURES	16
5.2 MEASURED SAR RESULTS	18
5.3 SAR LIMITS	22
5.4 RECIPES FOR TISSUE SIMULATING LIQUIDS	23
5.5 TEST EQUIPMENT FOR TISSUE PROPERTY	27
6. SYSTEM VALIDATION	28
6.1 TEST EQUIPMENT	28
6.2 TEST PROCEDURE	29
6.3 VALIDATION RESULTS	31
6.4 SYSTEM VALIDATION UNCERTAINTIES	32
7. MEASUREMENT SAR PROCEDURE UNCERTAINTIES	33
7.1. PROBE CALIBRATION UNCERTAINTY	33
7.2. ISOTROPY UNCERTAINTY	34
7.3. BOUNDARY EFFECT UNCERTAINTY	34
7.4. PROBE LINEARITY UNCERTAINTY	35
7.5. READOUT ELECTRONICS UNCERTAINTY	35
7.6. RESPONSE TIME UNCERTAINTY	35
7.7. INTEGRATION TIME UNCERTAINTY	36
7.8. PROBE POSITIONER MECHANICAL TOLERANCE	37
7.9. PROBE POSITIONING	37
7.10. PHANTOM UNCERTAINTY	38
7.11. DASY5 UNCERTAINTY BUDGET	39
8. INFORMATION ON THE TESTING LABORATORIES	40
APPENDIX A: TEST CONFIGURATIONS AND TEST DATA	
APPENDIX B: ADT SAR MEASUREMENT SYSTEM	
APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION	



A D T

1. CERTIFICATION

PRODUCT: Mobile Computer

MODEL: MC9598

BRAND: Motorola

APPLICANT: Motorola, Inc.

TESTED: Mar. 25 ~ Mar. 27, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 2 (Section 2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

The above equipment (model: MC9598) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen, DATE : Apr. 02, 2009
Peggy Chen / Specialist

**TECHNICAL
ACCEPTANCE** : James Fan, DATE : Apr. 02, 2009
Responsible for RF
James Fan / Engineer

APPROVED BY : Gary Chang, DATE : Apr. 02, 2009
Gary Chang / Assistant Manager



A D T

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Computer	
MODEL NO.	MC9598	
FCC ID	UZ7MC9598	
POWER SUPPLY	3.7Vdc from rechargeable lithium battery 12Vdc from power adapter	
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM	
MODULATION TECHNOLOGY	DSSS, OFDM	
TRANSFER RATE	54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps	
FREQUENCY RANGE	5180 ~ 5320MHz & 5500 ~ 5700MHz	
NUMBER OF CHANNEL	5180 ~ 5320MHz: 8 5500 ~ 5700MHz: 11	
	Main antenna	Aux. antenna
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	7.780mW / Ch36: 5180MHz	10.593mW / Ch36: 5180MHz
	7.311mW / Ch40: 5200MHz	8.974mW / Ch40: 5200MHz
	7.161mW / Ch44: 5220MHz	9.078mW / Ch44: 5220MHz
	7.194mW / Ch48: 5240MHz	10.495mW / Ch48: 5240MHz
	8.375mW / Ch52: 5260MHz	10.069mW / Ch52: 5260MHz
	8.433mW / Ch56: 5280MHz	10.257mW / Ch56: 5280MHz
	9.594mW / Ch60: 5300MHz	11.455mW / Ch60: 5300MHz
	9.462mW / Ch64: 5320MHz	10.765mW / Ch64: 5320MHz
	10.069mW / Ch100: 5500MHz	10.280mW / Ch100: 5500MHz
	16.069mW / Ch104: 5520MHz	17.906mW / Ch104: 5520MHz
	22.439mW / Ch108: 5540MHz	24.266mW / Ch108: 5540MHz
	20.941mW / Ch112: 5560MHz	23.281mW / Ch112: 5560MHz
	19.275mW / Ch116: 5580MHz	21.777mW / Ch116: 5580MHz
	22.182mW / Ch120: 5600MHz	23.174mW / Ch120: 5600MHz
	20.941mW / Ch124: 5620MHz	22.080mW / Ch124: 5620MHz
	21.086mW / Ch128: 5640MHz	21.777mW / Ch128: 5640MHz
	18.578mW / Ch132: 5660MHz	19.275mW / Ch132: 5660MHz
	21.281mW / Ch136: 5680MHz	22.336mW / Ch136: 5680MHz
	6.486mW / Ch140: 5700MHz	7.178mW / Ch140: 5700MHz

AVERAGE SAR (1g)	0.058W/kg
ANTENNA TYPE	Main antenna: PIFA antenna with 3.52dBi gain Aux. antenna: PIFA antenna with 4.0dBi gain
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Battery

NOTE:

1. The models as identified below are identical to each other except of the following options:
- Barcode reader: 1D laser scanner / 2D Imager

BRAND	MODEL	DESCRIPTION
Motorola	MC9598	EVDO 1D Calculator Numeric
Motorola	MC9598	EVDO 2D Calculator Numeric
Motorola	MC9598	EVDO 1D Alpha Primary
Motorola	MC9598	EVDO 2D Alpha Primary
Motorola	MC9598	EVDO 1D Telephony Numeric
Motorola	MC9598	EVDO 2D Telephony Numeric
Motorola	MC9598	EVDO 1D Alpha Numeric Wide
Motorola	MC9598	EVDO 2D Alpha Numeric Wide

**the worst case had been marked by boldface.

2. The EUT has one lithium battery listed as below:

BRAND:	MOTOROLA
MODEL:	82-111636-01
RATING:	3.7Vdc, 4800mAh, 17.7Wh

3. The EUT is a Mobile Computer. The functions of EUT listed as below:

	REFERENCE REPORT
WLAN 802.11a/b/g (15.247)	SA980313L03
WLAN 802.11a (15.407)	SA980313L03-1
Bluetooth	SA980313L03-2
CDMA 850	
CDMA 1900	SA980313L03-3

4. The following accessories are for support units only.

PRODUCT	BRAND	MODEL	P/N	DESCRIPTION
USB charging Y cable	Motorola	-	25-116365-01R	1.8m shielded cable with one core
Headset	Motorola	-	50-11300-050R	0.8m non-shielded cable with one core
Adapter	HIPRO	HP-O2040D43	-	Input: 100-240Vac, 50-60Hz, 1.5A Output: 12Vdc, 3.33A, MAX 40W Power line: AC 1.7m non-shielded cable without core DC1.8m non-shielded cable with one core



A D T

5. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
6. The EUT operates in the 2.4GHz/5GHz frequency spectrum with throughput of up to 54Mbps.
7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01- 01)

RSS-102

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.



2.3 GENERAL INOFRMATION OF THE SAR SYSTEM

DASY5 (**software 5.0 Build 125**) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV3 ISOTROPIC E-FIELD PROBE (FREQUENCY BAND 5 ~ 6GHz)

DIMENSIONS	Overall length: 330 mm (Tip Length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
APPLICATION	General dosimetric measurements range 5 ~ 6 GHz. Fast automatic scanning in arbitrary phantoms (EX3DV3)

NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference “APPENDIX D” for the Calibration Certification Report.
2. For frequencies above 800 MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800 MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



TWIN SAM V4.0

CONSTRUCTION	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.
SHELL THICKNESS	2 ± 0.2mm
FILLING VOLUME	Approx. 25liters
DIMENSIONS	Height: 810mm; Length: 1000mm; Width: 500mm

SYSTEM VALIDATION KITS:

CONSTRUCTION	Symmetrical dipole with I/4 balun enables measurement of feedpoint impedance with NWA matched for use near flat phantoms filled with brain simulating solutions. Includes distance holder and tripod adaptor
CALIBRATION	Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions
FREQUENCY	5200MHz, 5500MHz
RETURN LOSS	> 20dB at specified validation position
POWER CAPABILITY	> 100W (f < 1GHz); > 40W (f > 1GHz)
OPTIONS	Dipoles for other frequencies or solutions and other calibration conditions upon request



A D T

DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION

The device holder for the mobile phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

2.4 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	σ
	- Density	ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$

V _i	=compensated signal of channel i	(i = x, y, z)
U _i	=input signal of channel i	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp _i	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-fieldprobes: } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H-fieldprobes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

V_i	=compensated signal of channel i	$(i = x, y, z)$
$Norm_i$	=sensor sensitivity of channel i $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes	$(i = x, y, z)$
$ConvF$	= sensitivity enhancement in solution	
a_{ij}	= sensor sensitivity factors for H-field probes	
F	= carrier frequency [GHz]	
E_i	= electric field strength of channel i in V/m	
H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR	= local specific absorption rate in mW/g
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [$\text{Siemens}/\text{m}$]
ρ	= equivalent tissue density in g/cm^3



A D T

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

3. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4. DESCRIPTION OF TEST MODES AND CONFIGURATIONS

4.1. DESCRIPTION OF TEST MODE

Test tool is CEcTXRX provided by client. It can control EUT to transmit continuously at specific channel, output power level, data rates and 100 % duty signal.

“Per KDB 248277, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than $\frac{1}{4}$ dB higher than those measured at the lowest data rate.”

Comparing output power of all modulations and data rates of each mode can find the lowest data rates has max output power. Therefore, EUT will set under lowest data rates to test.

“Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the transmission band corresponding to all channels is \leq 100 MHz, testing for the other channels is not required.”

According to test data from table of section 4.2, SAR value of highest output power channel of 5180~5240 and 5260~5320MHz is less than 0.8 W / kg and Peak SAR values are less than 1.6W/kg. Therefore, testing for other channels is not required.

“Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.4 W/kg and peak SAR is less than 0.8W/kg, where the transmission band corresponding to all channels is \leq 200 MHz, testing for the other channels is not required.”

According to test data from table of section 4.2, SAR value of highest output power channel of 5500~5700MHz is less than 0.4 W / kg and Peak SAR values are less than 0.8W/kg. Therefore, testing for other channels is not required.



A D T

ITEM	TEST MODE	MODULATION	ASSESSMENT POSITION	TESTED CHANNEL	REMARK
1	802.11a	BPSK	A / Cheek	36, 60, 108	Aux. antenna
2	802.11a	BPSK	A / Cheek	36, 60, 108	Main antenna
3	802.11a	BPSK	A / Tilt	36, 60, 108	Aux. antenna
4	802.11a	BPSK	B / Cheek	36, 60, 108	Aux. antenna
5	802.11a	BPSK	B / Cheek	36, 60, 108	Main antenna
6	802.11a	BPSK	B / Tilt	36, 60, 108	Aux. antenna
7	802.11a	BPSK	C : Body / Front (with sheath)	36, 60, 108	Aux. antenna
8	802.11a	BPSK	C : Body / Front (with sheath)	36, 60, 108	Main antenna

NOTE: Assessment position A: Right head position, B: Left head position, C: Body position; please refer to the test set up photo.

4.2. SUMMARY OF TEST RESULTS

ITEM		1	2	3	4
TEST MODE		802.11a			
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			
36	5180	0.021	0.024	0.017	0.036
60	5300	0.039	0.024	0.025	0.036
108	5540	0.058	0.040	0.044	0.039

ITEM		5	6	7	8
TEST MODE		802.11a			
CHAN.	FREQ. (MHz)	MEASURED VALUE OF 1g SAR (W/kg)			
36	5180	0.025	0.022	0.019	0.012
60	5300	0.030	0.025	0.025	0.034
108	5540	0.038	0.045	0.044	0.032

NOTE: The worst value has been marked by boldface.



A D T

5. TEST RESULTS

5.1 TEST PROCEDURES

Use the software to control the EUT channel and transmission power. Then record the conducted power before the testing. Place the EUT to the specific test location. After the testing, must writing down the conducted power of the EUT into the report. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY5 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 standards, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan was performed for the highest spatial SAR location. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.



A D T

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 3mm and maintained at a constant distance of ± 0.5 mm during a zoom scan to determine peak SAR locations. The distance is 3mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 8mm separation distance. The cube size is $7 \times 7 \times 7$ points consists of 343 points and the grid space is 5mm.

The measurement time is 0.5s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 3mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.

5.2 MEASURED SAR RESULTS

ENVIRONMENTAL CONDITION			Air Temperature : 22.9°C, Liquid Temperature : 22.5°C Humidity : 63%RH				
TESTED BY			Dylan Chiou		DATE		Mar. 25, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
36	5180	802.11a	10.593	10.461	-1.25	1	0.021
60	5300	802.11a	11.455	11.396	-0.52	1	0.039
108	5540	802.11a	24.266	24.159	-0.44	1	0.058
36	5180	802.11a	7.780	7.690	-1.16	2	0.024
60	5300	802.11a	9.594	9.513	-0.84	2	0.024
108	5540	802.11a	22.439	22.386	-0.24	2	0.040

NOTE:

1. Test configuration of each mode is described in section 4.1.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION			Air Temperature : 22.9°C, Liquid Temperature : 22.5°C Humidity : 63%RH				
TESTED BY		Dylan Chiou		DATE		Mar. 25, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
36	5180	802.11a	10.593	10.460	-1.26	3	0.017
60	5300	802.11a	11.455	11.392	-0.55	3	0.025
108	5540	802.11a	24.266	24.142	-0.51	3	0.044
36	5180	802.11a	10.593	10.451	-1.34	4	0.036
60	5300	802.11a	11.455	11.384	-0.62	4	0.036
108	5540	802.11a	24.266	24.055	-0.87	4	0.039

NOTE:

1. Test configuration of each mode is described in section 4.1.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION			Air Temperature : 22.9°C, Liquid Temperature : 22.5°C Humidity : 63%RH					
TESTED BY			Dylan Chiou		DATE		Mar. 25, 2009	
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)	
			BEGIN TEST	AFTER TEST				
36	5180	802.11a	7.780	7.534	-3.16	5	0.025	
60	5300	802.11a	9.594	9.389	-2.14	5	0.030	
108	5540	802.11a	22.439	22.231	-0.93	5	0.038	
36	5180	802.11a	10.593	10.442	-1.43	6	0.022	
60	5300	802.11a	11.455	11.372	-0.72	6	0.025	
108	5540	802.11a	24.266	23.989	-1.14	6	0.045	

NOTE:

1. Test configuration of each mode is described in section 4.1.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



A D T

ENVIRONMENTAL CONDITION			Air Temperature : 22.7°C, Liquid Temperature : 22.5°C Humidity : 64%RH				
TESTED BY			Dylan Chiou		DATE		Mar. 27, 2009
CHAN.	FREQ. (MHz)	TEST MODE	CONDUCTED POWER (mW)		POWER DRIFT (%)	DEVICE TEST POSITION MODE	MEASURED 1g SAR (W/kg)
			BEGIN TEST	AFTER TEST			
36	5180	802.11a	10.593	10.292	-2.84	7	0.019
60	5300	802.11a	11.455	11.112	-2.99	7	0.025
108	5540	802.11a	24.266	23.978	-1.19	7	0.044
36	5180	802.11a	7.780	7.668	-1.44	8	0.012
60	5300	802.11a	9.594	9.404	-1.98	8	0.034
108	5540	802.11a	22.439	22.288	-0.67	8	0.032

NOTE:

1. Test configuration of each mode is described in section 4.1.
2. In this testing, the limit for General Population Spatial Peak averaged over 1g, **1.6 W/kg**, is applied.
3. Please see the Appendix A for the data.
4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.

5.3 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(GENERAL POPULATION / UNCONTROLLED EXPOSURE ENVIRONMENT)	(OCCUPATIONAL / CONTROLLED EXPOSURE ENVIRONMENT)
Spatial Average (whole body)	0.08	0.4
Spatial Peak (averaged over 1 g)	1.6	8.0
Spatial Peak (hands / wrists / feet / ankles averaged over 10 g)	4.0	20.0

NOTE:

1. This limits accord to 47 CFR 2.1093 – Safety Limit.
2. The EUT property been complied with the partial body exposure limit under the general population environment.

5.4 RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 litters of tissue simulation liquid.

The following ingredients are used :

- **WATER-** Deionized water (pure H₂O), resistivity \geq 16 M - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125mPa.s, 2% in water, 20°C),
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobutyl ether (DGMBE), Fluka Chemie GmbH,
CAS # 112-34-5 - to reduce relative permittivity

THE INFORMATION FOR 5GHz SIMULATING LIQUID

The 5GHz liquids was purchased from SPEAG.

Body liquid model: HSL 5800, P/N: SL AAH 5800 AA

Head liquid model: M 5800, P/N: SL AAM 580 AD

5GHz liquids contain the following ingredients:

Water 64 - 78%

Mineral Oil 11 - 18%

Emulsifiers 9 - 15%

Additives and Salt 2 - 3%

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with >8mm thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' : ± 0.1 for ϵ'').
7. Conductivity can be calculated from ϵ'' by $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$.
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample ($\sim 50\text{ml}$) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY5 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900MHz) and press 'Option'-button).
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900MHz).



A D T

FOR WLAN 5GHz BAND SIMULATING LIQUID

TISSUE TYPE		HEAD		
LIQUID TYPE		HSL-5800		
SIMULATING LIQUID TEMP.		22.5		
TEST DATE		Mar. 25, 2009		
TESTED BY		Dylan Chiou		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
5180	Permitivity (ϵ)	36.0	36.9	2.50
5200		36.0	36.9	2.50
5300		35.9	36.7	2.23
5500		35.6	36.4	2.25
5680		35.6	36.4	2.25
5180	Conductivity (σ)	4.63	4.65	0.43
5200		4.66	4.68	0.43
5300		4.76	4.80	0.84
5500		4.96	5.04	1.61
5680		5.00	5.08	1.60
Dielectric Parameters Required at 22°C				



TISSUE TYPE	BODY			
LIQUID TYPE	MSL-5800			
SIMULATING LIQUID TEMP.	22.5			
TEST DATE	Mar. 27, 2009			
TESTED BY	Dylan Chiou			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
5180	Permitivity (ϵ)	49.0	50.7	3.47
5200		49.0	50.6	3.27
5300		48.9	50.4	3.07
5500		48.6	50.1	3.09
5680		48.6	49.9	2.67
5180	Conductivity (σ) S/m	5.28	5.32	0.76
5200		5.30	5.35	0.94
5300		5.42	5.51	1.66
5500		5.65	5.80	2.65
5680		5.70	5.85	2.63
Dielectric Parameters Required at 22°C				

5.5 TEST EQUIPMENT FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E8358A	US41480538	Nov. 27, 2008	Nov. 26, 2009
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance (k=1) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually $\pm 2.5\%$ and $\pm 5\%$ for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than $\pm 2.5\%$ (k=1). It can be substantially smaller if more accurate methods are applied.

6. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

6.1 TEST EQUIPMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1150	NA	NA
2	Signal Generator	Anritsu	68247B	984703	May 27, 2008	May 26, 2009
3	E-Field Probe	S & P	EX3DV3	3578	May 21, 2008	May 20, 2009
4	DAE	S & P	DAE	861	Sep. 22, 2008	Sep. 21, 2009
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D5GHzV2	1018	Apr. 21, 2008	Apr. 20, 2009
7	Power Meter	Agilent	E4416A	GB41291763	Sep. 28, 2008	Sep. 29, 2009
8	Power Sensor	Agilent	E9327A	US40441181	Sep. 28, 2008	Sep. 29, 2009

NOTE: Before starting the measurement, all test equipment shall be warmed up for 30min.

6.2 TEST PROCEDURE

Before the system performance check, we need only to tell the system which components (probe, medium, and device) are used for the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for mobile phones can be left in place but should be rotated away from the dipole.

1. The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.
2. The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid.

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY5 system is less than $\pm 0.1\text{mm}$.

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance $SAR_{tolerance} [\%]$ is <2%.

6.3 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
HSL5200	7.99 (1g)	8.16	2.13	10mm	Mar. 25, 2009
MSL5200	7.99 (1g)	8.32	4.13	10mm	Mar. 27, 2009
HSL5500	8.06 (1g)	8.46	4.96	10mm	Mar. 25, 2009
MSL5500	7.97 (1g)	7.86	-1.38	10mm	Mar. 27, 2009
TESTED BY	Dylan Chiou				

NOTE: Please see Appendix for the photo of system validation test.

6.4 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance ($\pm\%$)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty ($\pm\%$)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.60	Rectangular	$\sqrt{3}$	0.7	0.7	3.88	3.88	∞
Boundary effects	2.00	Rectangular	$\sqrt{3}$	1	1	1.15	1.15	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	1	2.71	2.71	∞
System Detection Limits	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	9.90	Rectangular	$\sqrt{3}$	1	1	5.72	5.72	∞
Max. SAR Eval.	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Dipole Related								
Dipole Axis to Liquid Distance	2.00	Rectangular	$\sqrt{3}$	1	1	1.15	1.15	145
Input Power Drift	5.00	Rectangular	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	3.33	Normal	1	0.64	0.43	2.13	1.43	∞
Liquid Permittivity (target)	5.00	Rectangular	$\sqrt{3}$	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	4.02	Normal	1	0.6	0.49	2.41	1.97	∞
Combined Standard Uncertainty						12.21	11.91	
Coverage Factor for 95%						K _p =2		
Expanded Uncertainty (K=2)						24.42	23.82	

NOTE: About the system validation uncertainty assessment, please reference the section 7.

7. MEASUREMENT SAR PROCEDURE UNCERTAINTIES

The assessment of spatial peak SAR of the hand handheld devices is according to IEEE 1528 / EN 62209-1. All testing situation shall be met below these requirements.

- The system is used by an experienced engineer who follows the manual and the guidelines taught during the training provided by SPEAG.
- The probe has been calibrated within the requested period and the stated uncertainty for the relevant frequency bands does not exceed 4.8% ($k=1$).
- The validation dipole has been calibrated within the requested period and the system performance check has been successful.
- The DAE unit has been calibrated within the within the requested period.
- The minimum distance between the probe sensor and inner phantom shell is selected to be between 4 and 5mm.
- The operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136 and PDC) and the measurement/integration time per point is >500 ms.
- The dielectric parameters of the liquid have been assessed using Agilent 85070D dielectric probe kit or a more accurate method.
- The dielectric parameters are within 5% of the target values.
- The DUT has been positioned as described in section 3.

7.1. PROBE CALIBRATION UNCERTAINTY

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO17025. The uncertainties are stated on the calibration certificate. For the most relevant frequency bands, these values do not exceed 4.8% ($k=1$). If evaluations of other bands are performed for which the uncertainty exceeds these values, the uncertainty tables given in the summary have to be revised accordingly.

7.2. ISOTROPY UNCERTAINTY

The axial isotropy tolerance accounts for probe rotation around its axis while the hemispherical isotropy error includes all probe orientations and field polarizations. These parameters are assessed by SPEAG during initial calibration. In 2001, SPEAG further tightened its quality controls and warrants that the maximal deviation from axial isotropy is ± 0.20 dB, while the maximum deviation of hemispherical isotropy is ± 0.40 dB, corresponding to $\pm 4.7\%$ and $\pm 9.6\%$, respectively. A weighting factor of cp equal to 0.5 can be applied, since the axis of the probe deviates less than 30 degrees from the normal surface orientation.

7.3. BOUNDARY EFFECT UNCERTAINTY

The effect can be estimated according to the following error approximation formula

$$SAR_{tolerance} [\%] = SAR_{be} [\%] \times \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{e^{-\frac{d_{be}}{\delta/2}}}{\delta/2}$$

$$d_{be} + d_{step} < 10\text{mm}$$

The parameter d_{be} is the distance in mm between the surface and the closest measurement point used in the averaging process; d_{step} is the separation distance in mm between the first and second measurement points; δ is the minimum penetration depth in mm within the head tissue equivalent liquids (i.e., $\delta = 13.95$ mm at 3GHz); SAR_{be} is the deviation between the measured SAR value at the distance d_{be} from the boundary and the wave-guide analytical value SAR_{ref} . DASY5 applies a boundary effect compensation algorithm according to IEEE 1528, which is possible since the axis of the probe never deviates more than 30 degrees from the normal surface orientation. $SAR_{be} [\%]$ is assessed during the calibration process and SPEAG warrants that the uncertainty at distances larger than 4mm is always less than 1%. In summary, the worst case boundary effect SAR tolerance[%] for scanning distances larger than 4mm is $< \pm 0.8\%$.

7.4. PROBE LINEARITY UNCERTAINTY

Field probe linearity uncertainty includes errors from the assessment and compensation of the diode compression effects for CW and pulsed signals with known duty cycles. This error is assessed using the procedure described in IEEE 1528 / EN 62209-1. For SPEAG field probes, the measured difference between CW and pulsed signals, with pulse frequencies between 10Hz and 1kHz and duty cycles between 1 and 100, is $< \pm 0.20\text{dB}$ ($< \pm 4.7\%$).

7.5. READOUT ELECTRONICS UNCERTAINTY

All uncertainties related to the probe readout electronics (DAE unit), including the gain and linearity of the instrumentation amplifier, its loading effect on the probe, and accuracy of the signal conversion algorithm, have been assessed accordingly to IEEE 1528 / EN 62209-1. The combination (root-sum-square RSS method) of these components results in an overall maximum error of $\pm 1.0\%$.

7.6. RESPONSE TIME UNCERTAINTY

The time response of the field probes is assessed by exposing the probe to a well-controlled electric field producing SAR larger than 2.0W/kg at the tissue medium surface. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/of switch of the power source. Analytically, it can be expressed as:

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{T_m}{T_m + \tau e^{-T_m/\tau} - \tau} - 1 \right)$$

where T_m is 500 ms, i.e., the time between measurement samples, and τ the time constant. The response time τ of SPEAG's probes is $< 5\text{ms}$. In the current implementation, DASY5 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

7.7. INTEGRATION TIME UNCERTAINTY

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization and can be assessed as follows

$$SAR_{tolerance} [\%] = 100 \times \sum_{allsub-frames} \frac{t_{frame}}{t_{integration}} \frac{slot_{idle}}{slot_{total}}$$

The tolerances for the different systems are given in Table 7.1, whereby the worst-case $SAR_{tolerance}$ is 2.6%.

System	$SAR_{tolerance} \%$
CW	0
CDMA*	0
WCDMA*	0
FDMA	0
IS-136	2.6
PDC	2.6
GSM/DCS/PCS	1.7
DECT	1.9
Worst-Case	2.6

TABLE 7.1

7.8. PROBE POSITIONER MECHANICAL TOLERANCE

The mechanical tolerance of the field probe positioner can introduce probe positioning uncertainties. The resulting SAR uncertainty is assessed by comparing the SAR obtained according to the specifications of the probe positioner with respect to the actual position defined by the geometric center of the probe sensors. The tolerance is determined as:

$$SAR_{tolerance} [\%] = 100 \times \frac{d_{ph}}{\delta/2}$$

The specified repeatability of the RX robot family used in DASY5 systems is $\pm 25\mu\text{m}$. The absolute accuracy for short distance movements is better than $\pm 0.1\text{mm}$, i.e., the $SAR_{tolerance} [\%]$ is better than 1.5% (rectangular).

7.9. PROBE POSITIONING

The probe positioning procedures affect the tolerance of the separation distance between the probe tip and the phantom surface as:

$$SAR_{tolerance} [\%] = 100 \times \frac{d_{ph}}{\delta/2}$$

where d_{ph} is the maximum deviation of the distance between the probe tip and the phantom surface. The optical surface detection has a precision of better than 0.2mm, resulting in an $SAR_{tolerance} [\%]$ of <2.9% (rectangular distribution). Since the mechanical detection provides better accuracy, 2.9% is a worst-case figure for DASY5 system.



A D T

7.10. PHANTOM UNCERTAINTY

The SAR measurement uncertainty due to SPEAG phantom shell production tolerances has been evaluated using

$$SAR_{tolerance} [\%] \cong 100 \times \frac{2d}{a}, \quad d \ll a$$

For a maximum deviation d of the inner and outer shell of the phantom from that specified in the CAD file of $\pm 0.2\text{mm}$, and a 10mm spacing a between source and tissue liquid, the calculated phantom uncertainty is $\pm 4.0\%$.

7.11. DASY5 UNCERTAINTY BUDGET

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement Equipment								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.60	Rectangular	$\sqrt{3}$	0.7	0.7	3.88	3.88	∞
Boundary effects	2.00	Rectangular	$\sqrt{3}$	1	1	1.15	1.15	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	1	2.71	2.71	∞
System Detection Limits	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	9.90	Rectangular	$\sqrt{3}$	1	1	5.72	5.72	∞
Max. SAR Eval.	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Test Sample Related								
Device Positioning	0.89	Normal	1	1	1	0.89	0.89	9
Device Holder	3.60	Normal	1	1	1	3.60	3.60	5
Power Drift	5.00	Rectangular	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	3.33	Normal	1	0.64	0.43	2.13	1.43	∞
Liquid Permittivity (target)	5.00	Rectangular	$\sqrt{3}$	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	4.02	Normal	1	0.6	0.49	2.41	1.97	∞
Combined Standard Uncertainty							12.71	12.42
Coverage Factor for 95%							kp=2	
Expanded Uncertainty (K=2)							25.42	24.84

TABLE 7.3

8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
GERMANY	TUV Rheinland
JAPAN	VCCI
NORWAY	NEMKO
CANADA	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
NETHERLANDS	Telefication
SINGAPORE	GOST-ASIA (MOU)
RUSSIA	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

---END---

APPENDIX A: TEST DATA

Liquid Level Photo

Tissue HSL5800MHz D=153mm



Tissue MSL5800MHz D=154mm



Date/Time: 2009/3/25 02:06:36

Test Laboratory: Bureau Veritas ADT

M01 Right Head Cheek 11a Ch36 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Low Channel 36/Area Scan (16x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.039 mW/g


Touch Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.916 V/m

Peak SAR (extrapolated) = 0.085 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

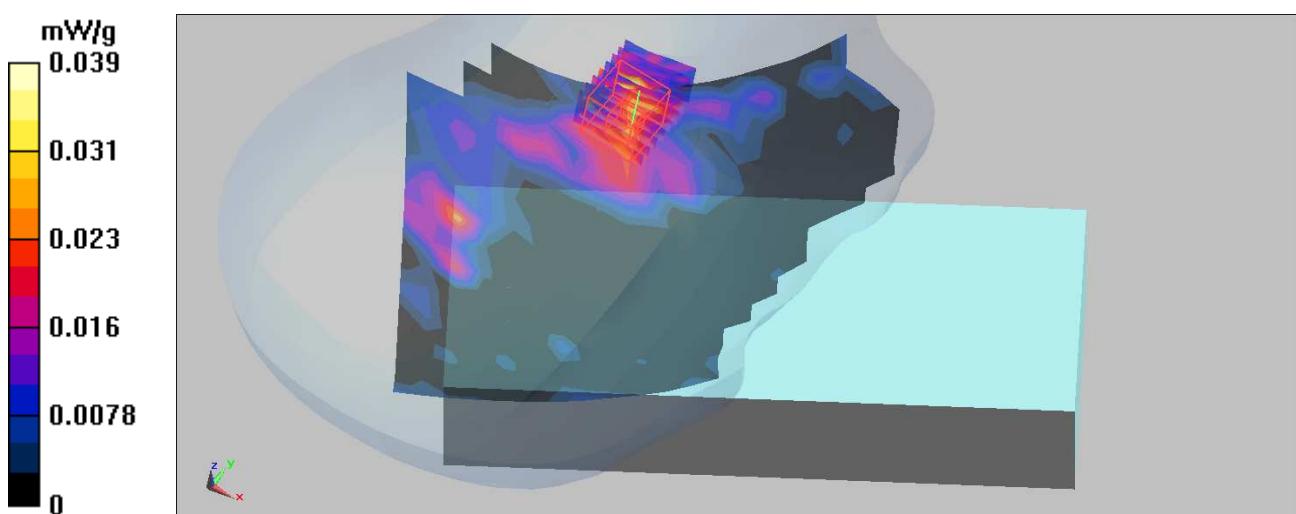

Date/Time: 2009/3/25 02:58:19

Test Laboratory: Bureau Veritas ADT

M01 Right Head Cheek 11a Ch60 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Mid Channel 60/Area Scan (16x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.051 mW/g


Touch Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.07 V/m

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

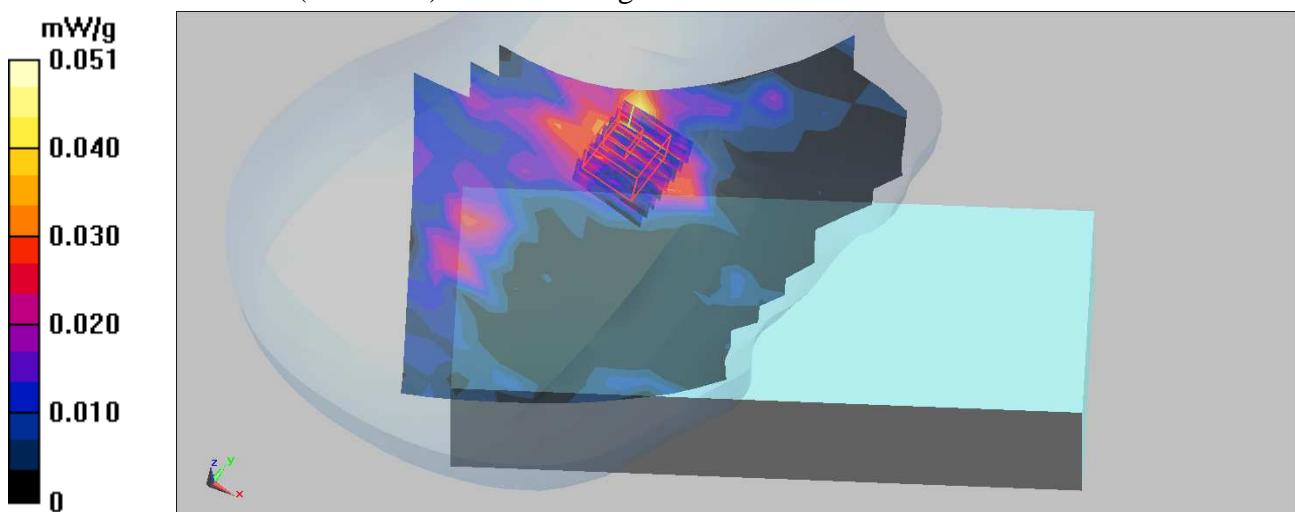

Date/Time: 2009/3/25 03:49:18

Test Laboratory: Bureau Veritas ADT

M01 Right Head Cheek 11a Ch108 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Mid Channel 108/Area Scan (16x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.070 mW/g

Touch Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid:


dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.827 V/m

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

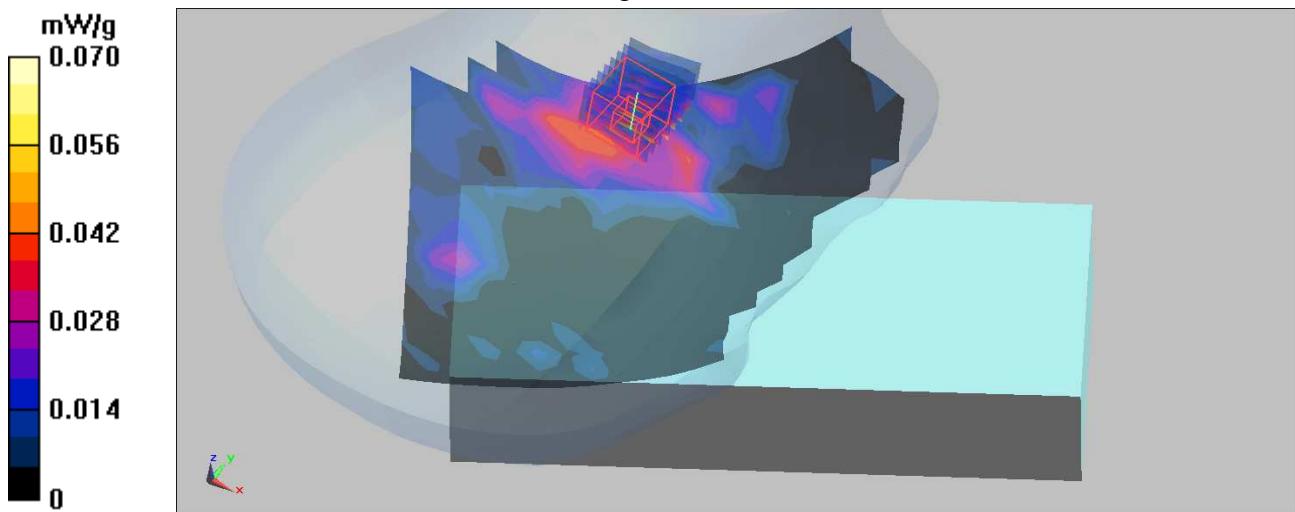

Date/Time: 2009/3/25 04:28:03

Test Laboratory: Bureau Veritas ADT

M02 Right Head Cheek 11a Ch36 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Low Channel 36/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.024 mW/g


Touch Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.562 V/m

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

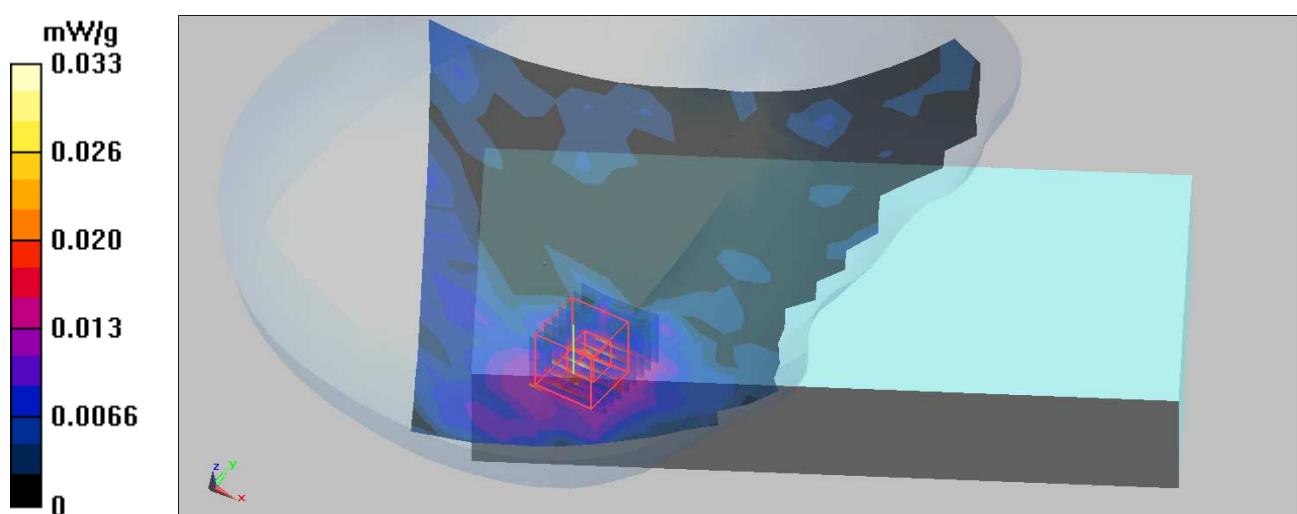

Date/Time: 2009/3/25 05:17:32

Test Laboratory: Bureau Veritas ADT

M02 Right Head Cheek 11a Ch60 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Mid Channel 60/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.039 mW/g


Touch Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.636 V/m

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

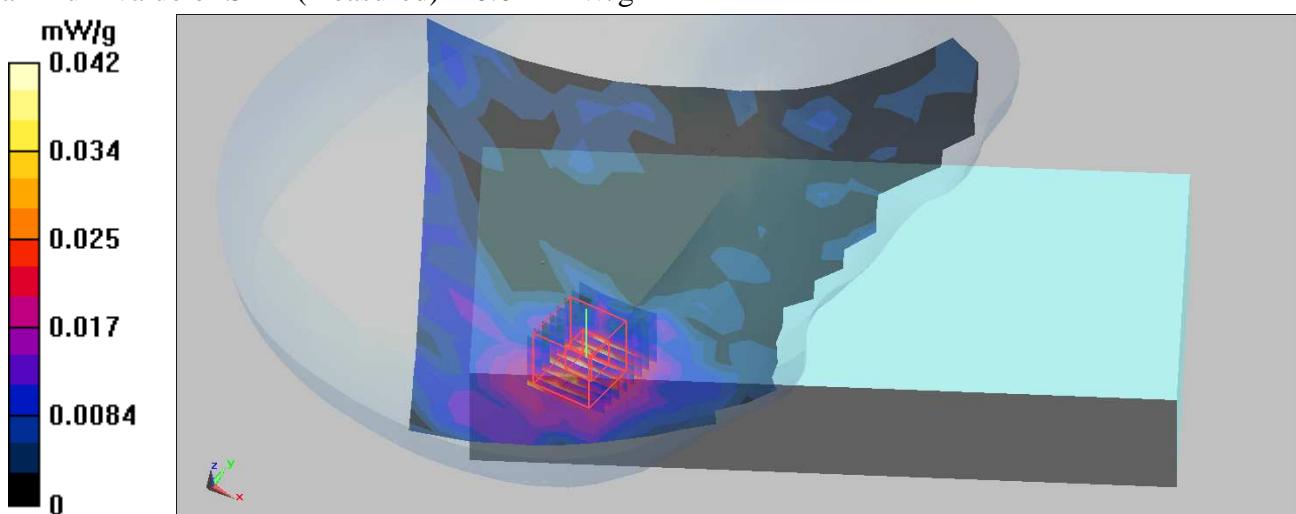

Date/Time: 2009/3/25 06:07:07

Test Laboratory: Bureau Veritas ADT

M02 Right Head Cheek 11a Ch108 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Touch Position - Mid Channel 108/Area Scan (15x27x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.046 mW/g

Touch Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid:


$dx=4.3$ mm, $dy=4.3$ mm, $dz=3$ mm

Reference Value = 0.677 V/m

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

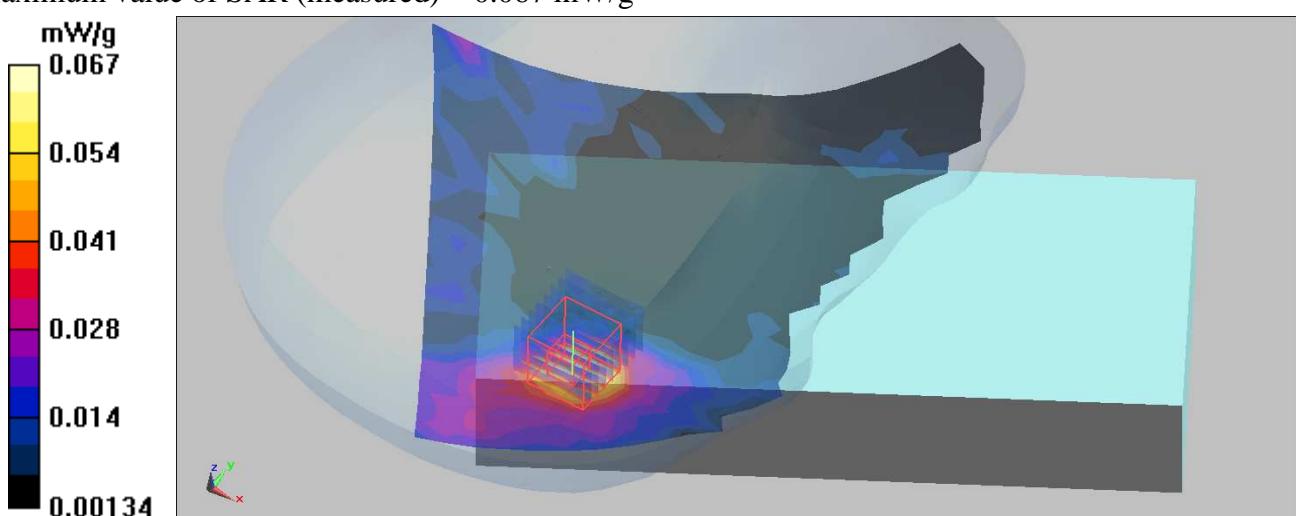

Date/Time: 2009/3/25 07:46:28

Test Laboratory: Bureau Veritas ADT

M03 Right Head Tilt 11a Ch36 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Low Channel 36/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.024 mW/g


Tilt Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.514 V/m

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00479 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

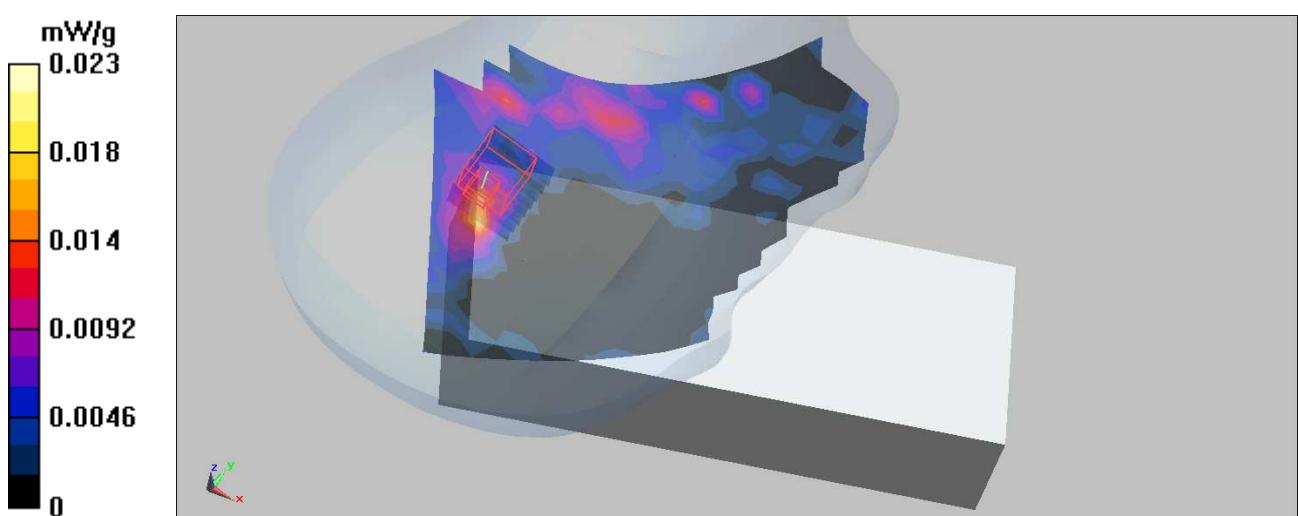

Date/Time: 2009/3/25 08:35:12

Test Laboratory: Bureau Veritas ADT

M03 Right Head Tilt 11a Ch60 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Mid Channel 60/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.033 mW/g


Tilt Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.537 V/m

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00866 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

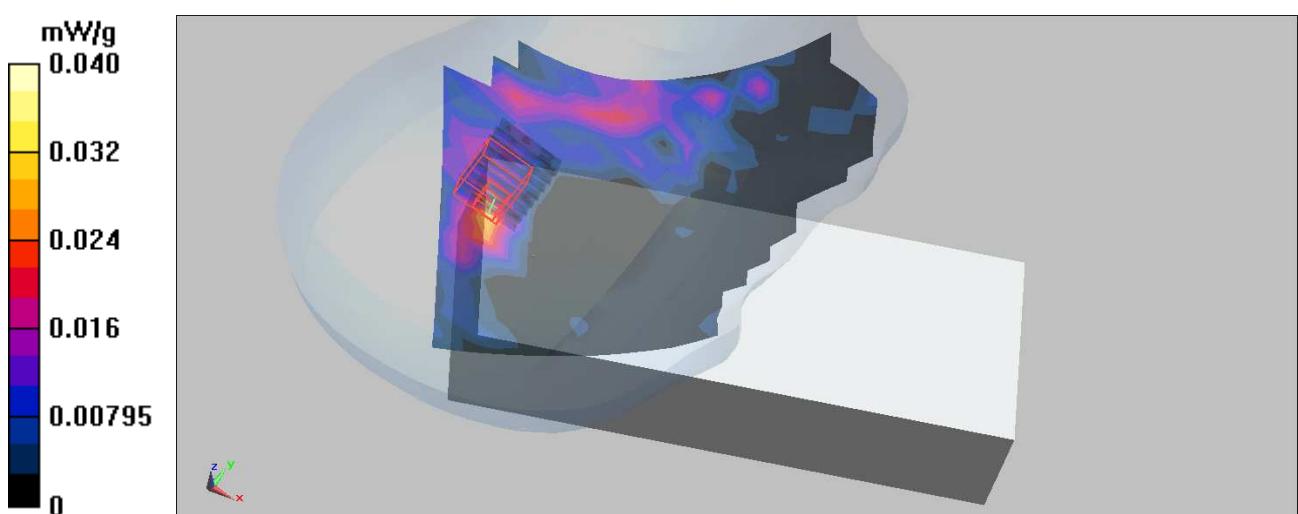

Date/Time: 2009/3/25 09:59:21

Test Laboratory: Bureau Veritas ADT

M03 Right Head Tilt 11a Ch108 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Mid Channel 108/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.049 mW/g

Tilt Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.548 V/m

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.039 mW/g


Tilt Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 1: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.548 V/m

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

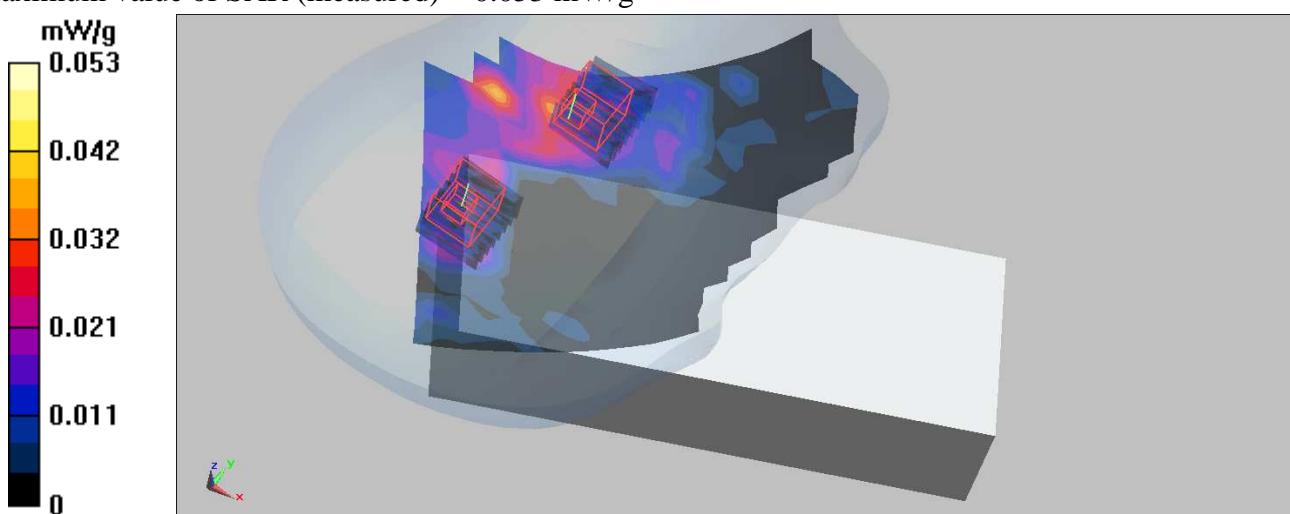

Date/Time: 2009/3/25 12:17:04

Test Laboratory: Bureau Veritas ADT

M04 Left Head Cheek 11a Ch36 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Low Channel 36/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.028 mW/g


Cheek Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.000 V/m

Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

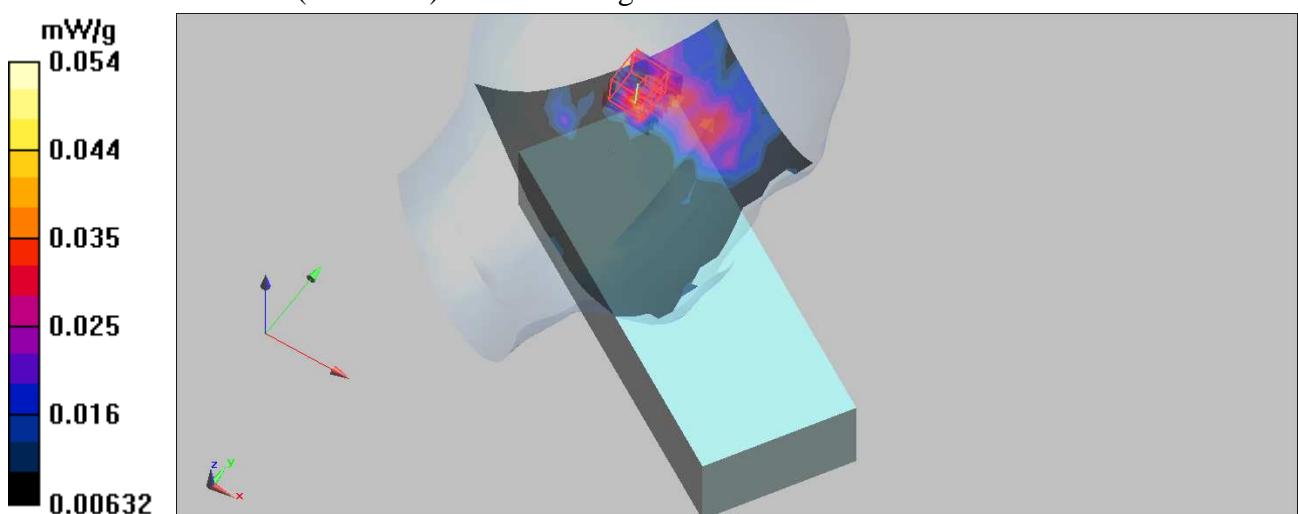

Date/Time: 2009/3/25 01:05:58

Test Laboratory: Bureau Veritas ADT

M04 Left Head Cheek 11a Ch60 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Mid Channel 60/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.041 mW/g


Cheek Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.18 V/m

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

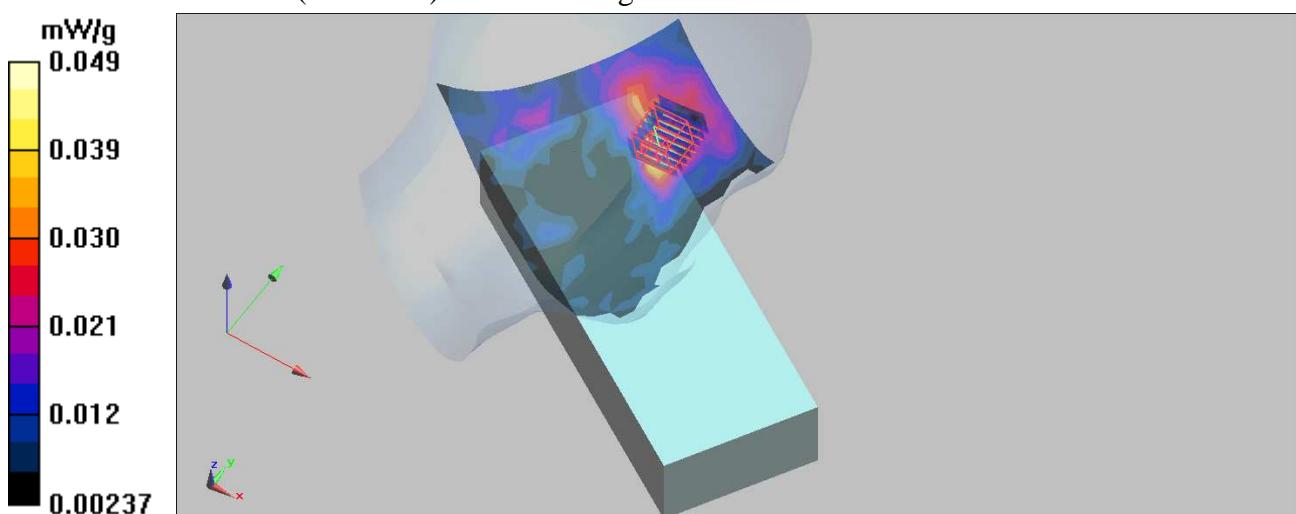

Date/Time: 2009/3/25 01:54:43

Test Laboratory: Bureau Veritas ADT

M04 Left Head Cheek 11a Ch108 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Mid Channel 108/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.074 mW/g

Cheek Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid:


dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.91 V/m

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

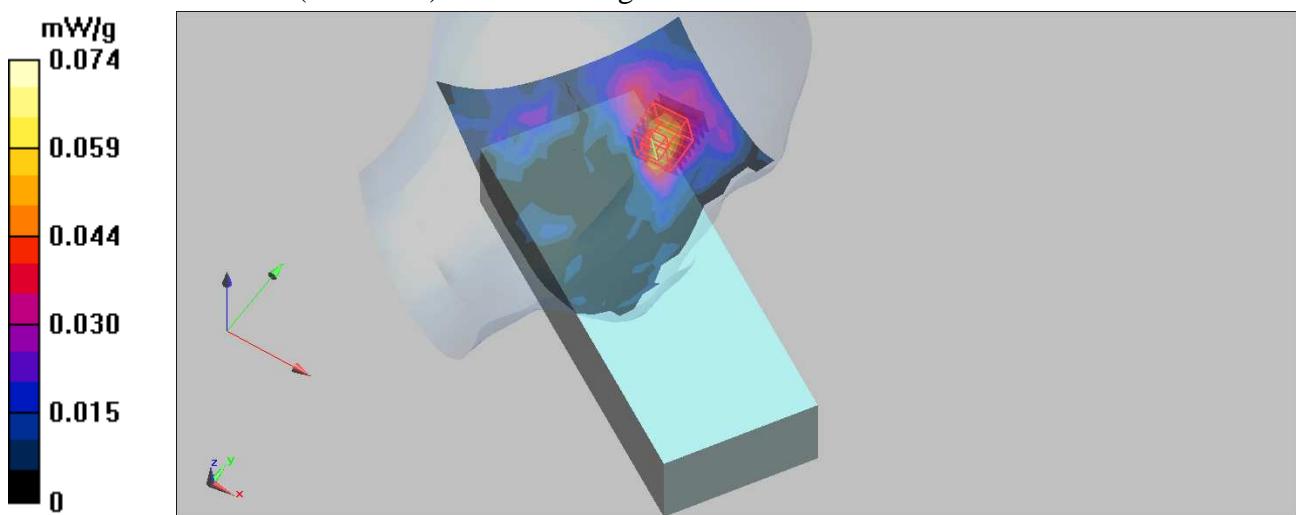

Date/Time: 2009/3/25 03:31:18

Test Laboratory: Bureau Veritas ADT

M05 Left Head Cheek 11a Ch36 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Low Channel 36/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.026 mW/g


Cheek Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.790 V/m

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

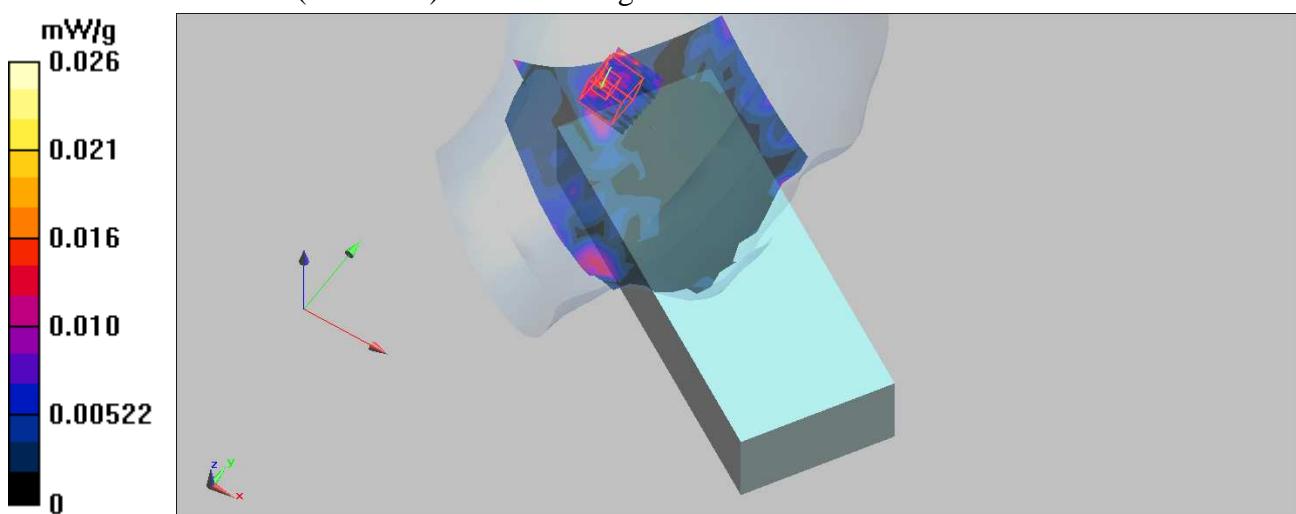

Date/Time: 2009/3/25 04:19:20

Test Laboratory: Bureau Veritas ADT

M05 Left Head Cheek 11a Ch60 ANT MAIN

DUT: PDA ; Type: MC 9596

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Mid Channel 60/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.037 mW/g


Cheek Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.17 V/m

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.041 mW/g

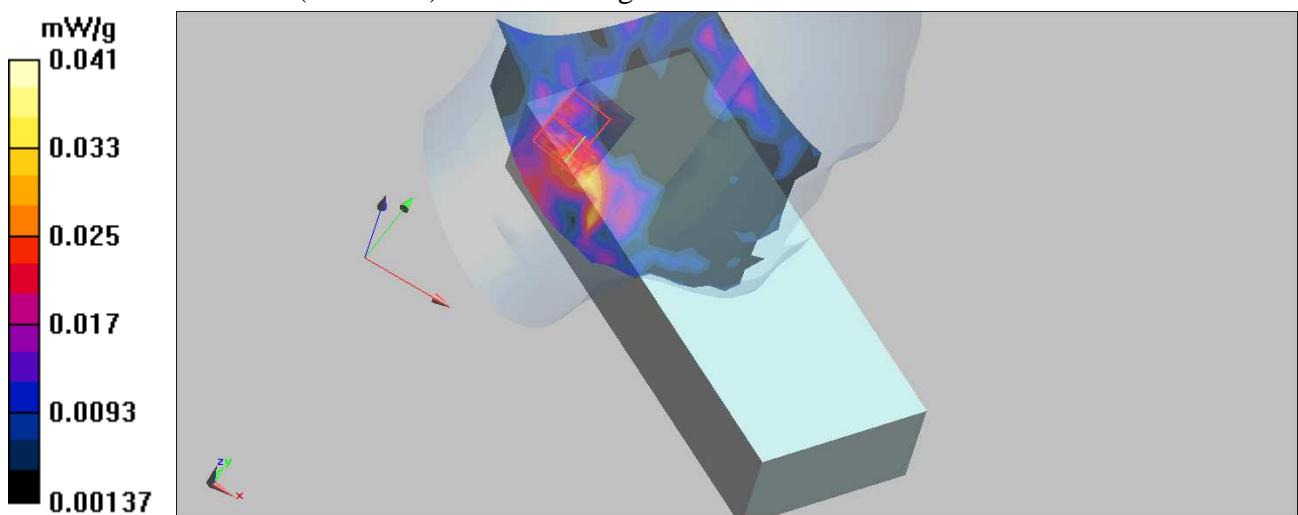

Date/Time: 2009/3/25 05:07:40

Test Laboratory: Bureau Veritas ADT

M05 Left Head Cheek 11a Ch108 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Cheek Position - Mid Channel 108/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.044 mW/g

Cheek Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid:


dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.16 V/m

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

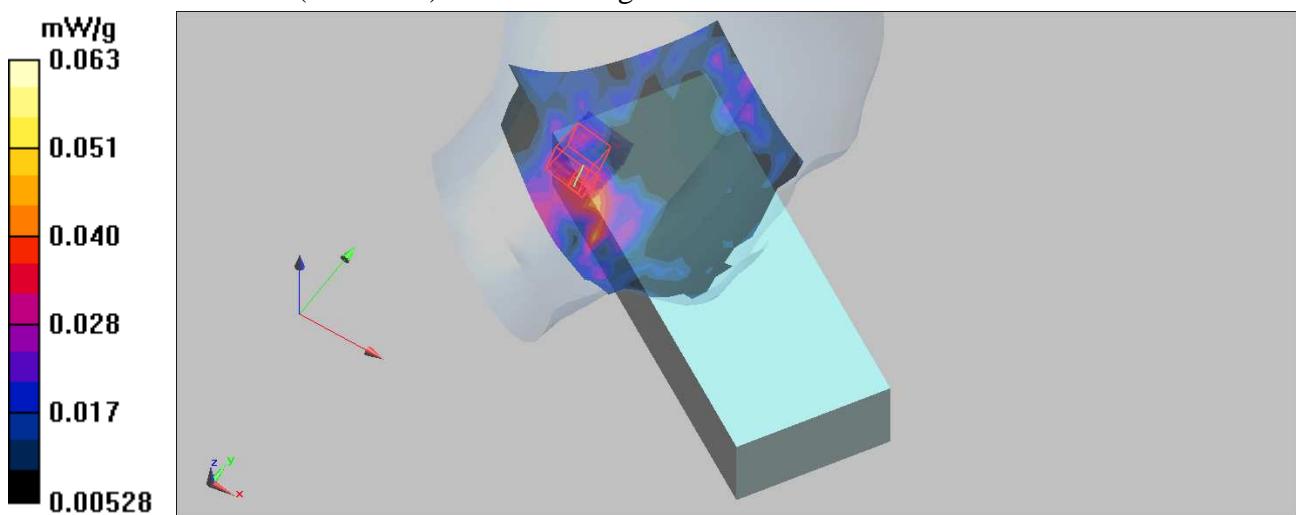

Test Laboratory: Bureau Veritas ADT

M06 Left Head Tilt 11a Ch36 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Low Channel 36/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.022 mW/g


Tilt Position - Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.401 V/m

Peak SAR (extrapolated) = 0.099 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.032 mW/g

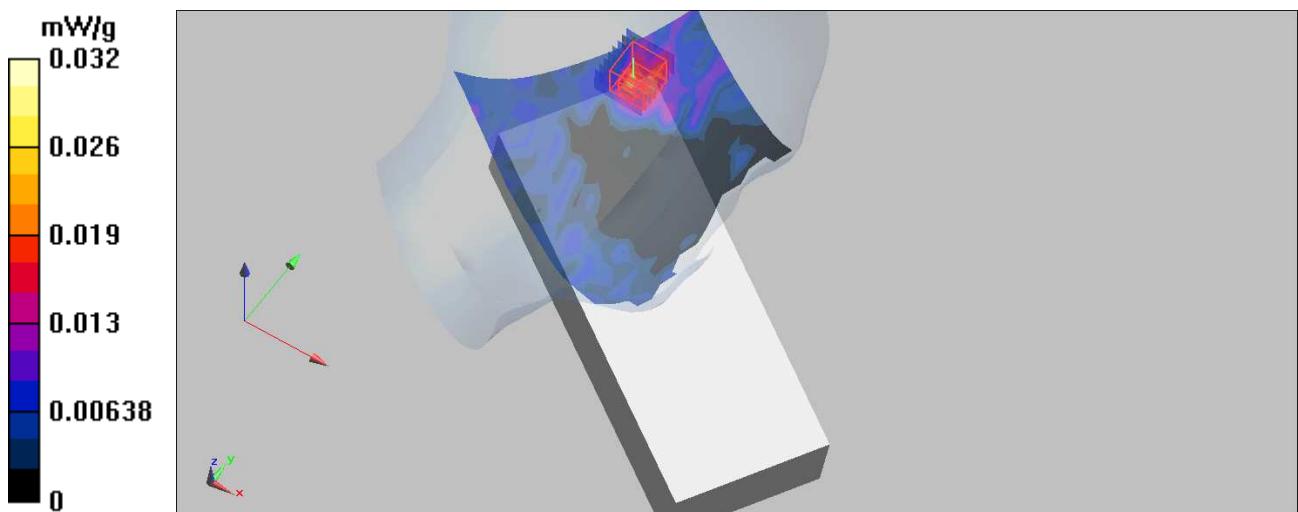

Test Laboratory: Bureau Veritas ADT

M06 Left Head Tilt 11a Ch60 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.8$ mho/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Mid Channel 60/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.035 mW/g


Tilt Position - Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.552 V/m

Peak SAR (extrapolated) = 0.099 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00995 mW/g

Maximum value of SAR (measured) = 0.043 mW/g

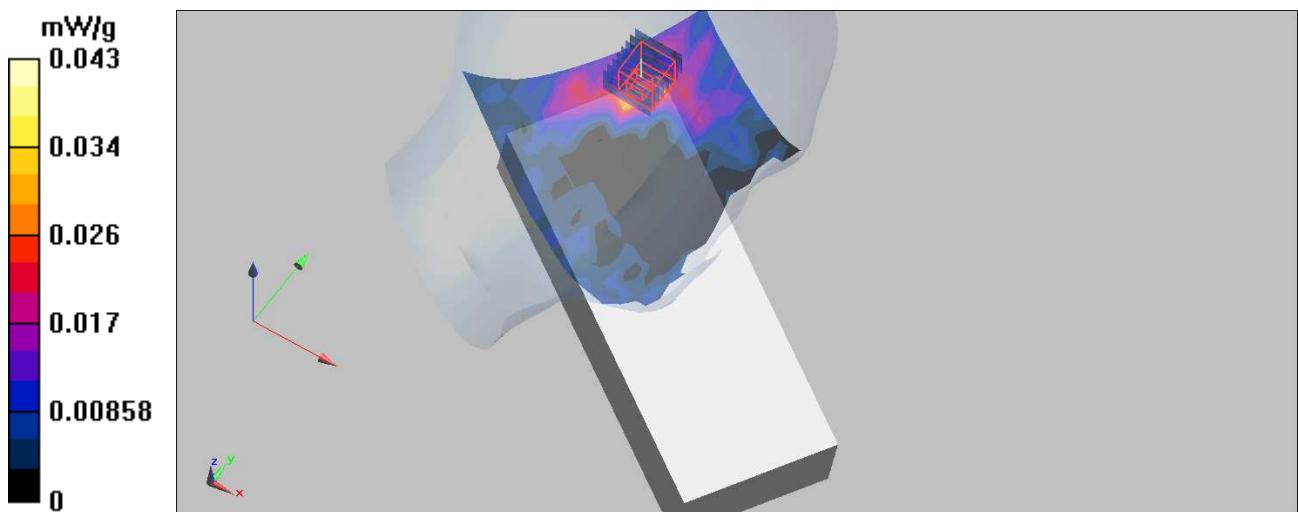

Date/Time: 2009/3/25 08:23:17

Test Laboratory: Bureau Veritas ADT

M06 Left Head Tilt 11a Ch108 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.08$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Tilt Position - Mid Channel 108/Area Scan (15x27x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.053 mW/g


Tilt Position - Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.08 V/m

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

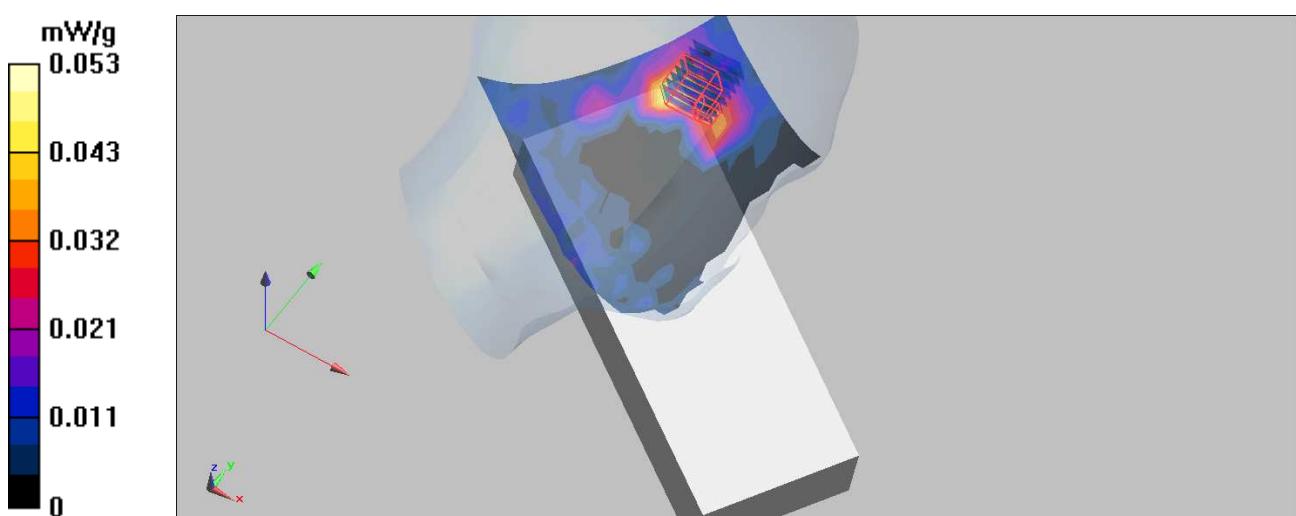

Date/Time: 2009/3/27 01:58:27

Test Laboratory: Bureau Veritas ADT

M07 Body Front-11a Ch36 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.32$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(3.84, 3.84, 3.84) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Low Channel 36/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.025 mW/g


Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.886 V/m

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.0055 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

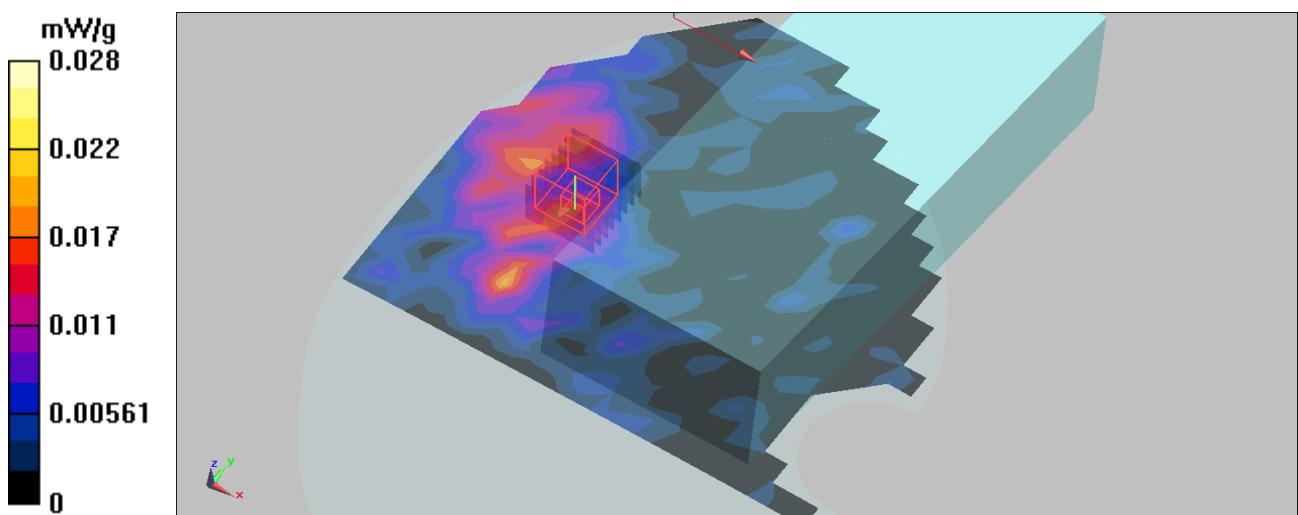

Date/Time: 2009/3/27 02:57:09

Test Laboratory: Bureau Veritas ADT

M07 Body Front-11a Ch60 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.51$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(3.84, 3.84, 3.84) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Mid Channel 60/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.028 mW/g


Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.43 V/m

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00979 mW/g

Maximum value of SAR (measured) = 0.031 mW/g

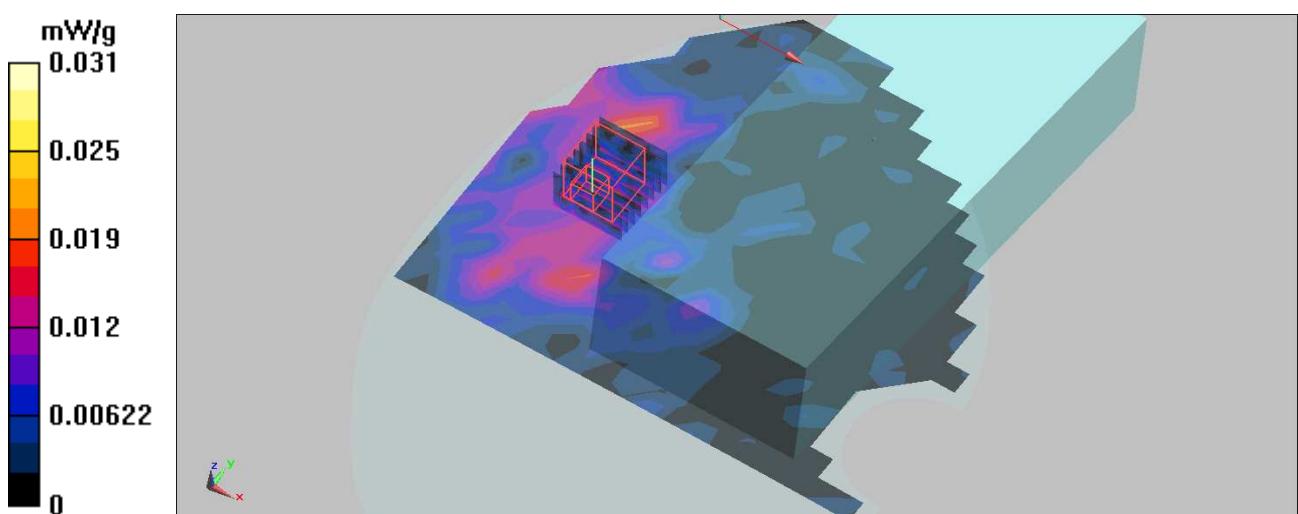

Date/Time: 2009/3/27 04:25:37

Test Laboratory: Bureau Veritas ADT

M07 Body Front-11a Ch108 ANT AUX

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.85$ mho/m; $\epsilon_r = 49.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.12, 4.12, 4.12) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Mid Channel 108/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.054 mW/g

Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1 V/m

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.048 mW/g


Mid Channel 108/Zoom Scan (8x8x8)/Cube 1: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1 V/m

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

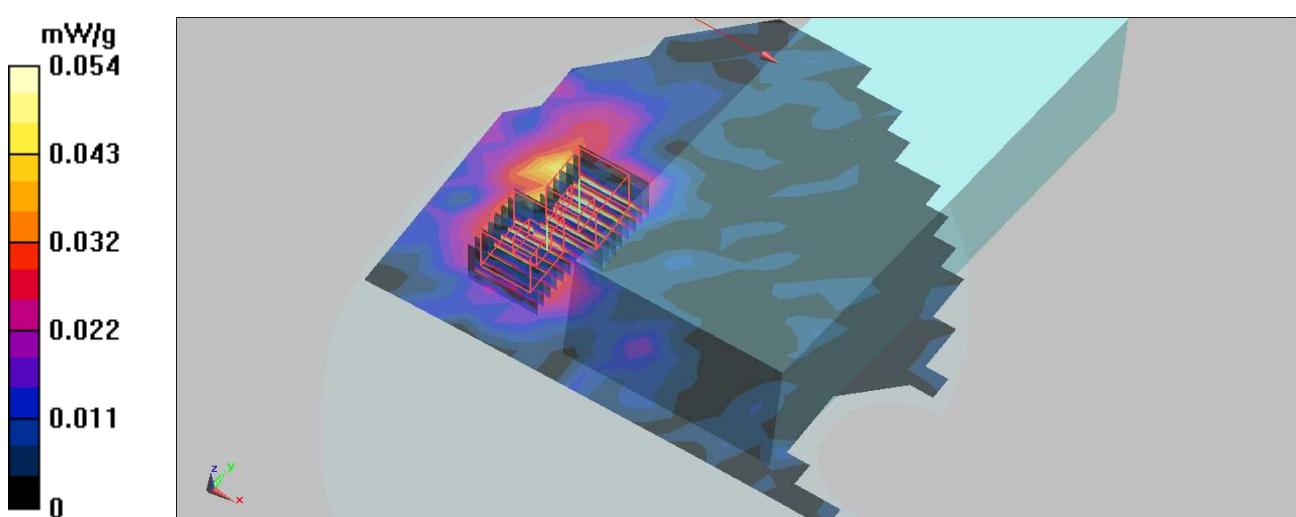

Date/Time: 2009/3/27 07:12:02

Test Laboratory: Bureau Veritas ADT

M08 Body Front-11a Ch36 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.32$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(3.84, 3.84, 3.84) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Low Channel 36/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.016 mW/g

Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.445 V/m

Peak SAR (extrapolated) = 0.054 W/kg

SAR(1 g) = 0.00999 mW/g; SAR(10 g) = 0.00418 mW/g

Maximum value of SAR (measured) = 0.021 mW/g


Low Channel 36/Zoom Scan (8x8x8)/Cube 1: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.445 V/m

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00483 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

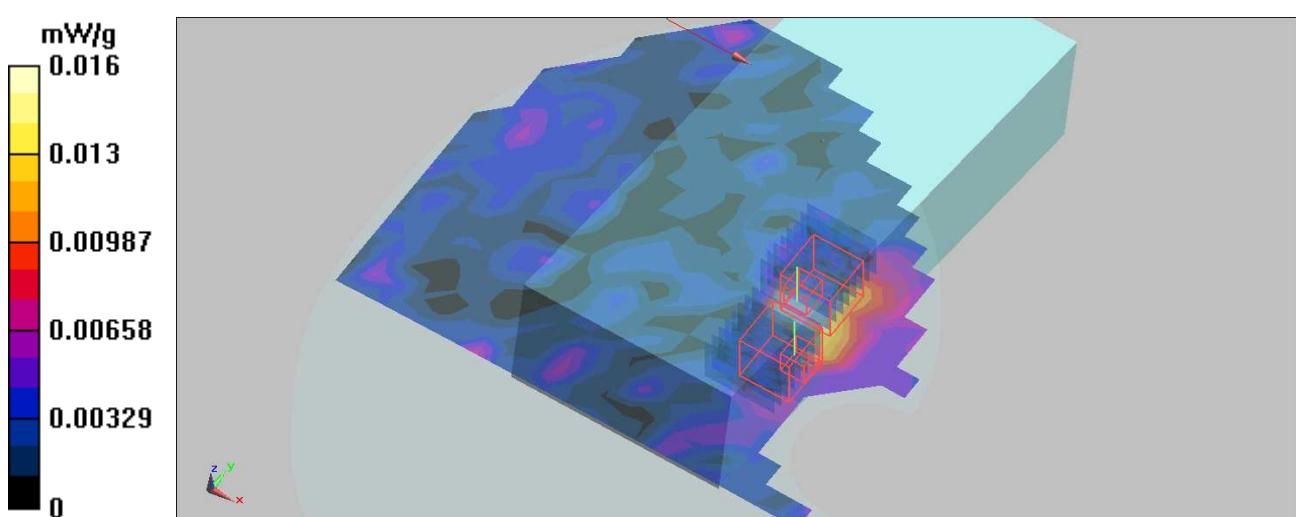

Date/Time: 2009/3/27 08:41:34

Test Laboratory: Bureau Veritas ADT

M08 Body Front-11a Ch60 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5300 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.51$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(3.84, 3.84, 3.84) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Mid Channel 60/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.041 mW/g

Mid Channel 60/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.895 V/m; Power Drift = 6.7 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.040 mW/g


Mid Channel 60/Zoom Scan (8x8x8)/Cube 1: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.895 V/m

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.048 mW/g

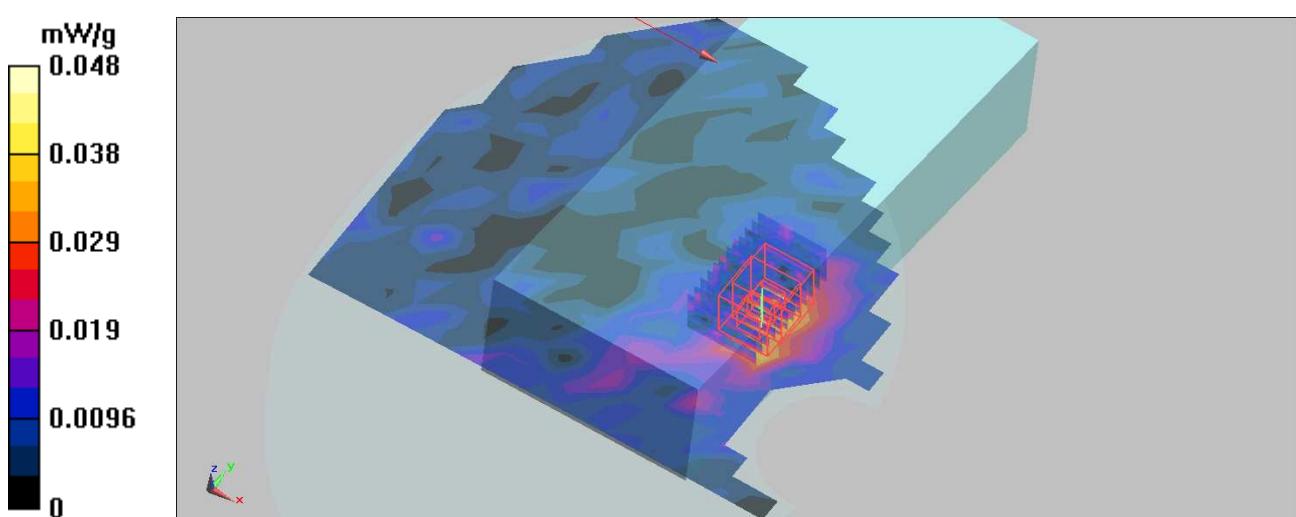

Date/Time: 2009/3/27 10:11:43

Test Laboratory: Bureau Veritas ADT

M08 Body Front-11a Ch108 ANT MAIN

DUT: PDA ; Type: MC 9598

Communication System: 802.11a ; Frequency: 5540 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK
 Medium: MSL5800 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.85$ mho/m; $\epsilon_r = 49.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The tip side of the EUT to the Phantom)

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.12, 4.12, 4.12) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2008/9/22
- Phantom: SAM with CRP ; Type: SAM ; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125 ; SEMCAD X Version 13.4 Build 125

Mid Channel 108/Area Scan (25x21x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.041 mW/g

Mid Channel 108/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.08 V/m

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.052 mW/g


Mid Channel 108/Zoom Scan (8x8x8)/Cube 1: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.08 V/m

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00538 mW/g

Maximum value of SAR (measured) = 0.032 mW/g

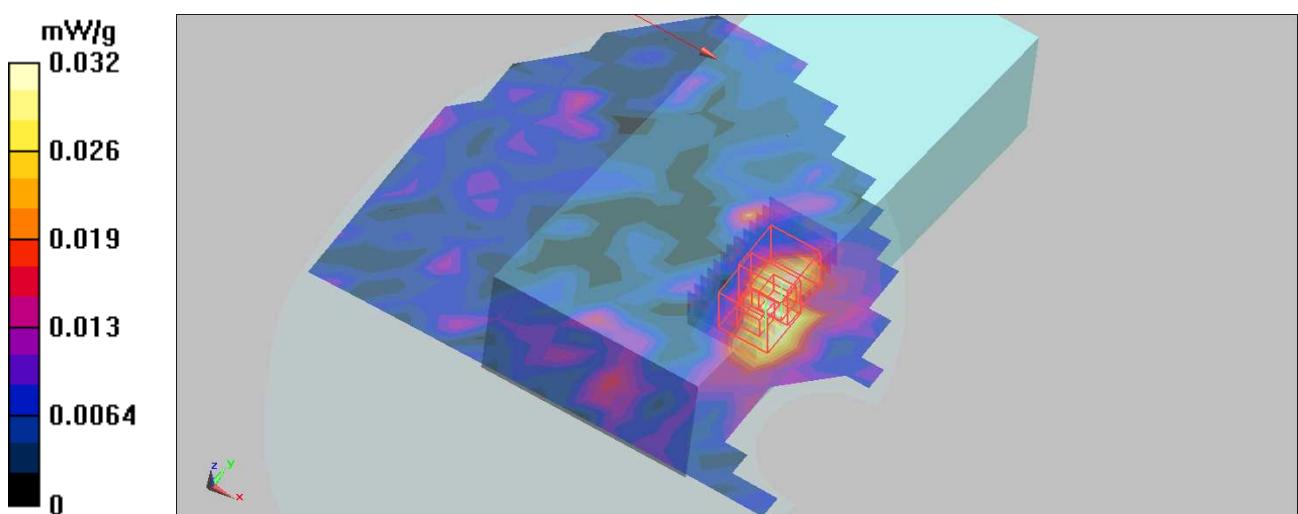

Date/Time: 2009/3/25 00:25:30

Test Laboratory: Advance Data Technology

System validation HSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1018 ; Test Frequency: 5200 MHz

Communication System: CW ; Frequency: 5200 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL5800; Medium parameters used: $f = 5200$ MHz; $\sigma = 4.68$ mho/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³

Liquid level : 153 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 22.9 degrees ; Liquid temp. : 22.5 degrees

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.65, 4.65, 4.65) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

f=5200, d=10mm, Pin=100mW/Area Scan (6x6x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11.1 mW/g


f=5200, d=10mm, Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 49.5 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 8.16 mW/g; SAR(10 g) = 2.32 mW/g

Maximum value of SAR (measured) = 11.8 mW/g

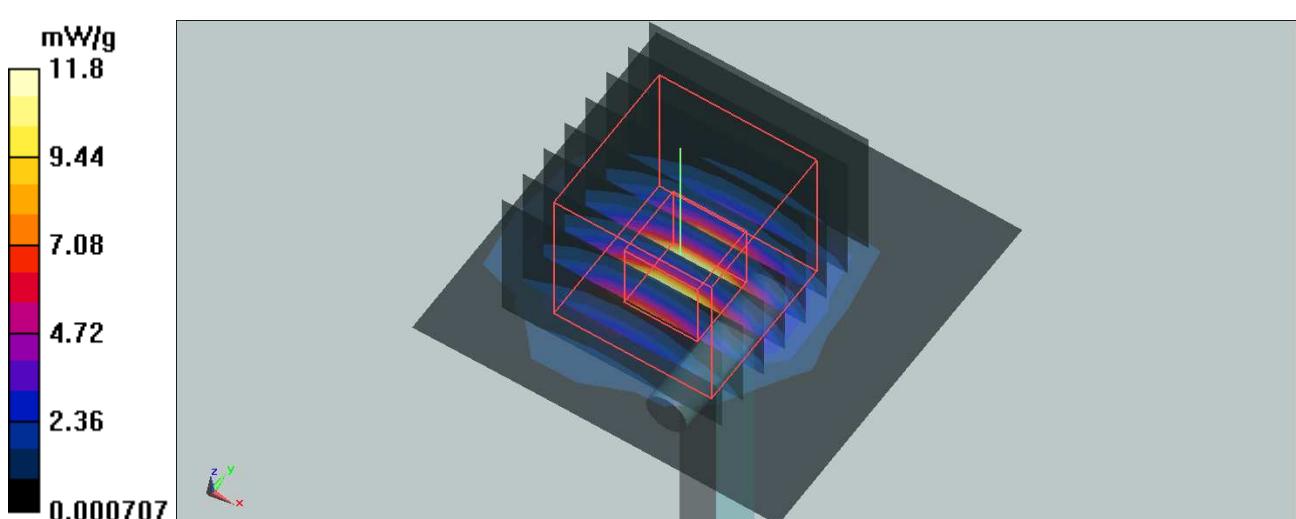

Date/Time: 2009/3/25 00:51:21

Test Laboratory: Advance Data Technology

System validation HSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1018 ; Test Frequency: 5500 MHz

Communication System: CW ; Frequency: 5500 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL5800; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.04$ mho/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Liquid level : 153 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 22.9 degrees ; Liquid temp. : 22.5 degrees

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.3, 4.3, 4.3) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

f=5500, d=10mm, Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11 mW/g


f=5500, d=10mm, Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 48.4 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 8.46 mW/g; SAR(10 g) = 2.38 mW/g

Maximum value of SAR (measured) = 12.1 mW/g

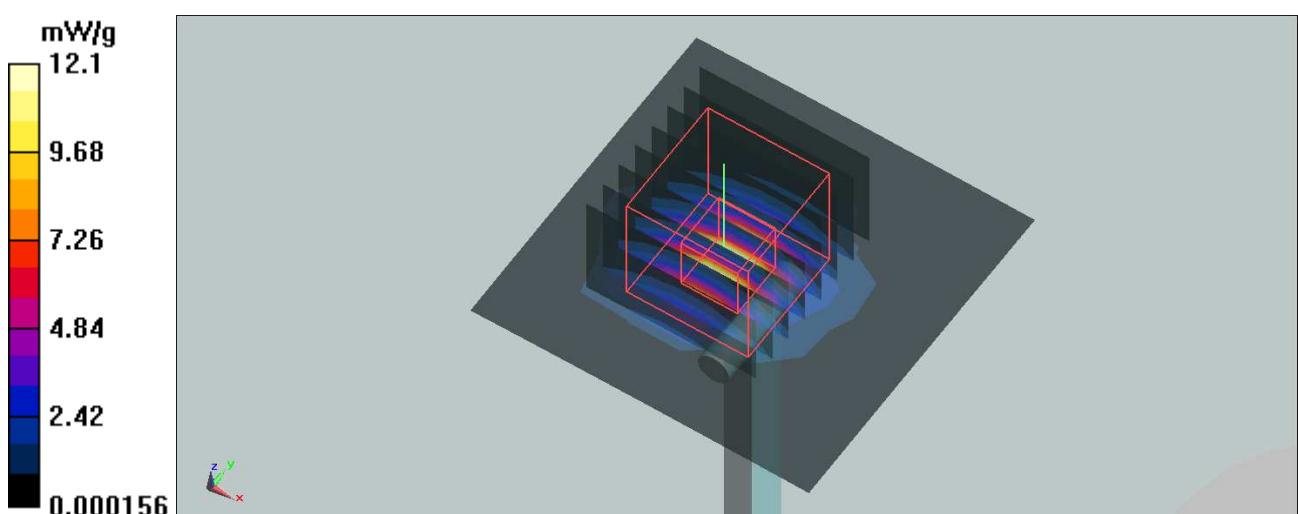

Date/Time: 2009/3/27 00:21:50

Test Laboratory: Advance Data Technology

System validation MSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1018 ; Test Frequency: 5200 MHz

Communication System: CW ; Frequency: 5200 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL5800; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Liquid level : 154 mm

Phantom section: Flat Section ; Separation distance :10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 22.7 degrees ; Liquid temp. : 22.5 degrees

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(3.84, 3.84, 3.84) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

f=5200, d=10mm, Pin=100mW/Area Scan (6x6x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11.1 mW/g


f=5200, d=10mm, Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 47.9 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 8.32 mW/g; SAR(10 g) = 2.33 mW/g

Maximum value of SAR (measured) = 12.1 mW/g

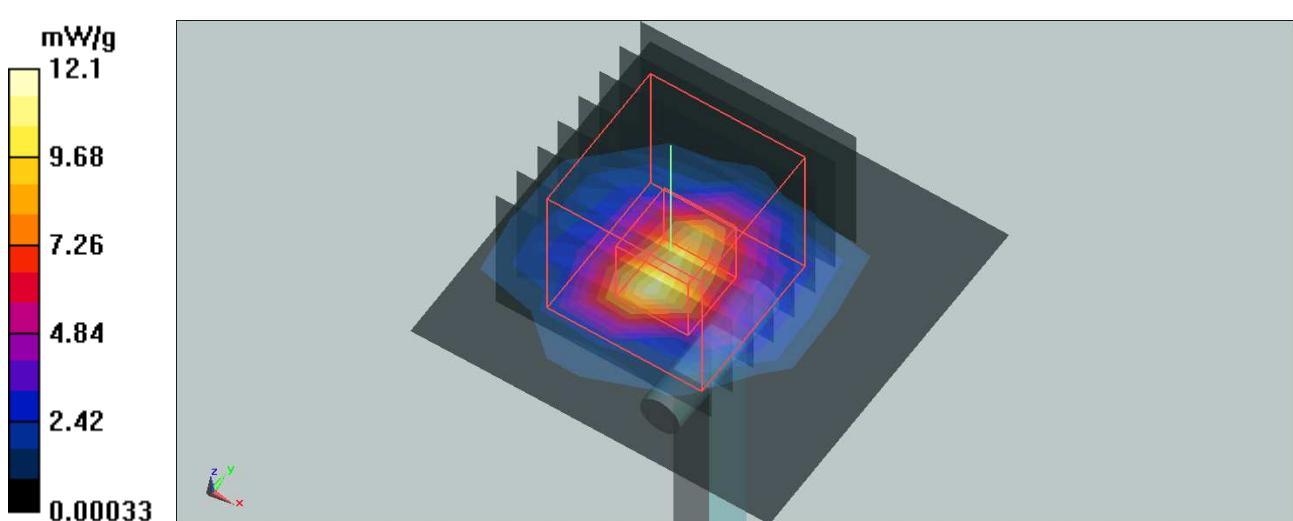

Test Laboratory: Advance Data Technology

System validation MSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1018 ; Test Frequency: 5500 MHz

Communication System: CW ; Frequency: 5500 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL5800; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.8$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Liquid level : 154 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 22.7 degrees ; Liquid temp. : 22.5 degrees

DASY5 Configuration:

- Probe: EX3DV4 - SN3578 ; ConvF(4.12, 4.12, 4.12) ; Calibrated: 2008/5/20
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2008/9/22
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

f=5500, d=10mm, Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 9.82 mW/g

f=5500, d=10mm, Pin=100mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 42.5 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.86 mW/g; SAR(10 g) = 2.17 mW/g

Maximum value of SAR (measured) = 11.2 mW/g

