



FCC RF Test Report

FCC ID : UZ7TC2205
EQUIPMENT : Touch Computer
BRAND NAME : Zebra
MODEL NAME : TC2205
APPLICANT : Zebra Technologies Corporation
 3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
 3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter
TEST DATE(S) : Apr. 10, 2025 ~ May 05, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

TABLE OF CONTENTS	2
REVISION HISTORY	3
SUMMARY OF THE TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software	7
1.6 Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Table for Supporting Units	10
2.4 EUT Operation Test Setup	10
3. TEST RESULTS	11
3.1 AC Power Line Conducted Emissions Measurement	11
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement	13
3.3 Frequency Stability Measurement	14
3.4 Field Strength of Fundamental Emissions and Mask Measurement	15
3.5 Radiated Emissions Measurement	17
3.6 Antenna Requirements	20
4. LIST OF MEASURING EQUIPMENT	21
5. UNCERTAINTY OF EVALUATION	22

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

- B1. Test Result of 20dB Spectrum Bandwidth
- B2. Test Result of Frequency Stability

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

- C1. Test Result of Field Strength of Fundamental Emissions
- C2. Results of Radiated Emissions (9 kHz~30MHz)
- C3. Results of Radiated Emissions (30MHz~1GHz)

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF THE TEST RESULT

Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 8.00 dB at 13.56MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 23.81 dB μ V/m at 13.56 MHz @30m
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 5.03 dB at 47.46MHz
3.6	15.203	Antenna Requirements	Complies	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC2205
FCC ID	UZ7TC2205
SN Code	Conducted: 250875247E0148 Conduction: 250875247E0058 Radiation: TC2205-0G1250SS-US
HW Version	EV2
SW Version	14-27-30.00-UG-U00-PRD-ATH-04
MFD	30MAR25
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Part Number	BT-000380-05

Supported Unit used in test configuration and system				
AC Adapter 1 (USB A) USB Wall Charger	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
AC Adapter 2 (USB C) USB Wall Charger	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Earphone (USB-C Audio Headset)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable 1 (Type A to Type C)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB Cable 2 (Type C to Type C)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.518kHz
99%OBW	2.171kHz
Antenna Type	FPC+ Ferrite
Type of Modulation	ASK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
Test Engineer	TH01-KS	03CH02-KS	CN1257
Temperature	Albert shi	Moon	
Relative Humidity	22~24°C	21~22°C	
	53~55%	45~46%	314309



Sportun International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sportun International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ	CN1256	421272
Test Engineer	Nathon&Xuruibin		
Temperature	22 ~ 24 °C		
Relative Humidity	44 ~ 50 %		

Test data subcontracted: Conducted Emission test case in section 3.1 of this report.

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
2.	CO02-SZ	AUDIX	E3	6.120613b

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.225
- ANSI C63.10-2013



2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.


Test Cases	
AC Conducted Emission	Mode 1 : WLAN 6G Idle + Bluetooth Idle With BT headset + NFC Tx+ USB Cable 1 data link with Notebook + NB USB Data Link to EUT (SD) + Battery
Remark: For Radiated Test Cases, EUT was tested under FTM mode, the tests were performance with Adapter 2 and USB Cable 2.	

2.2 Connection Diagram of Test System

<Radiated Emission >

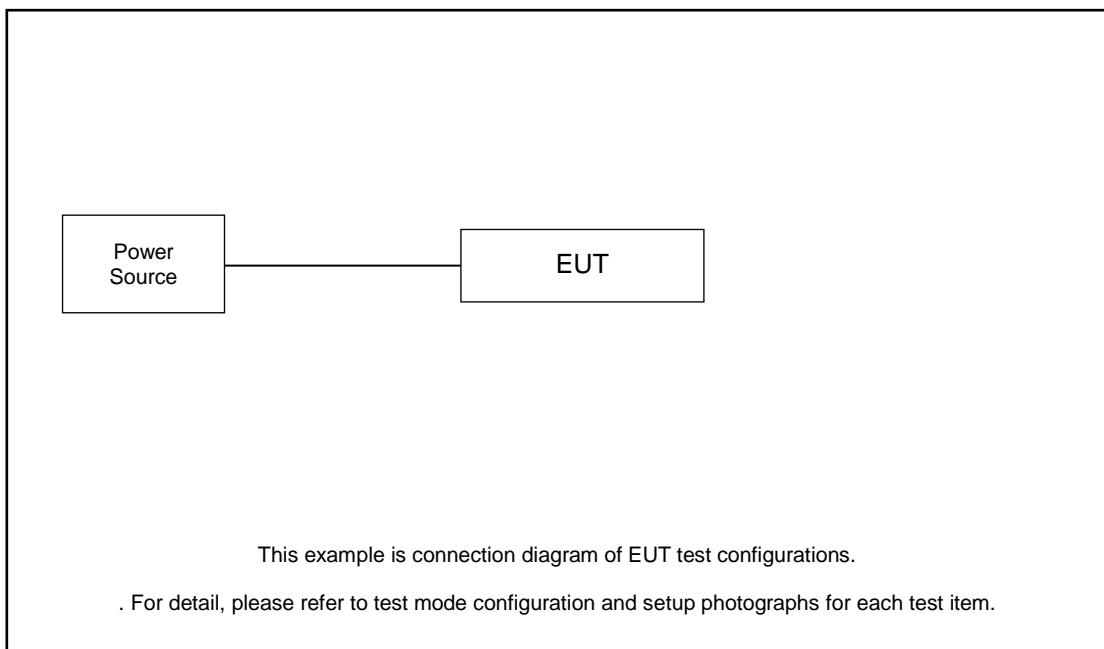

<AC Conducted Emission>

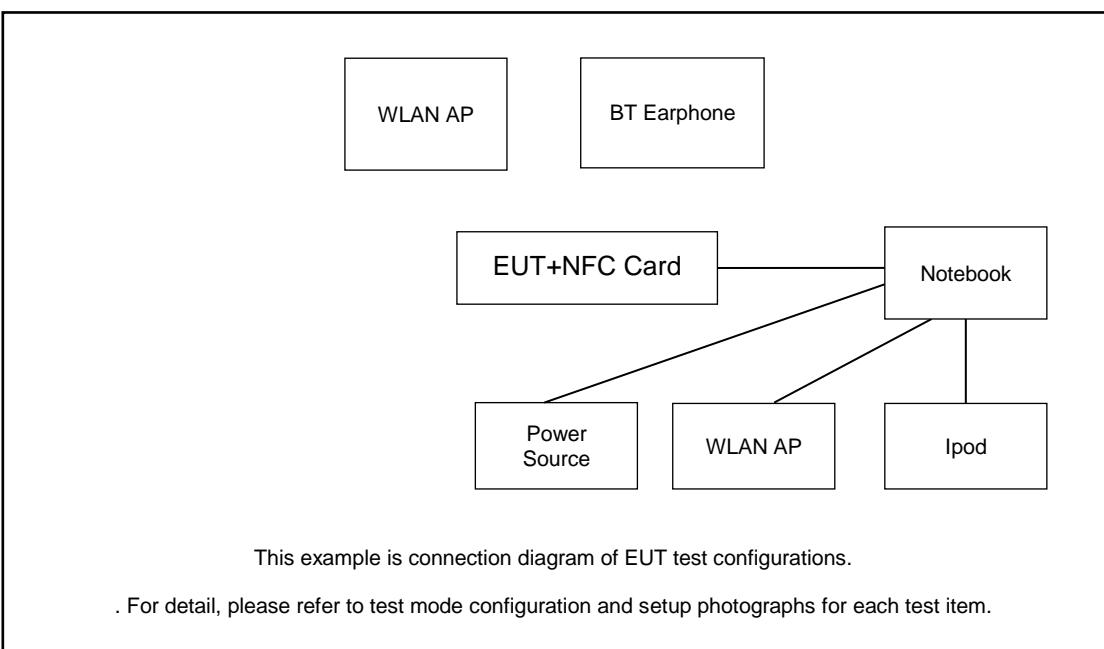



2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latiude 3400	N/A	N/A	Unshielded,1.8m
2.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	Ipod	Apple	MC69029/A	N/A	N/A	N/A
6.	NFC Card	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 0 cm gap to the EUT.



3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

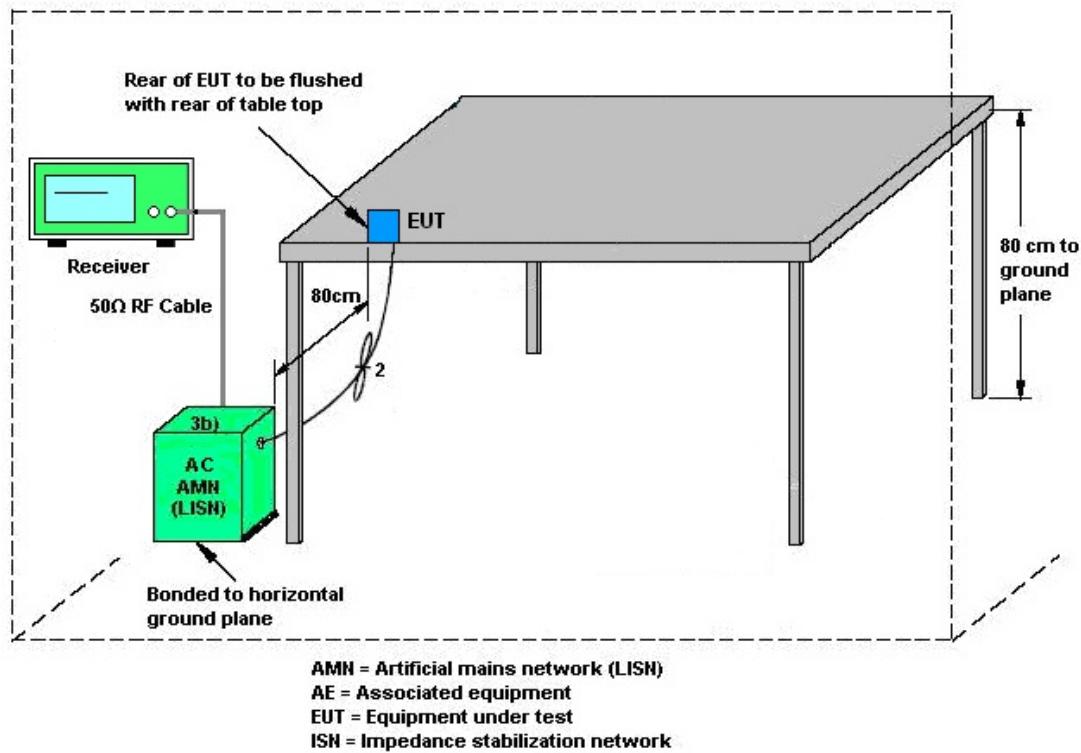

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

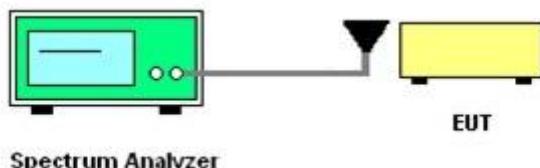

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

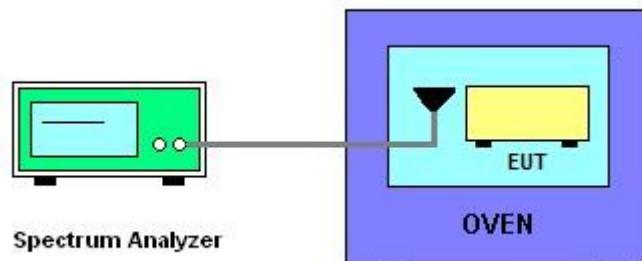

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225	
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.	
Freq. of Emission (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m
1.705~13.110	30	29.5
13.110~13.410	106	40.5
13.410~13.553	334	50.5
13.553~13.567	15848	84.0
13.567~13.710	334	50.5
13.710~14.010	106	40.5
14.010~30.000	30	29.5

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.
Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
7. The field strength is tested at 3m distance then convert to 30m by adding distance factor $40 \times \log(d_1/d_2)$.

3.4.4 Test Setup

For radiated emissions below 30MHz

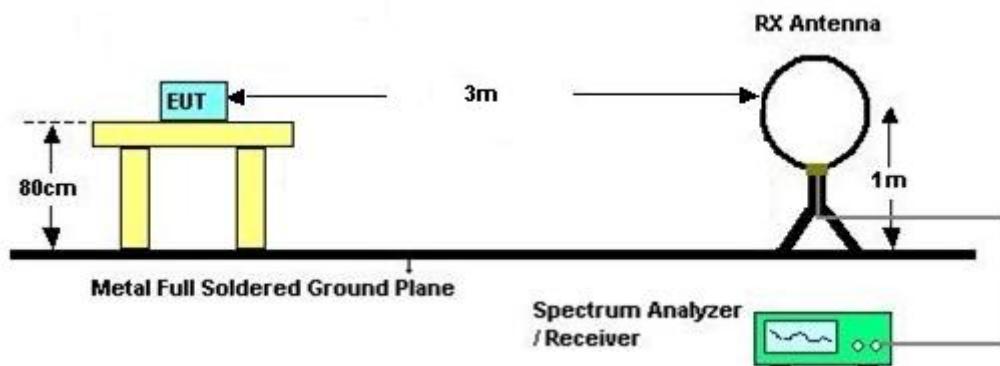

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

<FCC Limit>

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

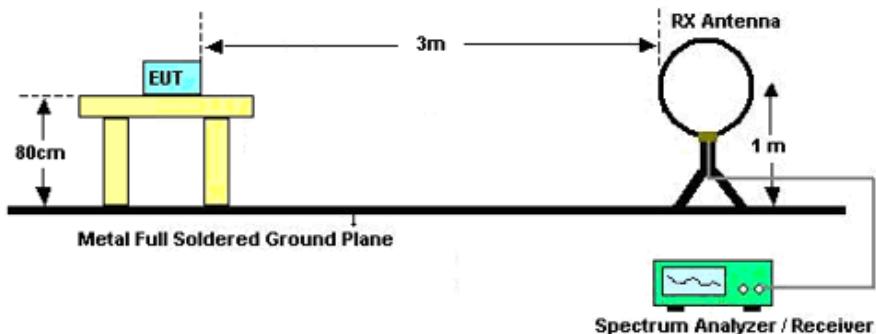

For radiated emissions above 30MHz

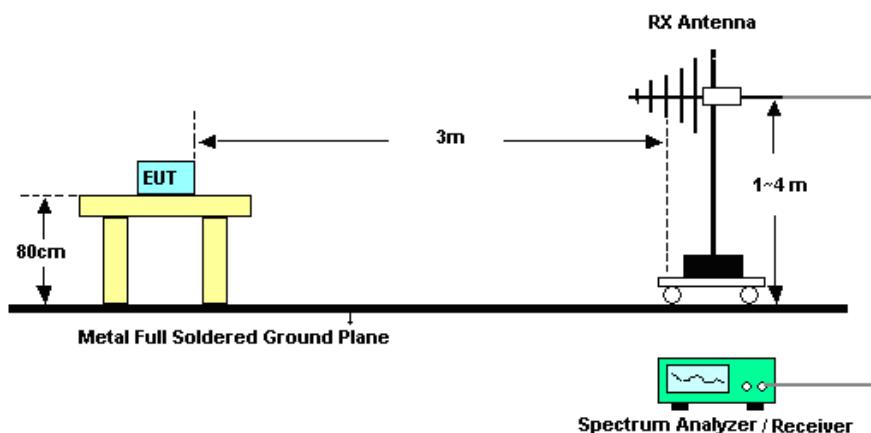

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Note:

1. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: parallel, perpendicular, and ground-parallel. Pre-scanned the three antenna orientations, the worst case is parallel & perpendicular polarization, and test data of two mode was reported. (Parallel: The loop antenna is placed vertical axis and aligned along the site axis; Perpendicular: The loop antenna is placed vertical axis and orthogonal to the axis; ground-parallel: The loop antenna is placed horizontal axis and parallel with the ground).



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 10, 2025	Oct. 09, 2025	Conducted (TH01-KS)
DC Power Supply	GW INSTEK	PLR36-10	GET22068 3	Max 20A, 36V	Jan. 02, 2025	Apr. 10, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 10, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Oct. 11, 2024	Apr. 22, 2025	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Apr. 22, 2025	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 18, 2024	Apr. 22, 2025	Aug. 17, 2025	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 02, 2025	Apr. 22, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Apr. 22, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Apr. 22, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Apr. 22, 2025	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 05, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 05, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec. 25, 2024	May 05, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required



5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0.1\%$
Frequency	$\pm 0.04\text{ppm}$

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{\text{C}}(y)$)	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{\text{C}}(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{\text{C}}(y)$)	6.04 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Nathon&Xuruibin	Temperature :	22 ~ 24°C																																																																																																																																																
		Relative Humidity :	44 ~ 50%																																																																																																																																																
Test Voltage :	120Vac / 60Hz	Phase :	Line																																																																																																																																																
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																																		
<p>Level (dBuV)</p> <p>Date: 2025-05-05</p> <p>Frequency (MHz)</p>																																																																																																																																																			
Site	: C002-SZ																																																																																																																																																		
Condition	: FCC 15C_QP LISN_2025-L LINE																																																																																																																																																		
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>LISN Factor</th><th>Cable Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.15</td><td>39.85</td><td>-16.02</td><td>55.87</td><td>20.00</td><td>9.66</td><td>10.19</td><td>Average</td></tr><tr><td>2</td><td>0.15</td><td>54.25</td><td>-11.62</td><td>65.87</td><td>34.40</td><td>9.66</td><td>10.19</td><td>QP</td></tr><tr><td>3</td><td>0.17</td><td>41.06</td><td>-13.97</td><td>55.03</td><td>21.20</td><td>9.68</td><td>10.18</td><td>Average</td></tr><tr><td>4</td><td>0.17</td><td>53.66</td><td>-11.37</td><td>65.03</td><td>33.80</td><td>9.68</td><td>10.18</td><td>QP</td></tr><tr><td>5</td><td>0.19</td><td>39.88</td><td>-14.23</td><td>54.11</td><td>20.00</td><td>9.70</td><td>10.18</td><td>Average</td></tr><tr><td>6 *</td><td>0.19</td><td>53.78</td><td>-10.33</td><td>64.11</td><td>33.90</td><td>9.70</td><td>10.18</td><td>QP</td></tr><tr><td>7</td><td>0.22</td><td>36.30</td><td>-16.36</td><td>52.66</td><td>16.39</td><td>9.72</td><td>10.19</td><td>Average</td></tr><tr><td>8</td><td>0.22</td><td>47.70</td><td>-14.96</td><td>62.66</td><td>27.79</td><td>9.72</td><td>10.19</td><td>QP</td></tr><tr><td>9</td><td>0.53</td><td>29.81</td><td>-16.19</td><td>46.00</td><td>9.90</td><td>9.67</td><td>10.24</td><td>Average</td></tr><tr><td>10</td><td>0.53</td><td>38.01</td><td>-17.99</td><td>56.00</td><td>18.10</td><td>9.67</td><td>10.24</td><td>QP</td></tr><tr><td>11</td><td>4.80</td><td>32.92</td><td>-13.08</td><td>46.00</td><td>13.00</td><td>9.65</td><td>10.27</td><td>Average</td></tr><tr><td>12</td><td>4.80</td><td>40.12</td><td>-15.88</td><td>56.00</td><td>20.20</td><td>9.65</td><td>10.27</td><td>QP</td></tr><tr><td>13</td><td>13.56</td><td>42.00</td><td>-8.00</td><td>50.00</td><td>22.10</td><td>9.65</td><td>10.25</td><td>Average</td></tr><tr><td>14</td><td>13.56</td><td>42.30</td><td>-17.70</td><td>60.00</td><td>22.40</td><td>9.65</td><td>10.25</td><td>QP</td></tr></tbody></table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.15	39.85	-16.02	55.87	20.00	9.66	10.19	Average	2	0.15	54.25	-11.62	65.87	34.40	9.66	10.19	QP	3	0.17	41.06	-13.97	55.03	21.20	9.68	10.18	Average	4	0.17	53.66	-11.37	65.03	33.80	9.68	10.18	QP	5	0.19	39.88	-14.23	54.11	20.00	9.70	10.18	Average	6 *	0.19	53.78	-10.33	64.11	33.90	9.70	10.18	QP	7	0.22	36.30	-16.36	52.66	16.39	9.72	10.19	Average	8	0.22	47.70	-14.96	62.66	27.79	9.72	10.19	QP	9	0.53	29.81	-16.19	46.00	9.90	9.67	10.24	Average	10	0.53	38.01	-17.99	56.00	18.10	9.67	10.24	QP	11	4.80	32.92	-13.08	46.00	13.00	9.65	10.27	Average	12	4.80	40.12	-15.88	56.00	20.20	9.65	10.27	QP	13	13.56	42.00	-8.00	50.00	22.10	9.65	10.25	Average	14	13.56	42.30	-17.70	60.00	22.40	9.65	10.25	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																																											
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																																												
1	0.15	39.85	-16.02	55.87	20.00	9.66	10.19	Average																																																																																																																																											
2	0.15	54.25	-11.62	65.87	34.40	9.66	10.19	QP																																																																																																																																											
3	0.17	41.06	-13.97	55.03	21.20	9.68	10.18	Average																																																																																																																																											
4	0.17	53.66	-11.37	65.03	33.80	9.68	10.18	QP																																																																																																																																											
5	0.19	39.88	-14.23	54.11	20.00	9.70	10.18	Average																																																																																																																																											
6 *	0.19	53.78	-10.33	64.11	33.90	9.70	10.18	QP																																																																																																																																											
7	0.22	36.30	-16.36	52.66	16.39	9.72	10.19	Average																																																																																																																																											
8	0.22	47.70	-14.96	62.66	27.79	9.72	10.19	QP																																																																																																																																											
9	0.53	29.81	-16.19	46.00	9.90	9.67	10.24	Average																																																																																																																																											
10	0.53	38.01	-17.99	56.00	18.10	9.67	10.24	QP																																																																																																																																											
11	4.80	32.92	-13.08	46.00	13.00	9.65	10.27	Average																																																																																																																																											
12	4.80	40.12	-15.88	56.00	20.20	9.65	10.27	QP																																																																																																																																											
13	13.56	42.00	-8.00	50.00	22.10	9.65	10.25	Average																																																																																																																																											
14	13.56	42.30	-17.70	60.00	22.40	9.65	10.25	QP																																																																																																																																											

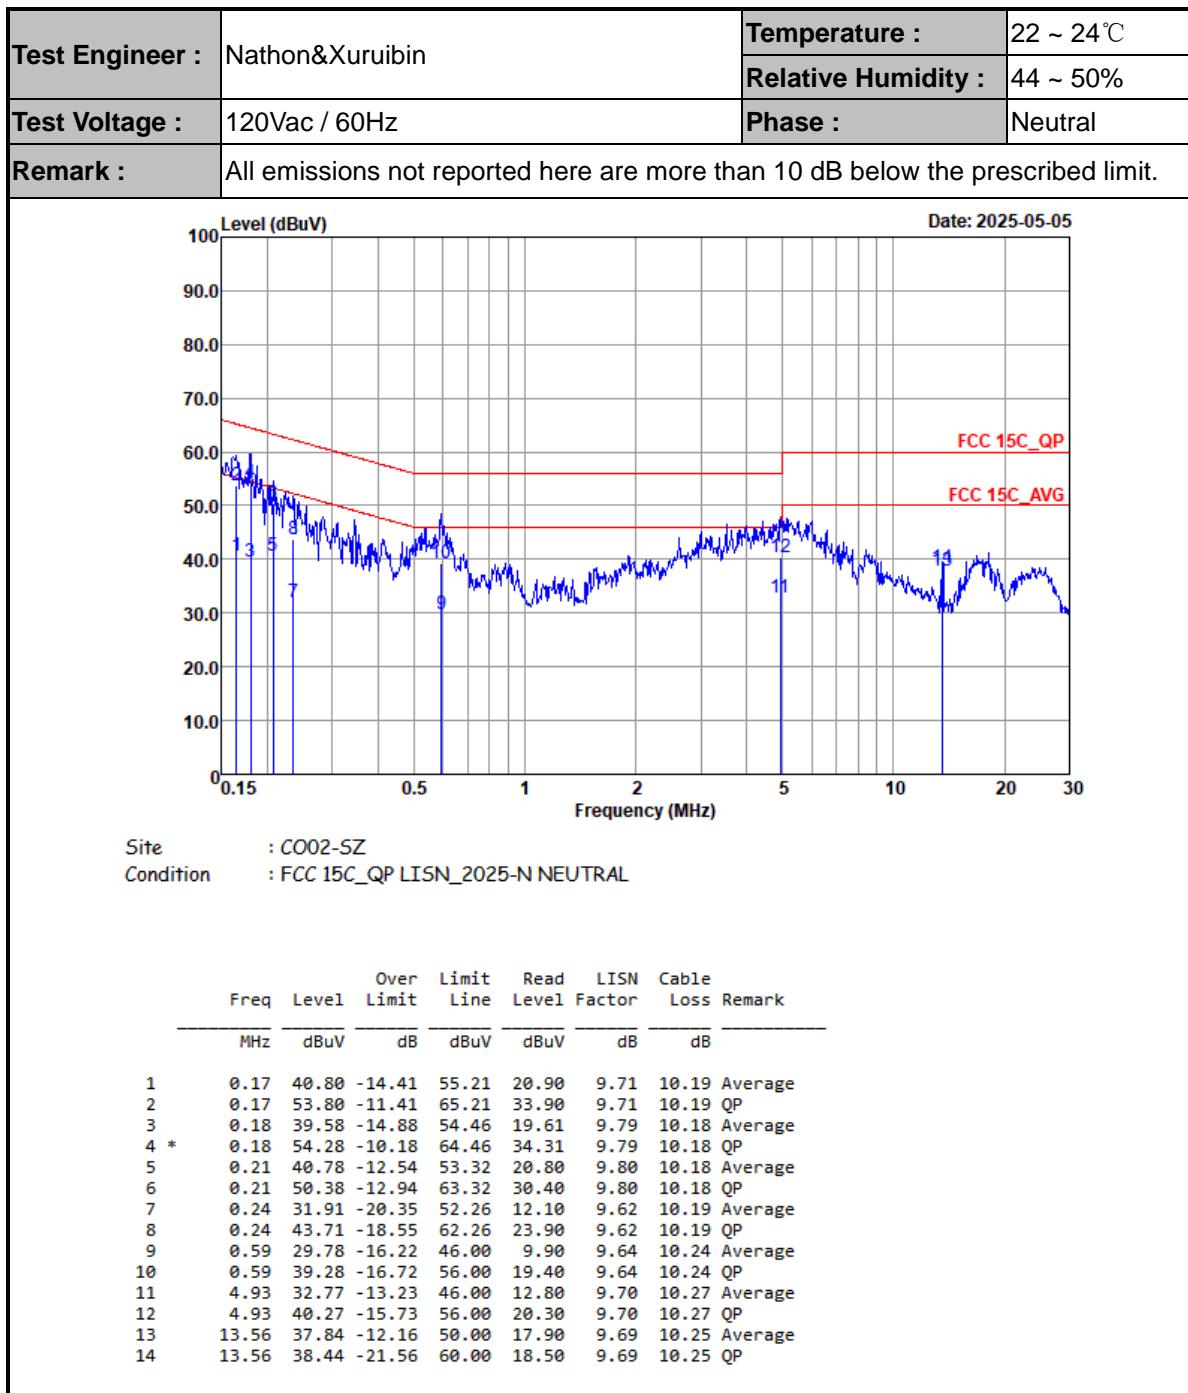



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56
CF 13.56 MHz 691 pts Span 10.0 kHz Marker			
Type Ref Trc X-value Y-value Function Function Result	Type Ref Trc X-value Y-value Function Function Result	Type Ref Trc X-value Y-value Function Function Result	Type Ref Trc X-value Y-value Function Function Result
M1 1 13.560174 MHz 3.97 dBm Occ Bw 2.170767004 kHz	M1 1 13.560159 MHz 3.63 dBm ndB down 2.518 kHz	T1 1 13.5590883 MHz -10.20 dBm Occ Bw 20.00 dB	T1 1 13.5589 MHz -16.55 dBm ndB 20.00 dB
T1 1 13.561259 MHz -10.34 dBm	T2 1 13.561418 MHz -16.12 dBm Q factor 5385.1		
Date: 10.APR.2025 01:25:47	Date: 10.APR.2025 01:27:39	Measuring...	Measuring...
99% OccupiedBW(kHz)	2.171	20dB Bandwidth (kHz)	2.518
Frequency range (MHz)	$f_L > 13.553$	13.5590883	Test Result
	$f_H < 13.567$	13.5612590	Complies

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

**B2. Test Result of Frequency Stability****Startup:**

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
NV	13.560160	-20	13.560159
LV	13.560160	-10	13.560167
HV	13.560159	0	13.560159
		10	13.560167
		20	13.560159
		30	13.560167
		40	13.560167
		50	13.560167
Max.Deviation (MHz)	0.000160	Max.Deviation (MHz)	0.000167
Max.Deviation (ppm)	11.7625	Max.Deviation (ppm)	12.2788
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS

2MIN:

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
NV	13.560159	-20	13.560145
LV	13.560145	-10	13.560159
HV	13.560159	0	13.560159
		10	13.560160
		20	13.560159
		30	13.560160
		40	13.560159
		50	13.560159
Max.Deviation (MHz)	0.000159	Max.Deviation (MHz)	0.000160
Max.Deviation (ppm)	11.7257	Max.Deviation (ppm)	11.7625
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



5MIN:

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
NV	13.560152	-20	13.560145
LV	13.560152	-10	13.560167
HV	13.560159	0	13.560152
		10	13.560152
		20	13.560159
		30	13.560159
		40	13.560159
		50	13.560159
Max.Deviation (MHz)	0.000159	Max.Deviation (MHz)	0.000167
Max.Deviation (ppm)	11.7257	Max.Deviation (ppm)	12.2788
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS


10MIN:


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
NV	13.560116	-20	13.560109
LV	13.560123	-10	13.560116
HV	13.560109	0	13.560109
		10	13.560109
		20	13.560109
		30	13.560116
		40	13.560116
		50	13.560109
Max.Deviation (MHz)	0.000123	Max.Deviation (MHz)	0.000116
Max.Deviation (ppm)	9.0708	Max.Deviation (ppm)	8.5546
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



Appendix C. Test Results of Radiated Test Items

C1. Results of Field Strength of Fundamental Emissions

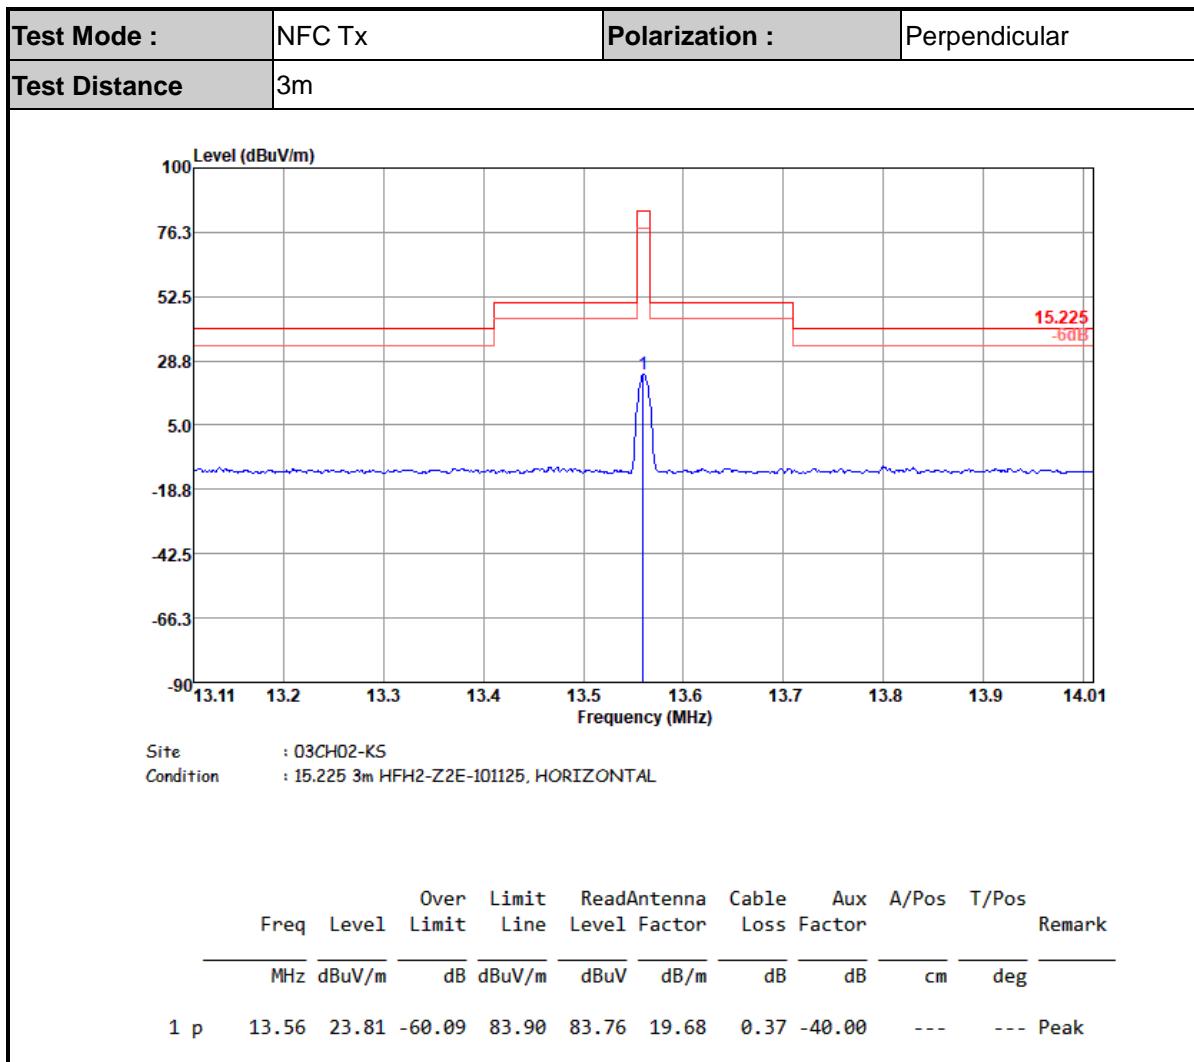

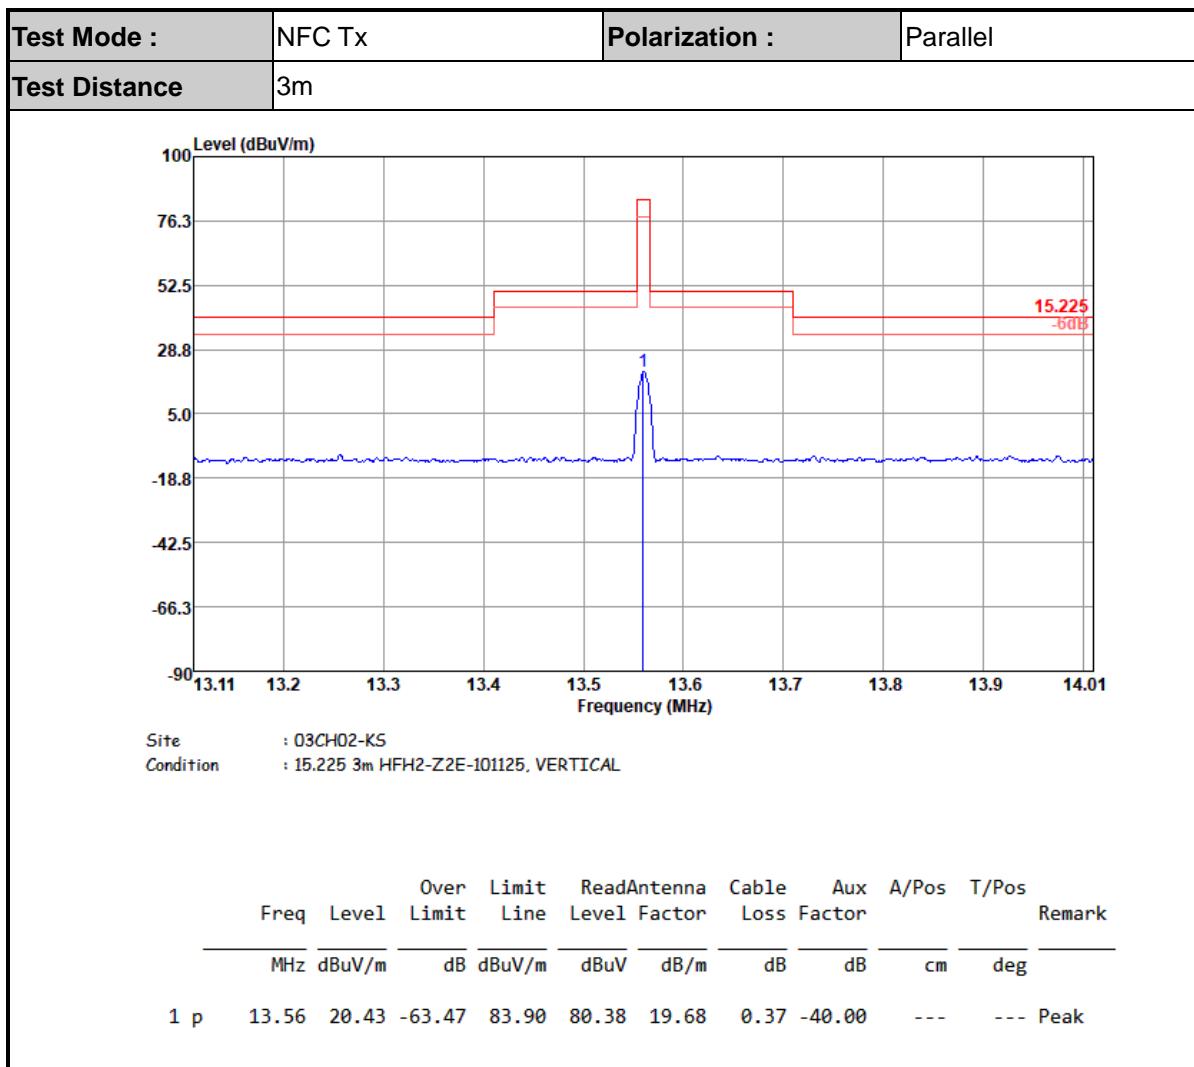



Note:

1. The field strength is tested at 3m distance then convert to 30m by adding Distance extrapolation factor.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB) + Aux Factor(distance factor)
4. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

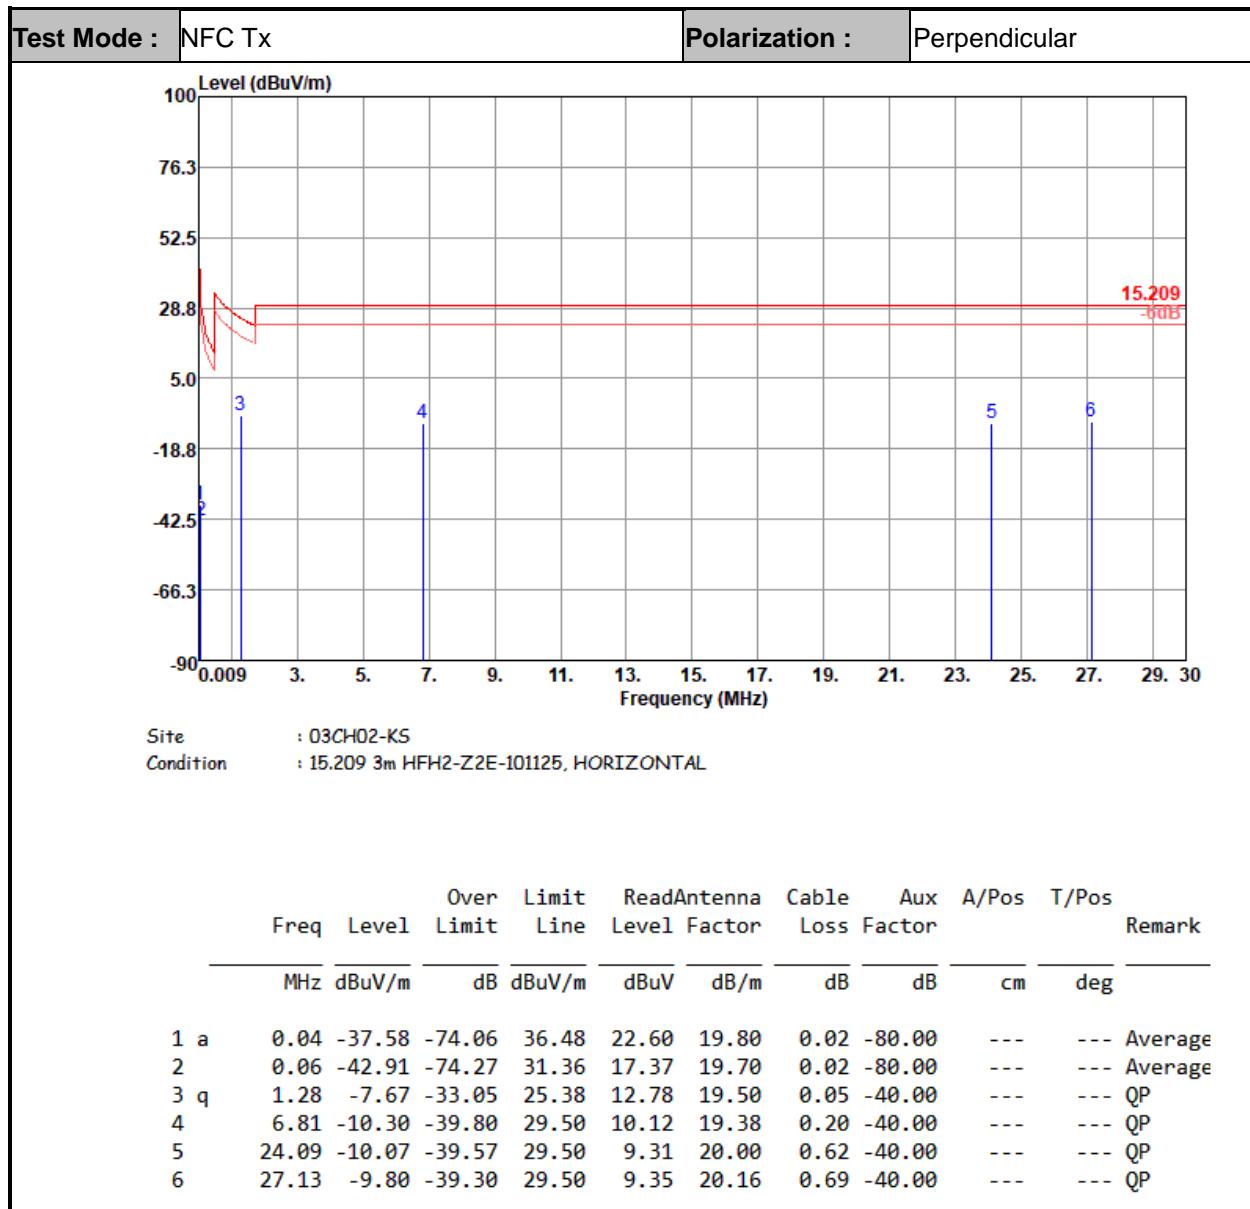

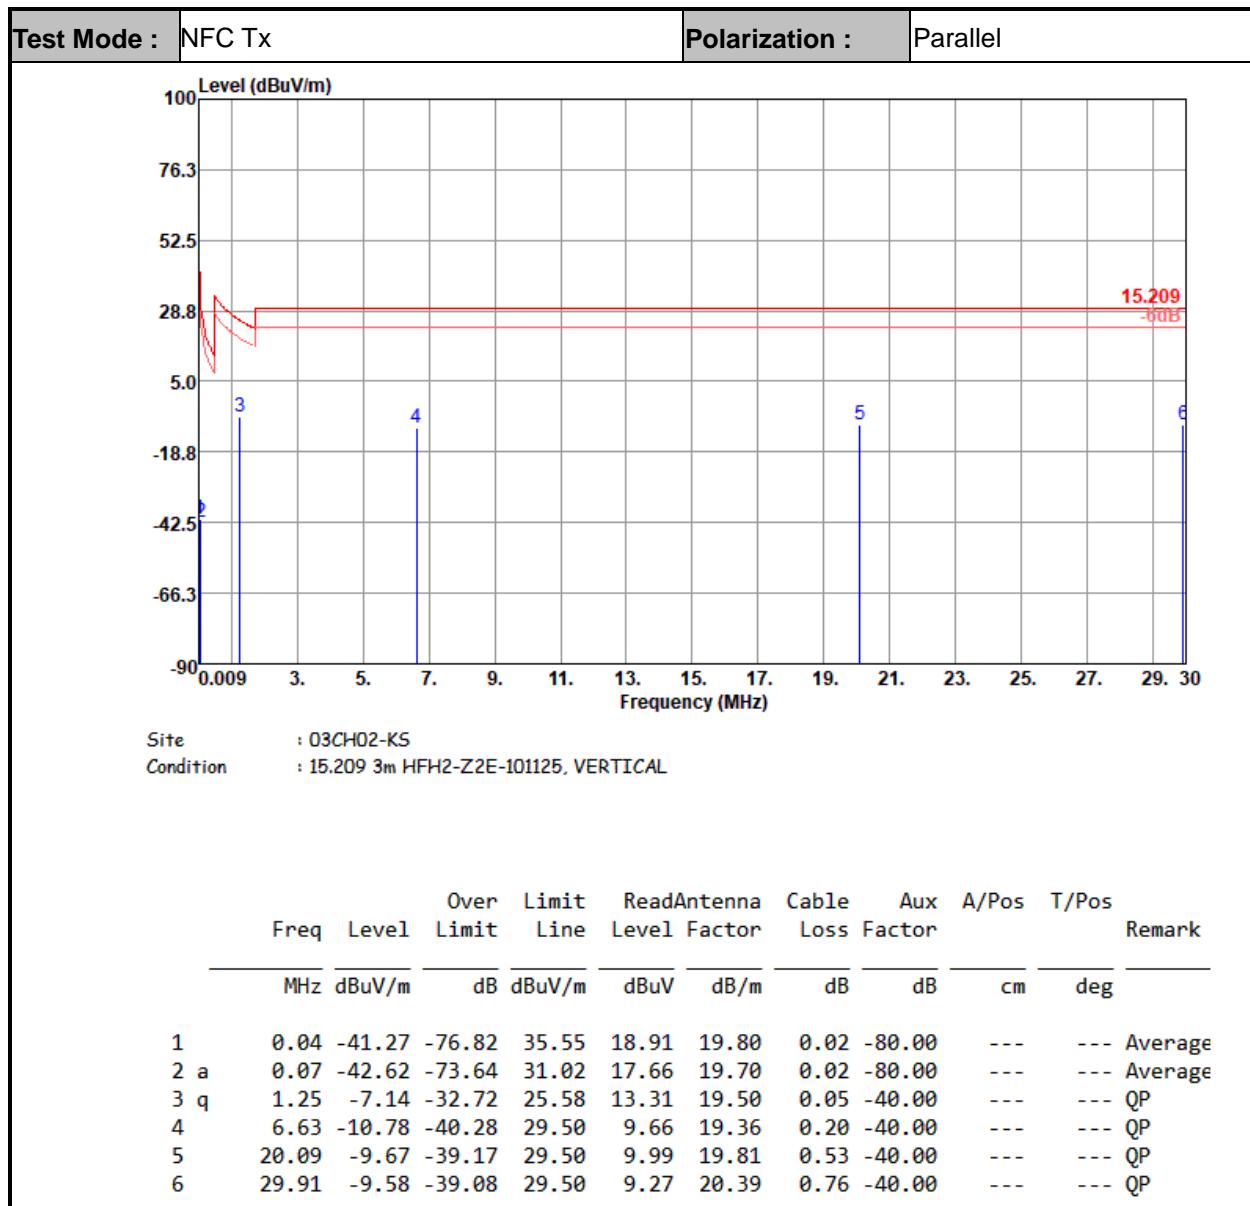**Note:**

1. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
2. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB) + Aux Factor(distance factor)
3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

**C3. Results of Radiated Spurious Emissions (30MHz~1GHz)**

Test Mode :		NFC Tx			Polarization :		Horizontal			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.46	34.97	-5.03	40	51.2	15.93	0.6	32.76	100	293	QP
145.43	28.65	-14.85	43.5	42.76	17.32	1.27	32.7	-	-	Peak
250.19	20.42	-25.58	46	33.17	18.49	1.65	32.89	-	-	Peak
565.44	25.25	-20.75	46	29.58	26.41	2.51	33.25	-	-	Peak
698.33	27.17	-18.83	46	31.01	26.63	2.76	33.23	-	-	Peak
967.99	31.07	-22.93	54	28.57	30.71	3.26	31.47	-	-	Peak

Test Mode :		NFC Tx			Polarization :		Vertical			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.46	23.84	-16.16	40	40.07	15.93	0.6	32.76	-	-	Peak
93.05	29.82	-13.68	43.5	46.26	15.24	1	32.68	-	-	Peak
146.4	29.27	-14.23	43.5	43.38	17.33	1.27	32.71	-	-	Peak
573.2	24.59	-21.41	46	29.09	26.25	2.51	33.26	-	-	Peak
737.13	27.63	-18.37	46	30	28.04	2.81	33.22	-	-	Peak
983.51	31.45	-22.55	54	28.83	30.63	3.3	31.31	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.