




FCC RADIO TEST REPORT

FCC ID : UZ7TC530R
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC530R
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 10, 2024 and testing was started from May 30, 2024 to Jul. 13, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	15
3.3 Dwell Time Measurement.....	18
3.4 20dB and 99% Bandwidth Measurement	21
3.5 Output Power Measurement.....	26
3.6 Conducted Band Edges Measurement.....	28
3.7 Conducted Spurious Emission Measurement	31
3.8 Radiated Band Edges and Spurious Emission Measurement	34
3.9 AC Power Line Conducted Emissions Measurement.....	38
3.10 Antenna Requirements.....	40
4 List of Measuring Equipment	41
5 Measurement Uncertainty	42
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR430824I	01	Initial issue of report	Jul. 17, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	7.41 dB under the limit at 7318.00 MHz
3.9	15.207	AC Conducted Emission	Pass	19.46 dB under the limit at 3.23 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC530R
FCC ID	UZ7TC530R
EUT supports Radios application	NFC/UHF RFID WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	DV2-2
SW Version	nemesis_A13_userdebug_nonGMS_RelKey_2024-05-25-04 12_main_SE
MFD	23APR24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery 1 (1x)	Brand Name	Zebra	Part Number	BT-000442-0020
Battery 2 (1.5x)	Brand Name	Zebra	Part Number	BT-000442-0820
Battery 3 (BLE Battery)	Brand Name	Zebra	Part Number	BT-000442-002B
Battery 4 (Wireless Battery)	Brand Name	Zebra	Part Number	BT-000442-002A
Battery 5 (1x)	Brand Name	Zebra	Part Number	BT-000442-1020
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to 3.5mm audio connector	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Rugged Headset	Brand Name	Zebra	Part Number	HS2100-OTH
USB TYPE C Earphone	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-NGTC5-ELEC-01
Soft Holster	Brand Name	Zebra	Part Number	SG-NGTC5TC7-HLSTR-01
TC53/TC58 RUGGED BOOT	Brand Name	Zebra	Part Number	SG-NGTC5EXO1-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	50
Maximum Output Power to Antenna	<Ant. 6> 24.43 dBm (0.2773 W) <Ant. 7> 24.49 dBm (0.2812 W)
20dB Bandwidth	<Ant. 6> 0.070 MHz <Ant. 7> 0.069 MHz
99% Occupied Bandwidth	<Ant. 6> 0.065 MHz <Ant. 7> 0.063 MHz
Antenna Type / Gain	<Ant. 6>: PIFA Antenna with gain -1.04 dBi <Ant. 7>: PIFA Antenna with gain -0.96 dBi
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	28	916.25
	2	903.25	29	916.75
	3	903.75	30	917.25
	4	904.25	31	917.75
	5	904.75	32	918.25
	6	905.25	33	918.75
	7	905.75	34	919.25
	8	906.25	35	919.75
	9	906.75	36	920.25
	10	907.25	37	920.75
	11	907.75	38	921.25
	12	908.25	39	921.75
	13	908.75	40	922.25
	14	909.25	41	922.75
	15	909.75	42	923.25
	16	910.25	43	923.75
	17	910.75	44	924.25
	18	911.25	45	924.75
	19	911.75	46	925.25
	20	912.25	47	925.75
	21	912.75	48	926.25
	22	913.25	49	926.75
	23	913.75	50	927.25
	24	914.25		
	25	914.75		
	26	915.25		
	27	915.75		

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	Mode 1: UHF RFID Tx 902.75 MHz Mode 2: UHF RFID Tx 914.75 MHz Mode 3: UHF RFID Tx 927.25 MHz
Radiated Test Cases	<Ant. 6> Mode 1: UHF RFID Tx 902.75 MHz Mode 2: UHF RFID Tx 914.75 MHz Mode 3: UHF RFID Tx 927.25 MHz <Ant. 7> Mode 1: UHF RFID Tx 902.75 MHz Mode 2: UHF RFID Tx 914.75 MHz Mode 3: UHF RFID Tx 927.25 MHz
AC Conducted Emission	Mode 1: WLAN (5GHz) Idle + Bluetooth Idle + UHF RFID Read + USB TYPE A to TYPE C cable (Charging from Adapter) + Battery 2 (1.5x)
Remark: For Radiated Test Cases, the tests were performed Battery 1 (1x).	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

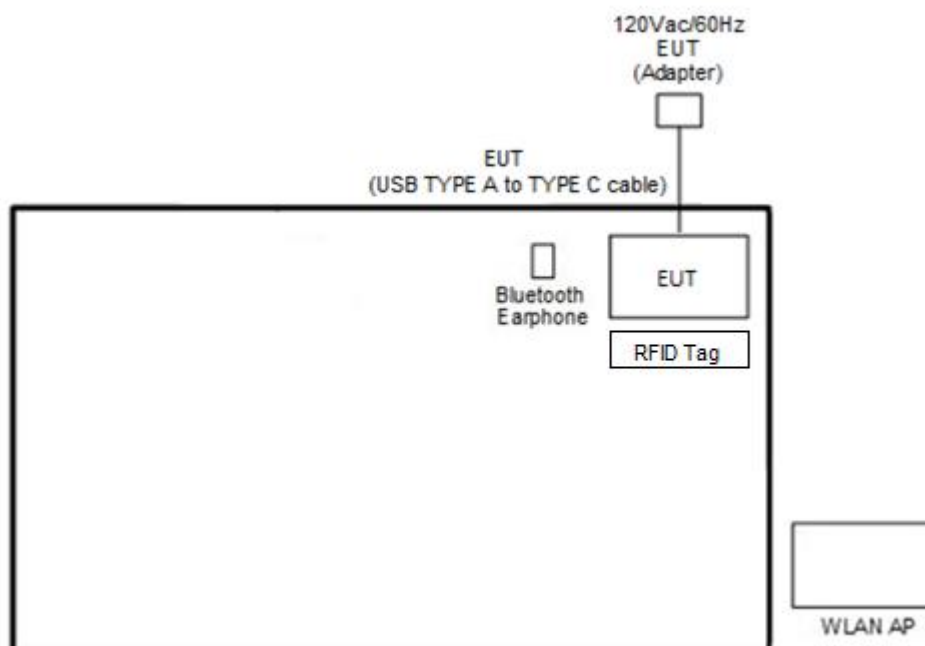

<Radiated Spurious Emission Mode>



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Jlab	Jbuds Mini	2AHYV	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	RFID Tag	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “Vysor 5.0.7” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

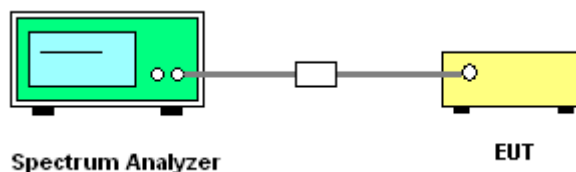




3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%
Number of Hopping (Channel)		Limits (Channel)	Pass/Fail
50		≥ 50	Pass

<Ant. 6>


Number of Hopping Channel Plot on Channel 00 - 49

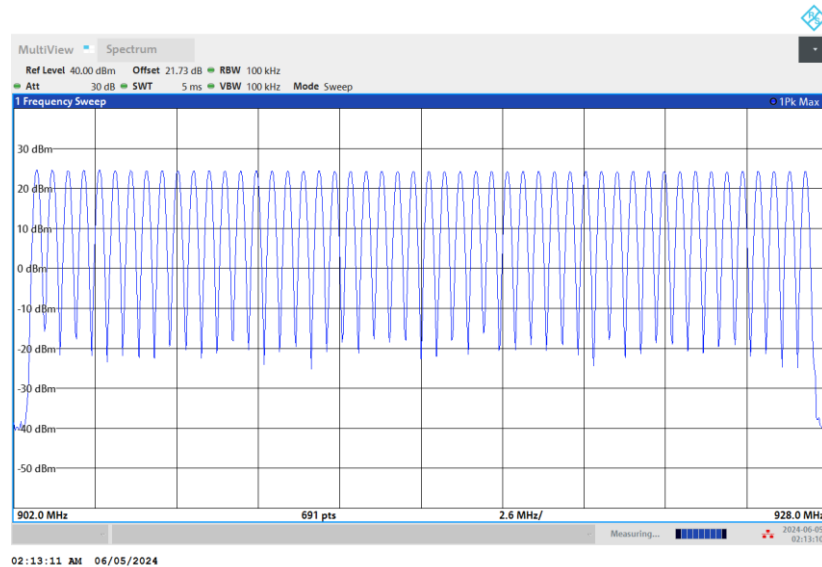



<Ant. 7>

Number of Hopping Channel Plot on Channel 00 - 49

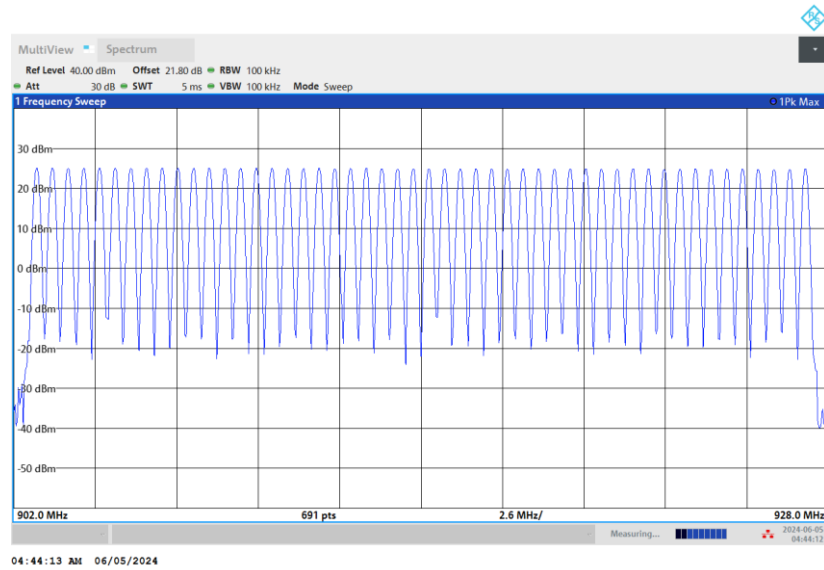

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902.75-927.25 MHz band may have hopping channel carrier frequencies that are 20 dB bandwidth of the hopping channel.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 100 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

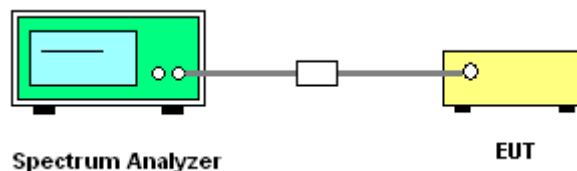




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%


<Ant. 6>

Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.501	0.0691	Pass
UHF RFID	1	914.75	0.501	0.0695	Pass
UHF RFID	1	927.25	0.501	0.0675	Pass


Channel Separation Plot on 902.75 MHz

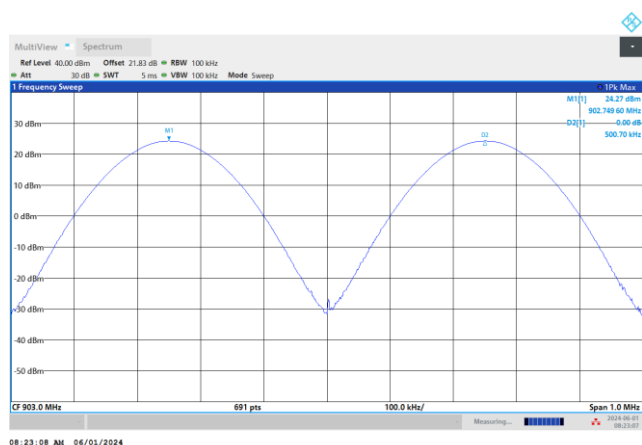

Channel Separation Plot on 914.75 MHz

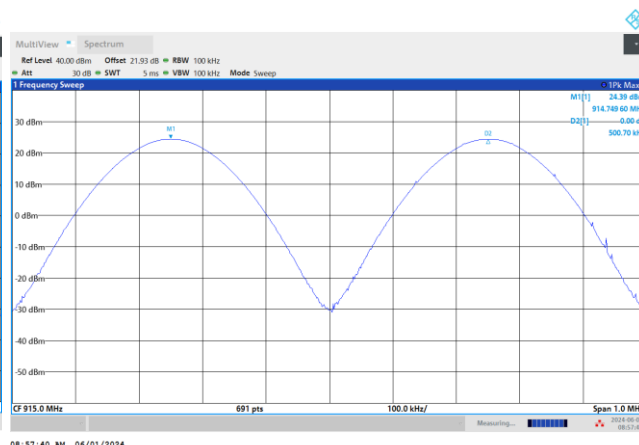

Channel Separation Plot on 927.25 MHz

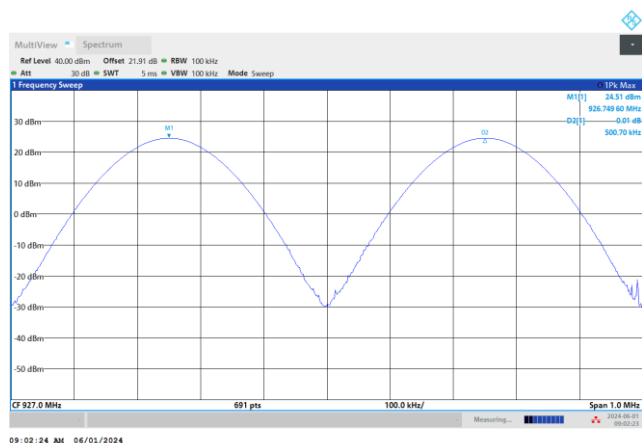





<Ant. 7>

Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.499	0.0687	Pass
UHF RFID	1	914.75	0.501	0.0687	Pass
UHF RFID	1	927.25	0.501	0.0690	Pass


Channel Separation Plot on 902.75 MHz

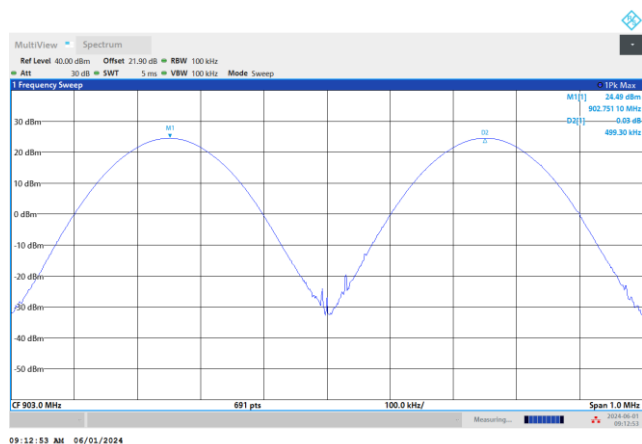

Channel Separation Plot on 914.75 MHz

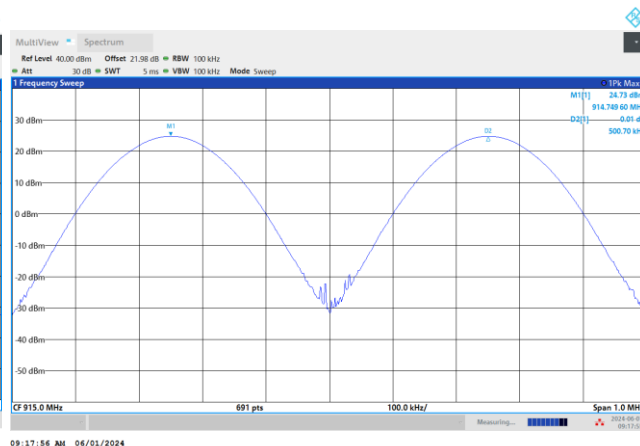

Channel Separation Plot on 927.25 MHz

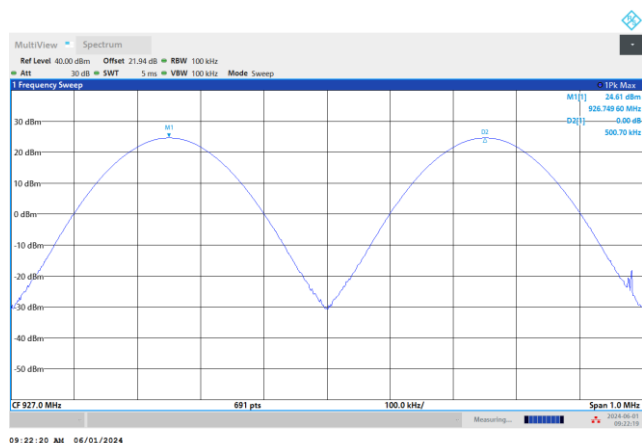

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

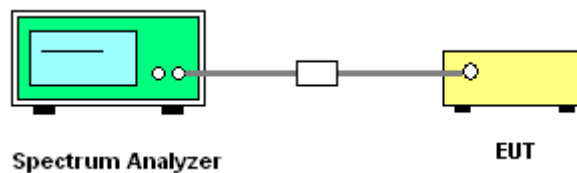




3.3.5 Test Result of Dwell Time

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%

<Ant. 6>

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	42.03	1.00	0.042	0.4	Pass

Package Transfer Time Plot

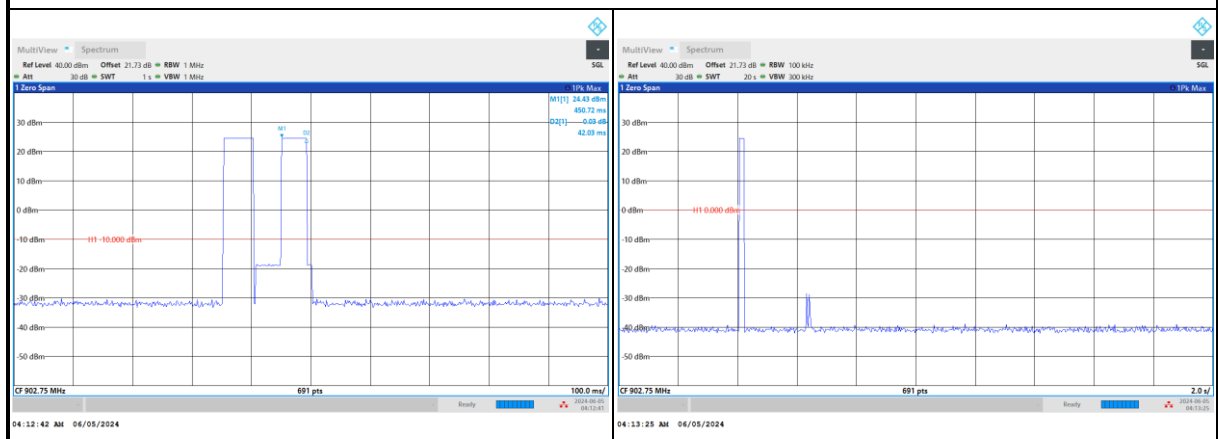


Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



<Ant. 7>

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	42.03	1.00	0.042	0.4	Pass

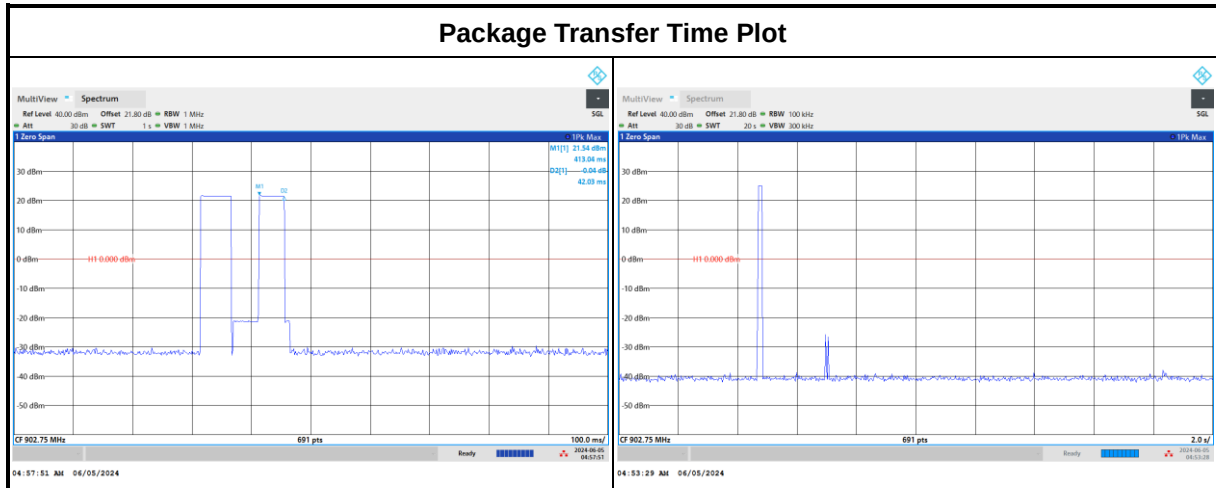

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq 1\%$ of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq 1\text{--}5\%$ of the 99% bandwidth; VBW $\geq 3 * \text{RBW}$; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

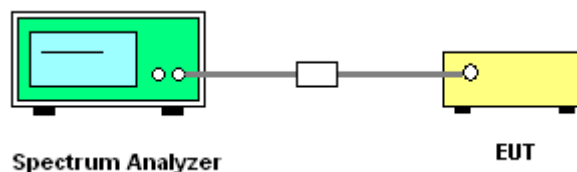



3.4.5 Test Result of 20dB Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%


<Ant. 6>

Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.069	Pass
UHF RFID	1	914.75	0.070	Pass
UHF RFID	1	927.25	0.068	Pass


20 dB Bandwidth Plot on 902.75 MHz



20 dB Bandwidth Plot on 914.75 MHz

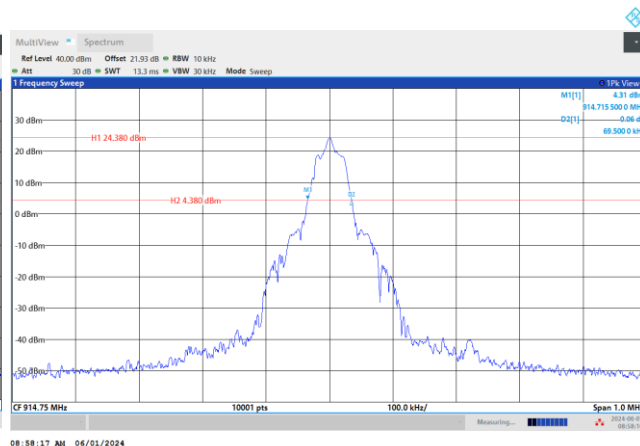




20 dB Bandwidth Plot on 927.25 MHz

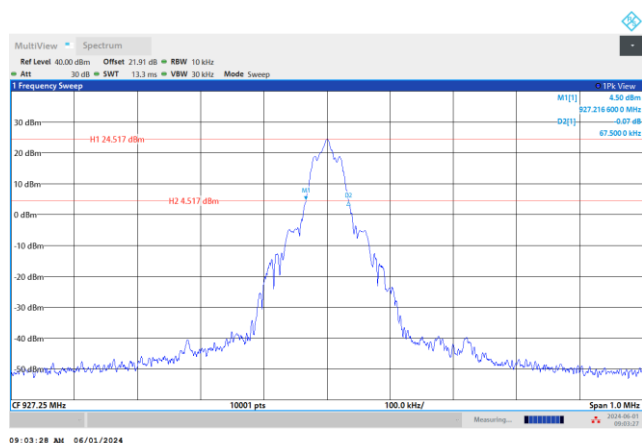



<Ant. 7>

Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.069	Pass
UHF RFID	1	914.75	0.069	Pass
UHF RFID	1	927.25	0.069	Pass

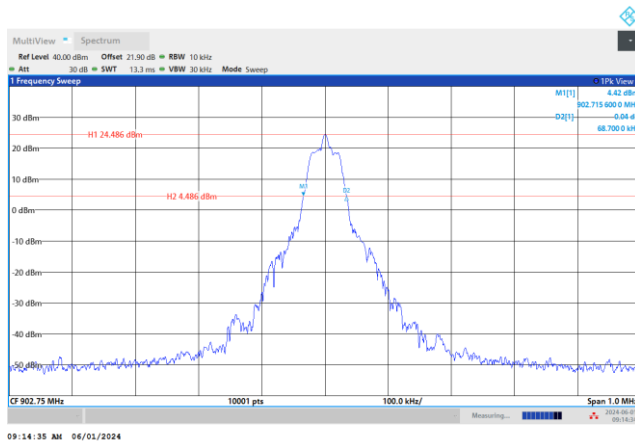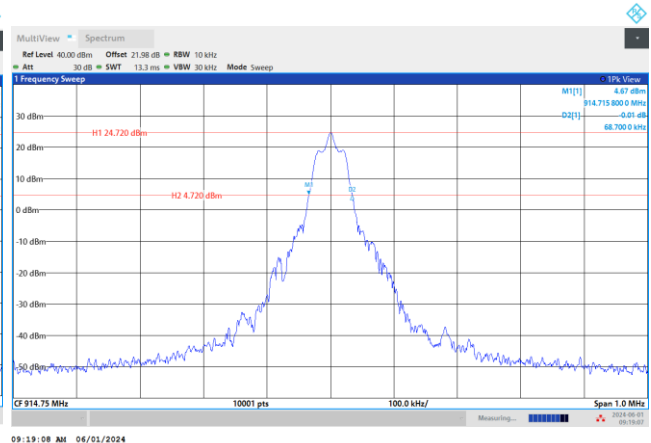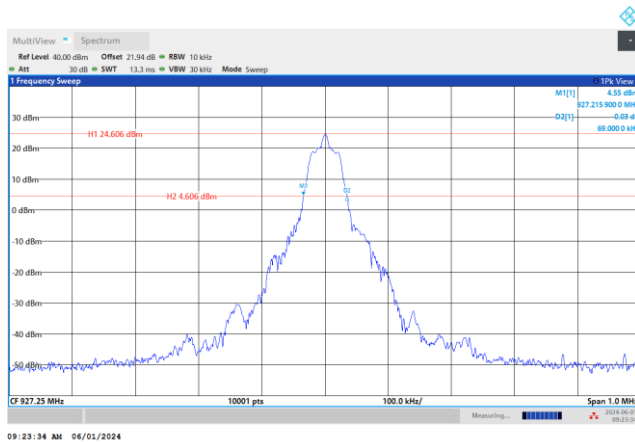20 dB Bandwidth Plot on 902.75 MHz**20 dB Bandwidth Plot on 914.75 MHz****20 dB Bandwidth Plot on 927.25 MHz**




3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%


<Ant. 6>

Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.063	Reporting Only
UHF RFID	1	914.75	0.064	Reporting Only
UHF RFID	1	927.25	0.065	Reporting Only


99% Occupied Bandwidth Plot on 902.75 MHz

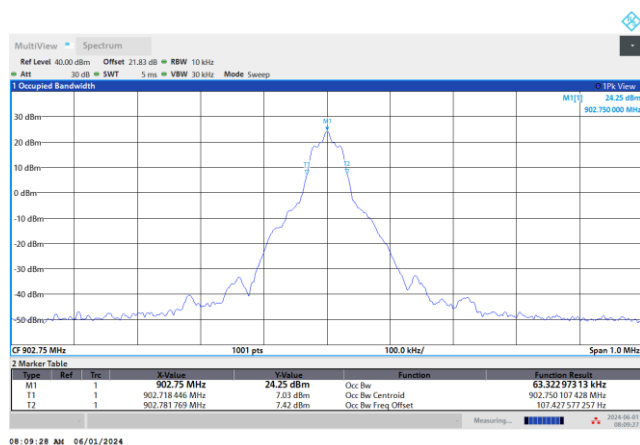

99% Occupied Bandwidth Plot on 914.75 MHz

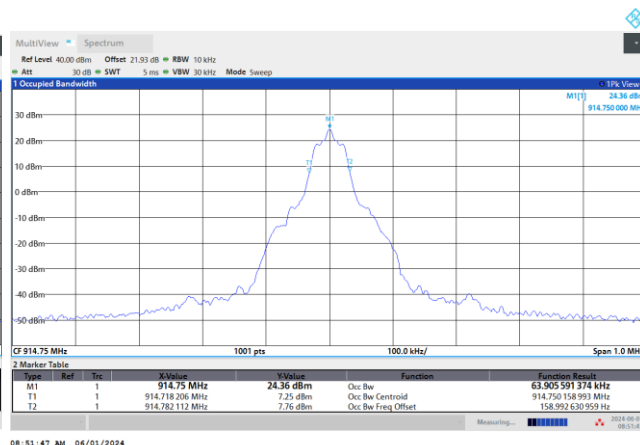

99% Occupied Bandwidth Plot on 927.25 MHz

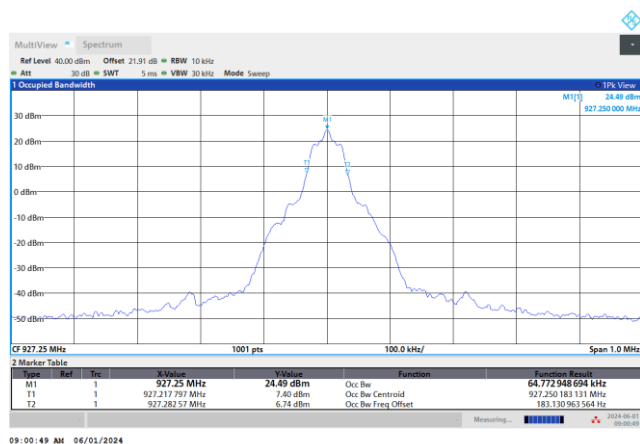


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<Ant. 7>

Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.062	Reporting Only
UHF RFID	1	914.75	0.062	Reporting Only
UHF RFID	1	927.25	0.063	Reporting Only


99% Occupied Bandwidth Plot on 902.75 MHz

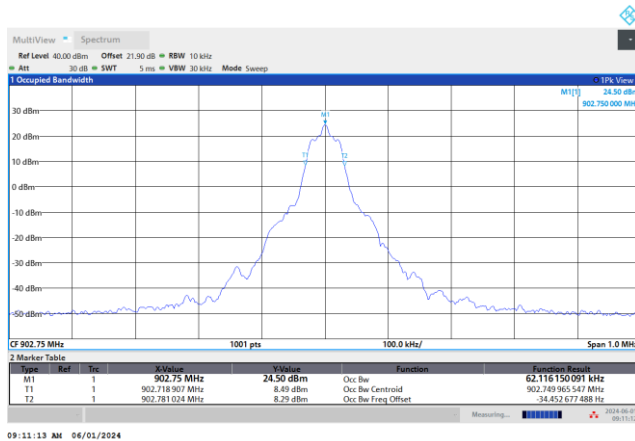

99% Occupied Bandwidth Plot on 914.75 MHz

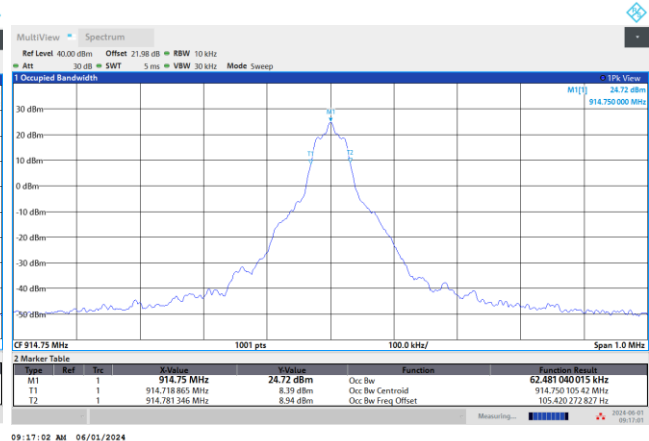

99% Occupied Bandwidth Plot on 927.25 MHz

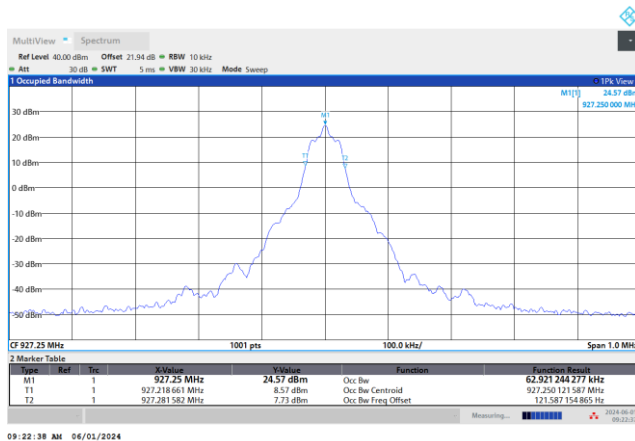

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

Section 15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

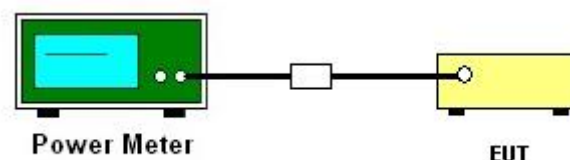

3.5.5 Test Result of Output Power

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%

<Ant. 6>

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	24.43	30.00	Pass
914.75	24.40	30.00	Pass
927.25	24.39	30.00	Pass

<Ant. 7>

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	24.49	30.00	Pass
914.75	24.45	30.00	Pass
927.25	24.42	30.00	Pass

3.5.6 Test Result of Average Power (Reporting Only)

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%

<Ant. 6>

Frequency (MHz)	RF Power (dBm)	
	UHF	
902.75	24.07	
914.75	24.04	
927.25	24.01	

<Ant. 7>

Frequency (MHz)	RF Power (dBm)	
	UHF	
902.75	24.11	
914.75	24.06	
927.25	24.01	

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

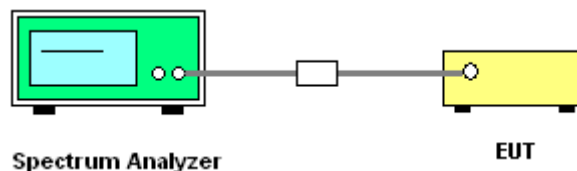




3.6.5 Test Result of Conducted Band Edges


Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%

<Ant. 6>

Low Band Edge Plot on 902.75 MHz

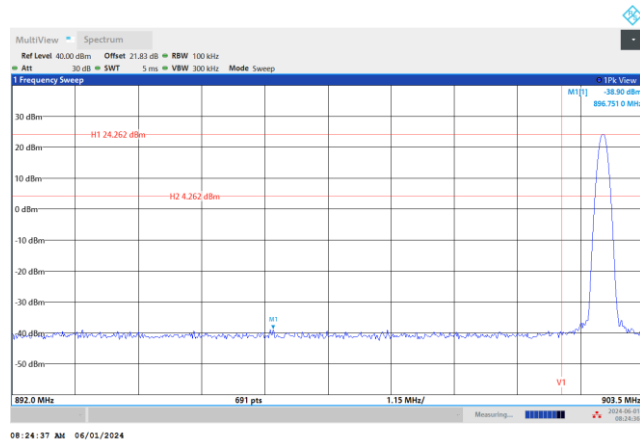


High Band Edge Plot on 927.25 MHz

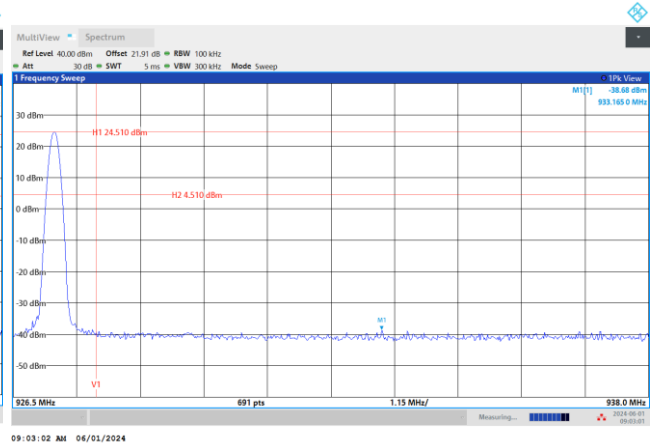


<Ant. 7>

Low Band Edge Plot on 902.75 MHz

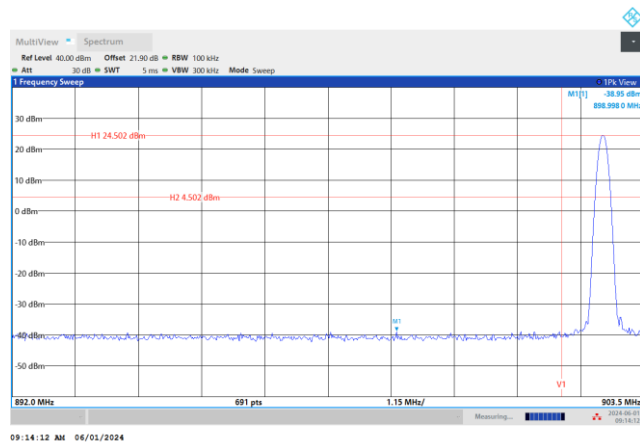

High Band Edge Plot on 927.25 MHz

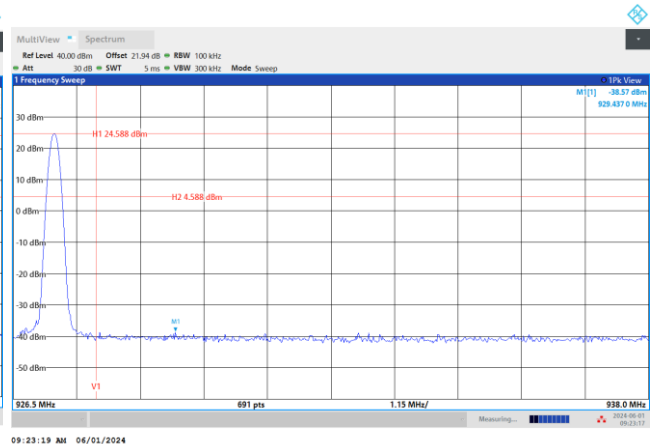





3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%



<Ant. 6>

Hopping Mode Low Band Edge Plot on 902.75 MHz Hopping Mode High Band Edge Plot on 927.25 MHz

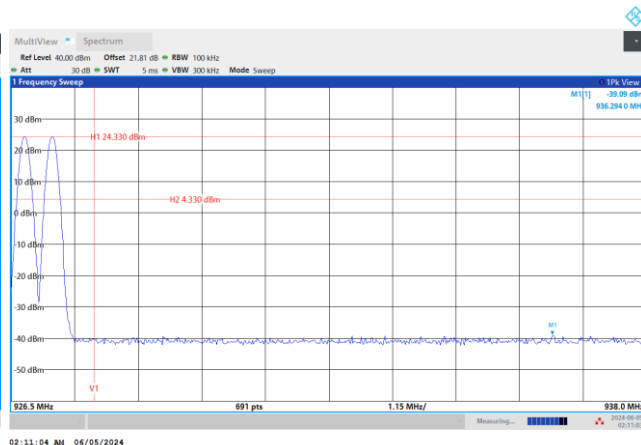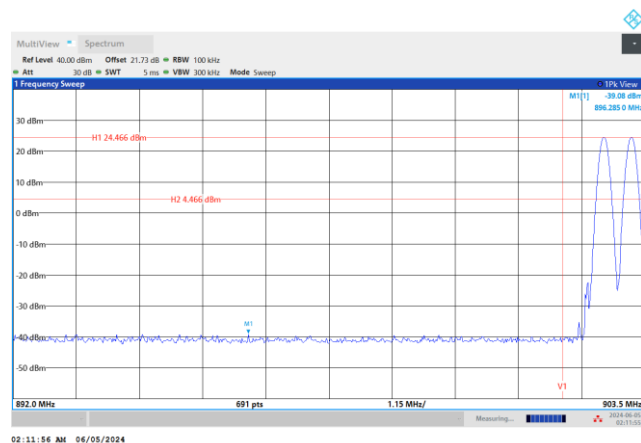

<Ant. 7>

Hopping Mode Low Band Edge Plot on 902.75 MHz Hopping Mode High Band Edge Plot on 927.25 MHz

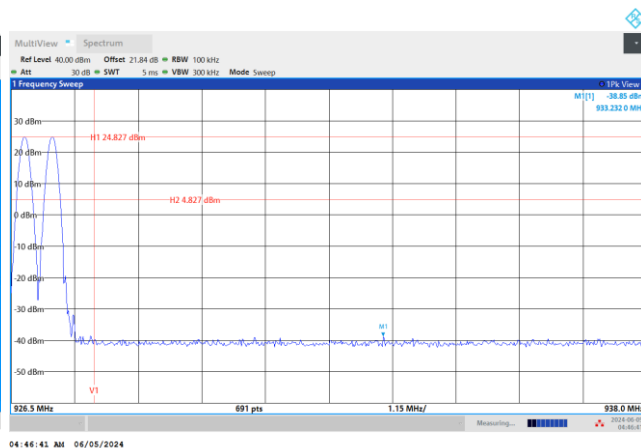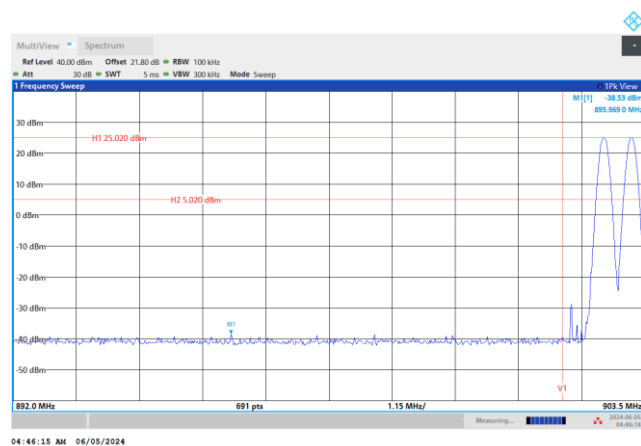

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

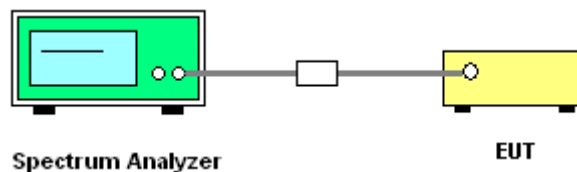





3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu	Relative Humidity :	50~56%

<Ant. 6>

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

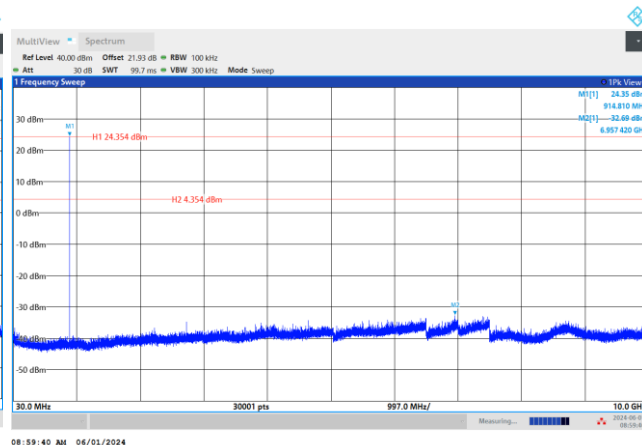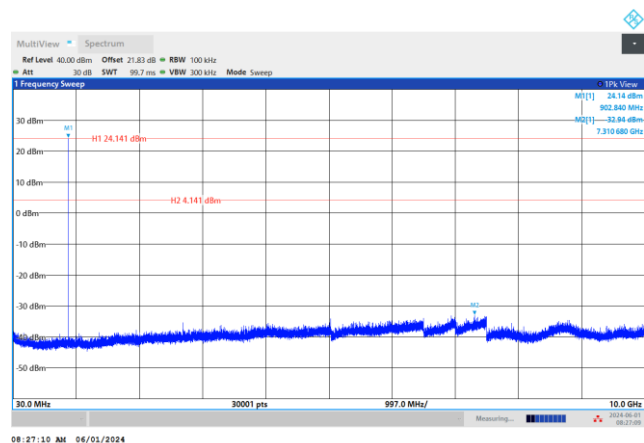



CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

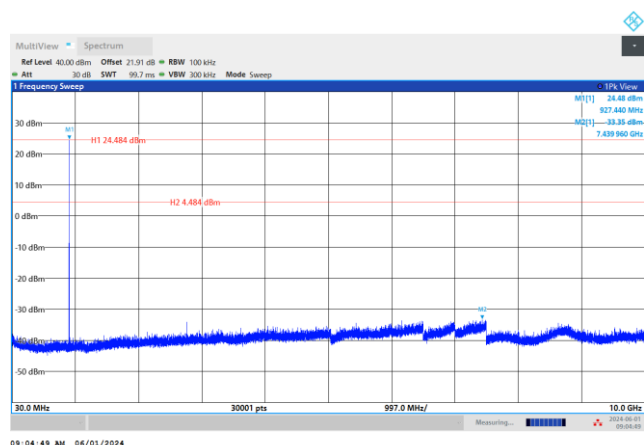




<Ant. 7>

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

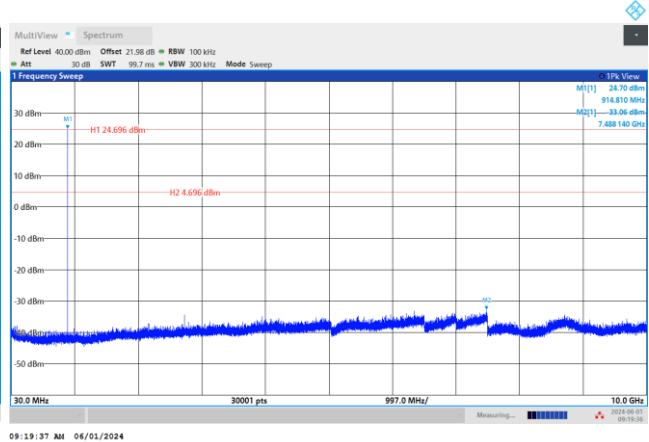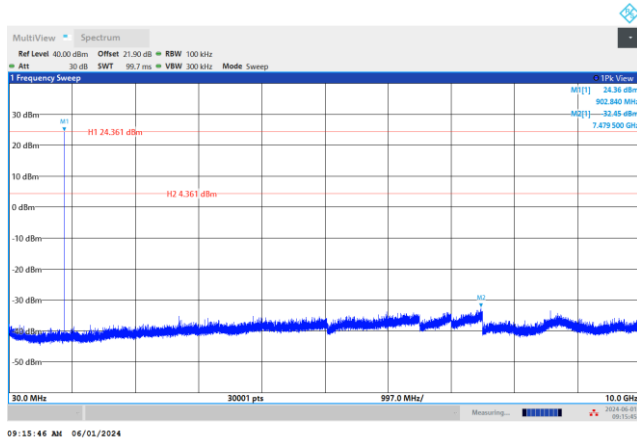

CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

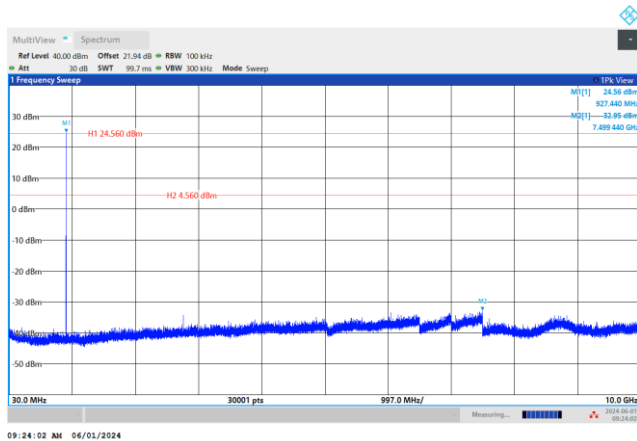

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.8.3 Test Procedures


1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.8.4 Test Setup


For radiated emissions below 30MHz

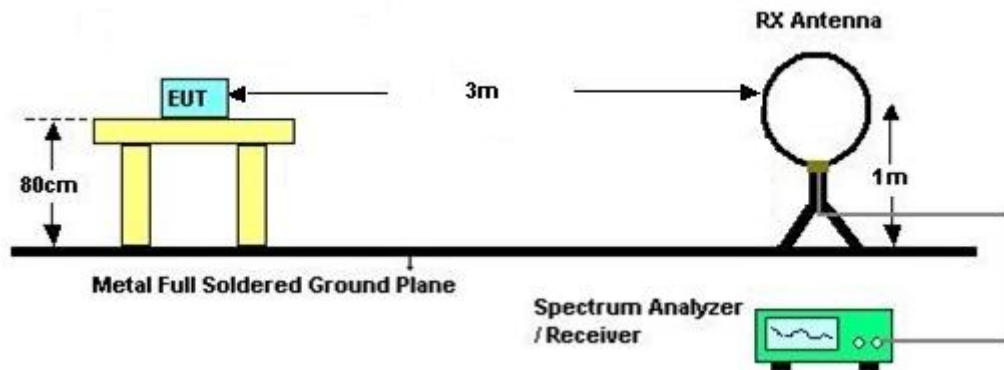

For radiated emissions from 30MHz to 1GHz

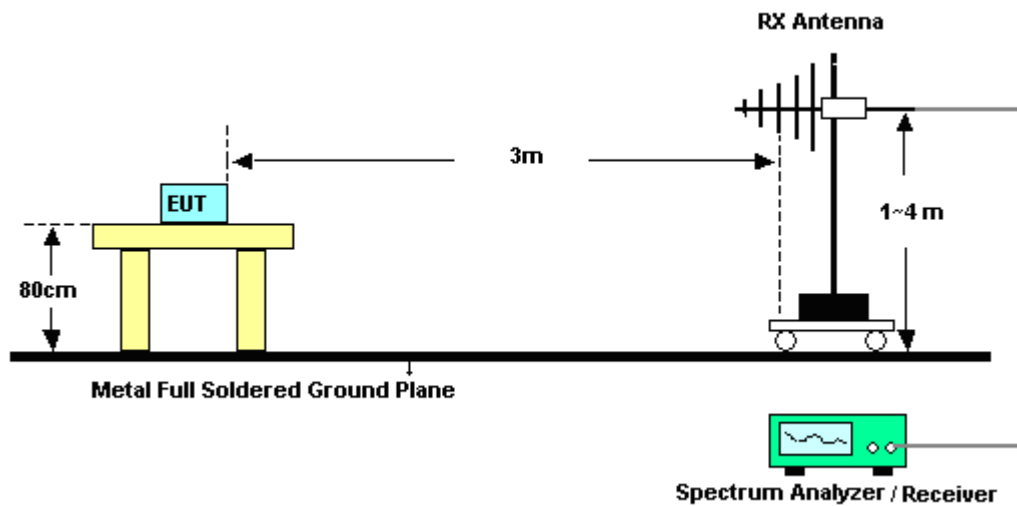

For radiated emissions above 1GHz

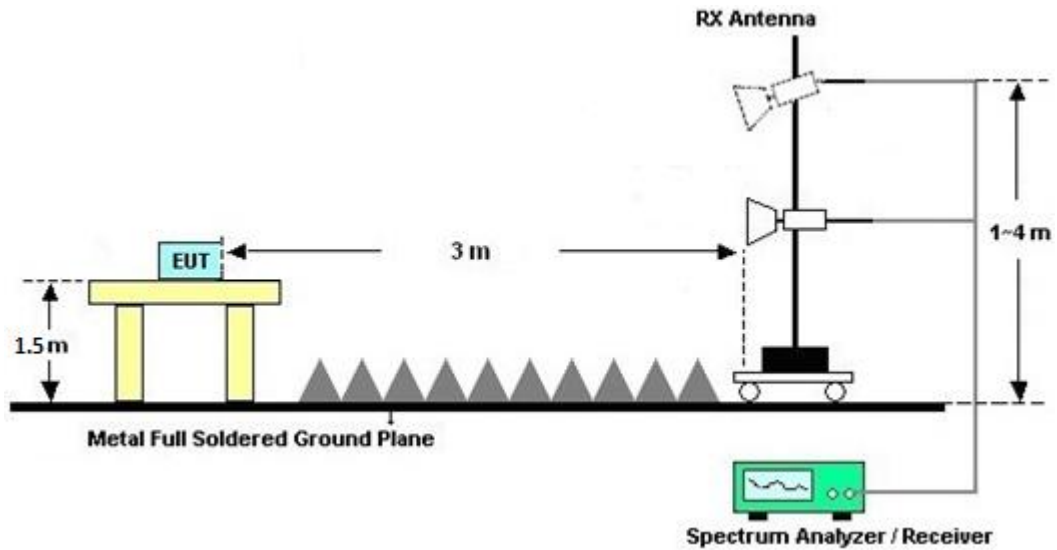

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.

3.9 AC Power Line Conducted Emissions Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test setup

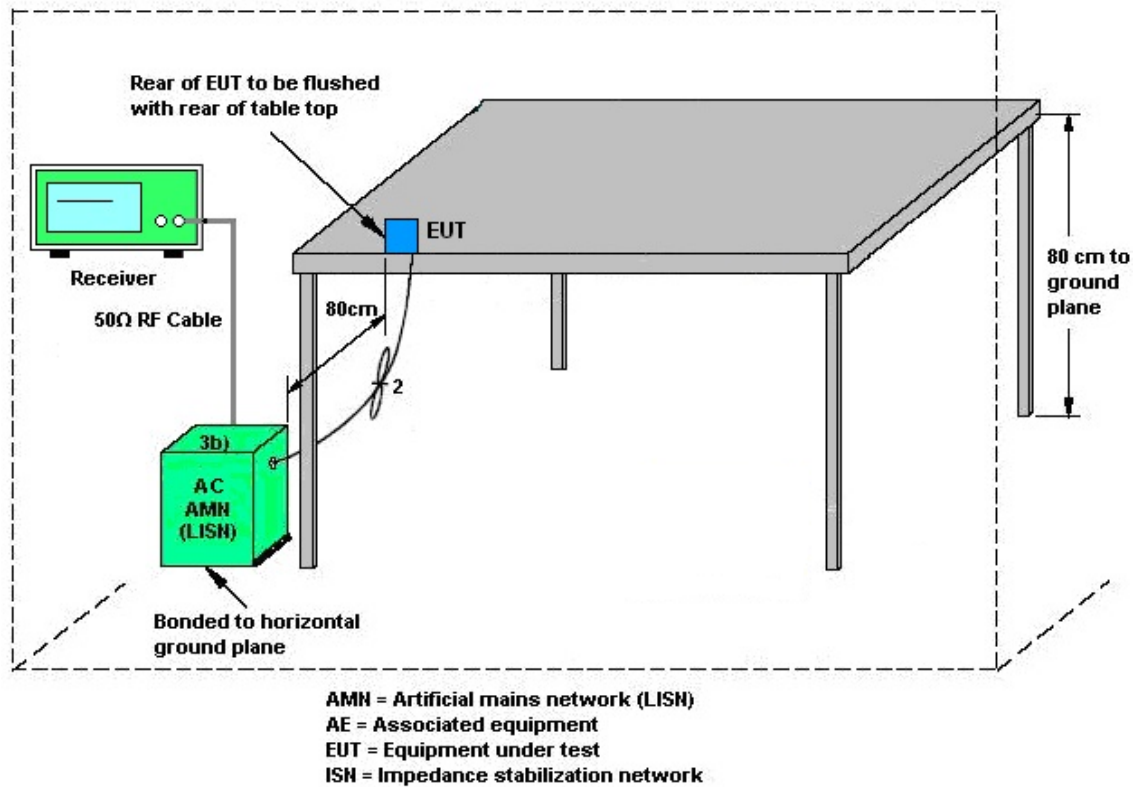

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Jul. 11, 2024~ Jul. 13, 2024	Apr. 21, 2025	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 27, 2023	Jul. 11, 2024~ Jul. 13, 2024	Nov. 26, 2024	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 23, 2024	Jul. 11, 2024~ Jul. 13, 2024	Feb. 22, 2025	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Jul. 11, 2024~ Jul. 13, 2024	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 02, 2023	Jul. 11, 2024~ Jul. 13, 2024	Oct. 01, 2024	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 26, 2024	Jul. 11, 2024~ Jul. 13, 2024	Mar. 25, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 21, 2024	Jul. 11, 2024~ Jul. 13, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 21, 2024	Jul. 11, 2024~ Jul. 13, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 15, 2023	Jul. 11, 2024~ Jul. 13, 2024	Sep. 14, 2024	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Jul. 11, 2024~ Jul. 13, 2024	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Jul. 11, 2024~ Jul. 13, 2024	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jul. 11, 2024~ Jul. 13, 2024	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Jul. 11, 2024~ Jul. 13, 2024	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 01, 2024	Jul. 11, 2024~ Jul. 13, 2024	Feb. 28, 2025	Radiation (03CH07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May 30, 2024~ Jun. 05, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 27, 2023	May 30, 2024~ Jun. 05, 2024	Jul. 26, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 27, 2023	May 30, 2024~ Jun. 05, 2024	Jul. 26, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	May 30, 2024~ Jun. 05, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	EMSW18SE	SW200302 (BOX9)	N/A	Mar. 08, 2024	May 30, 2024~ Jun. 05, 2024	Mar. 07, 2025	Conducted (TH05-HY)
Software1	Sporton	BTWIFI_Final_version:1.0(2024-04-11)	N/A	Conducted Items	N/A	May 30, 2024~ Jun. 05, 2024	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 19, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Jun. 19, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	Jun. 19, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 08, 2023	Jun. 19, 2024	Dec. 07, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Jun. 19, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jun. 19, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2023	Jun. 19, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Jun. 19, 2024	Dec. 27, 2024	Conduction (CO05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
--	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 430824
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

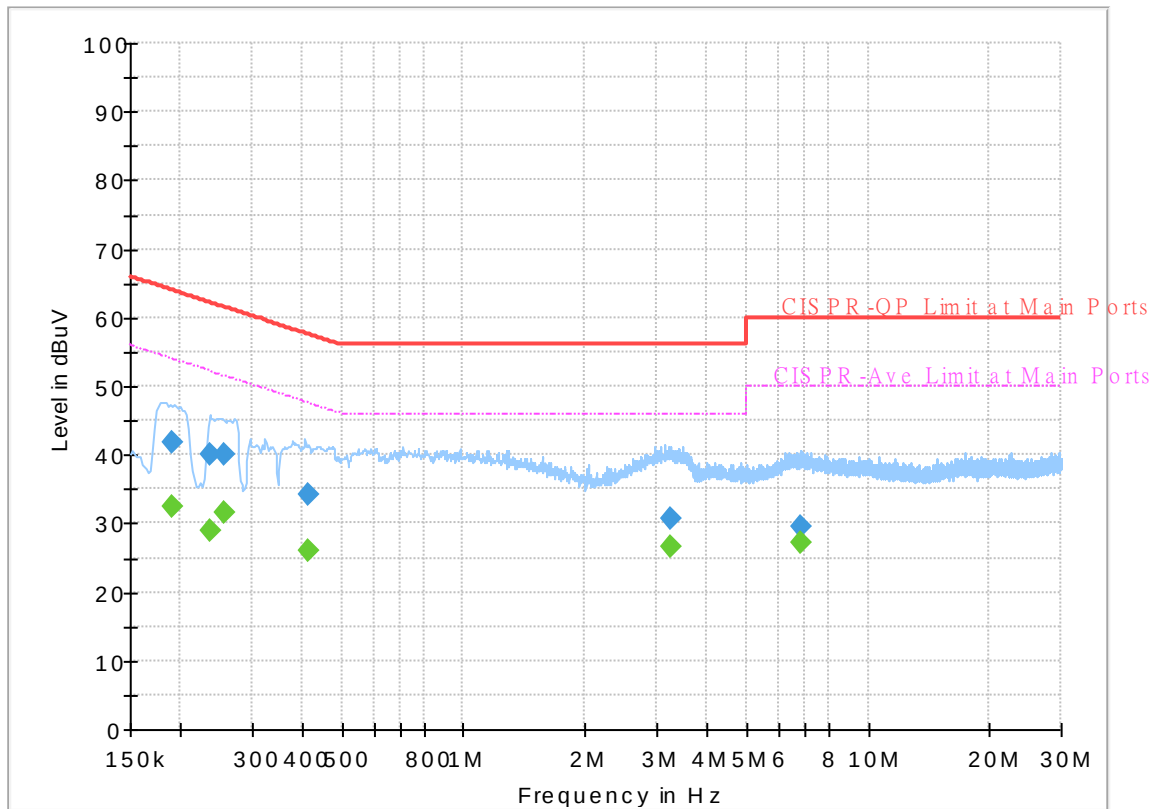


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.190500	---	32.34	54.02	21.68	L1	OFF	19.8
0.190500	41.92	---	64.02	22.10	L1	OFF	19.8
0.235500	---	29.06	52.25	23.19	L1	OFF	19.8
0.235500	40.04	---	62.25	22.21	L1	OFF	19.8
0.255750	---	31.59	51.57	19.98	L1	OFF	19.8
0.255750	40.20	---	61.57	21.37	L1	OFF	19.8
0.415500	---	26.09	47.54	21.45	L1	OFF	19.8
0.415500	34.29	---	57.54	23.25	L1	OFF	19.8
3.234750	---	26.54	46.00	19.46	L1	OFF	19.9
3.234750	30.63	---	56.00	25.37	L1	OFF	19.9
6.852750	---	27.30	50.00	22.70	L1	OFF	20.1
6.852750	29.44	---	60.00	30.56	L1	OFF	20.1

EUT Information

Report NO : 430824
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

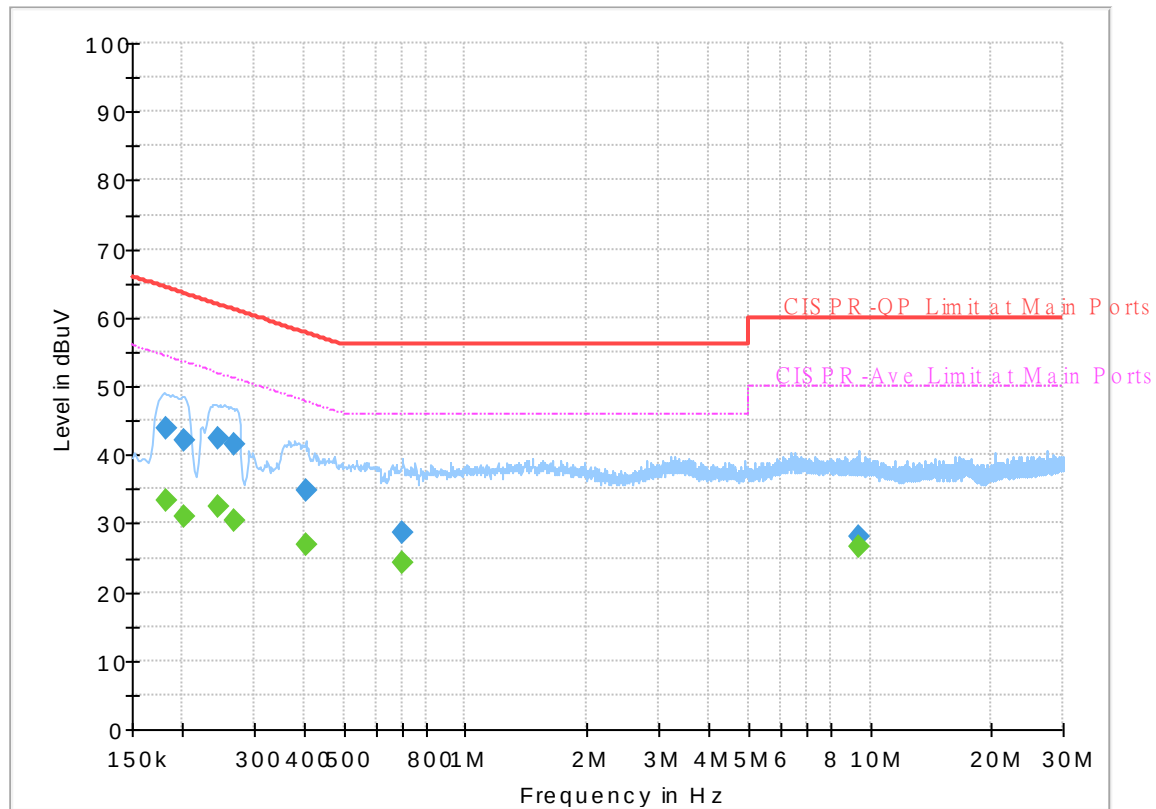

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.181500	---	33.33	54.42	21.09	N	OFF	19.8
0.181500	43.83	---	64.42	20.59	N	OFF	19.8
0.201750	---	30.97	53.54	22.57	N	OFF	19.8
0.201750	42.12	---	63.54	21.42	N	OFF	19.8
0.244500	---	32.33	51.94	19.61	N	OFF	19.8
0.244500	42.39	---	61.94	19.55	N	OFF	19.8
0.269250	---	30.29	51.14	20.85	N	OFF	19.8
0.269250	41.57	---	61.14	19.57	N	OFF	19.8
0.402000	---	26.81	47.81	21.00	N	OFF	19.8
0.402000	34.79	---	57.81	23.02	N	OFF	19.8
0.699000	---	24.16	46.00	21.84	N	OFF	19.8
0.699000	28.68	---	56.00	27.32	N	OFF	19.8
9.336750	---	26.58	50.00	23.42	N	OFF	20.3
9.336750	28.07	---	60.00	31.93	N	OFF	20.3



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.2~26°C
		Relative Humidity :	53.4~62.5%

Emission below 1GHz

UHF RFID (LF @ 3m)

UHF RFID Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID 902.75MHz		30.27	29.23	-10.77	40	33.89	24.21	1.07	29.94	-	-	P	H
		46.74	24.93	-15.07	40	37.5	16.04	1.32	29.93	-	-	P	H
		133.68	23.89	-19.61	43.5	34.11	17.48	2.16	29.86	-	-	P	H
		391.7	23	-23	46	28.16	21.14	3.53	29.83	-	-	P	H
		499.5	25.75	-20.25	46	28.09	23.49	4.01	29.84	-	-	P	H
	*	902.75	114.85	-	-	109.99	28.41	5.28	28.83	215	0	P	H
		970.6	36.34	-17.66	54	29.37	29.98	5.48	28.49	-	-	P	H
													H
													H
													H
													H
		30	31.72	-8.28	40	36.3	24.29	1.07	29.94	-	-	P	V
		144.75	18.37	-25.13	43.5	28.82	17.15	2.25	29.85	-	-	P	V
		261.66	19.98	-26.02	46	27.19	19.63	2.98	29.82	-	-	P	V
		419	23.58	-22.42	46	27.55	22.17	3.66	29.8	-	-	P	V
		533.8	25.35	-20.65	46	27.42	23.54	4.14	29.75	-	-	P	V
	*	902.75	114.17	-	-	109.31	28.41	5.28	28.83	100	148	P	V
		981.1	33.45	-20.55	54	26.36	29.95	5.53	28.39	-	-	P	V
													V
													V
													V
													V



UHF RFID Ant. 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		30	28.78	-11.22	40	33.36	24.29	1.07	29.94	-	-	P	H
		133.68	30.54	-12.96	43.5	40.76	17.48	2.16	29.86	-	-	P	H
		255.99	25.43	-20.57	46	33.33	18.97	2.95	29.82	-	-	P	H
		411.3	23.73	-22.27	46	28.09	21.83	3.62	29.81	-	-	P	H
		577.2	26.77	-19.23	46	27.18	25.06	4.29	29.76	-	-	P	H
	*	914.6	115.51	-	-	110.62	28.37	5.31	28.79	206	12	P	H
		976.2	34.07	-19.93	54	27.54	29.45	5.51	28.43	-	-	P	H
													H
													H
													H
													H
													H
		30	32.16	-7.84	40	36.74	24.29	1.07	29.94	-	-	P	V
		130.71	19.38	-24.12	43.5	29.6	17.5	2.14	29.86	-	-	P	V
		273.54	23.7	-22.3	46	31.82	18.67	3.03	29.82	-	-	P	V
		435.8	26.78	-19.22	46	30.49	22.31	3.75	29.77	-	-	P	V
		573.7	26.91	-19.09	46	27.17	25.21	4.28	29.75	-	-	P	V
	*	914.75	115.15	-	-	110.26	28.37	5.31	28.79	108	122	P	V
		982.5	34.66	-19.34	54	27.79	29.7	5.54	28.37	-	-	P	V
													V
													V
													V
													V
													V

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 6		(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
UHF RFID 927.25MHz		30.27	30.58	-9.42	40	35.24	24.21	1.07	29.94	-	-	P	H
		45.93	24.76	-15.24	40	36.87	16.51	1.31	29.93	-	-	P	H
		91.02	20.08	-23.42	43.5	33.44	14.74	1.81	29.91	-	-	P	H
		486.2	24.79	-21.21	46	27.49	23.16	3.96	29.82	-	-	P	H
		657.7	27.91	-18.09	46	27.06	25.94	4.55	29.64	-	-	P	H
	*	927.25	115.83	-	-	111.31	27.93	5.34	28.75	199	20	P	H
		972.7	33.82	-20.18	54	26.9	29.9	5.49	28.47	-	-	P	H
													H
													H
													H
													H
													H
													H
		30	31.63	-8.37	40	36.21	24.29	1.07	29.94	-	-	P	V
		47.28	18.82	-21.18	40	31.68	15.74	1.33	29.93	-	-	P	V
		91.02	22	-21.5	43.5	35.36	14.74	1.81	29.91	-	-	P	V
		492.5	30.19	-15.81	46	32.67	23.37	3.98	29.83	-	-	P	V
		631.1	27.65	-18.35	46	27.2	25.69	4.47	29.71	-	-	P	V
	*	927.25	114.29	-	-	109.77	27.93	5.34	28.75	154	117	P	V
		980.4	33.28	-20.72	54	26.06	30.08	5.53	28.39	-	-	P	V
													V
													V
													V
													V
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. Non restricted band limit is radio frequency level down 20db												
	4. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

**UHF RFID (Harmonic @ 3m)**

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dBμV/m)	(dB)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
6					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID 902.75MHz		2708.25	43.42	-30.58	74	60.59	32.33	9.59	59.09	166	65	P	H
		2708.25	38.48	-15.52	54	55.65	32.33	9.59	59.09	166	65	A	H
		3611	43.36	-30.64	74	59.29	32.77	10.84	59.54	100	42	P	H
		3611	39.16	-14.84	54	55.09	32.77	10.84	59.54	100	42	A	H
		4513.75	45.52	-28.48	74	59.09	33.98	12.29	59.84	260	60	P	H
		4513.75	39.93	-14.07	54	53.5	33.98	12.29	59.84	260	60	A	H
		5416.5	41.79	-32.21	74	51.21	34.73	13.33	57.48	-	-	P	H
		8124.75	41.32	-32.68	74	47.04	36	15.87	57.59	-	-	P	H
		9027.5	42.4	-31.6	74	47.95	36.15	16.83	58.53	-	-	P	H
		2708.25	46.15	-27.85	74	63.32	32.33	9.59	59.09	388	144	P	V
		2708.25	43.52	-10.48	54	60.69	32.33	9.59	59.09	388	144	A	V
		3611	39.85	-34.15	74	55.78	32.77	10.84	59.54	-	-	P	V
		4513.75	42.72	-31.28	74	56.29	33.98	12.29	59.84	-	-	P	V
		5416.5	40.55	-33.45	74	49.97	34.73	13.33	57.48	-	-	P	V
		8124.75	41.15	-32.85	74	46.87	36	15.87	57.59	-	-	P	V
		9027.5	42.63	-31.37	74	48.18	36.15	16.83	58.53	-	-	P	V



UHF RFID Ant. 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		2744.25	48.01	-25.99	74	65.23	32.2	9.67	59.09	400	313	P	H
		2744.25	45.08	-8.92	54	62.3	32.2	9.67	59.09	400	313	A	H
		3659	44.89	-29.11	74	60.58	33.02	10.88	59.59	300	252	P	H
		3659	38.91	-15.09	54	54.6	33.02	10.88	59.59	300	252	A	H
		4573.75	44.59	-29.41	74	57.65	34.25	12.39	59.7	300	68	P	H
		4573.75	40.84	-13.16	54	53.9	34.25	12.39	59.7	300	68	A	H
		7318	49.78	-24.22	74	56.38	35.8	15.34	57.74	385	20	P	H
		7318	46.59	-7.41	54	53.19	35.8	15.34	57.74	385	20	A	H
		8232.75	42.98	-31.02	74	48.81	35.83	15.91	57.57	-	-	P	H
		9147.5	43.65	-30.35	74	49.07	36.19	17.23	58.84	-	-	P	H
		2744.25	48.28	-25.72	74	65.5	32.2	9.67	59.09	281	189	P	V
		2744.25	46.18	-7.82	54	63.4	32.2	9.67	59.09	281	189	A	V
		3659	40.14	-33.86	74	55.83	33.02	10.88	59.59	-	-	P	V
		4573.75	40.43	-33.57	74	53.49	34.25	12.39	59.7	-	-	P	V
		7318	45.72	-28.28	74	52.32	35.8	15.34	57.74	200	306	P	V
		7318	43	-11	54	49.6	35.8	15.34	57.74	200	306	A	V
		8232.75	41.73	-32.27	74	47.56	35.83	15.91	57.57	-	-	P	V
		9147.5	43.3	-30.7	74	48.72	36.19	17.23	58.84	-	-	P	V



UHF RFID Ant. 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 927.25MHz		2781.75	42.83	-31.17	74	59.86	32.3	9.75	59.08	105	0	P	H
		2781.75	35.8	-18.2	54	52.83	32.3	9.75	59.08	105	0	A	H
		3709	43.28	-30.72	74	58.89	33.12	10.91	59.64	359	0	P	H
		3709	35.61	-18.39	54	51.22	33.12	10.91	59.64	359	0	A	H
		4636.25	40	-34	74	52.92	34.15	12.49	59.56	-	-	P	H
		7418	48.24	-25.76	74	55.02	35.66	15.42	57.86	213	320	P	H
		7418	44.58	-9.42	54	51.36	35.66	15.42	57.86	213	320	A	H
		8345.25	41.86	-32.14	74	47.71	35.7	16	57.55	-	-	P	H
		2781.75	43.32	-30.68	74	60.35	32.3	9.75	59.08	400	74	P	V
		2781.75	37.74	-16.26	54	54.77	32.3	9.75	59.08	400	74	A	V
		3709	40.17	-33.83	74	55.78	33.12	10.91	59.64	-	-	P	V
		4636.25	39.36	-34.64	74	52.28	34.15	12.49	59.56	-	-	P	V
		7418	42.61	-31.39	74	49.39	35.66	15.42	57.86	-	-	P	V
		8345.25	41.93	-32.07	74	47.78	35.7	16	57.55	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

UHF RFID (LF @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID 902.75MHz		32.16	25.47	-14.53	40	30.75	23.55	1.1	29.93	-	-	P	H
		48.36	23.03	-16.97	40	36.42	15.18	1.35	29.92	-	-	P	H
		135.03	22.62	-20.88	43.5	32.85	17.46	2.17	29.86	-	-	P	H
		399.4	21.34	-24.66	46	26.25	21.36	3.56	29.83	-	-	P	H
		554.8	27.26	-18.74	46	27.69	25.07	4.22	29.72	-	-	P	H
	*	902.75	116.62	-	-	111.76	28.41	5.28	28.83	132	6	P	H
		971.3	33.42	-20.58	54	26.41	30	5.49	28.48	-	-	P	H
													H
													H
													H
		30.27	31.5	-8.5	40	36.16	24.21	1.07	29.94	-	-	P	V
		127.47	17.12	-26.38	43.5	27.37	17.51	2.11	29.87	-	-	P	V
		290.28	20.52	-25.48	46	28.27	18.95	3.11	29.81	-	-	P	V
		381.9	21.07	-24.93	46	26.53	20.87	3.49	29.82	-	-	P	V
		502.3	24.32	-21.68	46	26.6	23.53	4.02	29.83	-	-	P	V
	*	902.75	115.44	-	-	110.58	28.41	5.28	28.83	100	134	P	V
		961.5	33.86	-20.14	54	27.33	29.66	5.44	28.57			P	V
													V
													V
													V



UHF RFID Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		30.54	25.83	-14.17	40	30.56	24.13	1.08	29.94	-	-	P	H
		47.82	22.92	-17.08	40	36.04	15.46	1.34	29.92	-	-	P	H
		135.84	22.01	-21.49	43.5	32.26	17.43	2.18	29.86	-	-	P	H
		415.5	22.27	-23.73	46	26.51	21.93	3.64	29.81	-	-	P	H
		552.7	26.77	-19.23	46	27.36	24.91	4.21	29.71	-	-	P	H
	*	914.75	116.77	-	-	111.88	28.37	5.31	28.79	129	0	P	H
		965	33.47	-20.53	54	26.96	29.59	5.46	28.54	-	-	P	H
													H
													H
													H
													H
													H
		30	31.7	-8.3	40	36.28	24.29	1.07	29.94	-	-	P	V
		135.84	17.6	-25.9	43.5	27.85	17.43	2.18	29.86	-	-	P	V
		297.84	20.37	-25.63	46	27.91	19.12	3.15	29.81	-	-	P	V
		405.7	22.14	-23.86	46	26.72	21.65	3.59	29.82	-	-	P	V
		558.3	27.05	-18.95	46	27.21	25.33	4.23	29.72	-	-	P	V
	*	914.75	116.22	-	-	111.33	28.37	5.31	28.79	100	125	P	V
		969.2	33.35	-20.65	54	26.41	29.96	5.48	28.5	-	-	P	V
													V
													V
													V
													V
													V

[illegible]

**UHF RFID (Harmonic @ 3m)**

UHF RFID Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 902.75MHz		2708.25	49.55	-24.45	74	66.72	32.33	9.59	59.09	100	150	P	H
		2708.25	42.92	-11.08	54	60.09	32.33	9.59	59.09	100	150	A	H
		3611	44.04	-29.96	74	59.97	32.77	10.84	59.54	100	35	P	H
		3611	37.46	-16.54	54	53.39	32.77	10.84	59.54	100	35	A	H
		4513.75	46.25	-27.75	74	59.82	33.98	12.29	59.84	300	62	P	H
		4513.75	40.23	-13.77	54	53.8	33.98	12.29	59.84	300	62	A	H
		5416.5	42.03	-31.97	74	51.45	34.73	13.33	57.48	-	-	P	H
		8124.75	41.84	-32.16	74	47.56	36	15.87	57.59	-	-	P	H
		9027.5	42.6	-31.4	74	48.15	36.15	16.83	58.53	-	-	P	H
		2708.25	47.53	-26.47	74	64.7	32.33	9.59	59.09	100	158	P	V
		2708.25	44.42	-9.58	54	61.59	32.33	9.59	59.09	100	158	A	V
		3611	44.03	-29.97	74	59.96	32.77	10.84	59.54	274	360	P	V
		3611	37.26	-16.74	54	53.19	32.77	10.84	59.54	274	360	A	V
		4513.75	44.77	-29.23	74	58.34	33.98	12.29	59.84	387	360	P	V
		4513.75	37.55	-16.45	54	51.12	33.98	12.29	59.84	387	360	A	V
		5416.5	40.47	-33.53	74	49.89	34.73	13.33	57.48	-	-	P	V
		8124.75	41.26	-32.74	74	46.98	36	15.87	57.59	-	-	P	V
		9027.5	42.25	-31.75	74	47.8	36.15	16.83	58.53	-	-	P	V



UHF RFID Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		2744.25	47.11	-26.89	74	64.33	32.2	9.67	59.09	400	73	P	H
		2744.25	44.06	-9.94	54	61.28	32.2	9.67	59.09	400	73	A	H
		3659	44.89	-29.11	74	60.58	33.02	10.88	59.59	338	360	P	H
		3659	37.21	-16.79	54	52.9	33.02	10.88	59.59	338	360	A	H
		4573.75	44.51	-29.49	74	57.57	34.25	12.39	59.7	300	54	P	H
		4573.75	39.74	-14.26	54	52.8	34.25	12.39	59.7	300	54	A	H
		7318	49.42	-24.58	74	56.02	35.8	15.34	57.74	200	317	P	H
		7318	45.62	-8.38	54	52.22	35.8	15.34	57.74	200	317	A	H
		8232.75	43.06	-30.94	74	48.89	35.83	15.91	57.57	-	-	P	H
		9147.5	42.34	-31.66	74	47.76	36.19	17.23	58.84	-	-	P	H
		2744.25	46.72	-27.28	74	63.94	32.2	9.67	59.09	190	153	P	V
		2744.25	45.28	-8.72	54	62.5	32.2	9.67	59.09	190	153	A	V
		3659	43.17	-30.83	74	58.86	33.02	10.88	59.59	320	360	P	V
		3659	36.23	-17.77	54	51.92	33.02	10.88	59.59	320	360	A	V
		4573.75	42.27	-31.73	74	55.33	34.25	12.39	59.7	-	-	P	V
		7318	45.45	-28.55	74	52.05	35.8	15.34	57.74	200	195	P	V
		7318	42.55	-11.45	54	49.15	35.8	15.34	57.74	200	195	A	V
		8232.75	41.51	-32.49	74	47.34	35.83	15.91	57.57	-	-	P	V
		9147.5	43.12	-30.88	74	48.54	36.19	17.23	58.84	-	-	P	V



UHF RFID Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 927.25MHz		2781.75	43.71	-30.29	74	60.74	32.3	9.75	59.08	400	76	P	H
		2781.75	39.67	-14.33	54	56.7	32.3	9.75	59.08	400	76	A	H
		3709	42.37	-31.63	74	57.98	33.12	10.91	59.64	390	360	P	H
		3709	35.8	-18.2	54	51.41	33.12	10.91	59.64	390	360	A	H
		4636.25	40.64	-33.36	74	53.56	34.15	12.49	59.56	-	-	P	H
		7418	47.79	-26.21	74	54.57	35.66	15.42	57.86	200	323	P	H
		7418	45.82	-8.18	54	52.6	35.66	15.42	57.86	200	323	A	H
		8345.25	43.41	-30.59	74	49.26	35.7	16	57.55	-	-	P	H
		2781.75	43.08	-30.92	74	60.11	32.3	9.75	59.08	300	47	P	V
		2781.75	40.57	-13.43	54	57.6	32.3	9.75	59.08	300	47	A	V
		3709	41.66	-32.34	74	57.27	33.12	10.91	59.64	100	325	P	V
		3709	34.6	-19.4	54	50.21	33.12	10.91	59.64	100	325	A	V
		4636.25	40.32	-33.68	74	53.24	34.15	12.49	59.56	-	-	P	V
		7418	43.3	-30.7	74	50.08	35.66	15.42	57.86	-	-	P	V
		8345.25	42.07	-31.93	74	47.92	35.7	16	57.55	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID		2781.75	43.71	-30.29	74	60.74	32.3	9.75	59.08	400	76	P	H
913.25MHz		2781.75	39.67	-14.33	54	56.7	32.3	9.75	59.08	400	76	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2781.75MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.30(dB/m) + 9.75(dB) + 60.74(dBμV) – 59.08 (dB)
= 43.71 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.71(dBμV/m) – 74(dBμV/m)
= -30.29(dB)

For Average Limit @ 2781.75MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.30(dB/m) + 9.75(dB) + 56.70(dBμV) – 59.08 (dB)
= 39.67 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 39.67(dBμV/m) – 54(dBμV/m)
= -14.33(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.2~26°C
		Relative Humidity :	53.4~62.5%

Emission below 1GHz



UHF RFID (LF @ 3m)

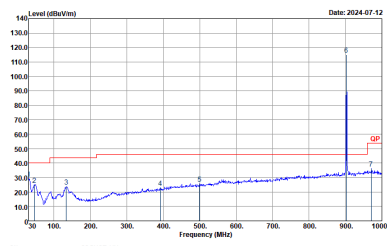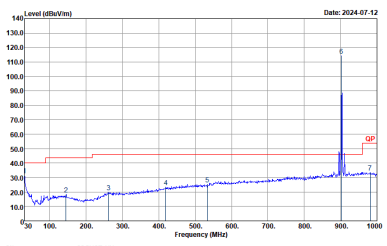UHF RFID	UHF RFID	
ANT	UHF RFID 902.75MHz	
6	Horizontal	Vertical
QP / Peak	 Site : 03CK07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL 1.	 Site : 03CK07-HY Condition : QP 3m LF-ANT-35419(6)_H VERTICAL 1.

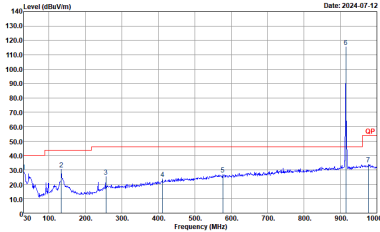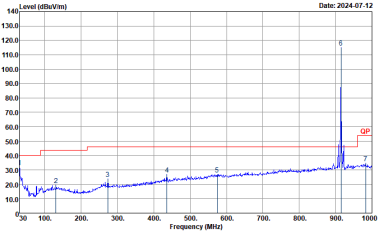

UHF RFID	UHF RFID	
ANT	UHF RFID 914.75MHz	
6	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H VERTICAL :

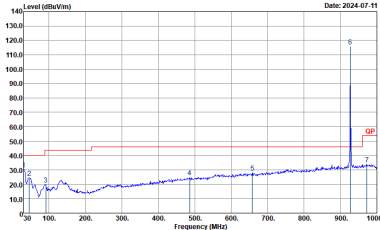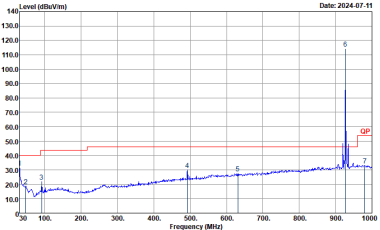

UHF RFID	UHF RFID	
ANT	UHF RFID 927.25MHz	
6	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H VERTICAL :



Peak
Avg.



UHF RFID		UHF RFID		
ANT		UHF RFID 914.75MHz		
6		Horizontal	Vertical	
Peak Avg.	Level (dBmV/m) Date: 2024 07 12 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL 1.		Level (dBmV/m) Date: 2024 07 12 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL 1.	



Report No. : FR430824I

Peak
Avg.





Emission below 1GHz



UHF RFID (LF @ 3m)

UHF RFID	UHF RFID	
ANT	UHF RFID 902.75MHz	
7	Horizontal	Vertical
QP / Peak	Level (dBuV/m) Date: 2024.07.12 Site : 03CH07-HY Condition : QP 3m LF-ANT-35415(6)_H HORIZONTAL 1.	Level (dBuV/m) Date: 2024.07.12 Site : 03CH07-HY Condition : QP 3m LF-ANT-35415(6)_H VERTICAL 1.

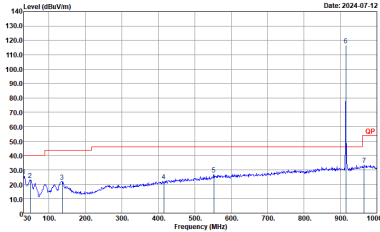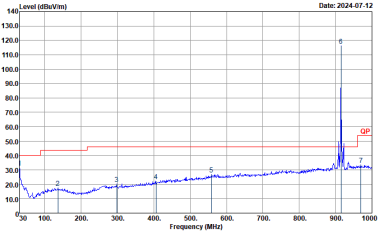



UHF RFID	UHF RFID	
ANT	UHF RFID 914.75MHz	
7	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H VERTICAL :

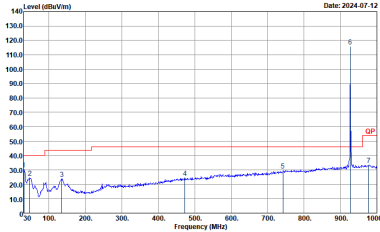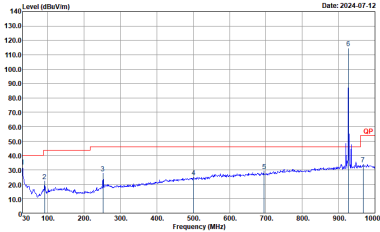

UHF RFID	UHF RFID	
ANT	UHF RFID 927.25MHz	
7	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : QP-3m LF-ANT-35419(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP-3m LF-ANT-35419(6)_H VERTICAL :



UHF RFID (Harmonic @ 3m)

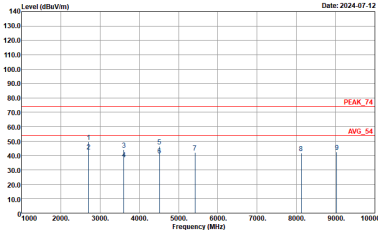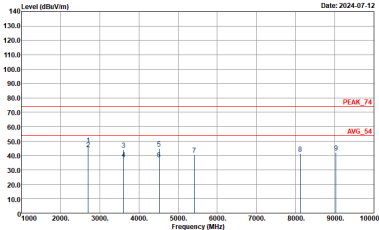UHF RFID	UHF RFID	
ANT	UHF RFID 902.75MHz	
7	Horizontal	Vertical
Peak Avg.	140 Level (dBuV/m) Date: 2024-07-12  Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	140 Level (dBuV/m) Date: 2024-07-12  Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :



UHF RFID		UHF RFID	
ANT		UHF RFID 914.75MHz	
7	Horizontal	Vertical	
Peak Avg.	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :	



UHF RFID	UHF RFID	
ANT	UHF RFID 927.25MHz	
7	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024-07-12 Frequency (MHz) Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Level (dBuV/m) Date: 2024-07-12 Frequency (MHz) Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6	UHF RFID	76.72	14800	0.07	100Hz
7	UHF RFID	76.87	14920	0.07	100Hz

<Ant. 6>

<Ant. 7>

