

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : Touch Computer  
**Brand Name** : Motorola  
**Model No.** : TC55AH  
**Filing Type** : New Application  
**Applicant** : Motorola Solutions, Inc.  
One Motorola Plaza, Holtsville, NY 11742-1300 USA  
**FCC ID** : UZ7TC55AH  
**Manufacturer** : Motorola Solutions, Inc.  
One Motorola Plaza, Holtsville, NY 11742-1300 USA  
**Received Date** : May 22, 2013  
**Final Test Date** : Jul. 04, 2013

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003 and ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1    Product Details.....	3
2.2    Table for Test Modes .....	3
2.3    Table for Testing Locations .....	4
2.4    Table for Supporting Units .....	5
2.5    Test Configurations.....	6
<b>3. TEST RESULT .....</b>	<b>7</b>
3.1    AC Power Line Conducted Emissions Measurement .....	7
3.2    Field Strength of Fundamental Emissions and Mask Measurement .....	12
3.3    20dB Spectrum Bandwidth Measurement .....	24
3.4    Radiated Emissions Measurement .....	30
3.5    Frequency Stability Measurement.....	43
3.6    Antenna Requirements.....	50
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>51</b>
<b>5. TEST LOCATION.....</b>	<b>52</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>53</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	

## REVISION HISTORY

# CERTIFICATE OF COMPLIANCE


according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : Touch Computer  
**Brand Name** : Motorola  
**Model No.** : TC55AH  
**Applicant** : Motorola Solutions, Inc.

One Motorola Plaza, Holtsville, NY 11742-1300 USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 22, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager

***SPORTON INTERNATIONAL INC.***

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**



## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	FCC Rule	IC Rule	Description of Test	Result	Under Limit
3.1	15.207	Gen 7.2.2	AC Power Line Conducted Emissions	Complies	10.10dB at 1.262 MHz and 1.382MHz
3.2	15.225(a)(b)(c)	A2.6	Field Strength of Fundamental Emissions	Complies	61.01dB at 13.56MHz
3.3	2.1049	-	20dB Spectrum Bandwidth	Complies	
3.4	15.225(d) 15.209	A2.6	Radiated Emissions	Complies	6.74dB at 40.53MHz
3.5	15.225(e)	A2.6	Frequency Stability	Complies	
3.6	15.203	-	Antenna Requirements	Complies	

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%



## 2. GENERAL INFORMATION

### 2.1 Product Details

For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	3.7Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.260kHz
Max. Field Strength	62.99dB $\mu$ V/m
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	Loop Antenna

### 2.2 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	CTX	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 <sup>th</sup> Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note:

- 1, CTX=continuously transmitting.
- 2, The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.



### 2.2.1 Field Strength of Fundamental Emissions Test Mode

Function Type
<b>Mode 1 :</b> NFC-A + Battery 2 for Sample 1
<b>Mode 2 :</b> NFC-B + Battery 2 for Sample 1
<b>Mode 3 :</b> NFC-F + Battery 2 for Sample 1
<b>Mode 4 :</b> NFC-V + Battery 2 for Sample 1
<b>Mode 5 :</b> NFC-F + Battery 1 for Sample 2

**Remark:** Sample 1 : EUT with Scanner, Sample 2 : EUT without Scanner

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to 1000 MHz) For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z was recorded in this report. and (Z plane as worst plane) from all possible combinations

### 2.2.2 Radiated Emissions Test Mode

Function Type
<b>Mode 1 :</b> NFC-F + Battery 2 for Sample 1 (9K-30MHz)
<b>Mode 2 :</b> NFC-F + Battery 1 for Sample 2 (9K-30MHz)
<b>Mode 3 :</b> NFC-F + Battery 2 for Sample 1 (30MHz-1GHz)
<b>Mode 4 :</b> NFC-F + Battery 1 for Sample 2 (30MHz-1GHz)

**Remark:** Sample 1 : EUT with Scanner, Sample 2 : EUT without Scanner

## 2.3 Table for Testing Locations

Test Site No.	Site Category	Location
CO05-HY	Conduction	Hwa Ya
TH02-HY	OVEN Room	Hwa Ya
03CH07-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).




## 2.4 Table for Supporting Units

<b>Support Unit</b>	<b>Manufacturer</b>	<b>Model</b>	<b>FCC ID</b>
Earphone	Cotron	MAX-300	N/A
System Simulator	R&S	CMU200	N/A
Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029
WLAN AP	D-Link	DIR-628	KA2DIR628A2
Notebook	DELL	Latitude E6320	FCC Doc

## 2.5 Test Configurations


### <AC Conducted Emissions>

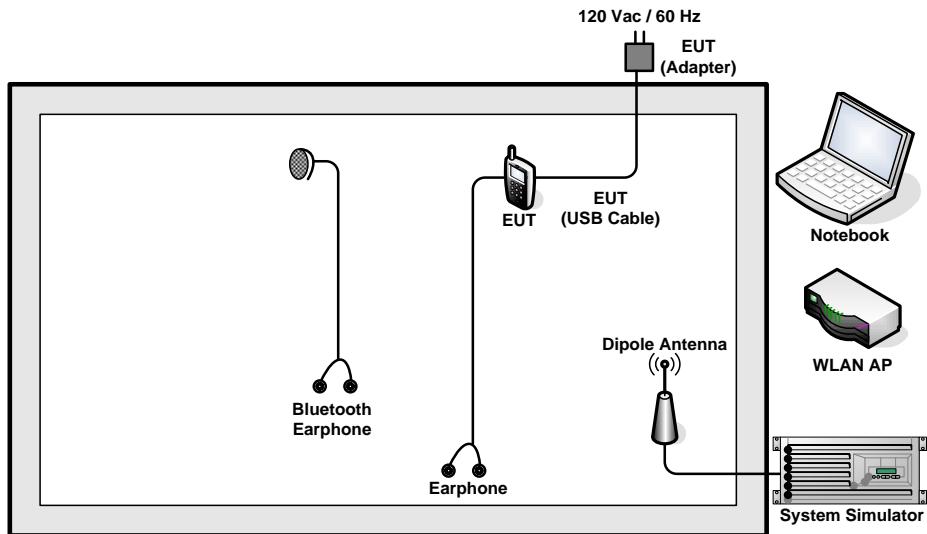

### Fundamental Emissions and Mask Measurement

For radiated emissions 9kHz~30MHz

For radiated emissions 30MHz~1GHz

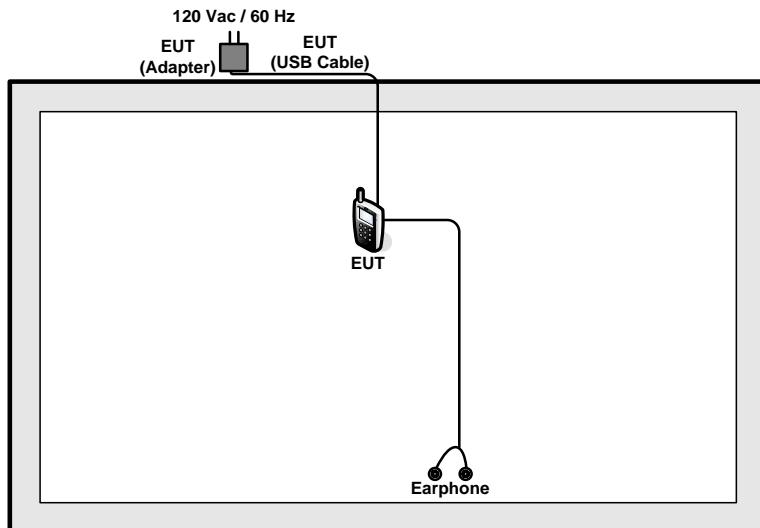



### 3. TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

##### 3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4 Test Setup Layout

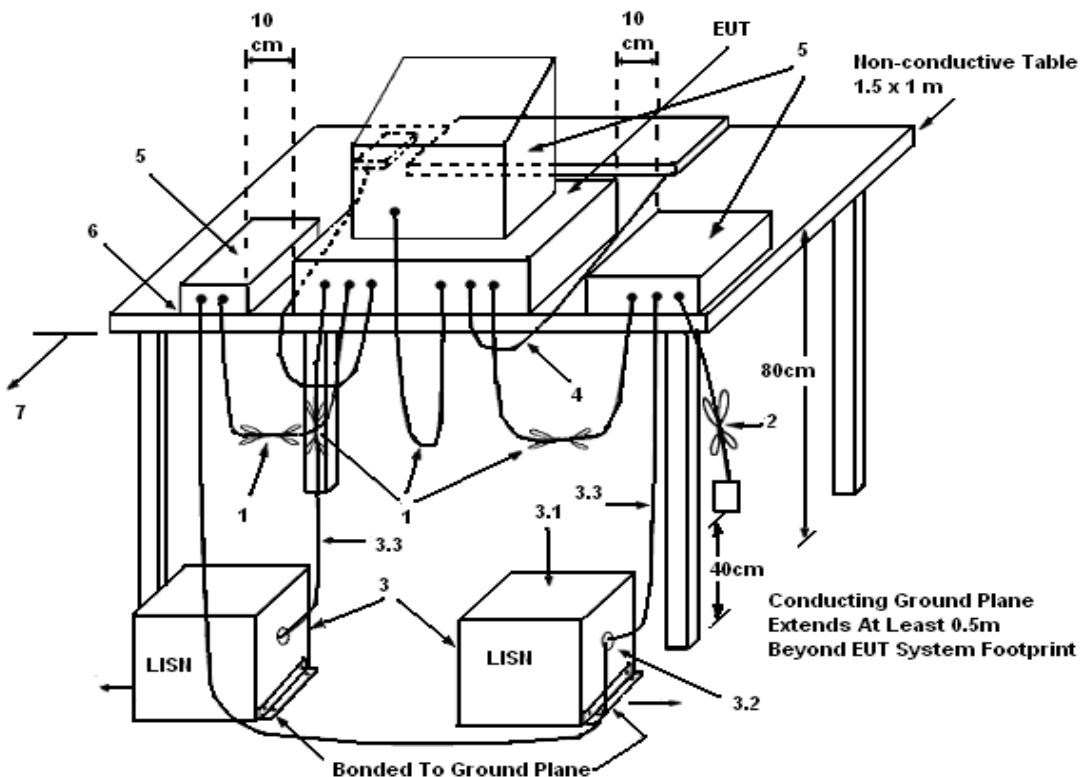

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.



**3.1.5 Test Deviation**


There is no deviation with the original standard.

**3.1.6 EUT Operation during Test**

The EUT was placed on the test table and programmed in transmitting function.

**3.1.7 Results of AC Power Line Conducted Emissions Measurement**

<b>Final Test Date</b>	Jul. 02, 2013	<b>Test Site No.</b>	CO05-HY
<b>Temperature</b>	20~22°C	<b>Humidity</b>	45~47%
<b>Test Engineer</b>	Slash Huang	<b>Configuration</b>	Transmitting Mode (13.56MHz)
<b>Mode</b>	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + NFC Tx + Adapter + Battery 2 for Sample 1		

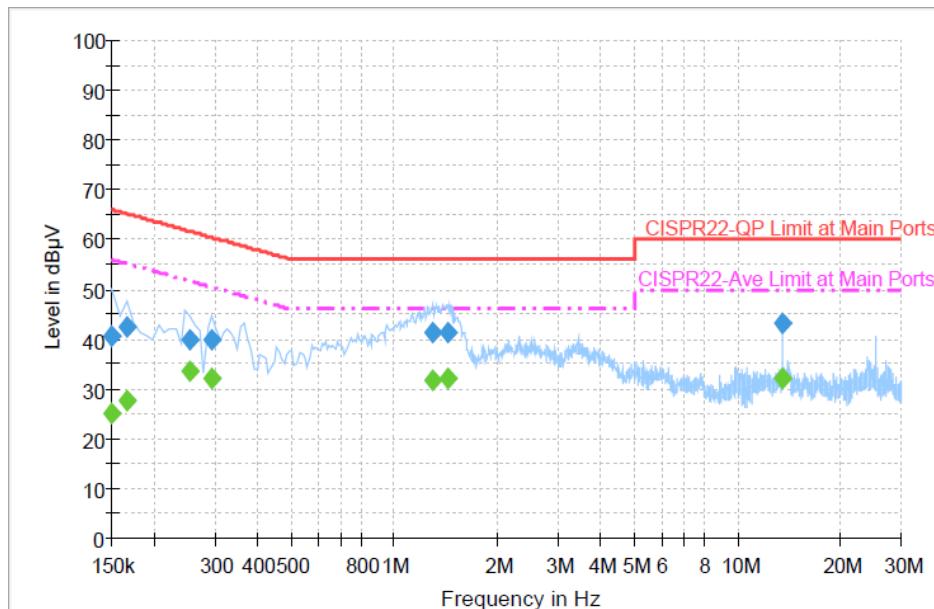
**Line**

**Final Result: Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	40.5	Off	L1	19.4	25.5	66.0
0.166000	42.6	Off	L1	19.4	22.6	65.2
0.254000	40.0	Off	L1	19.5	21.6	61.6
0.294000	40.0	Off	L1	19.4	20.4	60.4
1.286000	41.4	Off	L1	19.5	14.6	56.0
1.430000	41.4	Off	L1	19.5	14.6	56.0
13.558000	43.0	Off	L1	19.8	17.0	60.0

**Final Result: Average**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	25.1	Off	L1	19.4	30.9	56.0
0.166000	27.8	Off	L1	19.4	27.4	55.2
0.254000	33.5	Off	L1	19.5	18.1	51.6
0.294000	32.2	Off	L1	19.4	18.2	50.4
1.286000	31.9	Off	L1	19.5	14.2	46.1
1.430000	32.1	Off	L1	19.5	13.9	46.0
13.558000	32.0	Off	L1	19.8	18.0	50.0
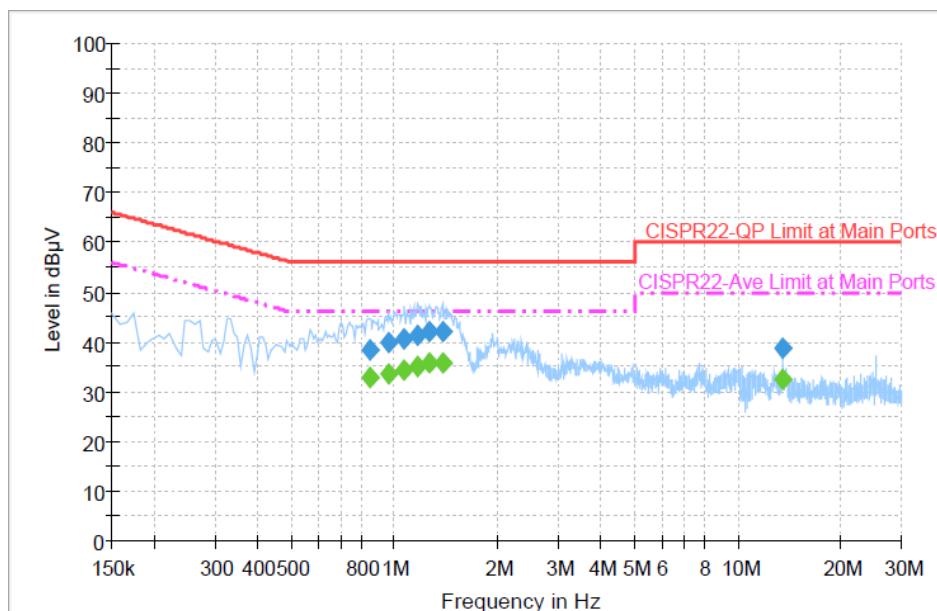
## Neutral



## Final Result: Quasi-Peak

Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.846000	38.4	Off	N	19.6	17.6	56.0
0.958000	39.9	Off	N	19.4	16.1	56.0
1.070000	40.6	Off	N	19.5	15.4	56.0
1.166000	41.5	Off	N	19.5	14.5	56.0
1.262000	42.2	Off	N	19.5	13.8	56.0
1.382000	42.0	Off	N	19.5	14.0	56.0
13.558000	38.7	Off	N	19.9	21.4	60.1

## Final Result: Average

Frequency (MHz)	Average (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.846000	32.9	Off	N	19.6	13.1	46.0
0.958000	33.5	Off	N	19.4	12.5	46.0
1.070000	34.3	Off	N	19.5	11.7	46.0
1.166000	34.9	Off	N	19.5	11.1	46.0
1.262000	35.9	Off	N	19.5	10.1	46.0
1.382000	35.9	Off	N	19.5	10.1	46.0
13.558000	32.7	Off	N	19.9	17.4	50.1



### 3.2 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters.

The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength ( $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
	14.010~30.000	30	29.5	48.58	69.5

#### 3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RBW	9 kHz
Detector	QP

### 3.2.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 1kHz for the band 13.553~13.567MHz.

### 3.2.4 Test Setup Layout

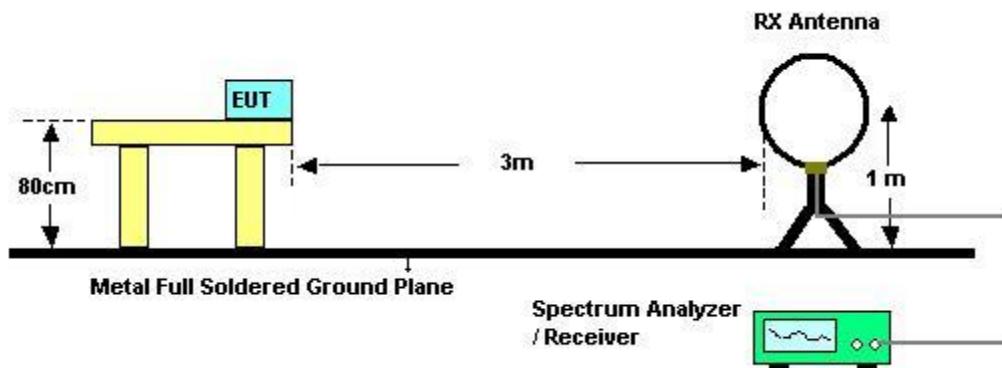

### 3.2.5 Test Deviation

There is no deviation with the original standard.


### 3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


## 3.2.7 Test Result of Field Strength of Fundamental Emissions

&lt;Mode 1&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~25°C	Humidity	49% ~ 51%
Test Engineer	Eric Shih	Configurations	Ch. 1

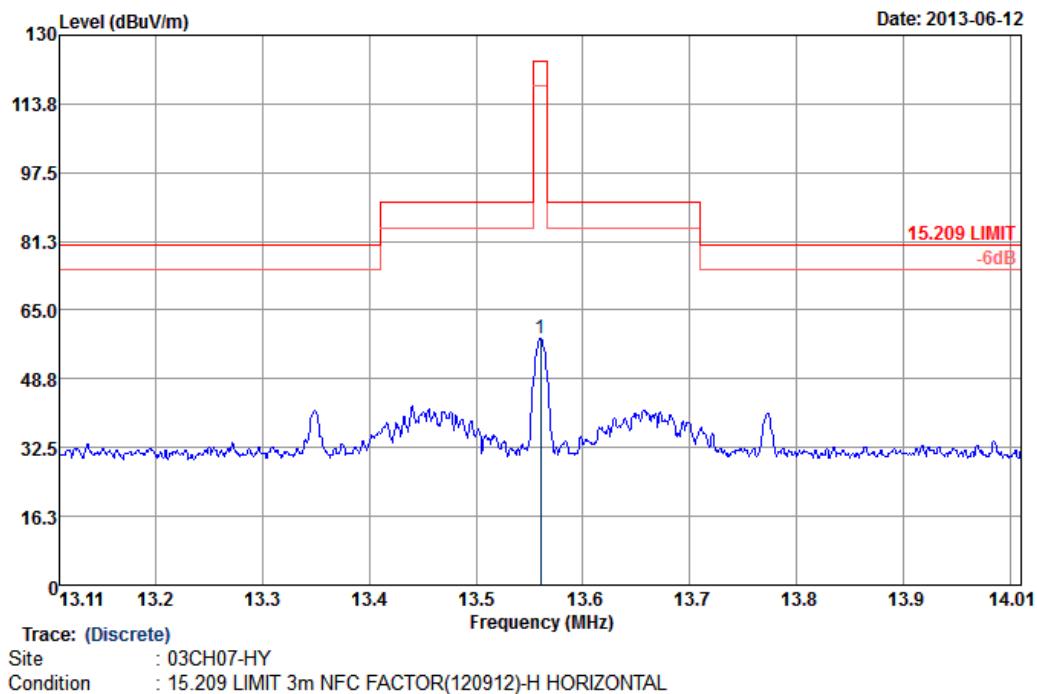

Freq	Level	Over Limit		Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Line	Limit							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	58.29	-65.71	124.00	38.14	19.75	0.40	0.00	100	2 QP

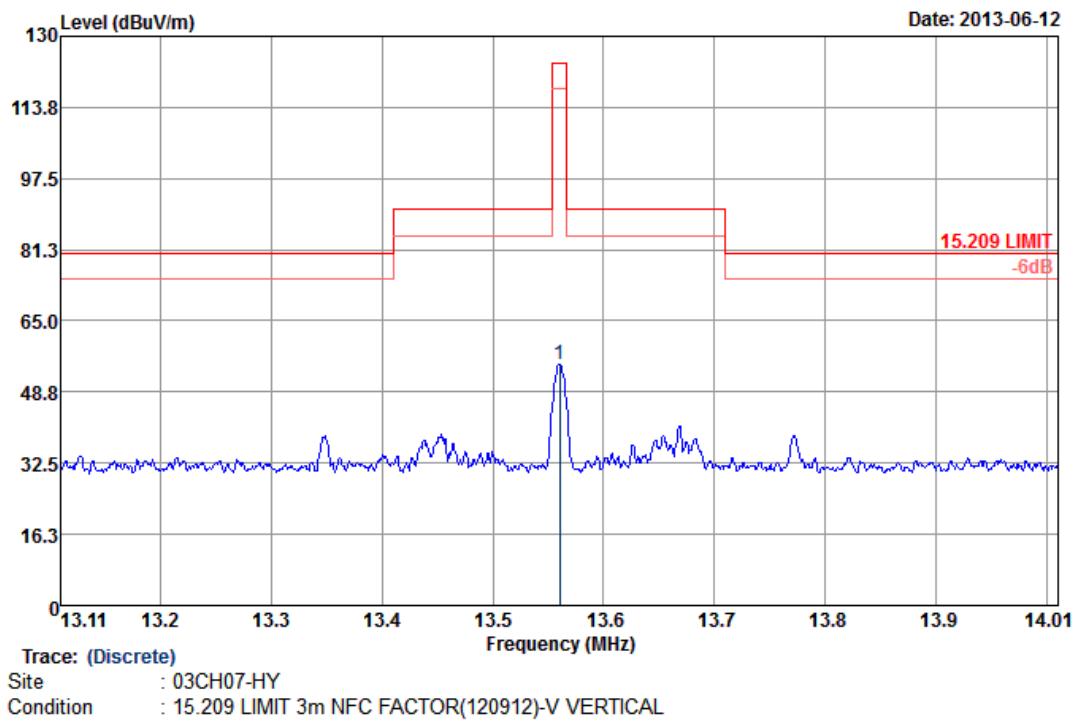


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	13.56	55.21	-68.79	124.00	35.06	19.75	0.40	0.00	100	282 QP




## &lt;Mode 2&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~25°C	Humidity	49% ~ 51%
Test Engineer	Eric Shih	Configurations	Ch. 1

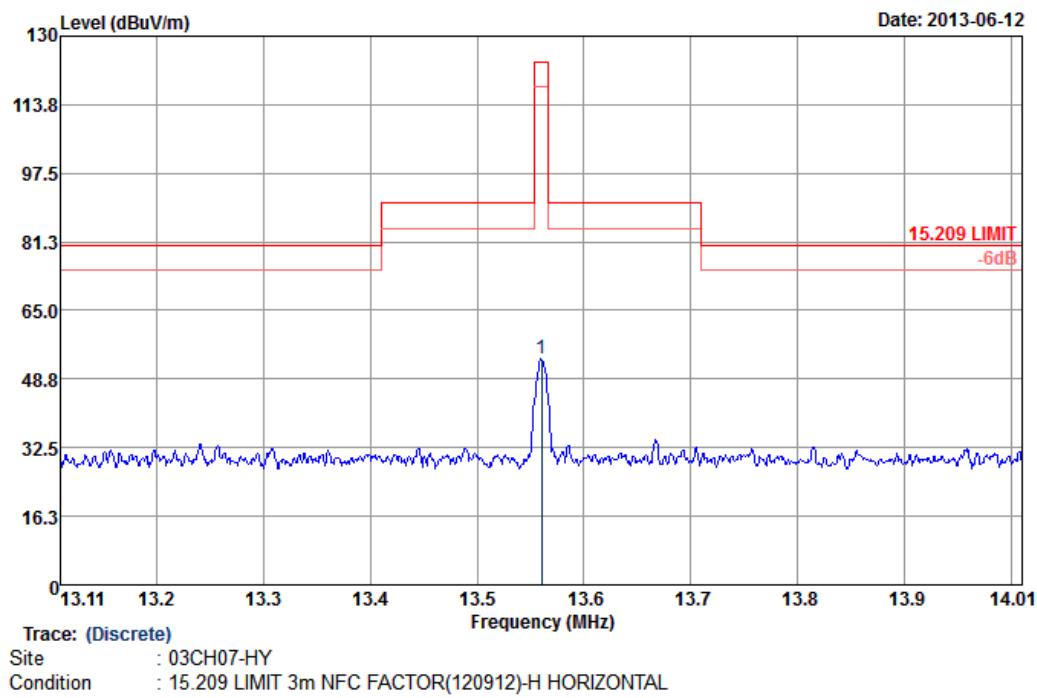

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Limit	Line							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	53.45	-70.55	124.00	33.30	19.75	0.40	0.00	100	1 QP

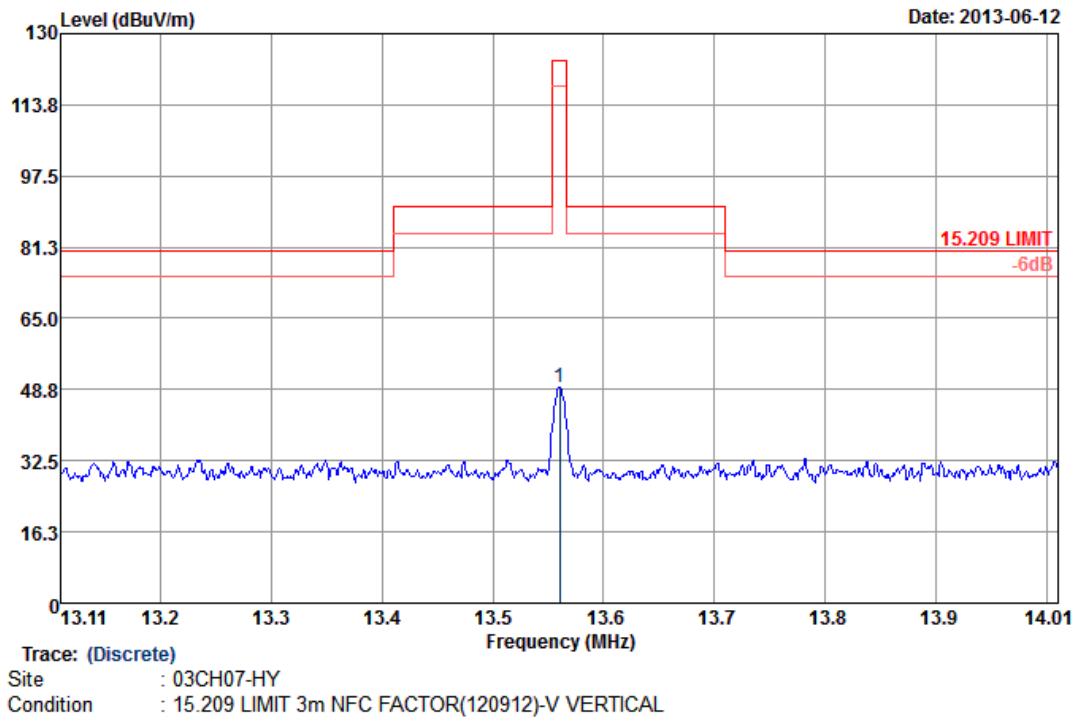


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	13.56	49.35	-74.65	124.00	29.20	19.75	0.40	0.00	100	267 QP




## &lt;Mode 3&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~25°C	Humidity	49% ~ 51%
Test Engineer	Eric Shih	Configurations	Ch. 1

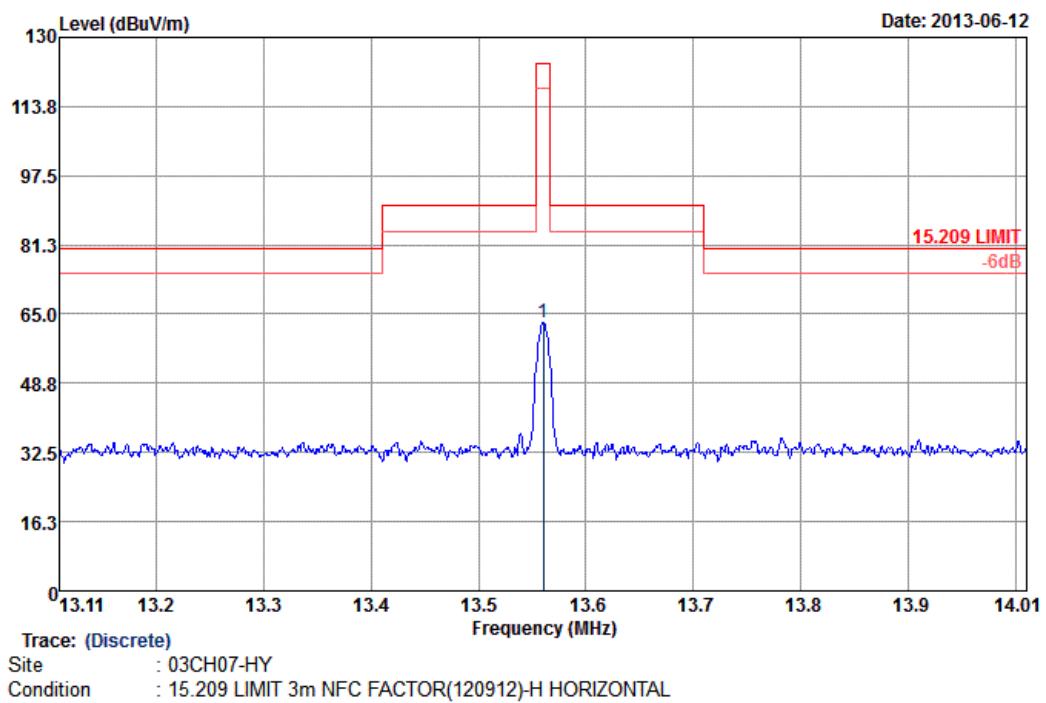

	Freq	Level	Over Limit	Limit Line	Read	Antenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	62.99	-61.01	124.00	42.84	19.75	0.40	0.00	100	6	QP

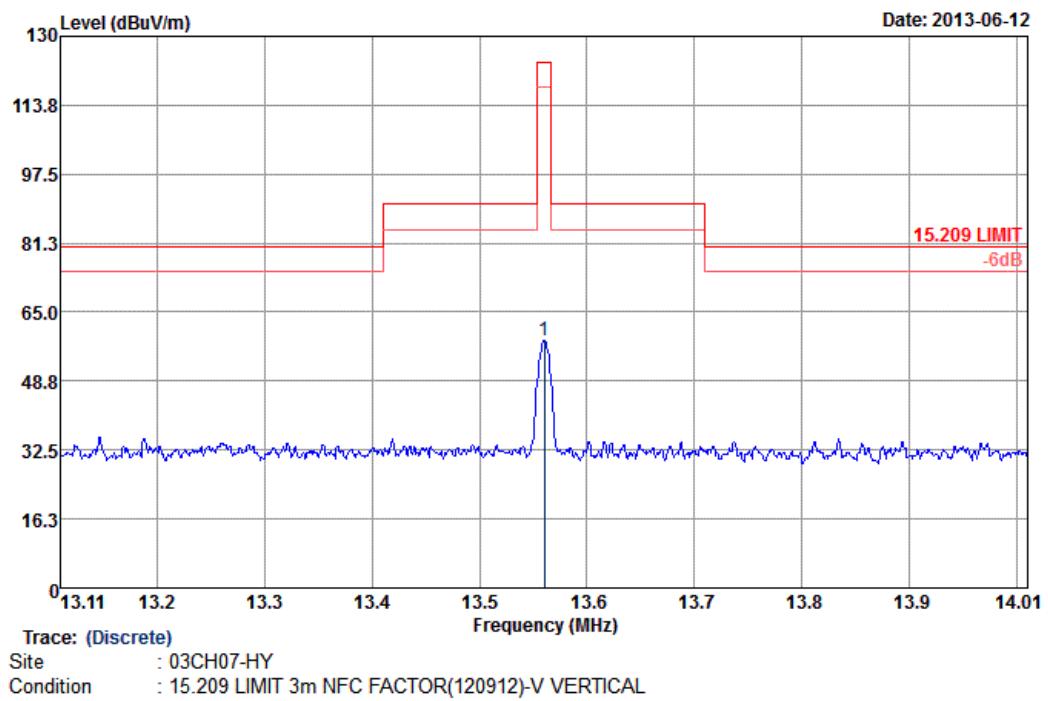


Freq MHz	Level dBuV/m	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Limit dB	Line dBuV/m	Level dBuV	dB/m	dB	dB	cm	deg	
1 13.56	58.25	-65.75	124.00	38.10	19.75	0.40	0.00	100	280	QP




## &lt;Mode 4&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~25°C	Humidity	49% ~ 51%
Test Engineer	Eric Shih	Configurations	Ch. 1

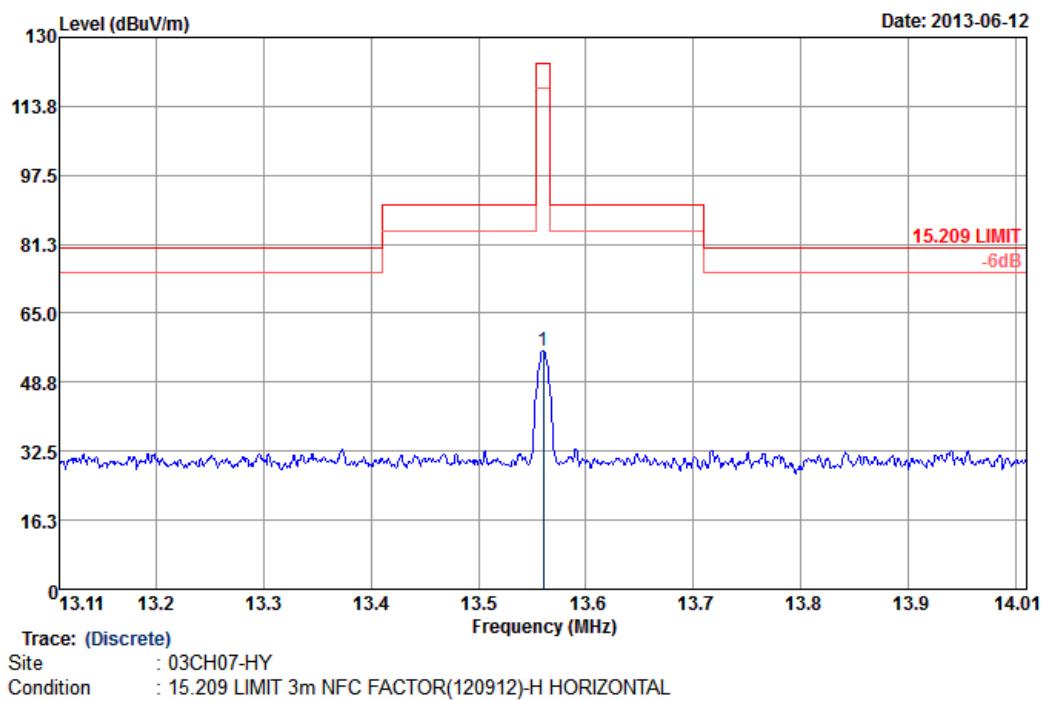

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	56.20	-67.80	124.00	36.05	19.75	0.40	0.00	100	4 QP

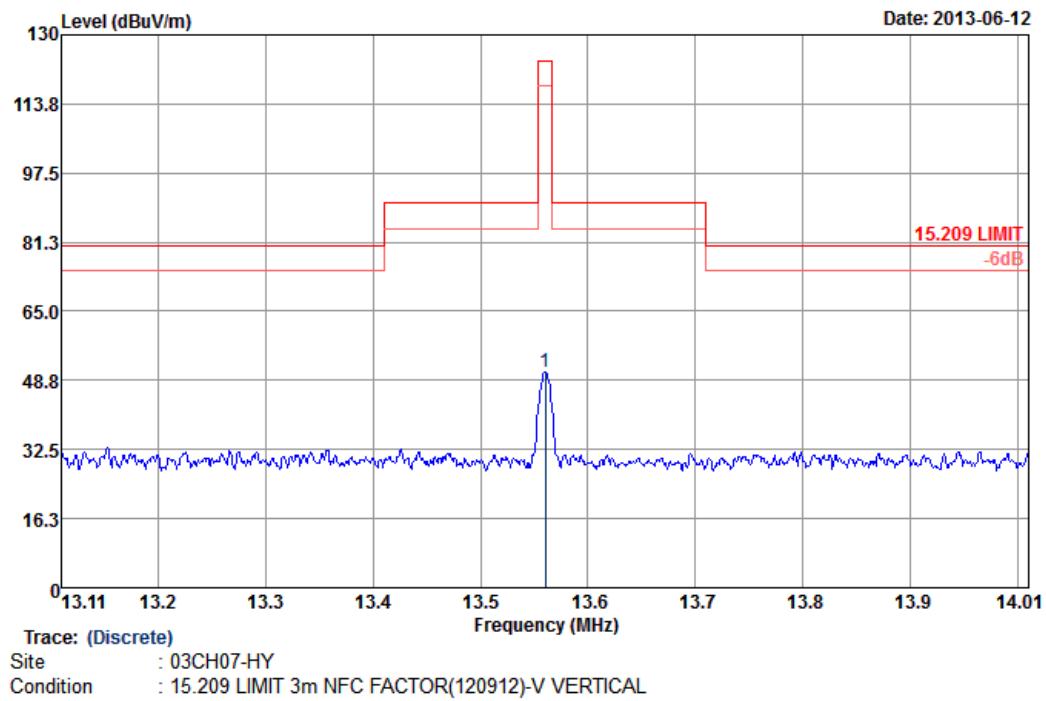


	Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	50.78	-73.22	124.00	30.63	19.75	0.40	0.00	100	264	QP




## &lt;Mode 5&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~25°C	Humidity	49% ~ 51%
Test Engineer	Eric Shih	Configurations	Ch. 1

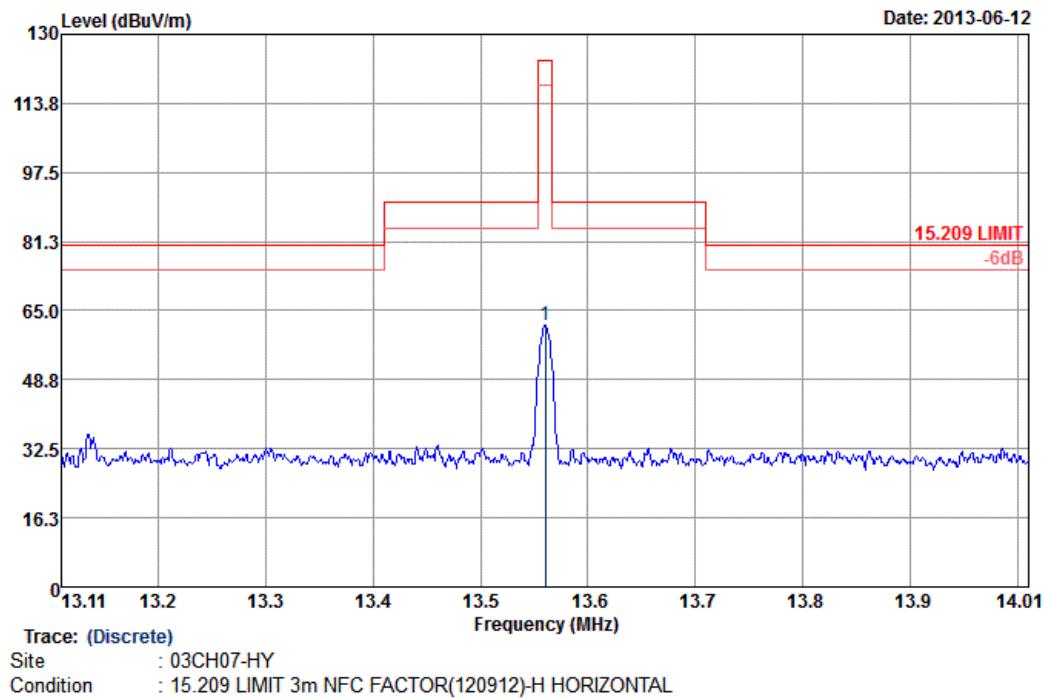

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Line	Limit	Level	Factor	dBuV	dB/m	dB	dB	
MHz	dBuV/m	dB	dBuV/m							
1	13.56	61.49	-62.51	124.00	41.34	19.75	0.40	0.00	100	14 QP

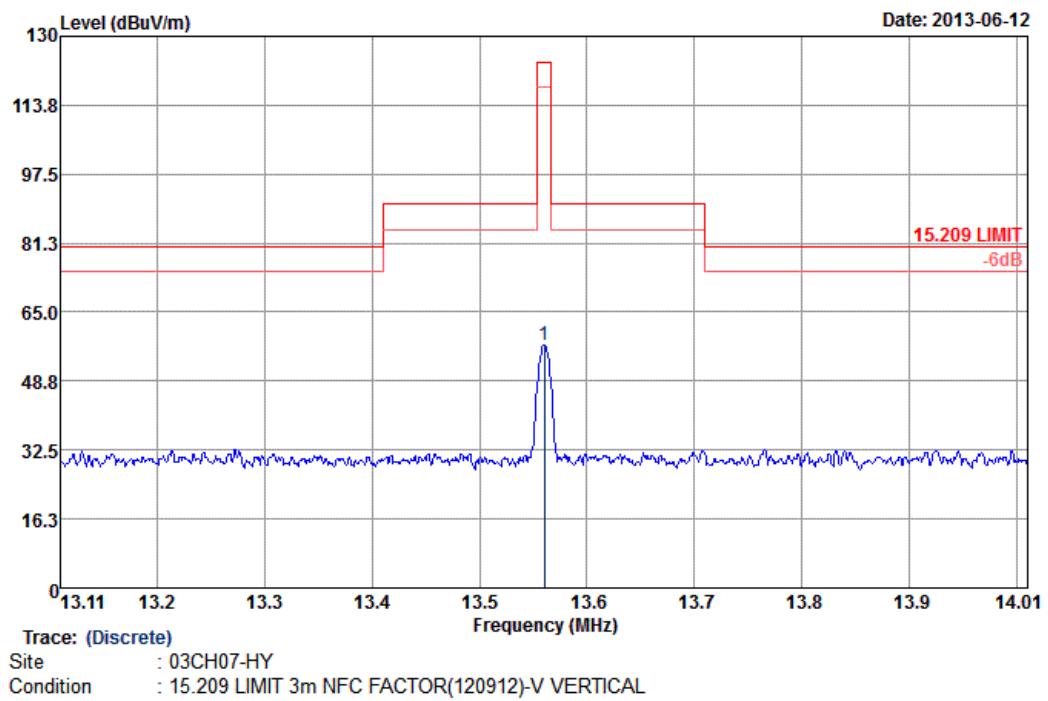

Freq MHz	Level dBuV/m	Over Limit		ReadAntenna Level dBuV	Cable Loss dB	Preamp Factor dB	A/Pos cm	T/Pos deg	Remark
		Limit dB	Line dBuV/m						
1	13.56	57.37	-66.63	124.00	37.22	19.75	0.40	0.00	100 280 QP

### 3.3 20dB Spectrum Bandwidth Measurement

#### 3.3.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

#### 3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RBW	1 kHz
VBW	3 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

#### 3.3.4 Test Setup Layout

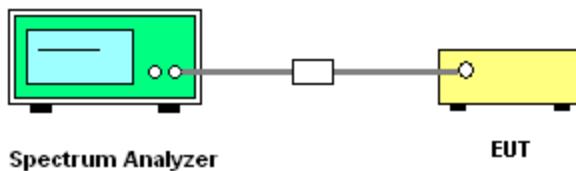

#### 3.3.5 Test Deviation

There is no deviation with the original standard.


#### 3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


**3.3.7 Test Result of 20dB Spectrum Bandwidth**
**< NFC-A for Battery 2>**

<b>Final Test Date</b>	Jun. 17, 2013 ~ Jul. 04, 2013	<b>Test Site No.</b>	TH02-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	53~55%
<b>Test Engineer</b>	Tommy Lee	<b>Configurations</b>	Ch. 1

<b>Frequency</b>	<b>20dB BW (kHz)</b>	<b>99% OBW (kHz)</b>	<b>Frequency range (MHz)</b> $f_L > 13.553\text{MHz}$	<b>Frequency range (MHz)</b> $f_H < 13.567\text{MHz}$	<b>Test Result</b>
13.56 MHz	2.640	2.240	13.55864	13.56128	Complies

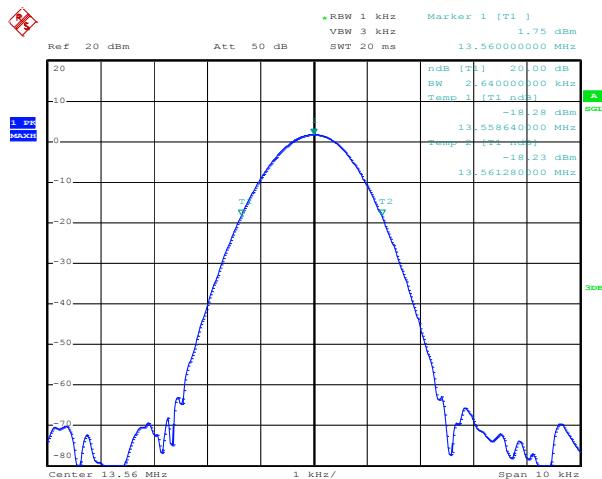**20 dB / 99% Bandwidth Plot on 13.56 MHz**


Date: 17.JUN.2013 10:16:55

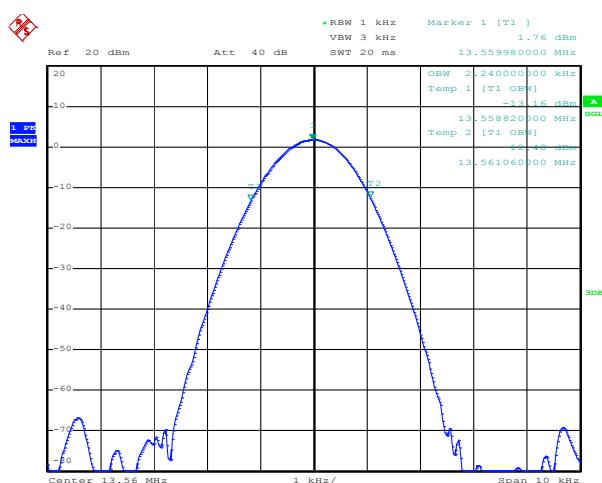


Date: 17.JUN.2013 10:21:55


**< NFC-B for Battery 2>**

<b>Final Test Date</b>	Jun. 17, 2013 ~ Jul. 04, 2013	<b>Test Site No.</b>	TH02-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	53~55%
<b>Test Engineer</b>	Tommy Lee	<b>Configurations</b>	Ch. 1

<b>Frequency</b>	<b>20dB BW (kHz)</b>	<b>99% OBW (kHz)</b>	<b>Frequency range (MHz)</b> $f_L > 13.553\text{MHz}$	<b>Frequency range (MHz)</b> $f_H < 13.567\text{MHz}$	<b>Test Result</b>
13.56 MHz	2.640	2.260	13.55864	13.56128	<b>Complies</b>

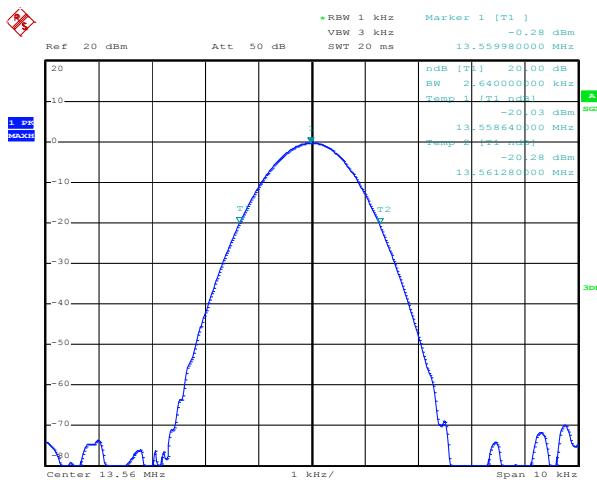**20 dB / 99% Bandwidth Plot on 13.56 MHz**


Date: 17.JUN.2013 10:17:51

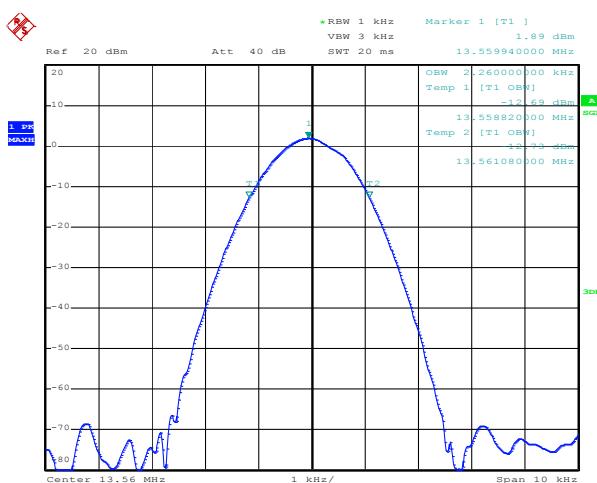


Date: 17.JUN.2013 10:22:32


**< NFC-F for Battery 2>**

<b>Final Test Date</b>	Jun. 17, 2013 ~ Jul. 04, 2013	<b>Test Site No.</b>	TH02-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	53~55%
<b>Test Engineer</b>	Tommy Lee	<b>Configurations</b>	Ch. 1

<b>Frequency</b>	<b>20dB BW (kHz)</b>	<b>99% OBW (kHz)</b>	<b>Frequency range (MHz)</b> $f_L > 13.553\text{MHz}$	<b>Frequency range (MHz)</b> $f_H < 13.567\text{MHz}$	<b>Test Result</b>
13.56 MHz	2.640	2.240	13.55864	13.56128	<b>Complies</b>

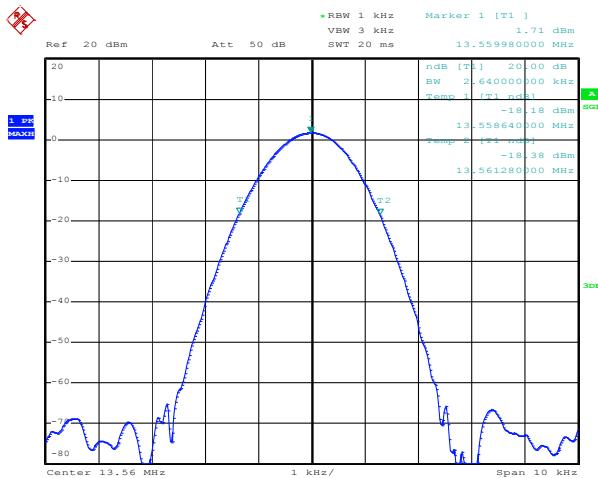**20 dB / 99% Bandwidth Plot on 13.56 MHz**


Date: 17.JUN.2013 10:18:57

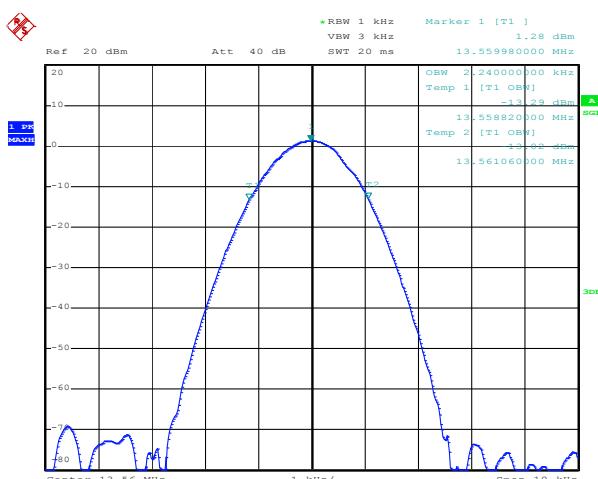


Date: 17.JUN.2013 10:24:51

## &lt; NFC-V for Battery 2&gt;


Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz)	Frequency range (MHz)	Test Result
13.56 MHz	2.640	2.240	f <sub>L</sub> > 13.553MHz	f <sub>H</sub> < 13.567MHz	Complies

## 20 dB / 99% Bandwidth Plot on 13.56 MHz

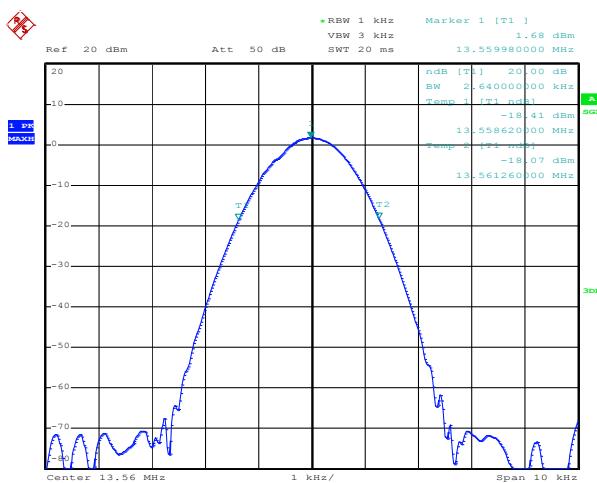

Date: 17.JUN.2013 10:20:02

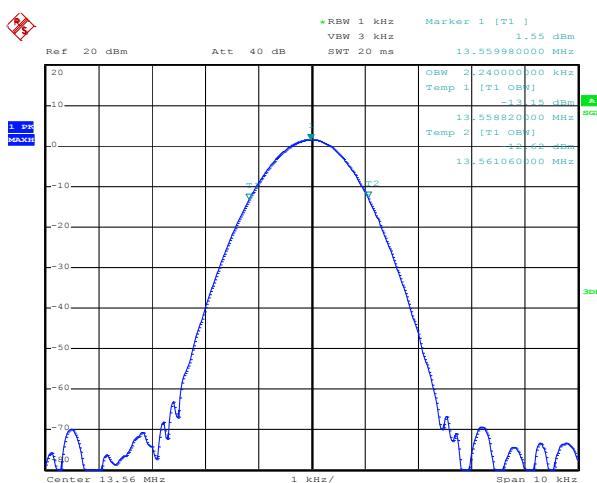


Date: 17.JUN.2013 10:25:55


**< NFC-F for Battery 1>**

<b>Final Test Date</b>	Jun. 17, 2013 ~ Jul. 04, 2013	<b>Test Site No.</b>	TH02-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	53~55%
<b>Test Engineer</b>	Tommy Lee	<b>Configurations</b>	Ch. 1

<b>Frequency</b>	<b>20dB BW (kHz)</b>	<b>99% OBW (kHz)</b>	<b>Frequency range (MHz)</b> $f_L > 13.553\text{MHz}$	<b>Frequency range (MHz)</b> $f_H < 13.567\text{MHz}$	<b>Test Result</b>
13.56 MHz	2.660	2.260	13.55864	13.56130	<b>Complies</b>

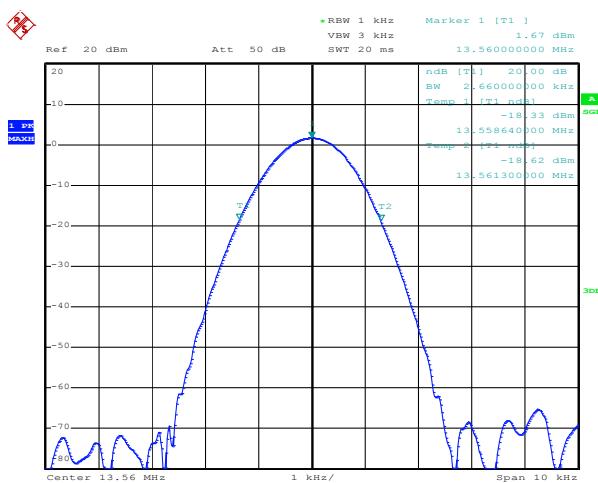**20 dB / 99% Bandwidth Plot on 13.56 MHz**


Date: 4.JUL.2013 16:35:45

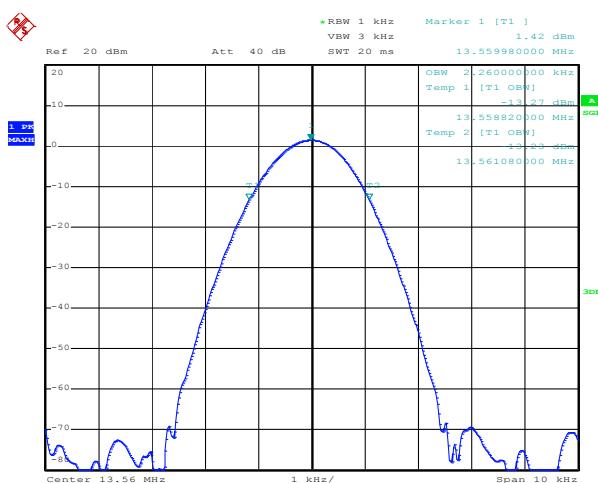

Date: 4.JUL.2013 17:07:23



### 3.4 Radiated Emissions Measurement

#### 3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for Peak

#### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions,




and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.4.4 Test Setup Layout

#### For radiated emissions below 30MHz

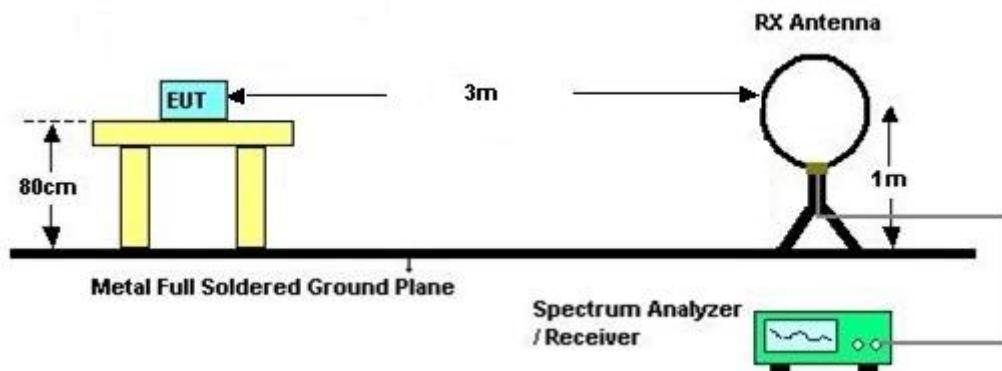

#### For radiated emissions above 30MHz

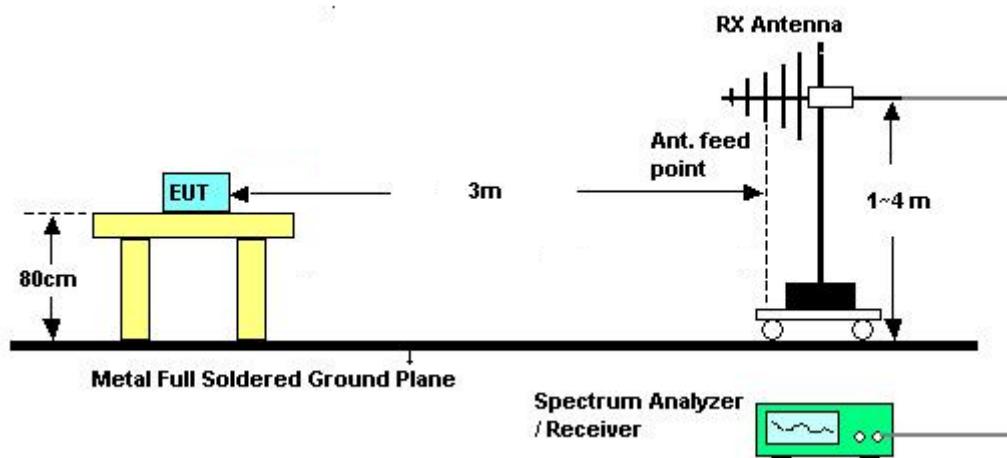

### 3.4.5 Test Deviation

There is no deviation with the original standard.

### 3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




## 3.4.7 Results of Radiated Emissions (9 kHz~30MHz)

## &lt;Mode 1&gt;

Final Test Date	Jun. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~26°C	Humidity	49~51%
Test Engineer	Eric Shih	Configurations	Ch. 1


## Horizontal

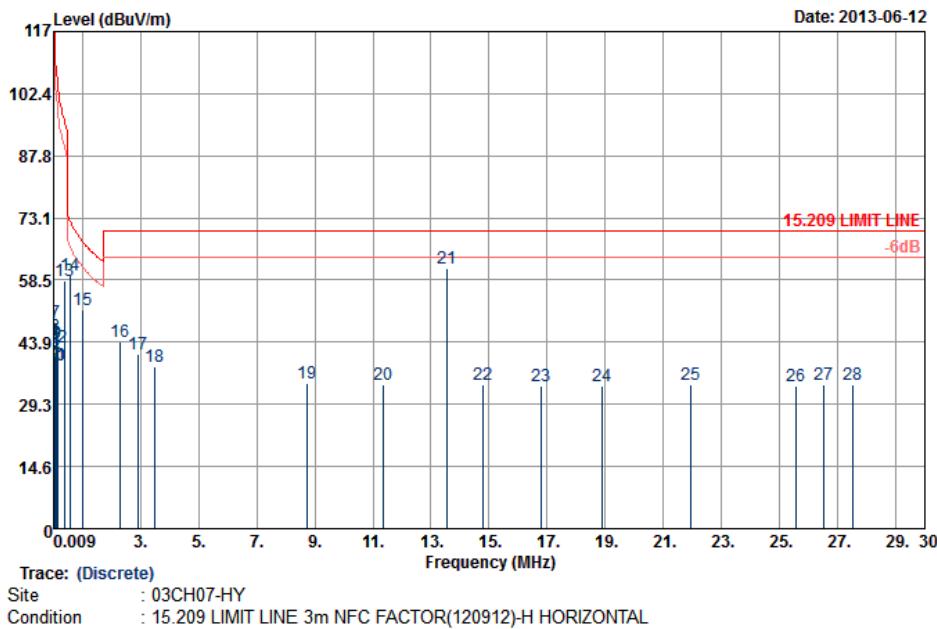

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.02	44.19	-78.32	122.51	23.64	20.26	0.29	0.00	---	--- QP
2	0.04	38.32	-78.38	116.70	17.86	20.17	0.29	0.00	---	--- QP
3	0.05	38.56	-75.35	113.91	18.10	20.17	0.29	0.00	---	--- QP
4	0.07	40.82	-69.92	110.74	20.42	20.11	0.29	0.00	---	--- QP
5	0.08	43.23	-66.15	109.38	22.83	20.11	0.29	0.00	---	--- QP
6	0.09	41.66	-66.89	108.55	21.30	20.07	0.29	0.00	---	--- QP
7	0.10	48.64	-59.26	107.90	28.28	20.07	0.29	0.00	---	--- QP
8	0.10	45.44	-62.29	107.73	25.08	20.07	0.29	0.00	---	--- QP
9	0.11	43.55	-63.62	107.17	23.19	20.07	0.29	0.00	---	--- QP
10	0.13	38.32	-67.27	105.59	17.97	20.06	0.29	0.00	---	--- QP
11	0.13	38.31	-66.70	105.01	17.96	20.06	0.29	0.00	---	--- QP
12	0.15	42.59	-61.78	104.37	22.26	20.04	0.29	0.00	---	--- QP
13	0.40	58.40	-37.17	95.57	38.11	20.00	0.29	0.00	---	--- QP
14	0.58	59.62	-12.64	72.26	39.31	20.00	0.31	0.00	100	56 QP
15	1.03	51.38	-15.95	67.33	31.07	20.00	0.31	0.00	---	--- QP
16	2.31	44.08	-25.92	70.00	23.72	20.03	0.33	0.00	---	--- QP
17	2.92	41.03	-28.97	70.00	20.66	20.03	0.34	0.00	---	--- QP
18	3.47	38.26	-31.74	70.00	17.90	20.02	0.34	0.00	---	--- QP
19	8.75	34.10	-35.90	70.00	13.95	19.77	0.38	0.00	---	--- QP
20	11.34	33.81	-36.19	70.00	13.65	19.77	0.39	0.00	---	--- QP
21	13.57	61.22	-8.78	70.00	41.07	19.75	0.40	0.00	---	--- QP
22	14.80	33.77	-36.23	70.00	13.60	19.76	0.41	0.00	---	--- QP
23	16.77	33.56	-36.44	70.00	13.32	19.82	0.42	0.00	---	--- QP
24	18.90	33.47	-36.53	70.00	13.03	20.01	0.43	0.00	---	--- QP
25	21.92	33.77	-36.23	70.00	13.04	20.29	0.44	0.00	---	--- QP
26	25.59	33.71	-36.29	70.00	12.85	20.39	0.47	0.00	---	--- QP
27	26.52	34.01	-35.99	70.00	13.13	20.40	0.48	0.00	---	--- QP
28	27.53	34.05	-35.95	70.00	13.18	20.37	0.50	0.00	---	--- QP



Vertical

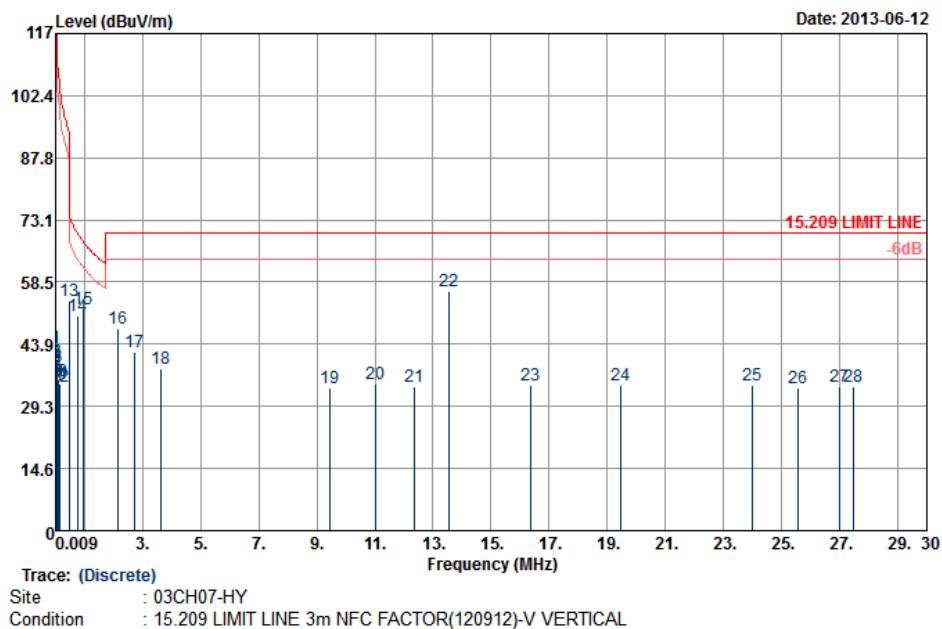

Freq MHz	Level dBuV/m	Over	Limit	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
		Level dB	Limit Line dBuV/m						
1	0.02	43.09	-79.37	122.46	22.54	20.26	0.29	0.00	--- QP
2	0.04	39.41	-77.29	116.70	18.95	20.17	0.29	0.00	--- QP
3	0.05	38.84	-75.07	113.91	18.38	20.17	0.29	0.00	--- QP
4	0.06	36.21	-75.28	111.49	15.81	20.11	0.29	0.00	--- QP
5	0.07	38.47	-72.05	110.52	18.07	20.11	0.29	0.00	--- QP
6	0.08	39.65	-69.89	109.54	19.25	20.11	0.29	0.00	--- QP
7	0.09	33.46	-74.67	108.13	13.10	20.07	0.29	0.00	--- QP
8	0.10	33.91	-73.74	107.65	13.55	20.07	0.29	0.00	--- QP
9	0.11	35.18	-71.87	107.05	14.82	20.07	0.29	0.00	--- QP
10	0.12	35.13	-70.70	105.83	14.78	20.06	0.29	0.00	--- QP
11	0.13	34.42	-70.92	105.34	14.07	20.06	0.29	0.00	--- QP
12	0.14	33.74	-70.77	104.51	13.39	20.06	0.29	0.00	--- QP
13	0.48	54.02	-40.01	94.03	33.73	20.00	0.29	0.00	--- QP
14	0.78	50.46	-19.27	69.73	30.15	20.00	0.31	0.00	--- QP
15	0.97	52.22	-15.64	67.86	31.91	20.00	0.31	0.00	100 214 QP
16	2.14	47.57	-22.43	70.00	27.21	20.03	0.33	0.00	--- QP
17	2.71	41.90	-28.10	70.00	21.53	20.03	0.34	0.00	--- QP
18	3.64	38.16	-31.84	70.00	17.79	20.02	0.35	0.00	--- QP
19	9.47	33.64	-36.36	70.00	13.51	19.75	0.38	0.00	--- QP
20	11.00	34.41	-35.59	70.00	14.25	19.77	0.39	0.00	--- QP
21	12.34	33.78	-36.22	70.00	13.60	19.78	0.40	0.00	--- QP
22	13.57	56.50	-13.50	70.00	36.35	19.75	0.40	0.00	--- QP
23	16.38	34.37	-35.63	70.00	14.16	19.80	0.41	0.00	--- QP
24	19.46	34.15	-35.85	70.00	13.64	20.08	0.43	0.00	--- QP
25	23.99	34.12	-35.88	70.00	13.32	20.35	0.45	0.00	--- QP
26	25.57	33.60	-36.40	70.00	12.74	20.39	0.47	0.00	--- QP
27	26.98	33.91	-36.09	70.00	13.04	20.39	0.48	0.00	--- QP
28	27.46	34.05	-35.95	70.00	13.20	20.37	0.48	0.00	--- QP



Note:

1. Remark 21 of horizontal plot and 22 of vertical plot are transmitter's fundamental signals.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dB $\mu$ V) + distance extrapolation factor.



## &lt;Mode 2&gt;

Final Test Date	Jul. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~26°C	Humidity	49~51%
Test Engineer	Eric Shih	Configurations	Ch. 1


## Horizontal

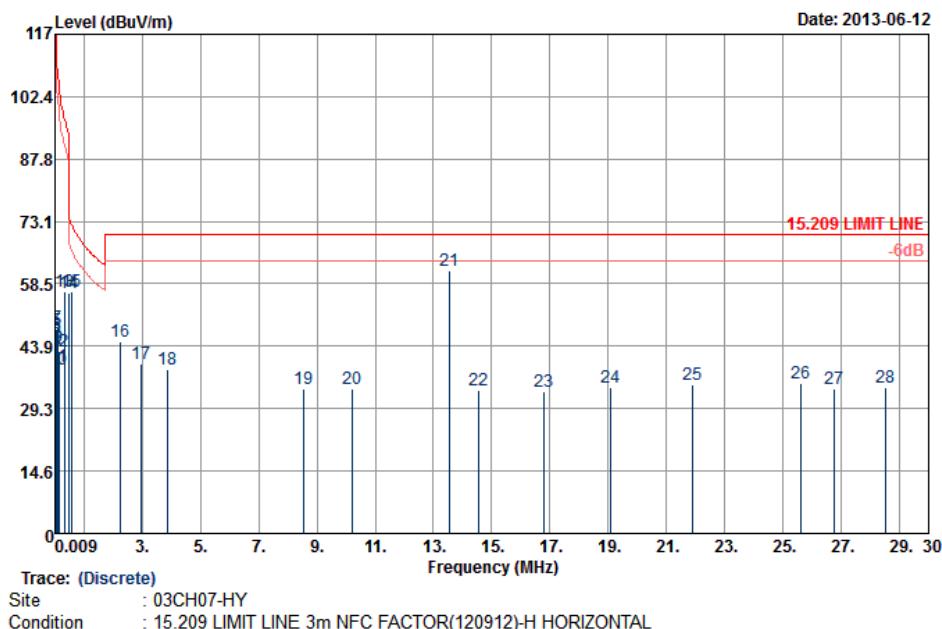

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm
1	0.02	43.69	-78.85	122.54	23.14	20.26	0.29	0.00	---	---	QP
2	0.04	38.76	-77.92	116.68	18.30	20.17	0.29	0.00	---	---	QP
3	0.05	38.36	-75.56	113.92	17.90	20.17	0.29	0.00	---	---	QP
4	0.07	42.59	-68.10	110.69	22.19	20.11	0.29	0.00	---	---	QP
5	0.08	47.58	-62.19	109.77	27.18	20.11	0.29	0.00	---	---	QP
6	0.08	46.20	-63.27	109.47	25.80	20.11	0.29	0.00	---	---	QP
7	0.10	48.34	-59.56	107.90	27.98	20.07	0.29	0.00	---	---	QP
8	0.10	45.47	-62.25	107.72	25.11	20.07	0.29	0.00	---	---	QP
9	0.11	43.74	-63.41	107.15	23.38	20.07	0.29	0.00	---	---	QP
10	0.13	38.41	-67.20	105.61	18.06	20.06	0.29	0.00	---	---	QP
11	0.13	39.04	-65.98	105.02	18.69	20.06	0.29	0.00	---	---	QP
12	0.15	42.54	-61.83	104.37	22.21	20.04	0.29	0.00	---	---	QP
13	0.35	56.73	-40.00	96.73	36.44	20.00	0.29	0.00	---	---	QP
14	0.49	56.37	-17.36	73.73	36.08	20.00	0.29	0.00	---	---	QP
15	0.59	56.77	-15.47	72.24	36.46	20.00	0.31	0.00	100	142	QP
16	2.23	44.89	-25.11	70.00	24.53	20.03	0.33	0.00	---	---	QP
17	2.98	39.69	-30.31	70.00	19.32	20.03	0.34	0.00	---	---	QP
18	3.88	38.39	-31.61	70.00	18.03	20.01	0.35	0.00	---	---	QP
19	8.55	33.92	-36.08	70.00	13.77	19.77	0.38	0.00	---	---	QP
20	10.21	33.88	-36.12	70.00	13.73	19.76	0.39	0.00	---	---	QP
21	13.57	61.59	-8.41	70.00	41.44	19.75	0.40	0.00	---	---	QP
22	14.55	33.48	-36.52	70.00	13.32	19.75	0.41	0.00	---	---	QP
23	16.77	33.28	-36.72	70.00	13.04	19.82	0.42	0.00	---	---	QP
24	19.11	34.10	-35.90	70.00	13.64	20.03	0.43	0.00	---	---	QP
25	21.89	34.89	-35.11	70.00	14.16	20.29	0.44	0.00	---	---	QP
26	25.63	35.05	-34.95	70.00	14.19	20.39	0.47	0.00	---	---	QP
27	26.76	33.77	-36.23	70.00	12.90	20.39	0.48	0.00	---	---	QP
28	28.51	34.27	-35.73	70.00	13.48	20.29	0.50	0.00	---	---	QP



## Vertical

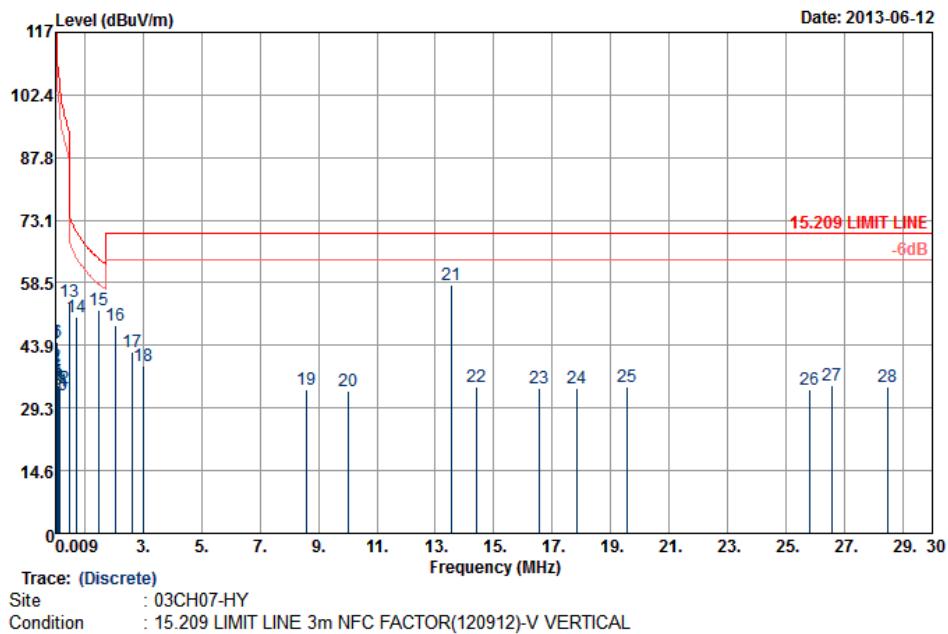

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.02	44.39	-78.12	122.51	23.84	20.26	0.29	0.00	---	--- QP
2	0.04	39.09	-77.61	116.70	18.63	20.17	0.29	0.00	---	--- QP
3	0.05	38.39	-75.52	113.91	17.93	20.17	0.29	0.00	---	--- QP
4	0.06	35.59	-76.01	111.60	15.19	20.11	0.29	0.00	---	--- QP
5	0.07	35.54	-74.81	110.35	15.14	20.11	0.29	0.00	---	--- QP
6	0.08	44.78	-64.98	109.76	24.38	20.11	0.29	0.00	---	--- QP
7	0.09	33.92	-74.29	108.21	13.56	20.07	0.29	0.00	---	--- QP
8	0.10	33.67	-74.06	107.73	13.31	20.07	0.29	0.00	---	--- QP
9	0.11	34.61	-71.90	106.51	14.25	20.07	0.29	0.00	---	--- QP
10	0.12	32.42	-73.37	105.79	12.07	20.06	0.29	0.00	---	--- QP
11	0.13	33.19	-72.22	105.41	12.84	20.06	0.29	0.00	---	--- QP
12	0.13	33.75	-71.29	105.04	13.40	20.06	0.29	0.00	---	--- QP
13	0.49	54.20	-19.59	73.79	33.91	20.00	0.29	0.00	---	--- QP
14	0.71	50.60	-20.04	70.64	30.29	20.00	0.31	0.00	---	--- QP
15	1.47	52.27	-12.00	64.27	31.95	20.01	0.31	0.00	100	283 QP
16	2.05	48.62	-21.38	70.00	28.27	20.02	0.33	0.00	---	--- QP
17	2.62	42.27	-27.73	70.00	21.90	20.03	0.34	0.00	---	--- QP
18	3.03	39.14	-30.86	70.00	18.77	20.03	0.34	0.00	---	--- QP
19	8.59	33.47	-36.53	70.00	13.32	19.77	0.38	0.00	---	--- QP
20	10.01	33.37	-36.63	70.00	13.23	19.75	0.39	0.00	---	--- QP
21	13.57	57.87	-12.13	70.00	37.72	19.75	0.40	0.00	---	--- QP
22	14.43	34.19	-35.81	70.00	14.04	19.75	0.40	0.00	---	--- QP
23	16.54	33.95	-36.05	70.00	13.72	19.81	0.42	0.00	---	--- QP
24	17.84	33.74	-36.26	70.00	13.42	19.90	0.42	0.00	---	--- QP
25	19.57	34.34	-35.66	70.00	13.82	20.09	0.43	0.00	---	--- QP
26	25.79	33.66	-36.34	70.00	12.80	20.39	0.47	0.00	---	--- QP
27	26.57	34.56	-35.44	70.00	13.69	20.39	0.48	0.00	---	--- QP
28	28.47	34.08	-35.92	70.00	13.28	20.30	0.50	0.00	---	--- QP



Note:

3. Remark 21 is transmitter's fundamental signal.
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dB $\mu$ V) + distance extrapolation factor.

## 3.4.8 Results for Radiated Emissions (30MHz~1GHz)


## &lt;Mode 3&gt;

Final Test Date	Jul. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~26°C	Humidity	49~51%
Test Engineer	Eric Shih	Configurations	Ch. 1

## Horizontal

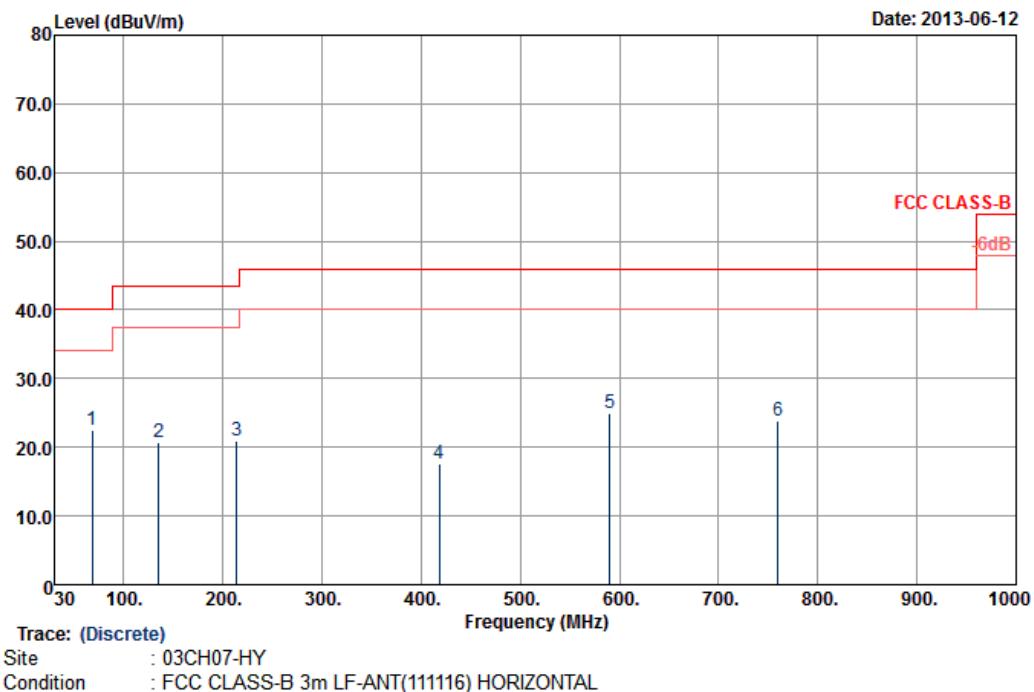

Freq MHz	Level dBuV/m	Over Limit		Line Level dBuV	Read Antenna Level Factor	Cable Loss dB	Preamp Factor	A/Pos cm	T/Pos deg	Remark
		dB	dBuV/m							
1	67.80	22.59	-17.41	40.00	46.77	6.26	0.82	31.26	108	29 Peak
2	135.30	20.82	-22.68	43.50	39.26	11.48	1.18	31.10	---	--- Peak
3	213.60	20.93	-22.57	43.50	40.58	10.04	1.38	31.07	---	--- Peak
4	418.30	17.64	-28.36	46.00	29.87	16.38	2.20	30.81	---	--- Peak
5	590.50	24.99	-21.01	46.00	33.34	19.63	2.66	30.64	---	--- Peak
6	759.90	23.84	-22.16	46.00	29.65	21.49	3.08	30.38	---	--- Peak

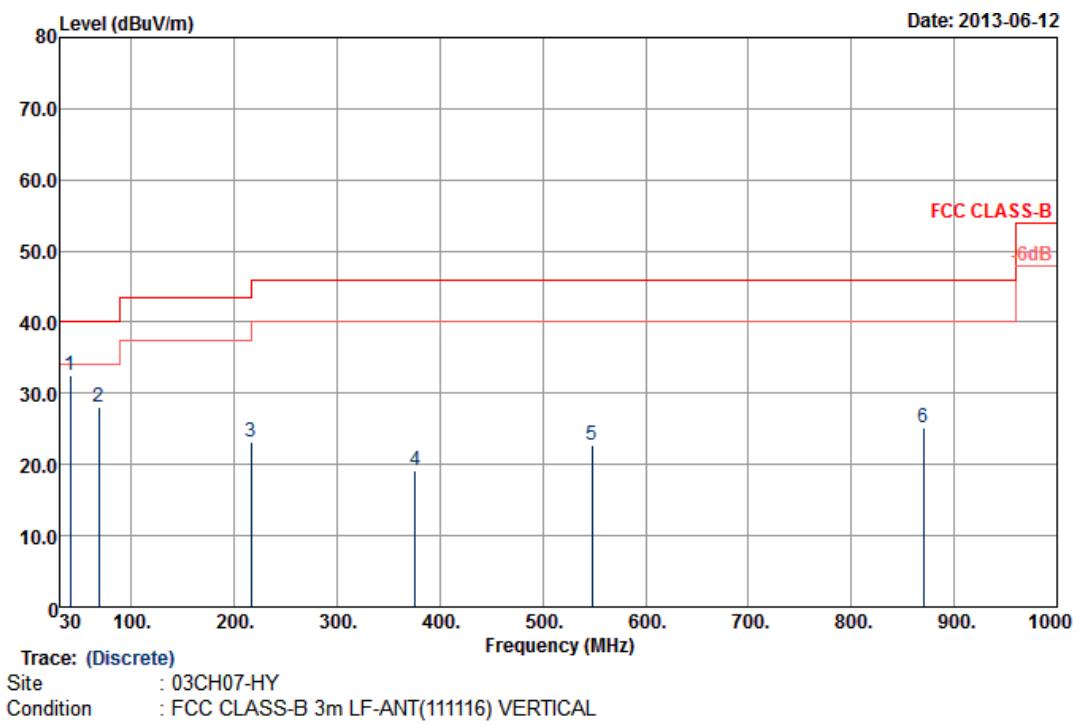**Vertical**

Freq MHz	Level dBuV/m	Over Limit		Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	A/Pos cm	T/Pos deg	Remark
		Line dB	dBuV/m							
1 40.53	32.62	-7.38	40.00	50.29	12.90	0.63	31.20	120	245	Peak
2 67.80	28.10	-11.90	40.00	52.28	6.26	0.82	31.26	---	---	Peak
3 216.30	23.23	-22.77	46.00	42.63	10.24	1.40	31.04	---	---	Peak
4 375.60	19.22	-26.78	46.00	32.81	15.34	2.09	31.02	---	---	Peak
5 547.80	22.69	-23.31	46.00	32.02	18.91	2.55	30.79	---	---	Peak
6 869.80	25.29	-20.71	46.00	29.55	22.80	3.30	30.36	---	---	Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



## &lt;Mode 4&gt;


Final Test Date	Jul. 12, 2013	Test Site No.	03CH07-HY
Temperature	24~26°C	Humidity	49~51%
Test Engineer	Eric Shih	Configurations	Ch. 1

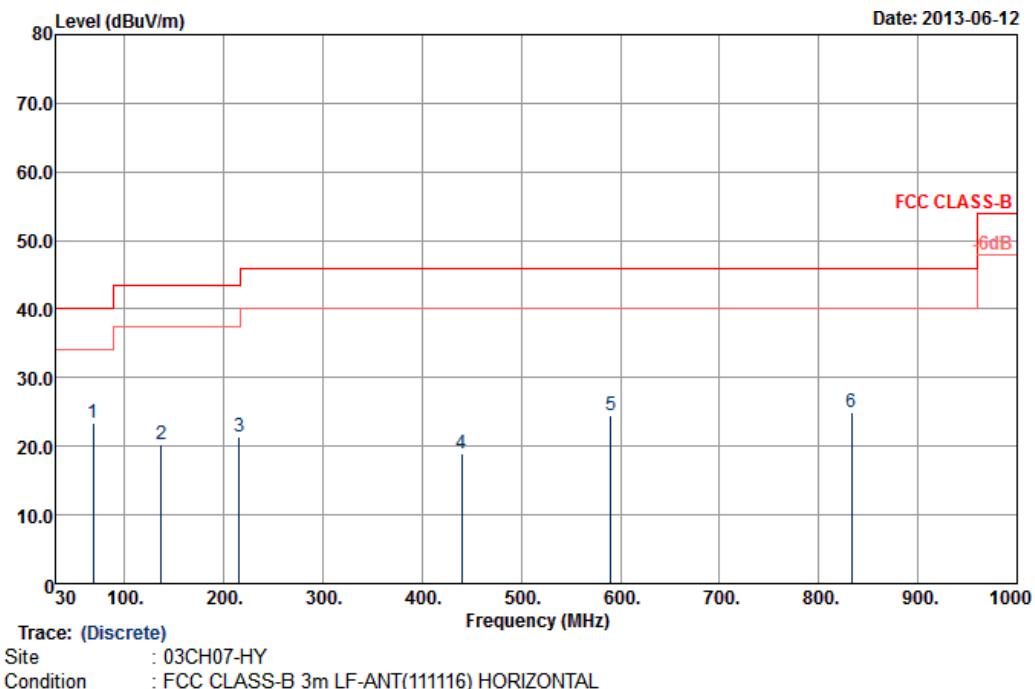**Horizontal**

Freq MHz	Level dBuV/m	Over Limit		ReadAntenna Level dBuV	Cable Loss dB	Preamp Factor	A/Pos cm	T/Pos deg	Remark
		Limit dB	Line dBuV/m						
1	67.80	23.50	-16.50	40.00	47.68	6.26	0.82	31.26	106 251 Peak
2	136.65	20.33	-23.17	43.50	38.78	11.46	1.19	31.10	--- --- Peak
3	215.22	21.44	-22.06	43.50	40.92	10.18	1.39	31.05	--- --- Peak
4	440.00	19.05	-26.95	46.00	30.62	16.85	2.28	30.70	--- --- Peak
5	589.80	24.50	-21.50	46.00	32.86	19.62	2.66	30.64	--- --- Peak
6	832.70	24.88	-21.12	46.00	29.58	22.43	3.23	30.36	--- --- Peak



## Vertical

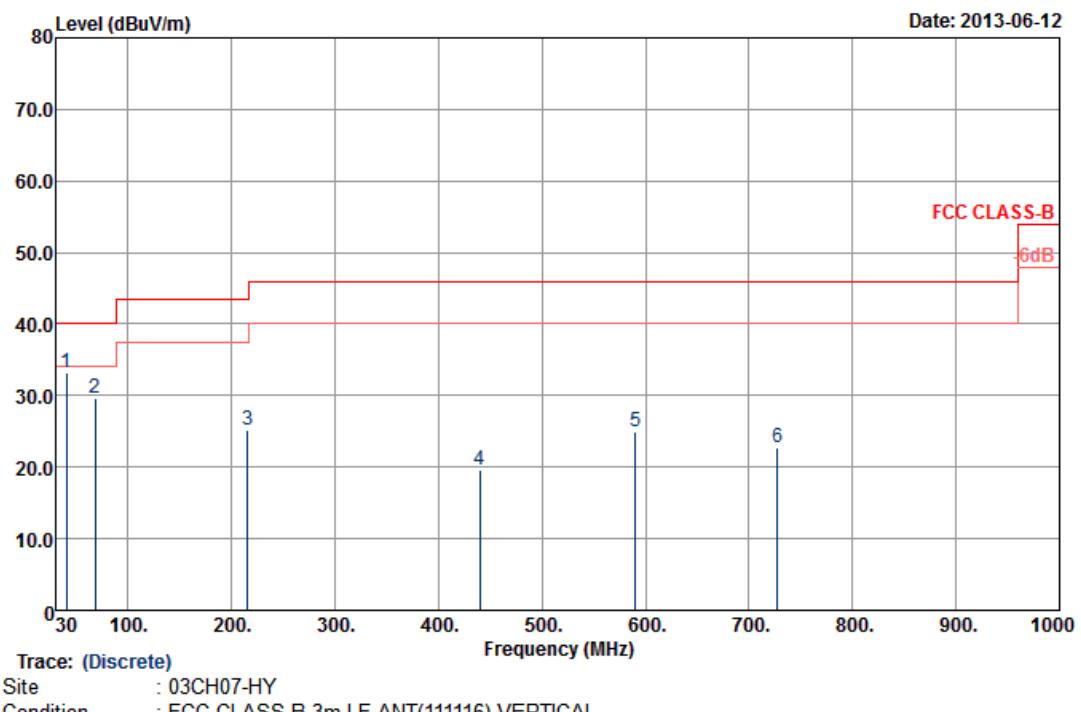

Freq MHz	Level dBuV/m	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	
		Limit	Line	Level	Factor	Loss	Factor	dB	dB	cm	deg
1	40.53	33.26	-6.74	40.00	50.93	12.90	0.63	31.20	152	140	Peak
2	67.80	29.63	-10.37	40.00	53.81	6.26	0.82	31.26	---	---	Peak
3	215.49	25.16	-18.34	43.50	44.64	10.18	1.39	31.05	---	---	Peak
4	440.00	19.66	-26.34	46.00	31.23	16.85	2.28	30.70	---	---	Peak
5	590.50	24.85	-21.15	46.00	33.20	19.63	2.66	30.64	---	---	Peak
6	727.70	22.78	-23.22	46.00	29.16	21.01	3.01	30.40	---	---	Peak

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



### 3.5 Frequency Stability Measurement

#### 3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	1 kHz
VBW	3 kHz
Sweep Time	Auto

#### 3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is  $(f-fc)/fc \times 10^6$  ppm and the limit is less than +/-100ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

### 3.5.4 Test Setup Layout

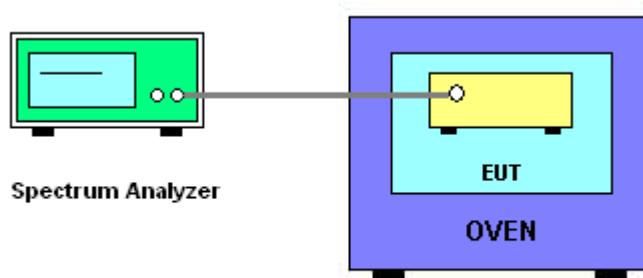

### 3.5.5 Test Deviation

There is no deviation with the original standard.

### 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.



## 3.5.7 Test Result of Frequency Stability

## &lt; NFC-A for Battery 2&gt;

Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
3.7	13.55996
3.55	13.55996
4.2	13.55996
Max. Deviation (MHz)	-0.000040
Max. Deviation (ppm)	-2.9499

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56002
-10	13.56005
0	13.56004
10	13.56004
20	13.56003
30	13.56
40	13.55996
50	13.55994
Max. Deviation (MHz)	-0.000060
Max. Deviation (ppm)	-4.4248



## &lt; NFC-B for Battery 2&gt;

Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
3.7	13.55996
3.55	13.55998
4.2	13.55996
Max. Deviation (MHz)	-0.000020
Max. Deviation (ppm)	-1.4749

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56002
-10	13.56004
0	13.56004
10	13.56004
20	13.56002
30	13.55998
40	13.55996
50	13.55995
Max. Deviation (MHz)	-0.000050
Max. Deviation (ppm)	-3.6873



## &lt; NFC-F for Battery 2&gt;

Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
3.7	13.55997
3.55	13.55998
4.2	13.55998
Max. Deviation (MHz)	-0.000020
Max. Deviation (ppm)	-1.4749

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56002
-10	13.56004
0	13.56004
10	13.56004
20	13.56002
30	13.55998
40	13.55996
50	13.55996
Max. Deviation (MHz)	-0.000040
Max. Deviation (ppm)	-2.9499



## &lt; NFC-V for Battery 2&gt;

Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
3.7	13.55997
3.55	13.55997
4.2	13.55998
Max. Deviation (MHz)	-0.000020
Max. Deviation (ppm)	-1.4749

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56002
-10	13.56004
0	13.56004
10	13.56004
20	13.56002
30	13.55998
40	13.55996
50	13.55996
Max. Deviation (MHz)	-0.000040
Max. Deviation (ppm)	-2.9499



## &lt; NFC-F for Battery 1&gt;

Final Test Date	Jun. 17, 2013 ~ Jul. 04, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
3.7	13.55995
3.55	13.55994
4.2	13.55995
Max. Deviation (MHz)	-0.000050
Max. Deviation (ppm)	-3.6873

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56
-10	13.56
0	13.56002
10	13.56
20	13.55998
30	13.55996
40	13.55994
50	13.55992
Max. Deviation (MHz)	-0.000080
Max. Deviation (ppm)	-5.8997



## **3.6 Antenna Requirements**

### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### **3.6.2 Antenna Connector Construction**

Enbedded in Antenna.



#### 4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 13, 2012	Jul. 02, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2012	Jul. 02, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 06, 2012	Jul. 02, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Jul. 02, 2013	N/A	Conduction (CO05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Jun. 17, 2013~ Jul. 04, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 23, 2012	Jun. 17, 2013~ Jul. 04, 2013	Jul. 22, 2013	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9k~7G	Sep. 03, 2012	Jun. 12, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/0001	9k~30M	Jul. 03, 2012	Jun. 12, 2013	Jul. 02, 2013	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30M~1G	Oct. 06, 2012	Jun. 12, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30M~1G	Feb. 26, 2013	Jun. 12, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jun. 12, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Jun. 12, 2013	N/A	Radiation (03CH07-HY)



## **5. TEST LOCATION**

HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
--------	--



## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-130110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2013 to January 09, 2016  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date:January 10, 2013

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix