


# FCC SAR Test Report

**APPLICANT** : Zebra Technologies Corporation  
**EQUIPMENT** : Touch computer  
**BRAND NAME** : Zebra  
**MODEL NAME** : TC56CJ  
**FCC ID** : UZ7TC56CJ  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information ..... 6
4.2 General LTE SAR Test and Reporting Considerations ..... 8
5. RF Exposure Limits.....10
5.1 Uncontrolled Environment.....10
5.2 Controlled Environment.....10
6. Specific Absorption Rate (SAR).....11
6.1 Introduction ..... 11
6.2 SAR Definition..... 11
7. System Description and Setup .....12
7.1 E-Field Probe .....13
7.2 Data Acquisition Electronics (DAE) .....13
7.3 Phantom.....14
7.4 Device Holder.....15
8. Measurement Procedures .....16
8.1 Spatial Peak SAR Evaluation .....16
8.2 Power Reference Measurement.....17
8.3 Area Scan .....17
8.4 Zoom Scan.....18
8.5 Volume Scan Procedures.....18
8.6 Power Drift Monitoring.....18
9. Test Equipment List .....19
10. System Verification .....20
10.1 Tissue Simulating Liquids.....20
10.2 Tissue Verification .....21
10.3 System Performance Check Results.....22
11. RF Exposure Positions .....23
11.1 Ear and handset reference point .....23
11.2 Definition of the cheek position.....24
11.3 Definition of the tilt position.....25
11.4 Body Worn Accessory .....25
11.5 Wireless Router.....26
12. Conducted RF Output Power (Unit: dBm).....27
13. Bluetooth Exclusions Applied .....54
14. Antenna Location .....55
15. SAR Test Results .....56
15.1 Head SAR .....58
15.2 Hotspot SAR .....62
15.3 Body Worn Accessory SAR.....66
15.4 Repeated SAR Measurement .....69
16. Simultaneous Transmission Analysis.....70
16.1 Head Exposure Conditions .....71
16.2 Hotspot Exposure Conditions.....73
16.3 Body-Worn Accessory Exposure Conditions .....75
16.4 SPLSR Evaluation and Analysis.....76
17. Uncertainty Assessment .....93
18. References .....96
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA672014-10	Rev. 01	Initial issue of report	Jan. 10, 2017



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for Zebra Technologies Corporation, Touch computer, TC56CJ, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 0mm)	Hotspot (Separation 10mm)	
		1g SAR (W/kg)			
Licensed	GSM850	0.76	0.26	0.67	1.59
	GSM1900	0.33	1.07	1.30	
	WCDMA II	0.50	1.23	1.02	
	WCDMA IV	0.45	1.19	1.26	
	WCDMA V	0.60	0.33	0.56	
	CDMA BC0	0.65	0.34	0.57	
	CDMA BC1	0.51	1.41	1.32	
	LTE Band 2	0.52	1.36	1.31	
	LTE Band 4	0.35	1.03	1.42	
	LTE Band 5	0.70	0.33	0.74	
	LTE Band 12 / 17	0.54	0.73	0.77	
	LTE Band 13	0.67	0.48	0.88	
DTS	2.4GHz WLAN	1.29	0.08	0.31	1.57
NII	5GHz WLAN	1.26	0.10	0.65	1.59
Date of Testing:		2016/11/24 ~ 2016/12/11			
<b>Remark :</b>					
1. LTE band 17 SAR test was covered by Band 12 ; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if, <ul style="list-style-type: none"> <li>a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion</li> <li>b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band</li> </ul>					

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



## 2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza Holtsville, NY 11742

Manufacturer	
Company Name	Wistron Corporation
Address	21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

**4. Equipment Under Test (EUT) Information**

**4.1 General Information**

Product Feature & Specification	
<b>Equipment Name</b>	Touch computer
<b>Brand Name</b>	Zebra
<b>Model Name</b>	TC56CJ
<b>FCC ID</b>	UZ7TC56CJ
<b>IMEI Code</b>	For WWAN SAR Testing : 353856080006859 For WLAN SAR Testing : 353856080006966
<b>Wireless Technology and Frequency Range</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
<b>Mode</b>	<ul style="list-style-type: none"> <li>· GSM/GPRS/EGPRS</li> <li>· RMC/AMR 12.2Kbps</li> <li>· HSDPA</li> <li>· HSUPA</li> <li>· DC-HSDPA</li> <li>· CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A)</li> <li>· LTE: QPSK, 16QAM</li> <li>· 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80</li> <li>· Bluetooth BR/EDR/LE</li> <li>· NFC:ASK</li> </ul>
<b>HW Version</b>	DV1
<b>SW Version</b>	91-12-04.4-MG-00
<b>FW Version</b>	FUSION_BA_2_00.0.0.022
<b>MFD</b>	17OCT16
<b>GSM / (E)GPRS Transfer mode</b>	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
<b>EUT Stage</b>	Engineering sample
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. This device WLAN 2.4GHz / 5.2GHz (U-NII-1) / 5.8GHz (U-NII-3) supports Hotspot operation.</li> <li>2. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, UMTS band 2/4, CDMA2000 BC1, and LTE band 2/4.</li> </ol>	



Specification of Accessories				
Adapter (5V/2.5A)	Brand Name	Zebra	Model Number	SAWA-65-20005A
Headset Jumper 1	Brand Name	Zebra	Part Number	CBL-TC51-HDST25-01
Headset Jumper 2	Brand Name	Zebra	Part Number	CBL-TC51-HDST35-01
Battery	Brand Name	Zebra	Model Number	BT-000314
2.5mm Earphone	Brand Name	Zebra	Part Number	HDST-25MM-PTVP-01
3.5mm Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-TC51-SNP1-01
Rugged Charge/USB cable	Brand Name	Zebra	Part Number	CBL-TC51-USB1-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC51-HLSTR1-01
Exoskeleton	Brand Name	Zebra	Part Number	SG-TC51-EX01-01
Hand strap	Brand Name	Zebra	Part Number	SG-TC51-BHDSTP1-03



**4.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																							
FCC ID	UZ7TC56CJ																																						
Equipment Name	Touch computer																																						
Operating Frequency Range of each LTE transmission band	LTE Band 02: 1850 MHz ~ 1910 MHz LTE Band 04: 1710 MHz ~ 1755 MHz LTE Band 05: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz																																						
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Voice and Data																																						
LTE MPR permanently built-in by design	<p style="text-align: center;"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
Power reduction applied to satisfy SAR compliance	1. Yes, when operating in hotspot mode that LTE B2 / B4 power reduction applied to satisfy SAR compliance.																																						





Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

- 1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

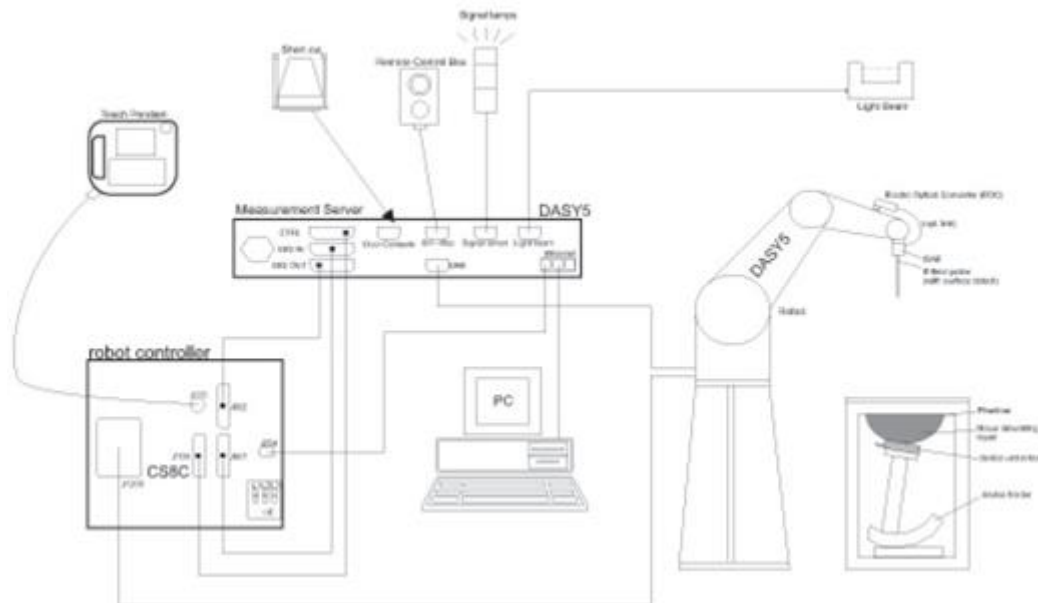


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**7.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **7.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## 8. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 18, 2016	May. 17, 2017
SPEAG	835MHz System Validation Kit	D835V2	4d200	Aug. 23, 2016	Aug. 22, 2017
SPEAG	1750MHz System Validation Kit	D1750V2	1023	Jun. 23, 2016	Jun. 22, 2017
SPEAG	1900MHz System Validation Kit	D1900V2	5d210	Aug. 25, 2016	Aug. 24, 2017
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 30, 2016	Aug. 29, 2017
SPEAG	5GHz System Validation Kit	D5GHZV2	1006	Sep. 27, 2016	Sep. 26, 2017
SPEAG	5GHz System Validation Kit	D5GHZV2	1040	Jun. 17, 2016	Jun. 16, 2017
SPEAG	Data Acquisition Electronics	DAE3	495	May. 27, 2016	May. 26, 2017
SPEAG	Data Acquisition Electronics	DAE4	1388	Oct. 10, 2016	Oct. 09, 2017
SPEAG	Data Acquisition Electronics	DAE4	679	Jun. 13, 2016	Jun. 12, 2017
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 28, 2016	Sep. 27, 2017
SPEAG	Data Acquisition Electronics	DAE4	913	Mar. 31, 2016	Mar. 30, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Oct. 25, 2016	Oct. 24, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 26, 2016	May. 25, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	Jul. 11, 2016	Jul. 10, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 03, 2016	Oct. 02, 2017
WonDer	Thermometer	WD-5015	TM642	Oct. 12, 2016	Oct. 11, 2017
WonDer	Thermometer	WD-5015	TM281	Oct. 12, 2016	Oct. 11, 2017
Wisewind	Thermometer	HTC-1	TM560	Oct. 12, 2016	Oct. 11, 2017
Wisewind	Thermometer	HTC-1	TM225	Oct. 12, 2016	Oct. 11, 2017
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 10, 2016	May. 09, 2017
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 17, 2016	May. 16, 2017
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 22, 2016	Aug. 21, 2017
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 16, 2016	Mar. 15, 2017
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 16, 2016	Mar. 15, 2017
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

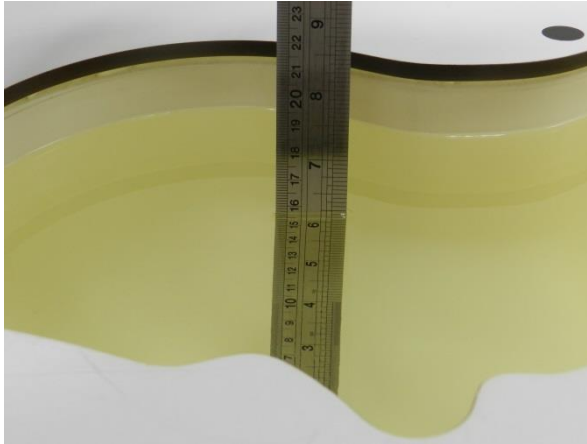


Fig 10.1 Photo of Liquid Height for Head SAR

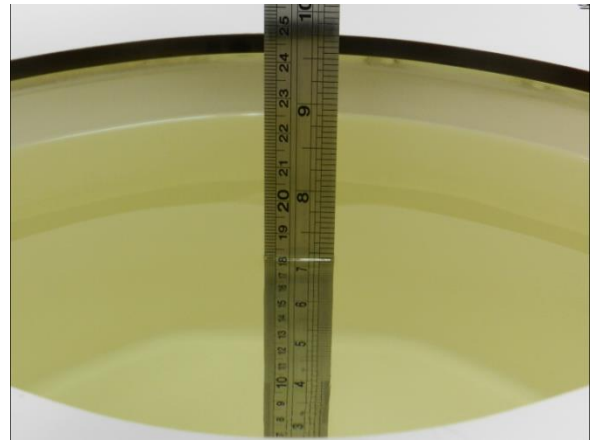


Fig 10.2 Photo of Liquid Height for Body SAR



**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	HSL	22.7	0.903	43.368	0.89	41.90	1.46	3.50	±5	2016/11/26
750	MSL	22.7	0.955	54.706	0.96	55.50	-0.52	-1.43	±5	2016/11/26
835	HSL	22.4	0.881	41.209	0.90	41.50	-2.11	-0.70	±5	2016/11/24
835	MSL	22.6	0.971	57.283	0.97	55.20	0.10	3.77	±5	2016/11/24
835	MSL	22.3	0.976	56.627	0.97	55.20	0.62	2.59	±5	2016/11/25
1750	HSL	22.2	1.386	41.797	1.37	40.10	1.17	4.23	±5	2016/11/28
1750	MSL	22.5	1.475	55.685	1.49	53.40	-1.01	4.28	±5	2016/12/6
1750	MSL	22.5	1.460	55.233	1.49	53.40	-2.01	3.43	±5	2016/12/11
1900	HSL	22.2	1.410	41.660	1.40	40.00	0.71	4.15	±5	2016/11/28
1900	MSL	22.3	1.518	54.185	1.52	53.30	-0.13	1.66	±5	2016/11/30
1900	MSL	22.7	1.583	54.248	1.52	53.30	4.14	1.78	±5	2016/12/1
1900	MSL	22.5	1.526	54.393	1.52	53.30	0.39	2.05	±5	2016/12/6
1900	MSL	22.5	1.556	54.999	1.52	53.30	2.37	3.19	±5	2016/12/10
2450	HSL	22.2	1.813	40.435	1.80	39.20	0.72	3.15	±5	2016/11/25
2450	MSL	22.3	1.993	55.011	1.95	52.70	2.21	4.39	±5	2016/11/25
5200	MSL	22.5	5.470	47.100	5.30	49.00	3.21	-3.88	±5	2016/11/28
5250	HSL	22.5	4.594	36.635	4.71	35.95	-2.46	1.91	±5	2016/11/26
5300	MSL	22.6	5.520	47.000	5.42	48.90	1.85	-3.89	±5	2016/11/29
5600	HSL	22.5	4.942	36.144	5.07	35.50	-2.52	1.81	±5	2016/11/26
5600	MSL	22.6	5.910	46.500	5.77	48.50	2.43	-4.12	±5	2016/11/29
5750	HSL	22.5	5.096	35.941	5.22	35.35	-2.38	1.67	±5	2016/11/26
5800	MSL	22.5	6.260	46.000	6.00	48.20	4.33	-4.56	±5	2016/11/28

**10.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/11/26	750	HSL	250	D750V3-1012	EX3DV4 - SN3898	DAE4 Sn913	2.12	8.21	8.48	3.29
2016/11/26	750	MSL	250	D750V3-1012	EX3DV4 - SN3898	DAE4 Sn913	2.07	8.72	8.28	-5.05
2016/11/24	835	HSL	250	D835V2-4d200	EX3DV4 - SN3697	DAE4 Sn1388	2.27	9.39	9.08	-3.30
2016/11/24	835	MSL	250	D835V2-4d200	EX3DV4 - SN3697	DAE4 Sn1388	2.43	9.65	9.72	0.73
2016/11/25	835	MSL	250	D835V2-4d200	EX3DV4 - SN3697	DAE4 Sn1388	2.51	9.65	10.04	4.04
2016/11/28	1750	HSL	250	D1750V2-1023	EX3DV4 - SN3898	DAE4 Sn913	8.97	36.20	35.88	-0.88
2016/12/6	1750	MSL	250	D1750V2-1023	EX3DV4 - SN3898	DAE4 Sn913	9.23	36.40	36.92	1.43
2016/12/11	1750	MSL	250	D1750V2-1023	EX3DV4 - SN3931	DAE3 Sn577	8.39	36.40	33.56	-7.80
2016/11/28	1900	HSL	250	D1900V2-5d210	EX3DV4 - SN3898	DAE4 Sn913	9.85	39.90	39.40	-1.25
2016/11/30	1900	MSL	250	D1900V2-5d210	EX3DV4 - SN3898	DAE4 Sn913	9.56	40.30	38.24	-5.11
2016/12/1	1900	MSL	250	D1900V2-5d210	EX3DV4 - SN3898	DAE4 Sn913	10.10	40.30	40.40	0.25
2016/12/6	1900	MSL	250	D1900V2-5d210	EX3DV4 - SN3898	DAE4 Sn913	10.10	40.30	40.40	0.25
2016/12/10	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE3 Sn577	9.32	38.80	37.28	-3.92
2016/11/25	2450	HSL	250	D2450V2-736	EX3DV4 - SN3898	DAE4 Sn913	12.40	53.10	49.60	-6.59
2016/11/25	2450	MSL	250	D2450V2-736	EX3DV4 - SN3898	DAE4 Sn679	12.20	52.10	48.80	-6.33
2016/11/28	5200	MSL	100	D5GHzV2-1040	EX3DV4 - SN3925	DAE3 Sn495	7.65	72.90	76.50	4.94
2016/11/26	5250	HSL	100	D5GHzV2-1006	EX3DV4 - SN3898	DAE4 Sn913	7.99	80.60	79.90	-0.87
2016/11/29	5300	MSL	100	D5GHzV2-1040	EX3DV4 - SN3925	DAE3 Sn495	7.70	76.40	77.00	0.79
2016/11/26	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3898	DAE4 Sn913	7.72	83.80	77.20	-7.88
2016/11/29	5600	MSL	100	D5GHzV2-1040	EX3DV4 - SN3925	DAE3 Sn495	7.41	78.40	74.10	-5.48
2016/11/26	5750	HSL	100	D5GHzV2-1006	EX3DV4 - SN3898	DAE4 Sn913	7.69	80.50	76.90	-4.47
2016/11/28	5800	MSL	100	D5GHzV2-1040	EX3DV4 - SN3925	DAE3 Sn495	7.54	75.20	75.40	0.27

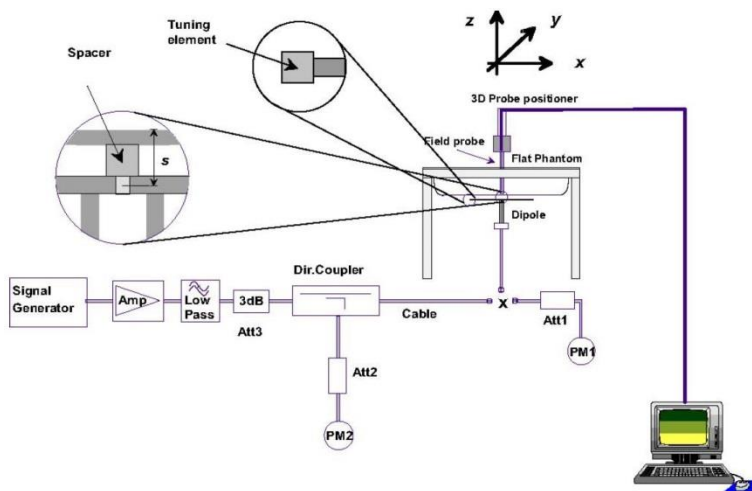

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

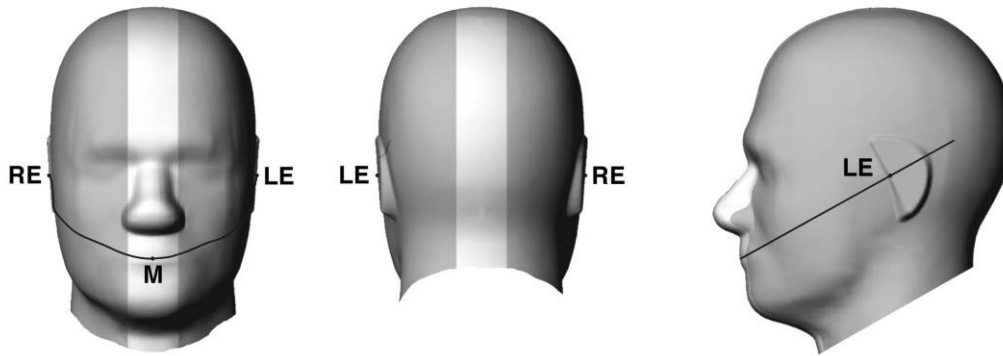


Fig 9.1.1 Front, back, and side views of SAM twin phantom

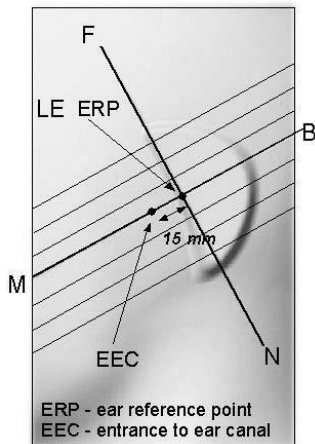


Fig 9.1.2 Close-up side view of phantom showing the ear region.


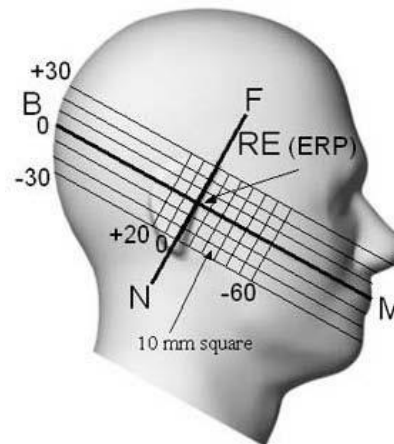



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

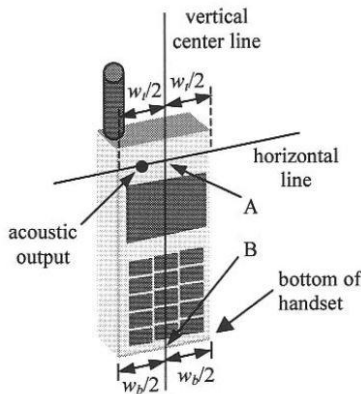

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

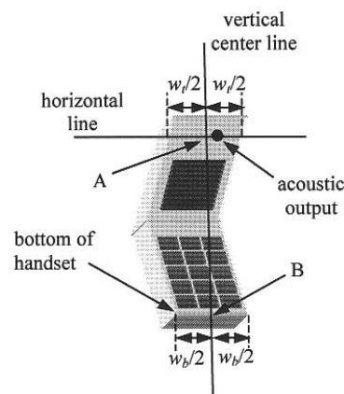

**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

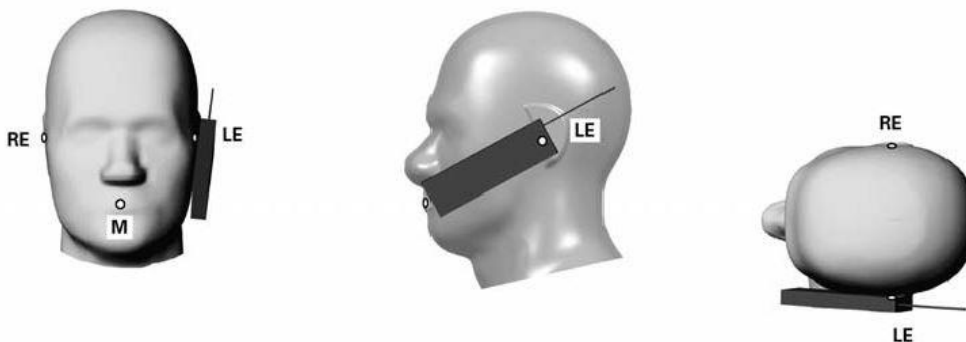


**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**



**11.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

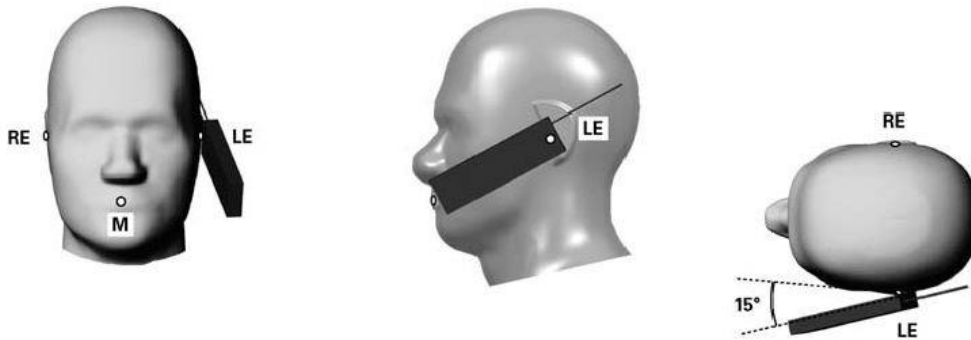


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**11.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

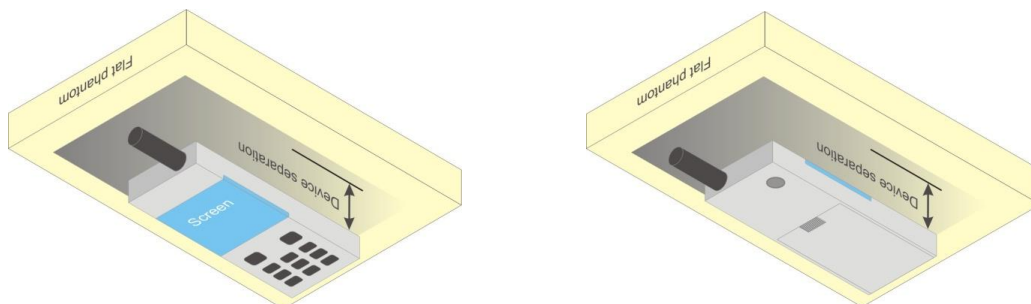

**Fig 9.4 Body Worn Position**



### **11.5 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq$  9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## **12. Conducted RF Output Power (Unit: dBm)**

### **<GSM Conducted Power>**

1. For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
2. Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.  
$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum(\text{power of each slot, in mW})/8]$$
3. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
5. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode
6. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slot due to its highest frame-average power.



**<Default Power Mode>**

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.86	33.14	33.28	34.00	23.86	24.14	24.28	25.00
GPRS 1 Tx slot	32.87	33.15	33.32	34.00	23.87	24.15	24.32	25.00
GPRS 2 Tx slots	30.35	30.58	30.73	31.50	24.35	24.58	24.73	25.50
GPRS 3 Tx slots	28.00	28.16	28.13	29.50	23.74	23.90	23.87	25.24
GPRS 4 Tx slots	27.13	27.15	27.17	28.50	24.13	24.15	24.17	25.50
EDGE 1 Tx slot	26.70	26.80	26.85	28.00	17.70	17.80	17.85	19.00
EDGE 2 Tx slots	24.55	24.66	24.71	26.00	18.55	18.66	18.71	20.00
EDGE 3 Tx slots	22.43	22.54	22.58	24.00	18.17	18.28	18.32	19.74
EDGE 4 Tx slots	21.36	21.57	21.58	23.00	18.36	18.57	18.58	20.00

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.61	30.20	29.86	31.00	20.61	21.20	20.86	22.00
GPRS 1 Tx slot	29.63	30.26	29.88	31.00	20.63	21.26	20.88	22.00
GPRS 2 Tx slots	27.78	28.19	27.86	29.00	21.78	22.19	21.86	23.00
GPRS 3 Tx slots	25.19	25.52	25.39	27.00	20.93	21.26	21.13	22.74
GPRS 4 Tx slots	24.14	24.48	24.40	26.00	21.14	21.48	21.40	23.00
EDGE 1 Tx slot	25.28	25.61	25.59	27.00	16.28	16.61	16.59	18.00
EDGE 2 Tx slots	23.27	23.52	23.48	25.00	17.27	17.52	17.48	19.00
EDGE 3 Tx slots	21.17	21.43	21.40	23.00	16.91	17.17	17.14	18.74
EDGE 4 Tx slots	20.07	20.33	20.30	22.00	17.07	17.33	17.30	19.00

**<Reduced Power Mode>**

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.08	29.31	29.26	30.00	20.08	20.31	20.26	21.00
GPRS 1 Tx slot	29.11	29.32	29.29	30.00	20.11	20.32	20.29	21.00
GPRS 2 Tx slots	26.06	26.38	26.32	27.00	20.06	20.38	20.32	21.00
GPRS 3 Tx slots	24.00	24.36	24.34	25.00	19.74	20.10	20.08	20.74
GPRS 4 Tx slots	23.10	23.42	23.36	24.50	20.10	20.42	20.36	21.50
EDGE 1 Tx slot	25.28	25.61	25.59	27.00	16.28	16.61	16.59	18.00
EDGE 2 Tx slots	23.27	23.52	23.48	25.00	17.27	17.52	17.48	19.00
EDGE 3 Tx slots	21.17	21.43	21.40	23.00	16.91	17.17	17.14	18.74
EDGE 4 Tx slots	20.07	20.33	20.30	22.00	17.07	17.33	17.30	19.00

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

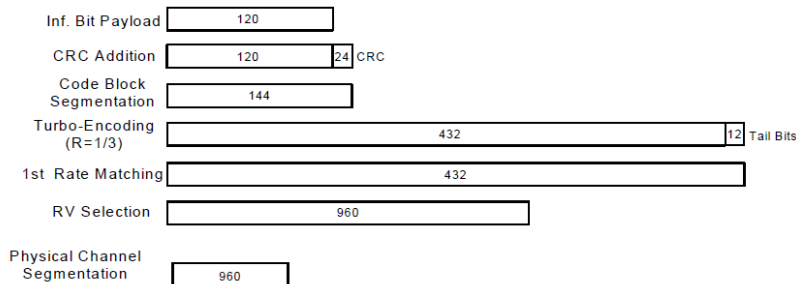

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**<Default Power Mode >**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	24.20	24.05	24.30	24.50	23.98	23.92	23.96	24.50	23.96	23.92	23.76	25.00
3GPP Rel 99	RMC 12.2Kbps	24.22	24.07	24.37	24.50	23.99	24.00	23.96	24.50	23.97	23.93	23.80	25.00
3GPP Rel 6	HSDPA Subtest-1	23.40	23.15	23.39	23.50	23.12	23.03	23.11	23.50	23.05	22.97	22.86	24.00
3GPP Rel 6	HSDPA Subtest-2	23.29	23.16	23.43	23.50	23.04	22.97	23.10	23.50	22.99	22.95	22.91	24.00
3GPP Rel 6	HSDPA Subtest-3	22.84	22.66	22.84	23.00	22.62	22.47	22.54	23.00	22.40	22.49	22.36	23.50
3GPP Rel 6	HSDPA Subtest-4	22.86	22.59	22.89	23.00	22.62	22.43	22.57	23.00	22.44	22.46	22.28	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.22	23.05	23.38	23.50	22.97	22.95	23.02	23.50	22.92	22.83	22.84	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.18	23.03	23.27	23.50	22.98	22.85	23.03	23.50	22.89	22.86	22.79	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.75	22.60	22.71	23.00	22.44	22.39	22.52	23.00	22.37	22.35	22.30	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.63	22.57	22.69	23.00	22.45	22.30	22.50	23.00	22.27	22.31	22.25	23.50
3GPP Rel 6	HSUPA Subtest-1	23.34	23.08	23.39	23.50	23.07	23.00	23.05	23.50	22.99	22.85	22.81	24.00
3GPP Rel 6	HSUPA Subtest-2	21.46	21.29	21.46	21.50	21.03	21.08	21.19	21.50	21.12	21.01	20.91	22.00
3GPP Rel 6	HSUPA Subtest-3	22.38	22.19	22.45	22.50	22.02	22.03	22.13	22.50	22.11	21.93	21.92	23.00
3GPP Rel 6	HSUPA Subtest-4	21.40	21.29	21.48	21.50	20.96	21.09	21.17	21.50	21.08	21.05	20.93	22.00
3GPP Rel 6	HSUPA Subtest-5	23.29	23.16	23.41	23.50	23.03	22.98	23.10	23.50	22.99	22.91	22.86	24.00

**<Reduced Power Mode>**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938	1537	1638	1738		
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	18.51	18.52	18.62	19.50	20.60	20.57	20.73	21.50
3GPP Rel 99	RMC 12.2Kbps	18.50	18.53	18.64	19.50	20.62	20.59	20.74	21.50
3GPP Rel 6	HSDPA Subtest-1	17.58	17.37	17.63	18.50	19.65	19.61	19.75	20.50
3GPP Rel 6	HSDPA Subtest-2	17.55	17.36	17.61	18.50	19.63	19.60	19.76	20.50
3GPP Rel 6	HSDPA Subtest-3	16.97	16.84	17.14	18.00	19.13	19.09	19.22	20.00
3GPP Rel 6	HSDPA Subtest-4	16.95	16.83	17.12	18.00	19.11	19.08	19.17	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	17.48	17.29	17.53	18.50	19.56	19.53	19.68	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	17.47	17.26	17.55	18.50	19.52	19.50	19.66	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	16.89	16.74	17.04	18.00	19.03	19.00	19.12	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.82	16.76	17.01	18.00	19.04	19.02	19.11	20.00
3GPP Rel 6	HSUPA Subtest-1	17.23	17.32	17.62	18.50	19.75	19.74	19.83	20.50
3GPP Rel 6	HSUPA Subtest-2	15.16	15.21	15.55	16.50	17.63	17.62	17.74	18.50
3GPP Rel 6	HSUPA Subtest-3	16.12	16.23	16.46	17.50	18.69	18.72	18.81	19.50
3GPP Rel 6	HSUPA Subtest-4	15.18	15.29	15.54	16.50	17.68	17.72	17.83	18.50
3GPP Rel 6	HSUPA Subtest-5	17.59	17.43	17.67	18.50	19.77	19.69	19.75	20.50





**<CDMA2000 Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

**<Default Power Mode>**

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	24.82	24.76	24.61	25.00	24.83	24.72	24.85	25.00
RC3 SO55	24.88	24.74	24.66	25.00	24.85	24.61	24.94	25.00
RC3 SO32(F+SCH)	24.70	24.62	24.50	25.00	24.86	24.65	24.85	25.00
RC3 SO32(+SCH)	24.78	24.65	24.63	25.00	24.85	24.63	24.76	25.00
RTAP 153.6Kbps	24.74	24.68	24.75	25.00	24.90	24.71	24.76	25.00
RETAP 4096Bits	24.65	24.52	24.44	25.00	24.88	24.72	24.75	25.00

**<Reduced Power Mode>**

Band	CDMA2000 BC1			Tune-up Limit (dBm)
	25	600	1175	
Frequency (MHz)	1851.25	1880	1908.75	
RC1 SO55	19.83	19.63	19.74	20.50
RC3 SO55	19.85	19.62	19.75	20.50
RC3 SO32(F+SCH)	19.86	19.61	19.80	20.50
RC3 SO32(+SCH)	19.84	19.62	19.77	20.50
RTAP 153.6Kbps	19.81	19.59	19.79	20.50
RETAP 4096Bits	19.80	19.62	19.78	20.50

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.76	23.64	23.63	24.5	0
20	QPSK	1	49	23.70	23.77	23.78		
20	QPSK	1	99	23.63	23.69	23.64		
20	QPSK	50	0	22.72	22.63	22.63	23.5	1
20	QPSK	50	24	22.68	22.67	22.60		
20	QPSK	50	50	22.79	22.78	22.73		
20	QPSK	100	0	22.72	22.70	22.59		
20	16QAM	1	0	22.53	22.53	22.50	23.5	1
20	16QAM	1	49	22.51	22.40	22.43		
20	16QAM	1	99	22.35	22.35	22.55		
20	16QAM	50	0	21.74	21.82	21.76	22.5	2
20	16QAM	50	24	21.66	21.81	21.61		
20	16QAM	50	50	21.67	21.55	21.57		
20	16QAM	100	0	21.64	21.71	21.57		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.53	23.64	23.69	24.5	0
15	QPSK	1	37	23.65	23.70	23.60		
15	QPSK	1	74	23.59	23.63	23.58		
15	QPSK	36	0	22.67	22.73	22.64	23.5	1
15	QPSK	36	20	22.66	22.68	22.69		
15	QPSK	36	39	22.61	22.60	22.61		
15	QPSK	75	0	22.60	22.66	22.63		
15	16QAM	1	0	22.53	22.57	22.54	23.5	1
15	16QAM	1	37	22.52	22.42	22.39		
15	16QAM	1	74	22.42	22.39	22.61		
15	16QAM	36	0	21.59	21.72	21.53	22.5	2
15	16QAM	36	20	21.62	21.63	21.65		
15	16QAM	36	39	21.61	21.59	21.62		
15	16QAM	75	0	21.65	21.72	21.65		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.44	23.42	23.43	24.5	0
10	QPSK	1	25	23.70	23.69	23.68		
10	QPSK	1	49	23.38	23.72	23.60		
10	QPSK	25	0	22.66	22.76	22.65	23.5	1
10	QPSK	25	12	22.66	22.77	22.66		
10	QPSK	25	25	22.62	22.62	22.64		
10	QPSK	50	0	22.59	22.73	22.73		
10	16QAM	1	0	22.50	22.51	22.46	23.5	1
10	16QAM	1	25	22.73	22.66	22.64		
10	16QAM	1	49	22.32	22.42	22.53		
10	16QAM	25	0	21.68	21.78	21.68	22.5	2
10	16QAM	25	12	21.70	21.67	21.75		
10	16QAM	25	25	21.57	21.55	21.72		
10	16QAM	50	0	21.67	21.68	21.75		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.62	23.60	23.68	24.5	0
5	QPSK	1	12	23.70	23.71	23.75		
5	QPSK	1	24	23.72	23.69	23.69		
5	QPSK	12	0	22.60	22.59	22.68	23.5	1
5	QPSK	12	7	22.65	22.65	22.68		
5	QPSK	12	13	22.61	22.69	22.69		
5	QPSK	25	0	22.62	22.69	22.66		
5	16QAM	1	0	22.39	22.43	22.40	23.5	1
5	16QAM	1	12	22.38	22.65	22.83		
5	16QAM	1	24	22.39	22.34	22.35		
5	16QAM	12	0	21.70	21.50	21.77	22.5	2
5	16QAM	12	7	21.67	21.67	21.68		
5	16QAM	12	13	21.58	21.87	21.78		
5	16QAM	25	0	21.59	21.73	21.65		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.27	23.48	23.35	24.5	0
3	QPSK	1	8	23.45	23.49	23.35		
3	QPSK	1	14	23.47	23.44	23.27		
3	QPSK	8	0	22.72	22.66	22.56	23.5	1
3	QPSK	8	4	22.60	22.79	22.66		
3	QPSK	8	7	22.64	22.68	22.62		
3	QPSK	15	0	22.58	22.63	22.65		
3	16QAM	1	0	22.48	22.21	22.45	23.5	1
3	16QAM	1	8	22.31	22.30	22.38		
3	16QAM	1	14	22.43	22.25	22.51		
3	16QAM	8	0	21.61	21.49	21.67	22.5	2
3	16QAM	8	4	21.63	21.72	21.76		
3	16QAM	8	7	21.66	21.70	21.78		
3	16QAM	15	0	21.58	21.53	21.61		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.55	23.46	23.42	24.5	0
1.4	QPSK	1	3	23.68	23.64	23.42		
1.4	QPSK	1	5	23.57	23.75	23.30		
1.4	QPSK	3	0	23.68	23.60	23.54		
1.4	QPSK	3	1	23.62	23.70	23.66		
1.4	QPSK	3	3	23.67	23.71	23.62		
1.4	QPSK	6	0	22.62	22.75	22.53	23.5	1
1.4	16QAM	1	0	22.49	22.65	22.50	23.5	1
1.4	16QAM	1	3	22.62	22.58	22.49		
1.4	16QAM	1	5	22.50	22.29	22.28		
1.4	16QAM	3	0	22.63	22.55	22.50		
1.4	16QAM	3	1	22.63	22.62	22.57		
1.4	16QAM	3	3	22.53	22.61	22.61		
1.4	16QAM	6	0	21.53	21.39	21.63	22.5	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.88	23.86	23.84	24.5	0
20	QPSK	1	49	24.30	24.32	24.30		
20	QPSK	1	99	23.93	23.85	23.86		
20	QPSK	50	0	23.06	23.09	22.96	23.5	1
20	QPSK	50	24	22.99	22.97	23.04		
20	QPSK	50	50	23.00	22.90	22.97		
20	QPSK	100	0	23.03	22.95	23.04		
20	16QAM	1	0	22.77	22.90	23.01	23.5	1
20	16QAM	1	49	22.88	22.77	23.11		
20	16QAM	1	99	22.74	22.77	22.92		
20	16QAM	50	0	21.98	21.93	22.03	22.5	2
20	16QAM	50	24	21.94	22.05	22.05		
20	16QAM	50	50	22.06	21.73	21.87		
20	16QAM	100	0	21.94	21.93	21.97		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.76	23.80	24.08	24.5	0
15	QPSK	1	37	24.13	24.12	24.09		
15	QPSK	1	74	23.97	23.66	23.90		
15	QPSK	36	0	23.03	22.96	23.10	23.5	1
15	QPSK	36	20	22.98	22.97	23.11		
15	QPSK	36	39	22.99	22.99	23.06		
15	QPSK	75	0	23.00	22.95	23.09		
15	16QAM	1	0	22.67	22.85	23.10	23.5	1
15	16QAM	1	37	22.94	22.81	23.09		
15	16QAM	1	74	22.83	22.76	22.96		
15	16QAM	36	0	22.14	21.98	22.08	22.5	2
15	16QAM	36	20	21.97	21.93	22.15		
15	16QAM	36	39	21.93	22.07	21.98		
15	16QAM	75	0	22.00	21.94	22.09		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.63	23.62	23.92	24.5	0
10	QPSK	1	25	24.05	24.00	24.10		
10	QPSK	1	49	24.02	23.63	23.84		
10	QPSK	25	0	22.96	23.01	23.12	23.5	1
10	QPSK	25	12	23.08	22.96	23.14		
10	QPSK	25	25	23.01	22.91	23.03		
10	QPSK	50	0	23.06	22.98	23.06		
10	16QAM	1	0	22.80	22.82	23.29	23.5	1
10	16QAM	1	25	23.04	22.82	23.07		
10	16QAM	1	49	22.82	22.79	22.96		
10	16QAM	25	0	21.98	22.04	22.23	22.5	2
10	16QAM	25	12	22.15	21.99	22.25		
10	16QAM	25	25	21.98	21.90	22.15		
10	16QAM	50	0	21.95	21.94	22.19		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.60	23.66	23.81	24.5	0
5	QPSK	1	12	23.90	24.04	24.02		
5	QPSK	1	24	23.71	23.66	23.66		
5	QPSK	12	0	22.88	22.99	23.09	23.5	1
5	QPSK	12	7	22.94	23.04	23.05		
5	QPSK	12	13	22.87	22.96	23.08		
5	QPSK	25	0	22.86	22.96	23.07	23.5	1
5	16QAM	1	0	22.76	22.75	22.92		
5	16QAM	1	12	22.67	22.75	22.89		
5	16QAM	1	24	22.78	22.61	22.96	22.5	2
5	16QAM	12	0	21.84	21.84	22.01		
5	16QAM	12	7	21.85	22.01	21.95		
5	16QAM	12	13	21.78	21.87	22.06	22.5	2
5	16QAM	12	13	21.78	21.87	22.06		
5	16QAM	25	0	21.95	22.02	21.98		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.69	23.92	23.62	24.5	0
3	QPSK	1	8	23.80	24.02	23.76		
3	QPSK	1	14	23.81	23.75	23.71		
3	QPSK	8	0	22.91	23.00	23.03	23.5	1
3	QPSK	8	4	23.01	23.03	22.98		
3	QPSK	8	7	22.91	22.98	22.85		
3	QPSK	15	0	22.91	22.99	22.92	23.5	1
3	16QAM	1	0	22.83	23.14	22.77		
3	16QAM	1	8	22.71	23.12	22.75		
3	16QAM	1	14	22.77	22.91	22.67	22.5	2
3	16QAM	8	0	21.96	21.82	22.01		
3	16QAM	8	4	21.90	21.77	22.07		
3	16QAM	8	7	21.98	21.93	21.95	22.5	2
3	16QAM	8	7	21.98	21.93	21.95		
3	16QAM	15	0	21.89	21.85	21.91		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.84	23.85	23.85	24.5	0
1.4	QPSK	1	3	23.98	23.85	23.77		
1.4	QPSK	1	5	23.88	23.80	23.78		
1.4	QPSK	3	0	23.77	24.08	23.92		
1.4	QPSK	3	1	23.89	24.09	23.97		
1.4	QPSK	3	3	23.91	23.99	23.96		
1.4	QPSK	6	0	22.81	23.00	22.88	23.5	1
1.4	16QAM	1	0	22.93	22.91	22.97	23.5	1
1.4	16QAM	1	3	22.98	23.08	23.05		
1.4	16QAM	1	5	22.82	22.89	22.99		
1.4	16QAM	3	0	22.89	22.85	22.97		
1.4	16QAM	3	1	22.85	23.12	22.95		
1.4	16QAM	3	3	22.88	22.89	22.97		
1.4	16QAM	6	0	21.67	21.77	21.94	22.5	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.48	23.45	23.44	25	0
10	QPSK	1	25	23.73	23.86	23.59		
10	QPSK	1	49	23.62	23.44	23.41		
10	QPSK	25	0	22.56	22.73	22.72	24	1
10	QPSK	25	12	22.66	22.74	22.61		
10	QPSK	25	25	22.66	22.69	22.62		
10	QPSK	50	0	22.69	22.72	22.59		
10	16QAM	1	0	22.24	22.71	22.39	24	1
10	16QAM	1	25	22.56	22.74	22.57		
10	16QAM	1	49	22.38	22.30	22.26		
10	16QAM	25	0	21.47	21.68	21.69	23	2
10	16QAM	25	12	21.68	21.67	21.59		
10	16QAM	25	25	21.59	21.65	21.55		
10	16QAM	50	0	21.72	21.56	21.57		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.17	23.57	23.27	25	0
5	QPSK	1	12	23.50	23.59	23.55		
5	QPSK	1	24	23.42	23.24	23.27		
5	QPSK	12	0	22.53	22.67	22.58	24	1
5	QPSK	12	7	22.57	22.71	22.50		
5	QPSK	12	13	22.66	22.63	22.48		
5	QPSK	25	0	22.55	22.66	22.61		
5	16QAM	1	0	22.09	22.47	22.45	24	1
5	16QAM	1	12	22.10	22.29	22.53		
5	16QAM	1	24	22.35	22.31	22.17		
5	16QAM	12	0	21.33	21.64	21.53	23	2
5	16QAM	12	7	21.45	21.70	21.63		
5	16QAM	12	13	21.62	21.57	21.45		
5	16QAM	25	0	21.59	21.66	21.52		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.32	23.68	23.54	25	0
3	QPSK	1	8	23.35	23.42	23.54		
3	QPSK	1	14	23.49	23.56	23.29		
3	QPSK	8	0	22.58	22.77	22.57	24	1
3	QPSK	8	4	22.58	22.76	22.66		
3	QPSK	8	7	22.68	22.70	22.64		
3	QPSK	15	0	22.59	22.69	22.57		
3	16QAM	1	0	22.27	22.57	22.44	24	1
3	16QAM	1	8	22.22	22.40	22.41		
3	16QAM	1	14	22.28	22.54	22.39		
3	16QAM	8	0	21.69	21.76	21.62	23	2
3	16QAM	8	4	21.51	21.76	21.69		
3	16QAM	8	7	21.51	21.70	21.35		
3	16QAM	15	0	21.35	21.54	21.34		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.38	23.47	23.35	25	0
1.4	QPSK	1	3	23.42	23.55	23.65		
1.4	QPSK	1	5	23.29	23.53	23.56		
1.4	QPSK	3	0	23.66	23.62	23.55		
1.4	QPSK	3	1	23.50	23.50	23.74		
1.4	QPSK	3	3	23.50	23.66	23.48		
1.4	QPSK	6	0	22.47	22.56	22.42	24	1
1.4	16QAM	1	0	22.18	22.38	22.42	24	1
1.4	16QAM	1	3	22.36	22.57	22.57		
1.4	16QAM	1	5	22.22	22.40	22.34		
1.4	16QAM	3	0	22.48	22.61	22.39		
1.4	16QAM	3	1	22.66	22.48	22.48		
1.4	16QAM	3	3	22.53	22.60	22.32		
1.4	16QAM	6	0	21.44	21.44	21.25	23	2





<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.48	23.55	23.49		
10	QPSK	1	25	23.77	23.83	23.97	25	0
10	QPSK	1	49	23.54	23.70	23.65		
10	QPSK	25	0	22.63	22.59	22.79		
10	QPSK	25	12	22.68	22.74	22.82		
10	QPSK	25	25	22.71	22.83	22.70	24	1
10	QPSK	50	0	22.59	22.79	22.76		
10	16QAM	1	0	22.25	22.35	22.39		
10	16QAM	1	25	22.71	22.74	22.63		
10	16QAM	1	49	22.54	22.63	22.51		
10	16QAM	25	0	21.62	21.73	21.82		
10	16QAM	25	12	21.64	21.70	21.73		
10	16QAM	25	25	21.61	21.77	21.69	23	2
10	16QAM	50	0	21.47	21.77	21.81		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.38	23.42	23.42		
5	QPSK	1	12	23.76	23.86	23.57		
5	QPSK	1	24	23.43	23.81	23.43		
5	QPSK	12	0	22.52	22.60	22.73		
5	QPSK	12	7	22.63	22.76	22.63		
5	QPSK	12	13	22.62	22.76	22.57		
5	QPSK	25	0	22.63	22.75	22.62		
5	16QAM	1	0	22.35	22.37	22.80		
5	16QAM	1	12	22.40	22.42	22.35		
5	16QAM	1	24	22.41	22.45	22.42	24	1
5	16QAM	12	0	21.44	21.65	21.74		
5	16QAM	12	7	21.63	21.79	21.62		
5	16QAM	12	13	21.34	21.79	21.35		
5	16QAM	25	0	21.37	21.62	21.54	23	2
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.26	23.42	23.69		
3	QPSK	1	8	23.50	23.50	23.70		
3	QPSK	1	14	23.30	23.75	23.65		
3	QPSK	8	0	22.50	22.78	22.84		
3	QPSK	8	4	22.70	22.76	22.72		
3	QPSK	8	7	22.75	22.81	22.70		
3	QPSK	15	0	22.60	22.69	22.69		
3	16QAM	1	0	22.36	22.44	22.66		
3	16QAM	1	8	22.40	22.49	22.49		
3	16QAM	1	14	22.24	22.55	22.58		
3	16QAM	8	0	21.78	21.67	21.72		
3	16QAM	8	4	21.54	21.76	21.76		
3	16QAM	8	7	21.70	21.77	21.73		
3	16QAM	15	0	21.37	21.65	21.67	23	2



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.44	23.46	23.57	25	0
1.4	QPSK	1	3	23.50	23.73	23.72		
1.4	QPSK	1	5	23.46	23.83	23.71		
1.4	QPSK	3	0	23.60	23.78	23.78		
1.4	QPSK	3	1	23.57	23.67	23.76		
1.4	QPSK	3	3	23.50	23.82	23.80		
1.4	QPSK	6	0	22.38	22.68	22.66	24	1
1.4	16QAM	1	0	22.30	22.61	22.64	24	1
1.4	16QAM	1	3	22.49	22.74	22.73		
1.4	16QAM	1	5	22.42	22.54	22.56		
1.4	16QAM	3	0	22.40	22.73	22.72		
1.4	16QAM	3	1	22.40	22.84	22.82		
1.4	16QAM	3	3	22.47	22.85	22.83		
1.4	16QAM	6	0	21.25	21.74	21.63	23	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.39			25	0
10	QPSK	1	25	23.38				
10	QPSK	1	49	23.23				
10	QPSK	25	0	22.51			24	1
10	QPSK	25	12	22.55				
10	QPSK	25	25	22.55				
10	QPSK	50	0	22.55				
10	16QAM	1	0	22.25			24	1
10	16QAM	1	25	22.58				
10	16QAM	1	49	22.34				
10	16QAM	25	0	21.46			23	2
10	16QAM	25	12	21.70				
10	16QAM	25	25	21.45				
10	16QAM	50	0	21.53				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.20	23.26	23.22	25	0
5	QPSK	1	12	23.35	23.36	23.35		
5	QPSK	1	24	23.19	23.17	23.35		
5	QPSK	12	0	22.54	22.61	22.62	24	1
5	QPSK	12	7	22.62	22.64	22.59		
5	QPSK	12	13	22.56	22.57	22.65		
5	QPSK	25	0	22.63	22.57	22.61	24	1
5	16QAM	1	0	22.11	22.36	22.31		
5	16QAM	1	12	22.31	22.32	22.39		
5	16QAM	1	24	22.36	22.28	22.38		
5	16QAM	12	0	21.47	21.53	21.44	23	2
5	16QAM	12	7	21.58	21.38	21.64		
5	16QAM	12	13	21.60	21.42	21.62		
5	16QAM	25	0	21.76	21.54	21.56		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.58	23.60	23.40	25	0
10	QPSK	1	25	23.52	23.30	23.53		
10	QPSK	1	49	23.51	23.46	23.41		
10	QPSK	25	0	22.73	22.63	22.68	24	1
10	QPSK	25	12	22.77	22.66	22.64		
10	QPSK	25	25	22.76	22.67	22.65		
10	QPSK	50	0	22.76	22.73	22.65	24	1
10	16QAM	1	0	22.52	22.30	22.32		
10	16QAM	1	25	22.77	22.65	22.67		
10	16QAM	1	49	22.70	22.54	22.53	23	2
10	16QAM	25	0	21.74	21.70	21.61		
10	16QAM	25	12	21.70	21.82	21.69		
10	16QAM	25	25	21.79	21.82	21.66	23	2
10	16QAM	50	0	21.83	21.66	21.75		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.34	23.26	23.46	25	0
5	QPSK	1	12	23.54	23.43	23.46		
5	QPSK	1	24	23.42	23.52	23.52		
5	QPSK	12	0	22.62	22.54	22.65	24	1
5	QPSK	12	7	22.71	22.77	22.71		
5	QPSK	12	13	22.63	22.71	22.64		
5	QPSK	25	0	22.62	22.67	22.67	24	1
5	16QAM	1	0	22.39	22.40	22.46		
5	16QAM	1	12	22.29	22.28	22.25		
5	16QAM	1	24	22.37	22.41	22.43	23	2
5	16QAM	12	0	21.49	21.58	21.52		
5	16QAM	12	7	21.55	21.79	21.70		
5	16QAM	12	13	21.68	21.60	21.65	23	2
5	16QAM	25	0	21.56	21.70	21.66		



<Reduced Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.60	19.59	19.84	20	0
20	QPSK	1	49	19.94	20.00	19.99		
20	QPSK	1	99	19.65	19.70	19.69		
20	QPSK	50	0	18.93	18.92	18.90	20	0
20	QPSK	50	24	18.95	18.94	18.77		
20	QPSK	50	50	18.96	18.87	18.81		
20	QPSK	100	0	19.00	18.93	18.84	20	0
20	16QAM	1	0	18.74	18.71	18.68		
20	16QAM	1	49	18.72	18.73	18.59		
20	16QAM	1	99	18.56	18.54	18.54	20	0
20	16QAM	50	0	18.91	19.00	18.95		
20	16QAM	50	24	18.96	18.99	18.89		
20	16QAM	50	50	18.83	18.89	18.84	20	0
20	16QAM	100	0	18.95	18.87	18.85		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.80	19.75	19.79	20	0
15	QPSK	1	37	19.99	19.94	19.71		
15	QPSK	1	74	19.77	19.85	19.83		
15	QPSK	36	0	18.91	18.96	18.71	20	0
15	QPSK	36	20	18.93	18.96	18.71		
15	QPSK	36	39	18.83	18.90	18.75		
15	QPSK	75	0	18.88	18.99	18.73	20	0
15	16QAM	1	0	18.69	18.72	18.58		
15	16QAM	1	37	18.69	18.52	18.41		
15	16QAM	1	74	18.62	18.32	18.42	20	0
15	16QAM	36	0	18.91	19.00	18.95		
15	16QAM	36	20	18.96	18.99	18.89		
15	16QAM	36	39	18.85	18.89	18.83	20	0
15	16QAM	75	0	18.95	18.87	18.86		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.53	19.60	19.55	20	0
10	QPSK	1	25	19.88	19.96	19.81		
10	QPSK	1	49	19.69	19.90	19.89		
10	QPSK	25	0	18.84	18.90	18.70	20	0
10	QPSK	25	12	18.83	18.85	18.78		
10	QPSK	25	25	18.74	18.74	18.73		
10	QPSK	50	0	18.95	18.95	18.75	20	0
10	16QAM	1	0	18.54	18.65	18.51		
10	16QAM	1	25	18.81	18.98	18.66		
10	16QAM	1	49	18.50	18.51	18.50	20	0
10	16QAM	25	0	18.98	18.98	18.83		
10	16QAM	25	12	18.90	18.93	18.90		
10	16QAM	25	25	19.00	18.92	18.88	20	0
10	16QAM	50	0	18.87	18.98	18.86		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.50	19.54	19.48	20	0
5	QPSK	1	12	19.83	19.93	19.94		
5	QPSK	1	24	19.88	19.79	19.65		
5	QPSK	12	0	18.73	18.82	18.66	20	0
5	QPSK	12	7	18.81	18.89	18.64		
5	QPSK	12	13	18.79	18.85	18.80		
5	QPSK	25	0	18.81	18.85	18.77		
5	16QAM	1	0	18.32	18.54	18.44	20	0
5	16QAM	1	12	18.50	18.80	18.72		
5	16QAM	1	24	18.54	18.38	18.45		
5	16QAM	12	0	18.84	18.85	18.83	20	0
5	16QAM	12	7	18.85	19.00	18.92		
5	16QAM	12	13	18.93	18.92	18.88		
5	16QAM	12	13	18.93	18.92	18.88		
5	16QAM	25	0	18.92	18.98	18.85		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.69	19.74	19.51	20	0
3	QPSK	1	8	19.67	19.86	19.64		
3	QPSK	1	14	19.89	19.89	19.67		
3	QPSK	8	0	18.97	18.91	18.87	20	0
3	QPSK	8	4	18.82	18.93	18.84		
3	QPSK	8	7	18.86	18.96	18.86		
3	QPSK	15	0	18.93	18.93	18.87		
3	16QAM	1	0	18.66	18.71	18.40	20	0
3	16QAM	1	8	18.55	18.64	18.57		
3	16QAM	1	14	18.71	18.57	18.63		
3	16QAM	8	0	18.84	18.87	18.86	20	0
3	16QAM	8	4	18.85	18.91	18.88		
3	16QAM	8	7	18.89	18.89	18.92		
3	16QAM	8	7	18.89	18.89	18.92		
3	16QAM	15	0	18.86	18.84	18.88		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.84	19.79	19.62	20	0
1.4	QPSK	1	3	19.80	19.86	19.75		
1.4	QPSK	1	5	19.77	19.84	19.83		
1.4	QPSK	3	0	19.84	19.81	19.91		
1.4	QPSK	3	1	19.96	19.98	19.94		
1.4	QPSK	3	3	19.87	20.00	19.93		
1.4	QPSK	6	0	18.83	18.90	18.75	20	0
1.4	16QAM	1	0	18.69	18.75	18.66	20	0
1.4	16QAM	1	3	18.86	18.84	18.77		
1.4	16QAM	1	5	18.66	18.77	18.60		
1.4	16QAM	3	0	18.84	18.95	18.88		
1.4	16QAM	3	1	18.81	18.93	18.91		
1.4	16QAM	3	3	18.94	18.94	18.81		
1.4	16QAM	6	0	19.00	18.97	18.84	20	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.51	21.56	21.58	22.5	0
20	QPSK	1	49	21.93	21.97	21.91		
20	QPSK	1	99	21.58	21.54	21.49		
20	QPSK	50	0	21.69	21.82	21.74	22.5	0
20	QPSK	50	24	21.76	21.68	21.77		
20	QPSK	50	50	21.72	21.61	21.76		
20	QPSK	100	0	21.72	21.80	21.79		
20	16QAM	1	0	21.46	21.59	21.63	22.5	0
20	16QAM	1	49	21.52	21.50	21.69		
20	16QAM	1	99	21.45	21.38	21.53		
20	16QAM	50	0	21.81	21.75	21.96	22.5	0
20	16QAM	50	24	21.78	21.66	21.90		
20	16QAM	50	50	21.79	21.77	21.71		
20	16QAM	100	0	21.74	21.76	21.72		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.62	21.44	21.74	22.5	0
15	QPSK	1	37	21.92	21.79	21.87		
15	QPSK	1	74	21.77	21.49	21.67		
15	QPSK	36	0	21.80	21.67	21.84	22.5	0
15	QPSK	36	20	21.78	21.69	21.85		
15	QPSK	36	39	21.74	21.71	21.82		
15	QPSK	75	0	21.74	21.69	21.82		
15	16QAM	1	0	21.42	21.54	21.62	22.5	0
15	16QAM	1	37	21.44	21.70	21.57		
15	16QAM	1	74	21.51	21.31	21.44		
15	16QAM	36	0	21.63	21.72	21.73	22.5	0
15	16QAM	36	20	21.62	21.71	21.72		
15	16QAM	36	39	21.68	21.68	21.64		
15	16QAM	75	0	21.77	21.65	21.77		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.42	21.39	21.50	22.5	0
10	QPSK	1	25	21.85	21.70	21.77		
10	QPSK	1	49	21.82	21.46	21.49		
10	QPSK	25	0	21.60	21.62	21.72	22.5	0
10	QPSK	25	12	21.66	21.62	21.72		
10	QPSK	25	25	21.63	21.60	21.74		
10	QPSK	50	0	21.62	21.62	21.77		
10	16QAM	1	0	21.42	21.40	21.64	22.5	0
10	16QAM	1	25	21.67	21.43	21.69		
10	16QAM	1	49	21.42	21.25	21.53		
10	16QAM	25	0	21.72	21.67	21.83	22.5	0
10	16QAM	25	12	21.70	21.64	21.81		
10	16QAM	25	25	21.68	21.58	21.73		
10	16QAM	50	0	21.70	21.70	21.73		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.36	21.41	21.38	22.5	0
5	QPSK	1	12	21.66	21.66	21.78		
5	QPSK	1	24	21.34	21.32	21.47		
5	QPSK	12	0	21.55	21.63	21.74	22.5	0
5	QPSK	12	7	21.59	21.69	21.77		
5	QPSK	12	13	21.51	21.68	21.73		
5	QPSK	25	0	21.58	21.63	21.74	22.5	0
5	16QAM	1	0	21.29	21.36	21.48		
5	16QAM	1	12	21.30	21.35	21.49		
5	16QAM	1	24	21.29	21.33	21.47	22.5	0
5	16QAM	12	0	21.49	21.55	21.72		
5	16QAM	12	7	21.57	21.67	21.77		
5	16QAM	12	13	21.53	21.37	21.68	22.5	0
5	16QAM	25	0	21.61	21.61	21.60		
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	21.47	21.51	21.43	22.5	0
3	QPSK	1	8	21.47	21.52	21.41		
3	QPSK	1	14	21.40	21.31	21.42		
3	QPSK	8	0	21.55	21.71	21.65	22.5	0
3	QPSK	8	4	21.53	21.59	21.63		
3	QPSK	8	7	21.51	21.69	21.57		
3	QPSK	15	0	21.50	21.64	21.56	22.5	0
3	16QAM	1	0	21.17	21.51	21.51		
3	16QAM	1	8	21.25	21.33	21.21		
3	16QAM	1	14	21.32	21.49	21.43	22.5	0
3	16QAM	8	0	21.58	21.72	21.65		
3	16QAM	8	4	21.64	21.65	21.63		
3	16QAM	8	7	21.55	21.41	21.37	22.5	0
3	16QAM	15	0	21.60	21.73	21.61		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.46	21.55	21.48	22.5	0
1.4	QPSK	1	3	21.66	21.53	21.55		
1.4	QPSK	1	5	21.55	21.68	21.53		
1.4	QPSK	3	0	21.73	21.60	21.61	22.5	0
1.4	QPSK	3	1	21.70	21.72	21.74		
1.4	QPSK	3	3	21.51	21.71	21.57		
1.4	QPSK	6	0	21.50	21.61	21.62	22.5	0
1.4	16QAM	1	0	21.40	21.40	21.48	22.5	0
1.4	16QAM	1	3	21.50	21.51	21.57		
1.4	16QAM	1	5	21.31	21.43	21.45		
1.4	16QAM	3	0	21.39	21.37	21.46	22.5	0
1.4	16QAM	3	1	21.82	21.61	21.52		
1.4	16QAM	3	3	21.78	21.57	21.55		
1.4	16QAM	6	0	21.55	21.59	21.53	22.5	0



**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.<sup>18</sup> The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b	CH 1	2412	1Mbps	18.76	18.80	98.62
		CH 2	2417		18.75	18.80	
		CH 6	2437		18.60	18.80	
		CH 10	2457		18.71	18.80	
		CH 11	2462		18.71	18.80	
	802.11g	CH 1	2412	6Mbps	15.14	15.50	92.86
		CH 2	2417		17.70	17.80	
		CH 6	2437		17.77	17.80	
		CH 10	2457		17.74	17.80	
		CH 11	2462		16.68	17.00	
	802.11n-HT20	CH 1	2412	MCS0	15.14	15.50	92.41
		CH 2	2417		17.65	17.80	
		CH 6	2437		17.70	17.80	
		CH 10	2457		17.55	17.80	
		CH 11	2462		16.59	17.00	
	802.11ac-VHT20	CH 1	2412	MCS0	15.22	15.50	91.78
		CH 2	2417		17.72	17.80	
		CH 6	2437		17.77	17.80	
		CH 10	2457		17.59	17.80	
		CH 11	2462		16.68	17.00	
	802.11n-HT40	CH 3	2422	MCS0	14.29	14.50	97.50
		CH 4	2427		15.34	15.50	
		CH 6	2437		15.93	16.50	
		CH 8	2447		13.86	14.00	
		CH 9	2452		14.21	14.50	
802.11ac-VHT40	CH 3	2422	MCS0	14.32	14.50	97.53	
	CH 4	2427		15.37	15.50		
	CH 6	2437		15.96	16.50		
	CH 8	2447		13.87	14.00		
	CH 9	2452		14.24	14.50		



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a	CH 36	5180	6Mbps	16.59	16.70	93.46
		CH 40	5200		16.49	16.70	
		CH 44	5220		16.41	16.70	
		CH 48	5240		16.58	16.70	
	802.11n-HT20	CH 36	5180	MCS0	16.65	16.70	92.41
		CH 40	5200		16.46	16.70	
		CH 44	5220		16.41	16.70	
		CH 48	5240		16.45	16.70	
	802.11n-HT40	CH 38	5190	MCS0	14.06	14.50	96.91
		CH 46	5230		15.86	16.20	
	802.11ac-VHT20	CH 36	5180	MCS0	16.66	16.70	92.47
		CH 40	5200		16.50	16.70	
		CH 44	5220		16.43	16.70	
		CH 48	5240		16.47	16.70	
	802.11ac-VHT40	CH 38	5190	MCS0	14.15	14.50	96.94
		CH 46	5230		15.89	16.20	
802.11ac-VHT80	CH 42	5210	MCS0	14.42	14.50	95.83	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a	CH 52	5260	6Mbps	16.50	16.70	93.46
		CH 56	5280		16.40	16.70	
		CH 60	5300		16.34	16.70	
		CH 64	5320		16.33	16.70	
	802.11n-HT20	CH 52	5260	MCS0	16.44	16.70	92.41
		CH 56	5280		16.38	16.70	
		CH 60	5300		16.34	16.70	
		CH 64	5320		16.30	16.70	
	802.11n-HT40	CH 54	5270	MCS0	15.88	16.20	96.91
		CH 62	5310		13.86	14.50	
	802.11ac-VHT20	CH 52	5260	MCS0	16.46	16.70	92.47
		CH 56	5280		16.41	16.70	
		CH 60	5300		16.37	16.70	
		CH 64	5320		16.37	16.70	
	802.11ac-VHT40	CH 54	5270	MCS0	15.89	16.20	96.94
		CH 62	5310		13.90	14.50	
802.11ac-VHT80	CH 58	5290	MCS0	14.14	14.50	95.83	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a	CH 100	5500	6Mbps	16.64	16.70	93.46
		CH 116	5580		16.57	16.70	
		CH 124	5620		16.54	16.70	
		CH 132	5660		16.56	16.70	
		CH 144	5720		16.50	16.70	
	802.11n-HT20	CH 100	5500	MCS0	16.62	16.70	92.41
		CH 116	5580		16.44	16.70	
		CH 124	5620		16.40	16.70	
		CH 132	5660		15.34	16.70	
		CH 144	5720		16.59	16.70	
	802.11n-HT40	CH 102	5510	MCS0	13.75	14.00	96.91
		CH 110	5550		15.96	16.20	
		CH 126	5630		15.90	16.20	
		CH 134	5670		15.87	16.20	
		CH 142	5710		16.15	16.20	
	802.11ac-VHT20	CH 100	5500	MCS0	16.64	16.70	92.47
		CH 116	5580		16.47	16.70	
		CH 124	5620		16.42	16.70	
		CH 132	5660		15.36	16.70	
		CH 144	5720		16.60	16.70	
	802.11ac-VHT40	CH 102	5510	MCS0	13.77	14.00	96.94
		CH 110	5550		15.98	16.20	
		CH 126	5630		15.92	16.20	
		CH 134	5670		15.88	16.20	
CH 142		5710	16.18		16.20		
802.11ac-VHT80	CH 106	5530	MCS0	13.12	13.50	95.83	
	CH 122	5610		14.85	15.20		
	CH 138	5690		14.89	15.20		



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a	CH 149	5745	MCS0	16.45	16.70	93.46
		CH 157	5785		16.59	16.70	
		CH 165	5825		16.58	16.70	
	802.11n-HT20	CH 149	5745	MCS0	16.54	16.70	92.41
		CH 157	5785		16.52	16.70	
		CH 165	5825		16.45	16.70	
	802.11n-HT40	CH 151	5755	MCS0	16.04	16.20	96.91
		CH 159	5795		16.01	16.20	
	802.11ac-VHT20	CH 149	5745	MCS0	16.59	16.70	92.47
		CH 157	5785		16.54	16.70	
		CH 165	5825		16.49	16.70	
	802.11ac-VHT40	CH 151	5755	MCS0	16.09	16.20	96.94
		CH 159	5795		16.03	16.20	
	802.11ac-VHT80	CH 155	5775	MCS0	14.93	15.20	95.83



### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	4	5

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  


$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
5	20	2.48	0.26

**Note:**

- When device placed into the Soft Holster, the separate distance between the device and phantom is 21mm; therefore, the distance is used 20mm to determine SAR test exclusion.
- Per KDB 447498 D01v06, when the minimum test separation distance is 20mm, the test exclusion threshold is 0.26 which is ≤ 3, SAR testing is not required.

### 14. Antenna Location

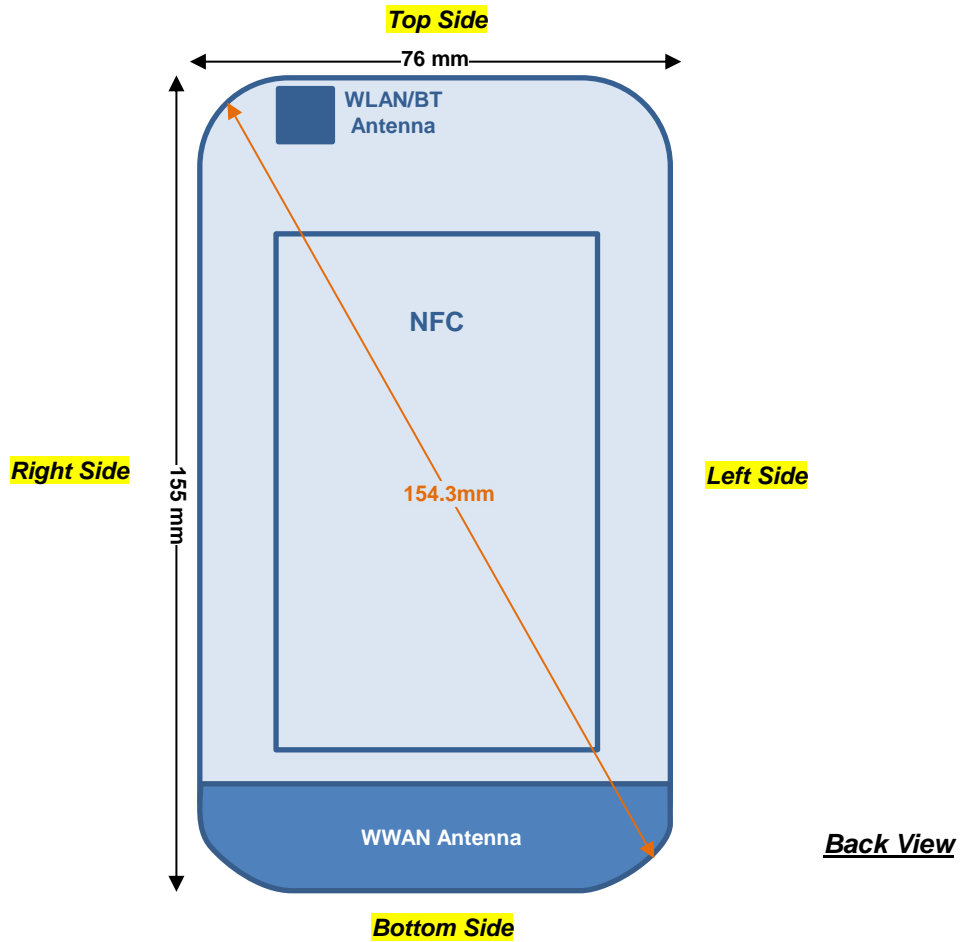

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## **15. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 band, UMTS band 2 and 4, CDMA2000 BC1, and LTE band 2 and 4.
5. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
6. According to TCB workshop October 2016, when the highest reported SAR of an antenna is  $> 1.2$  W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands, however for the SAR measurement was used a low-loss foam block performed testing, the relative permittivity and loss tangent of the foam material is 1.0 and  $10^{-5}$ , respectively, therefore holder perturbation verification is not required even highest reported SAR is  $> 1.2$ W/kg.
7. When EUT is placed into the Soft Holster, only front face of EUT will toward to the human body.

### **GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

### **UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq 1/4$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.





**CDMA Note:**

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 Head and Body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

**15.1 Head SAR**
**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4Tx slots)	Right Cheek	0mm	251	848.8	27.17	28.50	1.358	0.04	0.446	0.606
	GSM850	GPRS (4Tx slots)	Right Tilted	0mm	251	848.8	27.17	28.50	1.358	0.13	0.270	0.367
	GSM850	GPRS (4Tx slots)	Left Cheek	0mm	251	848.8	27.17	28.50	1.358	0.02	0.459	0.623
01	GSM850	GPRS (4Tx slots)	Left Cheek	0mm	128	824.2	27.13	28.50	1.371	-0.1	0.552	0.757
	GSM850	GPRS (4Tx slots)	Left Cheek	0mm	189	836.4	27.15	28.50	1.365	0.13	0.506	0.690
	GSM850	GPRS (4Tx slots)	Left Tilted	0mm	251	848.8	27.17	28.50	1.358	-0.03	0.232	0.315
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.48	26.00	1.419	0.11	0.135	0.192
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.48	26.00	1.419	0.14	0.082	0.116
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.48	26.00	1.419	-0.11	0.176	0.250
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	512	1850.2	24.14	26.00	1.535	-0.11	0.125	0.192
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	24.40	26.00	1.445	-0.09	0.228	0.330
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.48	26.00	1.419	0.13	0.118	0.167

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	24.37	24.50	1.030	0.17	0.383	0.395
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9538	1907.6	24.37	24.50	1.030	-0.12	0.316	0.326
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	24.37	24.50	1.030	0.17	0.484	0.499
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	24.22	24.50	1.067	0.03	0.362	0.386
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	24.07	24.50	1.104	-0.13	0.436	0.481
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9538	1907.6	24.37	24.50	1.030	0.03	0.369	0.380
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	24.00	24.50	1.122	0.15	0.397	0.445
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	23.99	24.50	1.125	0	0.311	0.350
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	23.96	24.50	1.132	0.13	0.299	0.339
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	24.00	24.50	1.122	-0.19	0.166	0.186
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	24.00	24.50	1.122	0.1	0.239	0.268
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	24.00	24.50	1.122	0.18	0.170	0.191
05	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.97	25.00	1.268	-0.11	0.476	0.603
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.93	25.00	1.279	-0.18	0.456	0.583
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	23.80	25.00	1.318	0.19	0.427	0.563
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	23.97	25.00	1.268	-0.02	0.261	0.331
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.97	25.00	1.268	0.08	0.467	0.592
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	23.97	25.00	1.268	0.01	0.282	0.357



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	1013	824.7	24.88	25.00	1.028	0.06	0.579	0.595
06	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	384	836.52	24.74	25.00	1.062	0.01	0.608	0.646
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	777	848.31	24.66	25.00	1.081	-0.07	0.585	0.633
	CDMA BC0	1xRTT RC3 SO55	Right Tilted	0mm	1013	824.7	24.88	25.00	1.028	-0.05	0.376	0.387
	CDMA BC0	1xRTT RC3 SO55	Left Cheek	0mm	1013	824.7	24.88	25.00	1.028	-0.06	0.572	0.588
	CDMA BC0	1xRTT RC3 SO55	Left Tilted	0mm	1013	824.7	24.88	25.00	1.028	0.1	0.342	0.352
	CDMA BC1	1xRTT RC3 SO55	Right Cheek	0mm	1175	1908.75	24.94	25.00	1.014	0.14	0.356	0.361
	CDMA BC1	1xRTT RC3 SO55	Right Tilted	0mm	1175	1908.75	24.94	25.00	1.014	-0.11	0.181	0.184
07	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	1175	1908.75	24.94	25.00	1.014	-0.16	0.500	0.507
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	25	1851.25	24.85	25.00	1.035	0.19	0.298	0.308
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	600	1880	24.61	25.00	1.094	0.13	0.379	0.415
	CDMA BC1	1xRTT RC3 SO55	Left Tilted	0mm	1175	1908.75	24.94	25.00	1.014	0.01	0.370	0.375



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	49	Right Cheek	0mm	19100	1900	23.78	24.50	1.180	-0.1	0.334	0.394
	LTE Band 2	20M	QPSK	50	50	Right Cheek	0mm	18700	1860	22.79	23.50	1.178	0.12	0.243	0.286
	LTE Band 2	20M	QPSK	1	49	Right Tilted	0mm	19100	1900	23.78	24.50	1.180	0.09	0.316	0.373
	LTE Band 2	20M	QPSK	50	50	Right Tilted	0mm	18700	1860	22.79	23.50	1.178	0.17	0.192	0.226
08	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	19100	1900	23.78	24.50	1.180	0	0.437	0.516
	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	18700	1860	23.70	24.50	1.202	0.09	0.357	0.429
	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	18900	1880	23.77	24.50	1.183	0.08	0.405	0.479
	LTE Band 2	20M	QPSK	50	50	Left Cheek	0mm	18700	1860	22.79	23.50	1.178	0.01	0.278	0.327
	LTE Band 2	20M	QPSK	1	49	Left Tilted	0mm	19100	1900	23.78	24.50	1.180	0.1	0.342	0.404
	LTE Band 2	20M	QPSK	50	50	Left Tilted	0mm	18700	1860	22.79	23.50	1.178	0.17	0.229	0.270
09	LTE Band 4	20M	QPSK	1	49	Right Cheek	0mm	20175	1732.5	24.32	24.50	1.042	-0.03	0.331	0.345
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	23.09	23.50	1.099	-0.1	0.272	0.299
	LTE Band 4	20M	QPSK	1	49	Right Tilted	0mm	20175	1732.5	24.32	24.50	1.042	-0.09	0.138	0.144
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	23.09	23.50	1.099	-0.06	0.095	0.104
	LTE Band 4	20M	QPSK	1	49	Left Cheek	0mm	20175	1732.5	24.32	24.50	1.042	-0.09	0.142	0.148
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	23.09	23.50	1.099	0.19	0.102	0.112
	LTE Band 4	20M	QPSK	1	49	Left Tilted	0mm	20175	1732.5	24.32	24.50	1.042	0	0.154	0.161
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	23.09	23.50	1.099	0.02	0.105	0.115
10	LTE Band 5	10M	QPSK	1	25	Right Cheek	0mm	20525	836.5	23.86	25.00	1.300	-0.05	0.537	0.698
	LTE Band 5	10M	QPSK	25	12	Right Cheek	0mm	20525	836.5	22.74	24.00	1.337	0.12	0.431	0.576
	LTE Band 5	10M	QPSK	1	25	Right Tilted	0mm	20525	836.5	23.86	25.00	1.300	-0.02	0.308	0.400
	LTE Band 5	10M	QPSK	25	12	Right Tilted	0mm	20525	836.5	22.74	24.00	1.337	0.02	0.244	0.326
	LTE Band 5	10M	QPSK	1	25	Left Cheek	0mm	20525	836.5	23.86	25.00	1.300	-0.12	0.485	0.631
	LTE Band 5	10M	QPSK	25	12	Left Cheek	0mm	20525	836.5	22.74	24.00	1.337	-0.09	0.386	0.516
	LTE Band 5	10M	QPSK	1	25	Left Tilted	0mm	20525	836.5	23.86	25.00	1.300	-0.04	0.300	0.390
	LTE Band 5	10M	QPSK	25	12	Left Tilted	0mm	20525	836.5	22.74	24.00	1.337	0.01	0.239	0.319
	LTE Band 12	10M	QPSK	1	25	Right Cheek	0mm	23095	707.5	23.83	25.00	1.309	-0.04	0.371	0.486
	LTE Band 12	10M	QPSK	25	25	Right Cheek	0mm	23095	707.5	22.83	24.00	1.309	-0.04	0.302	0.395
	LTE Band 12	10M	QPSK	1	25	Right Tilted	0mm	23095	707.5	23.83	25.00	1.309	-0.16	0.222	0.291
	LTE Band 12	10M	QPSK	25	25	Right Tilted	0mm	23095	707.5	22.83	24.00	1.309	0.04	0.179	0.234
11	LTE Band 12	10M	QPSK	1	25	Left Cheek	0mm	23095	707.5	23.83	25.00	1.309	-0.05	0.411	0.538
	LTE Band 12	10M	QPSK	25	25	Left Cheek	0mm	23095	707.5	22.83	24.00	1.309	0.05	0.343	0.449
	LTE Band 12	10M	QPSK	1	25	Left Tilted	0mm	23095	707.5	23.83	25.00	1.309	-0.05	0.259	0.339
	LTE Band 12	10M	QPSK	25	25	Left Tilted	0mm	23095	707.5	22.83	24.00	1.309	0.11	0.208	0.272
12	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.39	25.00	1.449	-0.15	0.459	0.665
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.51	24.00	1.409	-0.08	0.347	0.489
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.39	25.00	1.449	-0.04	0.319	0.462
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.51	24.00	1.409	0.04	0.245	0.345
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.39	25.00	1.449	0	0.429	0.622
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.51	24.00	1.409	-0.01	0.335	0.472
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.39	25.00	1.449	0.04	0.276	0.400
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.51	24.00	1.409	0.04	0.216	0.304



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.19	0.536	0.548
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.16	0.380	0.389
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	18.76	18.80	1.009	98.62	1.014	0.16	1.160	1.187
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	18.60	18.80	1.047	98.62	1.014	0.17	1.210	1.285
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	18.71	18.80	1.021	98.62	1.014	0.11	1.250	1.294
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	18.76	18.80	1.009	98.62	1.014	0.18	0.797	0.816
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	6	2437	18.60	18.80	1.047	98.62	1.014	0.1	0.755	0.802
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	11	2462	18.71	18.80	1.021	98.62	1.014	0.15	0.773	0.800
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	52	5260	16.50	16.70	1.047	93.46	1.070	-0.17	0.765	0.857
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	56	5280	16.40	16.70	1.072	93.46	1.070	0.04	0.760	0.871
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	52	5260	16.50	16.70	1.047	93.46	1.070	-0.14	0.690	0.773
14	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	52	5260	16.50	16.70	1.047	93.46	1.070	-0.13	0.988	1.107
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	56	5280	16.40	16.70	1.072	93.46	1.070	-0.12	0.957	1.097
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	52	5260	16.50	16.70	1.047	93.46	1.070	0.14	0.861	0.965
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	56	5280	16.40	16.70	1.072	93.46	1.070	-0.08	0.910	1.043
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	100	5500	16.64	16.70	1.014	93.46	1.070	-0.04	0.819	0.889
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	116	5580	16.57	16.70	1.030	93.46	1.070	-0.06	0.870	0.959
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	100	5500	16.64	16.70	1.014	93.46	1.070	-0.01	0.800	0.868
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	116	5580	16.57	16.70	1.030	93.46	1.070	-0.06	0.756	0.833
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	100	5500	16.64	16.70	1.014	93.46	1.070	-0.04	1.090	1.183
15	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	116	5580	16.57	16.70	1.030	93.46	1.070	0.1	1.146	1.263
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	132	5660	16.56	16.70	1.033	93.46	1.070	0.06	0.988	1.092
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	100	5500	16.64	16.70	1.014	93.46	1.070	0.12	0.760	0.825
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	116	5580	16.57	16.70	1.030	93.46	1.070	0.18	0.766	0.845
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	157	5785	16.59	16.70	1.026	93.46	1.070	0.07	0.967	1.061
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	165	5825	16.58	16.70	1.028	93.46	1.070	0.04	0.941	1.035
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	157	5785	16.59	16.70	1.026	93.46	1.070	0.11	0.895	0.982
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	165	5825	16.58	16.70	1.028	93.46	1.070	-0.14	0.752	0.827
16	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	157	5785	16.59	16.70	1.026	93.46	1.070	0.08	1.150	1.262
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	165	5825	16.58	16.70	1.028	93.46	1.070	0.14	1.100	1.210
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	16.45	16.70	1.059	93.46	1.070	0.09	0.986	1.118
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	157	5785	16.59	16.70	1.026	93.46	1.070	0.03	0.596	0.654



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4Tx slots)	Front	10mm	OFF	251	848.8	27.17	28.50	1.358	0.07	0.398	0.541
17	GSM850	GPRS (4Tx slots)	Front	10mm	OFF	128	824.2	27.13	28.50	1.371	0.03	0.488	0.669
	GSM850	GPRS (4Tx slots)	Front	10mm	OFF	189	836.4	27.15	28.50	1.365	0.03	0.381	0.520
	GSM850	GPRS (4Tx slots)	Back	10mm	OFF	251	848.8	27.17	28.50	1.358	0.14	0.378	0.513
	GSM850	GPRS (4Tx slots)	Left Side	10mm	OFF	251	848.8	27.17	28.50	1.358	0.08	0.224	0.304
	GSM850	GPRS (4Tx slots)	Right Side	10mm	OFF	251	848.8	27.17	28.50	1.358	0.15	0.386	0.524
	GSM850	GPRS (4Tx slots)	Bottom Side	10mm	OFF	251	848.8	27.17	28.50	1.358	0.16	0.097	0.132
	GSM1900	GPRS (4 Tx slots)	Front	10mm	ON	661	1880	23.42	24.50	1.282	0.14	0.468	0.600
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	661	1880	23.42	24.50	1.282	-0.01	0.837	1.073
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	512	1850.2	23.10	24.50	1.380	-0.05	0.753	1.039
18	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	810	1909.8	23.36	24.50	1.300	-0.15	0.996	1.295
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	ON	661	1880	23.42	24.50	1.282	0.02	0.201	0.258
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	ON	661	1880	23.42	24.50	1.282	0.06	0.043	0.055
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	661	1880	23.42	24.50	1.282	-0.1	0.665	0.853

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9538	1907.6	18.64	19.50	1.219	-0.12	0.340	0.414
19	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9538	1907.6	18.64	19.50	1.219	-0.18	0.835	1.018
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9262	1852.4	18.50	19.50	1.259	-0.15	0.690	0.869
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9400	1880	18.53	19.50	1.250	-0.13	0.734	0.918
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	ON	9538	1907.6	18.64	19.50	1.219	-0.1	0.163	0.199
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9538	1907.6	18.64	19.50	1.219	-0.09	0.044	0.054
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6	18.64	19.50	1.219	-0.19	0.416	0.507
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1513	1752.6	20.74	21.50	1.191	-0.11	0.510	0.608
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1513	1752.6	20.74	21.50	1.191	-0.08	0.950	1.132
20	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1312	1712.4	20.62	21.50	1.225	-0.12	1.030	1.261
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	20.59	21.50	1.233	-0.12	1.010	1.245
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	ON	1513	1752.6	20.74	21.50	1.191	0.05	0.077	0.092
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1513	1752.6	20.74	21.50	1.191	-0.06	0.108	0.129
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	20.74	21.50	1.191	0.16	0.739	0.880
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	20.62	21.50	1.225	0	0.614	0.752
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	20.59	21.50	1.233	0.02	0.684	0.843
21	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4132	826.4	23.97	25.00	1.268	0.08	0.439	0.556
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4182	836.4	23.93	25.00	1.279	-0.01	0.394	0.504
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	23.80	25.00	1.318	0.02	0.393	0.518
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4132	826.4	23.97	25.00	1.268	-0.06	0.325	0.412
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	OFF	4132	826.4	23.97	25.00	1.268	0.11	0.217	0.275
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4132	826.4	23.97	25.00	1.268	-0.06	0.373	0.473
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	OFF	4132	826.4	23.97	25.00	1.268	0.12	0.074	0.094



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	RTAP 153.6Kbps	Front	10mm	OFF	777	848.31	24.75	25.00	1.059	0.05	0.476	0.504
22	CDMA BC0	RTAP 153.6Kbps	Front	10mm	OFF	1013	824.7	24.74	25.00	1.062	-0.05	0.538	0.571
	CDMA BC0	RTAP 153.6Kbps	Front	10mm	OFF	384	836.52	24.68	25.00	1.076	-0.01	0.467	0.503
	CDMA BC0	RTAP 153.6Kbps	Back	10mm	OFF	777	848.31	24.75	25.00	1.059	0.01	0.424	0.449
	CDMA BC0	RTAP 153.6Kbps	Left Side	10mm	OFF	777	848.31	24.75	25.00	1.059	-0.03	0.239	0.253
	CDMA BC0	RTAP 153.6Kbps	Right Side	10mm	OFF	777	848.31	24.75	25.00	1.059	-0.05	0.438	0.464
	CDMA BC0	RTAP 153.6Kbps	Bottom Side	10mm	OFF	777	848.31	24.75	25.00	1.059	0.1	0.098	0.104
	CDMA BC1	RTAP 153.6Kbps	Front	10mm	ON	25	1851.25	19.81	20.50	1.172	0.01	0.361	0.423
	CDMA BC1	RTAP 153.6Kbps	Back	10mm	ON	25	1851.25	19.81	20.50	1.172	-0.15	0.824	0.966
	CDMA BC1	RTAP 153.6Kbps	Back	10mm	ON	600	1880	19.59	20.50	1.233	-0.08	0.898	1.107
23	CDMA BC1	RTAP 153.6Kbps	Back	10mm	ON	1175	1908.75	19.79	20.50	1.178	-0.18	1.120	1.319
	CDMA BC1	RTAP 153.6Kbps	Left Side	10mm	ON	25	1851.25	19.81	20.50	1.172	-0.14	0.139	0.163
	CDMA BC1	RTAP 153.6Kbps	Right Side	10mm	ON	25	1851.25	19.81	20.50	1.172	-0.04	0.041	0.048
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	10mm	ON	25	1851.25	19.81	20.50	1.172	-0.12	0.547	0.641

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	49	Front	10mm	ON	18900	1880	20.00	20.00	1.000	0.01	0.618	0.618
	LTE Band 2	20M	QPSK	50	50	Front	10mm	ON	18700	1860	18.96	20.00	1.271	0.13	0.489	0.621
	LTE Band 2	20M	QPSK	1	49	Back	10mm	ON	18900	1880	20.00	20.00	1.000	-0.13	1.230	1.230
	LTE Band 2	20M	QPSK	1	49	Back	10mm	ON	18700	1860	19.94	20.00	1.014	-0.12	1.220	1.237
24	LTE Band 2	20M	QPSK	1	49	Back	10mm	ON	19100	1900	19.99	20.00	1.002	-0.18	1.310	1.313
	LTE Band 2	20M	QPSK	50	50	Back	10mm	ON	18700	1860	18.96	20.00	1.271	-0.09	0.972	1.235
	LTE Band 2	20M	QPSK	50	24	Back	10mm	ON	18900	1880	18.94	20.00	1.276	-0.12	0.973	1.242
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	19100	1900	18.90	20.00	1.288	-0.19	1.010	1.301
	LTE Band 2	20M	QPSK	100	0	Back	10mm	ON	18700	1860	19.00	20.00	1.259	-0.12	0.943	1.187
	LTE Band 2	20M	QPSK	1	49	Left Side	10mm	ON	18900	1880	20.00	20.00	1.000	-0.15	0.226	0.226
	LTE Band 2	20M	QPSK	50	50	Left Side	10mm	ON	18700	1860	18.96	20.00	1.271	-0.1	0.162	0.206
	LTE Band 2	20M	QPSK	1	49	Right Side	10mm	ON	18900	1880	20.00	20.00	1.000	0.01	0.066	0.066
	LTE Band 2	20M	QPSK	50	50	Right Side	10mm	ON	18700	1860	18.96	20.00	1.271	-0.13	0.048	0.061
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10mm	ON	18900	1880	20.00	20.00	1.000	-0.17	0.735	0.735
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10mm	ON	18700	1860	19.94	20.00	1.014	-0.11	0.745	0.755
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10mm	ON	19100	1900	19.99	20.00	1.002	-0.13	0.803	0.805
	LTE Band 2	20M	QPSK	50	50	Bottom Side	10mm	ON	18700	1860	18.96	20.00	1.271	-0.17	0.593	0.753
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	ON	18700	1860	19.00	20.00	1.259	-0.18	0.609	0.767



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	49	Front	10mm	ON	20175	1732.5	21.97	22.50	1.130	0	0.655	0.740
	LTE Band 4	20M	QPSK	50	0	Front	10mm	ON	20175	1732.5	21.82	22.50	1.169	0.07	0.603	0.705
	LTE Band 4	20M	QPSK	1	49	Back	10mm	ON	20175	1732.5	21.97	22.50	1.130	0.04	1.250	1.412
	LTE Band 4	20M	QPSK	50	0	Back	10mm	ON	20175	1732.5	21.82	22.50	1.169	-0.13	1.210	1.415
25	LTE Band 4	20M	QPSK	100	0	Back	10mm	ON	20175	1732.5	21.80	22.50	1.175	-0.1	1.210	1.422
	LTE Band 4	20M	QPSK	1	49	Left Side	10mm	ON	20175	1732.5	21.97	22.50	1.130	-0.18	0.089	0.101
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	ON	20175	1732.5	21.82	22.50	1.169	-0.1	0.083	0.097
	LTE Band 4	20M	QPSK	1	49	Right Side	10mm	ON	20175	1732.5	21.97	22.50	1.130	-0.13	0.145	0.164
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	ON	20175	1732.5	21.82	22.50	1.169	-0.02	0.149	0.174
	LTE Band 4	20M	QPSK	1	49	Bottom Side	10mm	ON	20175	1732.5	21.97	22.50	1.130	-0.18	0.865	0.977
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	ON	20175	1732.5	21.82	22.50	1.169	-0.1	0.857	1.002
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	ON	20175	1732.5	21.80	22.50	1.175	-0.03	0.868	1.020
26	LTE Band 5	10M	QPSK	1	25	Front	10mm	OFF	20525	836.5	23.86	25.00	1.300	-0.1	0.565	0.735
	LTE Band 5	10M	QPSK	25	12	Front	10mm	OFF	20525	836.5	22.74	24.00	1.337	0.05	0.452	0.604
	LTE Band 5	10M	QPSK	1	25	Back	10mm	OFF	20525	836.5	23.86	25.00	1.300	-0.15	0.487	0.633
	LTE Band 5	10M	QPSK	25	12	Back	10mm	OFF	20525	836.5	22.74	24.00	1.337	0.12	0.406	0.543
	LTE Band 5	10M	QPSK	1	25	Left Side	10mm	OFF	20525	836.5	23.86	25.00	1.300	0.04	0.352	0.458
	LTE Band 5	10M	QPSK	25	12	Left Side	10mm	OFF	20525	836.5	22.74	24.00	1.337	-0.01	0.299	0.400
	LTE Band 5	10M	QPSK	1	25	Right Side	10mm	OFF	20525	836.5	23.86	25.00	1.300	0.13	0.528	0.686
	LTE Band 5	10M	QPSK	25	12	Right Side	10mm	OFF	20525	836.5	22.74	24.00	1.337	0.03	0.428	0.572
	LTE Band 5	10M	QPSK	1	25	Bottom Side	10mm	OFF	20525	836.5	23.86	25.00	1.300	0.04	0.075	0.098
	LTE Band 5	10M	QPSK	25	12	Bottom Side	10mm	OFF	20525	836.5	22.74	24.00	1.337	0.1	0.061	0.082
27	LTE Band 12	10M	QPSK	1	25	Front	10mm	OFF	23095	707.5	23.83	25.00	1.309	-0.08	0.584	0.765
	LTE Band 12	10M	QPSK	25	25	Front	10mm	OFF	23095	707.5	22.83	24.00	1.309	-0.01	0.467	0.611
	LTE Band 12	10M	QPSK	1	25	Back	10mm	OFF	23095	707.5	23.83	25.00	1.309	-0.19	0.464	0.607
	LTE Band 12	10M	QPSK	25	25	Back	10mm	OFF	23095	707.5	22.83	24.00	1.309	-0.11	0.364	0.477
	LTE Band 12	10M	QPSK	1	25	Left Side	10mm	OFF	23095	707.5	23.83	25.00	1.309	0	0.488	0.639
	LTE Band 12	10M	QPSK	25	25	Left Side	10mm	OFF	23095	707.5	22.83	24.00	1.309	-0.08	0.391	0.512
	LTE Band 12	10M	QPSK	1	25	Right Side	10mm	OFF	23095	707.5	23.83	25.00	1.309	-0.1	0.388	0.508
	LTE Band 12	10M	QPSK	25	25	Right Side	10mm	OFF	23095	707.5	22.83	24.00	1.309	-0.02	0.304	0.398
	LTE Band 12	10M	QPSK	1	25	Bottom Side	10mm	OFF	23095	707.5	23.83	25.00	1.309	-0.16	0.104	0.136
	LTE Band 12	10M	QPSK	25	25	Bottom Side	10mm	OFF	23095	707.5	22.83	24.00	1.309	-0.16	0.085	0.111
28	LTE Band 13	10M	QPSK	1	0	Front	10mm	OFF	23230	782	23.39	25.00	1.449	0.04	0.604	0.875
	LTE Band 13	10M	QPSK	25	0	Front	10mm	OFF	23230	782	22.51	24.00	1.409	-0.04	0.460	0.648
	LTE Band 13	10M	QPSK	1	0	Back	10mm	OFF	23230	782	23.39	25.00	1.449	-0.07	0.447	0.648
	LTE Band 13	10M	QPSK	25	0	Back	10mm	OFF	23230	782	22.51	24.00	1.409	-0.18	0.338	0.476
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	OFF	23230	782	23.39	25.00	1.449	-0.15	0.411	0.595
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	OFF	23230	782	22.51	24.00	1.409	-0.1	0.311	0.438
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	OFF	23230	782	23.39	25.00	1.449	0.03	0.458	0.664
	LTE Band 13	10M	QPSK	25	0	Right Side	10mm	OFF	23230	782	22.51	24.00	1.409	0.11	0.350	0.493
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	OFF	23230	782	23.39	25.00	1.449	-0.12	0.074	0.107
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	OFF	23230	782	22.51	24.00	1.409	-0.09	0.057	0.080





<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.15	0.251	0.257
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.17	0.270	0.276
29	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	18.60	18.80	1.047	98.62	1.014	-0.04	0.295	0.313
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	18.71	18.80	1.021	98.62	1.014	-0.17	0.292	0.302
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	18.76	18.80	1.009	98.62	1.014	0.11	0.008	0.008
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.04	0.170	0.174
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	18.76	18.80	1.009	98.62	1.014	-0.02	0.170	0.174
	WLAN5GHz	802.11a 6Mbps	Front	10mm	36	5180	16.59	16.70	1.026	93.46	1.070	-0.028	0.144	0.158
	WLAN5GHz	802.11a 6Mbps	Back	10mm	36	5180	16.59	16.70	1.026	93.46	1.070	-0.018	0.202	0.222
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	36	5180	16.59	16.70	1.026	93.46	1.070	-0.148	0.026	0.029
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	36	5180	16.59	16.70	1.026	93.46	1.070	-0.007	0.343	0.376
30	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	48	5240	16.58	16.70	1.028	93.46	1.070	0.001	0.372	0.409
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	36	5180	16.59	16.70	1.026	93.46	1.070	0.03	0.209	0.229
	WLAN5GHz	802.11a 6Mbps	Front	10mm	157	5785	16.59	16.70	1.026	93.46	1.070	-0.099	0.178	0.195
31	WLAN5GHz	802.11a 6Mbps	Back	10mm	157	5785	16.59	16.70	1.026	93.46	1.070	-0.019	0.593	0.651
	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	16.45	16.70	1.059	93.46	1.070	-0.034	0.510	0.578
	WLAN5GHz	802.11a 6Mbps	Back	10mm	165	5825	16.58	16.70	1.028	93.46	1.070	-0.007	0.490	0.539
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	157	5785	16.59	16.70	1.026	93.46	1.070	-0.02	0.028	0.031
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	157	5785	16.59	16.70	1.026	93.46	1.070	0.107	0.208	0.228
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	157	5785	16.59	16.70	1.026	93.46	1.070	-0.009	0.304	0.334



**15.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4Tx slots)	Front	0mm	Soft Holster	251	848.8	27.17	28.50	1.358	-0.15	0.183	0.249
32	GSM850	GPRS (4Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	251	848.8	27.17	28.50	1.358	-0.08	0.193	0.262
	GSM850	GPRS (4Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	128	824.2	27.13	28.00	1.222	-0.04	0.199	0.243
	GSM850	GPRS (4Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	189	836.4	27.15	28.00	1.216	0.09	0.196	0.238
	GSM1900	GPRS (4 Tx slots)	Front	0mm	Soft Holster	661	1880	24.48	26.00	1.419	-0.09	0.590	0.837
	GSM1900	GPRS (4 Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	661	1880	24.48	26.00	1.419	-0.08	0.722	1.025
33	GSM1900	GPRS (4 Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	512	1850.2	24.14	26.00	1.535	-0.07	0.699	1.073
	GSM1900	GPRS (4 Tx slots)	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	810	1909.8	24.40	26.00	1.445	-0.16	0.700	1.012

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
34	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster	9538	1907.6	24.37	24.50	1.030	-0.14	1.190	1.226
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster	9262	1852.4	24.22	24.50	1.067	-0.09	1.020	1.088
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster	9400	1880	24.07	24.50	1.104	-0.11	1.100	1.214
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster+2.5mm Earphone	9538	1907.6	24.37	24.50	1.030	-0.01	1.140	1.175
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster+3.5mm Earphone	9538	1907.6	24.37	24.50	1.030	0.14	1.160	1.195
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	9538	1907.6	24.37	24.50	1.030	-0.1	1.080	1.113
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	9262	1852.4	24.22	24.50	1.067	-0.19	0.915	0.976
	WCDMA II	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	9400	1880	24.07	24.50	1.104	-0.16	0.957	1.057
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster	1413	1732.6	24.00	24.50	1.122	-0.14	0.859	0.964
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster	1312	1712.4	23.99	24.50	1.125	-0.08	0.840	0.945
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster	1513	1752.6	23.96	24.50	1.132	-0.08	0.842	0.953
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1413	1732.6	24.00	24.50	1.122	-0.04	1.040	1.167
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1312	1712.4	23.99	24.50	1.125	-0.16	1.010	1.136
35	WCDMA IV	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1513	1752.6	23.96	24.50	1.132	-0.07	1.050	1.189
	WCDMA V	RMC 12.2Kbps	Front	0mm	Soft Holster	4132	826.4	23.97	25.00	1.268	-0.13	0.196	0.248
	WCDMA V	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	4132	826.4	23.97	25.00	1.268	-0.14	0.232	0.294
	WCDMA V	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	4182	836.4	23.93	25.00	1.279	-0.06	0.229	0.293
36	WCDMA V	RMC 12.2Kbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	4233	846.6	23.80	25.00	1.318	-0.08	0.251	0.331



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO32	Front	0mm	Soft Holster	1013	824.7	24.70	25.00	1.072	-0.16	0.241	0.258
	CDMA BC0	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1013	824.7	24.70	25.00	1.072	-0.12	0.276	0.296
	CDMA BC0	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	384	836.52	24.62	25.00	1.091	0.05	0.291	0.318
37	CDMA BC0	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	777	848.31	24.50	25.00	1.122	0.04	0.307	0.344
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster	25	1851.25	24.86	25.00	1.033	-0.11	1.220	1.260
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster	600	1880	24.65	25.00	1.084	-0.13	1.210	1.312
38	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster	1175	1908.75	24.85	25.00	1.035	-0.18	1.360	1.408
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster+2.5mm Earphone	1175	1908.75	24.85	25.00	1.035	-0.18	1.310	1.356
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster+3.5mm Earphone	1175	1908.75	24.85	25.00	1.035	-0.15	1.270	1.315
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	25	1851.25	24.86	25.00	1.033	0.19	1.180	1.219
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	600	1880	24.65	25.00	1.084	0.04	1.270	1.377
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1175	1908.75	24.85	25.00	1.035	-0.17	1.310	1.356
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle+2.5mm Earphone	600	1880	24.65	25.00	1.084	-0.11	1.250	1.355
	CDMA BC1	1xRTT RC3 SO32	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle+3.5mm Earphone	600	1880	24.65	25.00	1.084	0.04	1.280	1.387

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster	19100	1900	23.78	24.50	1.180	-0.15	1.110	1.310
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster	18700	1860	23.70	24.50	1.202	-0.15	1.130	1.359
39	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster	18900	1880	23.77	24.50	1.183	-0.04	1.150	1.360
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster	18700	1860	22.79	23.50	1.178	0.06	0.862	1.015
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster	18900	1880	22.78	23.50	1.180	-0.15	0.922	1.088
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster	19100	1900	22.73	23.50	1.194	0.13	0.848	1.013
	LTE Band 2	20M	QPSK	100	0	Front	0mm	Soft Holster	18700	1860	22.72	23.50	1.197	-0.03	0.813	0.973
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster+2.5mm Earphone	18900	1880	23.77	24.50	1.183	-0.12	1.050	1.242
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster+3.5mm Earphone	18900	1880	23.77	24.50	1.183	0.08	1.060	1.254
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	19100	1900	23.78	24.50	1.180	-0.07	1.020	1.204
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	18700	1860	23.70	24.50	1.202	-0.09	0.887	1.066
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	18900	1880	23.77	24.50	1.183	-0.15	0.933	1.104
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	18700	1860	22.79	23.50	1.178	0.04	0.704	0.829
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	18900	1880	22.78	23.50	1.180	-0.08	0.725	0.856
	LTE Band 2	20M	QPSK	50	50	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	19100	1900	22.73	23.50	1.194	-0.02	0.775	0.925
	LTE Band 2	20M	QPSK	100	0	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	18700	1860	22.72	23.50	1.197	-0.02	0.699	0.837
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle+2.5mm Earphone	19100	1900	23.78	24.50	1.180	-0.17	1.060	1.251
	LTE Band 2	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle+3.5mm Earphone	19100	1900	23.78	24.50	1.180	-0.17	0.995	1.174



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	49	Front	0mm	Soft Holster	20175	1732.5	24.32	24.50	1.042	-0.17	0.983	1.025
	LTE Band 4	20M	QPSK	50	0	Front	0mm	Soft Holster	20175	1732.5	23.09	23.50	1.099	-0.18	0.762	0.837
	LTE Band 4	20M	QPSK	100	0	Front	0mm	Soft Holster	20175	1732.5	22.95	23.50	1.135	-0.16	0.764	0.867
40	LTE Band 4	20M	QPSK	1	49	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	20175	1732.5	24.32	24.50	1.042	-0.17	0.987	1.029
	LTE Band 4	20M	QPSK	50	0	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	20175	1732.5	23.09	23.50	1.099	0.13	0.928	1.020
	LTE Band 4	20M	QPSK	100	0	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	20175	1732.5	22.95	23.50	1.135	-0.19	0.877	0.995
	LTE Band 5	10M	QPSK	1	25	Front	0mm	Soft Holster	20525	836.5	23.86	25.00	1.300	0.08	0.207	0.269
	LTE Band 5	10M	QPSK	25	12	Front	0mm	Soft Holster	20525	836.5	22.74	24.00	1.337	-0.14	0.171	0.229
41	LTE Band 5	10M	QPSK	1	25	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	20525	836.5	23.86	25.00	1.300	-0.11	0.257	0.334
	LTE Band 5	10M	QPSK	25	12	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	20525	836.5	22.74	24.00	1.337	-0.01	0.205	0.274
	LTE Band 12	10M	QPSK	1	25	Front	0mm	Soft Holster	23095	707.5	23.83	25.00	1.309	-0.16	0.505	0.661
	LTE Band 12	10M	QPSK	25	25	Front	0mm	Soft Holster	23095	707.5	22.83	24.00	1.309	0.06	0.418	0.547
42	LTE Band 12	10M	QPSK	1	25	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	23095	707.5	23.83	25.00	1.309	0.04	0.559	0.732
	LTE Band 12	10M	QPSK	25	25	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	23095	707.5	22.83	24.00	1.309	-0.01	0.439	0.575
43	LTE Band 13	10M	QPSK	1	0	Front	0mm	Soft Holster	23230	782	23.39	25.00	1.449	-0.02	0.334	0.484
	LTE Band 13	10M	QPSK	25	0	Front	0mm	Soft Holster	23230	782	22.51	24.00	1.409	-0.12	0.252	0.355
	LTE Band 13	10M	QPSK	1	0	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	23230	782	23.39	25.00	1.449	-0.04	0.313	0.453
	LTE Band 13	10M	QPSK	25	0	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	23230	782	22.51	24.00	1.409	-0.05	0.234	0.330

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Soft Holster	1	2412	18.76	18.80	1.009	98.62	1.014	-0.12	0.076	0.078
44	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Soft Holster	6	2437	18.60	18.80	1.047	98.62	1.014	-0.11	0.077	0.082
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Soft Holster	11	2462	18.71	18.80	1.021	98.62	1.014	-0.12	0.068	0.070
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	1	2412	18.76	18.80	1.009	98.62	1.014	-0.15	0.076	0.078
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	52	5260	16.50	16.70	1.047	93.46	1.070	-0.15	0.084	0.094
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	52	5260	16.50	16.70	1.047	93.46	1.070	-0.152	0.040	0.045
45	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	60	5300	16.34	16.70	1.086	93.46	1.070	-0.135	0.083	0.096
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	100	5500	16.64	16.70	1.014	93.46	1.070	-0.195	0.080	0.087
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	100	5500	16.64	16.70	1.014	93.46	1.070	0.195	0.085	0.092
46	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	116	5580	16.57	16.70	1.030	93.46	1.070	-0.11	0.088	0.097
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	132	5660	16.56	16.70	1.033	93.46	1.070	0.127	0.068	0.075
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	144	5720	16.50	16.70	1.047	93.46	1.070	-0.012	0.069	0.077
47	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	157	5785	16.59	16.70	1.026	93.46	1.070	-0.005	0.082	0.090
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	165	5825	16.58	16.70	1.028	93.46	1.070	-0.017	0.065	0.071
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster	149	5745	16.45	16.70	1.059	93.46	1.070	-0.08	0.054	0.061
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Soft Holster + Exoskeleton + Trigger Handle	157	5785	16.59	16.70	1.026	93.46	1.070	-0.049	0.051	0.056



15.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Accessory	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm			11	2462	18.71	18.80	1.021	98.62	1.014	0.11	1.250		1.294
2nd	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm			11	2462	18.71	18.80	1.021	98.62	1.014	0.18	1.240	1.01	1.284
1st	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			52	5260	16.50	16.70	1.047	93.46	1.070	-0.13	0.988		1.107
2nd	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			52	5260	16.50	16.70	1.047	93.46	1.070	-0.12	0.986	1.00	1.105
1st	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			116	5580	16.57	16.70	1.030	93.46	1.070	0.1	1.146		1.263
2nd	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			116	5580	16.57	16.70	1.030	93.46	1.070	0.11	1.110	1.03	1.224
1st	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			157	5785	16.59	16.70	1.026	93.46	1.070	0.08	1.150		1.262
2nd	WLAN5GHz					802.11a 6Mbps	Left Cheek	0mm			157	5785	16.59	16.70	1.026	93.46	1.070	0.07	1.110	1.04	1.218
1st	LTE Band 4	20M	QPSK	1	49		Back	10mm		ON	20175	1732.5	21.97	22.50	1.130		1.000	0.04	1.250		1.412
2nd	LTE Band 4	20M	QPSK	1	49		Back	10mm		ON	20175	1732.5	21.97	22.50	1.130		1.000	-0.05	1.170	1.07	1.322
1st	CDMA BC1					1xRTT RC3 SO32	Front	0mm	Soft Holster		1175	1908.75	24.85	25.00	1.035		1.000	-0.18	1.360		1.408
2nd	CDMA BC1					1xRTT RC3 SO32	Front	0mm	Soft Holster		1175	1908.75	24.85	25.00	1.035		1.000	-0.09	1.320	1.03	1.366

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**16. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN	Yes	Yes	
2.	GPRS/EDGE + WLAN	Yes	Yes	Yes
3.	WCDMA + WLAN	Yes	Yes	Yes
4.	LTE + WLAN	Yes	Yes	Yes
5.	GSM Voice + Bluetooth		Yes	
6.	GPRS/EDGE + Bluetooth		Yes	
7.	WCDMA+ Bluetooth		Yes	
8.	LTE + Bluetooth		Yes	

**General Note:**

1. This device WLAN 2.4GHz / 5.2GHz (U-NII-1) / 5.8GHz (U-NII-3) supports Hotspot operation.
2. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - v) The SPLSR calculated results please refer to section 16.4.
7. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	20 mm
5.0 dBm	Estimated SAR (W/kg)	0.031 W/kg

**Note:**

1. When device placed into the Soft Holster, the separate distance between the device and phantom is 21mm; therefore, the distance is used 20mm to determine SAR test exclusion.



**16.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)						
GSM	GSM850	Right Cheek	0.606	0.548	1.061	1.15	1.67			0.03	Case 11
		Right Tilted	0.367	0.389	0.982	0.76	1.35				
		Left Cheek	0.757	1.294	1.263	2.05	2.02	0.04	Case 1	0.04	Case 12
		Left Tilted	0.315	0.816	1.043	1.13	1.36				
	GSM1900	Right Cheek	0.192	0.548	1.061	0.74	1.25				
		Right Tilted	0.116	0.389	0.982	0.51	1.10				
		Left Cheek	0.330	1.294	1.263	1.62	1.59	0.03	Case 2		
		Left Tilted	0.167	0.816	1.043	0.98	1.21				
WCDMA	WCDMA II	Right Cheek	0.395	0.548	1.061	0.94	1.46				
		Right Tilted	0.326	0.389	0.982	0.72	1.31				
		Left Cheek	0.499	1.294	1.263	1.79	1.76	0.03	Case 3	0.03	Case 13
		Left Tilted	0.380	0.816	1.043	1.20	1.42				
	WCDMA IV	Right Cheek	0.445	0.548	1.061	0.99	1.51				
		Right Tilted	0.186	0.389	0.982	0.58	1.17				
		Left Cheek	0.268	1.294	1.263	1.56	1.53				
		Left Tilted	0.191	0.816	1.043	1.01	1.23				
	WCDMA V	Right Cheek	0.603	0.548	1.061	1.15	1.66			0.03	Case 14
		Right Tilted	0.331	0.389	0.982	0.72	1.31				
		Left Cheek	0.592	1.294	1.263	1.89	1.86	0.04	Case 4	0.04	Case 15
		Left Tilted	0.357	0.816	1.043	1.17	1.40				
CDMA	CDMA BC0	Right Cheek	0.646	0.548	1.061	1.19	1.71			0.03	Case 16
		Right Tilted	0.387	0.389	0.982	0.78	1.37				
		Left Cheek	0.588	1.294	1.263	1.88	1.85	0.04	Case 5	0.04	Case 17
		Left Tilted	0.352	0.816	1.043	1.17	1.40				
	CDMA BC1	Right Cheek	0.361	0.548	1.061	0.91	1.42				
		Right Tilted	0.184	0.389	0.982	0.57	1.17				
		Left Cheek	0.507	1.294	1.263	1.80	1.77	0.03	Case 6	0.03	Case 18
		Left Tilted	0.375	0.816	1.043	1.19	1.42				



WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)						
LTE	LTE Band 2	Right Cheek	0.394	0.548	1.061	<b>0.94</b>	<b>1.46</b>				
		Right Tilted	0.373	0.389	0.982	<b>0.76</b>	<b>1.36</b>				
		Left Cheek	0.516	1.294	1.263	<b>1.81</b>	<b>1.78</b>	0.03	Case 7	0.03	Case 19
		Left Tilted	0.404	0.816	1.043	<b>1.22</b>	<b>1.45</b>				
	LTE Band 4	Right Cheek	0.345	0.548	1.061	<b>0.89</b>	<b>1.41</b>				
		Right Tilted	0.144	0.389	0.982	<b>0.53</b>	<b>1.13</b>				
		Left Cheek	0.148	1.294	1.263	<b>1.44</b>	<b>1.41</b>				
		Left Tilted	0.161	0.816	1.043	<b>0.98</b>	<b>1.20</b>				
	LTE Band 5	Right Cheek	0.698	0.548	1.061	<b>1.25</b>	<b>1.76</b>			0.03	Case 20
		Right Tilted	0.400	0.389	0.982	<b>0.79</b>	<b>1.38</b>				
		Left Cheek	0.631	1.294	1.263	<b>1.93</b>	<b>1.89</b>	0.04	Case 8	0.04	Case 21
		Left Tilted	0.390	0.816	1.043	<b>1.21</b>	<b>1.43</b>				
	LTE Band 12	Right Cheek	0.486	0.548	1.061	<b>1.03</b>	<b>1.55</b>				
		Right Tilted	0.291	0.389	0.982	<b>0.68</b>	<b>1.27</b>				
		Left Cheek	0.538	1.294	1.263	<b>1.83</b>	<b>1.80</b>	0.04	Case 9	0.03	Case 22
		Left Tilted	0.339	0.816	1.043	<b>1.16</b>	<b>1.38</b>				
	LTE Band 13	Right Cheek	0.665	0.548	1.061	<b>1.21</b>	<b>1.73</b>			0.04	Case 23
		Right Tilted	0.462	0.389	0.982	<b>0.85</b>	<b>1.44</b>				
		Left Cheek	0.622	1.294	1.263	<b>1.92</b>	<b>1.89</b>	0.04	Case 10	0.04	Case 24
		Left Tilted	0.400	0.816	1.043	<b>1.22</b>	<b>1.44</b>				





16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)						
GSM	GSM850	Front	0.669	0.257	0.195	0.93	0.86				
		Back	0.513	0.313	0.651	0.83	1.16				
		Left side	0.304	0.008	0.031	0.31	0.34				
		Right side	0.524	0.174	0.409	0.70	0.93				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.132			0.13	0.13				
	GSM1900	Front	0.600	0.257	0.195	0.86	0.80				
		Back	1.295	0.313	0.651	1.61	1.95	0.02	Case 25	0.02	Case 29
		Left side	0.258	0.008	0.031	0.27	0.29				
		Right side	0.055	0.174	0.409	0.23	0.46				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.853			0.85	0.85				
WCDMA	WCDMA II	Front	0.414	0.257	0.195	0.67	0.61				
		Back	1.018	0.313	0.651	1.33	1.67			0.02	Case 30
		Left side	0.199	0.008	0.031	0.21	0.23				
		Right side	0.054	0.174	0.409	0.23	0.46				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.507			0.51	0.51				
	WCDMA IV	Front	0.608	0.257	0.195	0.87	0.80				
		Back	1.261	0.313	0.651	1.57	1.91			0.02	Case 31
		Left side	0.092	0.008	0.031	0.10	0.12				
		Right side	0.129	0.174	0.409	0.30	0.54				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.880			0.88	0.88				
	WCDMA V	Front	0.556	0.257	0.195	0.81	0.75				
		Back	0.412	0.313	0.651	0.73	1.06				
		Left side	0.275	0.008	0.031	0.28	0.31				
		Right side	0.473	0.174	0.409	0.65	0.88				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.094			0.09	0.09				
CDMA	CDMA BC0	Front	0.571	0.257	0.195	0.83	0.77				
		Back	0.449	0.313	0.651	0.76	1.10				
		Left side	0.253	0.008	0.031	0.26	0.28				
		Right side	0.464	0.174	0.409	0.64	0.87				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.104			0.10	0.10				
	CDMA BC1	Front	0.423	0.257	0.195	0.68	0.62				
		Back	1.319	0.313	0.651	1.63	1.97	0.02	Case 26	0.02	Case 32
		Left side	0.163	0.008	0.031	0.17	0.19				
		Right side	0.048	0.174	0.409	0.22	0.46				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.641			0.64	0.64				



WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)						
LTE	LTE Band 2	Front	0.621	0.257	0.195	0.88	0.82				
		Back	1.313	0.313	0.651	1.63	1.96	0.02	Case 27	0.02	Case 33
		Left side	0.226	0.008	0.031	0.23	0.26				
		Right side	0.066	0.174	0.409	0.24	0.48				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.805			0.81	0.81				
	LTE Band 4	Front	0.740	0.257	0.195	1.00	0.94				
		Back	1.422	0.313	0.651	1.74	2.07	0.02	Case 28	0.02	Case 34
		Left side	0.101	0.008	0.031	0.11	0.13				
		Right side	0.174	0.174	0.409	0.35	0.58				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	1.020			1.02	1.02				
	LTE Band 5	Front	0.735	0.257	0.195	0.99	0.93				
		Back	0.633	0.313	0.651	0.95	1.28				
		Left side	0.458	0.008	0.031	0.47	0.49				
		Right side	0.686	0.174	0.409	0.86	1.10				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.098			0.10	0.10				
	LTE Band 12	Front	0.765	0.257	0.195	1.02	0.96				
		Back	0.607	0.313	0.651	0.92	1.26				
		Left side	0.639	0.008	0.031	0.65	0.67				
		Right side	0.508	0.174	0.409	0.68	0.92				
		Top side		0.174	0.334	0.17	0.33				
		Bottom side	0.136			0.14	0.14				
LTE Band 13	Front	0.875	0.257	0.195	1.13	1.07					
	Back	0.648	0.313	0.651	0.96	1.30					
	Left side	0.595	0.008	0.031	0.60	0.63					
	Right side	0.664	0.174	0.409	0.84	1.07					
	Top side		0.174	0.334	0.17	0.33					
	Bottom side	0.107			0.11	0.11					



**16.3 Body-Worn Accessory Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.262	0.082	0.097	0.031	<b>0.34</b>	<b>0.36</b>	<b>0.29</b>
	GSM1900	Front	1.073	0.082	0.097	0.031	<b>1.16</b>	<b>1.17</b>	<b>1.10</b>
WCDMA	WCDMA II	Front	1.226	0.082	0.097	0.031	<b>1.31</b>	<b>1.32</b>	<b>1.26</b>
	WCDMA IV	Front	1.189	0.082	0.097	0.031	<b>1.27</b>	<b>1.29</b>	<b>1.22</b>
	WCDMA V	Front	0.331	0.082	0.097	0.031	<b>0.41</b>	<b>0.43</b>	<b>0.36</b>
CDMA	CDMA BC0	Front	0.344	0.082	0.097	0.031	<b>0.43</b>	<b>0.44</b>	<b>0.38</b>
	CDMA BC1	Front	1.408	0.082	0.097	0.031	<b>1.49</b>	<b>1.51</b>	<b>1.44</b>
LTE	LTE Band 2	Front	1.360	0.082	0.097	0.031	<b>1.44</b>	<b>1.46</b>	<b>1.39</b>
	LTE Band 4	Front	1.029	0.082	0.097	0.031	<b>1.11</b>	<b>1.13</b>	<b>1.06</b>
	LTE Band 5	Front	0.334	0.082	0.097	0.031	<b>0.42</b>	<b>0.43</b>	<b>0.37</b>
	LTE Band 12	Front	0.732	0.082	0.097	0.031	<b>0.81</b>	<b>0.83</b>	<b>0.76</b>
	LTE Band 13	Front	0.484	0.082	0.097	0.031	<b>0.57</b>	<b>0.58</b>	<b>0.52</b>

**16.4 SPLSR Evaluation and Analysis**

**General Note:**

- SPLSR =  $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary

Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Left Cheek	0.757	0	47.62	-40.67	-1.34	65.4	2.05	0.04	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Left Cheek	0.33	0	49.49	-55.6	-0.62	79.7	1.62	0.03	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	2.4GHz WLAN	Left Cheek	0.499	0	49.49	-55.6	-0.61	79.7	1.79	0.03	Not required
			1.294	0	17.85	17.6	-0.22				



Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	2.4GHz WLAN	Left Cheek	0.592	0	47.83	-37.24	-1.46	62.5	1.89	0.04	Not required
			1.294	0	17.85	17.6	-0.22				



Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Left Cheek	0.588	0	50.83	-31.76	-1.27	59.4	1.88	0.04	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Left Cheek	0.507	0	50.23	-54.2	-0.65	78.8	1.80	0.03	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Left Cheek	0.516	0	44.7	-54.54	-1.42	77.0	1.81	0.03	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.631	0	45.71	-37.83	-1.71	62.1	1.93	0.04	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				



Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Left Cheek	0.538	0	53.68	-41.35	-0.3	69.0	1.83	0.04	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				




Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Left Cheek	0.622	0	53.48	-32.74	-0.68	61.7	1.92	0.04	Not required
	2.4GHz WLAN		1.294	0	17.85	17.6	-0.22				






Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	5GHz WLAN <td rowspan="2">Right Cheek</td> <td>0.606</td> <td>0</td> <td>50.03</td> <td>46.12</td> <td>-1.62</td> <td rowspan="2">68.6</td> <td rowspan="2">1.67</td> <td rowspan="2">0.03</td> <td rowspan="2">Not required</td>	Right Cheek	0.606	0	50.03	46.12	-1.62	68.6	1.67	0.03	Not required
			1.061	0	-15.78	28.29	5.74				

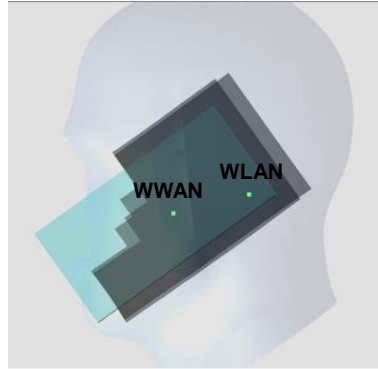


Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	5GHz WLAN <td rowspan="2">Left Cheek</td> <td>0.757</td> <td>0</td> <td>47.62</td> <td>-40.67</td> <td>-1.34</td> <td rowspan="2">66.1</td> <td rowspan="2">2.02</td> <td rowspan="2">0.04</td> <td rowspan="2">Not required</td>	Left Cheek	0.757	0	47.62	-40.67	-1.34	66.1	2.02	0.04	Not required
			1.263	0	11.63	14.77	0.02				



Case 13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Left Cheek	0.499	0	49.49	-55.6	-0.61	79.9	1.76	0.03	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				

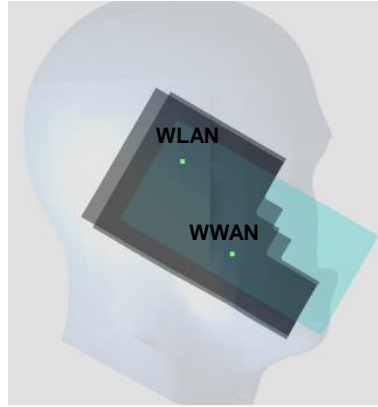


Case 14	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Right Cheek	0.603	0	47.43	41.14	-2.23	65.0	1.66	0.03	Not required
	5GHz WLAN		1.061	0	-15.78	28.29	5.74				

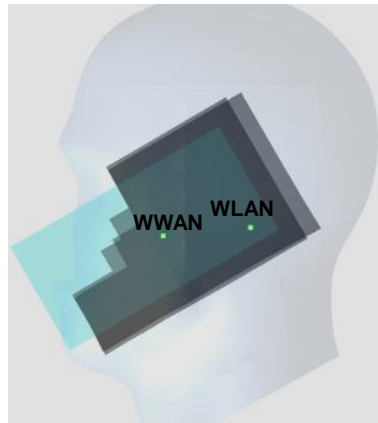


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
15	WCDMA V	Left Cheek	0.592	0	47.83	-37.24	-1.46	63.4	1.86	0.04	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				



Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
16	CDMA BC0	Right Cheek	0.646	0	46.67	42.44	-2.29	64.5	1.71	0.03	Not required
	5GHz WLAN		1.061	0	-15.78	28.29	5.74				

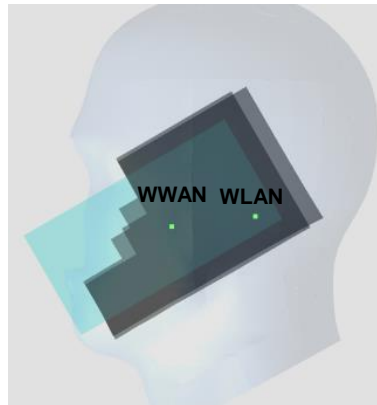

Case 17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC0				X	Y	Z				
	5GHz WLAN <td>Left Cheek</td> <td>1.263</td> <td>0</td> <td>11.63</td> <td>14.77</td> <td>0.02</td> <td>60.9</td> <td>1.85</td> <td>0.04</td> <td>Not required</td>	Left Cheek	1.263	0	11.63	14.77	0.02	60.9	1.85	0.04	Not required

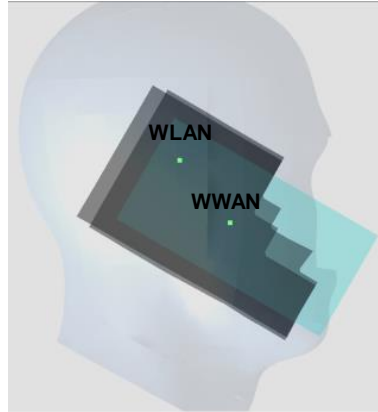


Case 18	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC1				X	Y	Z				
	5GHz WLAN <td>Left Cheek</td> <td>1.263</td> <td>0</td> <td>11.63</td> <td>14.77</td> <td>0.02</td> <td>79.0</td> <td>1.77</td> <td>0.03</td> <td>Not required</td>	Left Cheek	1.263	0	11.63	14.77	0.02	79.0	1.77	0.03	Not required




Case 19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Left Cheek	0.516	0	44.7	-54.54	-1.42	76.8	1.78	0.03	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				




Case 20	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Right Cheek	0.698	0	50.7	44.78	-1.56	68.9	1.76	0.03	Not required
	5GHz WLAN		1.061	0	-15.78	28.29	5.74				

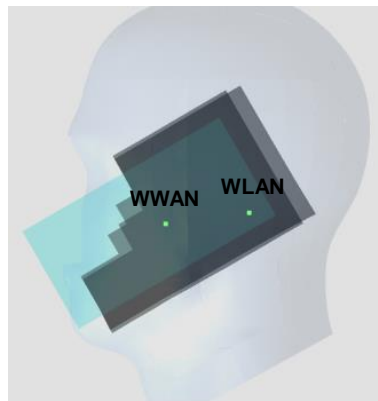


Case 21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.631	0	45.71	-37.83	-1.71	62.7	1.89	0.04	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				

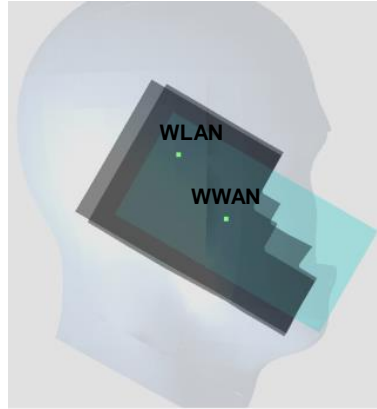


Case 22	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Left Cheek	0.538	0	53.68	-41.35	-0.3	70.1	1.80	0.03	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				

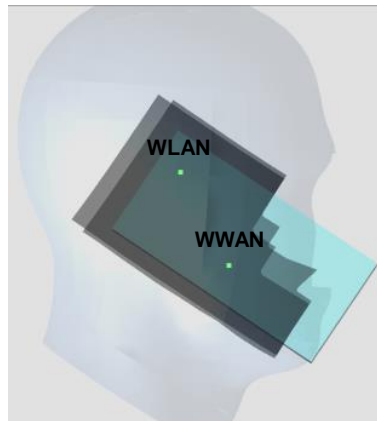


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
23	LTE Band 13	Right Cheek	0.665	0	47.74	37.4	-2.31	64.7	1.73	0.04	Not required
	5GHz WLAN		1.061	0	-15.78	28.29	5.74				

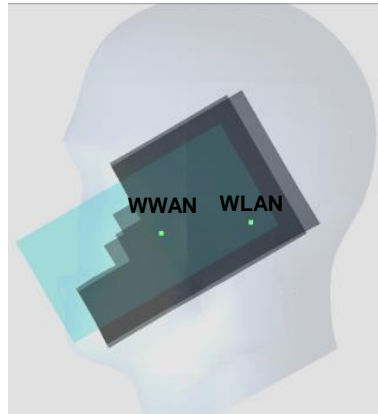


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
24	LTE Band 13	Left Cheek	0.622	0	53.48	-32.74	-0.68	63.3	1.89	0.04	Not required
	5GHz WLAN		1.263	0	11.63	14.77	0.02				

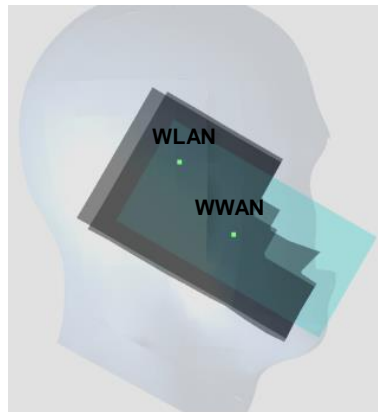

Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
25	GSM1900	Back	1.295	1	2.3	-65.2	-0.87	129.5	1.61	0.02	Not required
	2.4GHz WLAN		0.313	1	-25.1	61.4	-0.95				

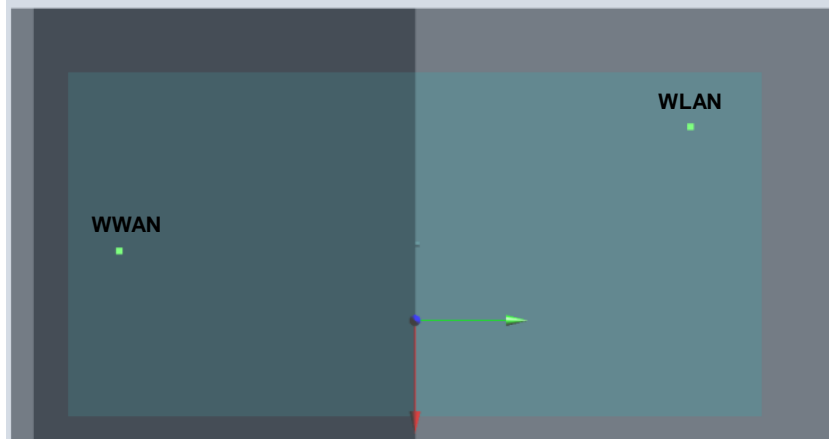


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
26	CDMA BC1	Back	1.319	1	-0.7	-68	-0.93	131.7	1.63	0.02	Not required
	2.4GHz WLAN		0.313	1	-25.1	61.4	-0.95				

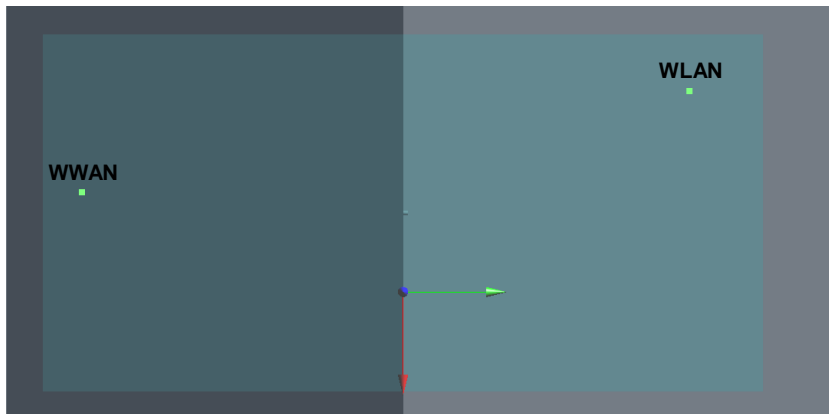





Case 27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2				X	Y	Z				
	2.4GHz WLAN	Back	0.313	1	-25.1	61.4	-0.95	130.7	1.63	0.02	Not required

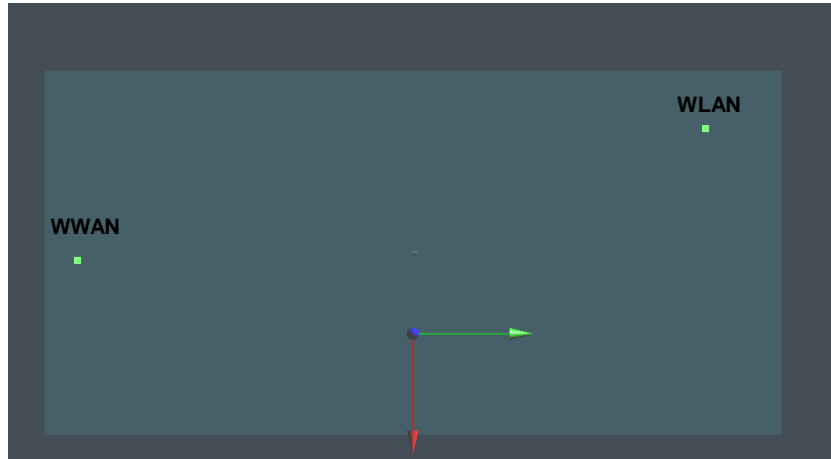


Case 28	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4				X	Y	Z				
	2.4GHz WLAN	Back	0.313	1	-25.1	61.4	-0.95	135.4	1.74	0.02	Not required

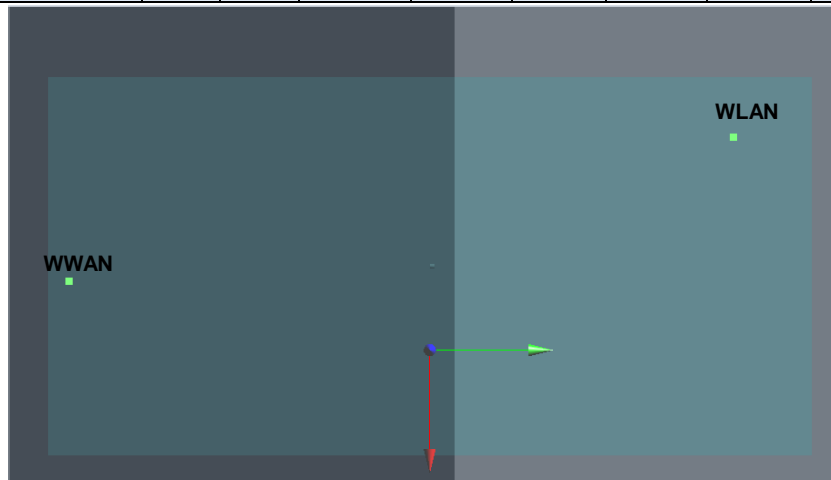


Case 29	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	GSM1900	Back	1.295	1	2.3	-65.2	-0.87	135.9	1.95	0.02	Not required
	5GHz WLAN		0.651	1	-22.44	68.41	-0.25				

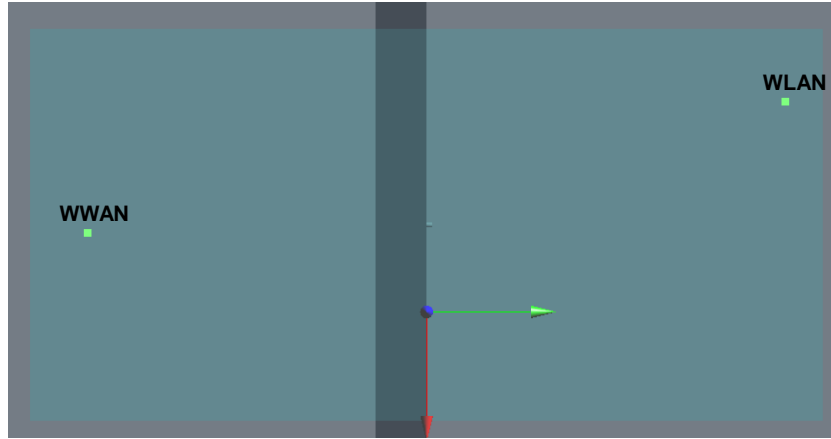


Case 30	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Back	1.018	1	-1	-66.5	-0.93	136.6	1.67	0.02	Not required
	5GHz WLAN		0.651	1	-22.44	68.41	-0.25				

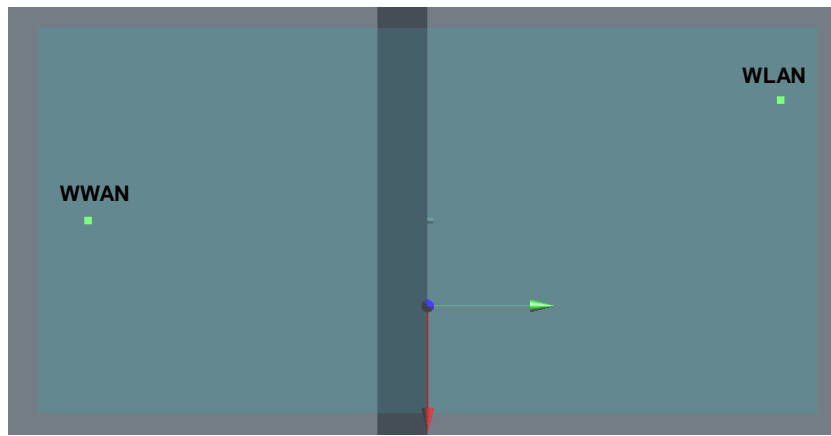


Case 31	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	5GHz WLAN	Back	0.651	1	-22.44	68.41	-0.25	138.4	1.91	0.02	Not required
	WCDMA IV		1.261	1	0.4	-68.1	0.12				

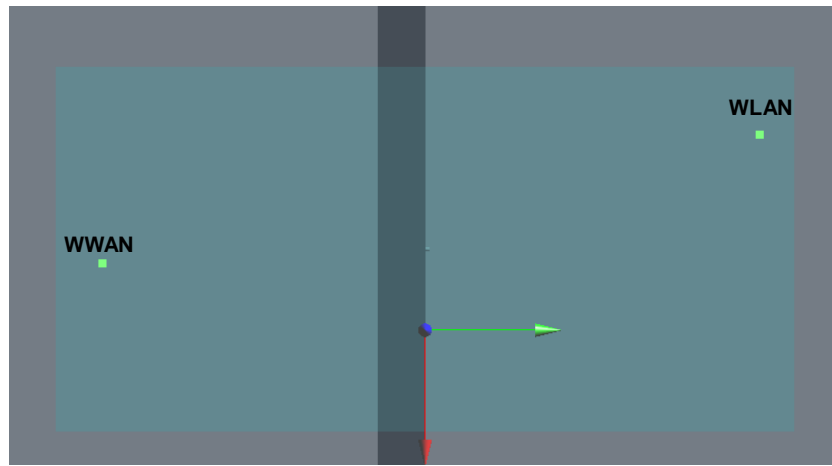


Case 32	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC1				X	Y	Z				
	5GHz WLAN	Back	0.651	1	-22.44	68.41	-0.25	138.1	1.97	0.02	Not required
	CDMA BC1		1.319	1	-0.7	-68	-0.93				

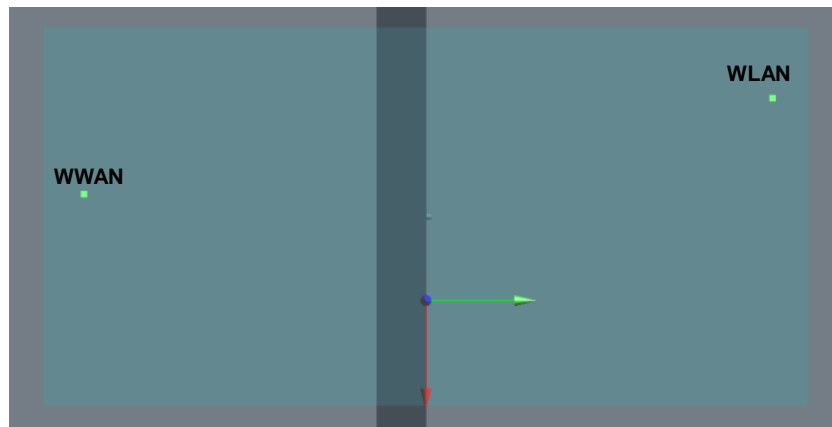

Case 33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2				X	Y	Z				
	LTE Band 2	Back	1.313	1	0.8	-66.7	-0.89	137.1	1.96	0.02	Not required
	5GHz WLAN		0.651	1	-22.44	68.41	-0.25				

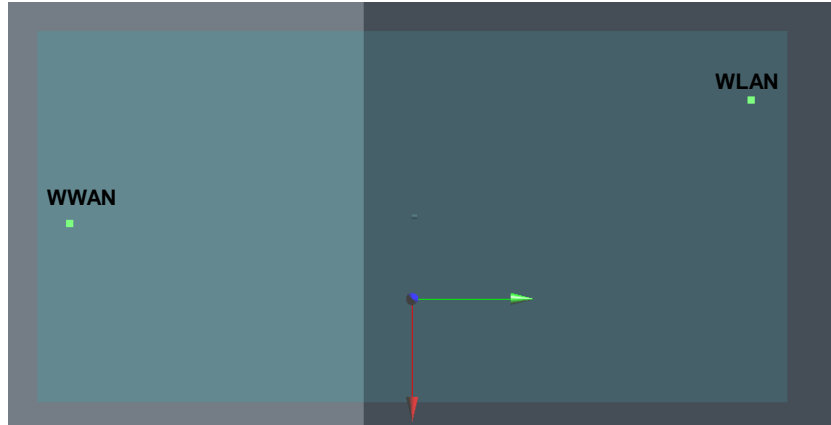

Case 34	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4				X	Y	Z				
	LTE Band 4	Back	1.422	1	-2	-72	-0.91	141.9	2.07	0.02	Not required
	5GHz WLAN		0.651	1	-22.44	68.41	-0.25				

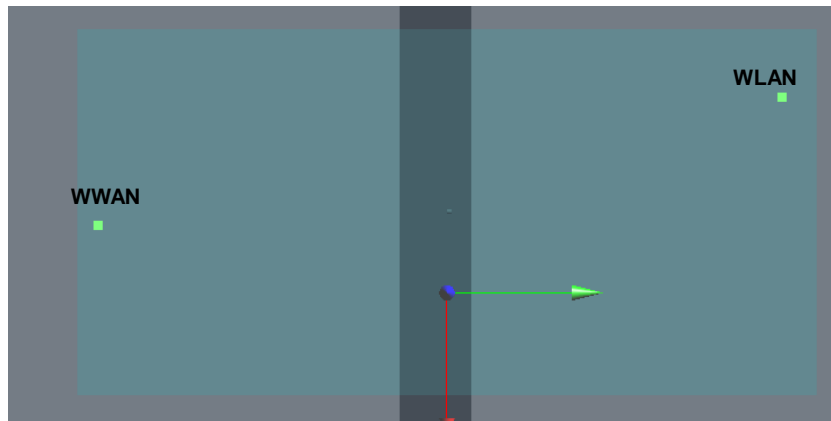

**Test Engineer :** Steven Chang Nick Yu Lawrence Chen Poa Pan Bevis Chang San Lin  
 Aaron Chen Tom Jiang Iran Wang and Kurt Liu

**17. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						11.4%	11.4%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						22.9%	22.7%

**Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						12.8%	12.7%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						25.5%	25.4%

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.