



FCC RF Test Report

FCC ID : UZ7WCMTA
EQUIPMENT : Touch Computer
BRAND NAME : Zebra
MODEL NAME : WCMTA
APPLICANT : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
MANUFACTURER : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Feb. 02, 2023 ~ Mar. 02, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software.....	6
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	21
3.4 20dB and 99% Bandwidth Measurement	23
3.5 Output Power Measurement.....	36
3.6 Conducted Band Edges Measurement.....	38
3.7 Conducted Spurious Emission Measurement	46
3.8 Radiated Band Edges and Spurious Emission Measurement	62
3.9 AC Conducted Emission Measurement.....	66
3.10 Antenna Requirements.....	68
4 LIST OF MEASURING EQUIPMENT.....	69
5 UNCERTAINTY OF EVALUATION.....	70
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR311602A	Rev. 01	Initial issue of report	Apr. 27, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.35 dB at 39.70 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.67 dB at 0.183 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	WCMTA
FCC ID	UZ7WCMTA
Sample 1	Scanner(SE4710)
Sample 2	Scanner(SE5500)
HW Version	DV
SW Version	13-09-09.00-TG-U00-PRD-ATH-04
MFD	09MAR23
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT: the main differences between them are the scanner and memory. According to the difference, we choose the Sample 1 to perform full test.

Specification of Accessory				
Battery 1	Brand Name	Zebra	Model Number	BT-000473

Supported Unit used in test configuration and system				
Battery 2	Brand Name	Zebra	Model Number	BT-000473B
Battery 3	Brand Name	Zebra	Model Number	BT-000473E
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-TC2L-SNP1-01
Hand Strap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 4.10 dBm (0.0026 W) Bluetooth EDR (2Mbps) : 3.61 dBm (0.0023 W) Bluetooth EDR (3Mbps) : 4.05 dBm (0.0025 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.836MHz Bluetooth EDR (2Mbps) : 1.166MHz Bluetooth EDR (3Mbps) : 1.148MHz
Antenna Type / Gain	IFA Antenna type with gain -1.26 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : 5G NR 71 Rx+ Bluetooth Link+ WIAN Link		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter and USB Cable.			

2.3 Connection Diagram of Test System

For Conducted Emission

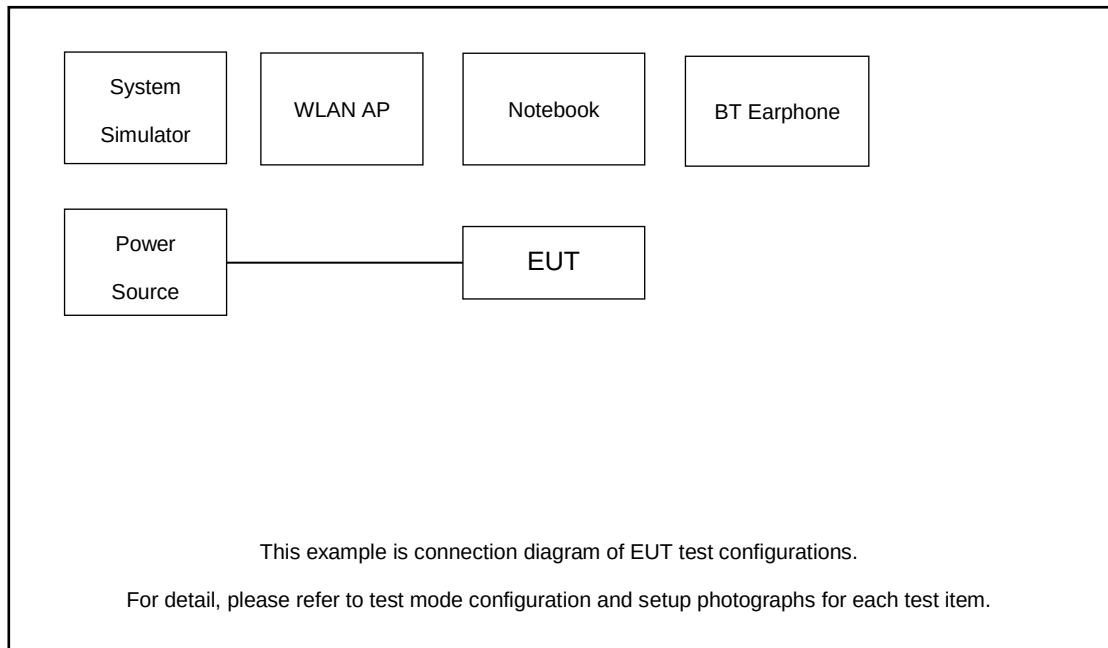

For Radiated Emission

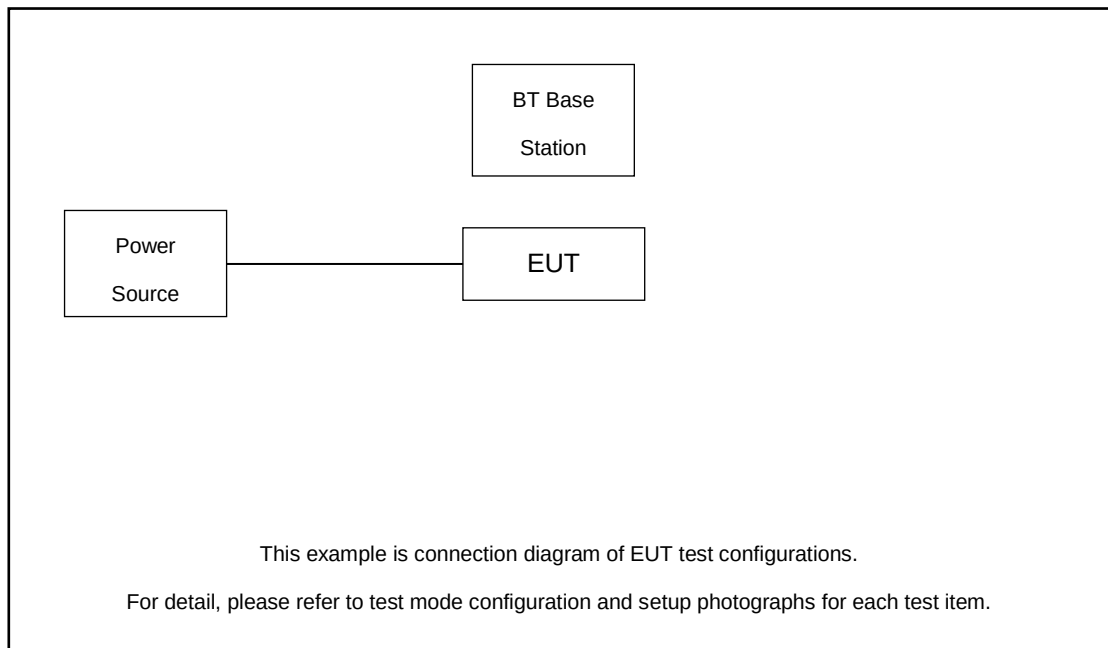

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	5G NR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.89 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.89 + 10 = 12.89 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

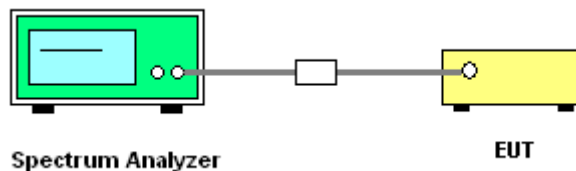


3.1.5 Test Result of Number of Hopping Frequency

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant7	Hop	79	≥ 15	PASS



Number of Hopping Channel Plot on Channel 00 - 78

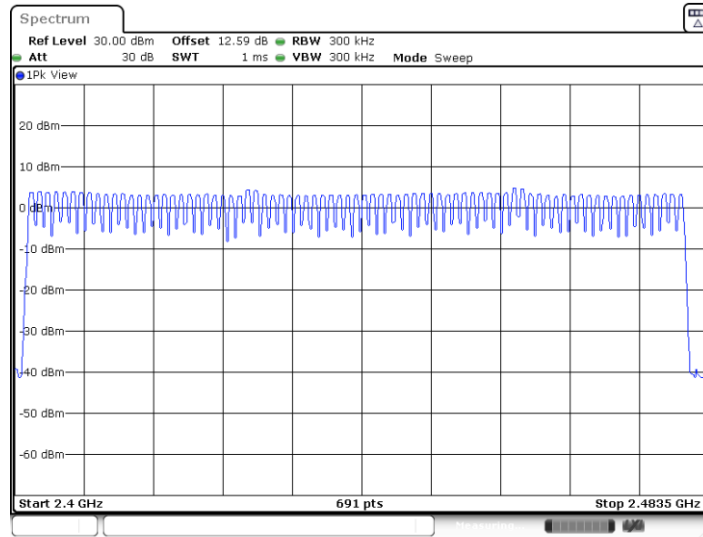

Date: 14.FEB.2023 01:24:57

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

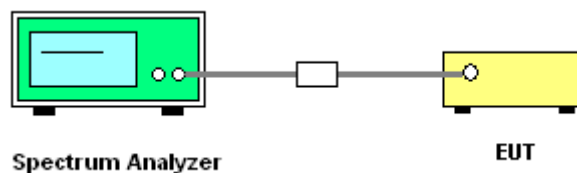


**3.2.5 Test Result of Hopping Channel Separation**


TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant7	2402	1.017	≥ 0.627	PASS
		2441	1	≥ 0.627	PASS
		2480	1	≥ 0.627	PASS
2DH1	Ant7	2402	1	≥ 0.860	PASS
		2441	1.009	≥ 0.860	PASS
		2480	1.009	≥ 0.860	PASS
3DH1	Ant7	2402	1.017	≥ 0.827	PASS
		2441	1.309	≥ 0.827	PASS
		2480	1	≥ 0.827	PASS



DH5_Ant7_2402

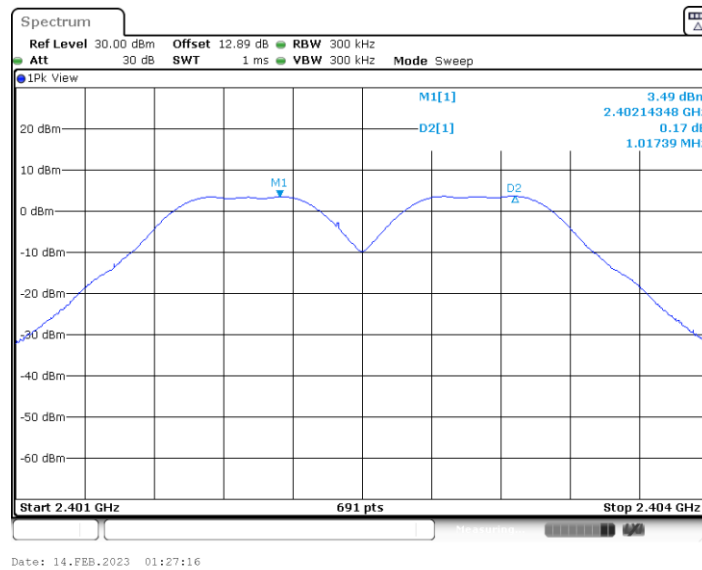


DH5_Ant7_2441

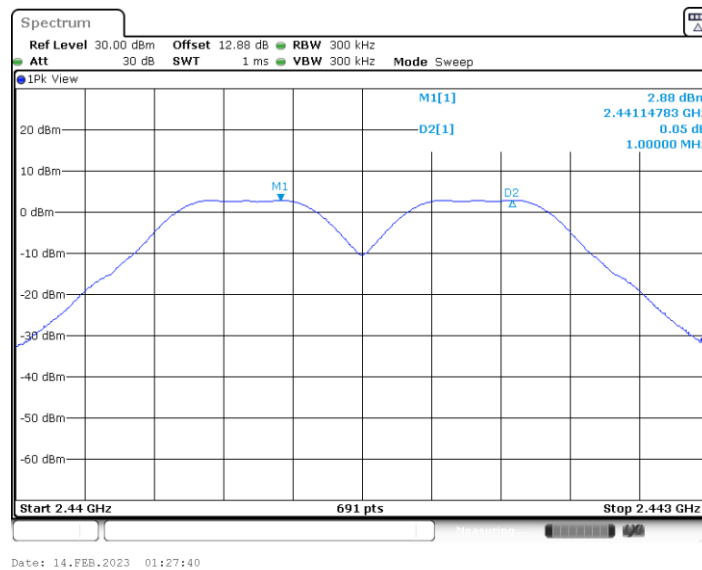




DH5_Ant7_2480

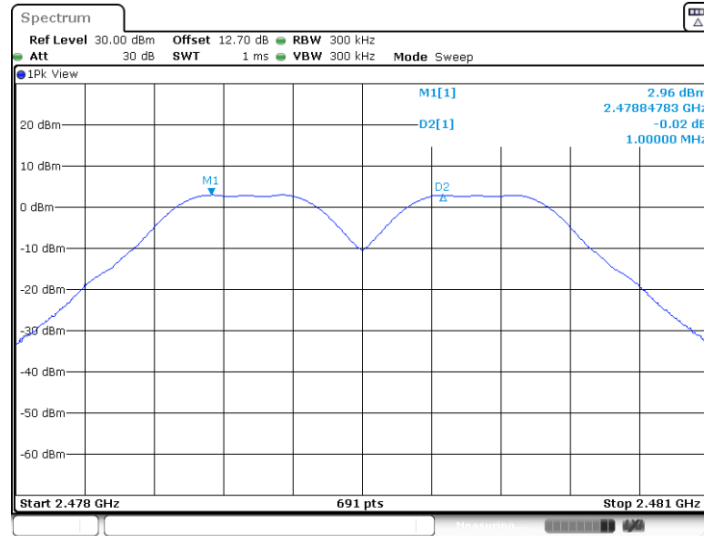

2DH1_Ant7_2402

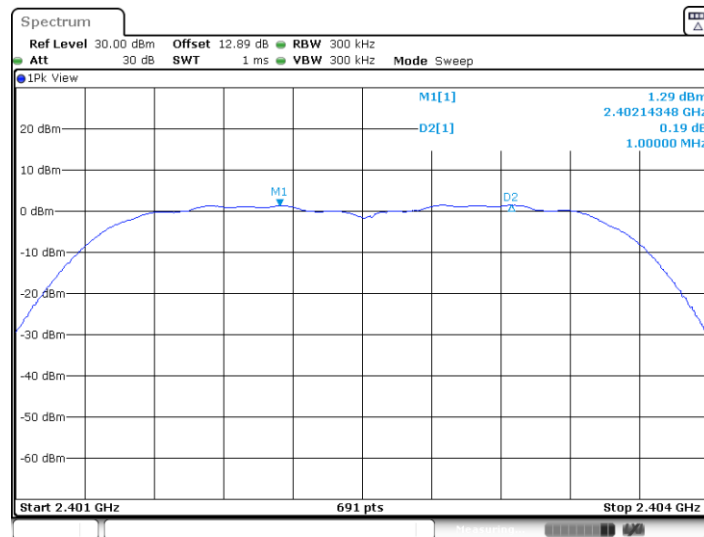



2DH1_Ant7_2441




2DH1_Ant7_2480






3DH1_Ant7_2402

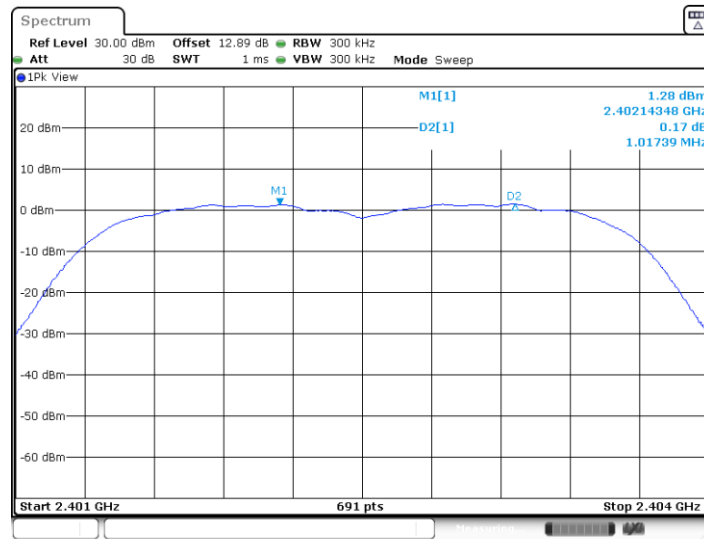

Date: 14.FEB.2023 01:30:36


3DH1_Ant7_2441

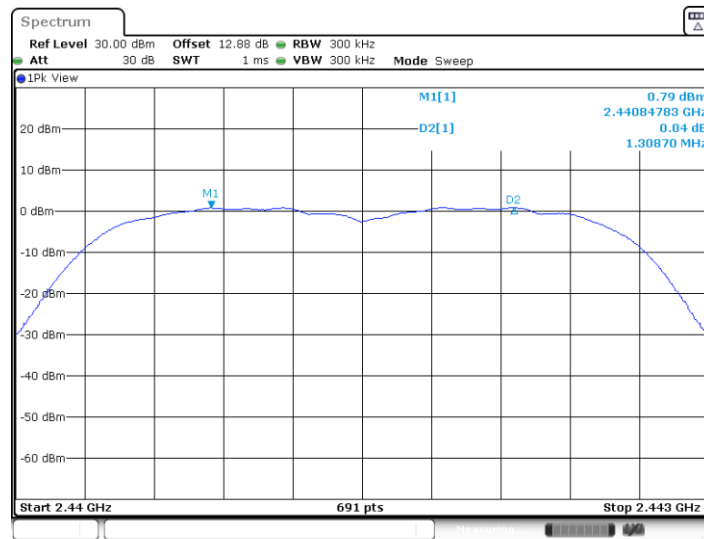

Date: 14.FEB.2023 01:31:06



3DH1_Ant7_2480

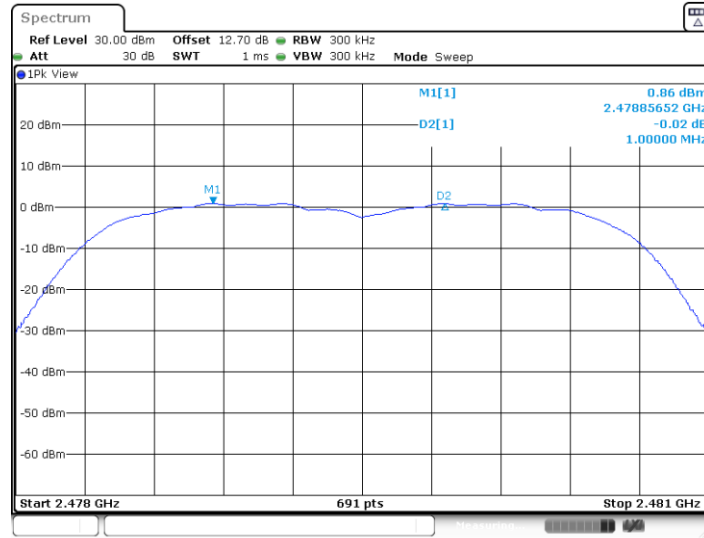

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

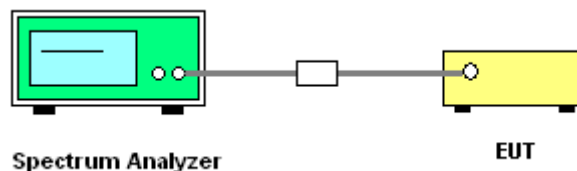




3.3.5 Test Result of Dwell Time

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.34	2.89	0.15	0.4	Pass

Package Transfer Time Plot

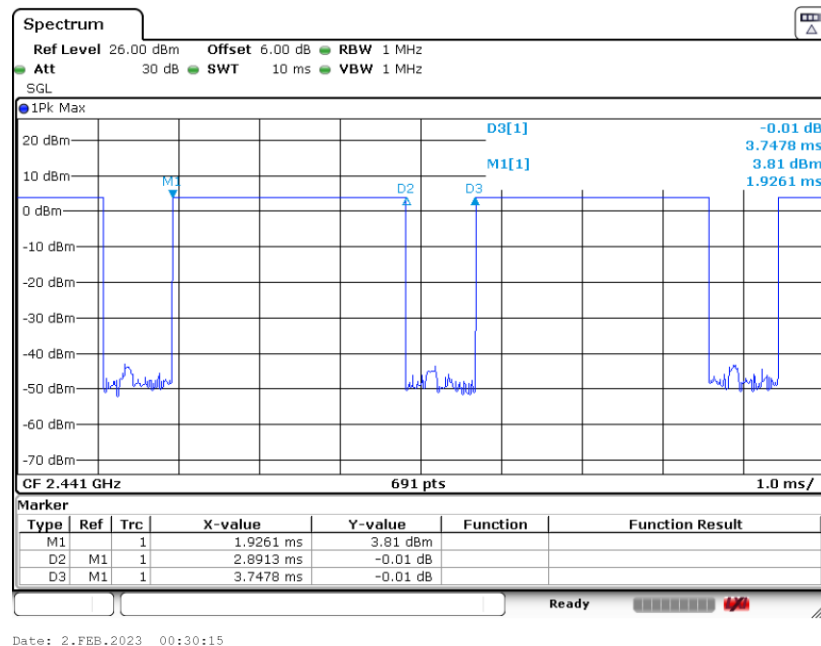

Date: 2.FEB.2023 00:30:15

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

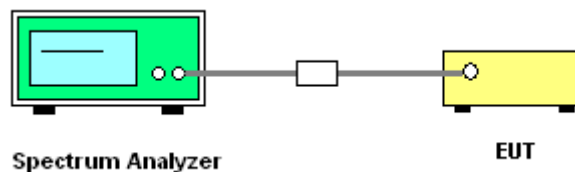




3.4.5 Test Result of 20dB Bandwidth


TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant7	2402	0.94	2401.54	2402.47	---	---
		2441	0.94	2440.54	2441.47	---	---
		2480	0.94	2479.54	2480.47	---	---
2DH1	Ant7	2402	1.29	2401.34	2402.63	---	---
		2441	1.29	2440.34	2441.63	---	---
		2480	1.29	2479.34	2480.63	---	---
3DH1	Ant7	2402	1.24	2401.39	2402.63	---	---
		2441	1.24	2440.39	2441.63	---	---
		2480	1.24	2479.39	2480.63	---	---

DH5_Ant7_2402

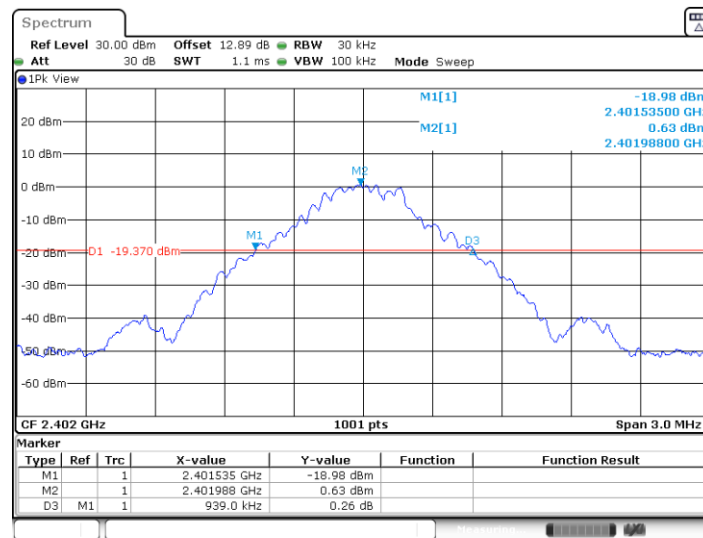




DH5_Ant7_2441

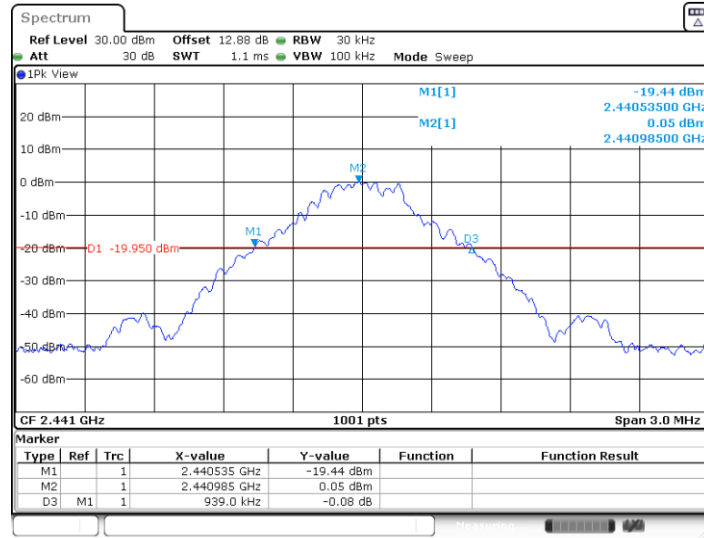


Date: 14.FEB.2023 01:15:09



DH5_Ant7_2480

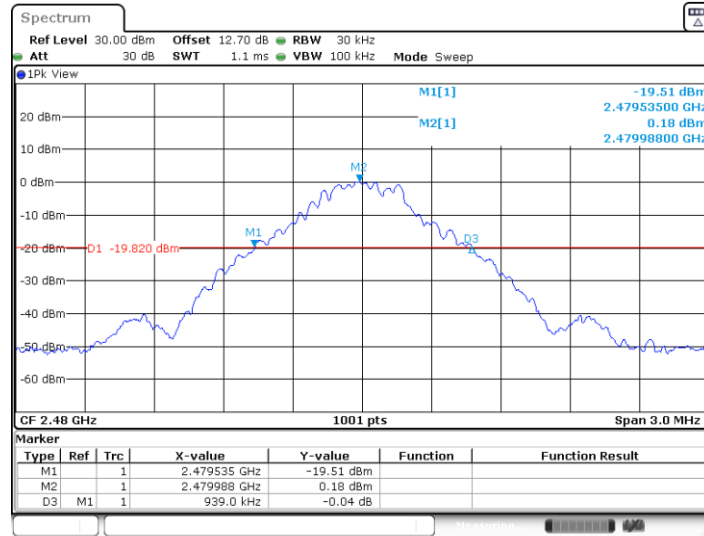


2DH1_Ant7_2402

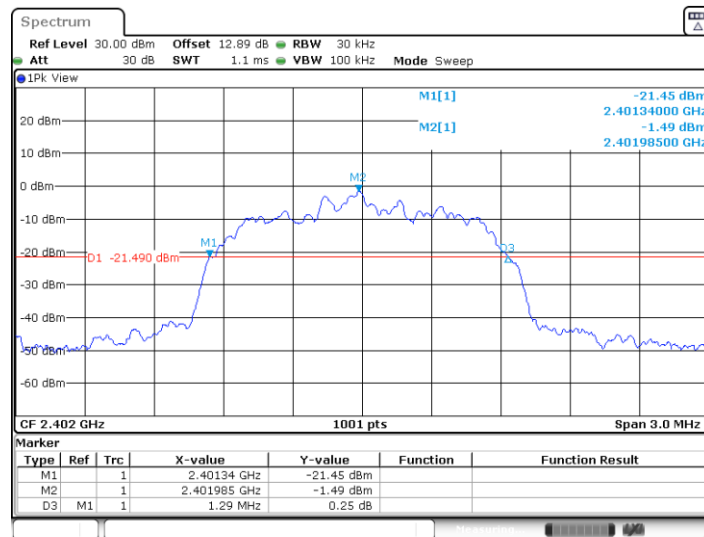




2DH1_Ant7_2441

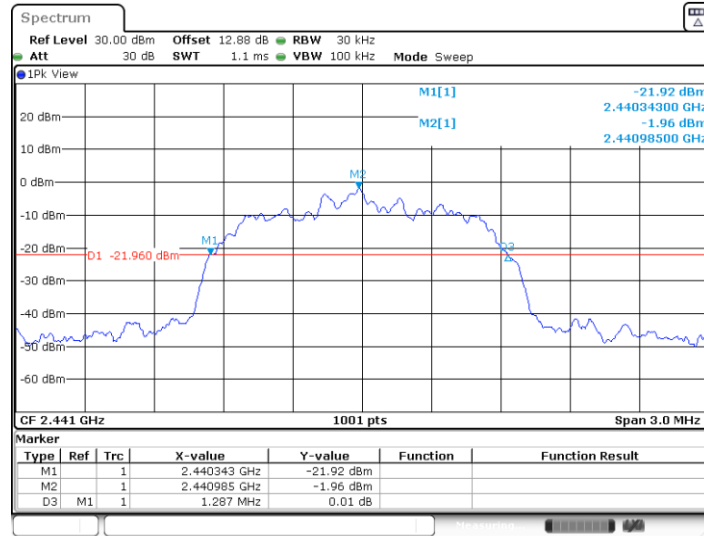


2DH1_Ant7_2480

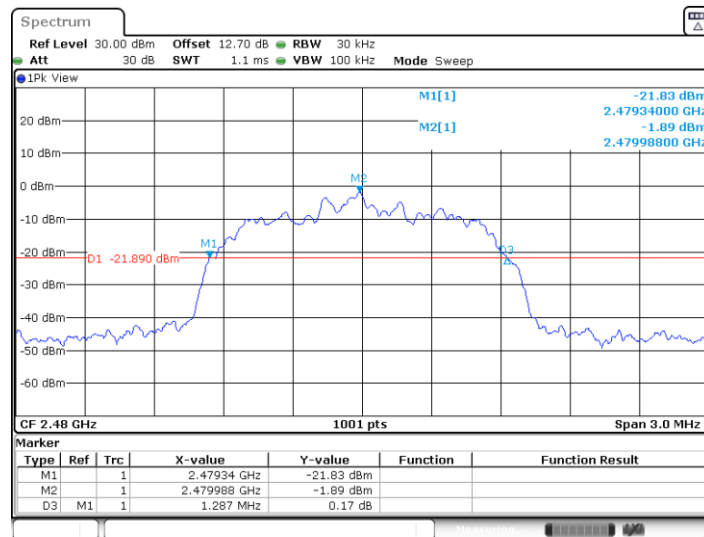




3DH1_Ant7_2402

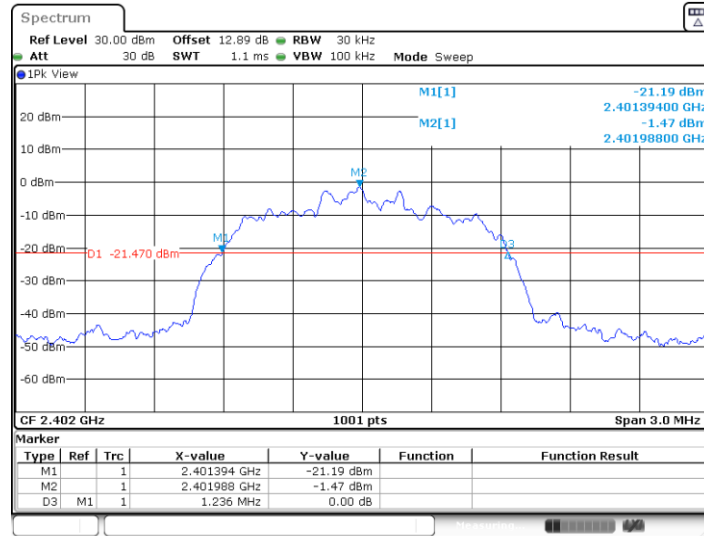


3DH1_Ant7_2441

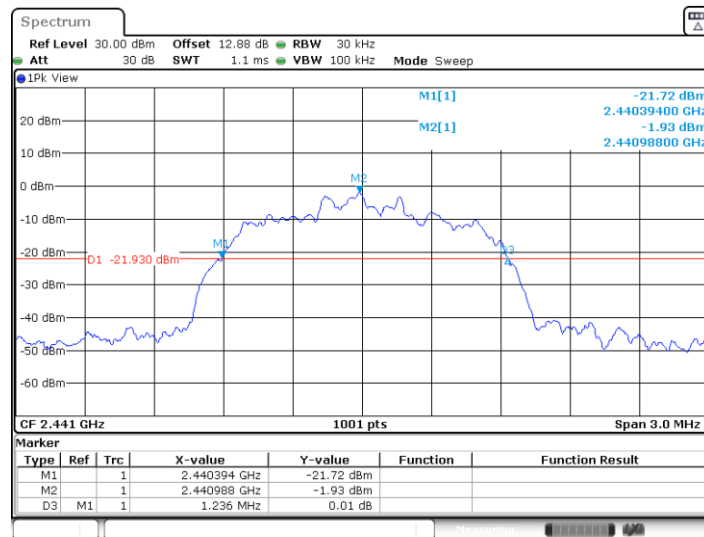



3DH1_Ant7_2480

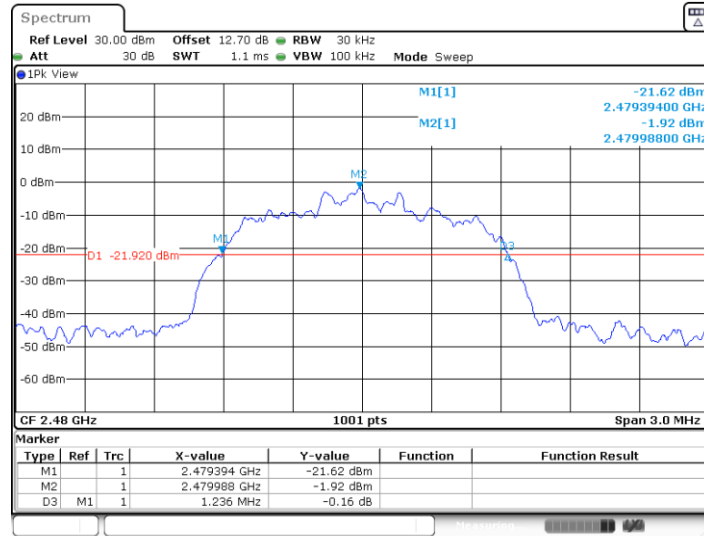




3.4.6 Test Result of 99% Occupied Bandwidth

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant7	2402	0.836	2401.5804	2402.4166	---	---
		2441	0.836	2440.5774	2441.4136	---	---
		2480	0.836	2479.5774	2480.4136	---	---
2DH1	Ant7	2402	1.163	2401.4096	2402.5724	---	---
		2441	1.163	2440.4096	2441.5724	---	---
		2480	1.166	2479.4066	2480.5724	---	---
3DH1	Ant7	2402	1.148	2401.4366	2402.5844	---	---
		2441	1.148	2440.4366	2441.5844	---	---
		2480	1.148	2479.4366	2480.5844	---	---


DH5_Ant7_2402

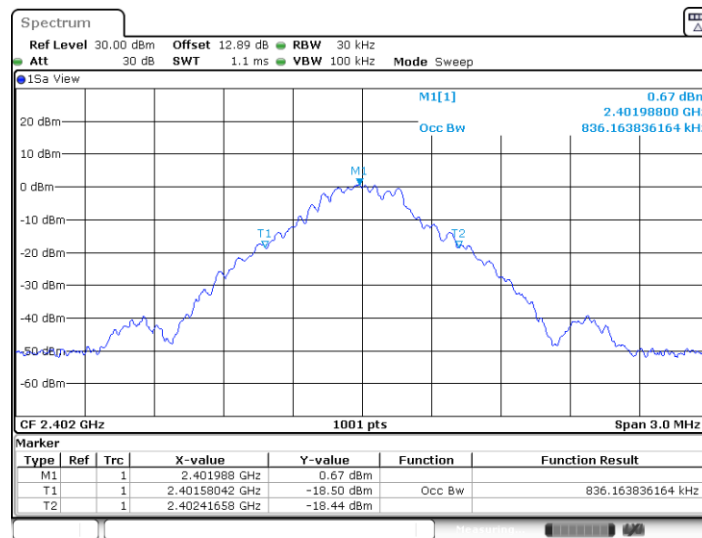

Date: 14.FEB.2023 01:14:01




DH5_Ant7_2441

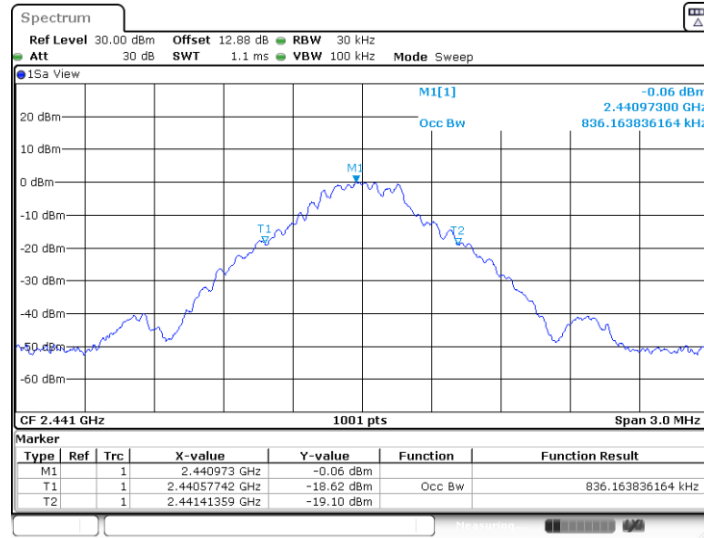




DH5_Ant7_2480

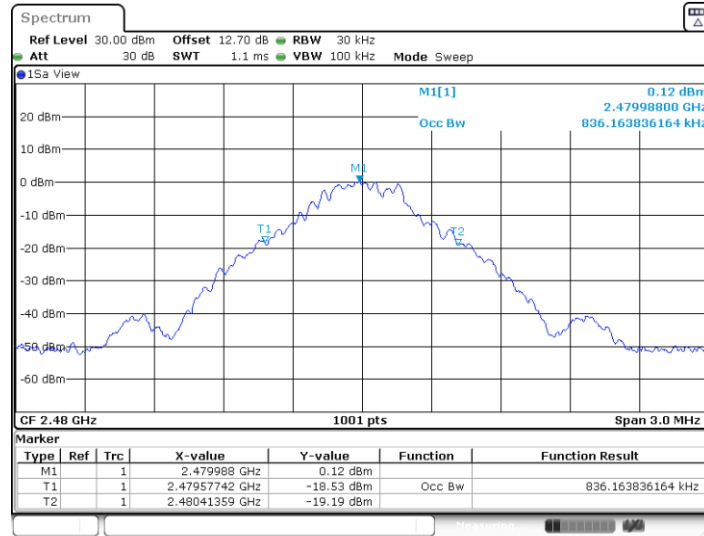


2DH1_Ant7_2402

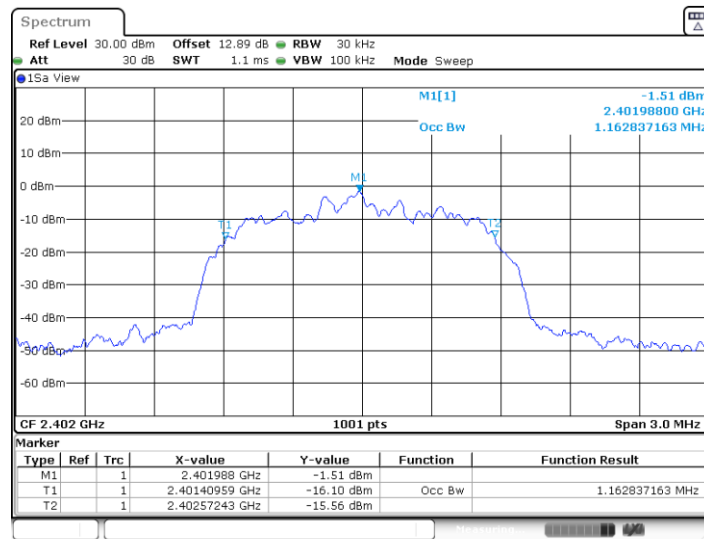




2DH1_Ant7_2441

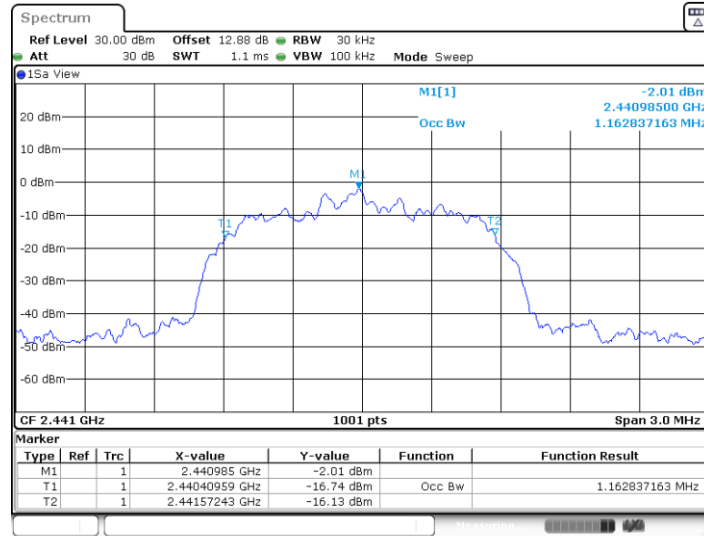


2DH1_Ant7_2480

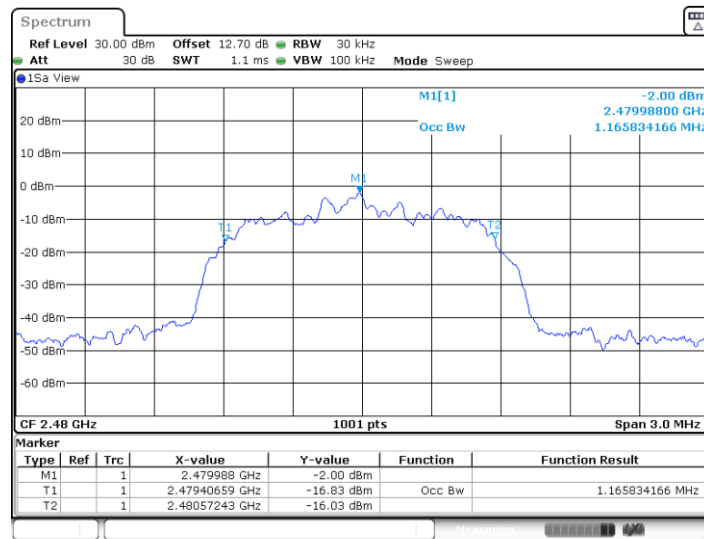




3DH1_Ant7_2402

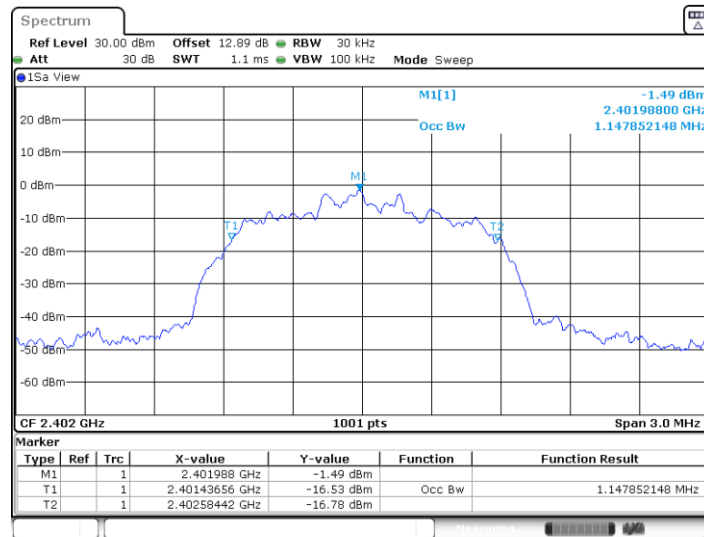


3DH1_Ant7_2441

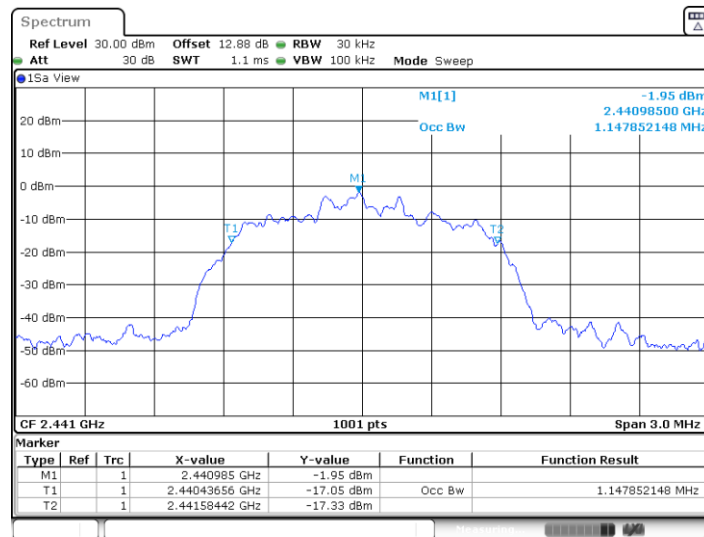



3DH1_Ant7_2480

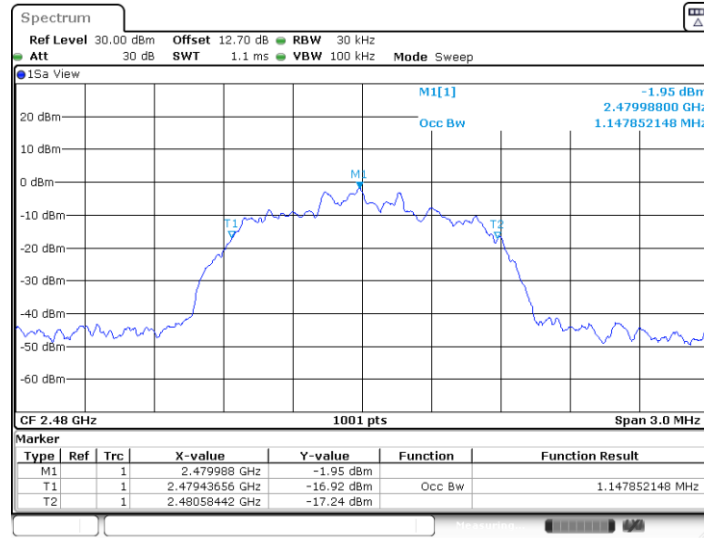

Date: 14.FEB.2023 01:23:43

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

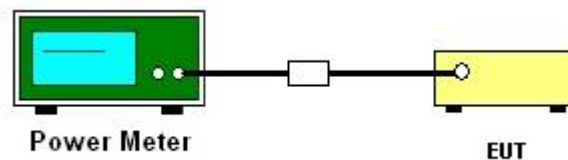

**3.5.5 Test Result of Peak Output Power**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	3.83	20.97	Pass
	39	1	3.27	20.97	Pass
	78	1	4.10	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	3.35	20.97	Pass
	39	1	2.78	20.97	Pass
	78	1	3.61	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	3.78	20.97	Pass
	39	1	3.22	20.97	Pass
	78	1	4.05	20.97	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	3.71	5.18
	39	1	3.22	5.18
	78	1	3.86	5.18

2DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
2DH1	0	1	1.06	5.08
	39	1	0.69	5.08
	78	1	1.33	5.08

3DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
3DH1	0	1	1.08	5.08
	39	1	0.52	5.08
	78	1	1.30	5.08

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

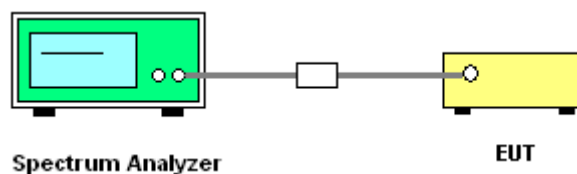




3.6.5 Test Result of Conducted and Conducted Hopping Band Edges

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant7	Low	2402	3.35	-43.94	≤-16.65	PASS
		High	2480	2.68	-43.07	≤-17.32	PASS
		Low	Hop_2402	2.97	-44.07	≤-17.03	PASS
		High	Hop_2480	2.71	-43.15	≤-17.29	PASS
2DH1	Ant7	Low	2402	1.04	-43.53	≤-18.96	PASS
		High	2480	0.61	-42.87	≤-19.39	PASS
		Low	Hop_2402	0.41	-44.08	≤-19.59	PASS
		High	Hop_2480	0.68	-42.81	≤-19.32	PASS
3DH1	Ant7	Low	2402	1.19	-43.95	≤-18.81	PASS
		High	2480	0.71	-42.79	≤-19.29	PASS
		Low	Hop_2402	0.76	-43.24	≤-19.24	PASS
		High	Hop_2480	0.66	-42.6	≤-19.34	PASS


DH5_Ant7_Low_2402

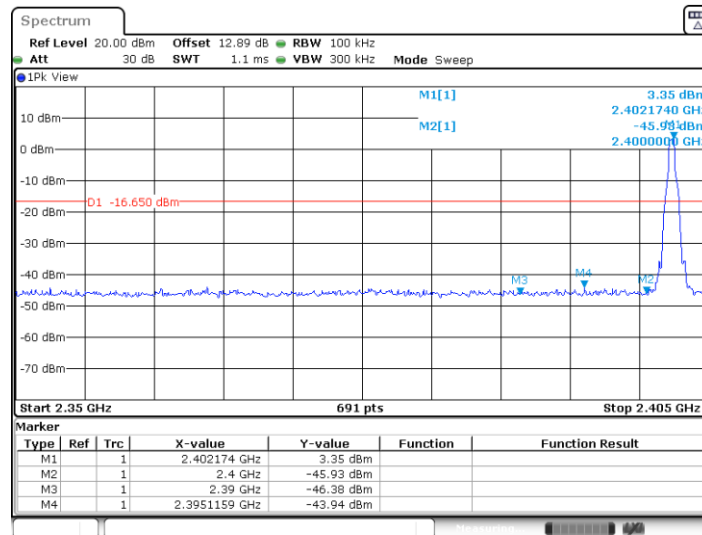

Date: 14.FEB.2023 01:14:19




DH5_Ant7_High_2480

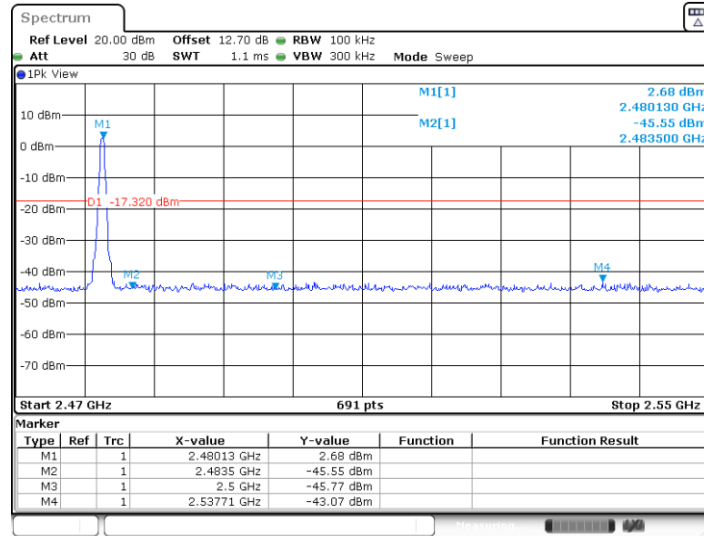


Date: 14.FEB.2023 01:16:44



DH5_Ant7_Low_Hop_2402

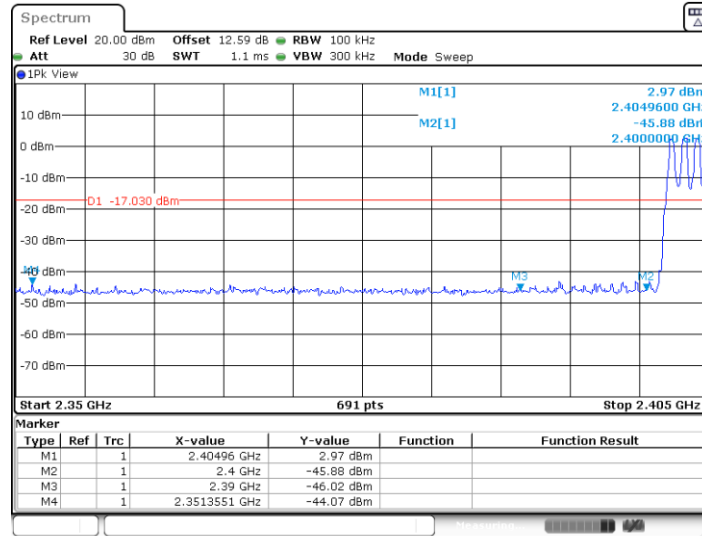


DH5_Ant7_High_Hop_2480

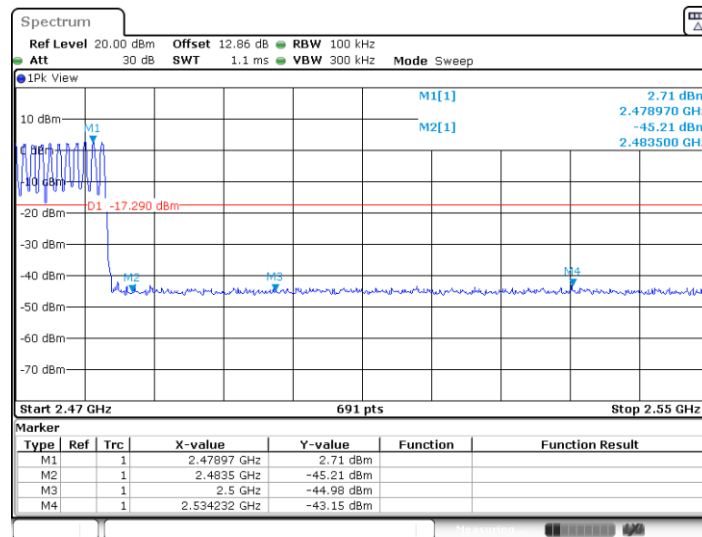




2DH1_Ant7_Low_2402

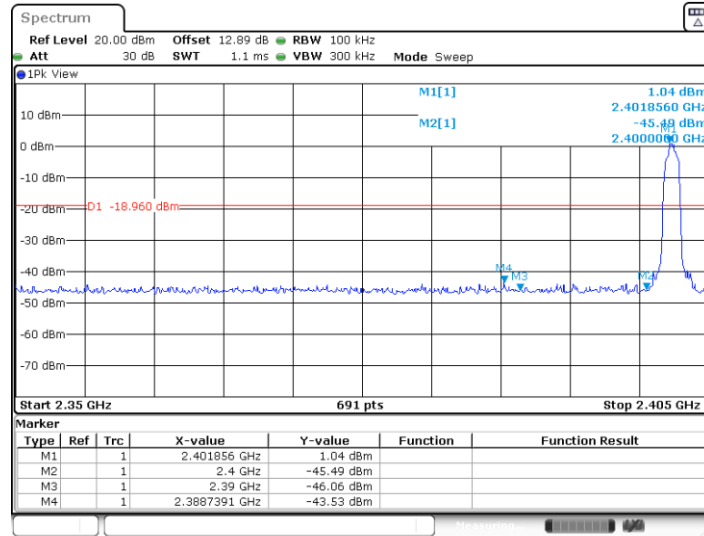


2DH1_Ant7_High_2480

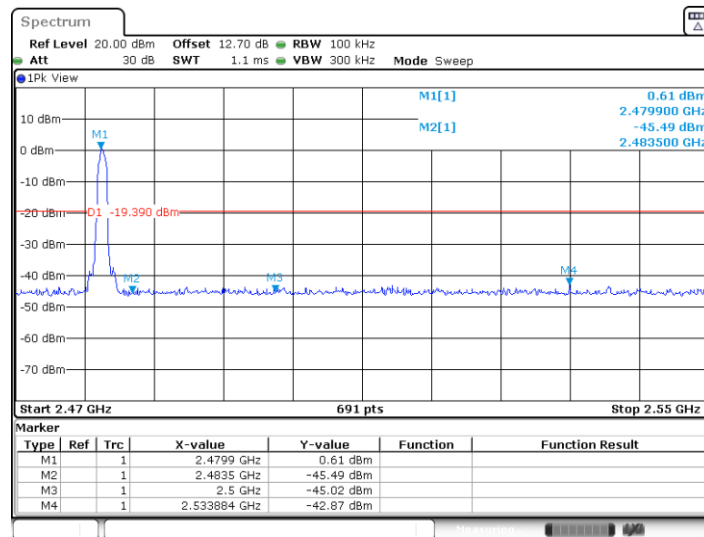




2DH1_Ant7_Low_Hop_2402

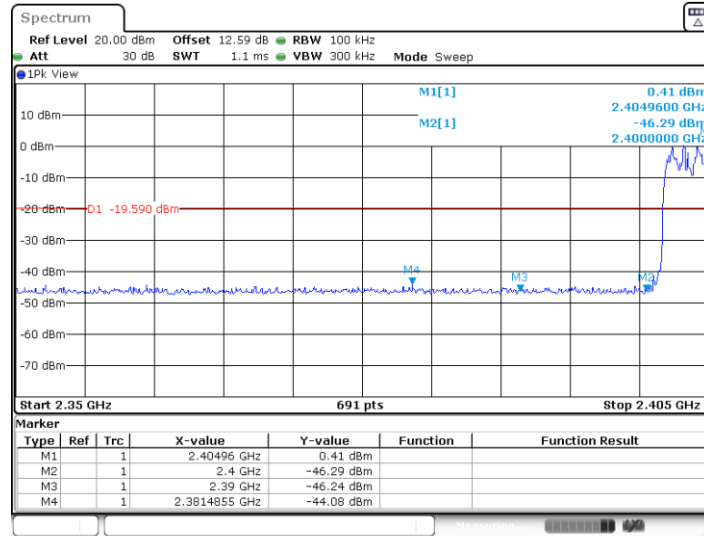


2DH1_Ant7_High_Hop_2480

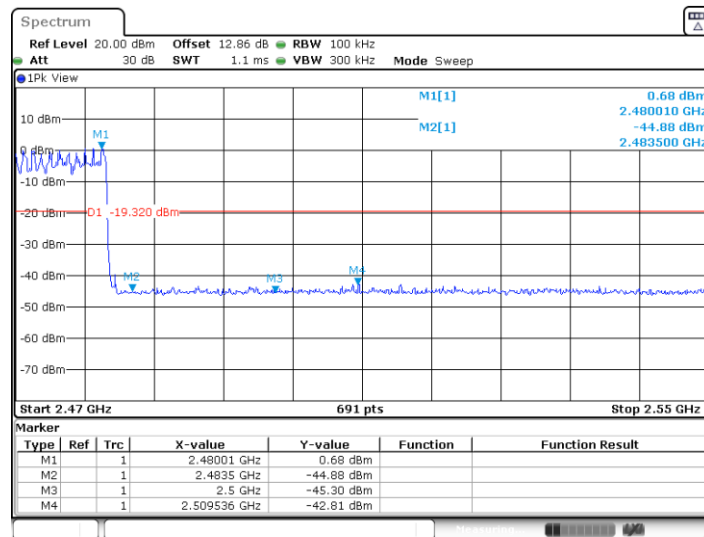




3DH1_Ant7_Low_2402

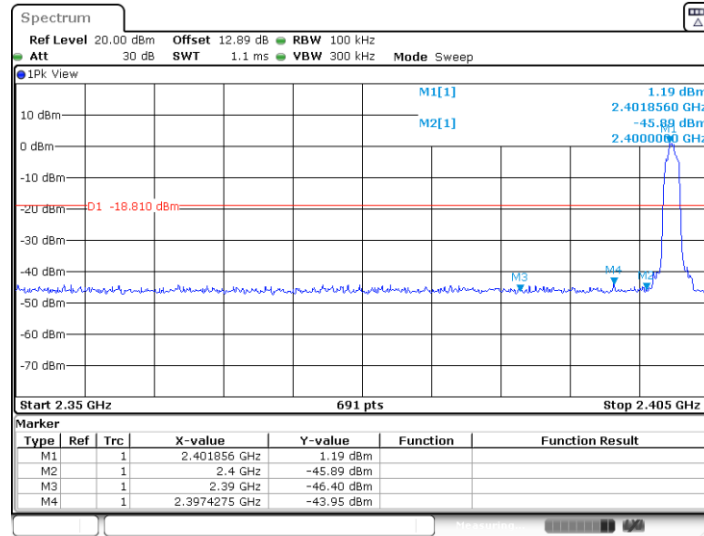


3DH1_Ant7_High_2480

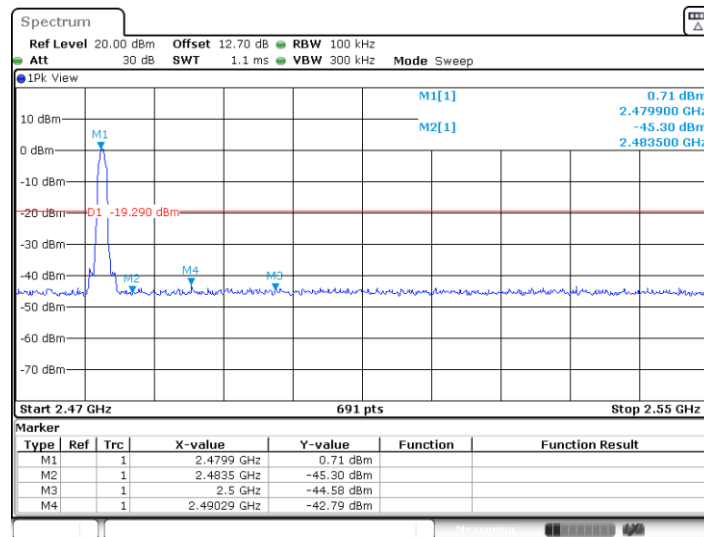




3DH1_Ant7_Low_Hop_2402

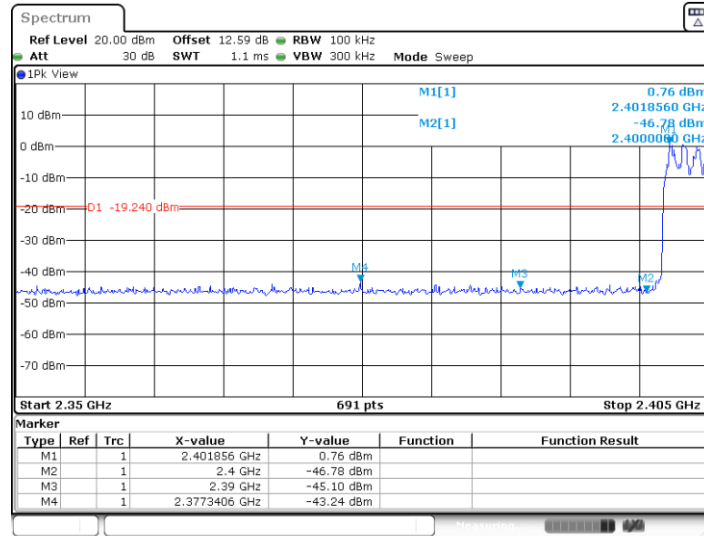

3DH1_Ant7_High_Hop_2480

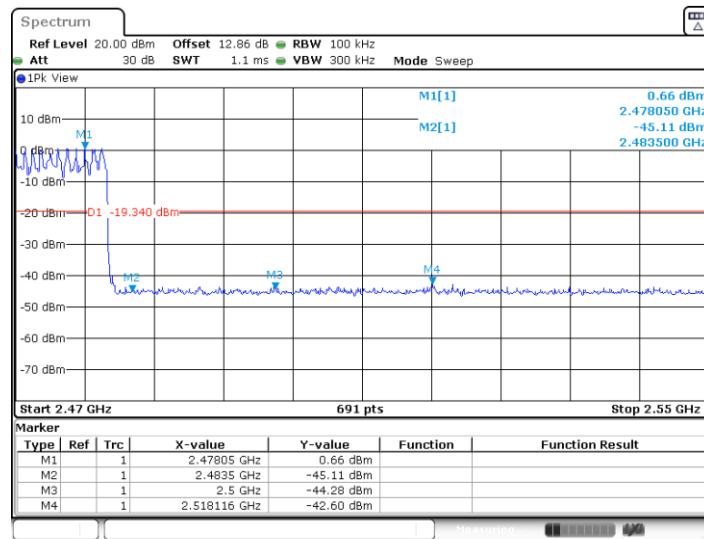

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

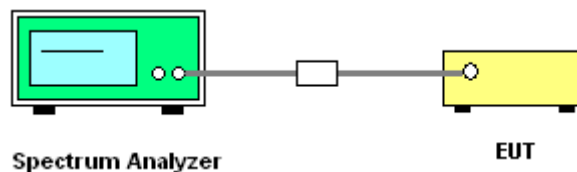


3.7.5 Test Result of Conducted Spurious Emission


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant7	2402	Reference	3.31	3.31	---	---
			30~1000	3.31	-54.19	≤-16.69	PASS
			1000~26500	3.31	-45.82	≤-16.69	PASS
		2441	Reference	2.73	2.73	---	---
			30~1000	2.73	-54.47	≤-17.27	PASS
			1000~26500	2.73	-46.42	≤-17.27	PASS
		2480	Reference	2.75	2.75	---	---
			30~1000	2.75	-54.69	≤-17.25	PASS
			1000~26500	2.75	-46.48	≤-17.25	PASS
2DH1	Ant7	2402	Reference	0.96	0.96	---	---
			30~1000	0.96	-55.08	≤-19.04	PASS
			1000~26500	0.96	-45.56	≤-19.04	PASS
		2441	Reference	0.50	0.50	---	---
			30~1000	0.50	-54.77	≤-19.5	PASS
			1000~26500	0.50	-46.45	≤-19.5	PASS
		2480	Reference	0.56	0.56	---	---
			30~1000	0.56	-54.74	≤-19.44	PASS
			1000~26500	0.56	-45.99	≤-19.44	PASS
3DH1	Ant7	2402	Reference	1.13	1.13	---	---
			30~1000	1.13	-54.26	≤-18.87	PASS
			1000~26500	1.13	-45.88	≤-18.87	PASS
		2441	Reference	0.67	0.67	---	---
			30~1000	0.67	-53.7	≤-19.33	PASS
			1000~26500	0.67	-45.95	≤-19.33	PASS
		2480	Reference	0.73	0.73	---	---
			30~1000	0.73	-54.94	≤-19.27	PASS
			1000~26500	0.73	-46.88	≤-19.27	PASS



DH5_Ant7_2402_0~Reference

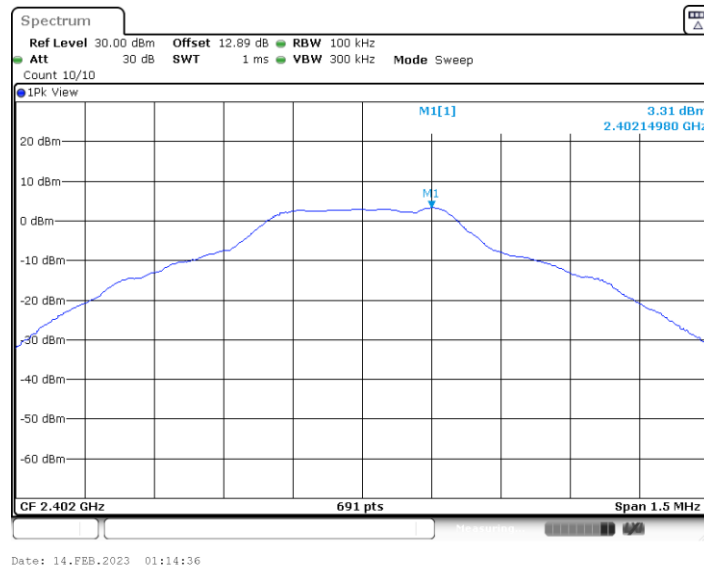


DH5_Ant7_2402_30~1000

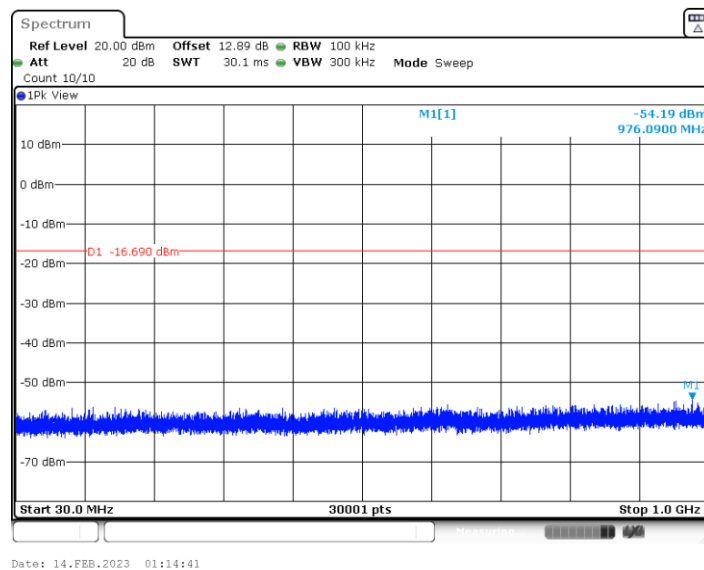




DH5_Ant7_2402_1000~26500

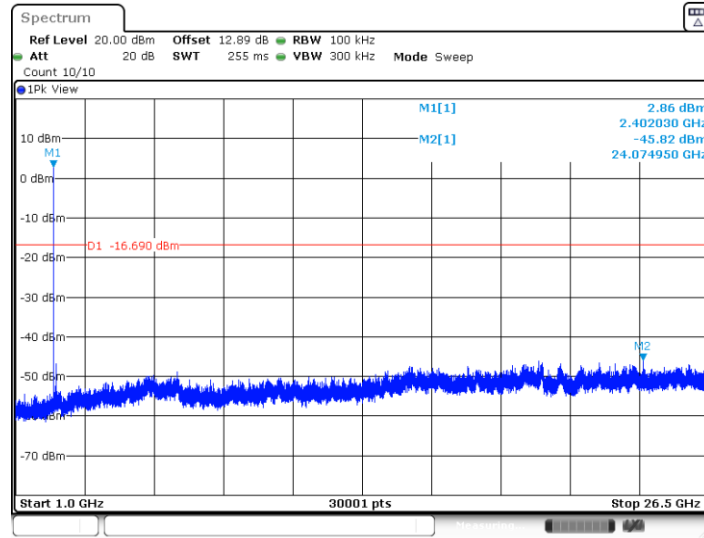

Date: 14.FEB.2023 01:14:57


DH5_Ant7_2441_0~Reference

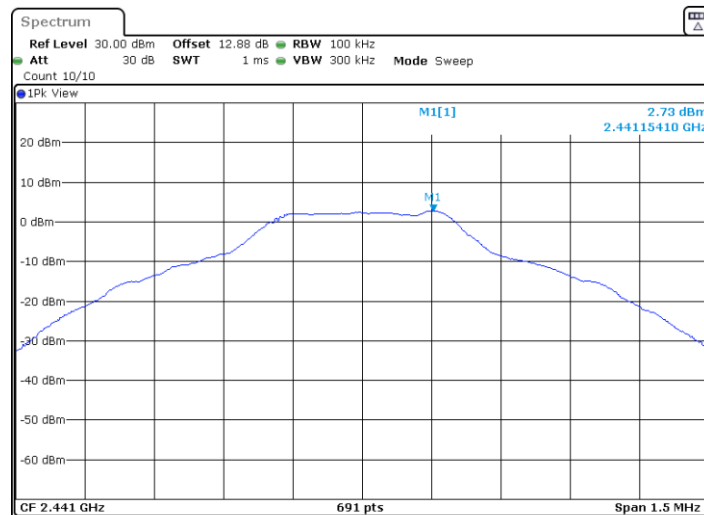


Date: 14.FEB.2023 01:15:41




DH5_Ant7_2441_30~1000

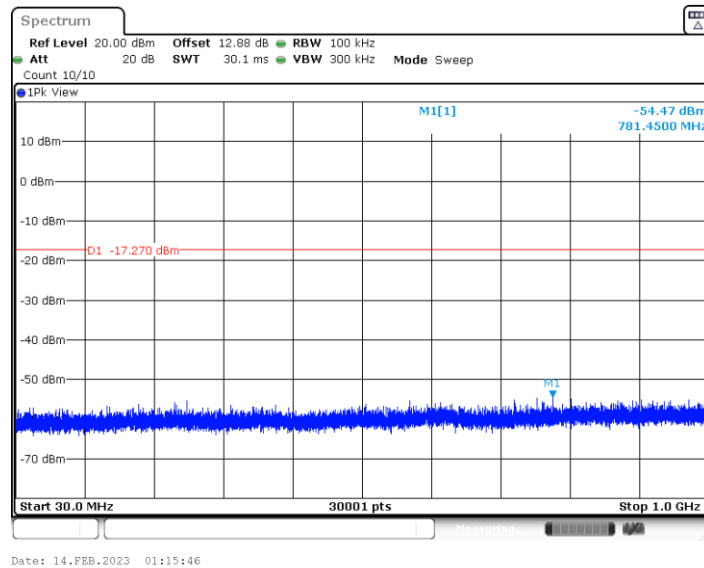


DH5_Ant7_2441_1000~26500

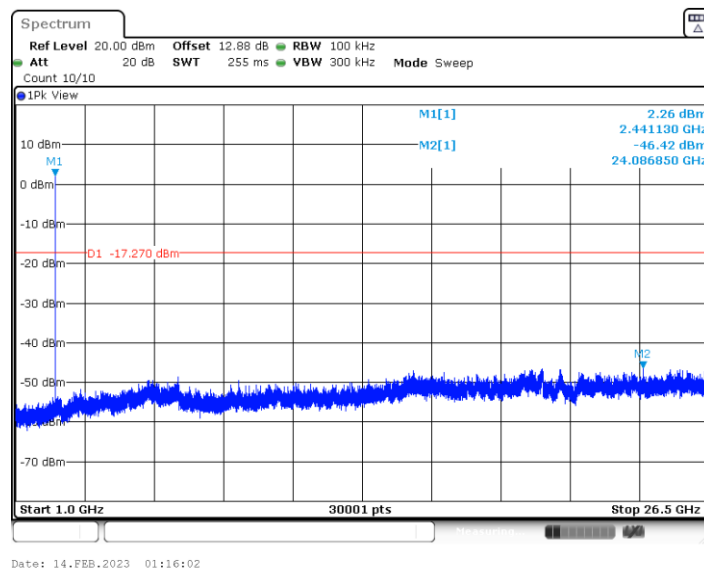

DH5_Ant7_2480_0~Reference

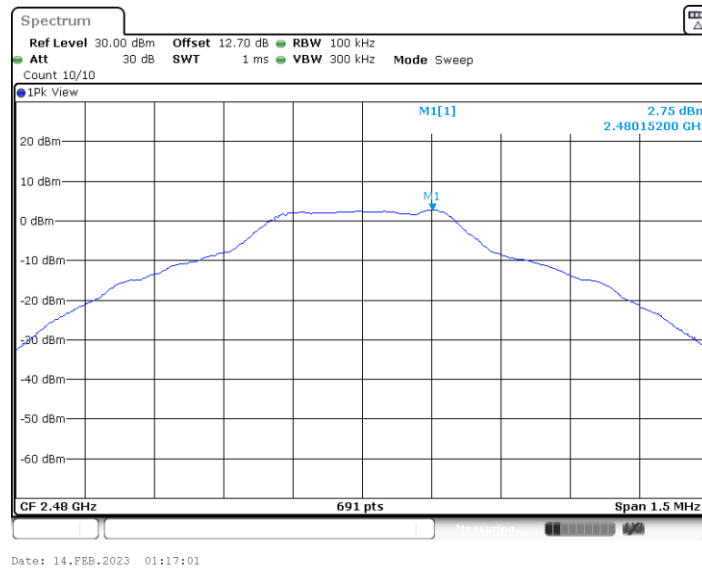


DH5_Ant7_2480_30~1000

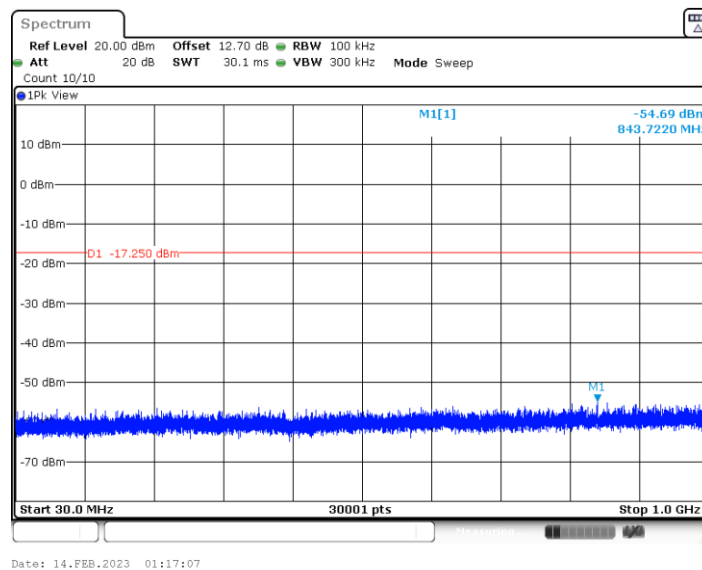




DH5_Ant7_2480_1000~26500

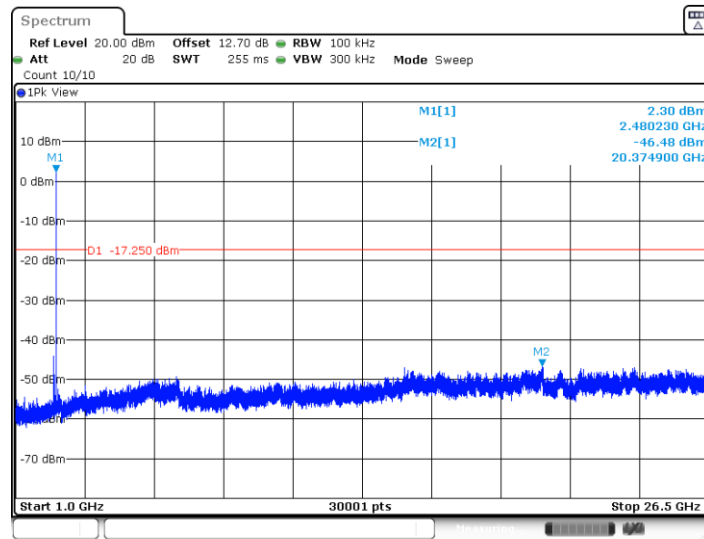

Date: 14.FEB.2023 01:17:22


2DH1_Ant7_2402_0~Reference

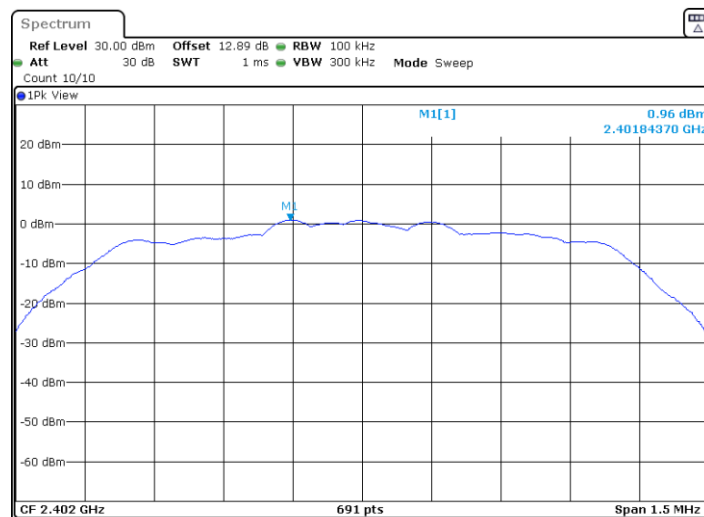

Date: 14.FEB.2023 01:18:16




2DH1_Ant7_2402_30~1000

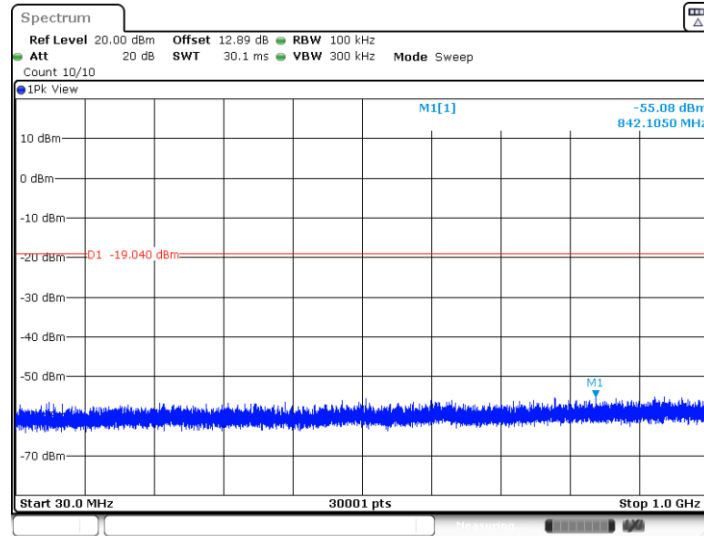

Date: 14.FEB.2023 01:18:21


2DH1_Ant7_2402_1000~26500

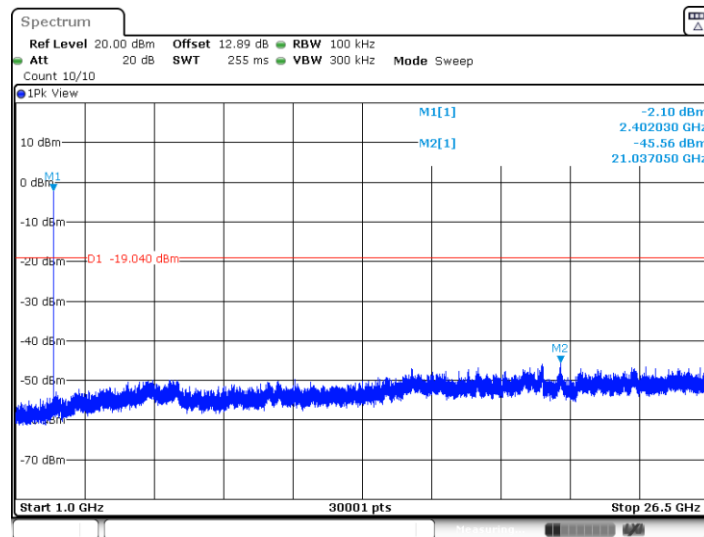


Date: 14.FEB.2023 01:18:37




2DH1_Ant7_2441_0~Reference

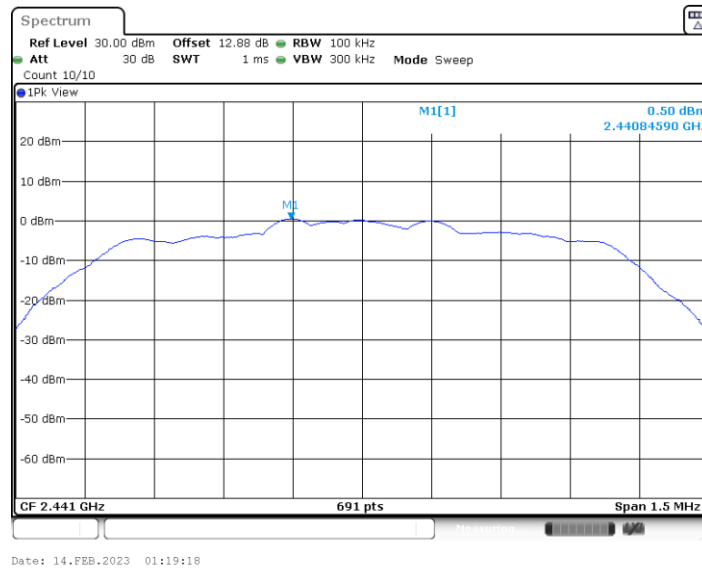


2DH1_Ant7_2441_30~1000

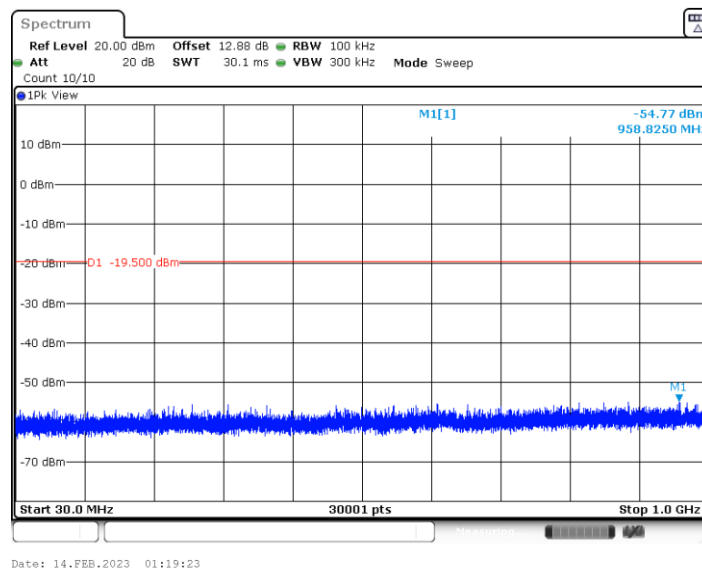

2DH1_Ant7_2441_1000~26500

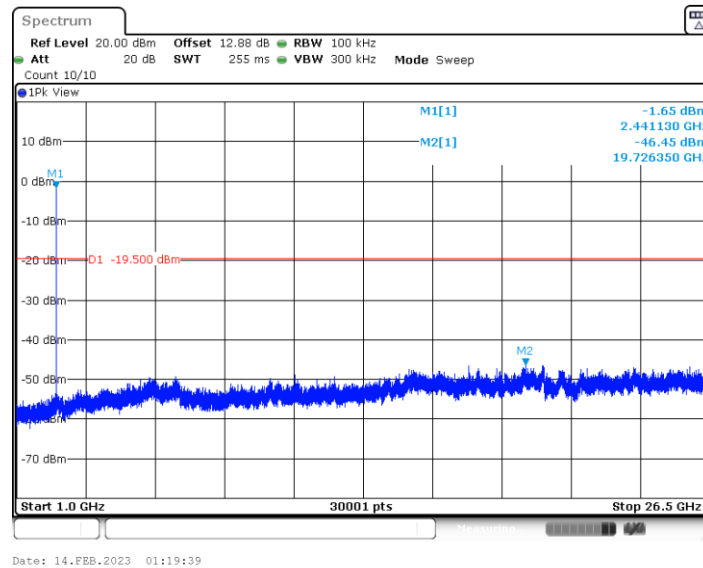


2DH1_Ant7_2480_0~Reference

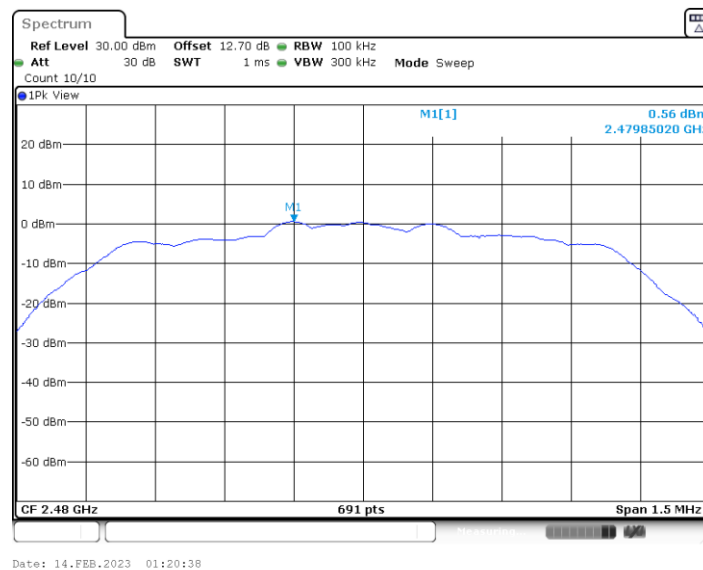




2DH1_Ant7_2480_30~1000

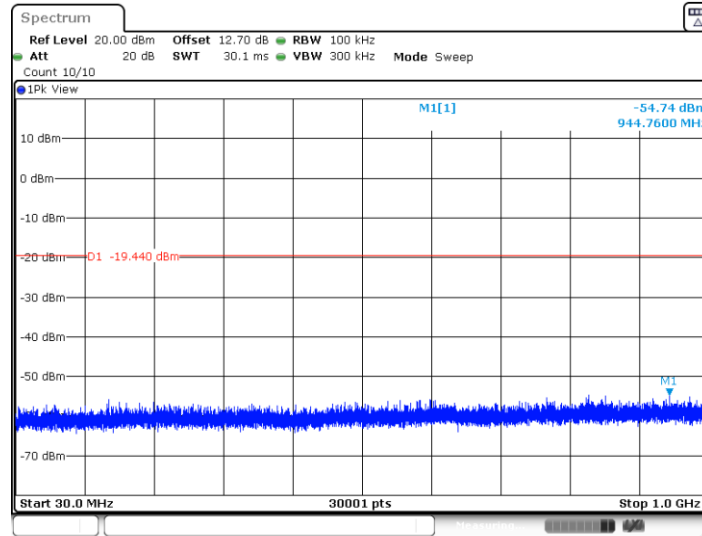


2DH1_Ant7_2480_1000~26500

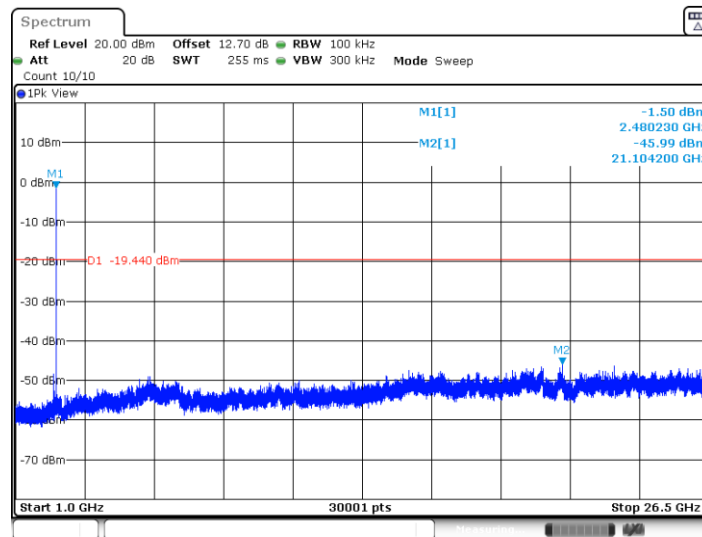




3DH1_Ant7_2402_0~Reference

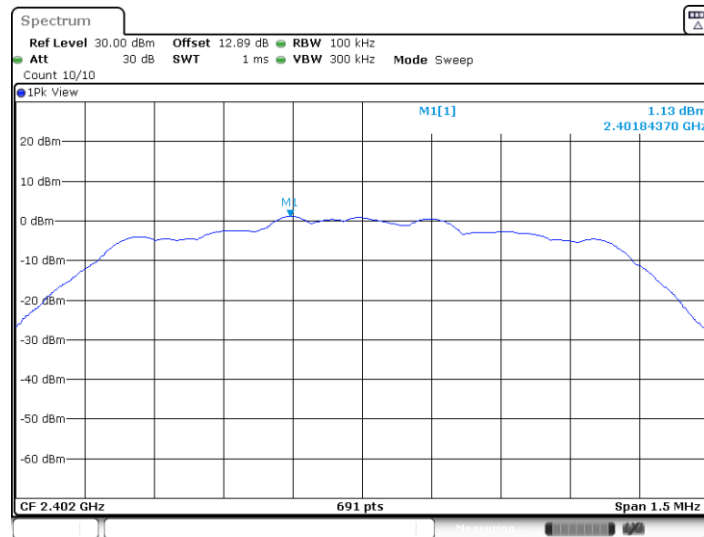


Date: 14.FEB.2023 01:21:59

3DH1_Ant7_2402_30~1000

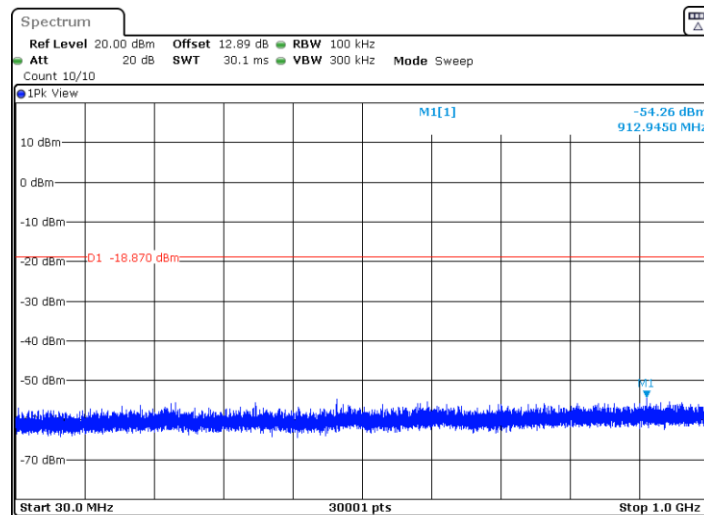


Date: 14.FEB.2023 01:22:04

3DH1_Ant7_2402_1000~26500

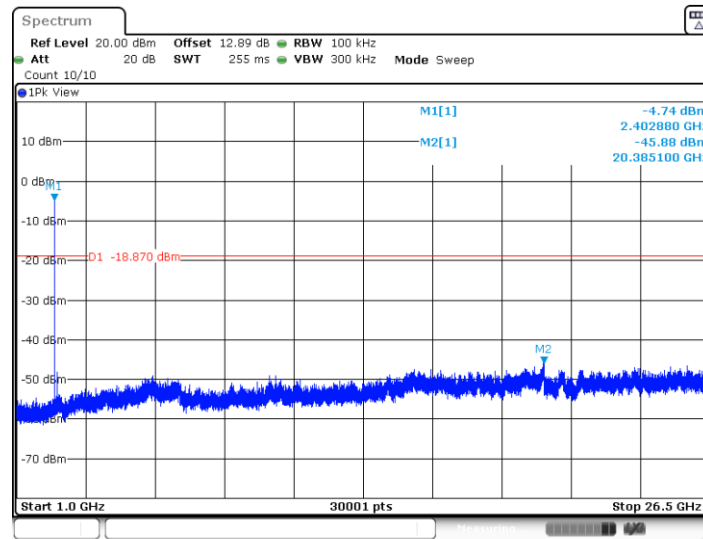

Date: 14.FEB.2023 01:22:20


3DH1_Ant7_2441_0~Reference

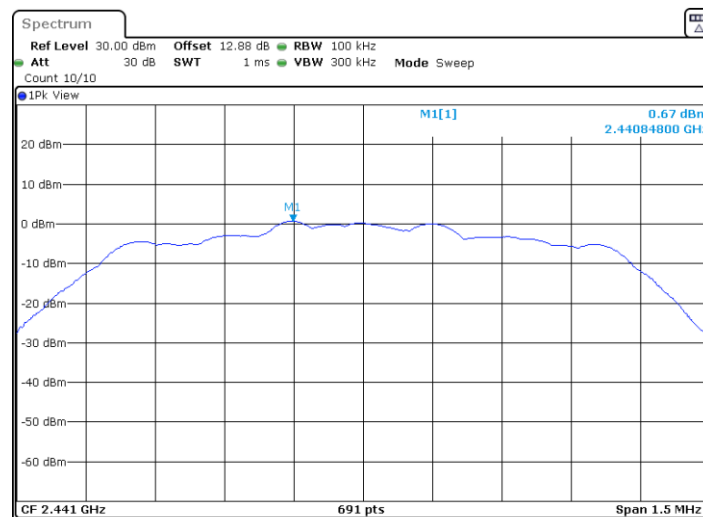

Date: 14.FEB.2023 01:22:58




3DH1_Ant7_2441_30~1000

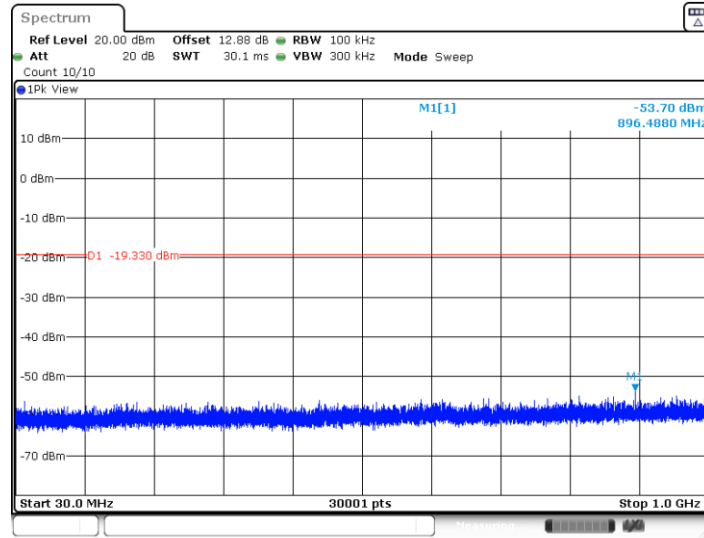

Date: 14.FEB.2023 01:23:03


3DH1_Ant7_2441_1000~26500

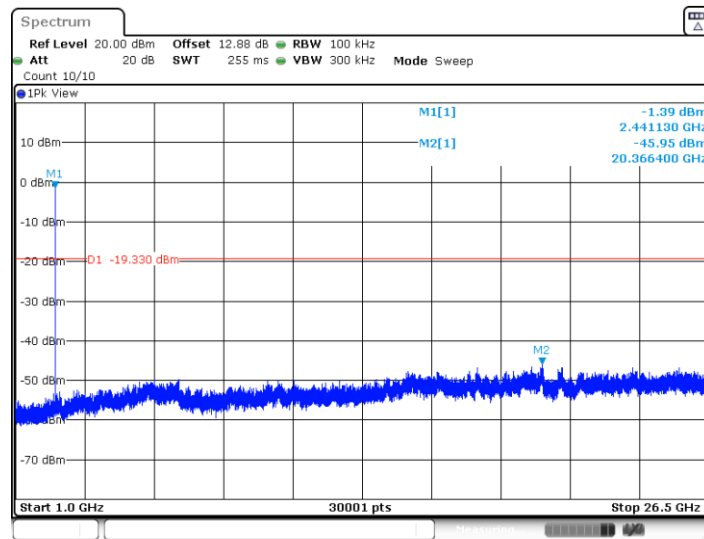


Date: 14.FEB.2023 01:23:19



3DH1_Ant7_2480_0~Reference

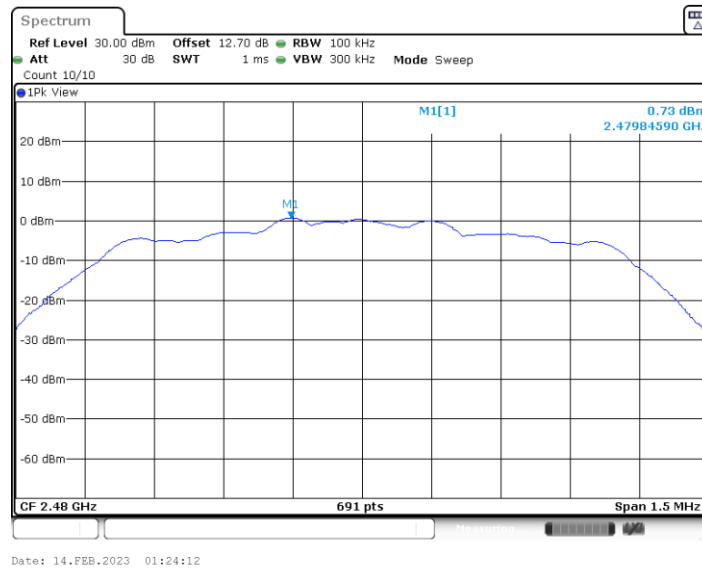


3DH1_Ant7_2480_30~1000

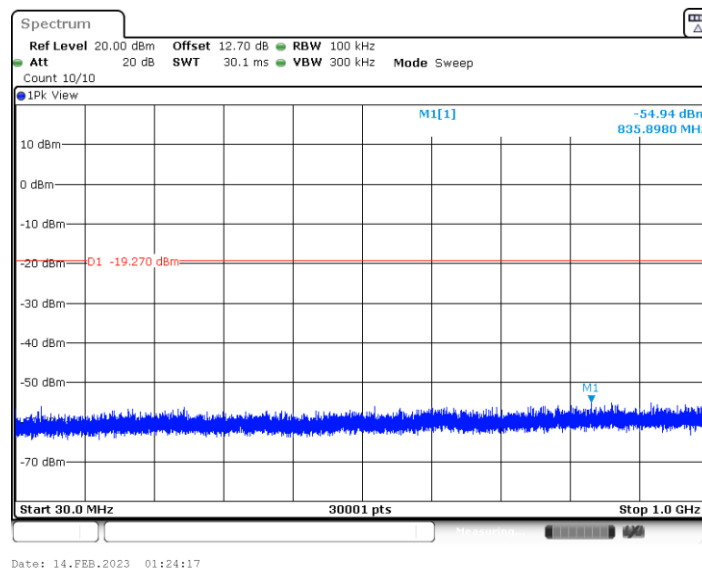



3DH1_Ant7_2480_1000~26500

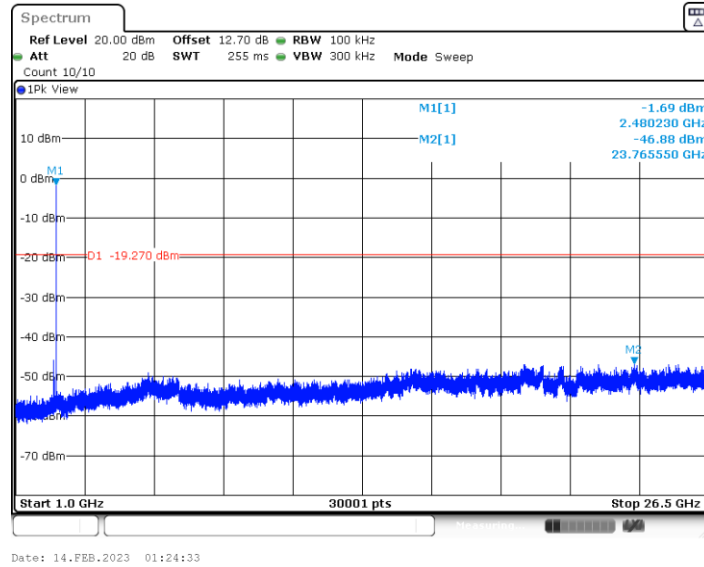

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

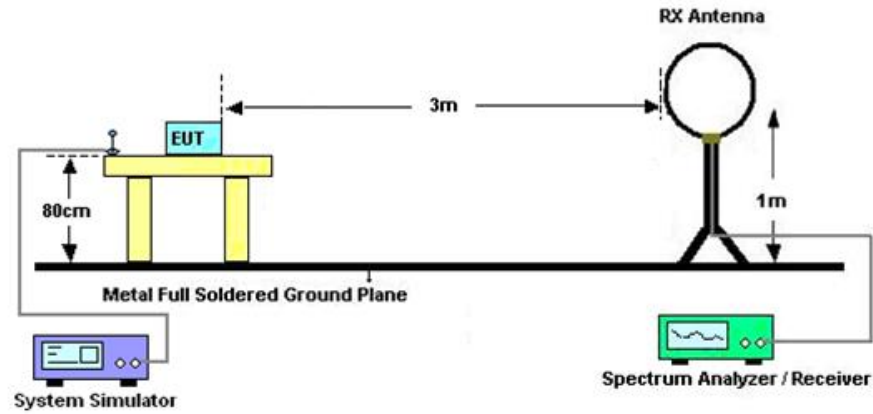

For radiated emissions from 30MHz to 1GHz

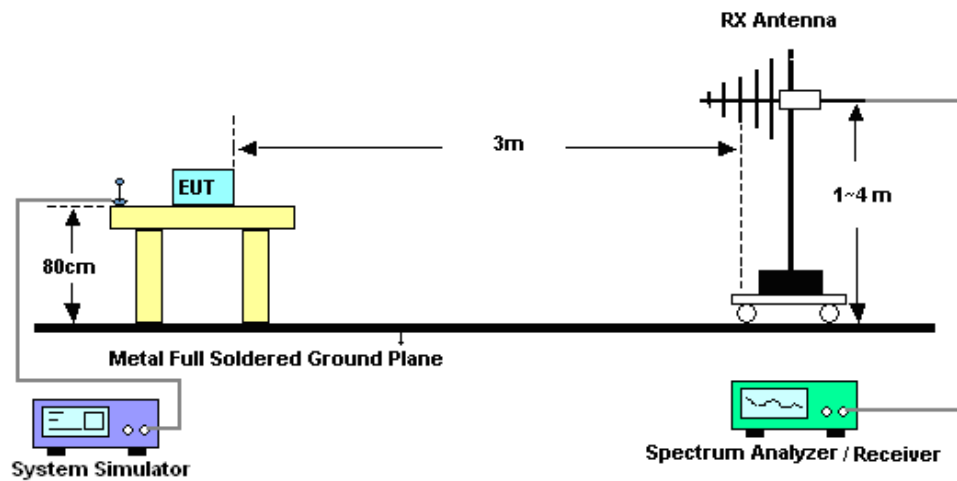

For radiated emissions above 1GHz

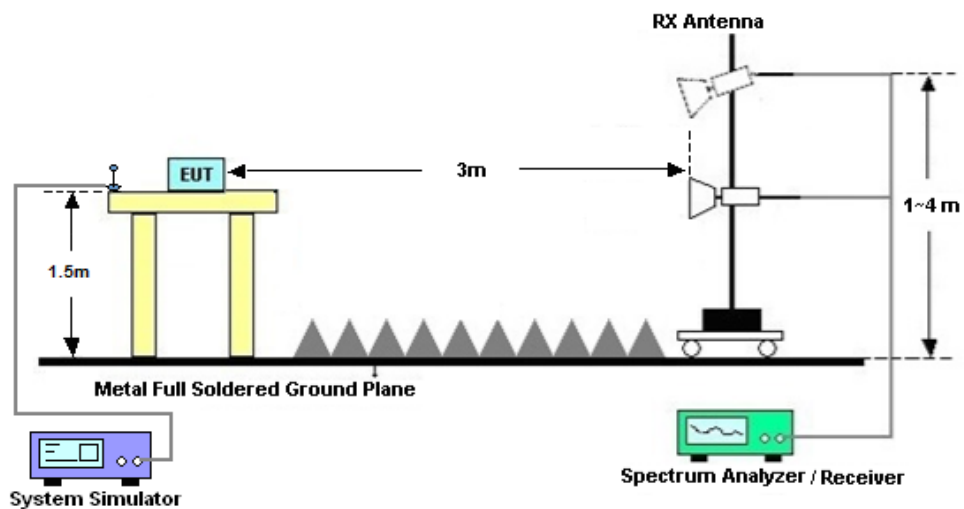

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

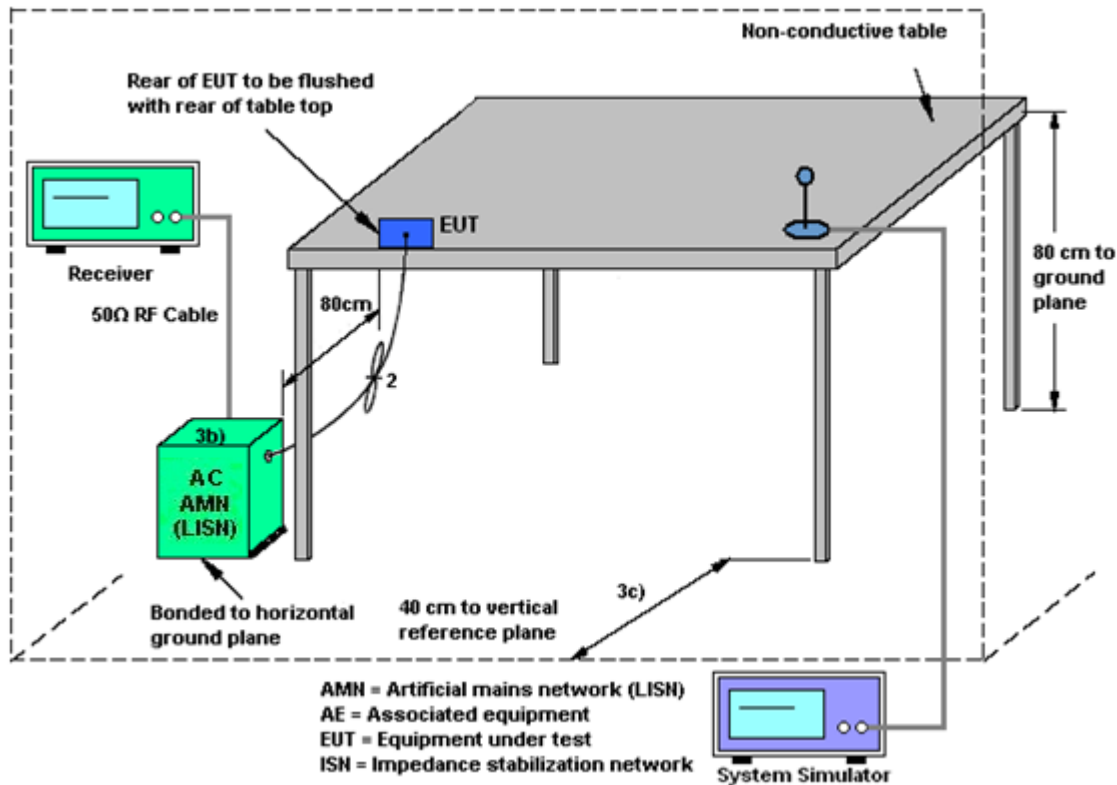

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 02, 2023~ Feb. 14, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Feb. 02, 2023~ Feb. 14, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Feb. 02, 2023~ Feb. 14, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 11, 2022	Mar. 02, 2023	Jul. 10, 2023	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz; Max 30dBm	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 02, 2023	Oct. 15, 2023	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz~1GHz	Aug. 26, 2022	Mar. 02, 2023	Aug. 25, 2023	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 08, 2022	Mar. 02, 2023	Jul. 07, 2023	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Mar. 02, 2023	Jan. 07, 2024	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Mar. 02, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Mar. 02, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Mar. 02, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

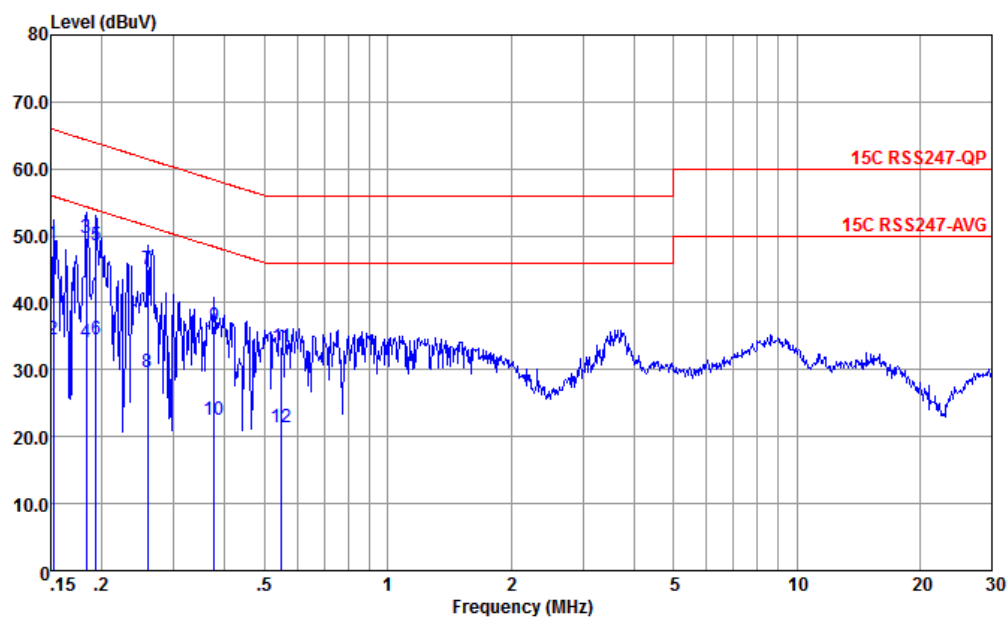


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	48.70	-17.17	65.87	38.20	0.07	10.43	QP
2	0.152	34.60	-21.27	55.87	24.10	0.07	10.43	Average
3 *	0.183	49.66	-14.67	64.33	39.21	0.03	10.42	QP
4	0.183	34.06	-20.27	54.33	23.61	0.03	10.42	Average
5	0.193	48.65	-15.24	63.89	38.20	0.03	10.42	QP
6	0.193	34.65	-19.24	53.89	24.20	0.03	10.42	Average
7	0.259	45.02	-16.45	61.47	34.59	0.05	10.38	QP
8	0.259	29.72	-21.75	51.47	19.29	0.05	10.38	Average
9	0.377	36.53	-21.81	58.34	26.20	0.02	10.31	QP
10	0.377	22.53	-25.81	48.34	12.20	0.02	10.31	Average
11	0.549	33.35	-22.65	56.00	23.20	-0.05	10.20	QP
12	0.549	21.35	-24.65	46.00	11.20	-0.05	10.20	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

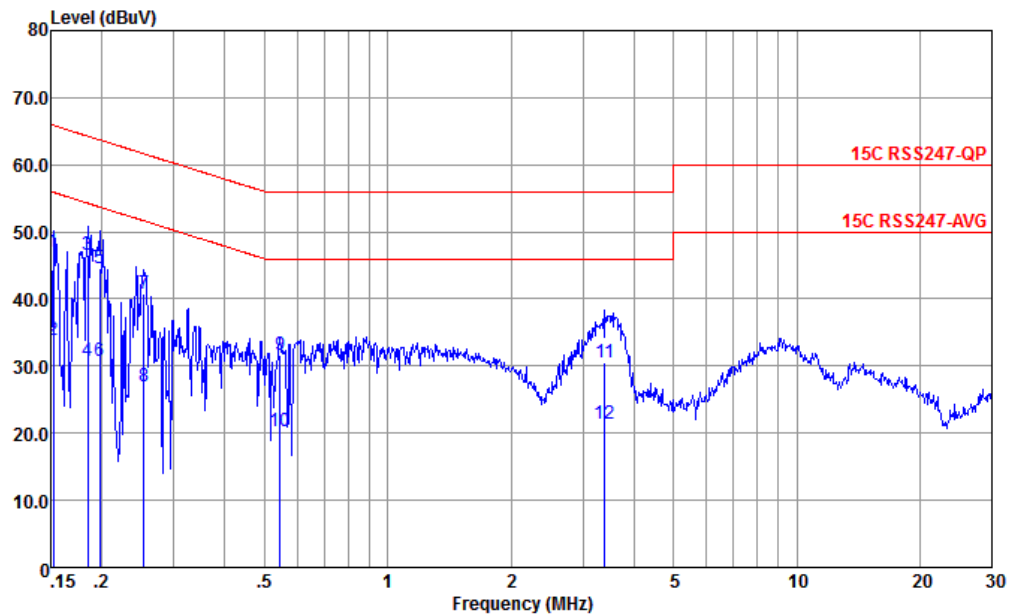

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	47.06	-18.81	65.87	36.60	0.03	10.43	QP
2	0.152	33.96	-21.91	55.87	23.50	0.03	10.43	Average
3 *	0.184	46.67	-17.61	64.28	36.21	0.04	10.42	QP
4	0.184	30.77	-23.51	54.28	20.31	0.04	10.42	Average
5	0.198	44.67	-19.04	63.71	34.20	0.05	10.42	QP
6	0.198	30.67	-23.04	53.71	20.20	0.05	10.42	Average
7	0.253	40.87	-20.77	61.64	30.50	-0.01	10.38	QP
8	0.253	26.97	-24.67	51.64	16.60	-0.01	10.38	Average
9	0.546	31.61	-24.39	56.00	21.49	-0.08	10.20	QP
10	0.546	20.31	-25.69	46.00	10.19	-0.08	10.20	Average
11	3.399	30.53	-25.47	56.00	20.59	-0.12	10.06	QP
12	3.399	21.43	-24.57	46.00	11.49	-0.12	10.06	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	7	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	7	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	7	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 28	2400-2483.5	7	Bluetooth BR_GFSK	39	2441	1Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2339.12	55.51	74.00	-18.49	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	41.95	74.00	-32.05	V	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	2365.90	56.06	74.00	-17.94	V	PEAK	Pass	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	44.43	74.00	-29.57	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2498.94	55.71	74.00	-18.29	V	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	42.99	74.00	-31.01	V	PEAK	Pass	Harmonic
28	Bluetooth BR_GFSK	39	39.70	33.65	40.00	-6.35	V	Peak	Pass	LF

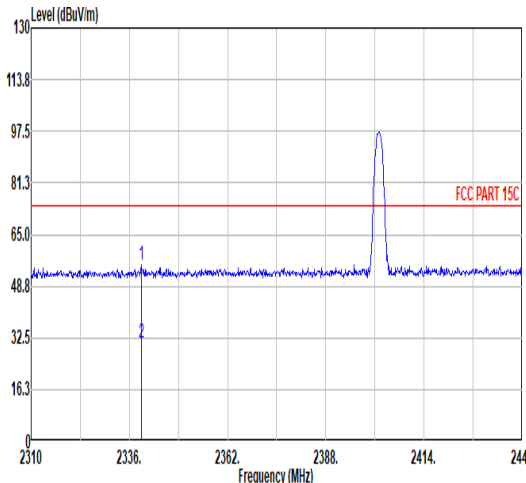
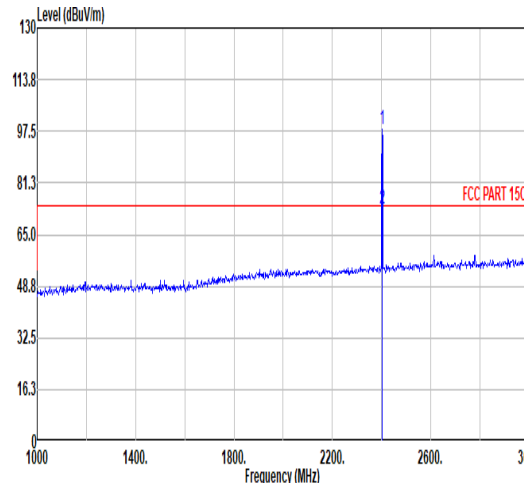


Mode	1																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	7																																																																																																									
Pol.	Horizontal										Fundamental																																																																																															
Peak																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2339.12</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>41.53</td><td>31.87</td><td>7.04</td><td>30.93</td></tr><tr><td>2</td><td>2339.12</td><td>30.72</td><td>54.00</td><td>-23.28</td><td>16.74</td><td>31.87</td><td>7.04</td><td>30.93</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2339.12	55.51	74.00	-18.49	41.53	31.87	7.04	30.93	2	2339.12	30.72	54.00	-23.28	16.74	31.87	7.04	30.93	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>98.09</td><td>74.00</td><td>24.09</td><td>83.83</td><td>32.00</td><td>7.13</td><td>30.87</td></tr><tr><td>2</td><td>2402.00</td><td>73.30</td><td>54.00</td><td>19.30</td><td>59.04</td><td>32.00</td><td>7.13</td><td>30.87</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	98.09	74.00	24.09	83.83	32.00	7.13	30.87	2	2402.00	73.30	54.00	19.30	59.04	32.00	7.13	30.87
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2339.12	55.51	74.00	-18.49	41.53	31.87	7.04	30.93																																																																																																		
2	2339.12	30.72	54.00	-23.28	16.74	31.87	7.04	30.93																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2402.00	98.09	74.00	24.09	83.83	32.00	7.13	30.87																																																																																																		
2	2402.00	73.30	54.00	19.30	59.04	32.00	7.13	30.87																																																																																																		

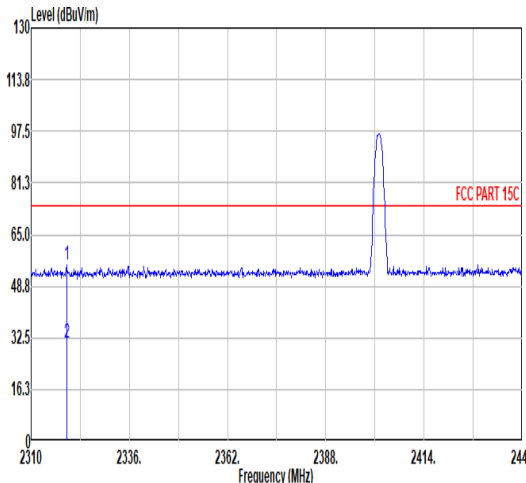
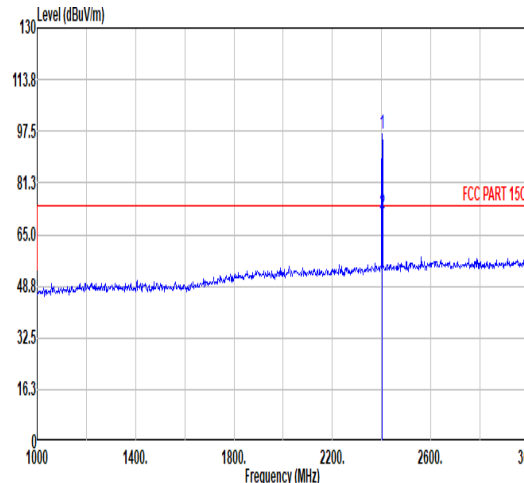


Mode	1																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	7																																																																																																									
Pol.	Vertical								Fundamental																																																																																																	
Peak																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2319.36</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>41.57</td><td>31.82</td><td>7.01</td><td>30.94</td></tr><tr><td>2</td><td>2319.36</td><td>30.67</td><td>54.00</td><td>-23.33</td><td>16.78</td><td>31.82</td><td>7.01</td><td>30.94</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2319.36	55.46	74.00	-18.54	41.57	31.82	7.01	30.94	2	2319.36	30.67	54.00	-23.33	16.78	31.82	7.01	30.94	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>96.54</td><td>74.00</td><td>22.54</td><td>82.28</td><td>32.00</td><td>7.13</td><td>30.87</td></tr><tr><td>2</td><td>2402.00</td><td>71.75</td><td>54.00</td><td>17.75</td><td>57.49</td><td>32.00</td><td>7.13</td><td>30.87</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.54	74.00	22.54	82.28	32.00	7.13	30.87	2	2402.00	71.75	54.00	17.75	57.49	32.00	7.13	30.87
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2319.36	55.46	74.00	-18.54	41.57	31.82	7.01	30.94																																																																																																		
2	2319.36	30.67	54.00	-23.33	16.78	31.82	7.01	30.94																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2402.00	96.54	74.00	22.54	82.28	32.00	7.13	30.87																																																																																																		
2	2402.00	71.75	54.00	17.75	57.49	32.00	7.13	30.87																																																																																																		

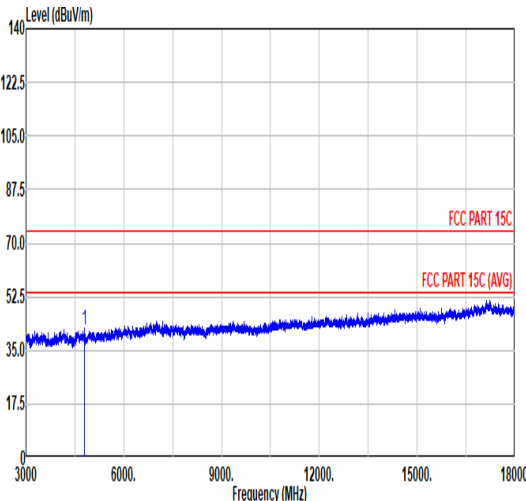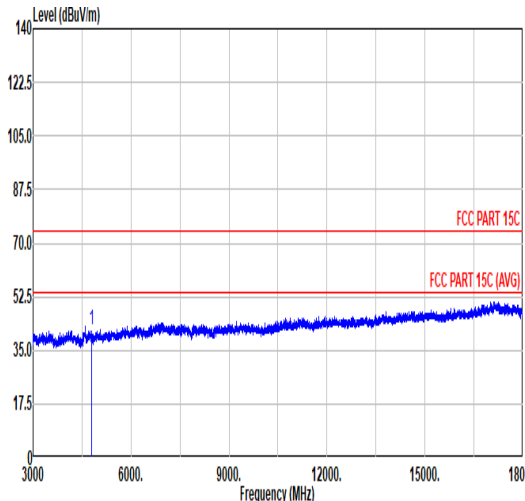


Mode	1																																																							
	Harmonic																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																							
ANT	7																																																							
Pol.	Horizontal						Vertical																																																	
Peak Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.72</td><td>74.00</td><td>-32.28</td><td>60.50</td><td>34.10</td><td>12.55</td><td>65.43</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.72	74.00	-32.28	60.50	34.10	12.55	65.43	0.00	300	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	4804.00	41.72	74.00	-32.28	60.50	34.10	12.55	65.43	0.00	300	0	PEAK																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.95</td><td>74.00</td><td>-32.05</td><td>60.73</td><td>34.10</td><td>12.55</td><td>65.43</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.95	74.00	-32.05	60.73	34.10	12.55	65.43	0.00	100	0	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	4804.00	41.95	74.00	-32.05	60.73	34.10	12.55	65.43	0.00	100	0	PEAK																																												

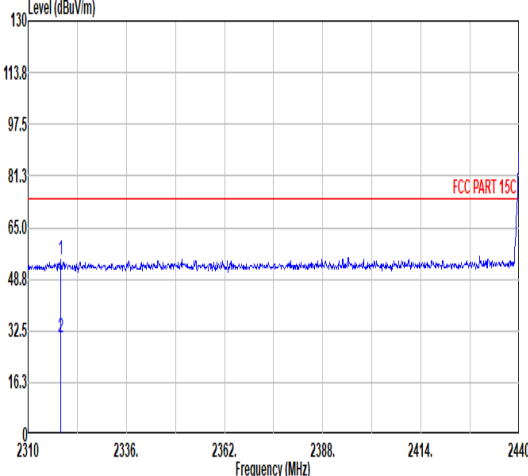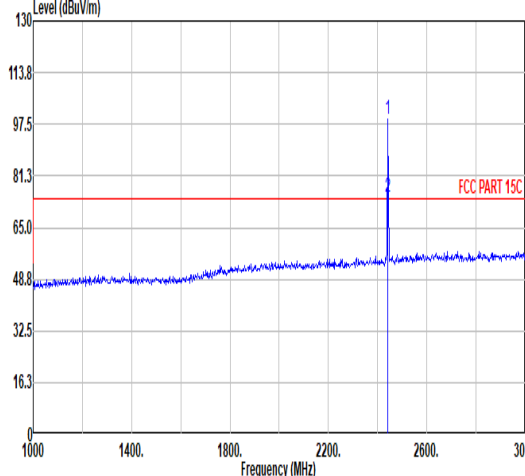

Mode	2																																																																																																																						
	Band Edge - L																																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																						
ANT	7																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2318.58</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>41.12</td><td>31.82</td><td>7.01</td><td>30.95</td><td>6.00</td><td>100</td><td>266 PEAK</td></tr><tr><td>2</td><td>2318.58</td><td>30.21</td><td>54.00</td><td>-23.79</td><td>16.33</td><td>31.82</td><td>7.01</td><td>30.95</td><td>6.00</td><td>100</td><td>266 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	2318.58	55.00	74.00	-19.00	41.12	31.82	7.01	30.95	6.00	100	266 PEAK	2	2318.58	30.21	54.00	-23.79	16.33	31.82	7.01	30.95	6.00	100	266 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2441.00</td><td>99.21</td><td>74.00</td><td>25.21</td><td>84.70</td><td>32.06</td><td>7.21</td><td>30.76</td><td>6.00</td><td>100</td><td>266 PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>74.42</td><td>54.00</td><td>20.42</td><td>59.91</td><td>32.06</td><td>7.21</td><td>30.76</td><td>6.00</td><td>100</td><td>266 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	2441.00	99.21	74.00	25.21	84.70	32.06	7.21	30.76	6.00	100	266 PEAK	2	2441.00	74.42	54.00	20.42	59.91	32.06	7.21	30.76	6.00	100	266 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																																												
1	2318.58	55.00	74.00	-19.00	41.12	31.82	7.01	30.95	6.00	100	266 PEAK																																																																																																												
2	2318.58	30.21	54.00	-23.79	16.33	31.82	7.01	30.95	6.00	100	266 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																																												
1	2441.00	99.21	74.00	25.21	84.70	32.06	7.21	30.76	6.00	100	266 PEAK																																																																																																												
2	2441.00	74.42	54.00	20.42	59.91	32.06	7.21	30.76	6.00	100	266 AVERAGE																																																																																																												

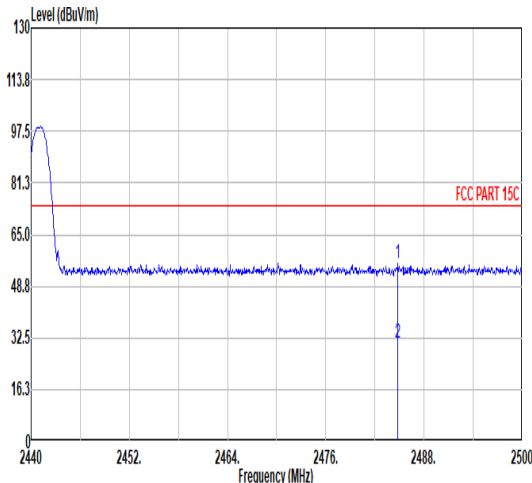


Mode	2																																																						
	Band Edge - R																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																						
ANT	7																																																						
Pol.	Horizontal					Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2484.82</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>40.96</td><td>32.13</td><td>7.29</td><td>30.64</td></tr><tr><td>2</td><td>2484.82</td><td>30.95</td><td>54.00</td><td>-23.05</td><td>16.17</td><td>32.13</td><td>7.29</td><td>30.64</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2484.82	55.74	74.00	-18.26	40.96	32.13	7.29	30.64	2	2484.82	30.95	54.00	-23.05	16.17	32.13	7.29	30.64	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																															
1	2484.82	55.74	74.00	-18.26	40.96	32.13	7.29	30.64																																															
2	2484.82	30.95	54.00	-23.05	16.17	32.13	7.29	30.64																																															





Mode	2																																																																																																																									
	Band Edge - L																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																									
ANT	7																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																			
Peak																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.90</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>41.97</td><td>31.92</td><td>7.08</td><td>30.91</td><td>6.00</td><td>375</td><td>214 PEAK</td></tr><tr><td>2</td><td>2365.90</td><td>31.27</td><td>54.00</td><td>-22.73</td><td>17.18</td><td>31.92</td><td>7.08</td><td>30.91</td><td>6.00</td><td>375</td><td>214 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.90	56.06	74.00	-17.94	41.97	31.92	7.08	30.91	6.00	375	214 PEAK	2	2365.90	31.27	54.00	-22.73	17.18	31.92	7.08	30.91	6.00	375	214 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>96.64</td><td>74.00</td><td>22.64</td><td>82.13</td><td>32.06</td><td>7.21</td><td>30.76</td><td>6.00</td><td>375</td><td>214 PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>71.85</td><td>54.00</td><td>17.85</td><td>57.34</td><td>32.06</td><td>7.21</td><td>30.76</td><td>6.00</td><td>375</td><td>214 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	96.64	74.00	22.64	82.13	32.06	7.21	30.76	6.00	375	214 PEAK	2	2441.00	71.85	54.00	17.85	57.34	32.06	7.21	30.76	6.00	375	214 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2365.90	56.06	74.00	-17.94	41.97	31.92	7.08	30.91	6.00	375	214 PEAK																																																																																																															
2	2365.90	31.27	54.00	-22.73	17.18	31.92	7.08	30.91	6.00	375	214 AVERAGE																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2441.00	96.64	74.00	22.64	82.13	32.06	7.21	30.76	6.00	375	214 PEAK																																																																																																															
2	2441.00	71.85	54.00	17.85	57.34	32.06	7.21	30.76	6.00	375	214 AVERAGE																																																																																																															


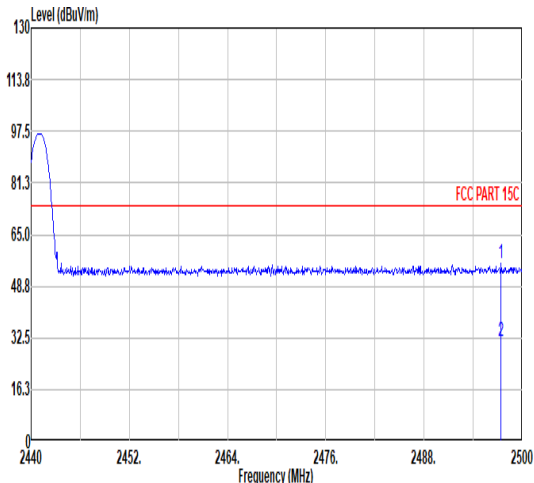


Mode	2																																																						
	Band Edge - R																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																						
ANT	7																																																						
Pol.	Vertical					Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2497.42</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>41.12</td><td>32.15</td><td>7.32</td><td>30.61</td></tr><tr><td>2</td><td>2497.42</td><td>31.19</td><td>54.00</td><td>-22.81</td><td>16.33</td><td>32.15</td><td>7.32</td><td>30.61</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2497.42	55.98	74.00	-18.02	41.12	32.15	7.32	30.61	2	2497.42	31.19	54.00	-22.81	16.33	32.15	7.32	30.61	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																															
1	2497.42	55.98	74.00	-18.02	41.12	32.15	7.32	30.61																																															
2	2497.42	31.19	54.00	-22.81	16.33	32.15	7.32	30.61																																															

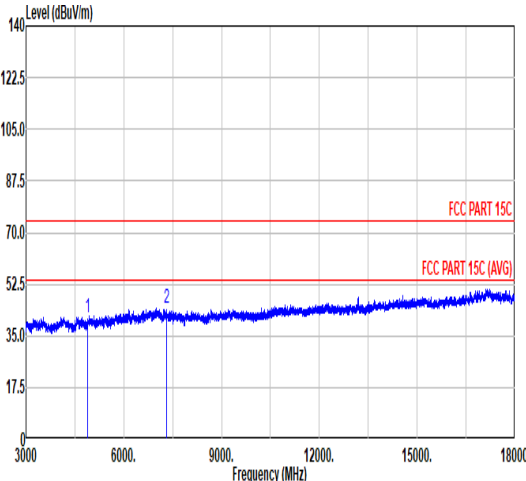
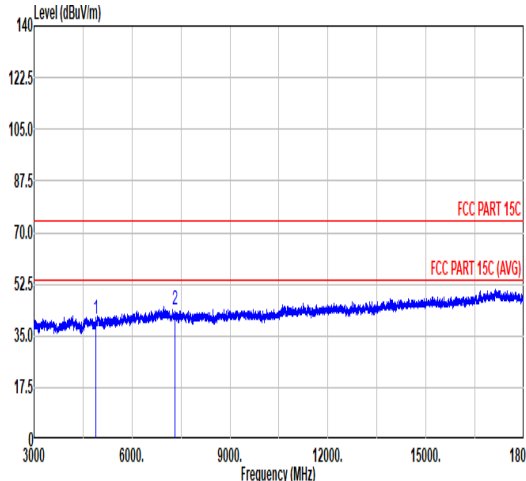


Mode	2																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																										
ANT	7																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																				
Peak Avg																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>41.28</td><td>74.00</td><td>-32.72</td><td>60.36</td><td>34.10</td><td>12.26</td><td>65.44</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>59.14</td><td>35.00</td><td>14.74</td><td>65.25</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	41.28	74.00	-32.72	60.36	34.10	12.26	65.44	0.00	300	0 PEAK	2	7323.00	44.43	74.00	-29.57	59.14	35.00	14.74	65.25	0.00	300	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>59.71</td><td>34.10</td><td>12.26</td><td>65.44</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>43.74</td><td>74.00</td><td>-30.26</td><td>58.45</td><td>35.00</td><td>14.74</td><td>65.25</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	40.63	74.00	-33.37	59.71	34.10	12.26	65.44	0.00	100	0 PEAK	2	7323.00	43.74	74.00	-30.26	58.45	35.00	14.74	65.25	0.00	100	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	4882.00	41.28	74.00	-32.72	60.36	34.10	12.26	65.44	0.00	300	0 PEAK																																																																																																																
2	7323.00	44.43	74.00	-29.57	59.14	35.00	14.74	65.25	0.00	300	0 PEAK																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4882.00	40.63	74.00	-33.37	59.71	34.10	12.26	65.44	0.00	100	0 PEAK																																																																																																																
2	7323.00	43.74	74.00	-30.26	58.45	35.00	14.74	65.25	0.00	100	0 PEAK																																																																																																																

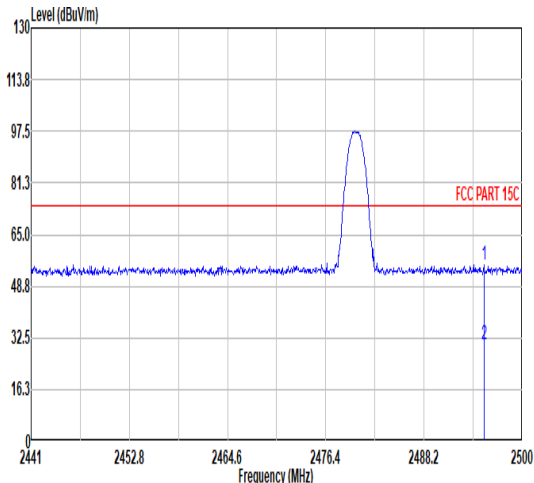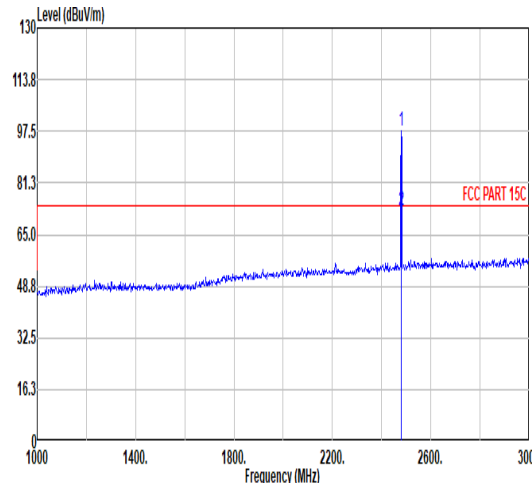


		3																																																																			
Mode		Band Edge																																																																			
		2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																			
ANT		7																																																																			
Pol.		Horizontal																																																																			
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.40</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>40.54</td><td>32.14</td><td>7.31</td><td>30.61</td><td>6.00</td><td>143</td><td>255</td><td>PEAK</td></tr><tr><td>2</td><td>2495.40</td><td>30.59</td><td>54.00</td><td>-23.41</td><td>15.75</td><td>32.14</td><td>7.31</td><td>30.61</td><td>6.00</td><td>143</td><td>255</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.40	55.38	74.00	-18.62	40.54	32.14	7.31	30.61	6.00	143	255	PEAK	2	2495.40	30.59	54.00	-23.41	15.75	32.14	7.31	30.61	6.00	143	255	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2495.40	55.38	74.00	-18.62	40.54	32.14	7.31	30.61	6.00	143	255	PEAK																																																									
2	2495.40	30.59	54.00	-23.41	15.75	32.14	7.31	30.61	6.00	143	255	AVERAGE																																																									
																																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.40</td><td>74.00</td><td>23.40</td><td>82.66</td><td>32.12</td><td>7.28</td><td>30.66</td><td>6.00</td><td>143</td><td>255</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>72.61</td><td>54.00</td><td>18.61</td><td>57.87</td><td>32.12</td><td>7.28</td><td>30.66</td><td>6.00</td><td>143</td><td>255</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.40	74.00	23.40	82.66	32.12	7.28	30.66	6.00	143	255	PEAK	2	2480.00	72.61	54.00	18.61	57.87	32.12	7.28	30.66	6.00	143	255	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2480.00	97.40	74.00	23.40	82.66	32.12	7.28	30.66	6.00	143	255	PEAK																																																									
2	2480.00	72.61	54.00	18.61	57.87	32.12	7.28	30.66	6.00	143	255	AVERAGE																																																									

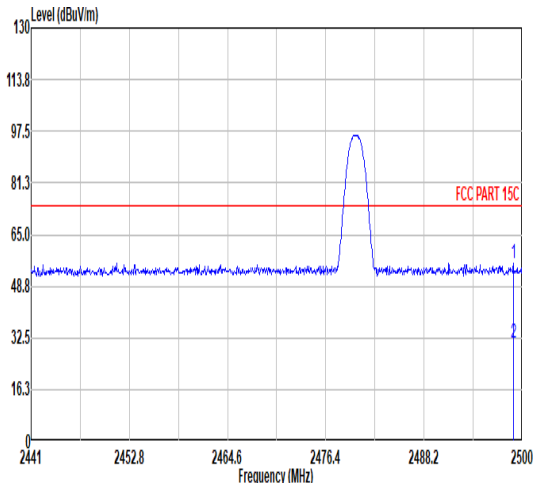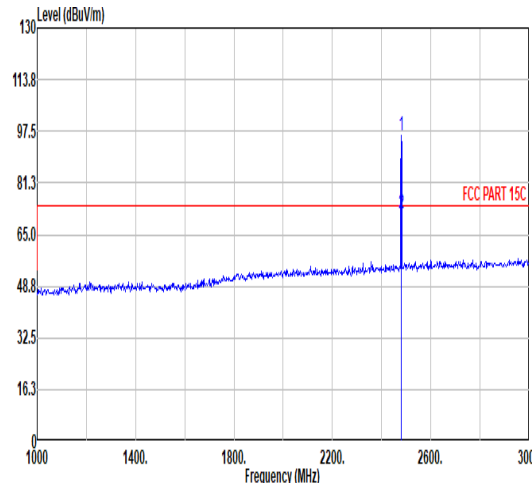



Mode	3																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																									
ANT	7																																																																																																									
Pol.	Vertical								Fundamental																																																																																																	
Peak																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2498.94</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>40.84</td><td>32.15</td><td>7.32</td><td>30.60</td></tr><tr><td>2</td><td>2498.94</td><td>30.92</td><td>54.00</td><td>-23.08</td><td>16.05</td><td>32.15</td><td>7.32</td><td>30.60</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2498.94	55.71	74.00	-18.29	40.84	32.15	7.32	30.60	2	2498.94	30.92	54.00	-23.08	16.05	32.15	7.32	30.60	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2480.00</td><td>96.25</td><td>74.00</td><td>22.25</td><td>81.51</td><td>32.12</td><td>7.28</td><td>30.66</td></tr><tr><td>2</td><td>2480.00</td><td>71.46</td><td>54.00</td><td>17.46</td><td>56.72</td><td>32.12</td><td>7.28</td><td>30.66</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	96.25	74.00	22.25	81.51	32.12	7.28	30.66	2	2480.00	71.46	54.00	17.46	56.72	32.12	7.28	30.66
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2498.94	55.71	74.00	-18.29	40.84	32.15	7.32	30.60																																																																																																		
2	2498.94	30.92	54.00	-23.08	16.05	32.15	7.32	30.60																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	2480.00	96.25	74.00	22.25	81.51	32.12	7.28	30.66																																																																																																		
2	2480.00	71.46	54.00	17.46	56.72	32.12	7.28	30.66																																																																																																		



Mode	3																																																									
	Harmonic																																																									
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																									
ANT	7																																																									
Pol.	Horizontal											Vertical																																														
Peak Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>41.69</td><td>74.00</td><td>-32.31</td><td>68.77</td><td>34.10</td><td>12.27</td><td>65.45</td></tr><tr><td>2</td><td>7440.00</td><td>42.64</td><td>74.00</td><td>-31.36</td><td>57.25</td><td>35.00</td><td>14.92</td><td>65.33</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	41.69	74.00	-32.31	68.77	34.10	12.27	65.45	2	7440.00	42.64	74.00	-31.36	57.25	35.00	14.92	65.33
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1	4960.00	41.69	74.00	-32.31	68.77	34.10	12.27	65.45																																																		
2	7440.00	42.64	74.00	-31.36	57.25	35.00	14.92	65.33																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>42.36</td><td>74.00</td><td>-31.64</td><td>61.44</td><td>34.10</td><td>12.27</td><td>65.45</td></tr><tr><td>2</td><td>7440.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>57.60</td><td>35.00</td><td>14.92</td><td>65.33</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	42.36	74.00	-31.64	61.44	34.10	12.27	65.45	2	7440.00	42.99	74.00	-31.01	57.60	35.00	14.92	65.33	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1	4960.00	42.36	74.00	-31.64	61.44	34.10	12.27	65.45																																																		
2	7440.00	42.99	74.00	-31.01	57.60	35.00	14.92	65.33																																																		

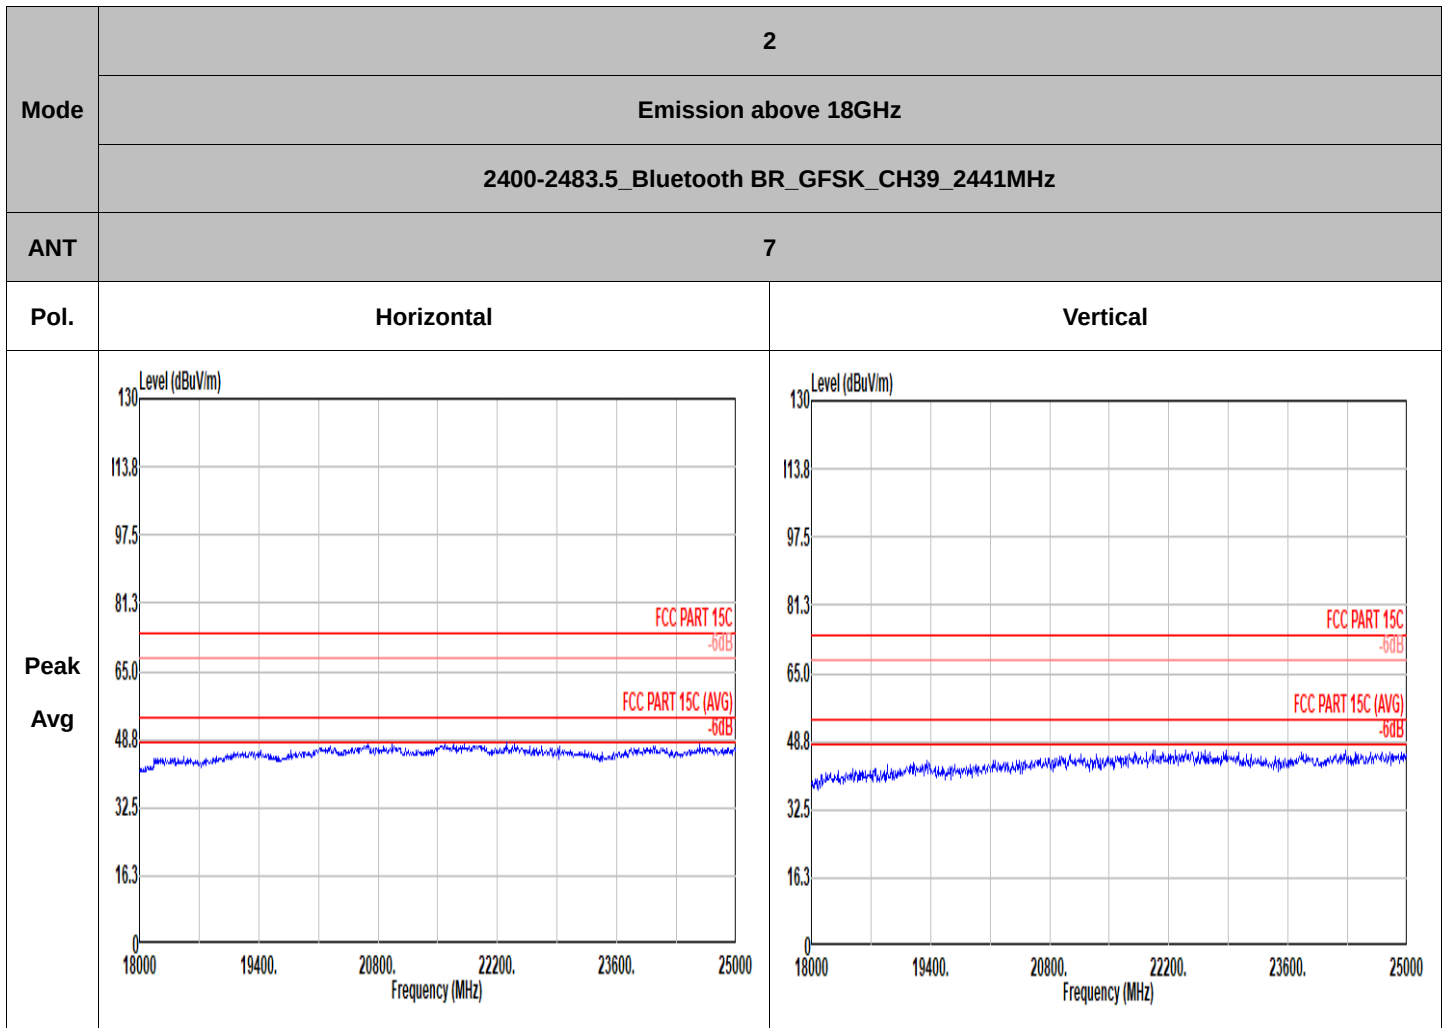


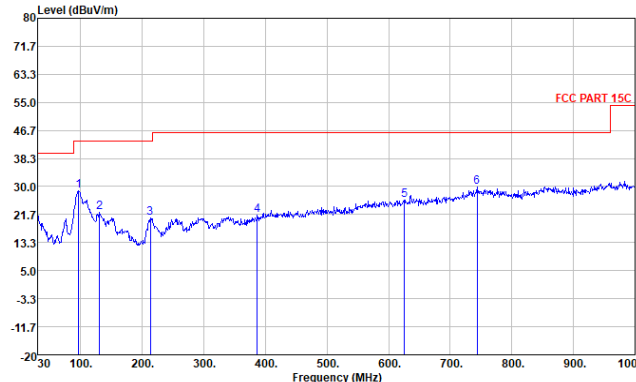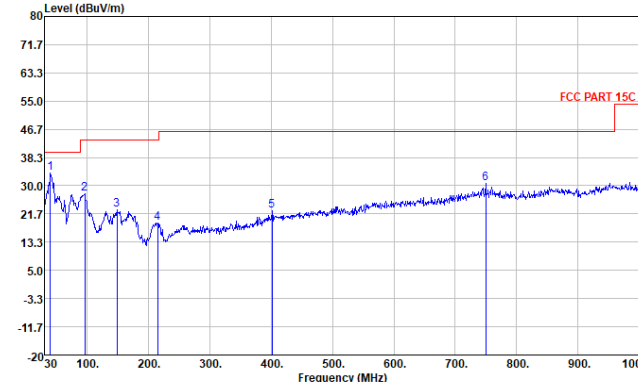


Mode	28																																																																																																																																																																																	
	Emission below 1GHz																																																																																																																																																																																	
	2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																	
ANT	7																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	 Site : 03CH08-KS Condition : FCC PART 15C 3m CBL 6111D 59913 HORIZONTAL Project : 311602 Mode : 28 IMEI : <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>96.93</td><td>28.74</td><td>-14.76</td><td>43.50</td><td>43.20</td><td>15.52</td><td>1.42</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>130.88</td><td>22.22</td><td>-21.28</td><td>43.50</td><td>34.40</td><td>17.57</td><td>1.65</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>213.33</td><td>20.67</td><td>-22.83</td><td>43.50</td><td>34.91</td><td>15.03</td><td>2.13</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>386.96</td><td>21.44</td><td>-24.56</td><td>46.00</td><td>28.67</td><td>21.35</td><td>2.87</td><td>31.45</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>625.58</td><td>26.00</td><td>-20.00</td><td>46.00</td><td>27.65</td><td>26.11</td><td>3.65</td><td>31.41</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>743.92</td><td>29.76</td><td>-16.24</td><td>46.00</td><td>29.22</td><td>27.90</td><td>3.98</td><td>31.34</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	96.93	28.74	-14.76	43.50	43.20	15.52	1.42	31.40	---	Peak	2	130.88	22.22	-21.28	43.50	34.40	17.57	1.65	31.40	---	Peak	3	213.33	20.67	-22.83	43.50	34.91	15.03	2.13	31.40	---	Peak	4	386.96	21.44	-24.56	46.00	28.67	21.35	2.87	31.45	---	Peak	5	625.58	26.00	-20.00	46.00	27.65	26.11	3.65	31.41	---	Peak	6	743.92	29.76	-16.24	46.00	29.22	27.90	3.98	31.34	---	Peak	 Site : 03CH08-KS Condition : FCC PART 15C 3m CBL 6111D 59913 VERTICAL Project : 311602 Mode : 28 IMEI : <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>39.70</td><td>33.65</td><td>-6.35</td><td>40.00</td><td>44.75</td><td>19.68</td><td>0.62</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>95.96</td><td>27.77</td><td>-15.73</td><td>43.50</td><td>42.37</td><td>15.39</td><td>1.41</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>148.34</td><td>22.77</td><td>-20.73</td><td>43.50</td><td>35.32</td><td>17.09</td><td>1.76</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>214.30</td><td>19.03</td><td>-24.47</td><td>43.50</td><td>33.24</td><td>15.05</td><td>2.14</td><td>31.40</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>401.51</td><td>22.54</td><td>-23.46</td><td>46.00</td><td>29.32</td><td>21.75</td><td>2.93</td><td>31.46</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>749.74</td><td>30.57</td><td>-15.43</td><td>46.00</td><td>29.80</td><td>28.11</td><td>3.99</td><td>31.33</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	39.70	33.65	-6.35	40.00	44.75	19.68	0.62	31.40	---	Peak	2	95.96	27.77	-15.73	43.50	42.37	15.39	1.41	31.40	---	Peak	3	148.34	22.77	-20.73	43.50	35.32	17.09	1.76	31.40	---	Peak	4	214.30	19.03	-24.47	43.50	33.24	15.05	2.14	31.40	---	Peak	5	401.51	22.54	-23.46	46.00	29.32	21.75	2.93	31.46	---	Peak	6	749.74	30.57	-15.43	46.00	29.80	28.11	3.99	31.33	---	Peak
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																									
1	96.93	28.74	-14.76	43.50	43.20	15.52	1.42	31.40	---	Peak																																																																																																																																																																								
2	130.88	22.22	-21.28	43.50	34.40	17.57	1.65	31.40	---	Peak																																																																																																																																																																								
3	213.33	20.67	-22.83	43.50	34.91	15.03	2.13	31.40	---	Peak																																																																																																																																																																								
4	386.96	21.44	-24.56	46.00	28.67	21.35	2.87	31.45	---	Peak																																																																																																																																																																								
5	625.58	26.00	-20.00	46.00	27.65	26.11	3.65	31.41	---	Peak																																																																																																																																																																								
6	743.92	29.76	-16.24	46.00	29.22	27.90	3.98	31.34	---	Peak																																																																																																																																																																								
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																									
1	39.70	33.65	-6.35	40.00	44.75	19.68	0.62	31.40	---	Peak																																																																																																																																																																								
2	95.96	27.77	-15.73	43.50	42.37	15.39	1.41	31.40	---	Peak																																																																																																																																																																								
3	148.34	22.77	-20.73	43.50	35.32	17.09	1.76	31.40	---	Peak																																																																																																																																																																								
4	214.30	19.03	-24.47	43.50	33.24	15.05	2.14	31.40	---	Peak																																																																																																																																																																								
5	401.51	22.54	-23.46	46.00	29.32	21.75	2.93	31.46	---	Peak																																																																																																																																																																								
6	749.74	30.57	-15.43	46.00	29.80	28.11	3.99	31.33	---	Peak																																																																																																																																																																								

Appendix C. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

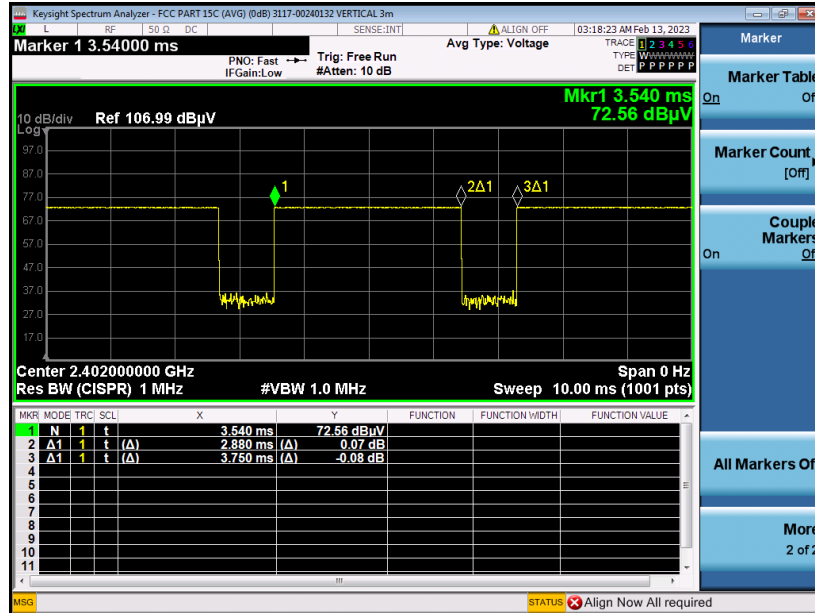

3DH5 on time (Count Pulses) Plot on Channel 39

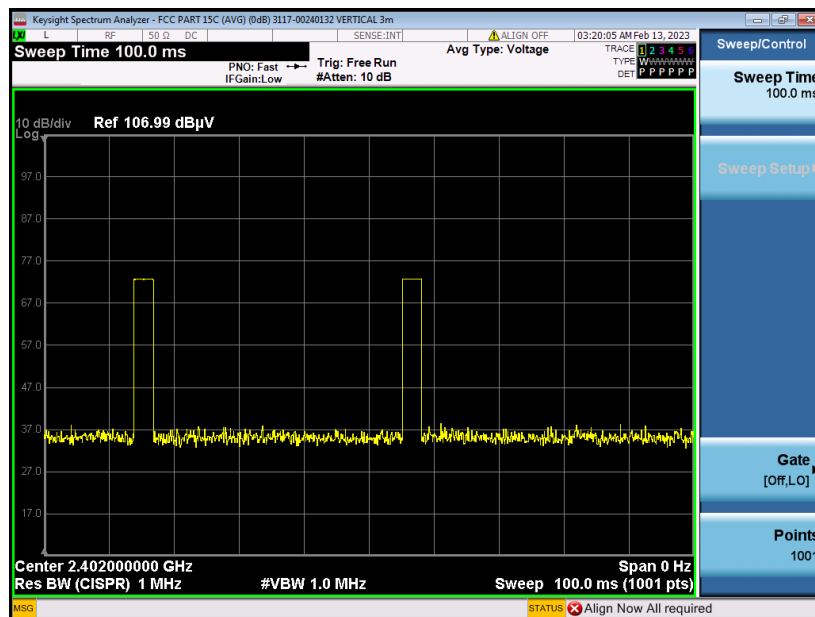

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.