

FCC SAR TEST REPORT

Applicant : Zebra Technologies Corporation
Equipment : Wearable Computer
Brand Name : Zebra
Model Name : WS3012
FCC ID : UZ7WS3012
Standard : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
5. RF Exposure Limits.....	7
5.1 Uncontrolled Environment.....	7
5.2 Controlled Environment.....	7
6. Specific Absorption Rate (SAR).....	8
6.1 Introduction	8
6.2 SAR Definition.....	8
7. System Description and Setup	9
7.1 E-Field Probe	10
7.2 Data Acquisition Electronics (DAE)	10
7.3 Phantom.....	11
7.4 Device Holder.....	12
8. Measurement Procedures	13
8.1 Spatial Peak SAR Evaluation.....	13
8.2 Power Reference Measurement.....	14
8.3 Area Scan	14
8.4 Zoom Scan.....	15
8.5 Volume Scan Procedures.....	15
8.6 Power Drift Monitoring.....	15
9. Test Equipment List.....	16
10. SAR System Verification	17
10.1 Tissue Simulating Liquids.....	17
10.2 SAR Tissue Verification.....	18
10.3 SAR System Performance Check Results	19
11. RF Exposure Positions	20
11.1 SAR Testing for Wearable Computer.....	20
12. Conducted RF Output Power (Unit: dBm).....	21
13. Antenna Location.....	30
14. SAR Test Results	31
14.1 Next to mouth SAR Test Result.....	32
14.2 Body Worn SAR	32
14.3 Extremity SAR Test Result	33
14.4 Repeated SAR Measurement	35
15. Simultaneous Transmission Analysis.....	36
15.1 1g SAR Exposure Conditions.....	36
15.2 Extremity Exposure Conditions	36
16. Uncertainty Assessment	37
17. References	38
Appendixes.....	39
Appendix A. Plots of System Performance Check	39
Appendix B. Plots of High SAR Measurement	39
Appendix C. DASY Calibration Certificate.....	39
Appendix D. Test Setup Photos.....	39

History of this test report

Report No.	Version	Description	Issued Date
FA540105	01	Initial issue of report	Aug. 13, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Wearable Computer, WS3012**, are as follows.

Highest 1g SAR Summary			
Equipment Class	Frequency Band	Next to Mouth SAR (Separation 10mm) (1g SAR W/kg)	Body-worn (Separation 0mm) (1g SAR W/kg)
DTS	2.4GHz WLAN	0.76	1.14
NII	5GHz WLAN	1.18	1.18
DSS	Bluetooth	<0.10	<0.10
Date of Testing:		2025/7/17 ~ 2025/7/21	

Highest 10g SAR Summary			
Equipment Class	Frequency Band	Hand SAR(Extremity) (Separation 0mm) (10g SAR W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
DTS	2.4GHz WLAN	2.71	2.71
NII	5GHz WLAN	2.25	2.26
DSS	Bluetooth	0.15	0.15
Date of Testing:		2025/7/17 ~ 2025/7/21	

Declaration of Conformity:
The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.
This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR03-KS, SAR06-KS	CN1257	314309

Applicant	
Company Name	Zebra Technologies Corporation
Address	3 Overlook Point, Lincolnshire, IL 60069

Manufacturer	
Company Name	Zebra Technologies Corporation
Address	3 Overlook Point, Lincolnshire, IL 60069

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Wearable Computer
Brand Name	Zebra
Model Name	WS3012
FCC ID	UZ7WS3012
S/N	251435247E0063, 251435247E0060
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ac VHT20 WLAN 2.4GHz 802.11ax HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	EV2
SW Version	14-05-29.00-UN-U00-PRD-APL-04
MFD	202505
EUT Stage	Identical Prototype
Remark: 1. This device has voice function and supports next to mouth mode, so next to mouth mode is performed for head SAR testing. 2. The 2.4GHz/5GHz WLAN can transmit in SISO/MIMO antenna mode. 3. The device implements hall sensors for accessory detection reduced power for SAR compliance at different exposure conditions (head, body, extremity). Details about the power decision are provided in the operational description. The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. 4. This device will be equipped with the Clip mount, and the Clip mount has a metallic and do not contain any electronic circuitry, so the Clip mount and without Clip mount was chosen to perform full SAR testing for each band to satisfy SAR compliance. When using the Clip mount, body exposure Condition is considered. 5. This device has NFC function and the NFC SAR report will be separately submitted.	

Supported Unit used in test configuration and system				
AC Adapter 1 (USB A) USB Wall Charger	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
AC Adapter 2 (USB C) USB Wall Charger	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
USB Cable 1 (Type A to Type C)	Brand Name	Zebra	Part Number	CBL-WS5X-USBA-01
USB Cable 2 (Type C to Type C)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
Clip mount	Brand Name	Zebra	Part Number	SG-WS3X-CLPJK-01
Earphone 1 (Wire headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

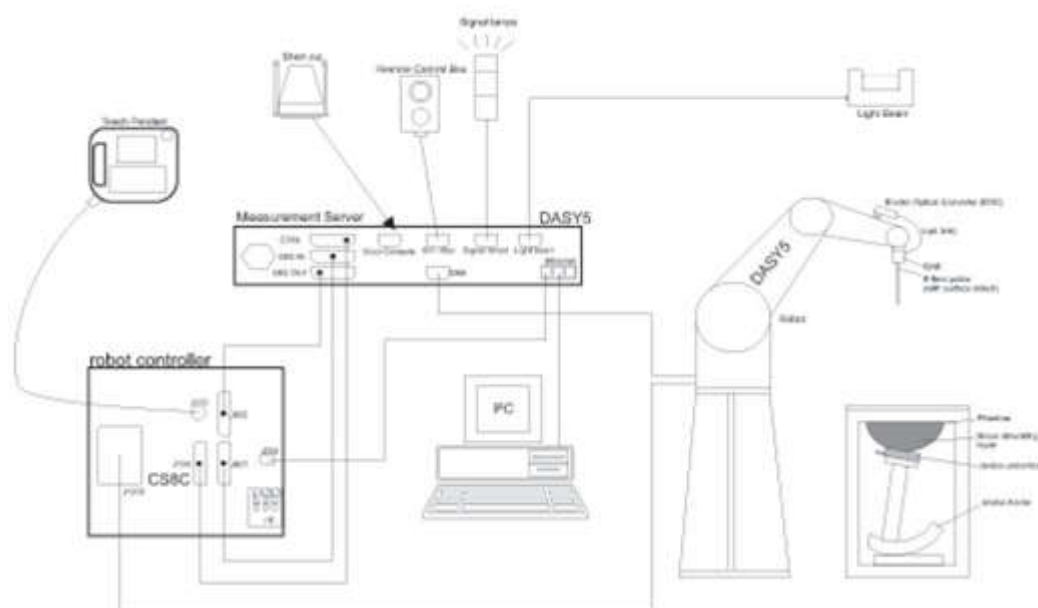

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (b) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	1095	2024/2/8	2026/2/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2022/9/23	2025/9/21
SPEAG	Data Acquisition Electronics	DAE4	690	2024/10/8	2025/10/7
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2025/2/19	2026/2/18
SPEAG	SAM Twin Phantom	SAM Twin	TP-1697	NCR	NCR
Beichuang	Thermo-Hygrometer	HTC-1	1959628	2025/5/27	2026/5/26
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	2025/7/2	2026/7/1
SPEAG	Dielectric Probe Kit	DAK-3.5	1144	2024/8/20	2025/8/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2025/1/3	2026/1/2
Rohde & Schwarz	Power Meter	NRVD	102081	2025/7/2	2026/7/1
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2025/7/2	2026/7/1
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2025/7/2	2026/7/1
R&S	BLUETOOTH TESTER	CBT	101246	2025/7/3	2026/7/2
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2024/10/11	2025/10/10
TES	DIGITAC THERMOMETER	TYPE-K	220305411	2025/1/2	2026/1/1
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. SAR System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

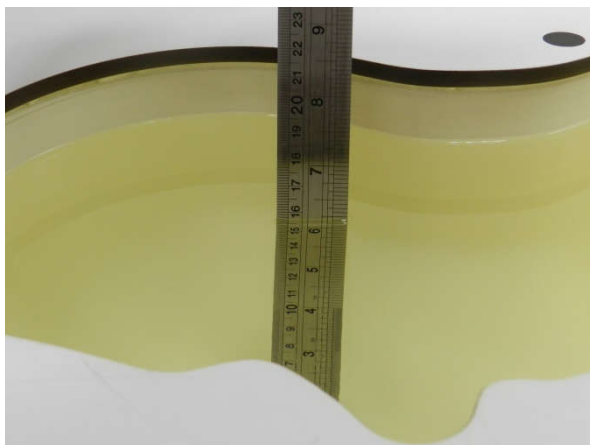


Fig 10.1Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 SAR Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Head	22.6	1.766	39.312	1.80	39.20	-1.89	0.29	±5	2025/7/17
5250	Head	22.9	4.658	36.393	4.71	35.95	-1.10	1.23	±5	2025/7/19
5600	Head	22.7	5.046	35.72	5.07	35.50	-0.47	0.62	±5	2025/7/20
5750	Head	22.7	5.165	35.557	5.22	35.35	-1.05	0.59	±5	2025/7/21

10.3 SAR System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025/7/17	2450	Head	50	1095	3857	690	2.550	52.6	51	1.18	1.180	24.7	23.6	-4.45
2025/7/19	5250	Head	50	1113	3857	690	4.110	81.5	82.2	0.86	1.170	23.3	23.4	0.43
2025/7/20	5600	Head	50	1113	3857	690	4.170	82.6	83.4	0.97	1.170	23.7	23.4	-1.27
2025/7/21	5750	Head	50	1113	3857	690	3.750	80.8	75	-7.18	1.070	23.0	21.4	-6.96

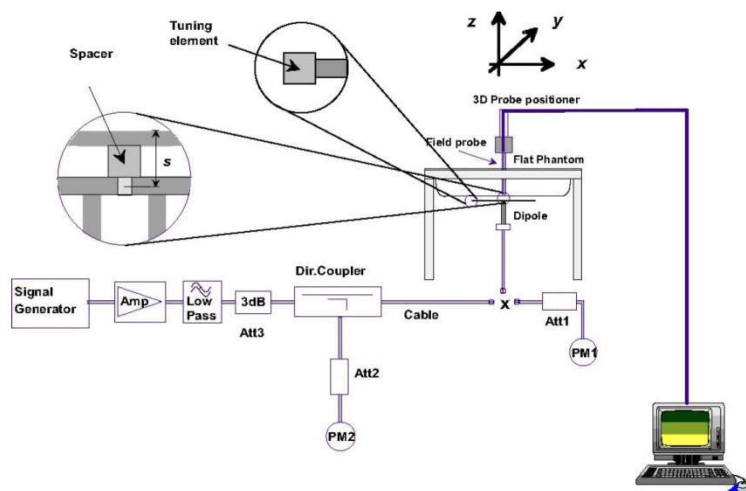

System Performance Check Setup



Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Wearable Computer

<For Head>

The device has voice function and can work by Next to Mouth mode, So Next to Mouth mode SAR test should be evaluated too. Adjust the distance between the device surface and the flat phantom to 10mm.

<For Body-worn >

- a) To position the device parallel to the phantom surface with back surfaces of the device.
- b) To adjust the device parallel to the flat phantom.
- c) To adjust the distance between the device surface and the flat phantom to 0mm.

<For Limbs>

- d) To position the device parallel to the phantom surface with all surfaces of the device.
- e) To adjust the device parallel to the flat phantom.
- f) To adjust the distance between the device surface and the flat phantom to 0mm.

12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band or when MIMO mode was not performed, due to for each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. 802.11 ax supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing.
8. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

<WLAN2.4GHz>

				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.87	17.00	16.89	17.00	19.89	20.00	90.15
		6	2437	17.60	18.00	17.76	18.00	20.69	21.00	
		11	2462	17.57	18.00	17.28	17.50	20.44	21.00	
	802.11g 6Mbps	1	2412	14.79	15.00	15.00	15.50	17.91	18.50	93.36
		2	2417	15.28	15.50	15.57	16.00	18.44	19.00	
		6	2437	18.08	18.50	18.70	19.00	21.41	22.00	
		9	2452	16.92	17.00	17.43	17.50	20.19	20.50	
		10	2457	14.92	15.00	15.08	15.50	18.01	18.50	
		11	2462	14.77	15.00	14.94	15.00	17.87	18.00	
	802.11n-HT20 MCS0	1	2412	14.23	14.50	14.59	15.00	17.42	18.00	99.42
		2	2417	15.63	16.00	15.80	16.00	18.73	19.00	
		6	2437	18.58	19.00	19.15	19.50	21.88	22.50	
		8	2447	16.60	17.00	16.64	17.00	19.63	20.00	
		9	2452	15.35	15.50	15.87	16.00	18.63	19.00	
		10	2457	14.98	15.00	15.19	15.50	18.10	18.50	
	802.11ac-VHT20 MCS0	1	2412	14.20	14.50	14.52	15.00	17.37	18.00	99.03
		2	2417	15.57	16.00	15.74	16.00	18.67	19.00	
		6	2437	18.53	19.00	19.05	19.50	21.81	22.50	
		8	2447	16.53	17.00	16.57	17.00	19.56	20.00	
		9	2452	15.29	15.50	15.81	16.00	18.57	19.00	
		10	2457	14.93	15.00	15.14	15.50	18.05	18.50	
	802.11ax-HE20 MCS0	1	2412	14.99	15.00	15.31	15.50	18.16	18.50	91.14
		2	2417	15.64	16.00	15.88	16.00	18.77	19.00	
		6	2437	17.71	18.00	18.09	18.50	20.91	21.50	
		10	2457	15.17	15.50	15.47	15.50	18.33	18.50	
		11	2462	12.78	13.00	13.04	13.50	15.92	16.50	

				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11g 6Mbps	1	2412	16.92	17.00	16.99	17.00			93.36
		6	2437	16.44	16.50	16.87	17.00			
		11	2462	13.68	14.00	16.36	16.50			



<WLAN5GHz>

				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	18.23	18.50	18.11	18.50	21.18	21.50	93.37
		40	5200	19.72	20.00	19.61	20.00	22.68	23.00	
		44	5220	19.77	20.00	19.63	20.00	22.71	23.00	
		48	5240	19.85	20.00	19.69	20.00	22.78	23.00	
	802.11n-HT20 MCS0	36	5180	18.22	18.50	18.08	18.50	21.16	21.50	92.93
		40	5200	19.50	20.00	19.46	19.50	22.49	23.00	
		44	5220	19.53	20.00	19.50	20.00	22.53	23.00	
		48	5240	19.75	20.00	19.57	20.00	22.67	23.00	
	802.11n-HT40 MCS0	38	5190	16.01	16.50	16.18	16.50	19.11	19.50	86.79
		46	5230	19.03	19.50	19.48	19.50	22.27	22.50	
	802.11ac-VHT20 MCS0	36	5180	18.16	18.50	18.06	18.50	21.12	21.50	93.47
		40	5200	19.40	19.50	19.35	19.50	22.39	22.50	
		44	5220	19.46	19.50	19.48	19.50	22.48	22.50	
		48	5240	19.70	20.00	19.52	20.00	22.62	23.00	
	802.11ac-VHT40 MCS0	38	5190	15.96	16.00	16.11	16.50	19.05	19.50	87.62
		46	5230	19.00	19.50	19.46	19.50	22.25	22.50	
	802.11ac-VHT80 MCS0	42	5210	14.71	15.00	14.88	15.00	17.81	18.00	92.57
	802.11ax-HE20 MCS0	36	5180	18.36	18.50	18.22	18.50	21.30	21.50	97.64
		40	5200	19.79	20.00	19.68	20.00	22.75	23.00	
		44	5220	19.82	20.00	19.73	20.00	22.79	23.00	
		48	5240	19.88	20.00	19.71	20.00	22.81	23.00	
	802.11ax-HE40 MCS0	38	5190	16.11	16.50	16.26	16.50	19.20	19.50	95.12
		46	5230	19.09	19.50	19.52	20.00	22.32	23.00	
	802.11ax-HE80 MCS0	42	5210	15.00	15.50	15.32	15.50	18.17	18.50	90.54

				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	19.72	20.00	19.83	20.00	22.78	23.00	93.37
		56	5280	19.66	20.00	19.69	20.00	22.69	23.00	
		60	5300	19.79	20.00	19.74	20.00	22.77	23.00	
		64	5320	18.22	18.50	18.19	18.50	21.22	21.50	
	802.11n-HT20 MCS0	52	5260	19.62	20.00	19.52	20.00	22.58	23.00	92.93
		56	5280	19.56	20.00	19.44	19.50	22.51	23.00	
		60	5300	19.64	20.00	19.48	20.00	22.57	23.00	
		64	5320	17.80	18.00	17.45	17.50	20.64	21.00	
	802.11n-HT40 MCS0	54	5270	19.88	20.00	19.99	20.00	22.95	23.00	86.79
		62	5310	16.00	16.50	16.53	17.00	19.28	20.00	
	802.11ac-VHT20 MCS0	52	5260	19.57	20.00	19.51	20.00	22.55	23.00	93.47
		56	5280	19.53	20.00	19.42	19.50	22.49	23.00	
		60	5300	19.63	20.00	19.43	20.00	22.54	23.00	
		64	5320	17.75	18.00	17.39	17.50	20.58	21.00	
	802.11ac-VHT40 MCS0	54	5270	19.85	20.00	19.96	20.00	22.92	23.00	87.62
		62	5310	15.96	16.00	16.48	16.50	19.24	19.50	
	802.11ac-VHT80 MCS0	58	5290	14.63	15.00	14.84	15.00	17.75	18.00	92.57
	802.11ax-HE20 MCS0	52	5260	19.80	20.00	19.79	20.00	22.81	23.00	97.64
		56	5280	19.66	20.00	19.57	20.00	22.63	23.00	
		60	5300	19.90	20.00	19.61	20.00	22.77	23.00	
		64	5320	17.88	18.00	17.53	18.00	20.72	21.00	



	802.11ax-HE40 MCS0	54	5270	19.90	20.00	20.02	20.50	22.97	23.50	95.12
		62	5310	16.05	16.50	16.64	17.00	19.37	20.00	
	802.11ax-HE80 MCS0	58	5290	14.92	15.00	15.15	15.50	18.05	18.50	90.54

				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	19.60	20.00	19.76	20.00	22.69	23.00	93.37
		116	5580	19.11	19.50	19.05	19.50	22.09	22.50	
		124	5620	15.60	16.00	15.55	16.00	18.59	19.00	
		132	5660	15.58	16.00	15.51	16.00	18.56	19.00	
		140	5700	15.08	15.50	15.61	16.00	18.36	19.00	
		144	5720	19.25	19.50	19.20	19.50	22.24	22.50	
	802.11n-HT20 MCS0	100	5500	19.10	19.50	18.92	19.00	22.02	22.50	92.93
		116	5580	19.02	19.50	19.03	19.50	22.04	22.50	
		124	5620	15.10	15.50	15.21	15.50	18.17	18.50	
		132	5660	15.08	15.50	15.14	15.50	18.12	18.50	
		140	5700	14.76	15.00	14.97	15.00	17.88	18.00	
		144	5720	19.00	19.50	18.71	19.00	21.87	22.50	
	802.11n-HT40 MCS0	102	5510	15.83	16.00	15.41	15.50	18.64	19.00	86.79
		110	5550	19.26	19.50	18.33	18.50	21.83	22.00	
		126	5630	16.47	16.50	15.74	16.00	19.13	19.50	
		134	5670	15.91	16.00	14.64	15.00	18.33	18.50	
		142	5710	18.90	19.00	17.56	18.00	21.29	21.50	
	802.11ac-VHT20 MCS0	100	5500	19.06	19.50	18.88	19.00	21.98	22.50	93.47
		116	5580	18.96	19.00	18.98	19.00	21.98	22.00	
		124	5620	15.05	15.50	15.18	15.50	18.13	18.50	
		132	5660	15.01	15.50	15.06	15.50	18.05	18.50	
		140	5700	14.69	15.00	14.92	15.00	17.82	18.00	
		144	5720	18.87	19.00	18.66	19.00	21.78	22.00	
	802.11ac-VHT40 MCS0	102	5510	15.77	16.00	15.24	15.50	18.52	19.00	87.62
		110	5550	19.16	19.50	18.30	18.50	21.76	22.00	
		126	5630	16.40	16.50	15.68	16.00	19.07	19.50	
		134	5670	15.80	16.00	14.56	15.00	18.23	18.50	
		142	5710	18.85	19.00	17.51	18.00	21.24	21.50	
	802.11ac-VHT80 MCS0	106	5530	16.56	17.00	16.24	16.50	19.41	20.00	92.57
		122	5610	18.87	19.00	18.13	18.50	21.53	22.00	
		138	5690	18.82	19.00	18.13	18.50	21.50	22.00	
	802.11ax-HE20 MCS0	100	5500	19.16	19.50	19.11	19.50	22.15	22.50	97.64
		116	5580	19.15	19.50	19.27	19.50	22.22	22.50	
		124	5620	15.14	15.50	15.25	15.50	18.21	18.50	
		132	5660	15.11	15.50	15.17	15.50	18.15	18.50	
		140	5700	14.86	15.00	15.16	15.50	18.02	18.50	
		144	5720	19.05	19.50	19.00	19.50	22.04	22.50	
	802.11ax-HE40 MCS0	102	5510	16.10	16.50	15.52	16.00	18.83	19.50	95.12
		110	5550	19.56	20.00	18.84	19.00	22.23	22.50	
		126	5630	16.50	17.00	15.79	16.00	19.17	19.50	
		134	5670	16.11	16.50	14.99	15.00	18.60	19.00	
		142	5710	19.15	19.50	18.00	18.50	21.62	22.00	
	802.11ax-HE80 MCS0	106	5530	16.90	17.00	16.55	17.00	19.74	20.00	90.54
		122	5610	19.16	19.50	18.42	18.50	21.82	22.00	
		138	5690	19.16	19.50	18.43	18.50	21.82	22.00	



				Ant 0 Full power		Ant 1 Full power		Ant 0+1 Full power		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	19.60	20.00	20.05	20.50	22.84	23.50	93.37
		157	5785	19.91	20.00	19.94	20.00	22.94	23.00	
		165	5825	19.94	20.00	20.03	20.50	23.00	23.50	
	802.11n-HT20 MCS0	149	5745	19.94	20.00	19.94	20.00	22.95	23.00	92.93
		157	5785	20.01	20.50	19.88	20.00	22.96	23.50	
		165	5825	20.00	20.50	19.91	20.00	22.97	23.50	
	802.11n-HT40 MCS0	151	5755	19.95	20.00	19.99	20.00	22.98	23.00	86.79
		159	5795	20.07	20.50	19.92	20.00	23.00	23.50	
	802.11ac-VHT20 MCS0	149	5745	19.70	20.00	19.91	20.00	22.82	23.00	93.47
		157	5785	19.95	20.00	19.83	20.00	22.90	23.00	
		165	5825	19.97	20.00	19.85	20.00	22.92	23.00	
	802.11ac-VHT40 MCS0	151	5755	19.91	20.00	19.94	20.00	22.93	23.00	87.62
		159	5795	20.04	20.50	19.90	20.00	22.98	23.50	
	802.11ac-VHT80 MCS0	155	5775	19.44	20.00	19.40	19.50	22.43	23.00	92.57
	802.11ax-HE20 MCS0	149	5745	19.85	20.00	19.95	20.00	22.91	23.00	97.64
		157	5785	20.10	20.50	19.93	20.00	23.03	23.50	
		165	5825	20.07	20.50	20.11	20.50	23.10	23.50	
	802.11ax-HE40 MCS0	151	5755	20.35	20.50	20.33	20.50	23.35	23.50	95.12
		159	5795	20.38	20.50	20.26	20.50	23.33	23.50	
	802.11ax-HE80 MCS0	155	5775	19.74	20.00	19.50	20.00	22.63	23.00	90.54

For Clip mount

<WLAN2.4GHz>

				Ant 0 For Clip mount		Ant 1 For Clip mount		Ant 0+1 For Clip mount		
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	16.87	17.00	16.89	17.00	19.89	20.00	90.15
		6	2437	17.60	18.00	17.76	18.00	20.69	21.00	
		11	2462	17.57	18.00	17.28	17.50	20.44	21.00	
	802.11g 6Mbps	1	2412	Not Required	15.00	Not Required	15.50	Not Required	18.50	93.36
		2	2417		15.50		16.00		19.00	
		6	2437		18.00		18.00		21.00	
		9	2452		17.00		17.50		20.50	
		10	2457		15.00		15.50		18.50	
		11	2462		15.00		15.00		18.00	
	802.11n-HT20 MCS0	1	2412	Not Required	14.50	Not Required	15.00	Not Required	18.00	99.42
		2	2417		16.00		16.00		19.00	
		6	2437		18.00		18.00		21.00	
		8	2447		17.00		17.00		20.00	
		9	2452		15.50		16.00		19.00	
		10	2457		15.00		15.50		18.50	
	802.11ac-VHT20 MCS0	11	2462		13.00		13.00		16.00	
		1	2412	Not Required	14.50	Not Required	15.00	Not Required	18.00	99.03
		2	2417		16.00		16.00		19.00	
		6	2437		18.00		18.00		21.00	
		8	2447		17.00		17.00		20.00	
		9	2452		15.50		16.00		19.00	



		10	2457		15.00		15.50		18.50	
		11	2462		13.00		13.00		16.00	
	802.11ax-HE20 MCS0	1	2412		15.00		15.50		18.50	91.14
		2	2417		16.00		16.00		19.00	
		6	2437		18.00		18.50		21.50	
		10	2457		15.50		15.50		18.50	
		11	2462		13.00		13.50		16.50	

<WLAN5GHz>

				Ant 0 For Clip mount		Ant 1 For Clip mount		Ant 0+1 For Clip mount		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	18.50	Not Required	18.50	Not Required	21.50	93.37
		40	5200		18.50		18.50		21.50	
		44	5220		18.50		18.50		21.50	
		48	5240		18.50		18.50		21.50	
	802.11n-HT20 MCS0	36	5180		18.50		18.50		21.50	92.93
		40	5200		18.50		18.50		21.50	
		44	5220		18.50		18.50		21.50	
		48	5240		18.50		18.50		21.50	
	802.11n-HT40 MCS0	38	5190		16.50		16.50		19.50	86.79
		46	5230		18.50		18.50		21.50	
	802.11ac-VHT20 MCS0	36	5180		18.50		18.50		21.50	93.47
		40	5200		18.50		18.50		21.50	
		44	5220		18.50		18.50		21.50	
		48	5240		18.50		18.50		21.50	
	802.11ac-VHT40 MCS0	38	5190		16.00		16.50		19.50	87.62
		46	5230		18.50		18.50		21.50	
	802.11ac-VHT80 MCS0	42	5210		15.00		15.00		18.00	92.57
	802.11ax-HE20 MCS0	36	5180		18.50		18.50		21.50	97.64
		40	5200		18.50		18.50		21.50	
		44	5220		18.50		18.50		21.50	
		48	5240		18.50		18.50		21.50	
	802.11ax-HE40 MCS0	38	5190		16.50		16.50		19.50	95.12
		46	5230		18.50		18.50		21.50	
	802.11ax-HE80 MCS0	42	5210		15.50		15.50		18.50	90.54

				Ant 0 For Clip mount		Ant 1 For Clip mount		Ant 0+1 For Clip mount		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	18.50	Not Required	18.50	Not Required	21.50	93.37
		56	5280		18.50		18.50		21.50	
		60	5300		18.50		18.50		21.50	
		64	5320		18.50		18.50		21.50	
	802.11n-HT20 MCS0	52	5260		18.50		18.50		21.50	92.93
		56	5280		18.50		18.50		21.50	
		60	5300		18.50		18.50		21.50	
		64	5320		18.00		17.50		21.00	
	802.11n-HT40 MCS0	54	5270		18.32		18.39		21.37	86.79
		62	5310		16.00		16.53		19.28	
	802.11ac-VHT20 MCS0	52	5260		Not Required		18.50		21.50	93.47
		56	5280		18.50		18.50		21.50	



FCC SAR Test Report

Report No. : FA540105

		60	5300		18.50		18.50		21.50	
		64	5320		18.00		17.50		21.00	
	802.11ac-VHT40 MCS0	54	5270		18.50		18.50		21.50	
		62	5310		16.00		16.50		19.50	
	802.11ac-VHT80 MCS0	58	5290		15.00		15.00		18.00	
		52	5260		18.50		18.50		21.50	
	802.11ax-HE20 MCS0	56	5280		18.50		18.50		21.50	
		60	5300		18.50		18.50		21.50	
		64	5320		18.00		18.00		21.00	
	802.11ax-HE40 MCS0	54	5270		18.50		18.50		21.50	
		62	5310		16.50		17.00		20.00	
	802.11ax-HE80 MCS0	58	5290		15.00		15.50		18.50	

				Ant 0 For Clip mount		Ant 1 For Clip mount		Ant 0+1 For Clip mount		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500		17.00		16.50		20.00	93.37
		116	5580		17.00		16.50		20.00	
		124	5620		16.00		16.00		19.00	
		132	5660		16.00		16.00		19.00	
		140	5700		15.50		16.00		19.00	
		144	5720		17.00		16.50		20.00	
	802.11n-HT20 MCS0	100	5500		17.00		16.50		20.00	92.93
		116	5580		17.00		16.50		20.00	
		124	5620		15.50		15.50		18.50	
		132	5660		15.50		15.50		18.50	
		140	5700		15.00		15.00		18.00	
		144	5720		17.00		16.50		20.00	
	802.11n-HT40 MCS0	102	5510		16.00		15.50		19.00	86.79
		110	5550		17.00		16.50		20.00	
		126	5630		16.50		16.00		19.50	
		134	5670		16.00		15.00		18.50	
	802.11ac-VHT20 MCS0	142	5710		17.00		16.50		20.00	93.47
		100	5500		17.00		16.50		20.00	
		116	5580		17.00		16.50		20.00	
		124	5620		15.50		15.50		18.50	
		132	5660		15.50		15.50		18.50	
		140	5700		15.00		15.00		18.00	
	802.11ac-VHT40 MCS0	144	5720		17.00		16.50		20.00	87.62
		102	5510		16.00		15.50		19.00	
		110	5550		17.00		16.50		20.00	
		126	5630		16.50		16.00		19.50	
	802.11ac-VHT80 MCS0	134	5670		16.00		15.00		18.50	92.57
		142	5710		17.00		16.50		20.00	
		106	5530		16.78		16.24		19.53	
	802.11ax-HE20 MCS0	122	5610		16.82		16.11		19.49	97.64
		138	5690		16.77		16.08		19.45	
		100	5500		17.00		16.50		20.00	
		116	5580		17.00		16.50		20.00	
		124	5620		15.50		15.50		18.50	
		132	5660		15.50		15.50		18.50	
	802.11ax-HE40 MCS0	140	5700		15.00		15.50		18.50	95.12
		144	5720		17.00		16.50		20.00	
		102	5510		16.50		16.00		19.50	
		110	5550		17.00		16.50		20.00	
		126	5630		17.00		16.00		19.50	
		134	5670		16.50		15.00		19.00	
		142	5710		17.00		16.50		20.00	




802.11ax-HE80 MCS0	106	5530		17.00		16.50		20.00	90.54
	122	5610		17.00		16.50		20.00	
	138	5690		17.00		16.50		20.00	

				Ant 0 For Clip mount		Ant 1 For Clip mount		Ant 0+1 For Clip mount		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	93.37
		157	5785		17.00		17.00		20.00	
		165	5825		17.00		17.00		20.00	
	802.11n-HT20 MCS0	149	5745		17.00		17.00		20.00	92.93
		157	5785		17.00		17.00		20.00	
		165	5825		17.00		17.00		20.00	
	802.11n-HT40 MCS0	151	5755		17.00		17.00		20.00	86.79
		159	5795		17.00		17.00		20.00	
	802.11ac-VHT20 MCS0	149	5745		17.00		17.00		20.00	93.47
		157	5785		17.00		17.00		20.00	
		165	5825		17.00		17.00		20.00	
	802.11ac-VHT40 MCS0	151	5755		17.00		17.00		20.00	87.62
		159	5795		17.00		17.00		20.00	
	802.11ac-VHT80 MCS0	155	5775	16.48	17.00	16.41	17.00	19.46	20.00	92.57
	802.11ax-HE20 MCS0	149	5745	Not Required	17.00	Not Required	17.00	Not Required	20.00	97.64
		157	5785		17.00		17.00		20.00	
		165	5825		17.00		17.00		20.00	
	802.11ax-HE40 MCS0	151	5755		17.00		17.00		20.00	95.12
		159	5795		17.00		17.00		20.00	
	802.11ax-HE80 MCS0	155	5775		17.00		17.00		20.00	90.54

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.05% for Ant 0 as following figure, Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

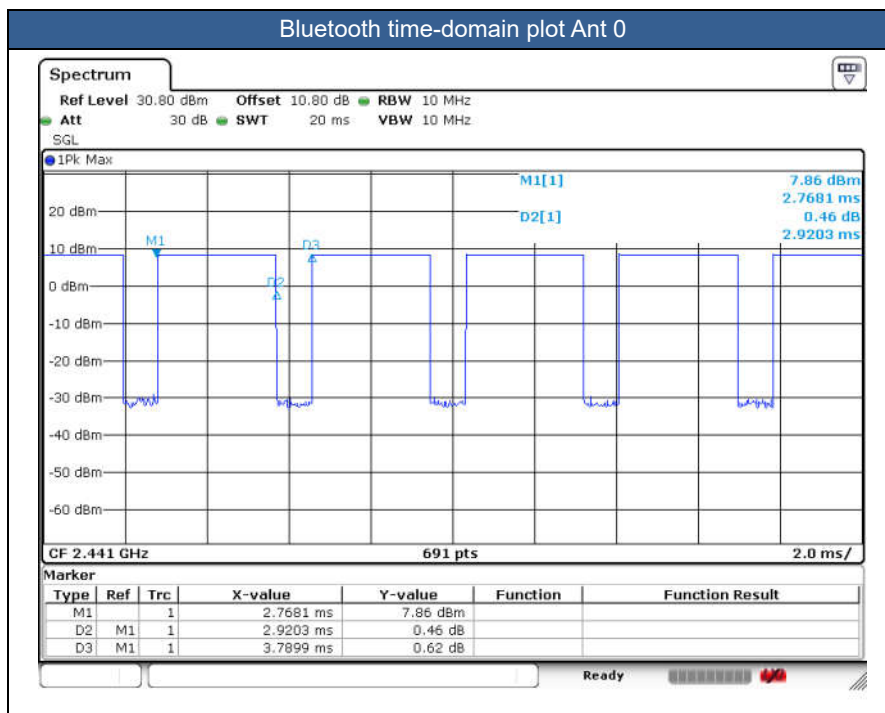

<Bluetooth BR/EDR>

Mode	Channel	Frequency (MHz)	Average power (dBm)			Tune-up Limit
			1Mbps	2Mbps	3Mbps	
BR / EDR	CH 00	2402	10.39	9.02	9.07	10.50
	CH 39	2441	10.86	9.22	9.34	11.00
	CH 78	2480	10.19	9.05	9.09	10.50

<Bluetooth LE_1Mbps>

Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-up Limit
LE	CH 00	2402	7.38	7.50
	CH 19	2440	7.33	7.50
	CH 39	2480	6.91	7.00

<Bluetooth LE_2Mbps>

Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-up Limit
LE	CH 00	2402	7.63	8.00
	CH 19	2440	7.50	8.00
	CH 39	2480	7.09	7.50



13. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WLAN/BT: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg. If the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. This device supports voice function and supports speaker to mouth mode, so the Head SAR is performed flat Phantom of SAM Twin phantom with 10mm separation. The extremity SAR is performed against flat Phantom of SAM Twin phantom.
5. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.

WLAN SAR Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. The 2.4GHz/5GHz WLAN can transmit in SISO/MIMO antenna mode.
6. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing.
7. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

14.1 Next to mouth SAR Test Result

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	-0.05	0.627	0.762
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.06	0.523	0.636
02	Bluetooth	1Mbps	Front	10mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.05	0.038	0.042
	Bluetooth	1Mbps	Front	10mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.03	0.033	0.037
03	WLAN5.3GHz	802.11ax-HE40 MCS0	Front	10mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	-0.05	0.490	0.575
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.07	0.374	0.449
04	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	-0.03	0.951	1.116
	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 0+1(1)	Without Accessory	Full Power	144	5720	19.20	19.50	1.072	93.37	1.071	0.1	0.742	0.852
	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 0+1(1)	Without Accessory	Full Power	124	5620	15.55	16.00	1.109	93.37	1.071	-0.17	0.341	0.405
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	-0.09	0.423	0.485
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	0.09	0.911	1.160
05	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	151	5755	19.95	20.00	1.013	86.79	1.152	0.14	1.010	1.179
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	0.04	0.237	0.293

14.2 Body Worn SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	-0.04	0.815	0.991
06	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	1	2412	16.87	17.50	1.156	90.15	1.109	0.01	0.889	1.140
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	11	2462	17.57	18.00	1.104	90.15	1.109	0.07	0.824	1.009
07	Bluetooth	1Mbps	Back	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.01	0.049	0.055
08	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.09	0.978	1.174
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	62	5310	16.00	16.50	1.122	86.79	1.152	-0.06	0.479	0.619
09	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	-0.09	1.030	1.181
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	122	5610	16.11	16.50	1.094	92.57	1.080	-0.09	0.934	1.104
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	138	5690	16.08	16.50	1.102	92.57	1.080	-0.1	0.871	1.037
10	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	0.17	0.907	1.123

**14.3 Extremity SAR Test Result**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.14	1.870	2.273
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 0+1(0)	Without Accessory	Full Power	1	2412	16.87	17.00	1.030	90.15	1.109	0.11	1.740	1.988
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 0+1(0)	Without Accessory	Full Power	11	2462	17.57	18.00	1.104	90.15	1.109	-0.05	1.840	2.253
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.14	2.180	2.650
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	1	2412	16.87	17.00	1.030	90.15	1.109	0.18	2.060	2.353
11	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	11	2462	17.57	18.00	1.104	90.15	1.109	0.01	2.210	2.706
	WLAN2.4GHz	802.11b 1Mbps	Left side	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	-0.17	0.716	0.870
	WLAN2.4GHz	802.11b 1Mbps	Right side	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.17	0.634	0.771
	WLAN2.4GHz	802.11b 1Mbps	Bottom side	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	-0.05	0.489	0.594
	WLAN2.4GHz	802.11b 1Mbps	Top side	0mm	Ant 0+1(0)	Without Accessory	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.01	0.198	0.241
	Bluetooth	1Mbps	Front	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.08	0.095	0.106
12	Bluetooth	1Mbps	Back	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	-0.12	0.132	0.147
	Bluetooth	1Mbps	Left side	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.01	0.101	0.113
	Bluetooth	1Mbps	Right side	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
	Bluetooth	1Mbps	Top side	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
	Bluetooth	1Mbps	Bottom side	0mm	Ant 0	Without Accessory	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
13	WLAN5.3GHz	802.11ax-HE40 MCS0	Front	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	-0.12	1.200	1.409
	WLAN5.3GHz	802.11ax-HE40 MCS0	Back	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	0.08	0.817	0.959
	WLAN5.3GHz	802.11ax-HE40 MCS0	Left side	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	0.01	0.972	1.141
	WLAN5.3GHz	802.11ax-HE40 MCS0	Right side	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	0.03	0.636	0.747
	WLAN5.3GHz	802.11ax-HE40 MCS0	Bottom side	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	-0.08	0.657	0.771
	WLAN5.3GHz	802.11ax-HE40 MCS0	Top side	0mm	Ant 0+1(1)	Without Accessory	Full Power	54	5270	20.02	20.50	1.117	95.12	1.051	-0.08	1.160	1.362
14	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	-0.05	1.920	2.254
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	0.1	1.080	1.268
	WLAN5.5GHz	802.11a 6Mbps	Left side	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	-0.18	1.510	1.772
	WLAN5.5GHz	802.11a 6Mbps	Right side	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	0.1	0.995	1.168
	WLAN5.5GHz	802.11a 6Mbps	Bottom side	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	0.12	1.110	1.303
	WLAN5.5GHz	802.11a 6Mbps	Top side	0mm	Ant 0+1(0)	Without Accessory	Full Power	100	5500	19.60	20.00	1.096	93.37	1.071	0.08	1.650	1.937
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 0+1(1)	Without Accessory	Full Power	144	5720	19.20	19.50	1.072	93.37	1.071	-0.17	1.490	1.711
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 0+1(1)	Without Accessory	Full Power	124	5620	15.55	16.00	1.109	93.37	1.071	-0.03	0.685	0.814
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	-0.17	1.290	1.642
	WLAN5.8GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	-0.03	1.070	1.362
	WLAN5.8GHz	802.11n-HT40 MCS0	Left side	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	0.14	1.300	1.655
	WLAN5.8GHz	802.11n-HT40 MCS0	Right side	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	0.11	0.912	1.161
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom side	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	-0.05	0.925	1.177
15	WLAN5.8GHz	802.11n-HT40 MCS0	Top side	0mm	Ant 0+1(0)	Without Accessory	Full Power	159	5795	20.07	20.50	1.105	86.79	1.152	0.07	1.600	2.037
	WLAN5.8GHz	802.11n-HT40 MCS0	Top side	0mm	Ant 0+1(0)	Without Accessory	Full Power	151	5755	19.95	20.00	1.013	86.79	1.152	0.01	1.530	1.785
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.1	0.795	0.966
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	-0.18	0.768	0.933
16	WLAN2.4GHz	802.11b 1Mbps	Left side	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.06	1.080	1.313
	WLAN2.4GHz	802.11b 1Mbps	Right side	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.1	0.582	0.707
	WLAN2.4GHz	802.11b 1Mbps	Bottom side	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.12	0.024	0.029
	WLAN2.4GHz	802.11b 1Mbps	Top side	0mm	Ant 0+1(0)	Clip mount	Full Power	6	2437	17.60	18.00	1.096	90.15	1.109	0.08	0.104	0.126
	Bluetooth	1Mbps	Front	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.03	0.087	0.097
	Bluetooth	1Mbps	Back	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
17	Bluetooth	1Mbps	Left side	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0.03	0.101	0.113
	Bluetooth	1Mbps	Right side	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
	Bluetooth	1Mbps	Top side	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000
	Bluetooth	1Mbps	Bottom side	0mm	Ant 0	Clip mount	Full Power	39	2441	10.86	11.00	1.032	77.05	1.081	0	0.000	0.000



FCC SAR Test Report

Report No. : FA540105

	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	0.18	0.732	0.879
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	0.14	0.378	0.454
18	WLAN5.3GHz	802.11n-HT40 MCS0	Left side	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	0.03	1.220	1.464
	WLAN5.3GHz	802.11n-HT40 MCS0	Right side	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.17	0.409	0.491
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom side	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	0.17	0.471	0.565
	WLAN5.3GHz	802.11n-HT40 MCS0	Top side	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.05	0.187	0.224
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	-0.08	0.195	0.224
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	0.08	0.157	0.180
19	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left side	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	0.09	0.369	0.423
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right side	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	0.01	0.090	0.103
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom side	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	0.03	0.036	0.041
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top side	0mm	Ant 0+1(0)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	-0.08	0.108	0.124
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	-0.08	0.457	0.566
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	0.05	0.327	0.405
20	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left side	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	0.03	0.737	0.912
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right side	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	0.06	0.232	0.287
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Bottom side	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	-0.09	0.065	0.080
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top side	0mm	Ant 0+1(1)	Clip mount	Full Power	155	5775	16.41	17.00	1.146	92.57	1.080	-0.08	0.312	0.386

14.4 Repeated SAR Measurement

<1g>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	-0.09	1.030	1	1.181
2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Clip mount	Full Power	106	5530	16.24	16.50	1.062	92.57	1.080	0.04	0.959	1.074	1.100
1st	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	151	5755	19.95	20.00	1.013	86.79	1.152	0.14	1.010	1	1.179
2nd	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(0)	Without Accessory	Full Power	151	5755	19.95	20.00	1.013	86.79	1.152	0.11	0.955	1.058	1.114
1st	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	1	2412	16.87	17.50	1.156	90.15	1.109	0.01	0.889	1	1.140
2nd	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	1	2412	16.87	17.50	1.156	90.15	1.109	0.09	0.845	1.052	1.083
1st	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.09	0.978	1	1.174
2nd	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(0)	Clip mount	Full Power	54	5270	18.32	18.50	1.042	86.79	1.152	-0.01	0.950	1.029	1.140

<10g>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	11	2462	17.57	18.00	1.104	90.15	1.109	0.01	2.210	1	2.706
2nd	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Without Accessory	Full Power	11	2462	17.57	18.00	1.104	90.15	1.109	0.09	2.150	1.028	2.632

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Wearable Computer		
		Head	Body	Extremity
1.	WLAN2.4GHz + NFC			Yes
2.	Bluetooth+ NFC			Yes
3.	WLAN5GHz + NFC			Yes

Note:

- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- WLAN2.4GHz/WLAN5GHz MIMO SAR can represent SISO SAR to do co-located SAR analysis.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can't transmit simultaneously.
- According to the EUT characteristic, WLAN 2.4GHz and Bluetooth cannot transmit simultaneously.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- When stand-alone SAR is not required for a transmitter or antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.
- The maximum SAR summation is calculated based on the same configuration and test position.
- The NFC only operate on limbs exposure condition.

15.1 1g SAR Exposure Conditions

N/A.

15.2 Extremity Exposure Conditions

For Without Accessory

Exposure Position	1	2	3	4	1+4	2+4	3+4
	WLAN2.4GHz Ant 0+1	WLAN5GHz Ant 0+1	Bluetooth Ant 0	NFC	Summed	Summed	Summed
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
Front	2.273	2.254	0.147	0.007	2.28	2.26	0.15
Back	2.706	1.362	0.147		2.71	1.36	0.15
Left side	0.870	1.772	0.147		0.87	1.77	0.15
Right side	0.771	1.168	0.147		0.77	1.17	0.15
Top side	0.241	2.037	0.147		0.24	2.04	0.15
Bottom side	0.594	1.303	0.147		0.59	1.30	0.15

For Clip mount

Exposure Position	1	2	3	4	1+4	2+4	3+4
	WLAN2.4GHz Ant 0+1	WLAN5GHz Ant 0+1	Bluetooth Ant 0	NFC	Summed	Summed	Summed
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
Front	0.966	0.879	0.113	0.004	0.97	0.88	0.12
Back	0.933	0.454	0.113		0.93	0.45	0.11
Left side	1.313	1.464	0.113		1.31	1.46	0.11
Right side	0.707	0.491	0.113		0.71	0.49	0.11
Top side	0.126	0.386	0.113		0.13	0.39	0.11
Bottom side	0.029	0.565	0.113		0.03	0.57	0.11

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements for 100 MHz to 6 GHz”, Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.

Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

-----THE END-----