



TEST REPORT No.: (5212)144-1550

TEST REPORT

To:	ANKYO DEVELOPMENT LTD.	To:	-
Attn:	Miller / Enc Yuen	Attn:	-
Address:	RM 703, KNUTSFORD COMMERCIAL BUILDING, 4-5 KNUTSFORD TERRACE, T.S.T. KLN, HK	Address:	-
Fax:	2424 1766	Fax:	-
E-mail:	eyuen@ankyoltd.com / miller@ankyoltd.com	E-mail:	-
Folder No.:		--	
Factory Name:		--	
Location:		--	
Product:		R/C Buggy Model No.: AK100212	



Sample No:	(5212)144-1550
Test Date(s):	April 24, 2012 to May 21, 2012
Test Requested:	FCC Part 15 – 2011
Test Method:	ANSI C63.4 – 2009
FCC ID:	UZKAK100212

The results given in this report are related to the tested specimen of the described electrical apparatus.

CONCLUSION: The submitted sample was found to COMPLY with requirement of FCC Part 15 Subpart C

Authorized Signature:

Reviewed by: Keith Yeung
Date: June 4, 2012

Approved by: Steven Tsang
Date: June 4, 2012

BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT No.: (5212)144-1550

Test Result Summary

EMISSION TEST		
Test requirement: FCC Part 15 - 2011		
Test Condition	Test Method	Test Result
		Pass Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/> <input type="checkbox"/>

Report Revision & Sample Re-submit History:

Pass with Modification

**BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office**
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT No.: (5212)144-1550

Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

Test Instrument List

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	18-OCT-2012
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	07-AUG-2012
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	16-SEP-2012
OPEN AREA TEST SITE	BVCPS	N/A	N/A	07-JUL-2012
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	01-DEC-2012
COAXIAL CABLE	SUHNER	N/A	N/A	10-NOV-2012

Remarks: -

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result



TEST REPORT No.: (5212)144-1550

Equipment Under Test [EUT]

Description of Sample:

Product: R/C Buggy
Model No.: AK100212
Power Supply: 9Vd.c. ("6F22" size battery x 1)

Description of EUT Operation:

The Equipment Under Test (EUT) is a ANKYO DEVELOPMENT. LTD. of Radio Control toy. It is a 1 trigger and operating at 27.145MHz transmitter. The EUT continues to transmit when trigger is being pressed, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

1. Trigger- control forward and backward

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 20cm long metal antenna.. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.





TEST REPORT No.: (5212)144-1550

Test Results

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.227
Test Method: ANSI C63.4
Test Date(s): 2012-05-21
Temperature: 25.0 °C
Humidity: 55.0 %
Atmospheric Pressure: 100.9 kPa
Mode of Operation: Transmission mode
Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Test Method:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

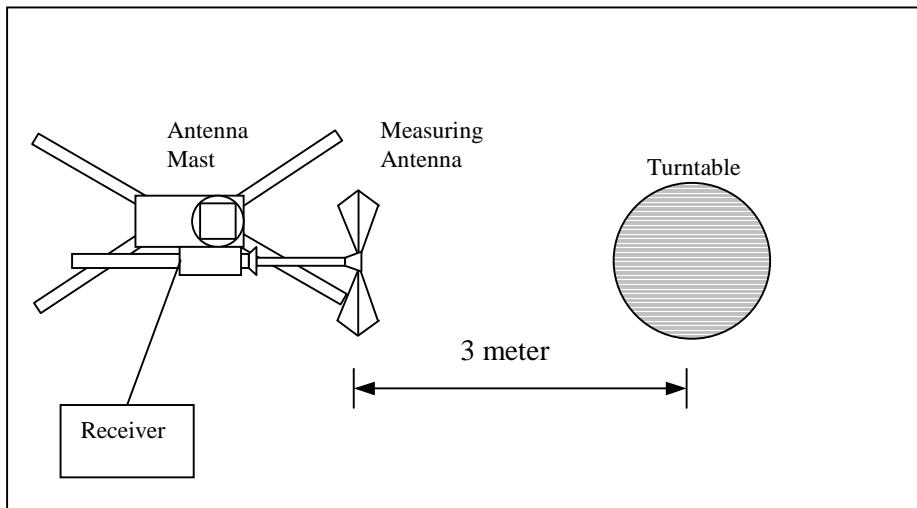



TEST REPORT No.: (5212)144-1550

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μ V/m]	Field Strength of Fundamental Emission [Average] [μ V/m]
26.96 – 27.28	100,000 (100 dB μ V/m)	10,000 (80 dB μ V/m)

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
27.145	V/0°	9.9	73.1	100	-26.9

Detection mode: # Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
27.145	V/0°	9.9	**67.4	80	-12.6

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = 20Log(0.52) =-5.7dB

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT No.: (5212)144-1550

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
Test Method: ANSI C63.4
Test Date(s): 2012-05-21
Temperature: 25.0 °C
Humidity: 55.0 %
Atmospheric Pressure: 100.9 kPa
Mode of Operation: Transmission mode
Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500



TEST REPORT No.: (5212)144-1550

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
54.290	H	5.4	24.6	40.0	-15.4
81.435	H	6.5	31.0	40.0	-9.0
108.580	H	12.4	31.5	43.5	-12.0
135.725	H	11.8	30.2	43.5	-13.3
162.870	H	9.0	26.2	43.5	-17.3
190.015	H	8.1	19.6	43.5	-23.9
217.160	H	8.7	28.7	46.0	-17.3
244.305	H	12.1	29.2	46.0	-16.8
271.450	H	13.6	22.6	46.0	-23.4
298.595	H	14.3	30.7	46.0	-15.3

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
54.290	V	5.4	34.6	40.0	-5.4
81.435	V	6.5	37.0	40.0	-3.0
108.580	V	12.4	38.2	43.5	-5.3
135.725	V	11.8	34.0	43.5	-9.5
162.870	V	9.0	30.9	43.5	-12.6
190.015	V	8.1	19.9	43.5	-23.6
217.160	V	8.7	20.7	46.0	-25.3
244.305	V	12.1	30.2	46.0	-15.8
271.450	V	13.6	22.8	46.0	-23.2
298.595	V	14.3	24.1	46.0	-21.9

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT No.: (5212)144-1550

26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227
Test Method: ANSI C63.4
Test Date(s): 2012-04-24
Temperature: 24.0 °C
Humidity: 49.0 %
Atmospheric Pressure: 101.5 kPa
Mode of Operation: Transmission mode
Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for 26dB Bandwidth of Fundamental Emission:


Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
27.14368	93.44	within 26.96 – 27.28



TEST REPORT No.: (5212)144-1550

Measurement Data

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

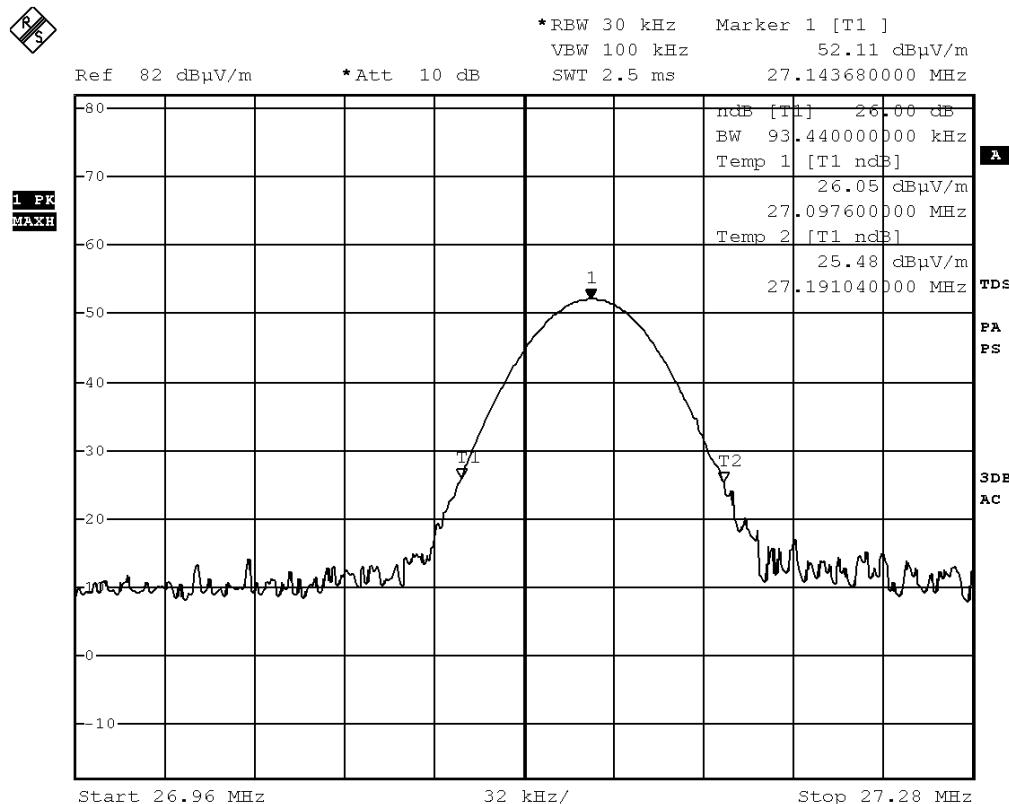

Date: 24.APR.2012 13:38:35

BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT No.: (5212)144-1550

Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (20.0msec) never exceeds a series of 20 x (0.52msec) pulses. Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered (0.52msec x 20) per 20.0msec = 52.0% duty cycle. Figure A through B shows the characteristics of the pulse train for one of these functions

Remarks: -


Duty Cycle Correction = $20\log(0.52) = -5.7\text{dB}$

The following figures [Figure A] show the characteristics of the pulse train for one of these functions.



TEST REPORT No.: (5212)144-1550

Figure A [Pulse Train]

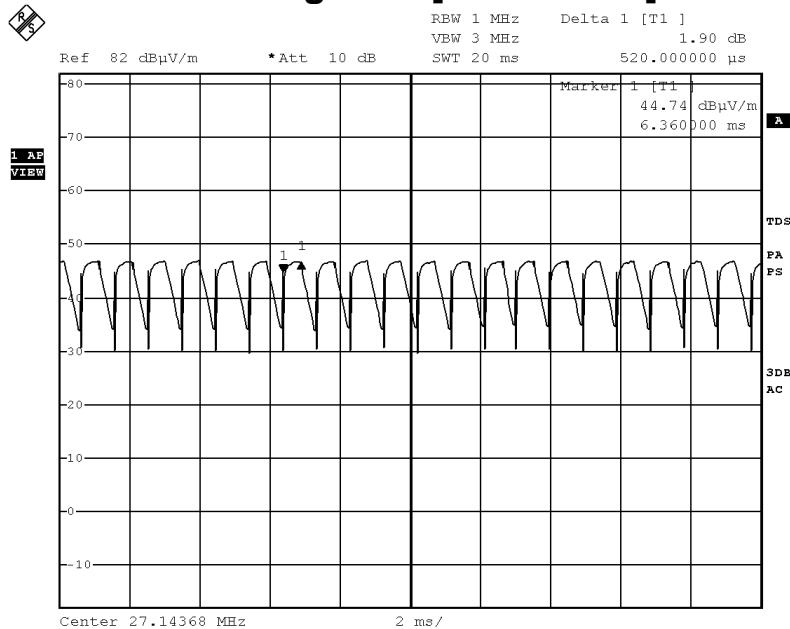

Date: 24.APR.2012 13:44:38

BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT No.: (5212)144-1550

Photographs of EUT

Front View of the product



Rear View of the product



Battery compartment



Battery Cover



TEST REPORT No.: (5212)144-1550

Photographs of EUT

Front View of the product (Internal)



Rear View of the product (Internal)




Internal View of the product




Inner Circuit Top View



Inner Circuit Bottom View

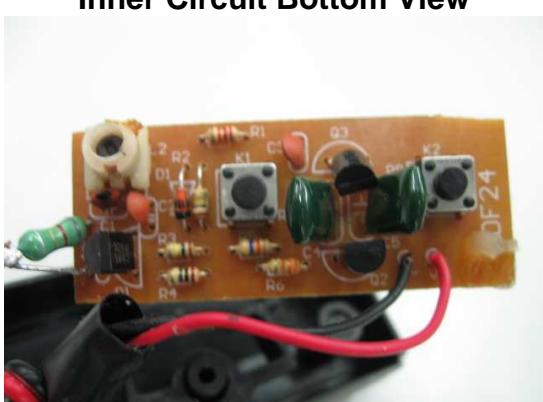

Antenna

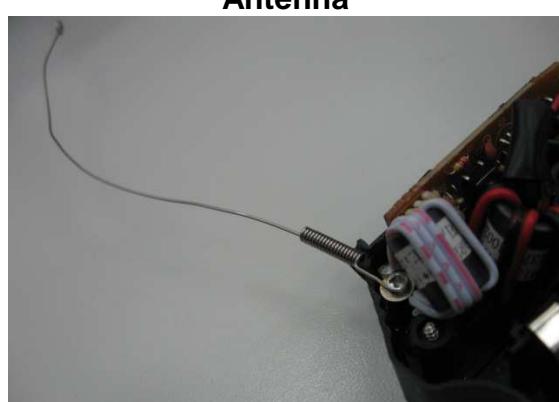



TEST REPORT No.: (5212)144-1550

Measurement of Radiated Emission Test Set Up



******* End of Report *******

**BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG**
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.