

InterLab®

Bittium Tough Mobile

FCC ID: V27SD-41

IC: 3282B-SD41

Report Reference: MDE_ELEKT_1502_FCCg
according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

Date: October 29, 2015

Test Laboratory:

7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Director:
Dr. Harald Ansorge



Registergericht registered in:
Düsseldorf, HRB 75554
UST-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data**1.1 Project Data**

Project Responsible: Imad Hjije
Date Of Test Report: 2015/10/29
Date of first test: 2015/06/10
Date of last test: 2015/10/27

1.2 Applicant Data

Company Name: Bittium Wireless Ltd.

Street: Tutkijantie 8
City: 90570 Oulu
Country: Finland

Contact Person: Mr. Jyrki Juvani

Function: Specialist, Test Management
Department: Wireless Solutions
Phone: +358 40 344 5781
E-Mail: Jyrki.Juvani@bittium.com

1.3 Test Laboratory Data


The following list shows all places and laboratories involved for test result generation:

7 layers DE

<i>Company Name :</i>	7layers GmbH
<i>Street :</i>	Borsigstrasse 11
<i>City :</i>	40880 Ratingen
<i>Country :</i>	Germany
<i>Contact Person :</i>	Mr. Michael Albert
<i>Phone :</i>	+49 2102 749 201
<i>Fax :</i>	+49 2102 749 444
<i>E Mail :</i>	Michael.Albert@7Layers.com

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Radiated Emissions	Mr. Marco Kullik Mr. Robert Machulec	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radio Lab	Mr. Dobrin Dobrinov Mr. Daniel Gall	DAkkS-Registration no. D-PL-12140-01-01

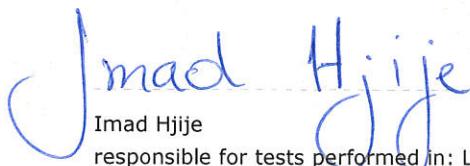1.4 Signature of the Testing Responsible

Imad Hjije
responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible



Bernhard Retka

Accreditation scope responsible person
responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Bittium Tough Mobile

FCC ID: V27SD-41

IC: 3282B-SD41

Manufacturer:

Company Name: See applicant data:

Contact Person:

-

Parameter List:

Parameter name	Value
Parameter name	Value

2.2 Detailed Description of OUT Samples

Sample : aa01

<i>OUT Identifier</i>	Bittium Tough Mobile		
	FCC ID: V27SD-41		
	IC: 3282B-SD41		
<i>Sample Description</i>	Radiated Sample		
<i>Serial No.</i>	K0251300425		
<i>HW Status</i>	0302		
<i>SW Status</i>	2.6.0		
<i>Low Voltage</i>	3.6 V	<i>Low Temp.</i>	-30 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	23 °C

Sample : ae01

<i>OUT Identifier</i>	Bittium Tough Mobile		
	FCC ID: V27SD-41		
	IC: 3282B-SD41		
<i>Sample Description</i>	Conducted Sample		
<i>Serial No.</i>	K0251300433		
<i>HW Status</i>	0302		
<i>SW Status</i>	2.6.0		
<i>Low Voltage</i>	3.6 V	<i>Low Temp.</i>	-30 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	23 °C

2.3 OUT Features

Features for OUT: Bittium Tough Mobile
FCC ID: V27SD-41
IC: 3282B-SD41

Designation	Description	Allowed Values	Supported Value(s)
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
DC	The OUT is powered by or connected to DC		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
eFDD2	Supported bandwidth: 1.4, 3, 5, 10, 15 and 20 MHz		
eFDD4	Supported bandwidth: 1.4, 3, 5, 10, 15 and 20 MHz		
eFDD5	Supported bandwidth: 1.4, 3, 5 and 10 MHz		
efDD13	Supported bandwidth: 5 and 10 MHz		
efDD14	Supported bandwidth: 5 and 10 MHz		
efDD17	Supported bandwidth: 5 and 10 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD4	EUT supports UMTS FDD4 HSDPA in the band 1710 MHz - 1755 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD4	EUT supports UMTS FDD4 HSUPA in the band 1710 MHz - 1755 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		

Features for OUT: Bittium Tough Mobile
FCC ID: V27SD-41
IC: 3282B-SD41

Designation	Description	Allowed Values	Supported Value(s)
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5875 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wn	EUT supports WLAN in mode n in the band 2400 MHz - 2483.5 MHz		

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples		List of auxiliary equipment	
	Sample No.	Sample Description	AE No.	AE Description
S01_AA01				
	Sample: aa01	Radiated Sample		
S01_AE01				
	Sample: ae01	Conducted Sample		

3 Results

3.1 General

Documentation of tested devices:	Available at the test laboratory.
Interpretation of the test results:	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
Note:	<ol style="list-style-type: none"> 1. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory. 2. This test report covers only GSM and UMTS. Other technologies are reported separately

3.2 List of the Applicable Body

(Bodies for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART22PUBLIC MOBILE SERVICES	Part 22, Subpart H - Cellular Radiotelephone Service
FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES	Part 24, Subpart E - Broadband PCS
FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	Part 27, Subpart C - Technical Standards

3.3 List of Test Specification

Test Specification: **FCC part 2 and 22**

Version 10-1-13 Edition

Title: PART 2 - GENERAL RULES AND REGULATIONS
PART 22 - PUBLIC MOBILE SERVICES

Test Specification: **FCC part 2 and 24**

Version 10-1-13 Edition

Title: PART 2 - GENERAL RULES AND REGULATIONS
PART 24 - PERSONAL COMMUNICATIONS SERVICES

Test Specification: **FCC part 2 and 27**

Version 10-1-13 Edition

Title: PART 2 - GENERAL RULES AND REGULATIONS
PART 27 - MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

3.4 Summary

Test Case Identifier / Name	Test (condition)	Cat	Result	Date of Test	Lab Ref.	Setup
Test Specification: FCC part 2 and 22						
22.1 RF Power Output §2.1046, §22.913	22.1; RF Power Output Summary §2.1046, §22.913	-	Passed	2015/07/23	Lab 2	S01_AE01
22.2 Frequency stability §2.1055	22.2; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/07/29	Lab 2	S01_AE01
	22.2; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/07/29	Lab 2	S01_AE01
	22.2; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/30	Lab 2	S01_AE01
	22.2; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/30	Lab 2	S01_AE01
	22.2; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/30	Lab 2	S01_AE01
22.3 Spurious emissions at antenna terminals §2.1051, §22.917	22.3; Spurious emissions at antenna terminals summary §2.1051, §22.917	-	Passed	2015/07/23	Lab 2	S01_AE01
22.4 Field strength of spurious radiation §2.1053, §22.917	22.4; Frequency Band = 850, Mode = EDGE, Channel = 128, Frequency = 824.2MHz	-	Passed	2015/06/10	Lab 1	S01_AA01
	22.4; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/06/10	Lab 1	S01_AA01
	22.4; Frequency Band = 850, Mode = EDGE, Channel = 251, Frequency = 848.8MHz	-	Passed	2015/06/11	Lab 1	S01_AA01
	22.4; Frequency Band = 850, Mode = GSM, Channel = 128, Frequency = 824.2MHz	-	Passed	2015/06/10	Lab 1	S01_AA01
	22.4; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/06/10	Lab 1	S01_AA01
	22.4; Frequency Band = 850, Mode = GSM, Channel = 251, Frequency = 848.8MHz	-	Passed	2015/06/10	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/06/13	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/06/13	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/06/13	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/06/13	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/06/13	Lab 1	S01_AA01
	22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/06/13	Lab 1	S01_AA01

Reference: MDE_ELEKT_1502_FCCg
 according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

Test Case Identifier / Name Test (condition)	Cat	Result	Date of Test	Lab Ref.	Setup
22.5 Emission and Occupied Bandwidth §2.1049, §22.917 22.5; Emission and Occupied Bandwidth Summary §2.1049, §22.917	-	Passed	2015/07/23	Lab 2	S01_AE01
22.6 Band edge compliance §2.1053, §22.917 22.6; Band edge compliance Summary §2.1053, §22.917	-	Passed	2015/07/23	Lab 2	S01_AE01
Test Specification: FCC part 2 and 24					
24.1 RF Power Output §2.1046, §24.232 24.1; RF Power Output Summary §2.1046, §24.232	-	Passed	2015/07/23	Lab 2	S01_AE01
24.2 Frequency stability §2.1055, §24.235 24.2; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz 24.2; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz 24.2; Frequency Band = efDD2, Mode = 16QAM, Channel = 18900, Frequency = 1880MHz 24.2; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz 24.2; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz 24.2; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	-	Passed Not yet tested	2015/07/29 (Lab 2)	Lab 2	S01_AE01 (S01_AA01)
24.3 Spurious emissions at antenna terminals §2.1051, §24.238 24.3; Spurious emissions at antenna terminals Summary §2.1051, §24.238	-	Passed	2015/07/30	Lab 2	S01_AE01

Test Case Identifier / Name	Test (condition)	Category	Result	Date of Test	Lab Ref.	Setup
24.4 Field strength of spurious radiation §2.1053, §24.238						
24.4; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz	-	Passed	2015/06/11	Lab 1	S01_AA01	
24.4; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz	-	Passed	2015/06/11	Lab 1	S01_AA01	
24.4; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz	-	Passed	2015/06/11	Lab 1	S01_AA01	
24.4; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz	-	Passed	2015/06/11	Lab 1	S01_AA01	
24.4; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
24.5 Emission and Occupied Bandwidth §2.1049, §24.238						
24.5; Emission and Occupied Bandwidth Summary §2.1049, §24.238	-	Passed	2015/10/27	Lab 2	S01_AE01	
24.6 Band edge compliance §2.1053, §24.238						
24.6; Frequency Band = 1900 / FDD2	-	Passed	2015/07/23	Lab 2	S01_AE01	

Test Specification: FCC part 2 and 27

27.1 RF Power Output §2.1046, §27.250

27.1; RF Power Output Summary §2.1046, - Passed 2015/07/23 Lab 2 S01_AE01
§27.250

Reference: MDE_ELEKT_1502_FCCg
 according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

Test Case Identifier / Name	Test (condition)	Category	Result	Date of Test	Lab Ref.	Setup
27.2 Frequency stability §2.1055, §27.54						
27.2; Frequency Band = efDD13, Mode = QPSK, Channel = 23230, Frequency = 782MHz	-	Passed	2015/07/28	Lab 2	S01_AE01	
27.2; Frequency Band = efDD17, Mode = QPSK, Channel = 23790, Frequency = 710MHz	-	Passed	2015/07/28	Lab 2	S01_AE01	
27.2; Frequency Band = efDD4, Mode = QPSK, Channel = 20175, Frequency = 1732.5MHz	-	Passed	2015/07/28	Lab 2	S01_AE01	
27.2; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2015/07/30	Lab 2	S01_AE01	
27.2; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2015/07/30	Lab 2	S01_AE01	
27.2; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2015/07/30	Lab 2	S01_AE01	
27.3 Spurious emissions at antenna terminals §2.1051, §27.53						
27.3; Spurious emissions at antenna terminals Summary §2.1051, §27.53	-	Passed	2015/10/27	Lab 2	S01_AE01	
27.4 Field strength of spurious radiation §2.1053, §27.53						
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1312, Frequency = 1712.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1412, Frequency = 1732.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1513, Frequency = 1752.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1312, Frequency = 1712.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1412, Frequency = 1732.4MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1513, Frequency = 1752.6MHz	-	Passed	2015/06/12	Lab 1	S01_AA01	
27.5 Emission and Occupied Bandwidth §2.1049						
27.5; Emission and Occupied Bandwidth Summary §2.1049	-	Passed	2015/07/23	Lab 2	S01_AE01	
27.6 Band edge compliance §2.1053, §27.53						
27.6; Band edge compliance summary §2.1053, §27.53	-	Passed	2015/07/23	Lab 2	S01_AE01	

3.5 Detailed Results

3.5.1 22.1 RF Power Output §2.1046, §22.913

Test: 22.1; RF Power Output Summary §2.1046, §22.913


<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AE01
<i>Date of Test:</i>	2015/07/23 19:59
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22

Detailed Results:

Band	Mode	Channel	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)	RMS Conducted power (dBm)	FCC EIRP limit (W)	IC EIRP limit per SRSP 503 (W)	Maximum antenna gain (dBi)	Verdict
850	GSM	Low	826.4	33.68	33.21	33.21	11.48	11.5	6.92	Pass
		Mid	836.6	33.51	33	33.03			7.09	Pass
		High	846.6	33.3	32.81	32.84			7.3	Pass
	EDGE	Low	826.4	31.55	28.54	29.01	11.48	11.5	9.05	Pass
		Mid	836.6	31.58	28.84	29.17			9.02	Pass
		High	846.6	31.61	28.68	29.02			8.99	Pass
highest value of single mode (GSM/EDGE)				highest value overall						
Band	Mode	Channel	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)	RMS Conducted power (dBm)	FCC EIRP limit (W)	IC EIRP limit per SRSP 503 (W)	Maximum antenna gain (dBi)	Verdict
FDD 5	W-CDMA	Low	826.4	28.42	22.59	22.81	11.48	11.5	17.79	Pass
		Mid	836.6	29.5	23.37	23.58			17.02	Pass
		High	846.6	28.92	23.06	23.27			17.33	Pass
	HSDPA Subtest 1	Low	826.4	27.78	21.98	22.24	11.48	11.5	18.36	Pass
		Mid	836.6	27.4	21.93	22.16			18.44	Pass
		High	846.6	27.65	21.82	22.06			18.54	Pass
FDD 5	HSDPA Subtest 2	Low	826.4	28.52	20.03	20.53	11.48	11.5	20.07	Pass
		Mid	836.6	28.52	19.97	20.52			20.08	Pass
		High	846.6	28.29	19.79	20.44			20.16	Pass
	HSDPA Subtest 3	Low	826.4	28.65	19.44	20.28	11.48	11.5	20.32	Pass
		Mid	836.6	28.65	19.14	20.42			20.18	Pass
		High	846.6	28.42	19.21	20.06			20.54	Pass
FDD 5	HSDPA Subtest 4	Low	826.4	28.92	18.94	20.28	11.48	11.5	20.32	Pass
		Mid	836.6	28.52	18.9	20.06			20.54	Pass
		High	846.6	28.29	18.91	20.02			20.58	Pass
	HSUPA Subtest 1	Low	826.4	29.78	21.76	22.18	11.48	11.5	18.42	Pass
		Mid	836.6	28.92	21.35	21.8			18.8	Pass
		High	846.6	28.92	21.31	21.7			18.9	Pass
FDD 5	HSUPA Subtest 2	Low	826.4	27.91	18.07	19.06	11.48	11.5	21.54	Pass
		Mid	836.6	29.5	19.94	20.9			19.7	Pass
		High	846.6	29.08	20.05	21.05			19.55	Pass
	HSUPA Subtest 3	Low	826.4	29.5	20.01	20.87	11.48	11.5	19.73	Pass
		Mid	836.6	29.63	19.91	20.83			19.77	Pass
		High	846.6	29.32	19.83	20.68			19.92	Pass
FDD 5	HSUPA Subtest 4	Low	826.4	29.78	21.33	21.91	11.48	11.5	18.69	Pass
		Mid	836.6	29.78	21.11	21.74			18.86	Pass
		High	846.6	29.78	21.19	21.77			18.83	Pass
	HSUPA Subtest 5	Low	826.4	29.5	21.58	21.98	11.48	11.5	18.62	Pass
		Mid	836.6	28.92	21.42	21.85			18.75	Pass
		High	846.6	29.08	21.49	21.88			18.72	Pass
highest value of Mode (WCDMA/HSDPA/HSUPA)				highest value overall						

Reference: MDE_ELEKT_1502_FCCg

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

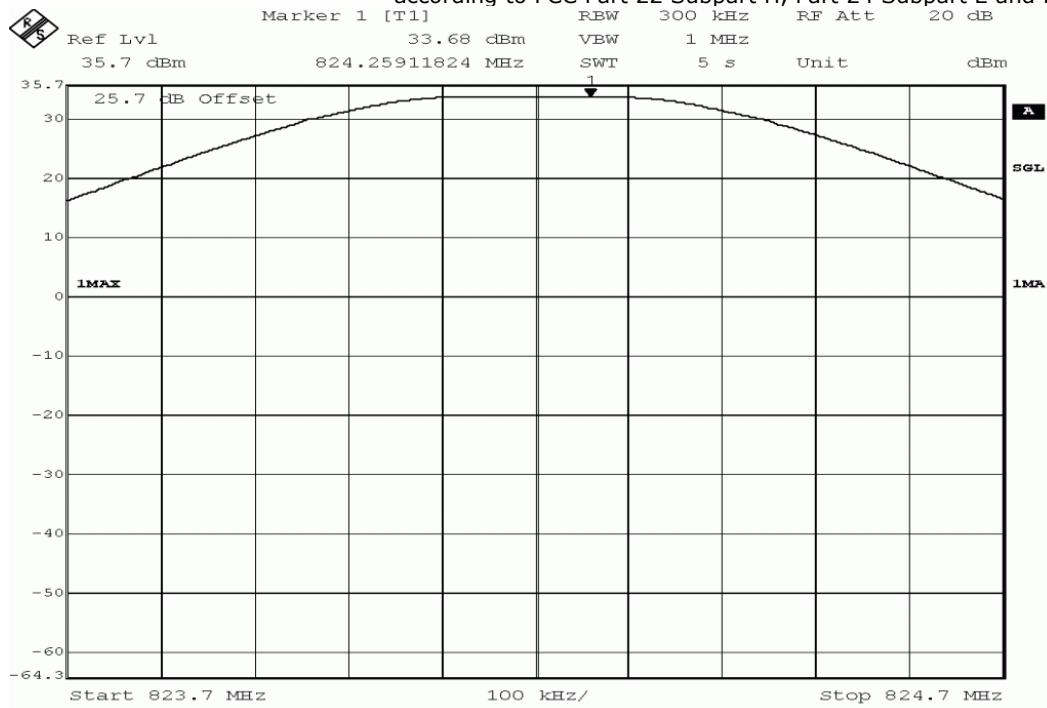


Title: output power measurement
 Comment A: DE1132001, GSM850, output power, channel 128,
 (824.2MHz)

Date: 21.JUL.2015 15:48:03

Marker 1 [T1] RBW 5 MHz RF Att 20 dB

Ref Lvl 23.58 dBm 836.61002004 MHz VBW 10 MHz 5 s Unit dBm

35.7 dB Offset

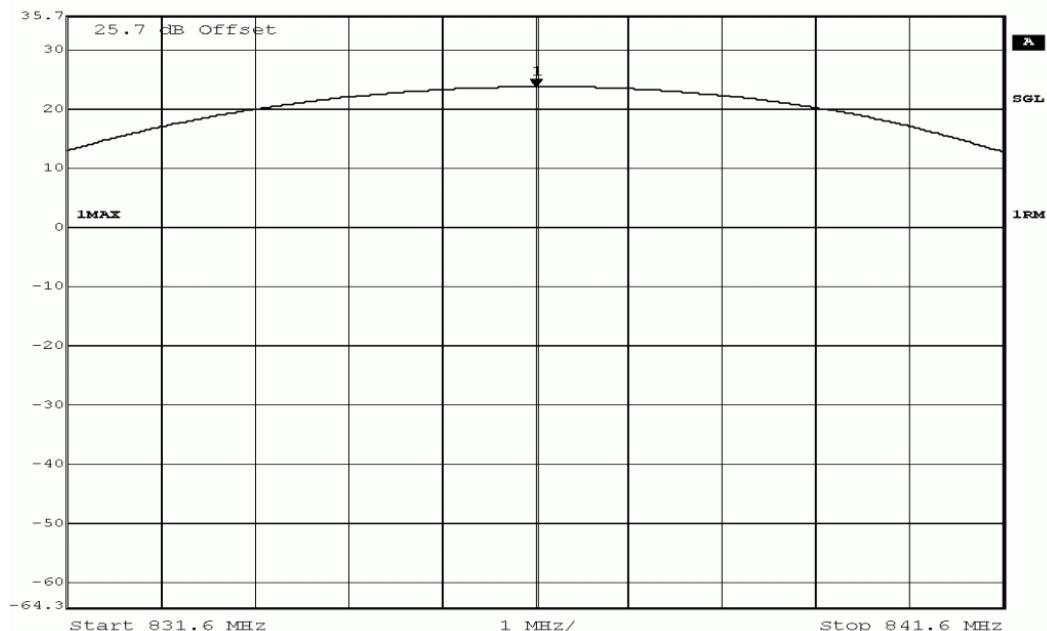

Title: output power measurement
 Comment A: DE1132001, FDD V, output power,
 channel 4183 (836.6MHz)

Date: 23.JUL.2015 13:30:56

3.5.2 22.2 Frequency stability §2.1055

Test: 22.2; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/29 14:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	-1	-5	passed
-30	5			0	4	passed
-30	10			10	17	passed
-20	0	normal	2095.5	2	5	passed
-20	5			1	7	passed
-20	10			5	10	passed
-10	0	normal	2095.5	3	9	passed
-10	5			1	5	passed
-10	10			2	6	passed
0	0	normal	2095.5	6	10	passed
0	5			3	9	passed
0	10			4	8	passed
10	0	normal	2095.5	2	15	passed
10	5			6	16	passed
10	10			9	19	passed
20	0	low	2095.5	8	13	passed
20	5			11	14	passed
20	10			12	16	passed
20	0	normal	2095.5	6	8	passed
20	5			9	12	passed
20	10			7	11	passed
20	0	high	2095.5	7	12	passed
20	5			9	13	passed
20	10			6	9	passed
30	0	normal	2095.5	10	26	passed
30	5			12	17	passed
30	10			9	13	passed
40	0	normal	2095.5	7	18	passed
40	5			8	24	passed
40	10			11	24	passed
50	0	normal	2095.5	10	21	passed
50	5			11	18	passed
50	10			9	19	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	2095.5	7	8	passed
20	5			7	12	passed
20	10			8	16	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 22.2; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/29 14:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	10	16	passed
-30	5			12	20	passed
-30	10			13	25	passed
-20	0	normal	2095.5	16	23	passed
-20	5			13	18	passed
-20	10			10	13	passed
-10	0	normal	2095.5	13	18	passed
-10	5			13	17	passed
-10	10			12	15	passed
0	0	normal	2095.5	15	20	passed
0	5			14	17	passed
0	10			14	19	passed
10	0	normal	2095.5	14	20	passed
10	5			17	26	passed
10	10			15	27	passed
20	0	low	2095.5	19	28	passed
20	5			23	30	passed
20	10			21	29	passed
20	0	normal	2095.5	15	25	passed
20	5			18	30	passed
20	10			19	29	passed
20	0	high	2095.5	9	22	passed
20	5			19	30	passed
20	10			20	26	passed
30	0	normal	2095.5	16	23	passed
30	5			18	24	passed
30	10			19	26	passed
40	0	normal	2095.5	19	26	passed
40	5			19	29	passed
40	10			22	31	passed
50	0	normal	2095.5	20	31	passed
50	5			19	33	passed
50	10			21	33	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	2095.5	15	24	passed
20	5			17	30	passed
20	10			19	28	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 22.2; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 12:44

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	1	7	passed
-30	5			-1	-14	passed
-30	10			0	-4	passed
-20	0	normal	2095.5	-1	-7	passed
-20	5			-1	6	passed
-20	10			0	-5	passed
-10	0	normal	2095.5	-1	5	passed
-10	5			0	-4	passed
-10	10			-1	-4	passed
0	0	normal	2095.5	-1	-6	passed
0	5			0	-4	passed
0	10			-1	5	passed
10	0	normal	2095.5	0	-4	passed
10	5			-1	-5	passed
10	10			-1	-5	passed
20	0	low	2095.5	-1	-5	passed
20	5			0	3	passed
20	10			1	4	passed
20	0	normal	2095.5	-1	-4	passed
20	5			-1	-6	passed
20	10			0	4	passed
20	0	high	2095.5	-2	-7	passed
20	5			0	-2	passed
20	10			-2	-9	passed
30	0	normal	2095.5	-1	-5	passed
30	5			0	5	passed
30	10			-1	-2	passed
40	0	normal	2095.5	-1	-4	passed
40	5			-1	-6	passed
40	10			0	-2	passed
50	0	normal	2095.5	0	-4	passed
50	5			1	-4	passed
50	10			-1	-5	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	2095.5	-1	-5	passed
20	5			-1	-5	passed
20	10			0	-6	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 22.2; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 12:43

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	1	4	passed
-30	5			0	-3	passed
-30	10			0	4	passed
-20	0	normal	2095.5	0	-4	passed
-20	5			0	-4	passed
-20	10			1	6	passed
-10	0	normal	2095.5	0	4	passed
-10	5			0	4	passed
-10	10			1	4	passed
0	0	normal	2095.5	0	5	passed
0	5			1	5	passed
0	10			0	-4	passed
10	0	normal	2095.5	0	6	passed
10	5			0	-4	passed
10	10			-1	-3	passed
20	0	low	2095.5	1	4	passed
20	5			0	-4	passed
20	10			0	5	passed
20	0	normal	2095.5	0	4	passed
20	5			0	-5	passed
20	10			-1	-5	passed
20	0	high	2095.5	0	5	passed
20	5			0	4	passed
20	10			0	-3	passed
30	0	normal	2095.5	0	-5	passed
30	5			-1	-6	passed
30	10			-1	-4	passed
40	0	normal	2095.5	0	2	passed
40	5			1	5	passed
40	10			1	4	passed
50	0	normal	2095.5	0	-5	passed
50	5			1	-5	passed
50	10			2	6	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	2095.5	0	6	passed
20	5			1	5	passed
20	10			1	5	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 22.2; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 12:43

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	0	4	passed
-30	5			0	-4	passed
-30	10			0	-6	passed
-20	0	normal	2095.5	0	-5	passed
-20	5			0	-5	passed
-20	10			0	-4	passed
-10	0	normal	2095.5	0	-4	passed
-10	5			0	-5	passed
-10	10			-1	-5	passed
0	0	normal	2095.5	-1	-7	passed
0	5			0	-6	passed
0	10			0	-4	passed
10	0	normal	2095.5	-1	-5	passed
10	5			0	-4	passed
10	10			0	-6	passed
20	0	low	2095.5	-1	-5	passed
20	5			-1	5	passed
20	10			0	4	passed
20	0	normal	2095.5	-1	-5	passed
20	5			0	-4	passed
20	10			0	-4	passed
20	0	high	2095.5	0	-4	passed
20	5			0	4	passed
20	10			0	5	passed
30	0	normal	2095.5	0	-5	passed
30	5			0	5	passed
30	10			0	6	passed
40	0	normal	2095.5	-1	-4	passed
40	5			0	-6	passed
40	10			1	4	passed
50	0	normal	2095.5	0	5	passed
50	5			0	-4	passed
50	10			0	3	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	2095.5	-1	-5	passed
20	5			-1	-4	passed
20	10			0	-4	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

3.5.3 22.3 Spurious emissions at antenna terminals §2.1051, §22.917

Test: 22.3; Spurious emissions at antenna terminals summary §2.1051, §22.917

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/07/23 13:13

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

Mode / Band	Channel	detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
GSM / 850	128	peak	maxhold	3	824	-13.6	0.6	-13	passed
		peak	maxhold	100	1649	-31.1	18.1	-13	passed
	190	peak	maxhold	100	1673	-28	15	-13	passed
		peak	maxhold	100	2509	-32.9	19.9	-13	passed
	251	peak	maxhold	3	849	-14.7	1.7	-13	passed
		peak	maxhold	100	1697	-26.3	13.3	-13	passed
EDGE / 850	128	peak	maxhold	3	824	-15.9	2.9	-13	passed
		peak	maxhold	100	1649	-31.8	18.8	-13	passed
	190	peak	maxhold	100	1673	-33.48	20.48	-13	passed
		peak	maxhold	3	849	-19.8	6.8	-13	passed
	251	peak	maxhold	100	1697	-30	17	-13	passed
		peak	maxhold	100	1697	-30	17	-13	passed
UMTS / FDD5	4132	rms	maxhold	50	824	-33.61	20.61	-13	passed
	4183	rms	maxhold	-	-	-	>20	-13	passed
	4233	rms	maxhold	50	849	-32.5	19.5	-13	passed
HSDPA / FDD5	4132	rms	maxhold	50	824	-34.3	21.3	-13	passed
	4183	rms	maxhold	-	-	-	>20	-13	passed
	4233	rms	maxhold	50	849	-34.12	21.12	-13	passed
HSUPA / FDD5	4132	rms	maxhold	100	823	-33.88	20.88	-13	passed
	4183	rms	maxhold	-	-	-	>20	-13	passed
	4233	rms	maxhold	100	850	-34.12	21.12	-13	passed

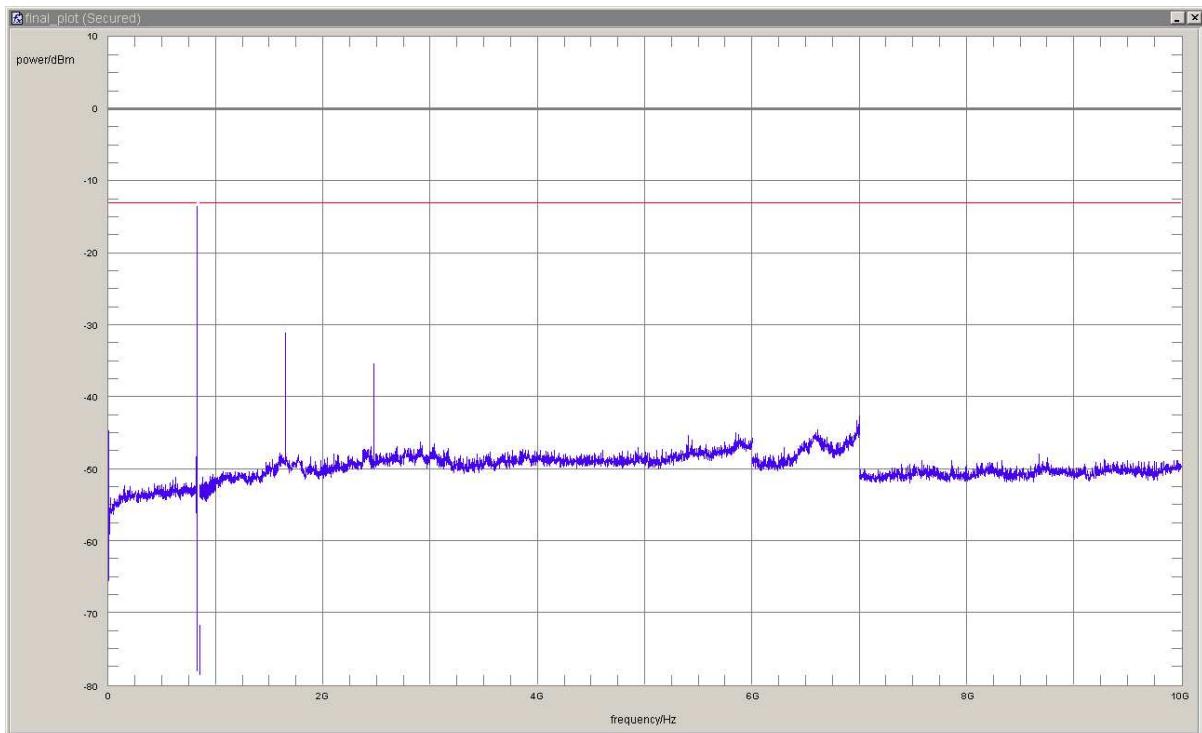

3.5.4 22.4 Field strength of spurious radiation §2.1053, §22.917

Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 128, Frequency = 824.2MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/10 23:49


Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	823.9619	-30.91	-13.00	17.91	-180.0	horizontal	vertical	passed
peak	maxhold	3	823.9739	-29.95	-13.00	16.95	-180.0	horizontal	vertical	passed
peak	maxhold	3	823.9800	-32.34	-13.00	19.34	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

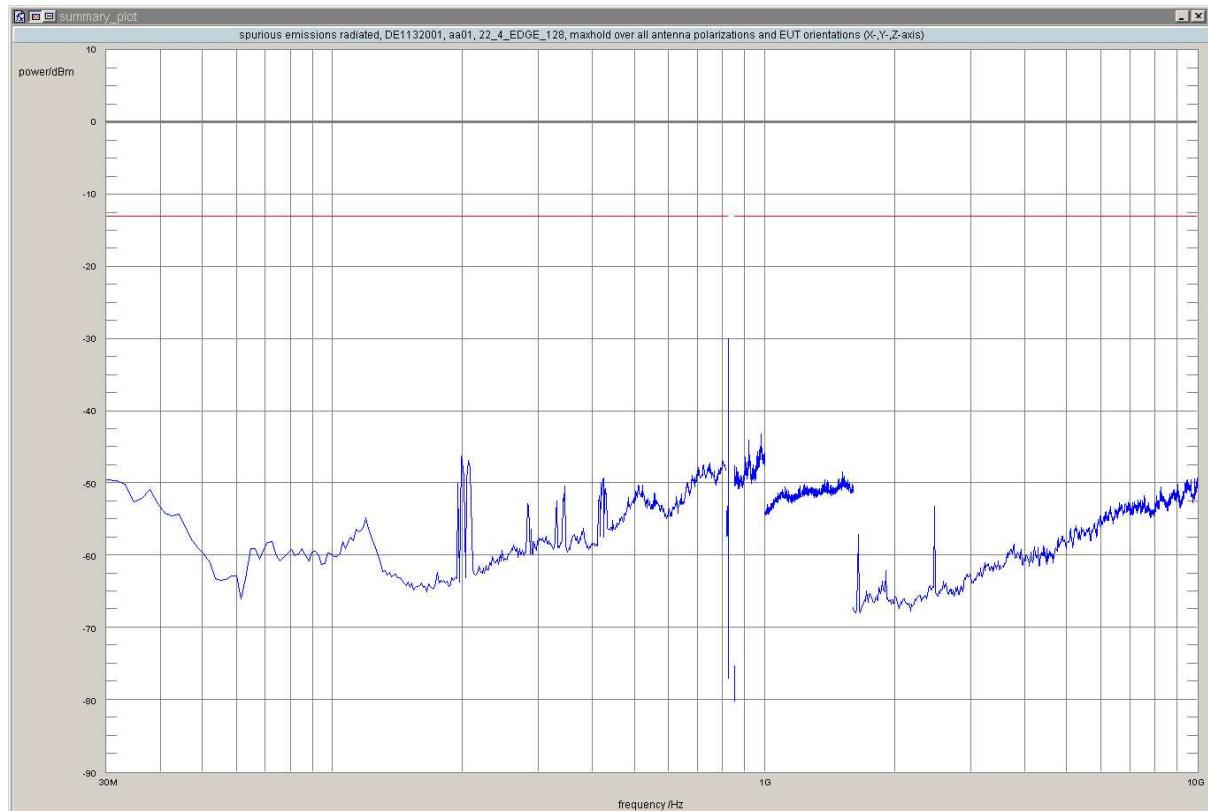

Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/10 23:38


Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	981.1	-43.83	-13.00	30.83	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

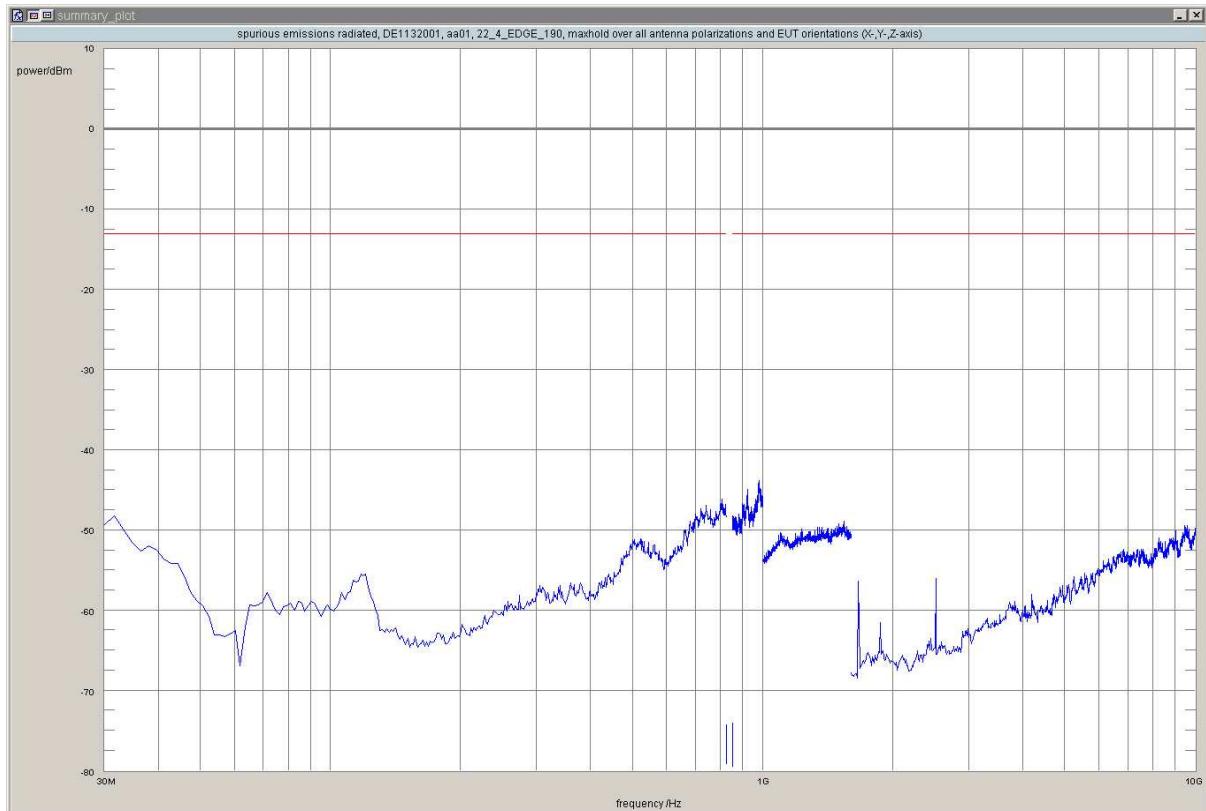


Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 251, Frequency = 848.8MHz

Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/11 9:55
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	849.0040	-30.61	-13.00	17.61	-180.0	horizontal	vertical	passed
peak	maxhold	3	849.0180	-32.44	-13.00	19.44	-180.0	horizontal	horizontal	passed
peak	maxhold	3	849.0321	-27.19	-13.00	14.19	-180.0	horizontal	vertical	passed
peak	maxhold	3	849.0381	-31.86	-13.00	18.86	0.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

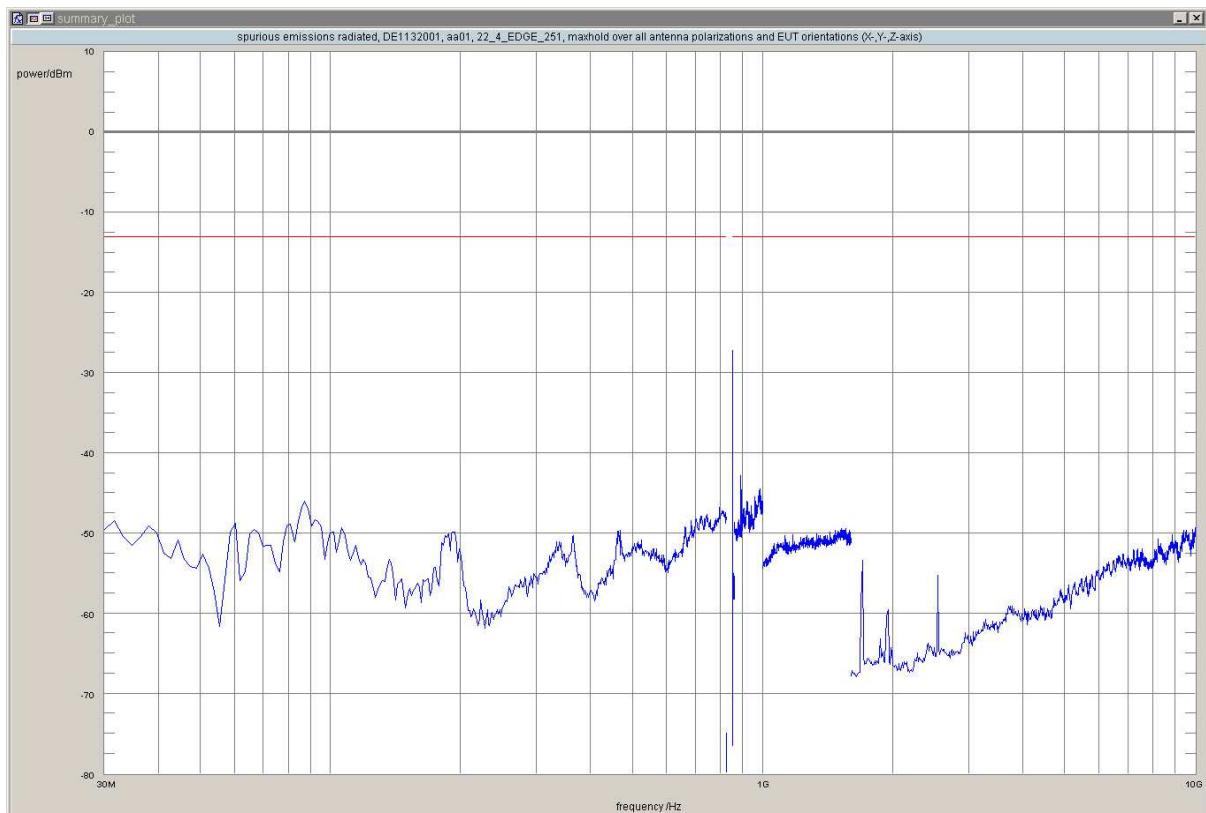


Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 128, Frequency = 824.2MHz

Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/10 22:03
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	823.9539	-32.73	-13.00	19.73	0.0	horizontal	horizontal	passed
peak	maxhold	3	823.9599	-29.30	-13.00	16.30	0.0	horizontal	vertical	passed
peak	maxhold	3	823.9639	-26.56	-13.00	13.56	-180.0	horizontal	horizontal	passed
peak	maxhold	3	823.9679	-24.49	-13.00	11.49	-180.0	horizontal	vertical	passed
peak	maxhold	3	823.9800	-26.26	-13.00	13.26	0.0	horizontal	vertical	passed
peak	maxhold	3	823.9840	-24.55	-13.00	11.55	-180.0	horizontal	vertical	passed
peak	maxhold	3	823.9960	-23.91	-13.00	10.91	-180.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

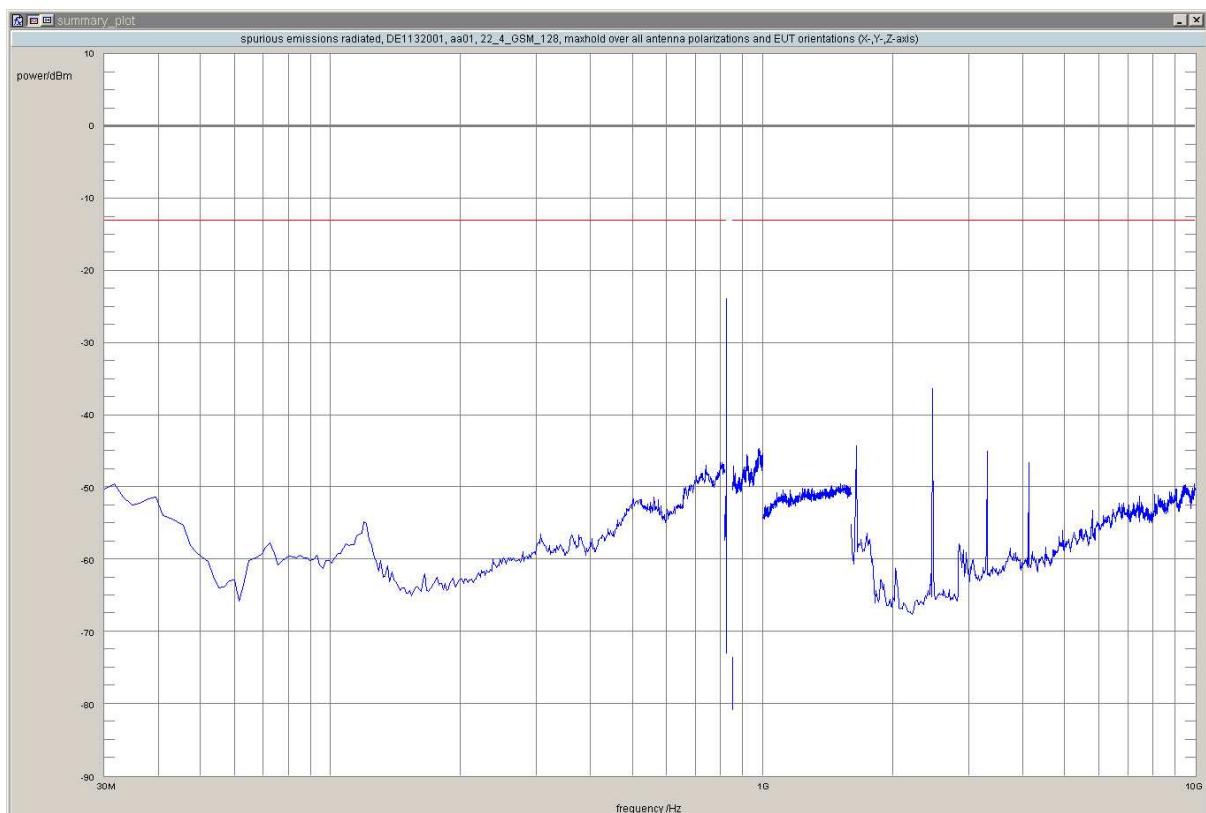


Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/10 22:05
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	2509.0	-36.53	-13.00	23.53	-180.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

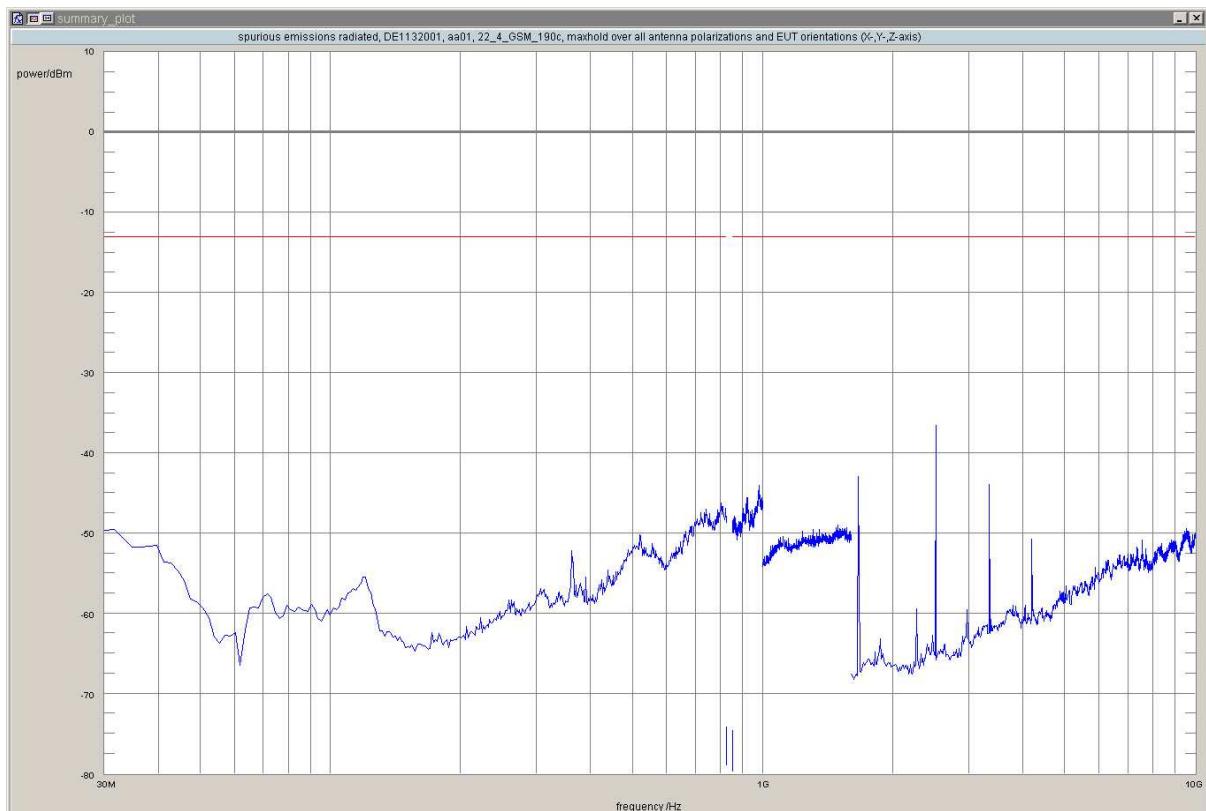


Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 251, Frequency = 848.8MHz

Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/10 22:08
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	849.0000	-30.67	-13.00	17.67	0.0	horizontal	vertical	passed
peak	maxhold	3	849.0060	-28.26	-13.00	15.26	-180.0	horizontal	vertical	passed
peak	maxhold	3	849.0160	-24.30	-13.00	11.30	-180.0	horizontal	vertical	passed
peak	maxhold	3	849.0301	-31.79	-13.00	18.79	-180.0	vertical	vertical	passed
peak	maxhold	3	849.0361	-31.32	-13.00	18.32	0.0	horizontal	horizontal	passed
peak	maxhold	3	849.0521	-32.38	-13.00	19.38	0.0	horizontal	vertical	passed
peak	maxhold	3	849.0561	-29.81	-13.00	16.81	-180.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

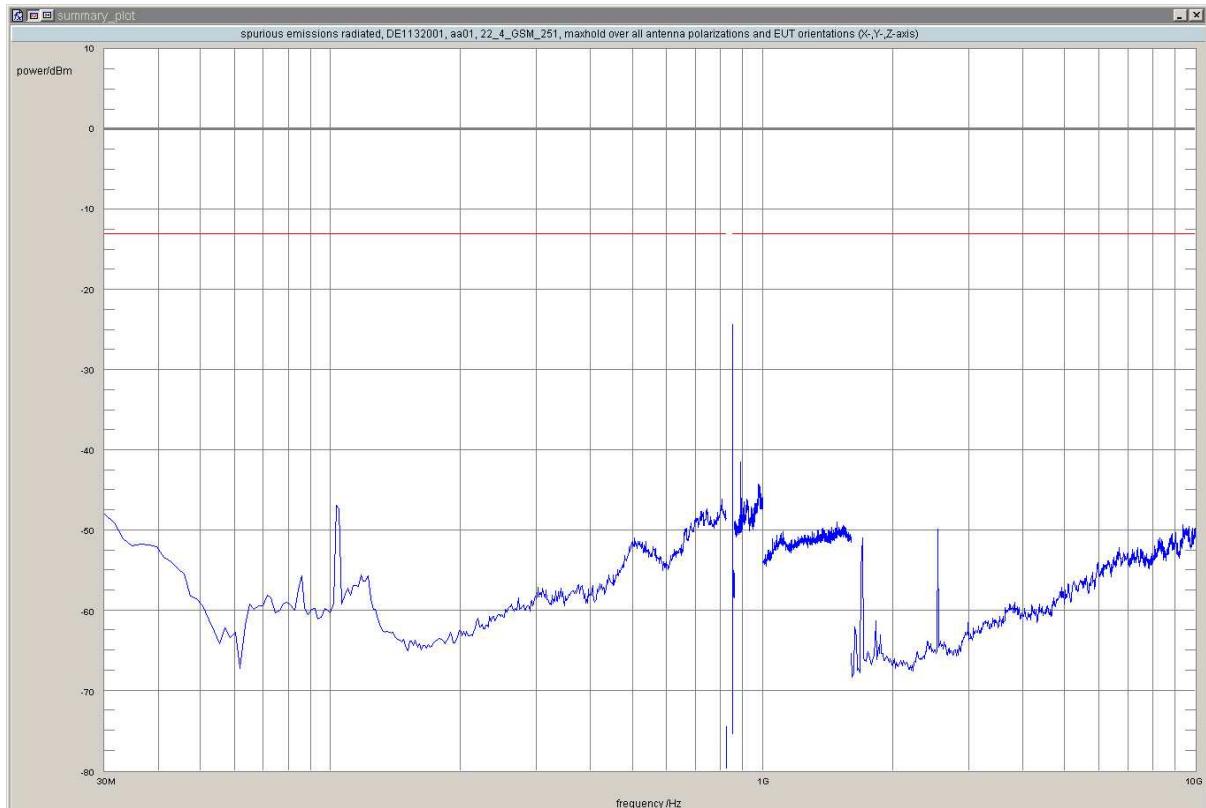

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz


Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/12 15:21
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	870.7	-27.55	-13.00	14.55	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

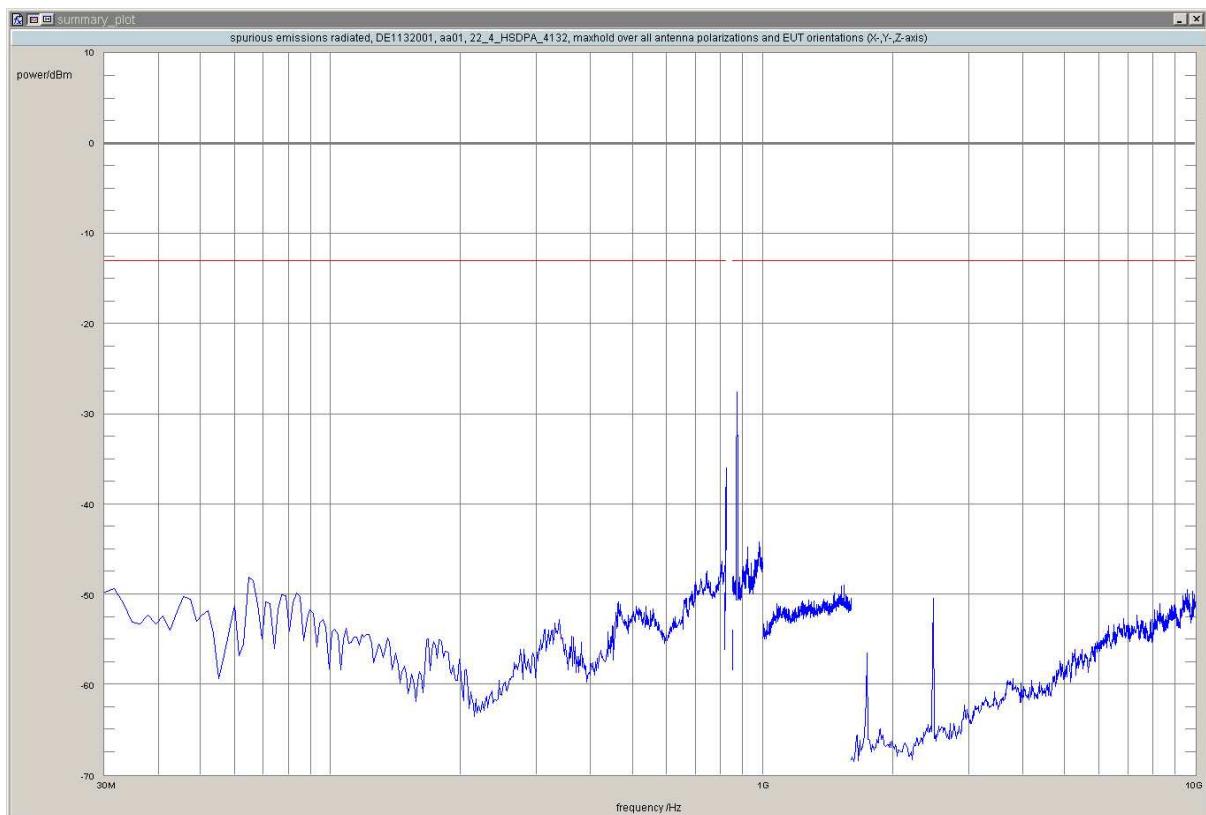

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 16:01

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES


Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	881.3	-26.71	-13.00	13.71	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

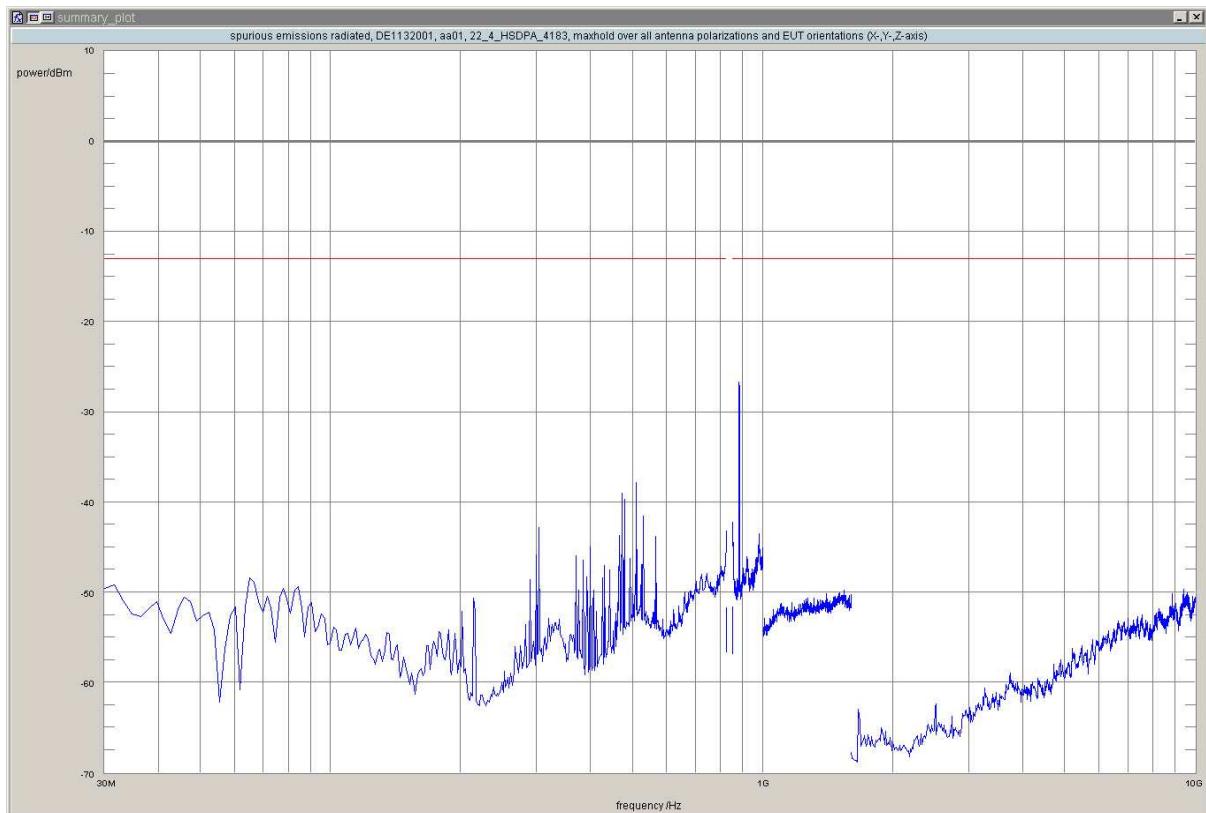

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 16:41

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES


Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	851.91	-37.85	-13.00	24.85	-180.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

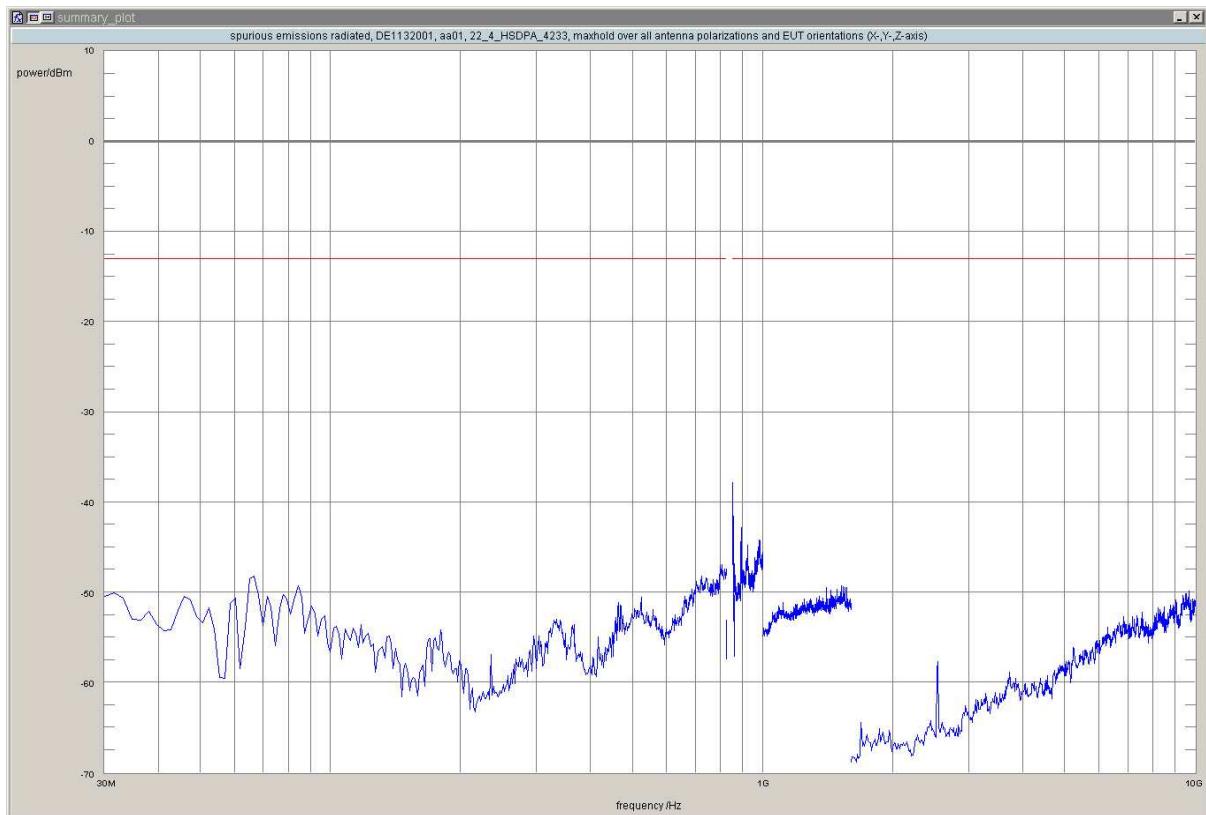

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz


Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/13 4:54
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	822.40	-38.14	-13.00	25.14	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

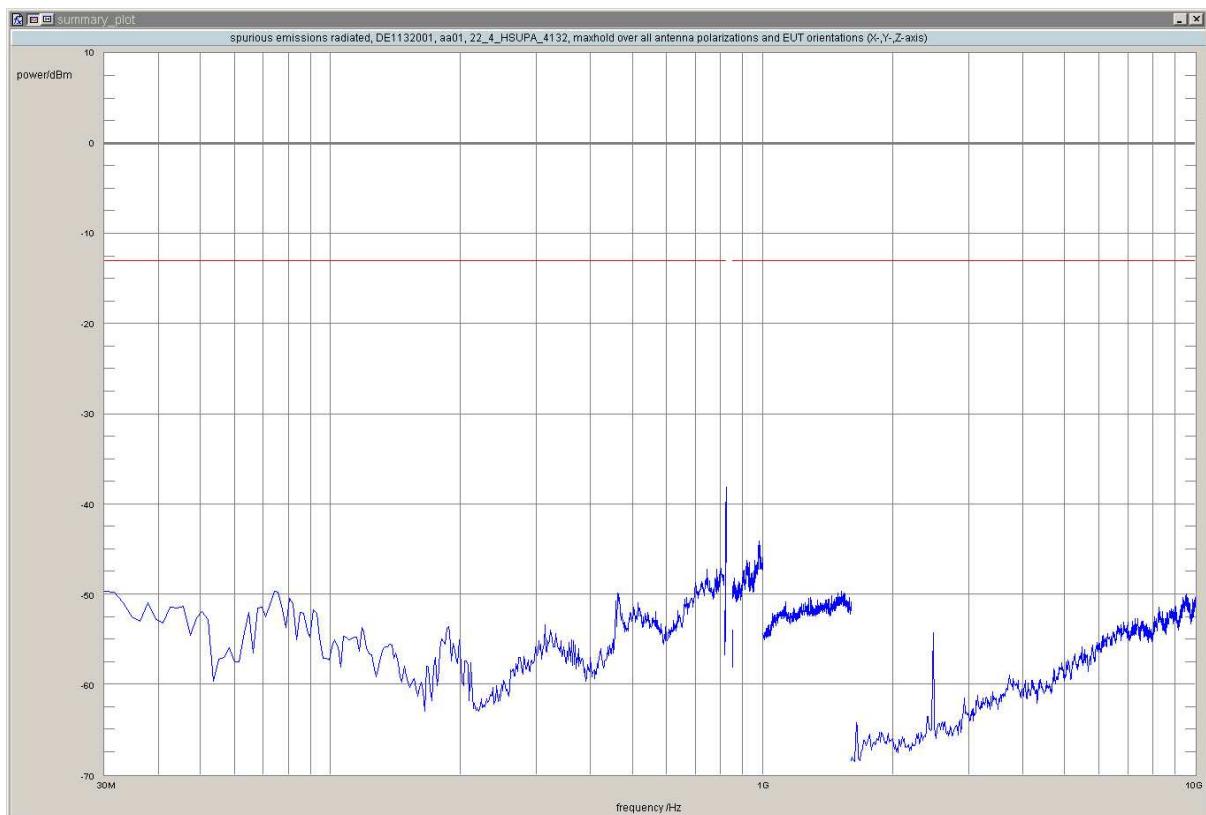

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/13 5:00

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES


Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	850.0	-39.34	-13.00	26.34	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

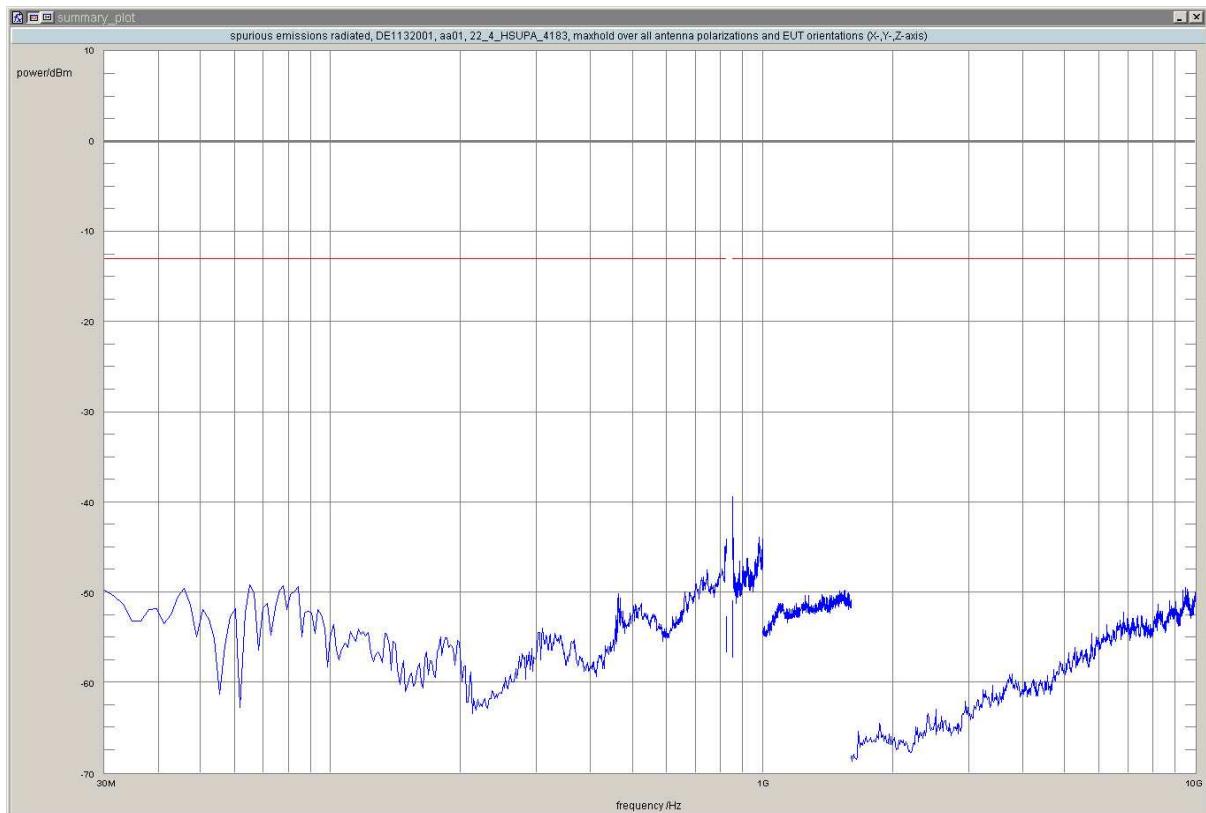

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz


Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/13 5:00
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	850.83	-37.76	-13.00	24.76	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

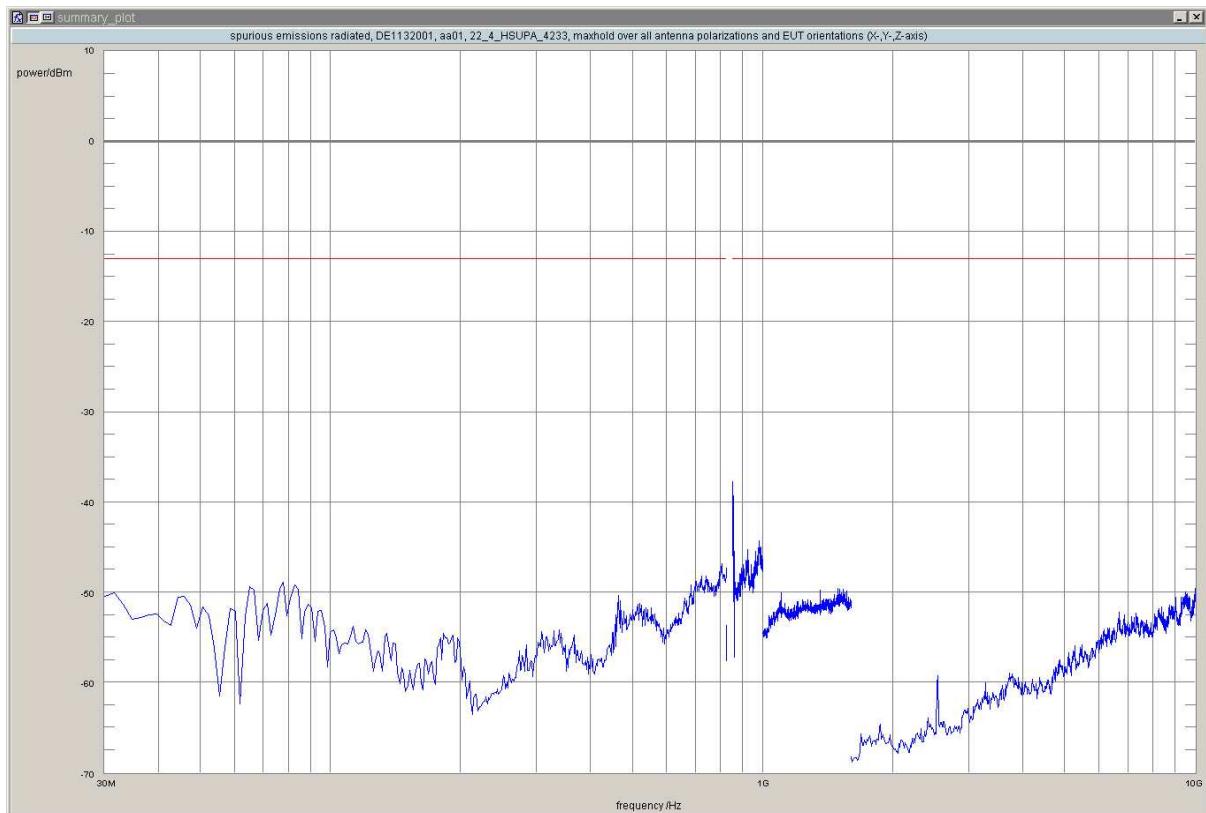

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz


Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/13 5:00
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	871.0	-28.56	-13.00	15.56	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

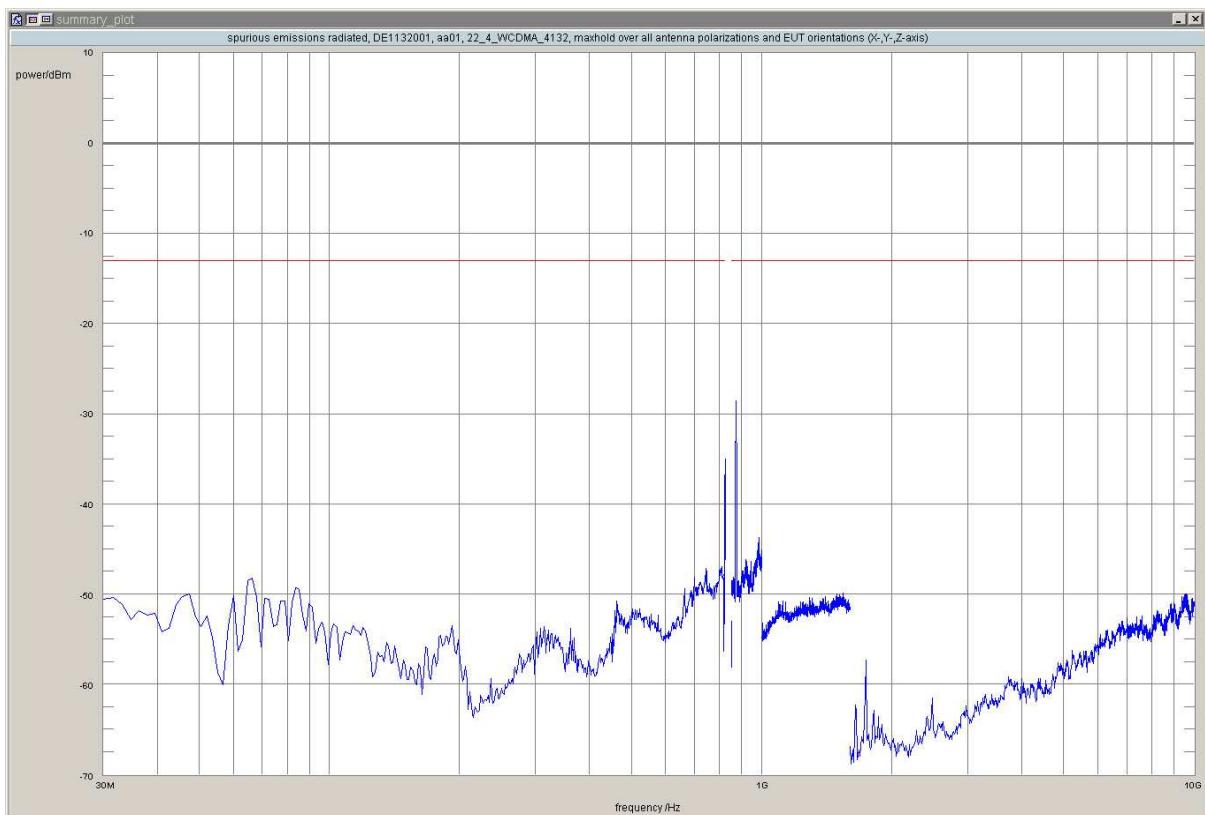

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/13 5:00

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES


Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	881.6	-27.48	-13.00	14.48	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

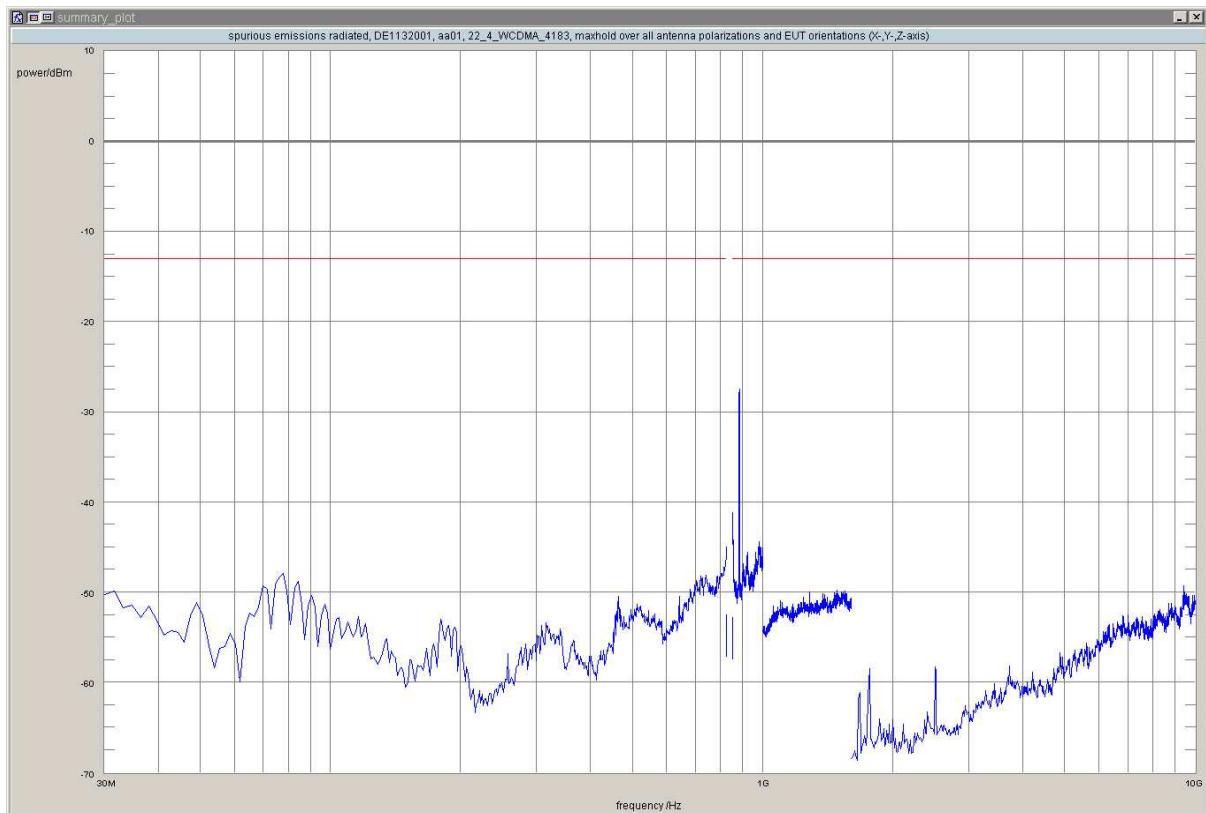

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz


Result: Passed
 Setup No.: S01_AA01
 Date of Test: 2015/06/13 5:00
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	891.2	-26.21	-13.00	13.21	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

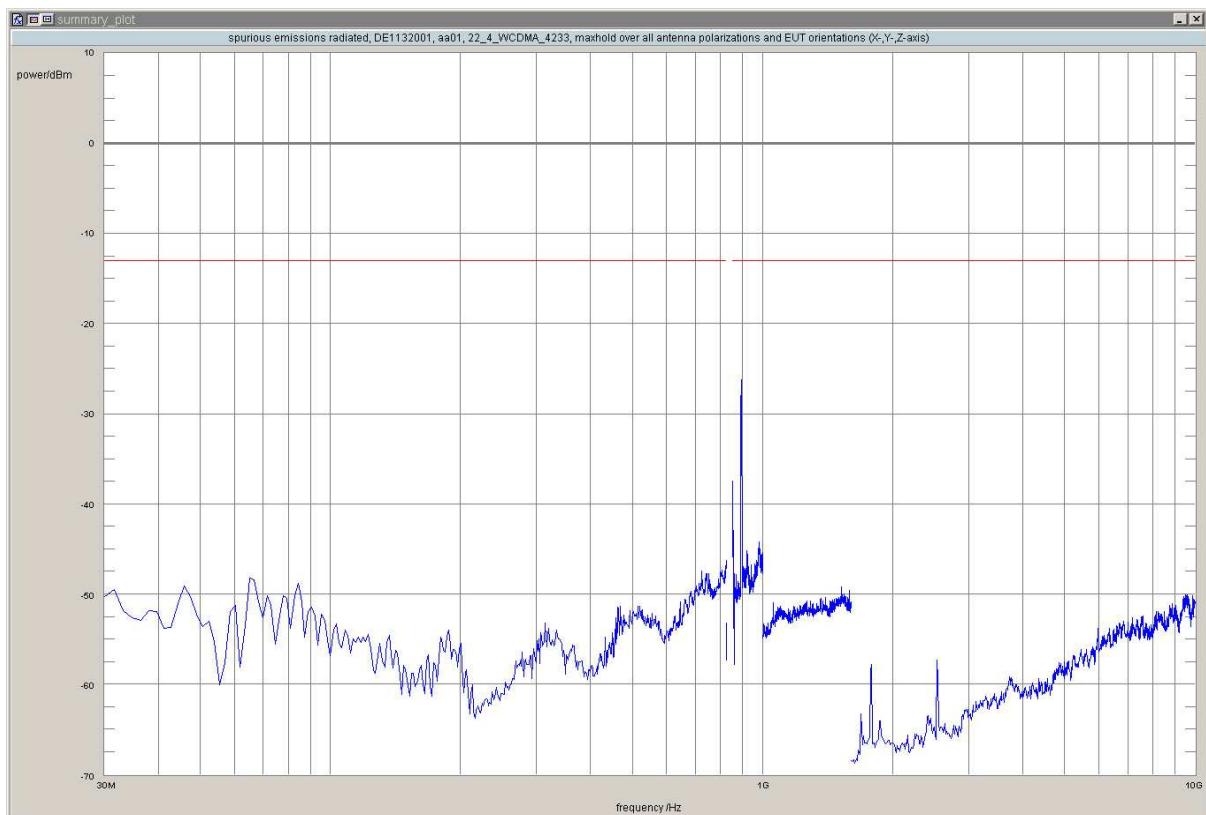

added by operator

3.5.5 22.5 Emission and Occupied Bandwidth §2.1049, §22.917

Test: 22.5; Emission and Occupied Bandwidth Summary §2.1049, §22.917

Result:

Passed

Setup No.:

S01_AE01

Date of Test:

2015/07/23 19:56

Body:


FCC47CFRChIPART22PUBLIC MOBILE SERVICES


Test Specification:

FCC part 2 and 22

Detailed Results:

Band	Mode	Channel	-26dB BW / kHz	99% BW / kHz	Verdict
850	GSM	128	312.6	244.5	Passed
		190	298.6	246.5	Passed
		251	316.6	248.5	Passed
	EDGE	128	288.6	246.5	Passed
		190	292.6	236.5	Passed
		251	292.6	242.5	Passed
FDD 5	UMTS	4132	4689.4	4168.3	Passed
		4183	4689.4	4168.3	Passed
		4233	4689.4	4188.4	Passed
	HSDPA	4132	4709.4	4168.3	Passed
		4183	4709.4	4168.3	Passed
		4233	4709.4	4188.4	Passed
	HSUPA	4132	4689.4	4188.4	Passed
		4183	4689.4	4168.3	Passed
		4233	4709.4	4188.4	Passed

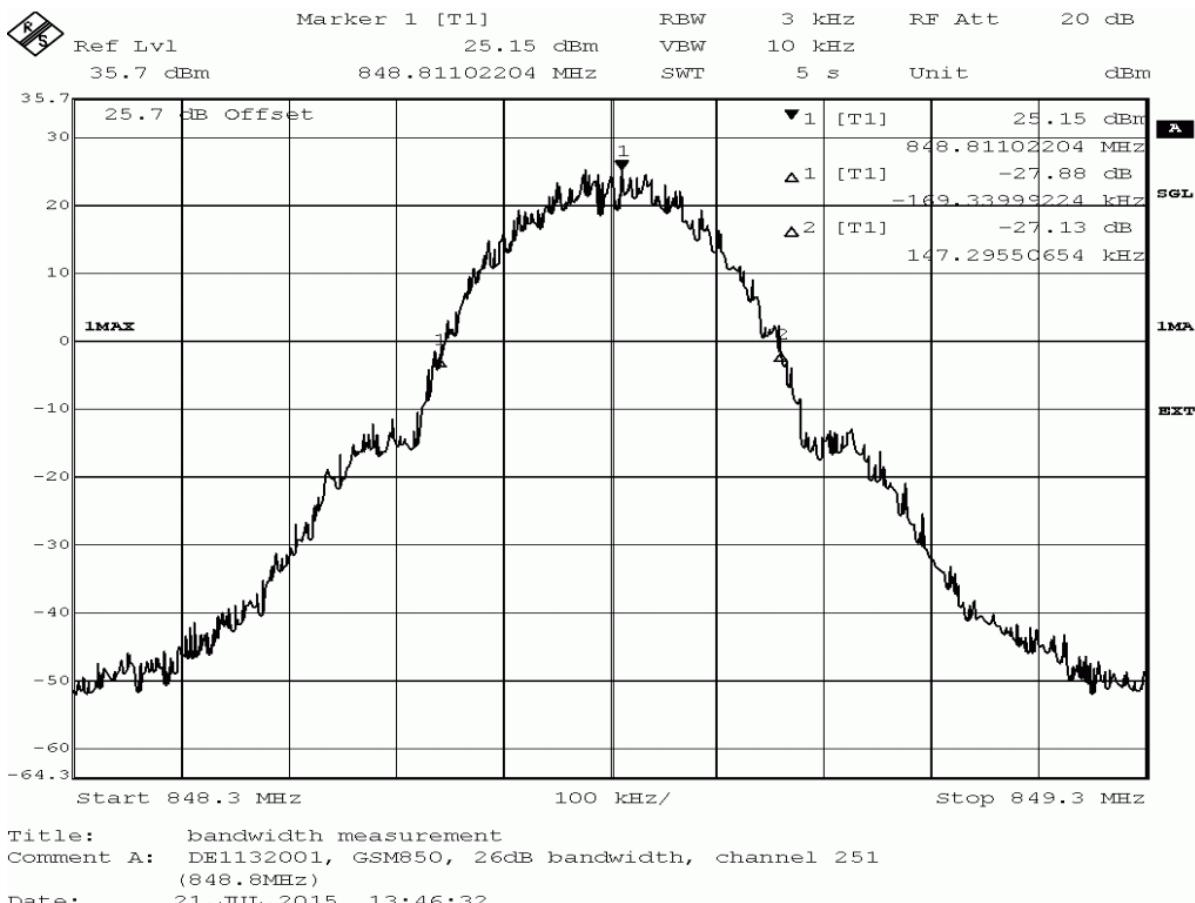

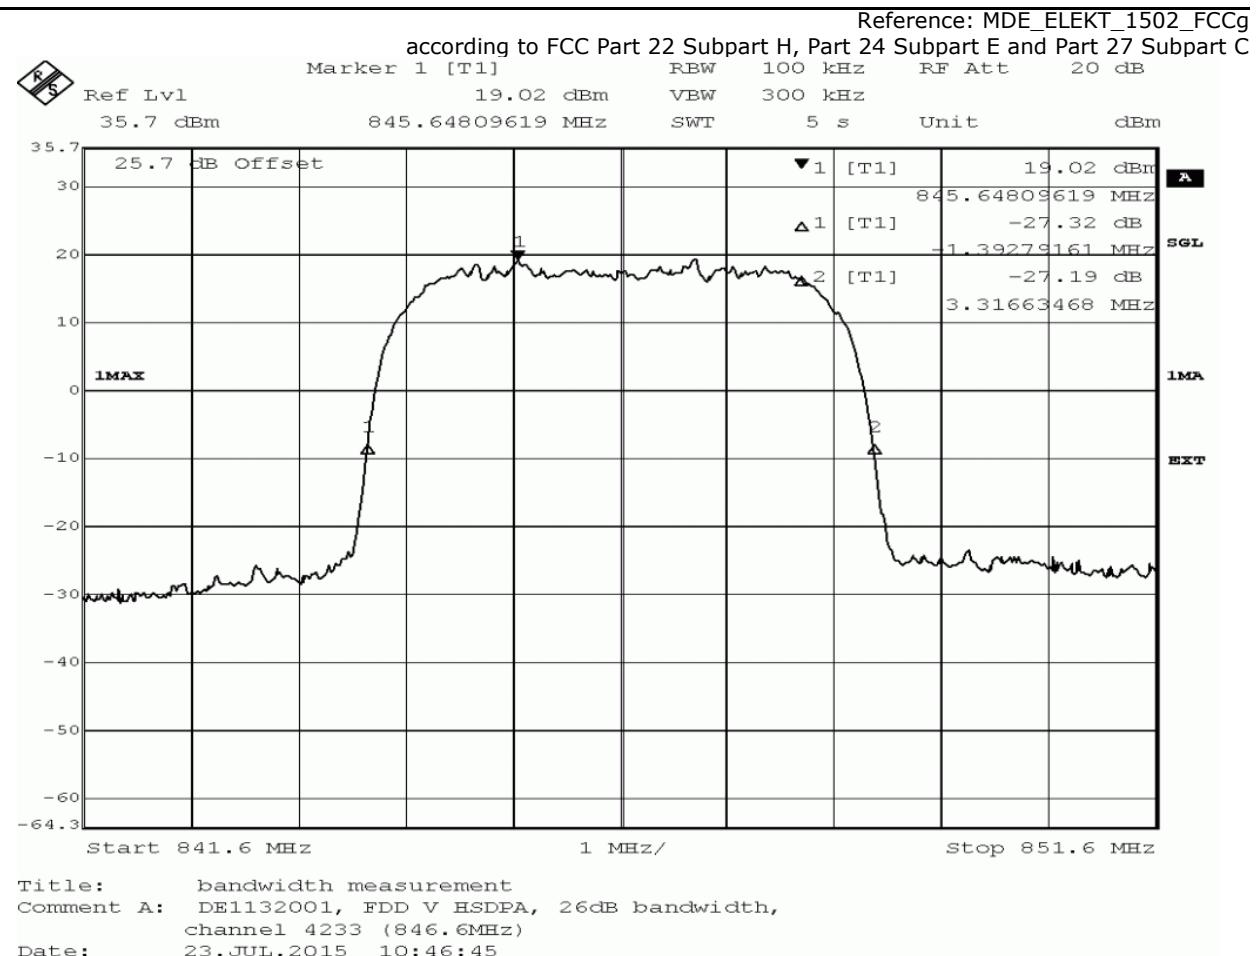

3.5.6 22.6 Band edge compliance §2.1053, §22.917

Test: 22.6; Band edge compliance Summary §2.1053, §22.917

Result:

Passed

Setup No.:

S01_AE01

Date of Test:

2015/07/23 19:57


Body:

FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification:

FCC part 2 and 22

Detailed Results:

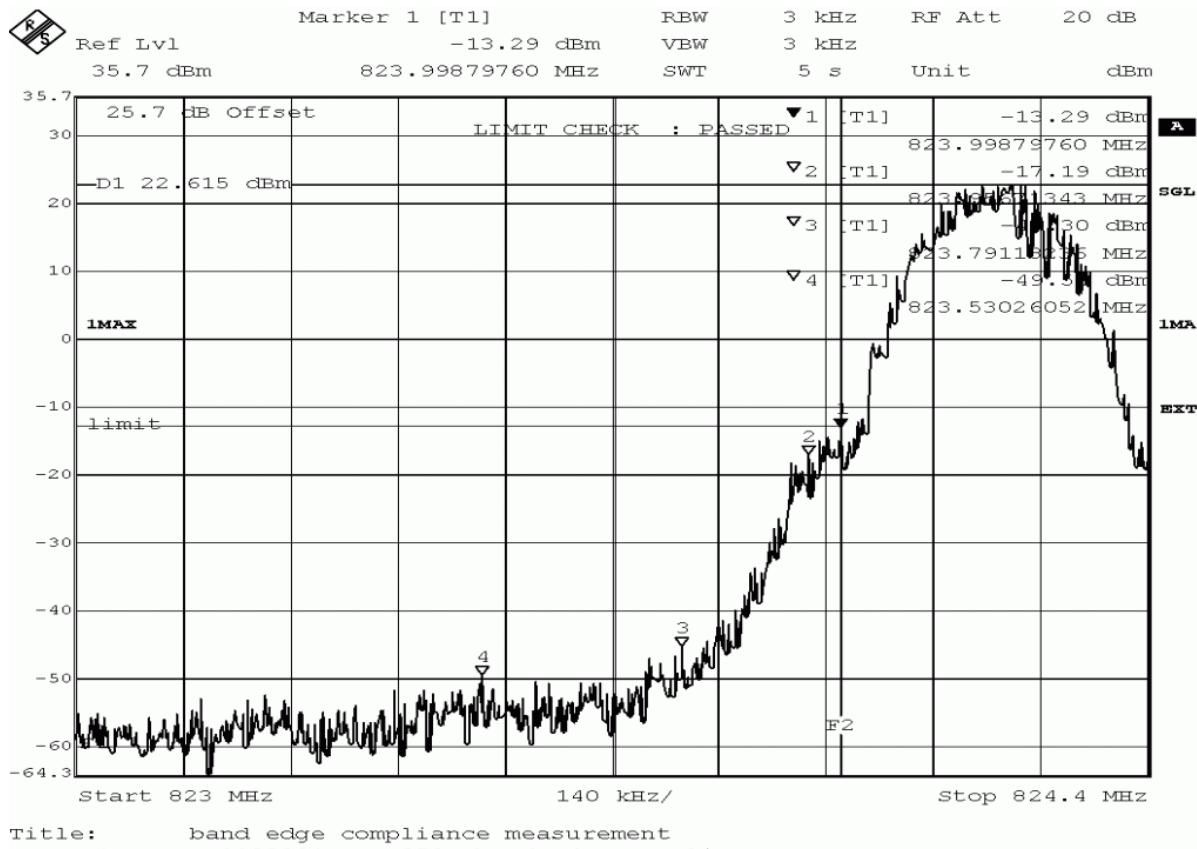

Band	Mode	Channel	Detector	Trace	Resolution bandwidth /kHz	Frequency /MHz	Peak value /dBm	Margin to limit /dB	Limit / dBm	Verdict
850	GSM	128	peak	maxhold	3	824	-13.29	0.29	-13	passed
		251	peak	maxhold	3	849	-14.39	1.39	-13	passed
	EDGE	128	peak	maxhold	3	824	-19.25	6.25	-13	passed
		251	peak	maxhold	3	849	-18.74	5.74	-13	passed
FDD 5	UMTS	4132	rms	maxhold	50	824.0	-33.02	20.02	-13	passed
		4233	rms	maxhold	50	849.0	-33.42	20.42	-13	passed
	HSDPA	4132	rms	maxhold	50	824.0	-34.29	21.29	-13	passed
		4233	rms	maxhold	50	849.0	-34.29	21.29	-13	passed
	HSUPA	4132	rms	maxhold	50	824.0	-33.84	20.84	-13	passed
		4233	rms	maxhold	50	849.0	-34.29	21.29	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

3.5.7 24.1 RF Power Output §2.1046, §24.232

Test: 24.1; RF Power Output Summary §2.1046, §24.232

Result: Passed
Setup No.: S01_AE01
Date of Test: 2015/07/23 20:03
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24


Detailed Results:

Band	Mode	Channel	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)	RMS Conducted power (dBm)	FCC EIRP limit (W)	IC EIRP limit per SRSP-503 (W)	Maximum antenna gain (dBi)	Verdict
1900	GSM	Low	1852.4	29.97	29.38	29.41	2	2	3.03	Pass
		Mid	1880	30.18	29.52	29.56			2.82	Pass
		High	1907.6	30.22	29.58	29.62			2.78	Pass
1900	EDGE	Low	1852.4	28.87	25.61	26	2	2	4.13	Pass
		Mid	1880	29.07	25.83	26.26			3.93	Pass
		High	1907.6	29	25.84	26.21			4	Pass
highest value of single mode (GSM/EDGE)					highest value overall					

Band	Mode	Channel	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)	RMS Conducted power (dBm)	FCC EIRP limit (W)	IC EIRP limit per SRSP-503 (W)	Maximum antenna gain (dBi)	Verdict
FDD 2	W-CDMA	Low	1852.4	28.25	22.56	22.8	2	2	10.2	Pass
		Mid	1880	28.76	22.97	23.18			9.82	Pass
		High	1907.6	28.63	22.83	23.02			9.98	Pass
FDD 2	Subtest 1	Low	1852.4	27.76	21.88	22.08	2	2	10.92	Pass
		Mid	1880	28.28	22.31	22.51			10.49	Pass
		High	1907.6	27.9	22.22	22.42			10.58	Pass
FDD 2	Subtest 2	Low	1852.4	28.41	19.92	20.57	2	2	12.43	Pass
		Mid	1880	28.79	20.28	20.98			12.02	Pass
		High	1907.6	29.02	20.16	20.89			12.11	Pass
FDD 2	Subtest 3	Low	1852.4	28.41	19.21	20.26	2	2	12.74	Pass
		Mid	1880	29.15	19.57	20.59			12.41	Pass
		High	1907.6	29.02	19.43	20.33			12.67	Pass
FDD 2	Subtest 4	Low	1852.4	28.65	18.81	20.16	2	2	12.84	Pass
		Mid	1880	29.02	19.38	20.48			12.52	Pass
		High	1907.6	28.65	19.17	20.39			12.61	Pass
FDD 2	Subtest 1	Low	1852.4	29.02	21.08	21.65	2	2	11.35	Pass
		Mid	1880	29.28	21.6	22.08			10.92	Pass
		High	1907.6	29.02	21.49	21.92			11.08	Pass
FDD 2	Subtest 2	Low	1852.4	29.28	19.71	20.65	2	2	12.35	Pass
		Mid	1880	29.15	19.74	20.67			12.33	Pass
		High	1907.6	29.82	20.11	21.04			11.96	Pass
FDD 2	Subtest 3	Low	1852.4	29.28	20.08	20.85	2	2	12.15	Pass
		Mid	1880	29.42	20.01	20.91			12.09	Pass
		High	1907.6	29.28	19.94	20.84			12.16	Pass
FDD 2	Subtest 4	Low	1852.4	29.28	21.03	21.65	2	2	11.35	Pass
		Mid	1880	29.82	21.39	22			11	Pass
		High	1907.6	30	21.16	21.76			11.24	Pass
FDD 2	Subtest 5	Low	1852.4	28.65	21.15	21.56	2	2	11.44	Pass
		Mid	1880	29.42	21.63	22.04			10.96	Pass
		High	1907.6	29.15	21.64	22.1			10.9	Pass
highest value of Mode (WCDMA/HSDPA/HSUPA)					highest value overall					

Reference: MDE_ELEKT_1502_FCCg

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

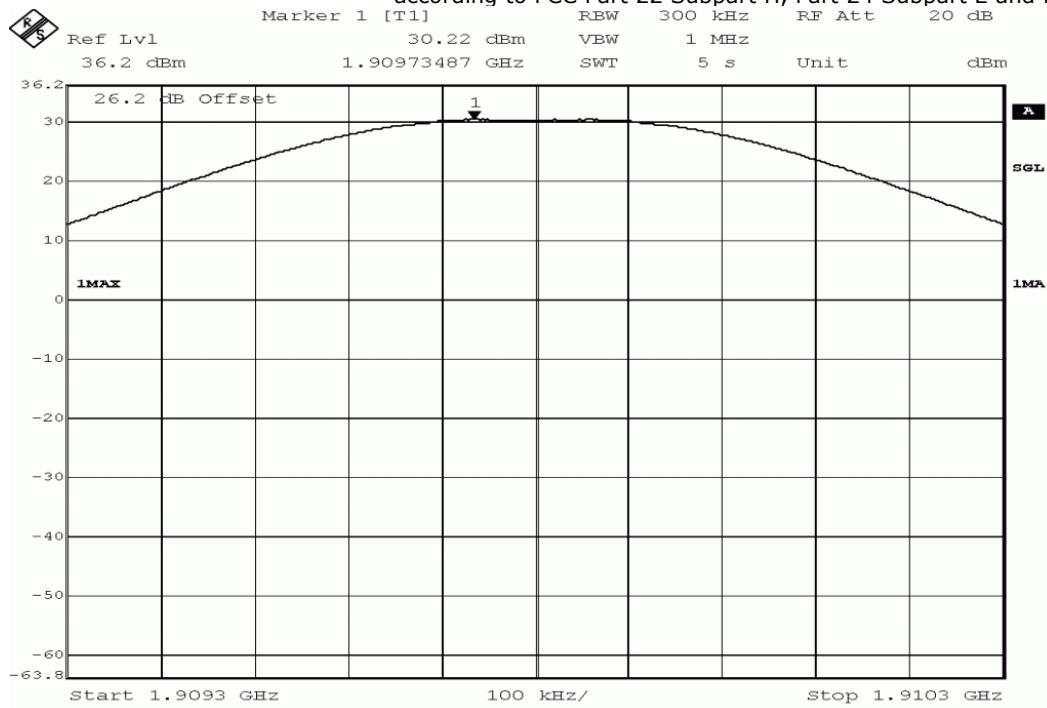


Title: output power measurement
 Comment A: DE1132001, GSM1900, output power,
 channel 810 (1909.8MHz)

Date: 21.JUL.2015 15:17:59

Marker 1 [T1] RBW 5 MHz RF Att 20 dB

Ref Lvl 23.18 dBm 1.88007014 GHz VBW 10 MHz 5 s Unit dBm

36.2 dBm

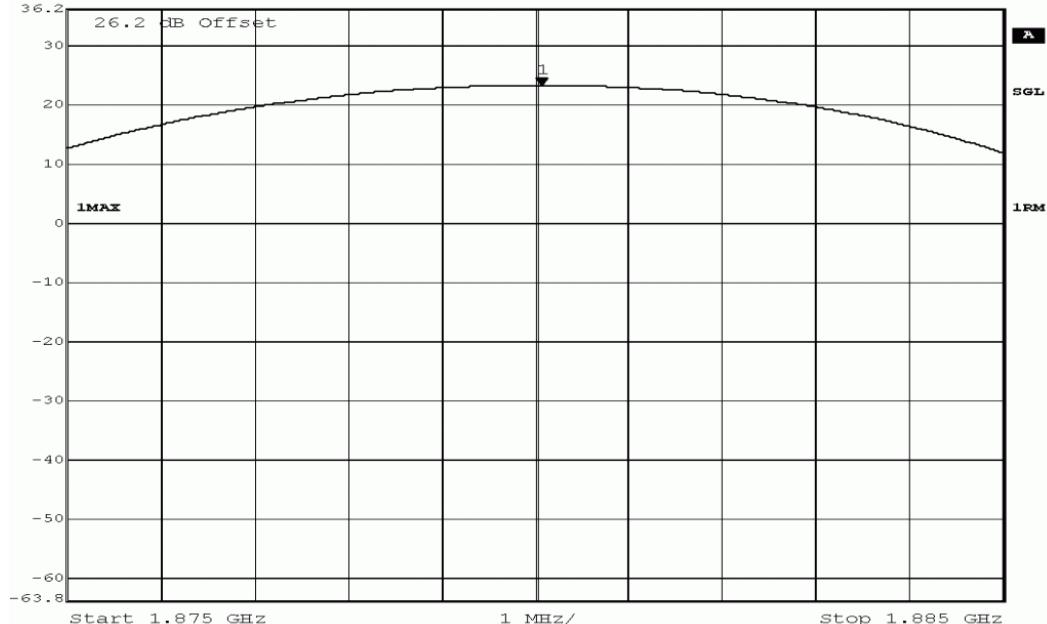

Title: output power measurement
 Comment A: DE1132001, FDD II, output power,
 channel 9400 (1880.0MHz)

Date: 21.JUL.2015 14:58:37

3.5.8 24.2 Frequency stability §2.1055, §24.235

Test: 24.2; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/29 14:20

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4700	58	63	passed
-30	5			48	58	passed
-30	10			56	63	passed
-20	0	normal	4700	53	61	passed
-20	5			56	62	passed
-20	10			51	61	passed
-10	0	normal	4700	52	59	passed
-10	5			54	60	passed
-10	10			55	59	passed
0	0	normal	4700	48	57	passed
0	5			52	62	passed
0	10			51	57	passed
10	0	normal	4700	46	66	passed
10	5			51	66	passed
10	10			56	65	passed
20	0	low	4700	57	68	passed
20	5			55	68	passed
20	10			49	64	passed
20	0	normal	4700	51	68	passed
20	5			54	68	passed
20	10			53	66	passed
20	0	high	4700	48	68	passed
20	5			55	68	passed
20	10			50	66	passed
30	0	normal	4700	60	72	passed
30	5			64	75	passed
30	10			61	73	passed
40	0	normal	4700	65	75	passed
40	5			67	75	passed
40	10			63	76	passed
50	0	normal	4700	65	75	passed
50	5			61	75	passed
50	10			62	76	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4700	51	62	passed
20	5			55	62	passed
20	10			64	70	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 24.2; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/29 14:19

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4700	77	87	passed
-30	5			65	72	passed
-30	10			56	62	passed
-20	0	normal	4700	60	67	passed
-20	5			60	68	passed
-20	10			63	71	passed
-10	0	normal	4700	56	59	passed
-10	5			62	68	passed
-10	10			57	62	passed
0	0	normal	4700	60	66	passed
0	5			60	68	passed
0	10			61	67	passed
10	0	normal	4700	63	70	passed
10	5			64	78	passed
10	10			65	78	passed
20	0	low	4700	62	79	passed
20	5			66	79	passed
20	10			65	79	passed
20	0	normal	4700	64	79	passed
20	5			63	79	passed
20	10			62	79	passed
20	0	high	4700	65	78	passed
20	5			63	79	passed
20	10			61	79	passed
30	0	normal	4700	61	75	passed
30	5			62	75	passed
30	10			64	74	passed
40	0	normal	4700	61	75	passed
40	5			63	74	passed
40	10			63	76	passed
50	0	normal	4700	64	75	passed
50	5			66	78	passed
50	10			63	78	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4700	62	70	passed
20	5			61	76	passed
20	10			65	77	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 24.2; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:33

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4700	3	8	passed
-30	5			2	-9	passed
-30	10			3	8	passed
-20	0	normal	4700	3	13	passed
-20	5			3	10	passed
-20	10			3	8	passed
-10	0	normal	4700	3	5	passed
-10	5			1	4	passed
-10	10			3	8	passed
0	0	normal	4700	2	6	passed
0	5			3	7	passed
0	10			3	8	passed
10	0	normal	4700	3	8	passed
10	5			3	9	passed
10	10			2	8	passed
20	0	low	4700	1	4	passed
20	5			4	9	passed
20	10			3	9	passed
20	0	normal	4700	3	9	passed
20	5			3	8	passed
20	10			3	8	passed
20	0	high	4700	3	8	passed
20	5			3	10	passed
20	10			4	8	passed
30	0	normal	4700	2	8	passed
30	5			3	7	passed
30	10			3	9	passed
40	0	normal	4700	3	7	passed
40	5			2	7	passed
40	10			3	9	passed
50	0	normal	4700	4	23	passed
50	5			2	8	passed
50	10			3	7	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4700	2	7	passed
20	5			3	8	passed
20	10			3	10	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 24.2; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:32

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4700	5	16	passed
-30	5			5	21	passed
-30	10			3	17	passed
-20	0	normal	4700	3	7	passed
-20	5			3	8	passed
-20	10			3	9	passed
-10	0	normal	4700	3	8	passed
-10	5			3	9	passed
-10	10			4	10	passed
0	0	normal	4700	3	11	passed
0	5			3	8	passed
0	10			3	8	passed
10	0	normal	4700	3	7	passed
10	5			2	7	passed
10	10			3	6	passed
20	0	low	4700	2	7	passed
20	5			3	8	passed
20	10			3	7	passed
20	0	normal	4700	3	6	passed
20	5			2	8	passed
20	10			3	8	passed
20	0	high	4700	3	7	passed
20	5			3	9	passed
20	10			2	7	passed
30	0	normal	4700	2	9	passed
30	5			3	7	passed
30	10			3	8	passed
40	0	normal	4700	2	7	passed
40	5			3	10	passed
40	10			4	9	passed
50	0	normal	4700	4	10	passed
50	5			3	6	passed
50	10			3	7	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4700	2	9	passed
20	5			3	9	passed
20	10			3	10	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 24.2; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:32

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4700	1	7	passed
-30	5			3	9	passed
-30	10			3	7	passed
-20	0	normal	4700	3	8	passed
-20	5			3	7	passed
-20	10			3	8	passed
-10	0	normal	4700	3	8	passed
-10	5			3	8	passed
-10	10			4	9	passed
0	0	normal	4700	4	9	passed
0	5			3	7	passed
0	10			3	7	passed
10	0	normal	4700	3	6	passed
10	5			3	7	passed
10	10			3	8	passed
20	0	low	4700	2	7	passed
20	5			3	6	passed
20	10			3	7	passed
20	0	normal	4700	3	7	passed
20	5			2	6	passed
20	10			3	7	passed
20	0	high	4700	2	7	passed
20	5			2	8	passed
20	10			3	6	passed
30	0	normal	4700	3	7	passed
30	5			3	9	passed
30	10			3	8	passed
40	0	normal	4700	3	8	passed
40	5			3	8	passed
40	10			3	7	passed
50	0	normal	4700	2	7	passed
50	5			2	9	passed
50	10			3	8	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4700	4	8	passed
20	5			3	7	passed
20	10			3	8	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.


3.5.9 24.3 Spurious emissions at antenna terminals §2.1051, §24.238

Test: 24.3; Spurious emissions at antenna terminals Summary §2.1051, §24.238

Result: Passed
Setup No.: S01_AE01
Date of Test: 2015/07/23 20:05
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

Mode / Band	Channel	detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
GSM / 1900	512	peak	maxhold	100	1849	-29.3	16.3	-13	passed
		peak	maxhold	3	1850	-18.8	5.8	-13	passed
	661	peak	maxhold	-	-	-	-	-13	passed
	810	peak	maxhold	3	1910	-19.3	6.3	-13	passed
		peak	maxhold	100	1911	-29.6	16.6	-13	passed
EDGE / 1900	512	peak	maxhold	3	1850	-26.4	13.4	-13	passed
	661	peak	maxhold	-	-	-	-	-13	passed
	810	peak	maxhold	3	1910	-24	11	-13	passed
		peak	maxhold	100	1911	-31.7	18.7	-13	passed
UMTS / FDD2	9262	rms	maxhold	100	1849	-25.9	12.9	-13	passed
	9400	rms	maxhold	-	-	-	-	-13	passed
	9538	rms	maxhold	50	1910	-30.3	17.3	-13	passed
		rms	maxhold	100	1911	-22.1	9.1	-13	passed
HSDPA / FDD2	9262	rms	maxhold	100	1849	-27.8	14.8	-13	passed
	9400	rms	maxhold	-	-	-	-	-13	passed
	9538	rms	maxhold	50	1910	-31.5	18.5	-13	passed
		rms	maxhold	100	1911	-22.9	9.9	-13	passed
HSUPA / FDD2	9262	rms	maxhold	100	1849	-29	16	-13	passed
	9400	rms	maxhold	-	-	-	-	-13	passed
	9538	rms	maxhold	50	1910	-30.5	17.5	-13	passed
		rms	maxhold	100	1911	-21	8	-13	passed

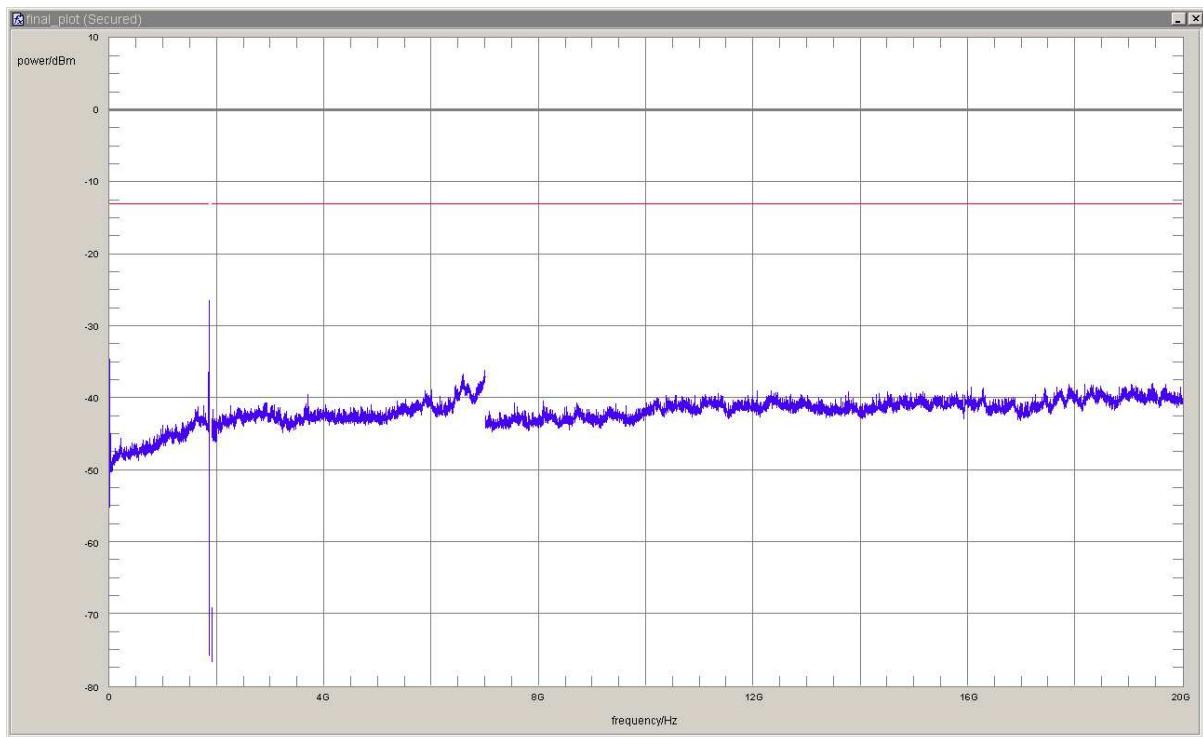

3.5.10 24.4 Field strength of spurious radiation §2.1053, §24.238

Test: 24.4; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz

Result: Passed


Setup No.: S01_AA01

Date of Test: 2015/06/11 9:15

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

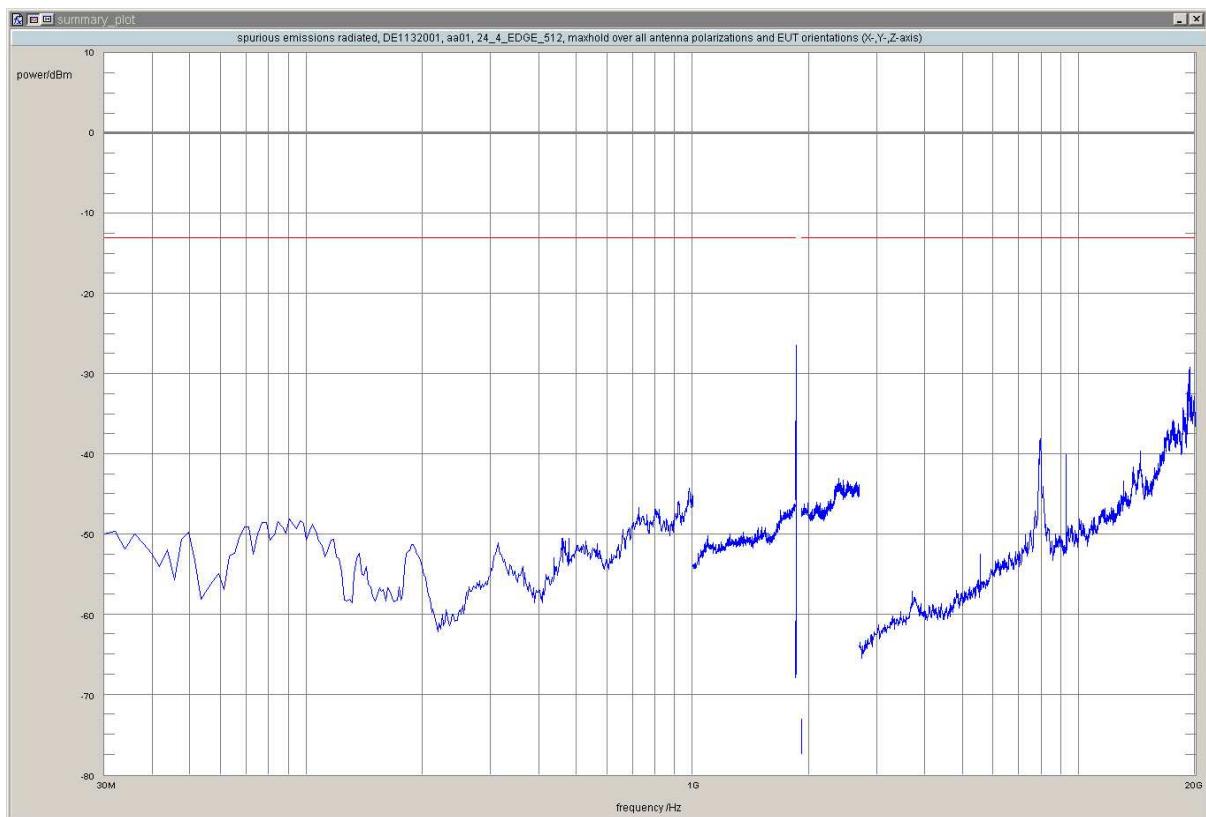


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	1849.9319	-31.12	-13.00	18.12	45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9359	-30.72	-13.00	17.72	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9399	-30.88	-13.00	17.88	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9499	-29.27	-13.00	16.27	45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9619	-26.82	-13.00	13.82	45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9739	-26.46	-13.00	13.46	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9880	-26.59	-13.00	13.59	-45.0	horizontal	vertical	passed
peak	maxhold	1000	19228.5	-29.48	-13.00	16.48	45.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.32	-13.00	17.32	-180.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-29.13	-13.00	16.13	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

Test: 24.4; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz

Result: Passed
Setup No.: S01_AA01
Date of Test: 2015/06/11 9:15
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

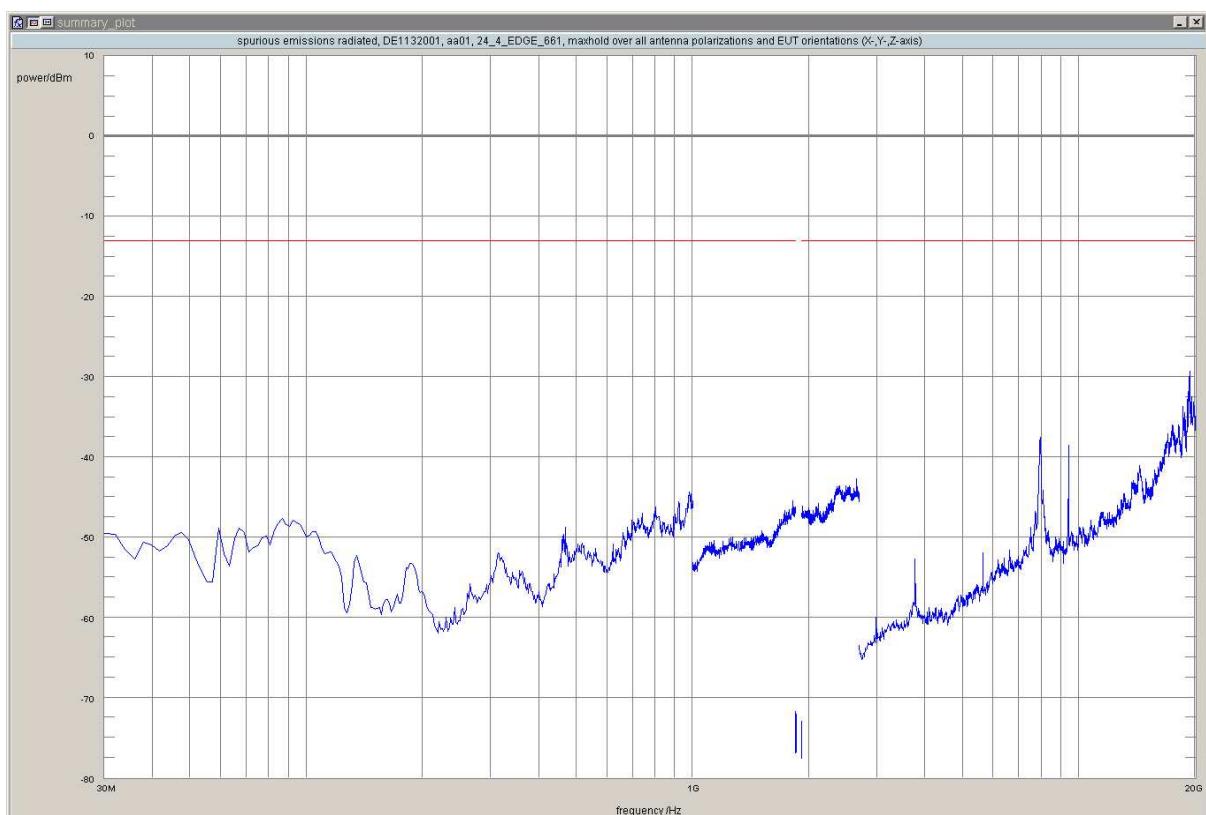


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-30.36	-13.00	17.36	45.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-29.26	-13.00	16.26	0.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

Test: 24.4; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz

Result: Passed
Setup No.: S01_AA01
Date of Test: 2015/06/11 9:15
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

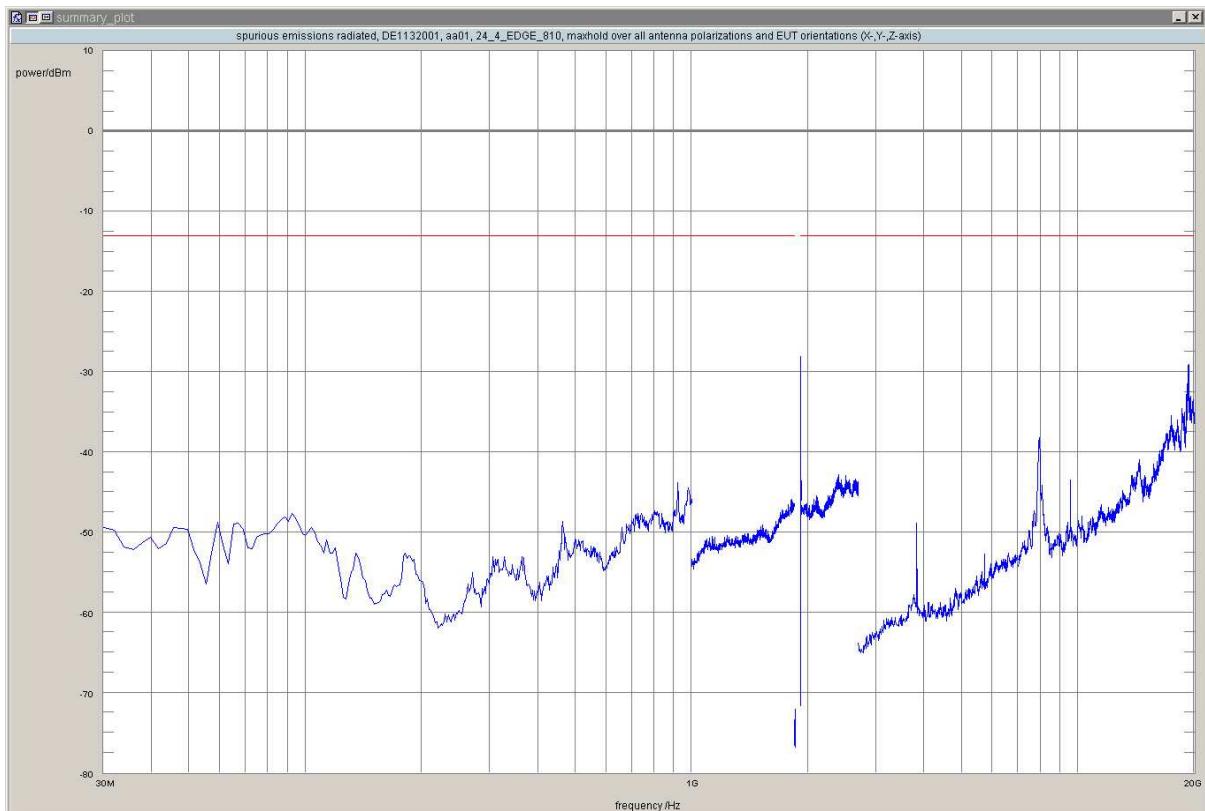

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	1910.0020	-30.13	-13.00	17.13	120.0	horizontal	horizontal	passed
peak	maxhold	3	1910.0140	-28.60	-13.00	15.60	45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0220	-29.97	-13.00	16.97	120.0	horizontal	horizontal	passed
peak	maxhold	3	1910.0381	-28.02	-13.00	15.02	45.0	horizontal	vertical	passed
peak	maxhold	1000	19228.5	-29.12	-13.00	16.12	-120.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-29.76	-13.00	16.76	-120.0	horizontal	horizontal	passed
peak	maxhold	1000	19326.7	-29.01	-13.00	16.01	-180.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

Test: 24.4; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz

Result: Passed


Setup No.: S01_AA01

Date of Test: 2015/06/11 9:15

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

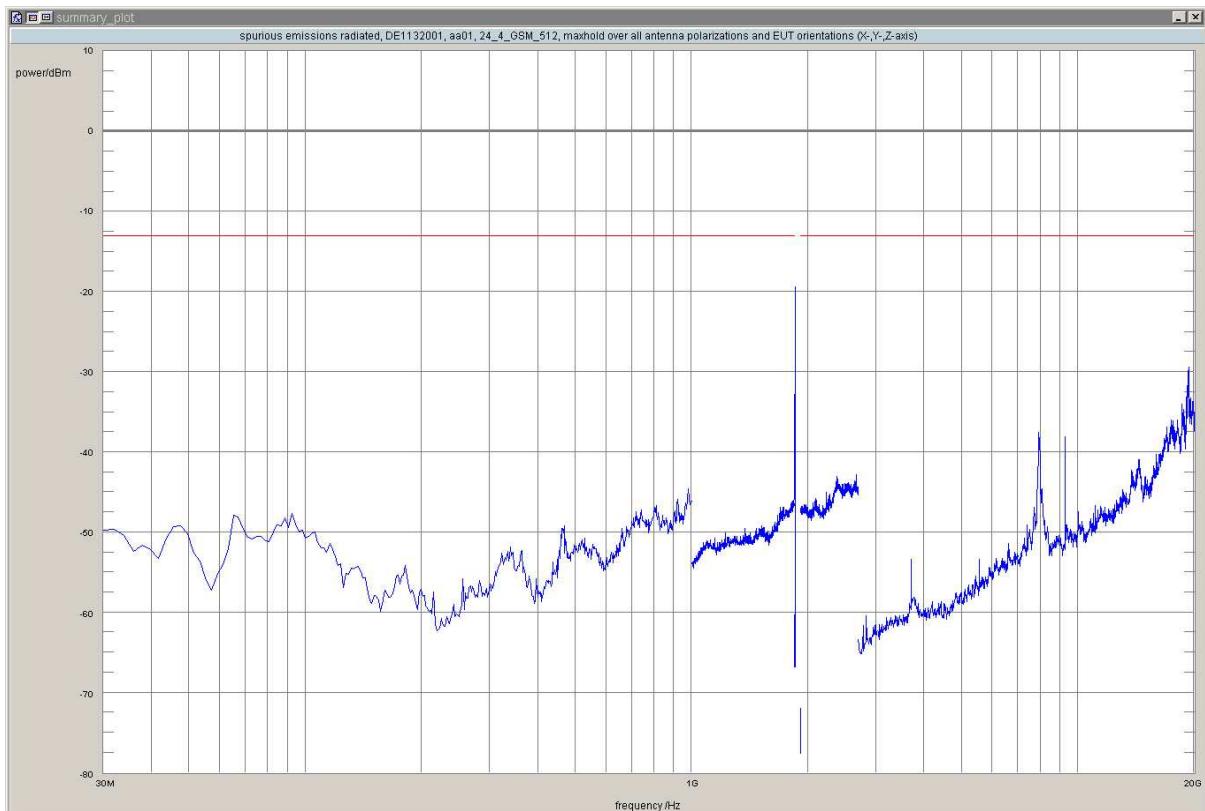

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1847.88	-32.80	-13.00	19.80	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9218	-31.05	-13.00	18.05	45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9279	-32.53	-13.00	19.53	0.0	vertical	vertical	passed
peak	maxhold	3	1849.9319	-31.10	-13.00	18.10	-135.0	vertical	vertical	passed
peak	maxhold	3	1849.9459	-25.20	-13.00	12.20	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9719	-21.87	-13.00	8.87	-45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9880	-21.02	-13.00	8.02	45.0	horizontal	vertical	passed
peak	maxhold	3	1849.9980	-19.39	-13.00	6.39	0.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-29.97	-13.00	16.97	45.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.11	-13.00	17.11	-90.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-29.43	-13.00	16.43	-120.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

Test: 24.4; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 5:55

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-29.89	-13.00	16.89	45.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-29.97	-13.00	16.97	-90.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-29.12	-13.00	16.12	-45.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

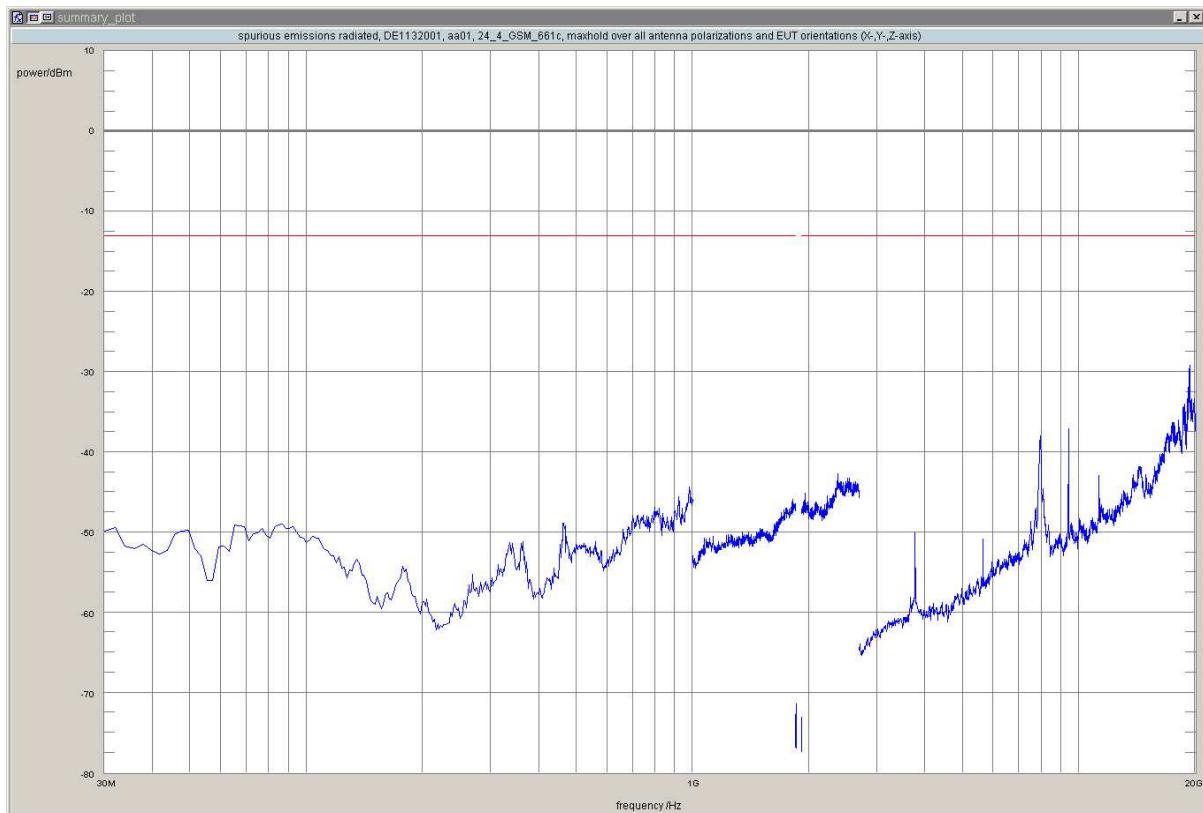

added by operator

Test: 24.4; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 5:55

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	3	1910.0000	-23.12	-13.00	10.12	-45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0120	-20.55	-13.00	7.55	45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0200	-21.06	-13.00	8.06	-45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0301	-32.51	-13.00	19.51	-45.0	vertical	vertical	passed
peak	maxhold	3	1910.0341	-26.14	-13.00	13.14	45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0461	-25.72	-13.00	12.72	-45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0581	-28.76	-13.00	15.76	-45.0	horizontal	vertical	passed
peak	maxhold	3	1910.0641	-32.48	-13.00	19.48	-135.0	vertical	vertical	passed
peak	maxhold	100	1912.12	-30.76	-13.00	17.76	45.0	horizontal	vertical	passed
peak	maxhold	1000	19228.5	-29.85	-13.00	16.85	-45.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.61	-13.00	17.61	90.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-29.71	-13.00	16.71	-180.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

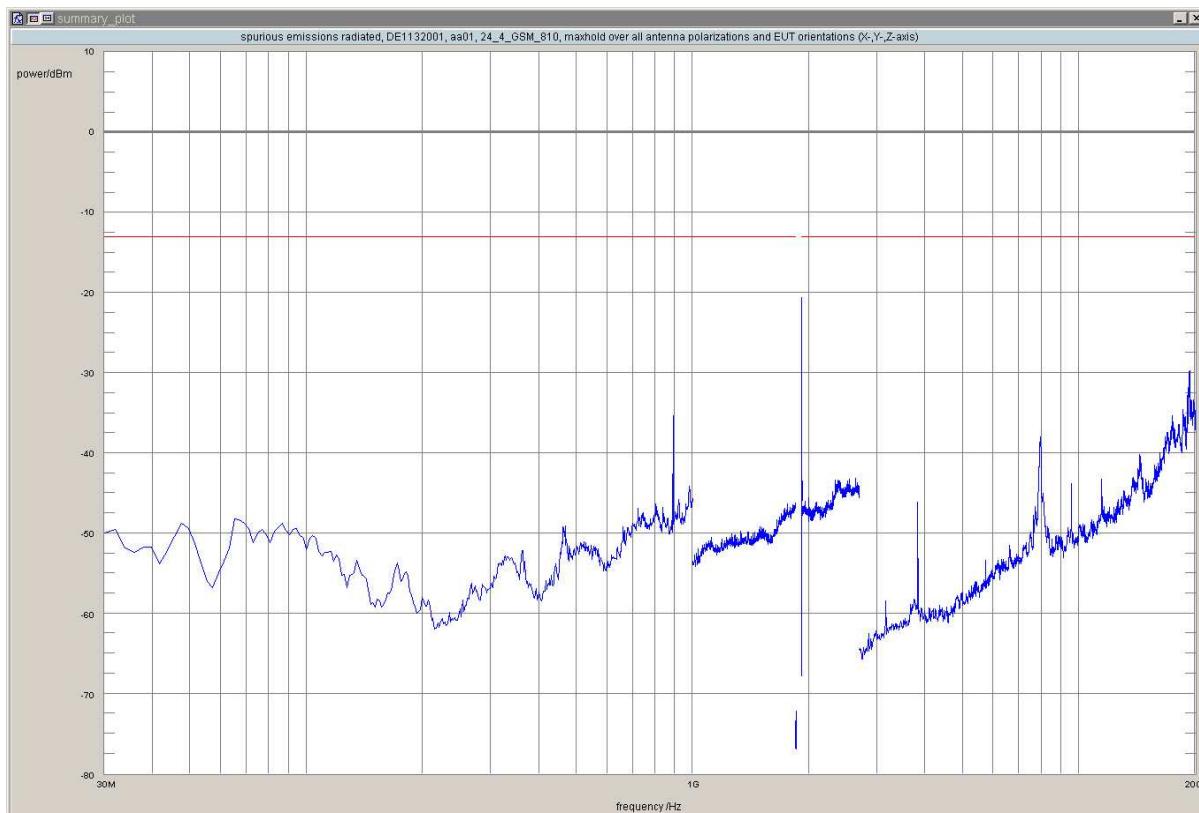

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 4:09

Body: FCC47CFRch1PART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	1840.0	-32.26	-13.00	19.26	-45.0	horizontal	vertical	passed
peak	maxhold	100	1848.96	-19.38	-13.00	6.38	-45.0	horizontal	vertical	passed
peak	maxhold	50	1849.52	-27.38	-13.00	14.38	-45.0	horizontal	vertical	passed
peak	maxhold	50	1849.98	-28.21	-13.00	15.21	120.0	horizontal	horizontal	passed
peak	maxhold	1000	1931.6	-24.94	-13.00	11.94	-90.0	vertical	vertical	passed
peak	maxhold	1000	1933.1	-25.55	-13.00	12.55	-45.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-30.15	-13.00	17.15	0.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.42	-13.00	17.42	120.0	horizontal	horizontal	passed
peak	maxhold	1000	19326.7	-30.17	-13.00	17.17	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

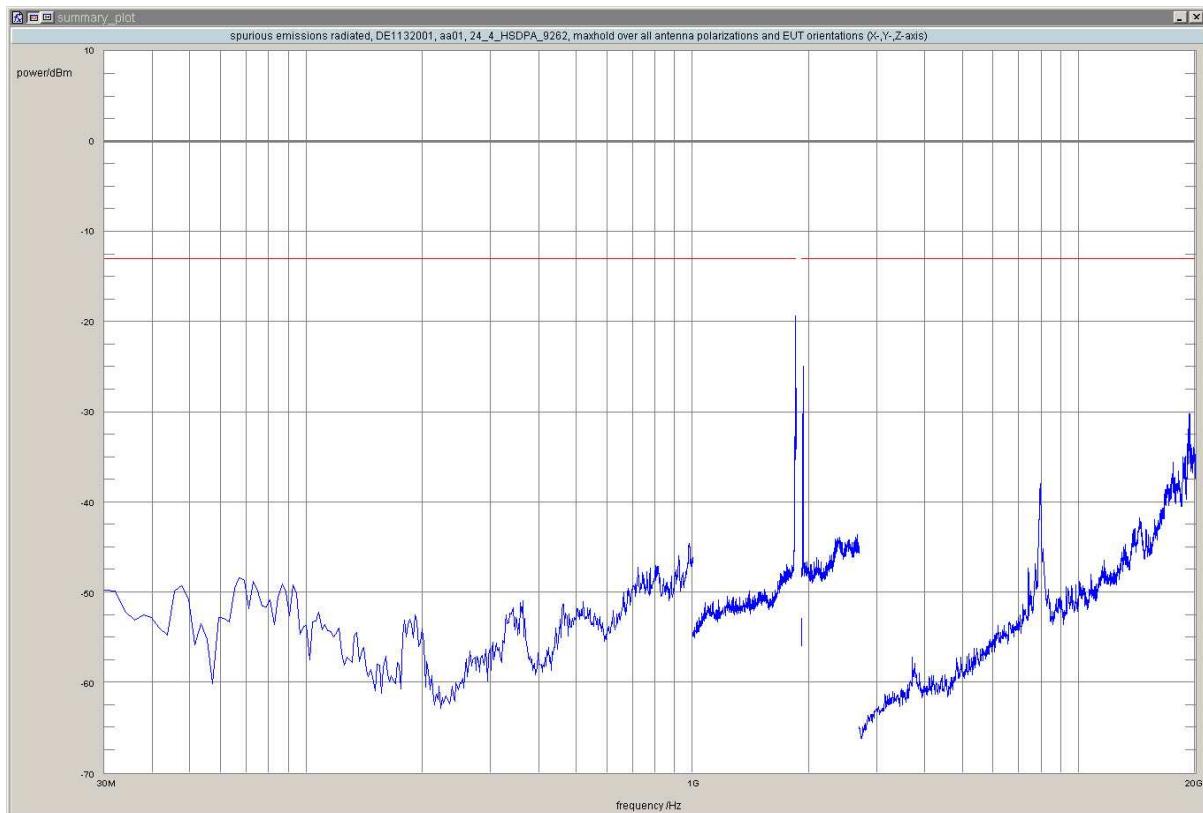

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 5:51

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	1958.4	-26.85	-13.00	13.85	-90.0	vertical	vertical	passed
peak	maxhold	1000	1960.0	-24.45	-13.00	11.45	-45.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-30.31	-13.00	17.31	0.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-29.97	-13.00	16.97	0.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-29.29	-13.00	16.29	45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

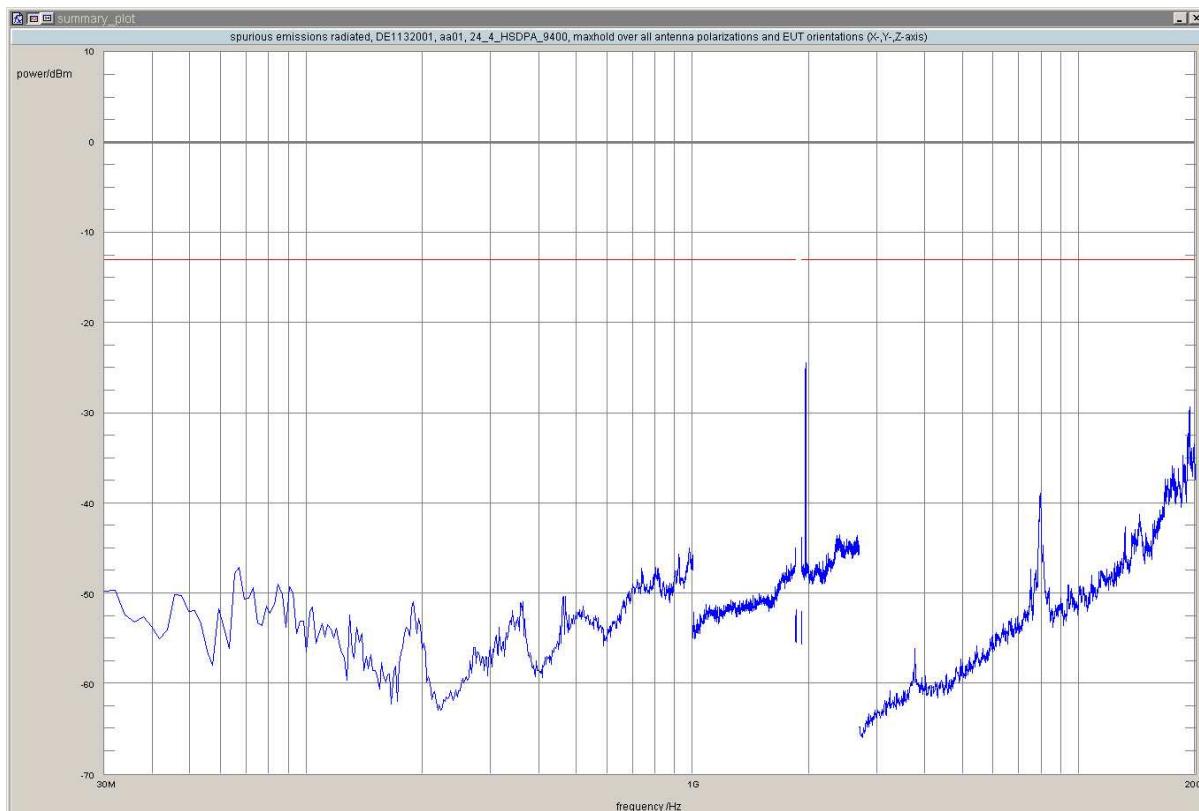

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 5:52

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1910.04	-25.13	-13.00	12.13	45.0	horizontal	vertical	passed
peak	maxhold	100	1911.14	-16.52	-13.00	3.52	45.0	horizontal	vertical	passed
peak	maxhold	100	1911.40	-24.94	-13.00	11.94	90.0	vertical	vertical	passed
peak	maxhold	100	1912.82	-24.81	-13.00	11.81	-135.0	vertical	vertical	passed
peak	maxhold	100	1913.47	-24.86	-13.00	11.86	0.0	vertical	vertical	passed
peak	maxhold	1000	1985.7	-29.34	-13.00	16.34	45.0	vertical	vertical	passed
peak	maxhold	1000	1987.2	-28.52	-13.00	15.52	-90.0	vertical	vertical	passed
peak	maxhold	1000	1988.8	-26.78	-13.00	13.78	-45.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-30.18	-13.00	17.18	-180.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.60	-13.00	17.60	60.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-29.75	-13.00	16.75	-45.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

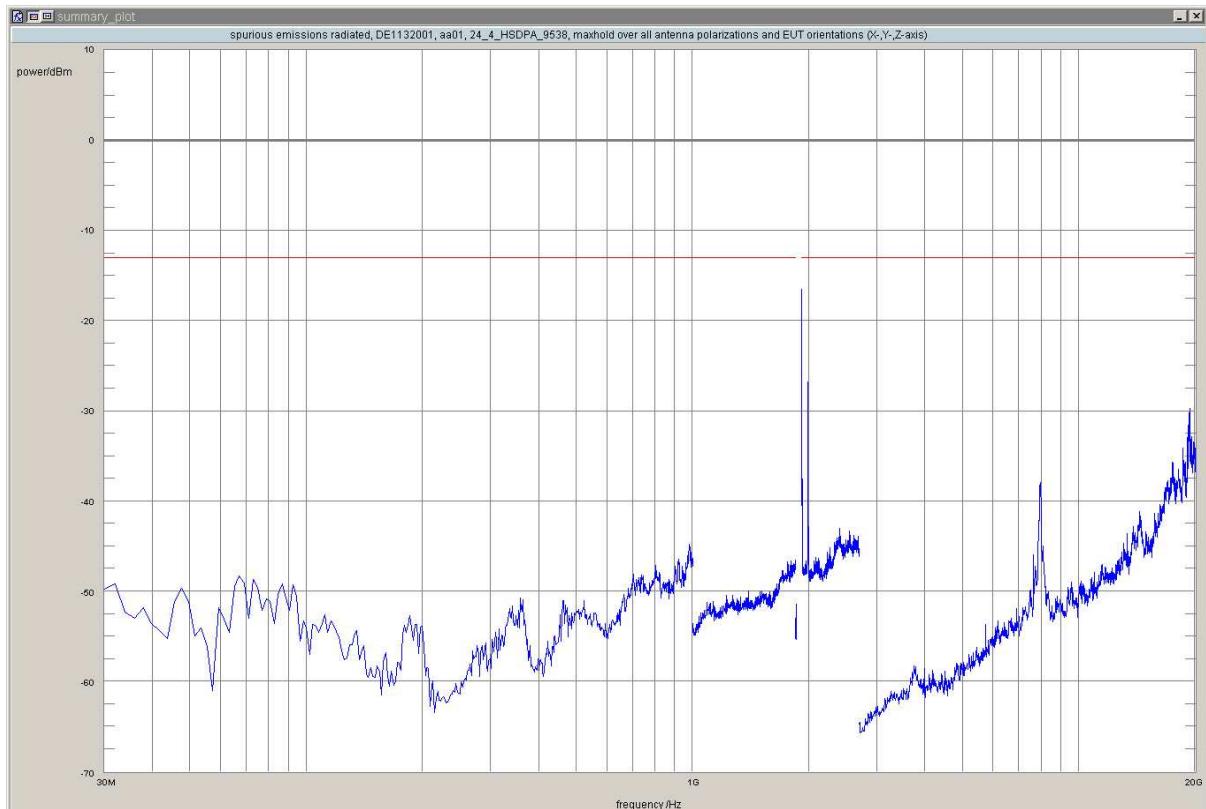

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 4:22

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1840.05	-31.32	-13.00	18.32	-180.0	vertical	vertical	passed
peak	maxhold	100	1842.71	-28.94	-13.00	15.94	-180.0	vertical	vertical	passed
peak	maxhold	100	1843.84	-29.38	-13.00	16.38	-180.0	vertical	vertical	passed
peak	maxhold	100	1843.97	-27.20	-13.00	14.20	-45.0	horizontal	vertical	passed
peak	maxhold	100	1844.22	-27.32	-13.00	14.32	45.0	horizontal	vertical	passed
peak	maxhold	100	1844.38	-31.55	-13.00	18.55	-90.0	horizontal	vertical	passed
peak	maxhold	100	1844.96	-29.19	-13.00	16.19	-135.0	vertical	vertical	passed
peak	maxhold	100	1845.09	-27.98	-13.00	14.98	-180.0	vertical	vertical	passed
peak	maxhold	100	1845.65	-27.76	-13.00	14.76	120.0	horizontal	horizontal	passed
peak	maxhold	100	1846.11	-25.46	-13.00	12.46	-45.0	horizontal	vertical	passed
peak	maxhold	100	1846.31	-23.10	-13.00	10.10	-45.0	horizontal	vertical	passed
peak	maxhold	100	1846.82	-25.00	-13.00	12.00	0.0	vertical	vertical	passed
peak	maxhold	100	1847.11	-26.86	-13.00	13.86	0.0	vertical	vertical	passed
peak	maxhold	100	1847.36	-25.23	-13.00	12.23	-180.0	vertical	vertical	passed
peak	maxhold	100	1847.50	-21.65	-13.00	8.65	-45.0	horizontal	vertical	passed
peak	maxhold	100	1847.74	-23.30	-13.00	10.30	-45.0	horizontal	vertical	passed
peak	maxhold	100	1848.03	-21.47	-13.00	8.47	45.0	horizontal	vertical	passed
peak	maxhold	100	1848.22	-23.15	-13.00	10.15	-180.0	vertical	vertical	passed
peak	maxhold	100	1848.46	-18.33	-13.00	5.33	-45.0	horizontal	vertical	passed
peak	maxhold	100	1849.00	-18.41	-13.00	5.41	45.0	horizontal	vertical	passed
peak	maxhold	50	1849.19	-29.70	-13.00	16.70	-45.0	horizontal	vertical	passed
peak	maxhold	50	1849.41	-31.50	-13.00	18.50	45.0	horizontal	vertical	passed
peak	maxhold	50	1850.00	-27.19	-13.00	14.19	-45.0	horizontal	vertical	passed
peak	maxhold	1000	19228.5	-30.00	-13.00	17.00	45.0	vertical	vertical	passed
peak	maxhold	1000	19256.5	-31.59	-13.00	18.59	90.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-30.02	-13.00	17.02	-180.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

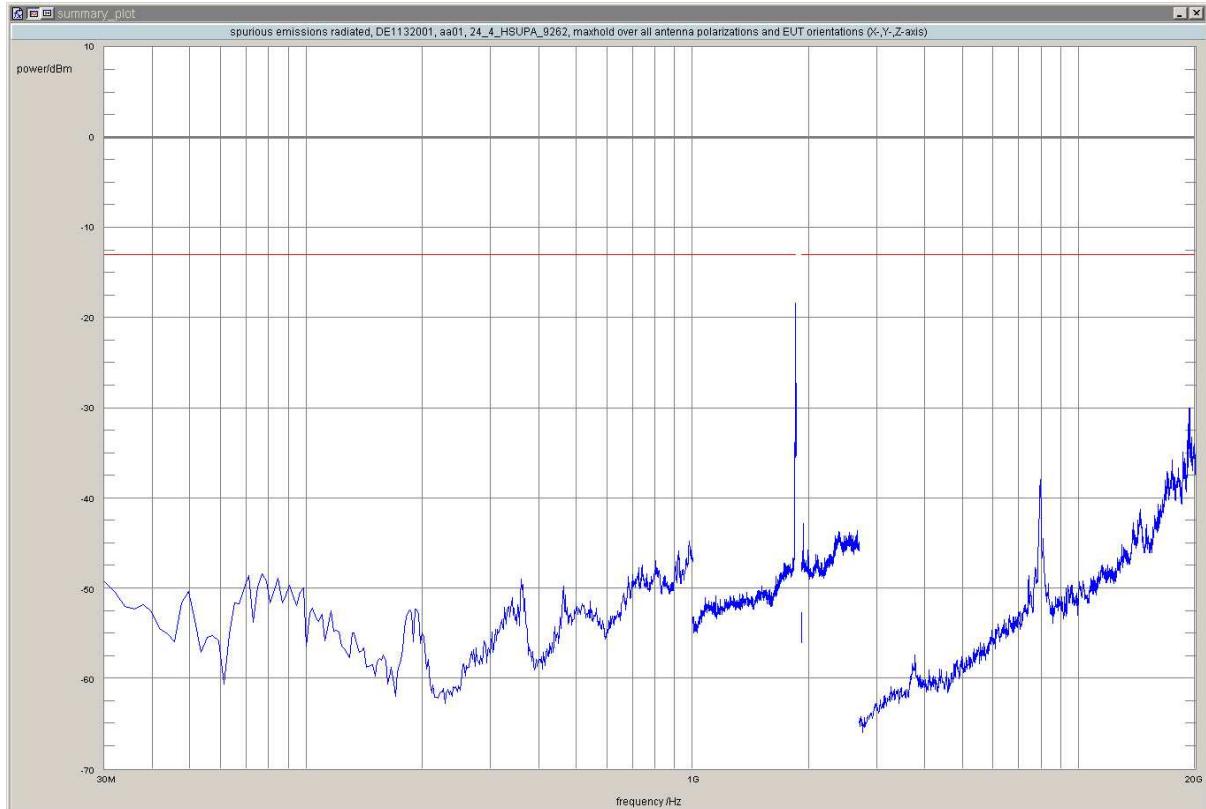

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz


Result: Passed
Setup No.: S01_AA01
Date of Test: 2015/06/12 4:22
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-30.26	-13.00	17.26	0.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-31.01	-13.00	18.01	0.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-29.97	-13.00	16.97	135.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

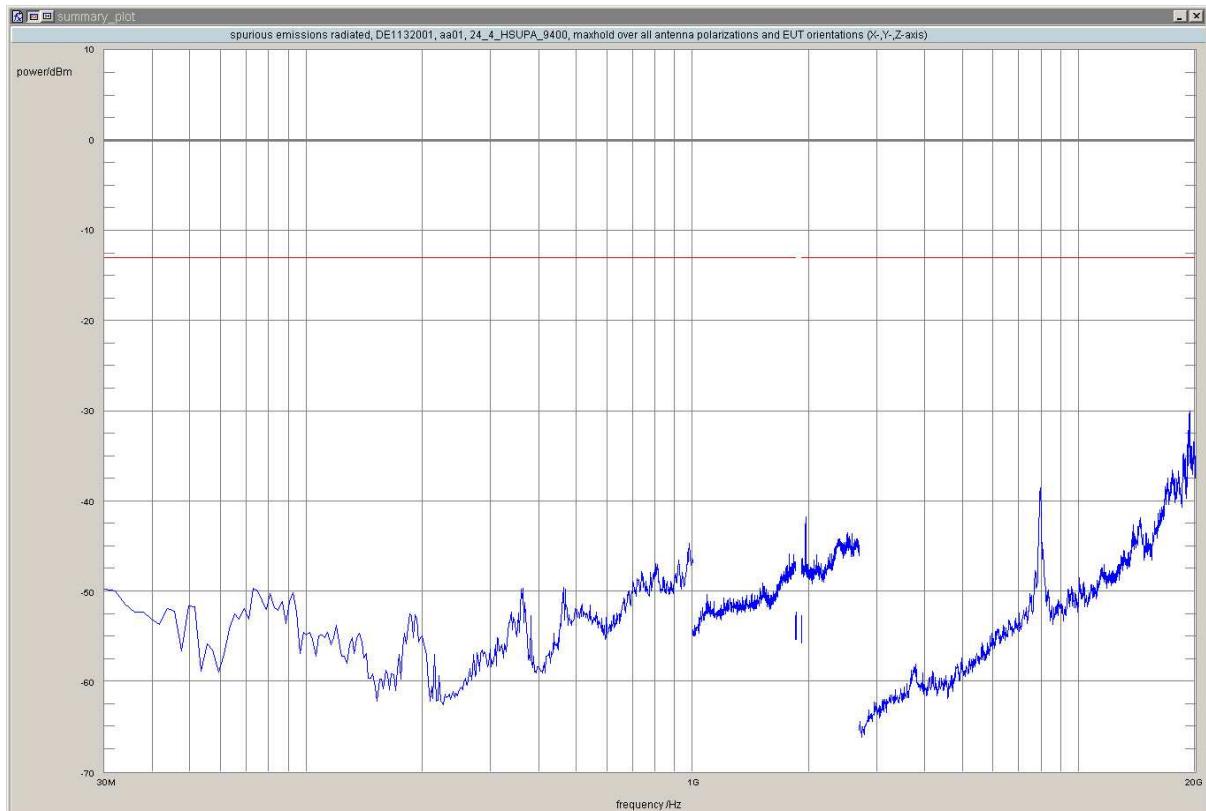

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz


Result: Passed
Setup No.: S01_AA01
Date of Test: 2015/06/12 4:22
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-30.19	-13.00	17.19	-180.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-31.16	-13.00	18.16	-90.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-30.11	-13.00	17.11	90.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

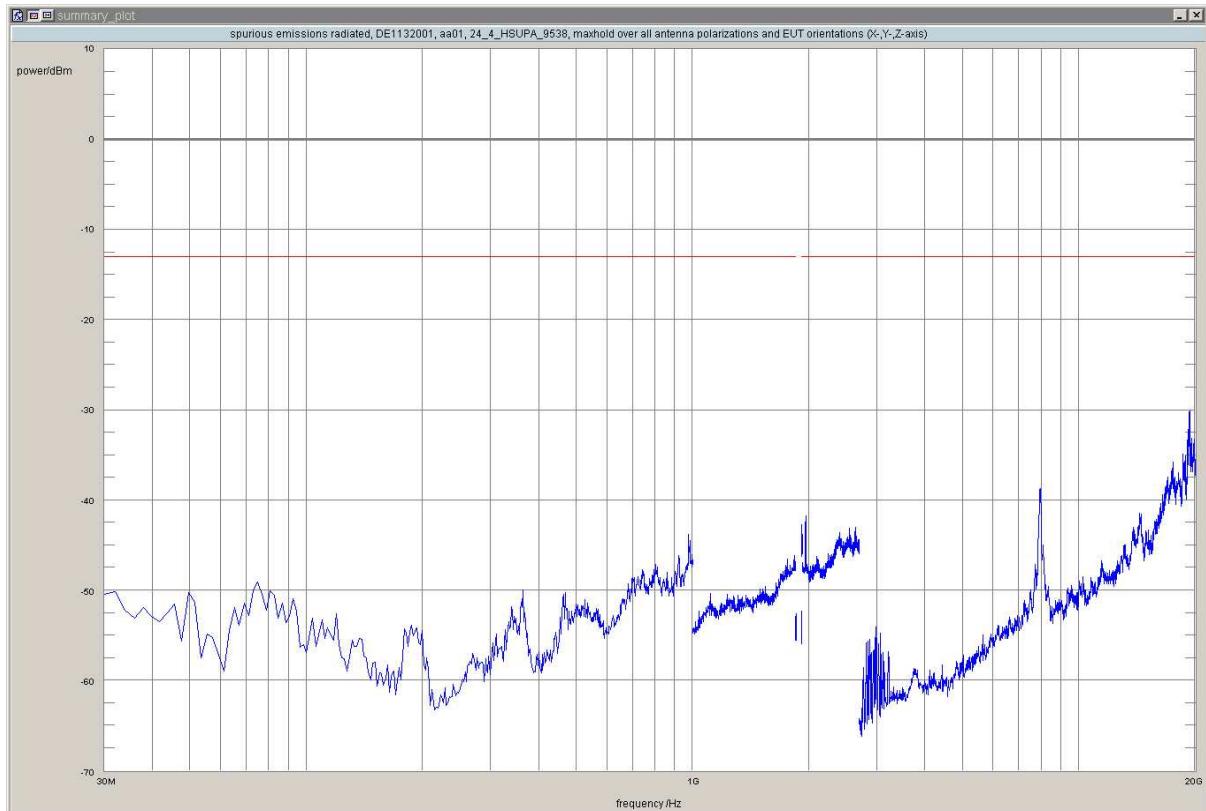

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 4:31

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1844.26	-32.99	-13.00	19.99	120.0	horizontal	horizontal	passed
peak	maxhold	100	1844.89	-32.52	-13.00	19.52	-180.0	horizontal	horizontal	passed
peak	maxhold	100	1848.55	-22.48	-13.00	9.48	60.0	horizontal	horizontal	passed
peak	maxhold	100	1848.69	-21.48	-13.00	8.48	120.0	horizontal	horizontal	passed
peak	maxhold	100	1848.89	-28.68	-13.00	15.68	-60.0	horizontal	horizontal	passed
peak	maxhold	100	1849.00	-25.42	-13.00	12.42	-180.0	horizontal	horizontal	passed
peak	maxhold	50	1849.97	-31.67	-13.00	18.67	0.0	horizontal	horizontal	passed
peak	maxhold	1000	19228.5	-30.84	-13.00	17.84	0.0	horizontal	horizontal	passed
peak	maxhold	1000	19312.6	-29.87	-13.00	16.87	45.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-30.17	-13.00	17.17	-180.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

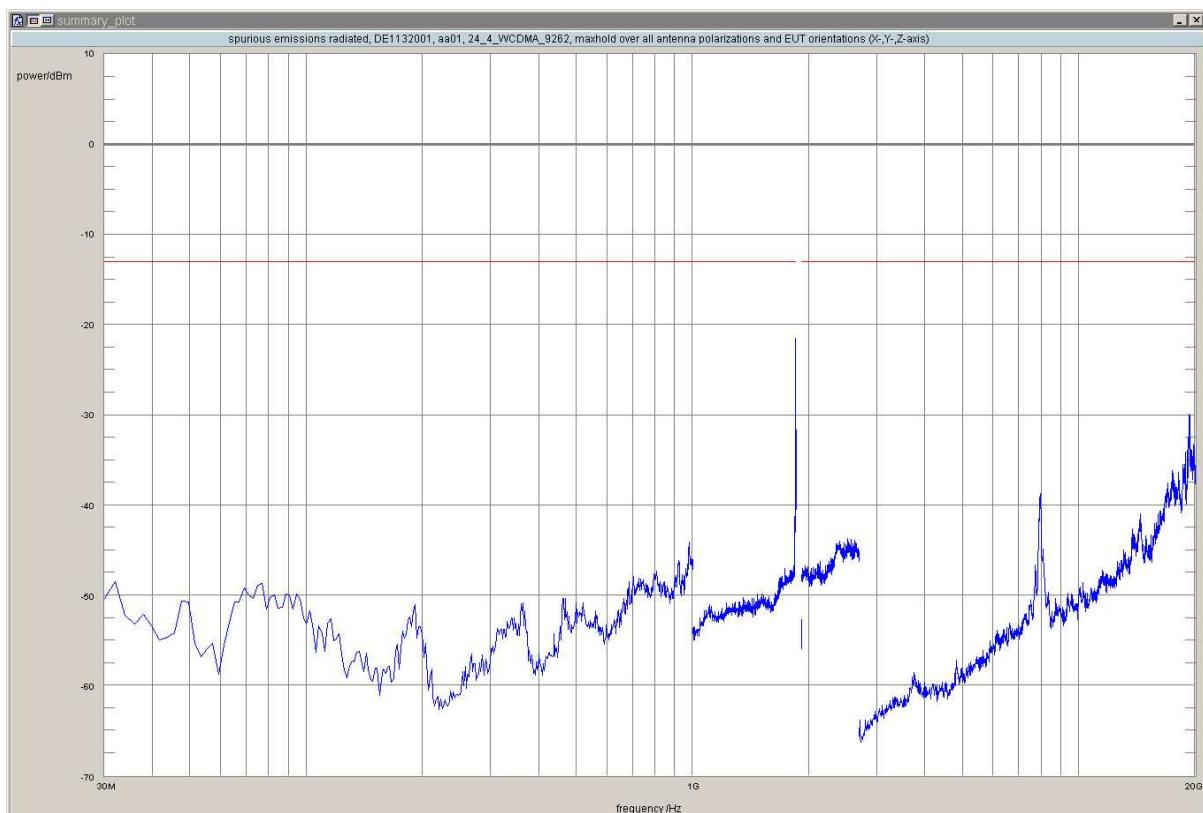

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 4:31

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-30.73	-13.00	17.73	-135.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-30.66	-13.00	17.66	-180.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-29.80	-13.00	16.80	-60.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

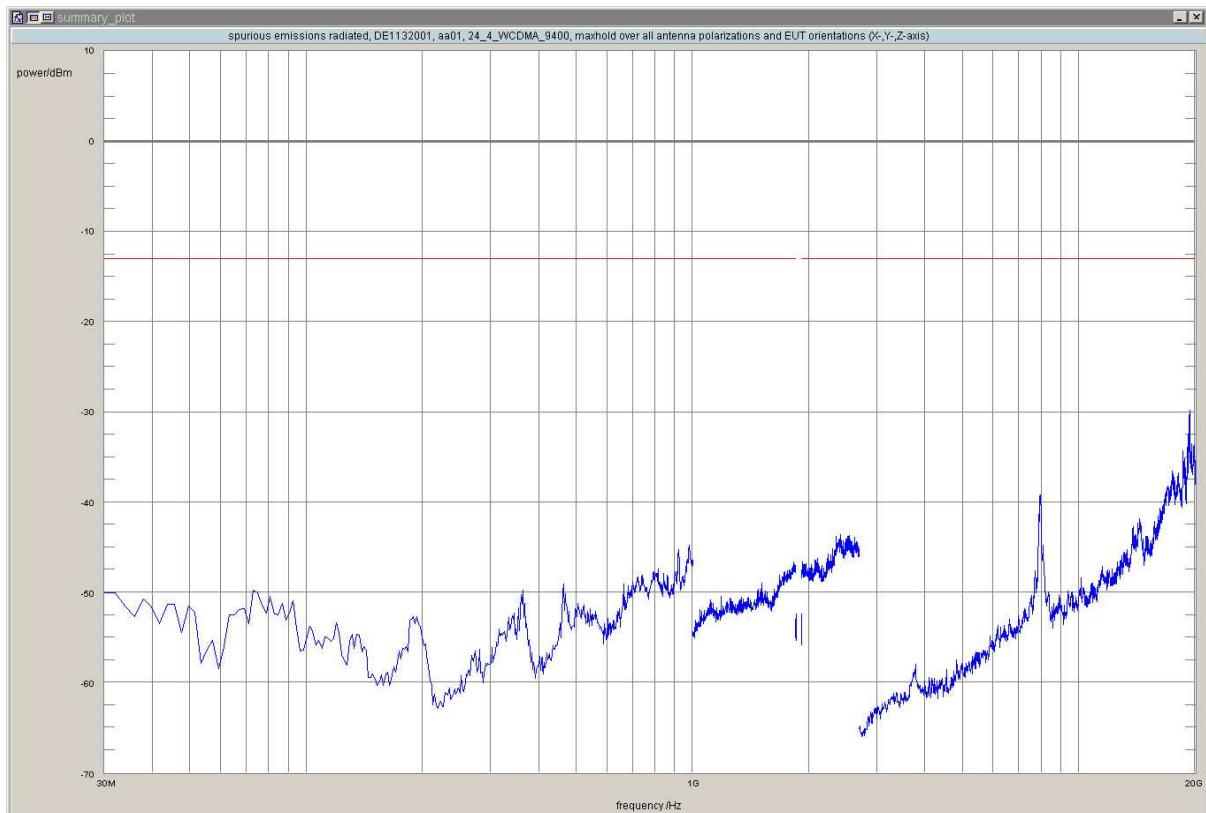

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 4:31

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES


Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1910.02	-30.56	-13.00	17.56	0.0	vertical	vertical	passed
peak	maxhold	100	1911.22	-20.59	-13.00	7.59	0.0	vertical	vertical	passed
peak	maxhold	100	1911.65	-21.01	-13.00	8.01	45.0	horizontal	vertical	passed
peak	maxhold	1000	19228.5	-30.77	-13.00	17.77	-180.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-31.01	-13.00	18.01	-135.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-30.32	-13.00	17.32	-60.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

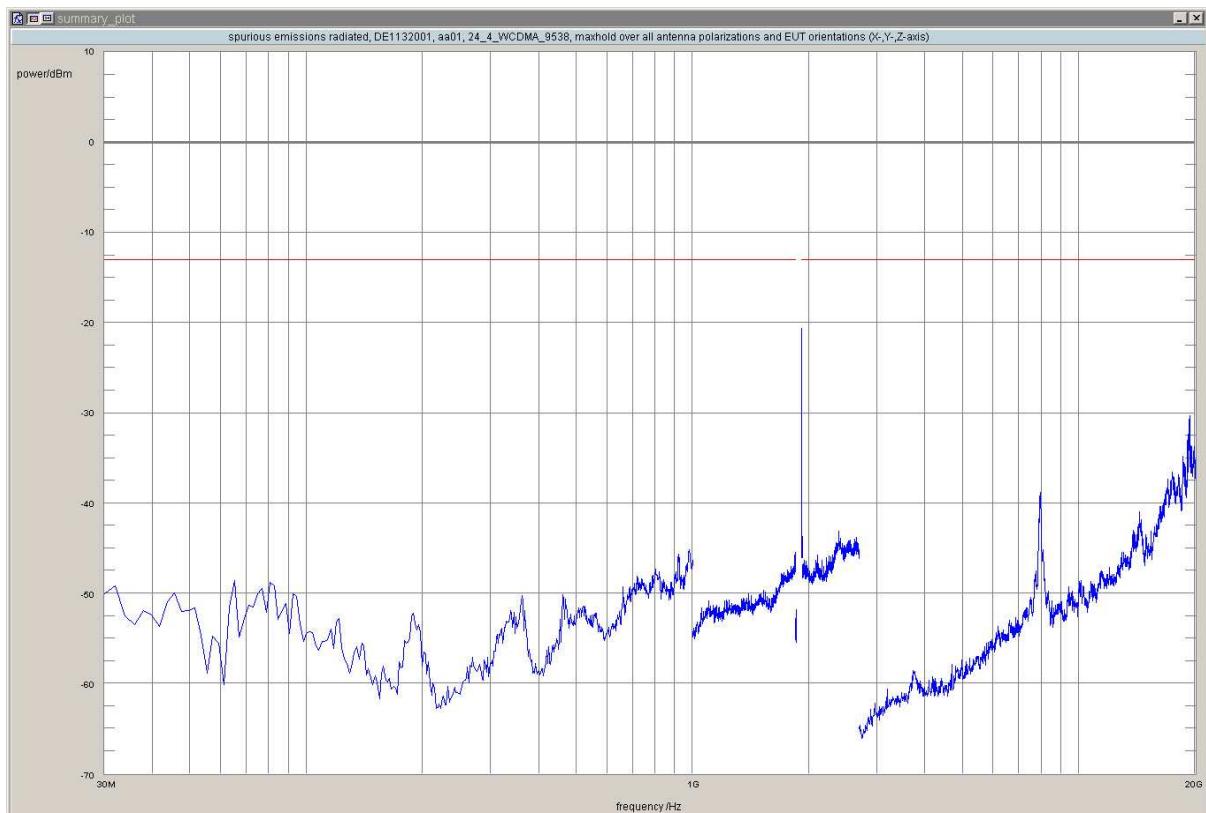

added by operator


3.5.11 24.5 Emission and Occupied Bandwidth §2.1049, §24.238

Test: 24.5; Emission and Occupied Bandwidth Summary §2.1049, §24.238


Result: Passed
Setup No.: S01_AE01
Date of Test: 2015/10/27 20:06
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

Band	Mode	Channel	-26dB BW / kHz	99% BW / kHz	Verdict
1900	GSM	512	314.6	244.5	Passed
		661	312.6	242.5	Passed
		810	312.6	246.5	Passed
	EDGE	512	298.6	240.5	Passed
		661	296.6	248.5	Passed
		810	302.6	254.5	Passed
FDD 2	UMTS	9262	4689.4	4168.3	Passed
		9400	4689.4	4168.3	Passed
		9538	4689.4	4188.4	Passed
	HSDPA	9262	4689.4	4168.3	Passed
		9400	4689.4	4168.3	Passed
		9538	4709.4	4188.4	Passed
	HSUPA	9262	4709.4	4188.4	Passed
		9400	4709.4	4188.4	Passed
		9538	4709.4	4168.3	Passed

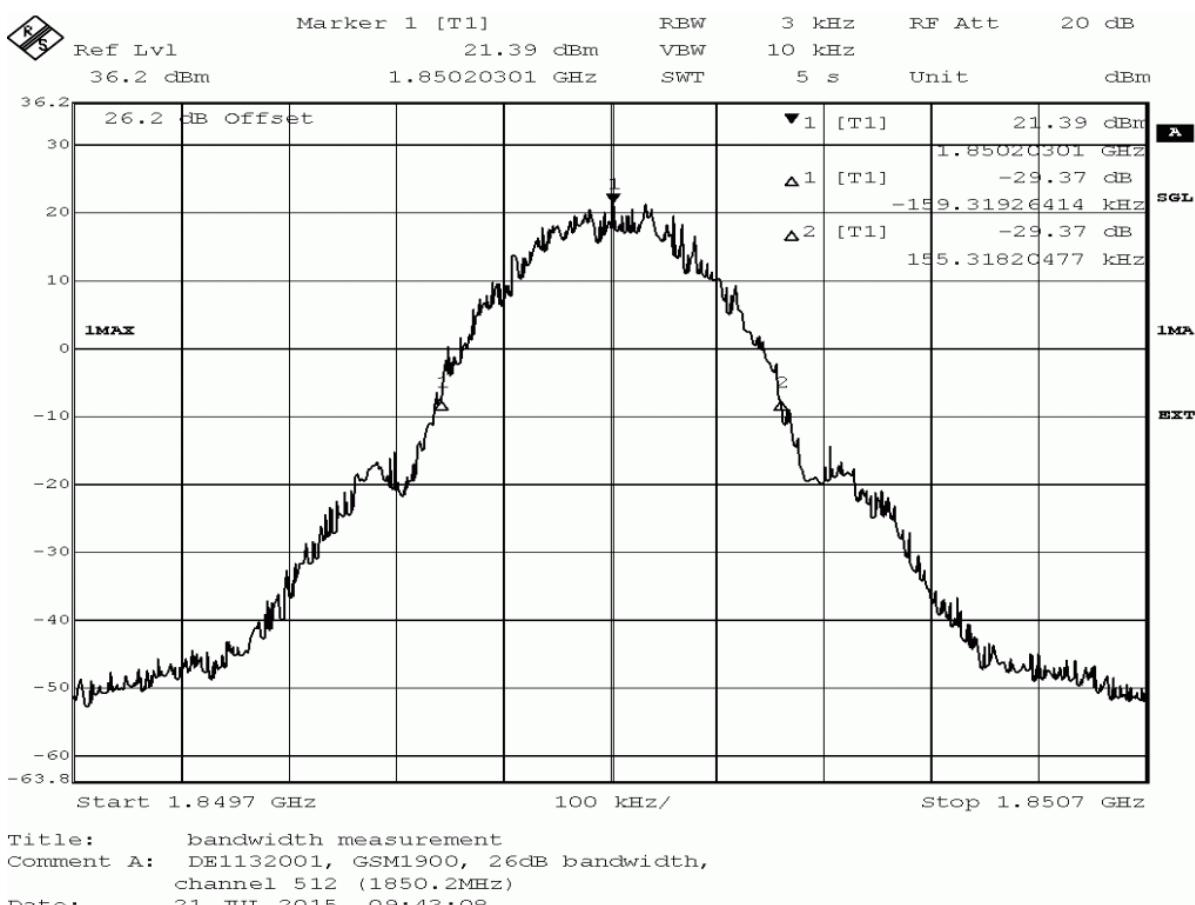

Reference: MDE_ELEKT_1502_FCCg
 according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

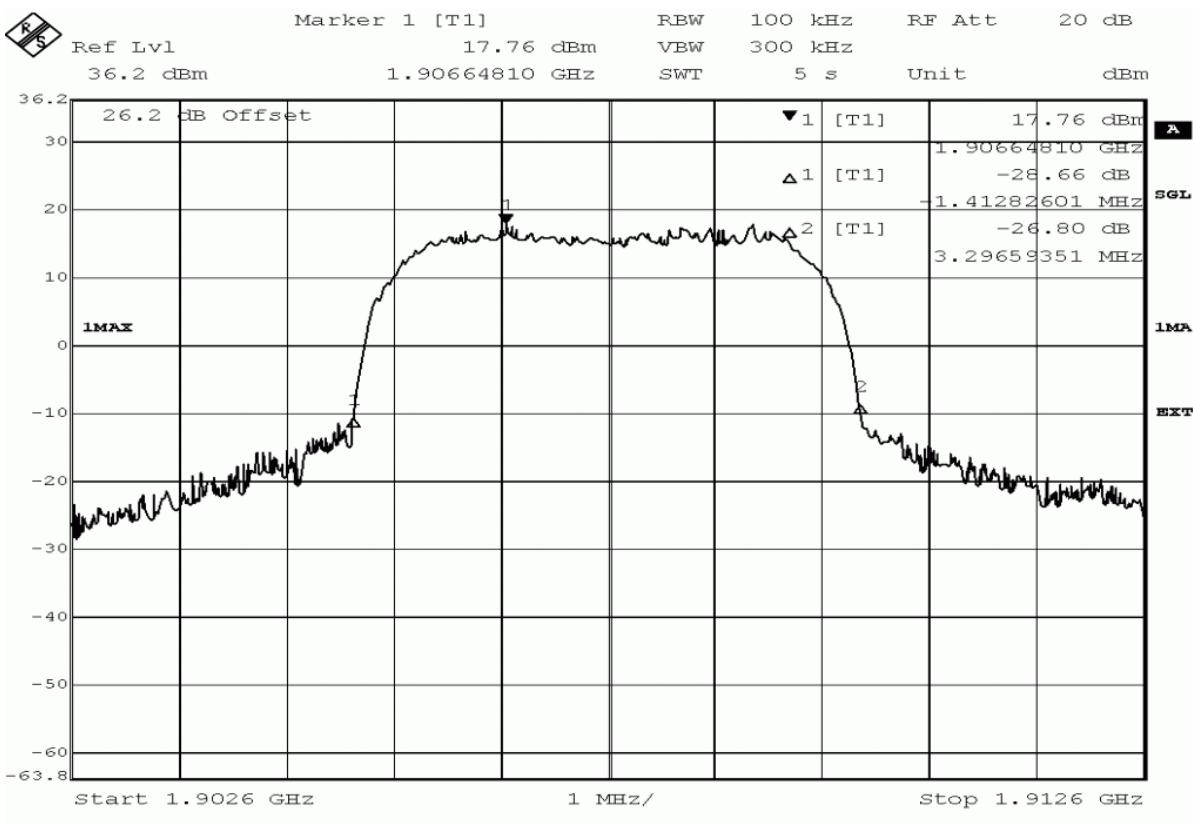

Title: bandwidth measurement
 Comment A: DE1132001, FDD II HSDPA, 26dB bandwidth,
 channel 9538 (1907.6MHz)
 Date: 23.JUL.2015 17:30:47

3.5.12 24.6 Band edge compliance §2.1053, §24.238


Test: 24.6; Frequency Band = 1900 / FDD2

Result: Passed
Setup No.: S01_AE01
Date of Test: 2015/07/23 20:08
Body: NO BODY
Test Specification: FCC part 2 and 24

Detailed Results:

Band	Mode	Channel	Detector	Trace	Resolution bandwidth /kHz	Frequency /MHz	Peak value /dBm	Margin to limit /dB	Limit /dBm	Verdict
1900	GSM	512	peak	maxhold	3	1850	-17.86	4.86	-13	passed
		810	peak	maxhold	3	1910	-18.78	5.78	-13	passed
	EDGE	512	peak	maxhold	3	1850	-25.11	12.11	-13	passed
		810	peak	maxhold	3	1910	-21.97	8.97	-13	passed
FDD 2	UMTS	9262	rms	maxhold	50	1850.0	-33.34	20.34	-13	passed
		9538	rms	maxhold	50	1910.0	-30.74	17.74	-13	passed
	HSDPA	9262	rms	maxhold	50	1850.0	-35.28	22.28	-13	passed
		9538	rms	maxhold	50	1910.0	-34.26	21.26	-13	passed
	HSUPA	9262	rms	maxhold	50	1850.0	-35.84	22.84	-13	passed
		9538	rms	maxhold	50	1910.0	-31.41	18.41	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

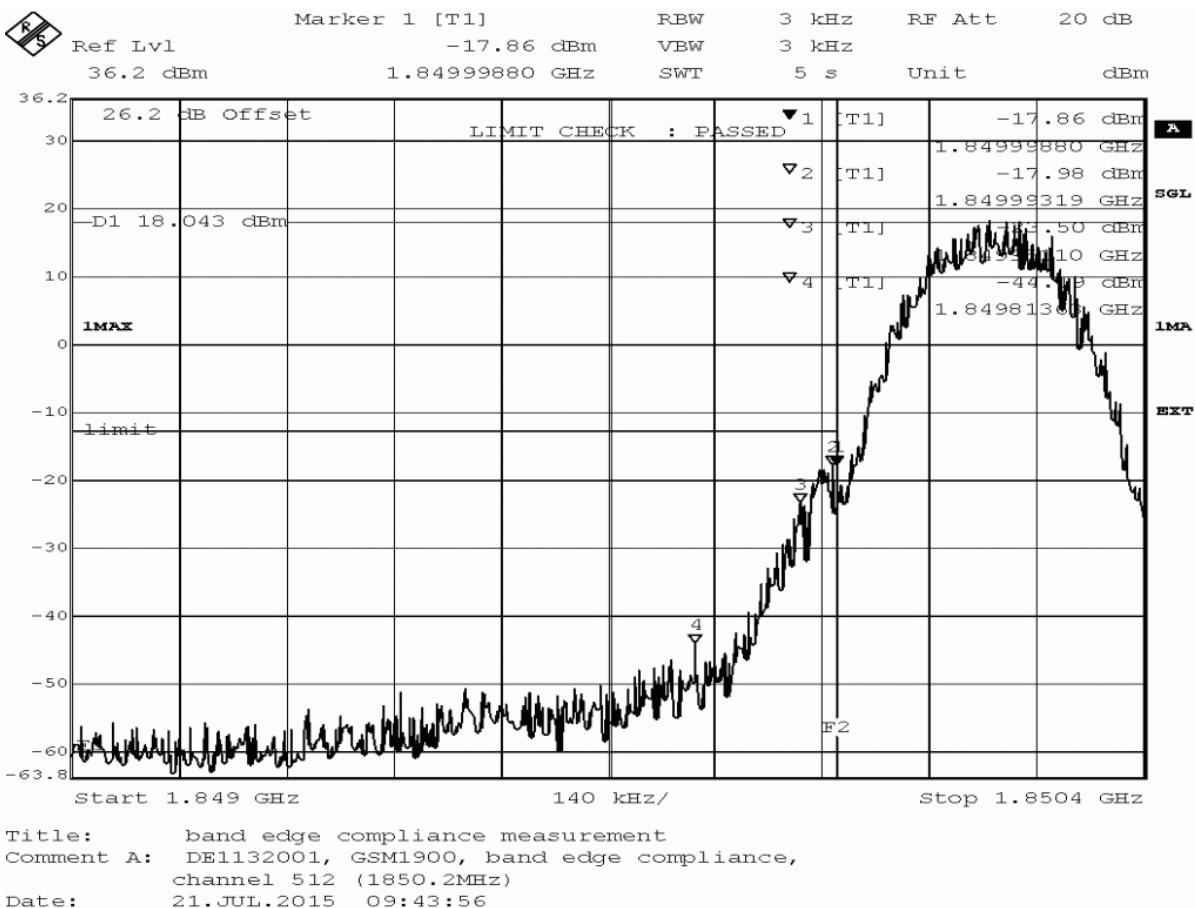

3.5.13 27.1 RF Power Output §2.1046, §27.250

Test: 27.1; RF Power Output Summary §2.1046, §27.250

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/23 20:09

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27


Detailed Results:

Band	Mode	Channel	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)	RMS Conducted power (dBm)	FCC EIRP limit (W)	IC EIRP limit per SRSP-503 (W)	Maximum antenna gain (dBi)	Verdict
FDD 4	W-CDMA	Low	1712.4	28	22	22.22	1	1	7.78	Pass
		Mid 1	1732.4	27.32	21.57	21.79			8.21	Pass
		Mid 2	1740	27.32	21.52	21.73			8.27	Pass
		High	1752.6	27.61	21.73	21.9			8.1	Pass
	HSDPA Subtest 1	Low	1712.4	26.93	21.13	21.51	1	1	8.49	Pass
		Mid 1	1732.4	26.65	20.83	21.05			8.95	Pass
		Mid 2	1740	26.4	20.7	20.91			9.09	Pass
		High	1752.6	26.65	20.92	21.15			8.85	Pass
	HSDPA Subtest 2	Low	1712.4	27.73	19.21	19.91	1	1	10.09	Pass
		Mid 1	1732.4	27.61	18.84	19.51			10.49	Pass
		Mid 2	1740	27.32	18.69	19.29			10.71	Pass
		High	1752.6	27.73	18.79	19.61			10.39	Pass
FDD 4	HSDPA Subtest 3	Low	1712.4	28.14	18.55	19.62	1	1	10.38	Pass
		Mid 1	1732.4	27.61	18.42	19.33			10.67	Pass
		Mid 2	1740	27.61	18.14	19.05			10.95	Pass
		High	1752.6	28	18.27	19.36			10.64	Pass
	HSDPA Subtest 4	Low	1712.4	28.26	18.32	19.54	1	1	10.46	Pass
		Mid 1	1732.4	27.32	18.18	19.32			10.68	Pass
		Mid 2	1740	27.61	17.88	19.12			10.88	Pass
		High	1752.6	27.48	18.13	19.27			10.73	Pass
FDD 4	HSUPA Subtest 1	Low	1712.4	27.61	20.42	20.84	1	1	9.16	Pass
		Mid 1	1732.4	27.48	19.9	20.34			9.66	Pass
		Mid 2	1740	28.41	20.83	21.36			8.64	Pass
		High	1752.6	27.86	19.89	20.34			9.66	Pass
	HSUPA Subtest 2	Low	1712.4	29.04	19.17	20.11	1	1	9.89	Pass
		Mid 1	1732.4	27.86	18.88	19.75			10.25	Pass
		Mid 2	1740	28.14	18.75	19.65			10.35	Pass
		High	1752.6	28.31	18.85	19.79			10.21	Pass
FDD 4	HSUPA Subtest 3	Low	1712.4	28.5	18.89	19.79	1	1	10.21	Pass
		Mid 1	1732.4	27.86	18.66	19.55			10.45	Pass
		Mid 2	1740	27.73	18.52	19.39			10.61	Pass
		High	1752.6	28.38	18.67	19.58			10.42	Pass
	HSUPA Subtest 4	Low	1712.4	28.64	20.34	20.94	1	1	9.06	Pass
		Mid 1	1732.4	28.38	19.83	20.43			9.57	Pass
		Mid 2	1740	28	19.82	20.38			9.62	Pass
		High	1752.6	28.14	20.07	20.65			9.35	Pass
FDD 4	HSUPA Subtest 5	Low	1712.4	28.64	20.62	21.02	1	1	8.98	Pass
		Mid 1	1732.4	28.14	20.35	20.75			9.25	Pass
		Mid 2	1740	28	20.14	20.53			9.47	Pass
		High	1752.6	28	20.38	20.77			9.23	Pass
highest value of Mode (WCDMA/HSDPA/HSUPA)						highest value overall				

Reference: MDE_ELEKT_1502_FCCg

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

 Ref Lvl
 Marker 1 [T1] 22.22 dBm RBW 5 MHz RF Att 20 dB
 36.1 dBm 1.71238998 GHz VBW 10 MHz
 36.1 dBm 36.1 dBm SWT 5 s Unit dBm

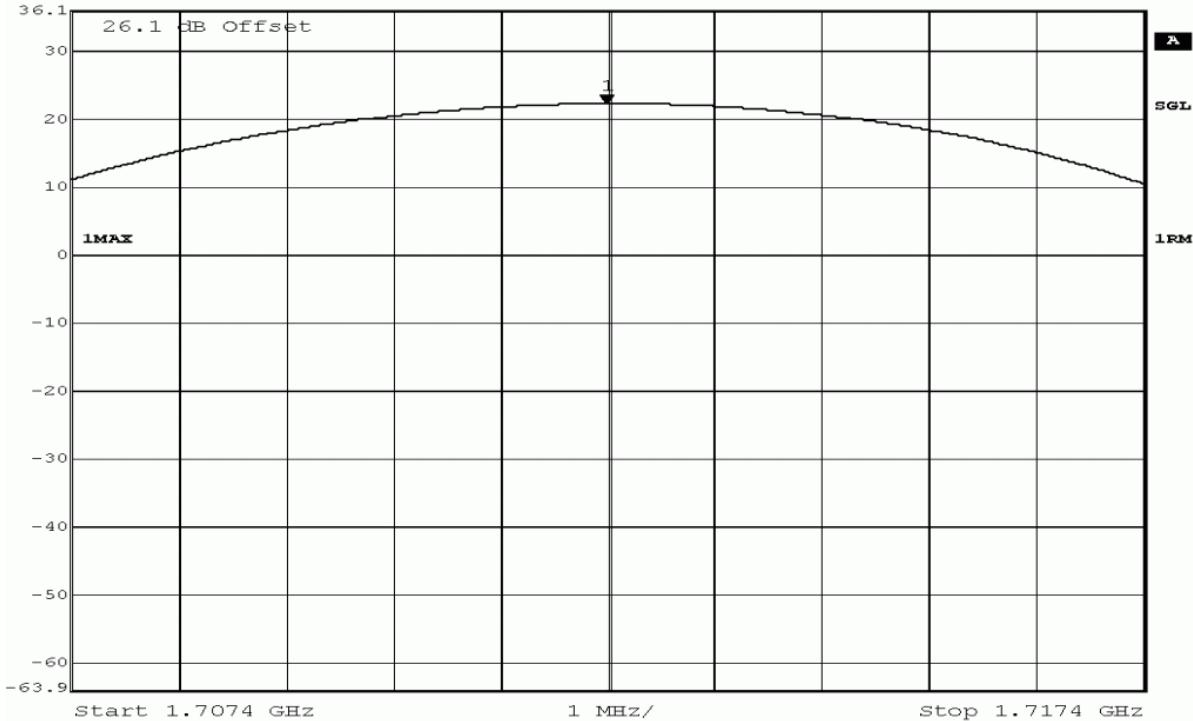

Title: output power measurement
 Comment A: DE1132001, FDD IV, output power,
 channel 1312 (1712.4MHz)
 Date: 22.JUL.2015 11:42:08

3.5.14 27.2 Frequency stability §2.1055, §27.54
Test: 27.2; Frequency Band = eFDD13, Mode = QPSK, Channel = 23230, Frequency = 782MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/28 18:50

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Voltage	Temp (°C)	LTE eFDD13				
		Modulatio	Frequency	Frequency Error	Deviation	Limit
		(MHz)	(Hz)	(ppm)	(Hz)	
100%	-30	QPSK	782	-3	-0.003836317	1955
	-20	QPSK	782	-7	-0.008951407	1955
	-10	QPSK	782	-5	-0.006393862	1955
	0	QPSK	782	-4	-0.00511509	1955
	10	QPSK	782	-4	-0.00511509	1955
	20	QPSK	782	5	0.006393862	1955
	30	QPSK	782	-6	-0.007672634	1955
	40	QPSK	782	-5	-0.006393862	1955
	50	QPSK	782	-6	-0.007672634	1955
	Low	20	QPSK	-18	-0.023017903	1955
	High	20	QPSK	4	0.00511509	1955
5 MHz, Mid Ch., 1RB, QPSK						

RSS-130 4.3

LTE eFDD13						
(MHz) / Resource	f _L (MHz)	f _H (MHz)	Max. Frequency Error (Hz)	Resulting Freq. (MHz)	Limit (MHz)	Result
5 / 25	####	-	18	777.048	777	Passed
	-	####	18	786.979	787	Passed

Test: 27.2; Frequency Band = eFDD17, Mode = QPSK, Channel = 23790, Frequency = 710MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/28 18:49

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Voltage	Temp (°C)	LTE eFDD17				
		Modulation	Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (Hz)
100%	-30	QPSK	710	-7	-0.009859155	1775
	-20	QPSK	710	5	0.007042254	1775
	-10	QPSK	710	-3	-0.004225352	1775
	0	QPSK	710	5	0.007042254	1775
	10	QPSK	710	4	0.005633803	1775
	20	QPSK	710	-6	-0.008450704	1775
	30	QPSK	710	5	0.007042254	1775
	40	QPSK	710	-4	-0.005633803	1775
	50	QPSK	710	5	0.007042254	1775
	Low	20	QPSK	3	0.004225352	1775
	High	20	QPSK	3	0.004225352	1775
5 MHz, Mid Ch., 1RB, QPSK						

RSS-130 4.3						
LTE eFDD17						
(MHz) /	f _L (MHz)	f _H (MHz)	Max. Frequency Error (Hz)	Resulting Freq. (MHz)	Limit (MHz)	Result
5 / 25	#####	-	7	704.047	704	Passed
	-	716	7	715.992	716	Passed

Test: 27.2; Frequency Band = eFDD4, Mode = QPSK, Channel = 20175, Frequency = 1732.5MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/28 18:48

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Voltage	Temp (°C)	LTE eFDD4				
		Modulation	Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (Hz)
100%	-30	QPSK	1732.5	8	0.004617605	4331.3
	-20	QPSK	1732.5	7	0.00404040404	4331.3
	-10	QPSK	1732.5	6	0.003463203	4331.3
	0	QPSK	1732.5	8	0.004617605	4331.3
	10	QPSK	1732.5	-7	-0.00404040404	4331.3
	20	QPSK	1732.5	-9	-0.005194805	4331.3
	30	QPSK	1732.5	-9	-0.005194805	4331.3
	40	QPSK	1732.5	7	0.00404040404	4331.3
	50	QPSK	1732.5	-7	-0.00404040404	4331.3
	Low	20	QPSK	11	0.006349206	4331.3
	High	20	QPSK	-14	-0.00808080808	4331.3
1.4 MHz, Mid Ch., 1RB, QPSK						

Test: 27.2; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:34

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4350	7	16	passed
-30	5			7	13	passed
-30	10			6	12	passed
-20	0	normal	4350	8	14	passed
-20	5			8	13	passed
-20	10			8	13	passed
-10	0	normal	4350	5	10	passed
-10	5			5	10	passed
-10	10			5	12	passed
0	0	normal	4350	6	12	passed
0	5			5	13	passed
0	10			5	13	passed
10	0	normal	4350	2	8	passed
10	5			2	7	passed
10	10			3	9	passed
20	0	low	4350	0	5	passed
20	5			2	5	passed
20	10			1	6	passed
20	0	normal	4350	1	10	passed
20	5			1	-5	passed
20	10			1	-9	passed
20	0	high	4350	1	-5	passed
20	5			1	8	passed
20	10			1	6	passed
30	0	normal	4350	-5	-13	passed
30	5			-4	-12	passed
30	10			-4	-10	passed
40	0	normal	4350	-5	-13	passed
40	5			-6	-11	passed
40	10			-5	-12	passed
50	0	normal	4350	-4	-13	passed
50	5			-5	-9	passed
50	10			-5	-10	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4350	0	5	passed
20	5			1	6	passed
20	10			1	6	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 27.2; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:33

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4350	7	21	passed
-30	5			9	27	passed
-30	10			8	26	passed
-20	0	normal	4350	9	27	passed
-20	5			9	14	passed
-20	10			8	17	passed
-10	0	normal	4350	-18	-22	passed
-10	5			-19	-22	passed
-10	10			-19	-24	passed
0	0	normal	4350	-13	-23	passed
0	5			-13	-22	passed
0	10			-14	-20	passed
10	0	normal	4350	-2	-8	passed
10	5			-2	-6	passed
10	10			-2	-10	passed
20	0	low	4350	1	-7	passed
20	5			1	6	passed
20	10			1	13	passed
20	0	normal	4350	1	-9	passed
20	5			1	-14	passed
20	10			0	-4	passed
20	0	high	4350	0	-7	passed
20	5			2	8	passed
20	10			1	4	passed
30	0	normal	4350	-4	-12	passed
30	5			-4	-11	passed
30	10			-5	-9	passed
40	0	normal	4350	-4	-8	passed
40	5			-5	-11	passed
40	10			-5	-13	passed
50	0	normal	4350	-4	-9	passed
50	5			-4	-10	passed
50	10			-5	-12	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4350	-7	-10	passed
20	5			-6	-12	passed
20	10			-5	-10	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

Test: 27.2; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/07/30 14:34

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	4350	10	15	passed
-30	5			7	13	passed
-30	10			8	12	passed
-20	0	normal	4350	1	7	passed
-20	5			8	15	passed
-20	10			8	13	passed
-10	0	normal	4350	8	14	passed
-10	5			6	11	passed
-10	10			5	9	passed
0	0	normal	4350	5	10	passed
0	5			5	9	passed
0	10			5	12	passed
10	0	normal	4350	1	-7	passed
10	5			2	8	passed
10	10			2	9	passed
20	0	low	4350	-2	-7	passed
20	5			-3	-9	passed
20	10			-2	-6	passed
20	0	normal	4350	-2	-5	passed
20	5			-2	-9	passed
20	10			-3	-9	passed
20	0	high	4350	-2	-10	passed
20	5			-2	-6	passed
20	10			-2	-5	passed
30	0	normal	4350	-4	-8	passed
30	5			-5	-10	passed
30	10			-5	-12	passed
40	0	normal	4350	-5	-11	passed
40	5			-5	-9	passed
40	10			-6	-11	passed
50	0	normal	4350	-6	-9	passed
50	5			-5	-12	passed
50	10			-5	-11	passed

Battery operating end point voltage ¹⁾						
Temp. °C	Duration min	Voltage V	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
20	0	3.25	4350	-3	-8	passed
20	5			-2	-9	passed
20	10			-2	-5	passed

1) The call is established at high voltage and the voltage is then reduced to the battery operating end.

3.5.15 27.3 Spurious emissions at antenna terminals §2.1051, §27.53

Test: 27.3; Spurious emissions at antenna terminals Summary §2.1051, §27.53

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/10/27 20:10

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Mode / Band	Channel	detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
UMTS / FDD4	1312	rms	maxhold	100	1709	-21	8	-13	passed
		rms	maxhold	50	1710	-30.7	17.7	-13	passed
	1412	rms	maxhold	-	-	-	>20	-13	passed
	1450	rms	maxhold	-	-	-	>20	-12	passed
	1513	rms	maxhold	50	1755	-31.2	18.2	-13	passed
		rms	maxhold	100	1756	-21.8	8.8	-13	passed
HSDPA / FDD4	1312	rms	maxhold	100	1709	-21.6	8.6	-13	passed
		rms	maxhold	50	1710	-32.9	19.9	-13	passed
	1412	rms	maxhold	-	-	-	>20	-13	passed
	1450	rms	maxhold	-	-	-	>20	-13	passed
	1513	rms	maxhold	50	1755	-31.6	18.6	-13	passed
		rms	maxhold	100	1756	-21.9	8.9	-13	passed
HSUPA / FDD4	1312	rms	maxhold	100	1709	-21.5	8.5	-13	passed
		rms	maxhold	50	1710	-32.6	19.6	-13	passed
	1412	rms	maxhold	-	-	-	>20	-13	passed
	1450	rms	maxhold	-	-	-	>20	-13	passed
	1513	rms	maxhold	50	1755	-31.6	18.6	-13	passed
		rms	maxhold	100	1756	-20.6	7.6	-13	passed

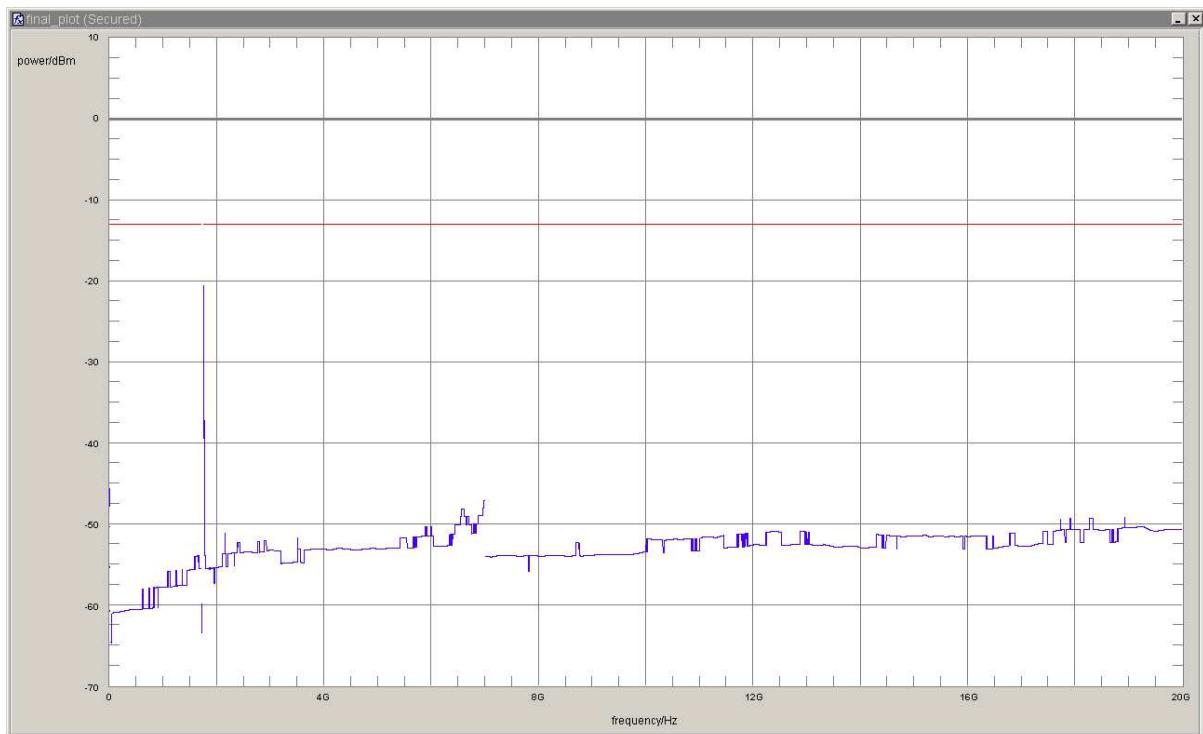

3.5.16 27.4 Field strength of spurious radiation §2.1053, §27.53

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1312, Frequency = 1712.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 6:56

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV


Test Specification: FCC part 2 and 27

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1708.55	-18.41	-13.00	5.41	45.0	horizontal	vertical	passed
peak	maxhold	100	1708.71	-15.59	-13.00	2.59	-45.0	horizontal	vertical	passed
peak	maxhold	100	1708.95	-16.45	-13.00	3.45	60.0	horizontal	horizontal	passed
peak	maxhold	50	1709.81	-27.69	-13.00	14.69	60.0	horizontal	horizontal	passed
peak	maxhold	50	1710.00	-26.49	-13.00	13.49	-45.0	horizontal	vertical	passed
peak	maxhold	1000	2111.7	-30.21	-13.00	17.21	-45.0	vertical	vertical	passed
peak	maxhold	1000	2113.5	-31.03	-13.00	18.03	-90.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-28.87	-13.00	15.87	90.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.61	-13.00	17.61	-180.0	horizontal	horizontal	passed
peak	maxhold	1000	19326.7	-30.37	-13.00	17.37	0.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

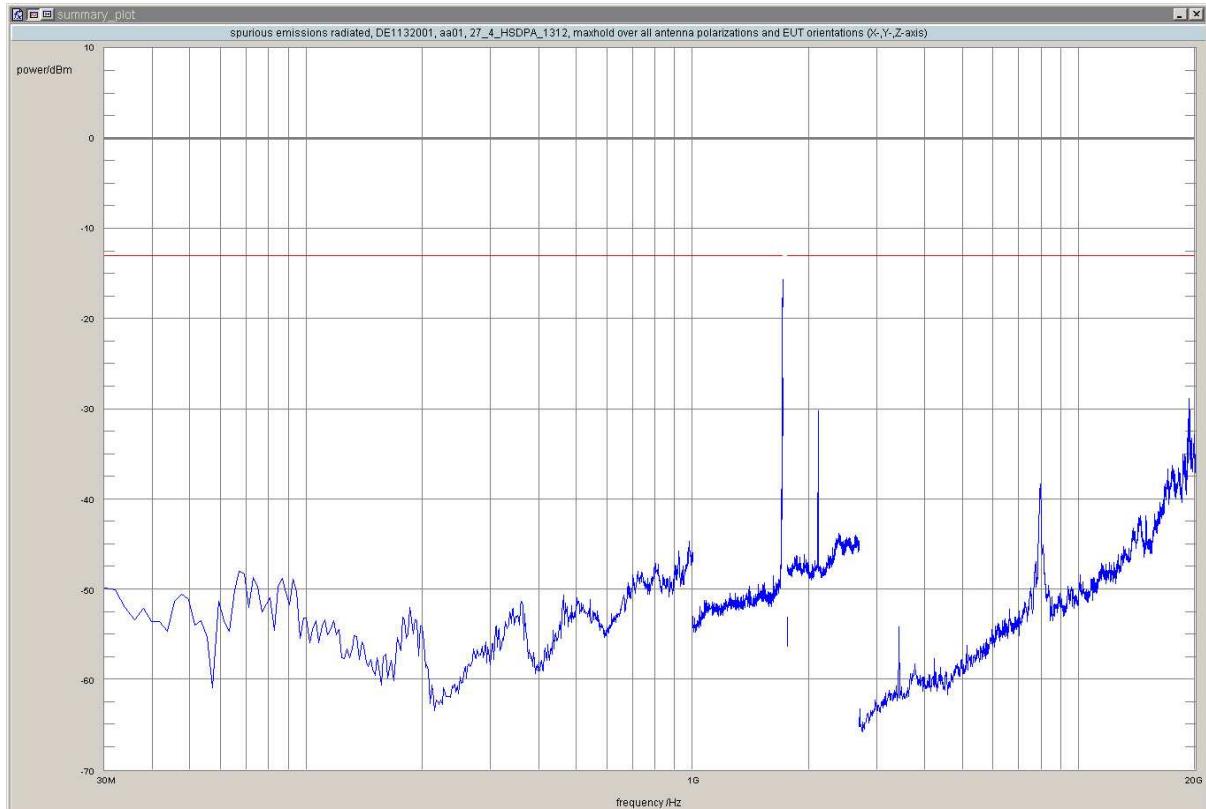

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed


Setup No.: S01_AA01

Date of Test: 2015/06/12 7:44

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

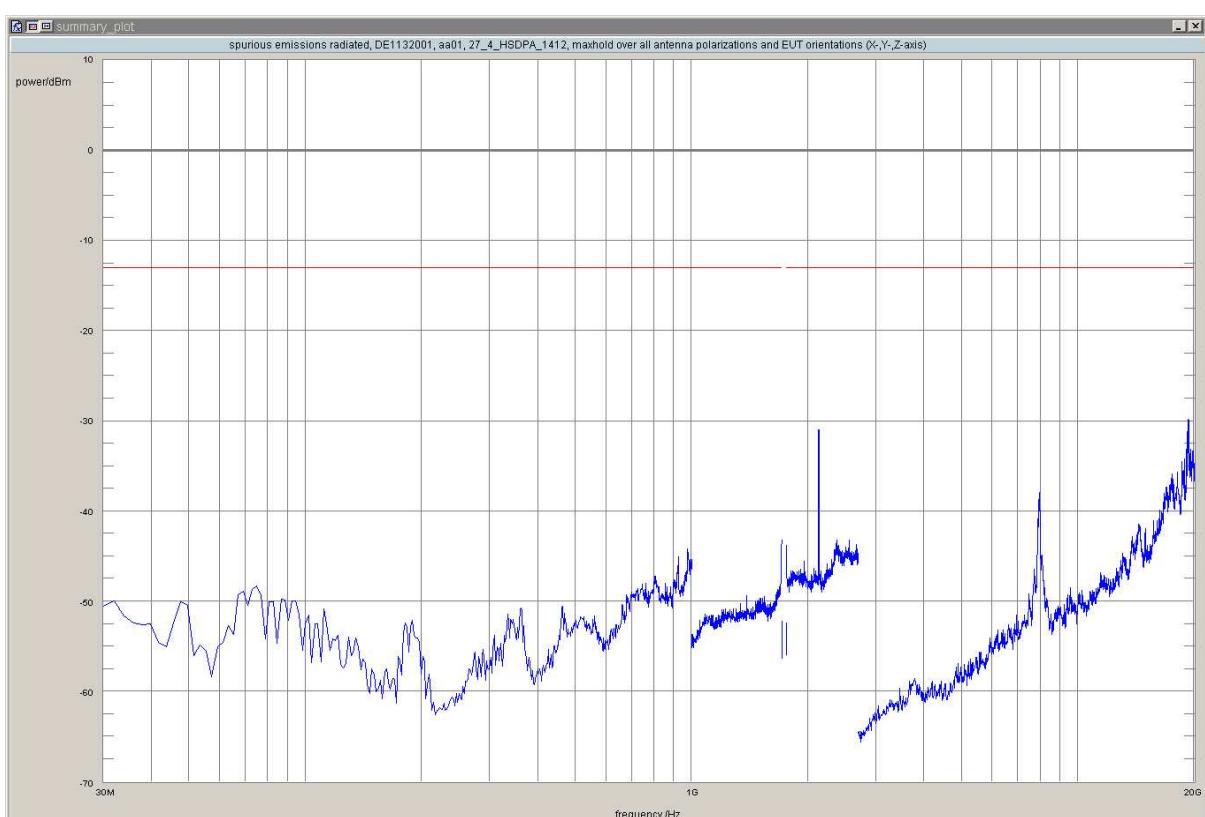

added by operator

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	2130.6	-30.93	-13.00	17.93	-45.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-29.83	-13.00	16.83	60.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-30.15	-13.00	17.15	-60.0	horizontal	horizontal	passed
peak	maxhold	1000	19326.7	-29.94	-13.00	16.94	-60.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 8:45

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV


Test Specification: FCC part 2 and 27

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	2138.1	-32.17	-13.00	19.17	-90.0	vertical	vertical	passed
peak	maxhold	1000	2140.0	-30.71	-13.00	17.71	0.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-30.29	-13.00	17.29	-180.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-30.88	-13.00	17.88	-45.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-29.01	-13.00	16.01	90.0	vertical	vertical	passed
peak	maxhold	1000	19887.8	-31.50	-13.00	18.50	-120.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

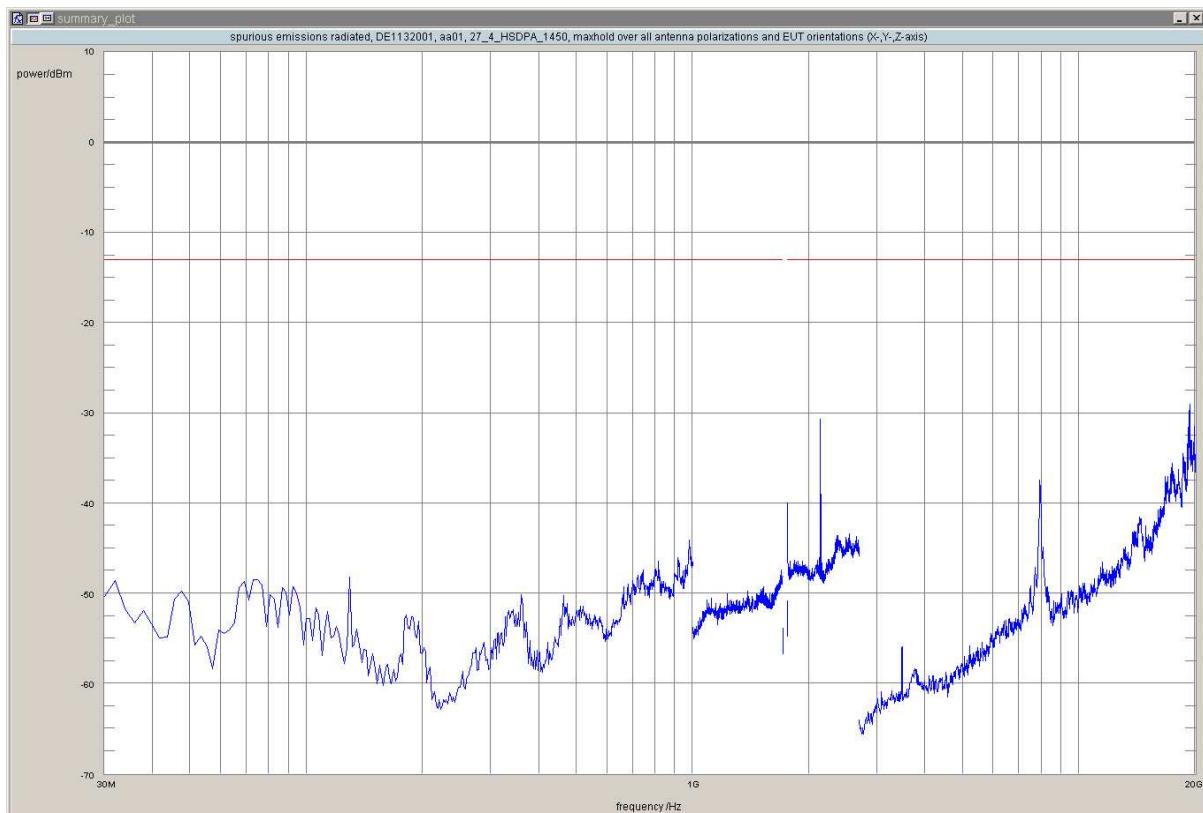

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1513, Frequency = 1752.6MHz

Result: Passed


Setup No.: S01_AA01

Date of Test: 2015/06/12 9:30

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

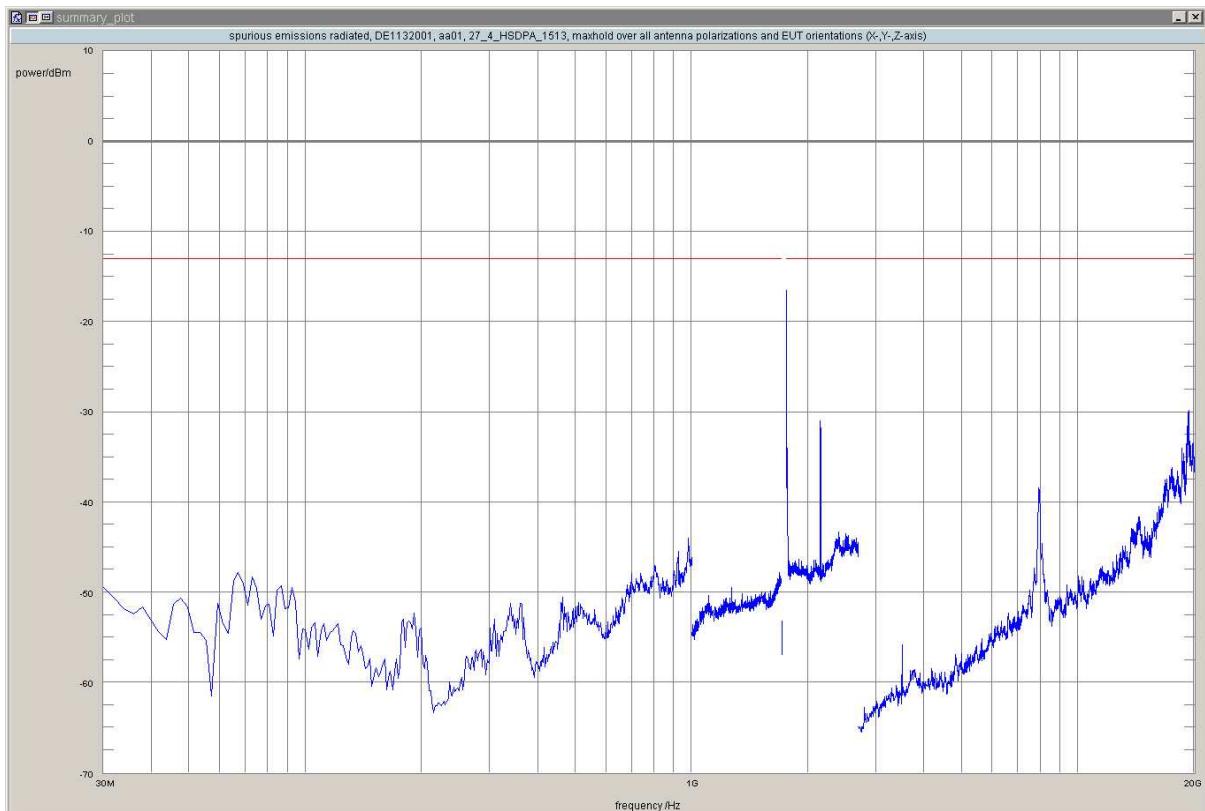

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1755.04	-27.11	-13.00	14.11	60.0	horizontal	horizontal	passed
peak	maxhold	100	1756.02	-16.47	-13.00	3.47	60.0	horizontal	horizontal	passed
peak	maxhold	100	1759.64	-29.94	-13.00	16.94	0.0	horizontal	horizontal	passed
peak	maxhold	100	1760.17	-27.76	-13.00	14.76	60.0	horizontal	horizontal	passed
peak	maxhold	1000	2152.9	-31.02	-13.00	18.02	0.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-30.04	-13.00	17.04	0.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-31.51	-13.00	18.51	0.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-29.76	-13.00	16.76	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1312, Frequency = 1712.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 11:46

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV


Test Specification: FCC part 2 and 27

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1708.77	-31.82	-13.00	18.82	60.0	horizontal	horizontal	passed
peak	maxhold	100	1708.96	-31.07	-13.00	18.07	0.0	horizontal	horizontal	passed
peak	maxhold	1000	19228.5	-30.04	-13.00	17.04	-135.0	vertical	vertical	passed
peak	maxhold	1000	19312.6	-30.57	-13.00	17.57	90.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-30.24	-13.00	17.24	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

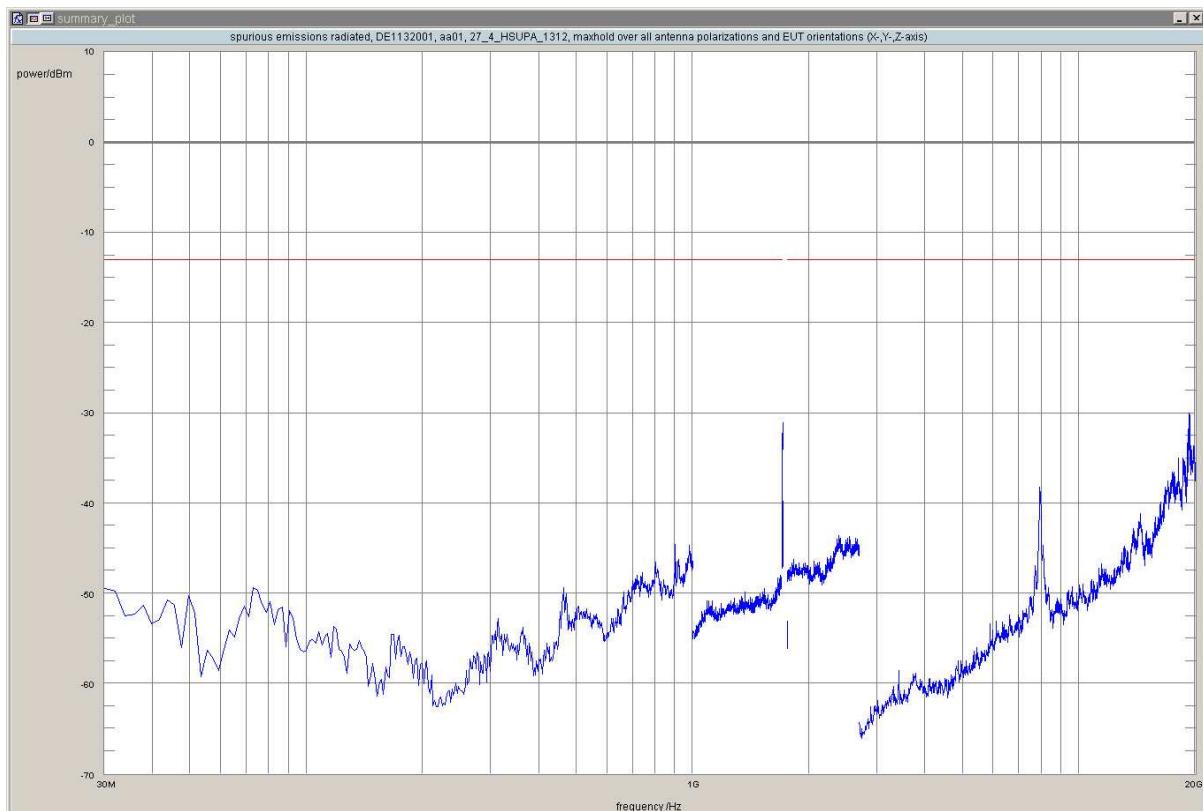

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 12:38

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV


Test Specification: FCC part 2 and 27

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-30.33	-13.00	17.33	-180.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-30.58	-13.00	17.58	135.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-29.47	-13.00	16.47	120.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

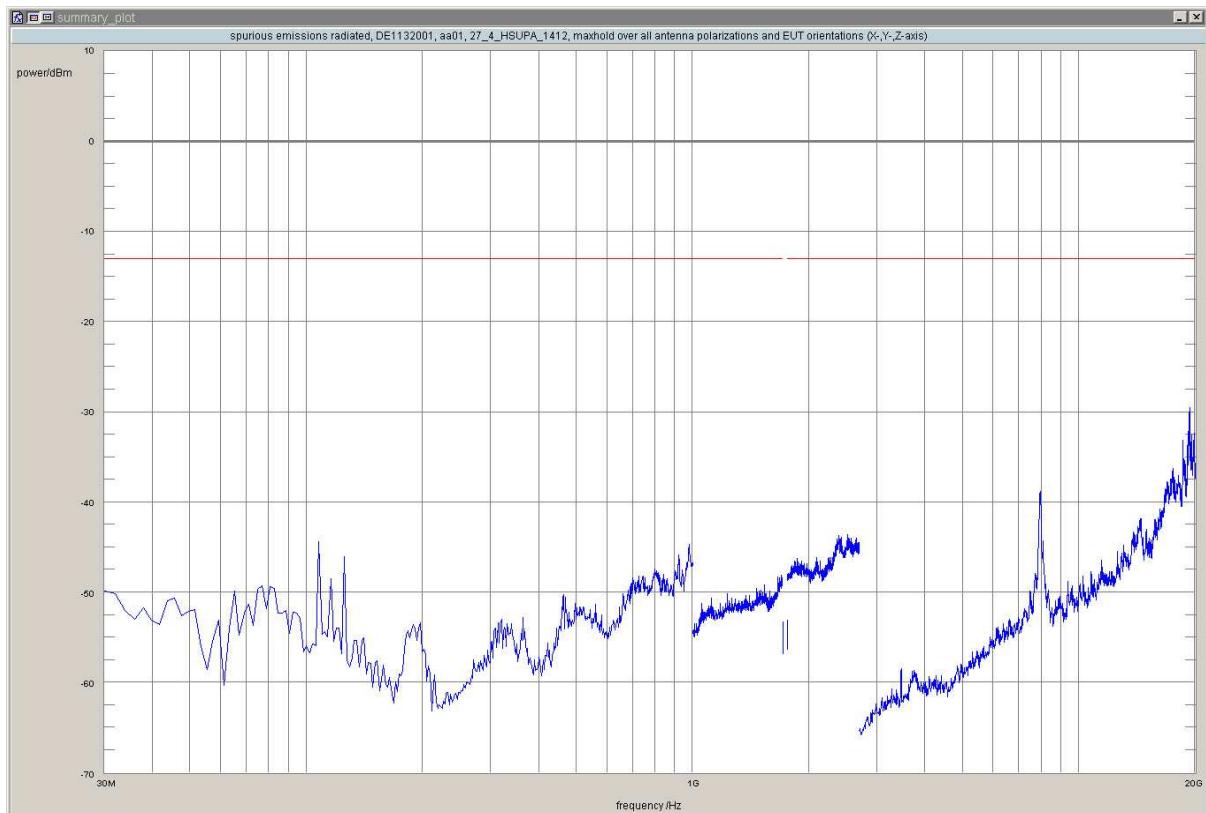

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed


Setup No.: S01_AA01

Date of Test: 2015/06/12 13:35

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

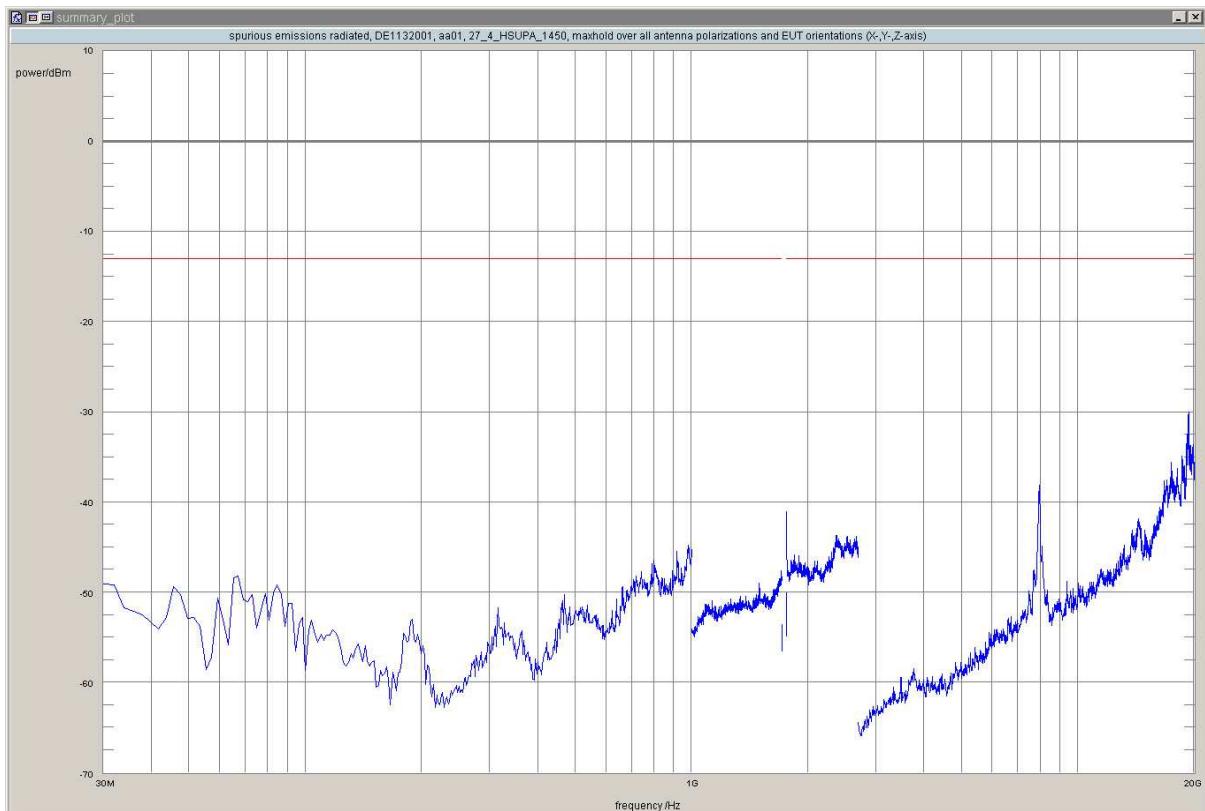

added by operator

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19228.5	-31.27	-13.00	18.27	-120.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-30.69	-13.00	17.69	0.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-30.02	-13.00	17.02	60.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1513, Frequency = 1752.6MHz

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/12 14:37

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV


Test Specification: FCC part 2 and 27

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1755.03	-30.77	-13.00	17.77	-45.0	horizontal	vertical	passed
peak	maxhold	50	1755.51	-31.72	-13.00	18.72	-45.0	horizontal	vertical	passed
peak	maxhold	50	1755.86	-32.53	-13.00	19.53	45.0	horizontal	vertical	passed
peak	maxhold	100	1756.02	-20.38	-13.00	7.38	0.0	horizontal	horizontal	passed
peak	maxhold	100	1756.41	-21.34	-13.00	8.34	45.0	vertical	vertical	passed
peak	maxhold	100	1756.74	-26.59	-13.00	13.59	90.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-31.08	-13.00	18.08	-45.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-31.19	-13.00	18.19	-60.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-29.84	-13.00	16.84	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

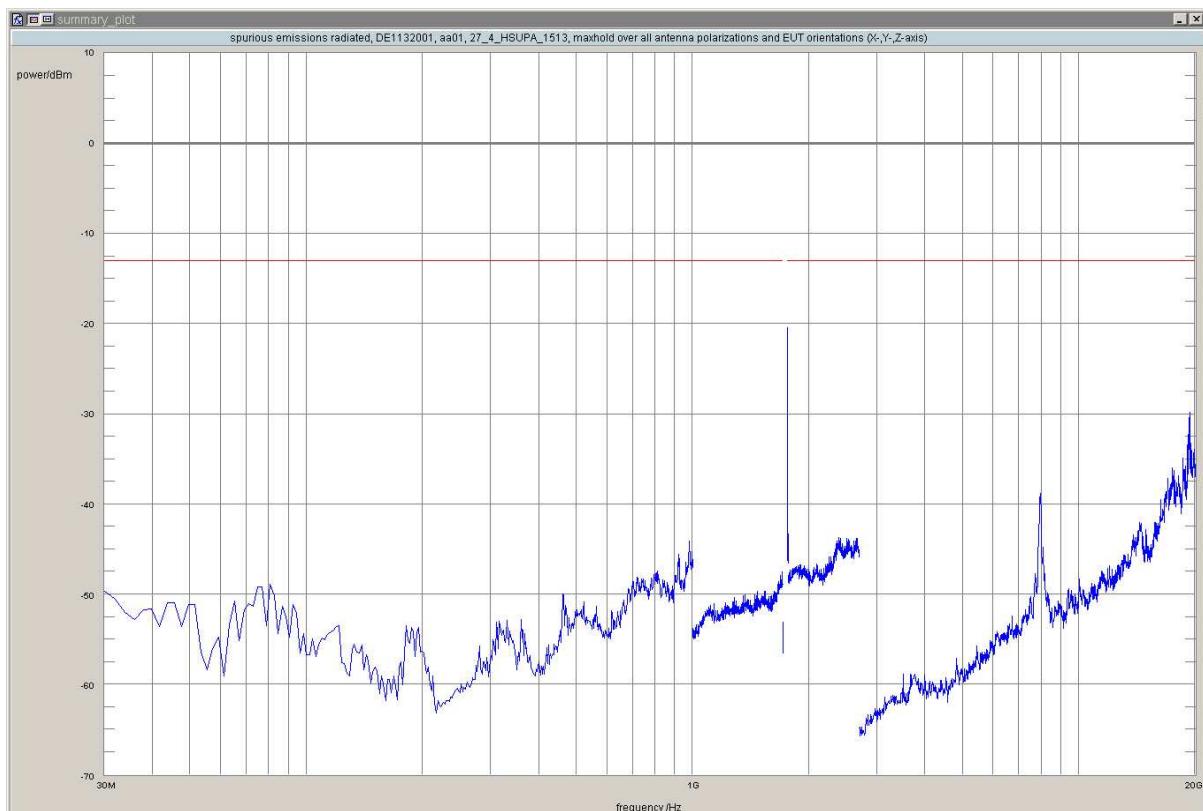

added by operator

3.5.17 27.5 Emission and Occupied Bandwidth §2.1049

Test: 27.5; Emission and Occupied Bandwidth Summary §2.1049

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/07/23 20:11

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Band	Mode	Channel	-26dB BW / kHz	99% BW / kHz	Verdict
FDD 4	UMTS	1312	4689.4	4168.3	Passed
		1412	4689.4	4168.3	Passed
		1450	4709.4	4168.3	Passed
		1513	4689.4	4188.4	Passed
	HSDPA	1312	4689.4	4168.3	Passed
		1412	4709.4	4168.3	Passed
		1450	4709.4	4188.4	Passed
		1513	4709.4	4188.4	Passed
	HSUPA	1312	4729.5	4208.4	Passed
		1412	4709.4	4208.4	Passed
		1450	4709.4	4208.4	Passed
		1513	4709.4	4188.4	Passed

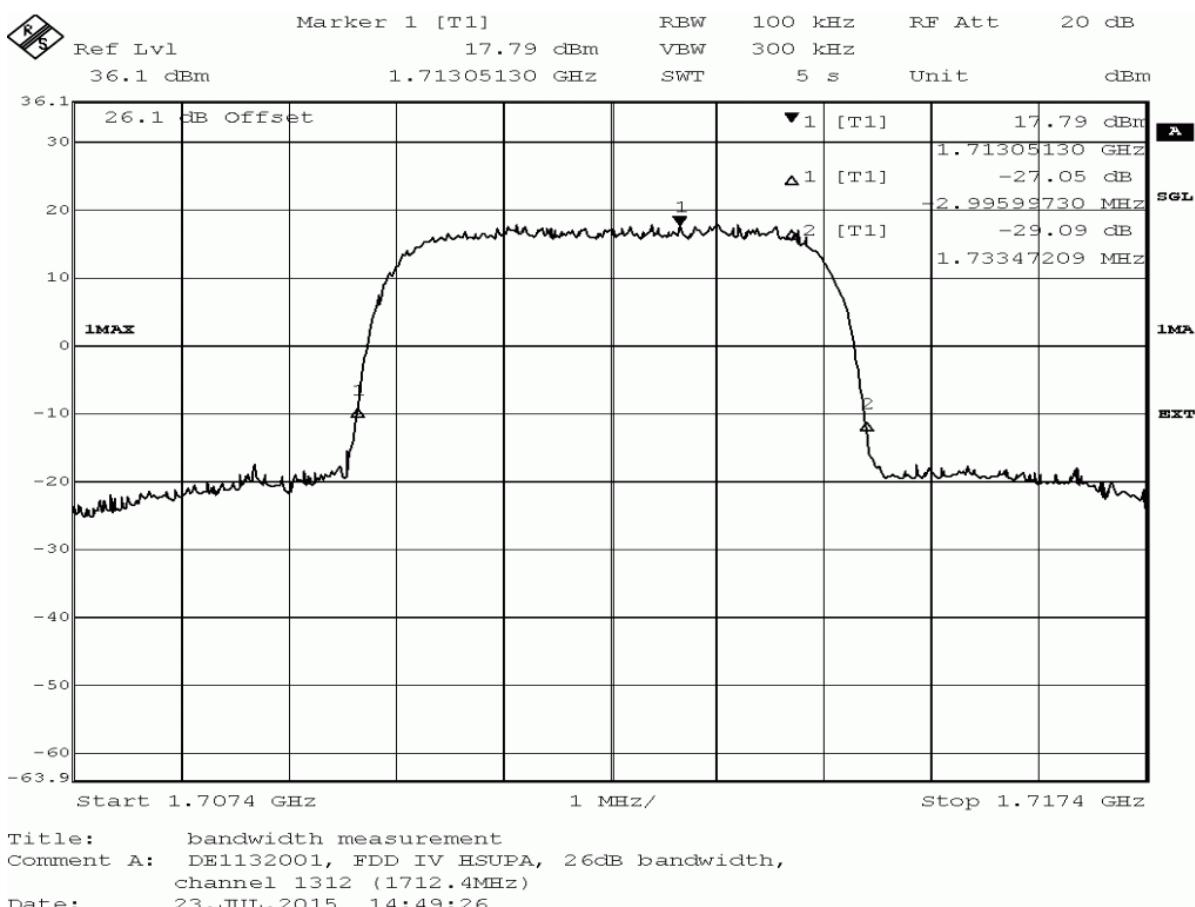

3.5.18 27.6 Band edge compliance §2.1053, §27.53

Test: 27.6: Band edge compliance summary §2.1053, §27.53

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/07/23 20:13

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERV

Test Specification: FCC part 2 and 27

Detailed Results:

Band	Mode	Channel	Detector	Trace	Resolution bandwidth /kHz	Frequency /MHz	Peak value /dBm	Margin to limit /dB	Limit / dBm	Verdict
FDD 2	UMTS	1312	rms	maxhold	50	1710.0	-29.92	16.92	-13	passed
		1513	rms	maxhold	50	1755.0	-31.17	18.17	-13	passed
	HSDPA	1312	rms	maxhold	50	1710.0	-32.62	19.62	-13	passed
		1513	rms	maxhold	50	1755.0	-31.51	18.51	-13	passed
	HSUPA	1312	rms	maxhold	50	1710.0	-32.62	19.62	-13	passed
		1513	rms	maxhold	50	1755.0	-31.51	18.51	-13	passed

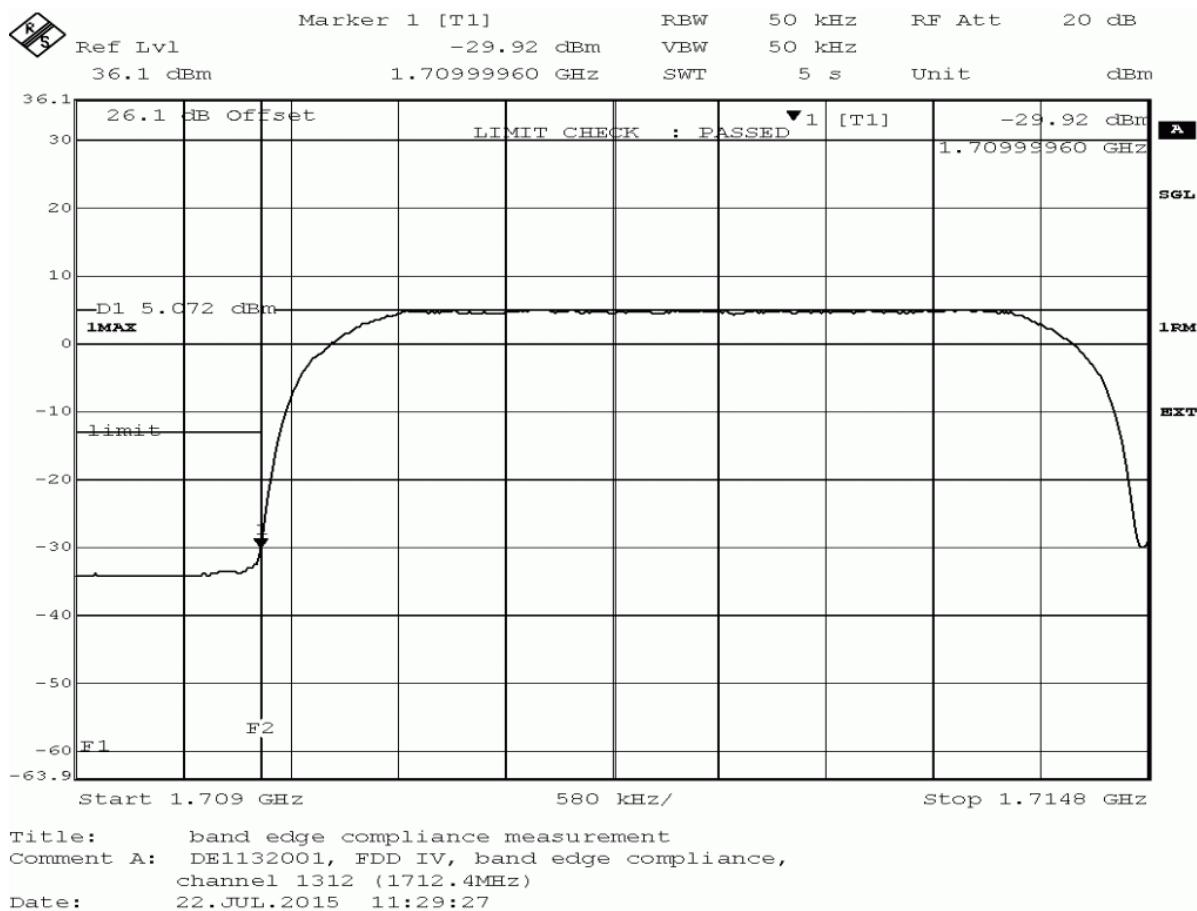

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1	Last Execution	Next Exec.
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Radiated emissions
Lab ID:
Lab 1

Description:

Equipment for emission measurements

Serial Number:

see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	SucoFlex	W18.02-2+W38.02-2	HUBER+SUHNER
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration		2012/06/26	2015/06/25
Standard Calibration		2015/06/23	2018/06/22
Double-ridged horn	HF 907	102444	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration		2015/05/11	2018/05/10
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration		2012/12/18	2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new biconicals	830547/003	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration		2015/06/30	2018/06/29

Reference: MDE_ELEKT_1502_FCCg
 according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD Calibration		2014/11/27 2017/11/27
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID: **Lab 1, Lab 2**
Manufacturer: see single devices
Description: Single Devices for various Test Equipment
Type: various
Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Digital Multimeter 13 (Clamp Meter)	Fluke 325	31270091WS	FLUKE
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Spectrum Analyzer	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
	DKD calibration		2015/06/23 2018/06/22
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co. KG

Test Equipment Digital Signalling Devices
Lab ID:
Lab 1, Lab 2
Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		

Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		

	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices
Lab ID:
Lab 1

Description:

Equipment for emission measurements

Serial Number:

see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum Analyzer	ESR 7	101424	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration	2014/11/13	2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2015/05/11	2016/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2015/05/11	2016/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration	2014/06/24	2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration	2014/01/07	2016/01/31
	<i>HW/SW Status</i>	<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration	2009/12/03	
Spectrum Analyzer	FSW 43	103779	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration	2014/11/17	2016/11/16

Test Equipment Multimeter 03
Lab ID:
Lab 1, Lab 2

Description:

Fluke 177

Serial Number:

86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration	2013/12/04	2015/12/03

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 2
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB 4T-10 SMA 2W		F9401	Weinschel Associates
Coax Attenuator 10dB 56-10 SMA 2W		W3702	Weinschel Associates
Coax Attenuator 10dB 56-10 SMA 2W		W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2015/05/11 2016/05/10
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/03 2015/06/24
	Standard calibration		2015/06/25 2016/06/24
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2015/05/11 2016/05/10
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/12/02 2017/12/01
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05

Test Equipment T/A Logger 13

Lab ID: **Lab 1, Lab 2**
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration	2015/02/27	2017/02/26

Test Equipment T/H Logger 03

Lab ID: **Lab 2**
Description: Lufft Opus10
Serial Number: 7482

Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 03 (Environ)	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration	2015/02/27	2017/02/26

Test Equipment T/H Logger 12

Lab ID: **Lab 1**
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration	2015/03/10	2017/03/09

Test Equipment Temperature Chamber 05

Lab ID: **Lab 2**
Manufacturer: see single devices
Description: Temperature Chamber VT4002
Type: Vötsch
Serial Number: see single devices

Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration	2014/03/11	2016/03/10

5 Annex

5.1 Additional Information for Report

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM/WCDMA/CDMA2000 cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

§ 2.1046 Measurement required: RF power output
§ 2.1049 Measurement required: Occupied bandwidth
§ 2.1051 Measurement required: Spurious emissions at antenna terminals
§ 2.1053 Measurement required: Field strength of spurious radiation
§ 2.1055 Measurement required: Frequency stability
§ 2.1057 Frequency spectrum to be investigated

Part 22, Subpart C – Operational and Technical Requirements

§ 22.355 Frequency tolerance

Part 22, Subpart H – Cellular Radiotelephone Service

§ 22.913 Effective radiated power limits

§ 22.917 Emission limitations for cellular equipment

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

RF Power Output

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
- 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lambda/2 dipole).
- 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
- 5) The test procedure according to TIA-603-C-2004 has been considered.

Test Requirements / Limits**§2.1046 Measurements Required: RF Power Output**

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§22.913 Effective radiated power limits

(a)(2) Maximum ERP. ... The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Emission and Occupied Bandwidth

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1049

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results
- 4) Important Analyser Settings:
 - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
 - 5) The maximum spectral level of the modulated signal was recorded as the reference.
 - 6) The emission bandwidth is measured as follows:
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
 - 7) The occupied bandwidth (99% Bandwidth) is measured as follows:
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits**§ 2.1049 Measurements required: Occupied bandwidth**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

- 4) Important Analyser Settings
- [Resolution Bandwidth]:
 - a) [$\geq 1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the PCS-Band,
 - b) otherwise [100 kHz] (or [1 MHz] for accelerated sweep times)
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 10 GHz (up to the 10th harmonic) during the call was established

Test Requirements / Limits**§ 2.1051 Spurious emissions at antenna terminals**

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lambda/2 dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 10 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarization during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-C 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.
(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].
(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1055

Test Description

- 1) The EUT was placed inside a temperature chamber.
- 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
- 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum

temperature.

4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Mid Channel

5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

6) This measurement procedure was performed for temperature variation from -30°C to +50°C in increments of 10°C, if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§22.355 Frequency tolerance

...the carrier frequency of each transmitter in the Public Mobile Service must be maintained within the tolerances given in table C-1 of this section.

Table C-1.- Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile up to 3 watts (ppm)	Mobile above 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/aFor the mid channel (836.6 MHz) the frequency tolerance is 2.5 ppm (2091.5 Hz).

Band edge compliance

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §22.913

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits

§ 22.917 Emission limitations for cellular equipment

Refer to chapter "Field strength of spurious radiation".

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM/WCDMA/CDMA2000 cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 24, Subpart E - Broadband PCS

- § 24.232 Power and antenna height limits
- § 24.235 Frequency stability
- § 24.236 Field strength limits
- § 24.238 Emission limitations for Broadband PCS equipment

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

RF Power Output

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Channel (Frequency): please refer to the detailed results

- 4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
- 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lamda/2 dipole).
- 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
- 5) The test procedure according to TIA-603-C-2004 has been considered.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.
- §24.232 Power and antenna height limits
- (c) Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.
- (e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Emission and Occupied Bandwidth

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1049

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

- 4) Important Analyser Settings:
 - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
- 5) The maximum spectral level of the modulated signal was recorded as the reference.
- 6) The emission bandwidth is measured as follows:
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
- 7) The occupied bandwidth (99% Bandwidth) is measured as follows:

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper
frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits

§ 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results
- 4) Important Analyser Settings
- [Resolution Bandwidth]:
 - a) [$>=1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,
 - b) otherwise [1 MHz]
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 20 GHz (up to the 10th harmonic) during the call was established

Test Requirements / Limits

§ 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

- (a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
 - (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lambda/2 dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 20 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-C 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C
§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.
(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.
(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].
(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1055

Test Description

1) The EUT was placed inside a temperature chamber.

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C

- 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
- 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.

- 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Mid Channel

- 5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

- 6) This measurement procedure was performed for temperature variation from -30°C to +50°C in increments of 10°C, if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to +50° centigrade for all equipment except that specified in paragraphs

- (a) (2) and (3) of this section.

- (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

- (d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§24.235 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

7Layers interpretation of limit:

To ensure that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block following limit was used:

$\pm 2.5 \text{ ppm} = 4700 \text{ Hz}$ for a frequency of 1880.0 MHz

in accordance with FCC Part 22, Subpart H, §22.355, table C-1: Frequency tolerance for the carrier frequency of mobile transmitters in the Public Mobile Service in the frequency range 821 to 896 MHz.

Band edge compliance

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §24.238

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits

§ 24.238 Effective radiated power limits

Refer to chapter "Field strength of spurious radiation".

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 27, Subpart C—Technical Standards

- § 27.50 Power and antenna height limits
- § 27.53 Emissions limits
- § 27.54 Frequency stability

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

RF Power Output

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Channel (Frequency): please refer to the detailed results

4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lamda/2 dipole).

4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.

5) The test procedure according to TIA-603-C-2004 has been considered.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated. §27.50 Power and antenna height limits.

(d) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands:

(2) Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground, and mobile and portable stations must employ a means for limiting power to the minimum necessary for successful communications.

Emission and Occupied Bandwidth

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1049

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth

5) The maximum spectral level of the modulated signal was recorded as the reference.

6) The emission bandwidth is measured as follows:

the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.

7) The occupied bandwidth (99% Bandwidth) is measured as follows:

the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits**§ 2.1049 Measurements required: Occupied bandwidth**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard FCC Part 27, Subpart C

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

- 4) Important Analyser Settings
- [Resolution Bandwidth]:
 - a) [$>=1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,
 - b) otherwise [1 MHz]
- c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 18 GHz (up to the 10th harmonic) during the call is established

Test Requirements / Limits**§ 2.1051 Spurious emissions at antenna terminals**

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

- (a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
 - (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
 - (c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 27.53 Emission limits

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel : please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a lambda/2 dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 18 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,
b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-C 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 27.53 Emission limits

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard FCC Part 27, Subpart C

The test was performed according to FCC §2.1055

Test Description

- 1) The EUT was placed inside a temperature chamber.
- 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
- 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.
- 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Mid Channel

5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

6) This measurement procedure was performed for temperature variation from -30°C to $+50^{\circ}\text{C}$ in increments of 10°C , if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§27.54 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

7Layers interpretation of limit:

To ensure that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block following limit was used:

$\pm 2.5 \text{ ppm} = 4350 \text{ Hz}$ for channel 1450, frequency 1740.0 MHz
 $\pm 2.5 \text{ ppm} = 4331 \text{ Hz}$ for channel 1412, frequency 1732.4 MHz

in accordance with FCC Part 22, Subpart H, §22.355, table C-1: Frequency tolerance for the carrier frequency of mobile transmitters in the Public Mobile Service in the frequency range 821 to 896 MHz.

Band edge compliance

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §27.53

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results
- 4) Important Analyser Settings:
- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits**§ 27.53 Effective radiated power limits**

Refer to chapter "Field strength of spurious radiation".

Subtests HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5


Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.
 Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Subtests HSUPA

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	2
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1


Subtest	Max UL Data Rate (kb/s)	β_c/β_d	β_{hs}	β_{ed}	CM
1	242.1	11/15	22/15	1309/225	1
2	161.3	6/15	12/15	94/75	3
3	524.7	15/9	30/15	47/15	2
4	197.6	2/15	4/15	56/75	3
5	299.6	15/15	30/15	134/15	1

Setup Drawings

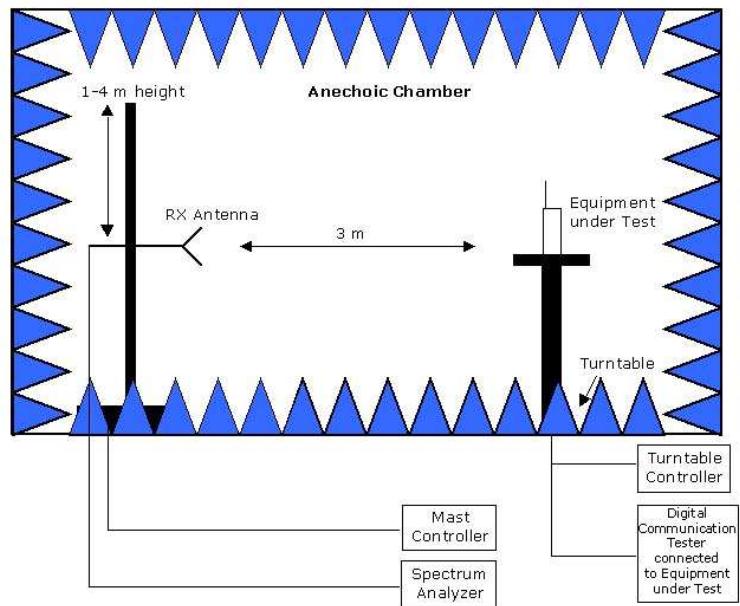


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Principle set-up for radiated measurements

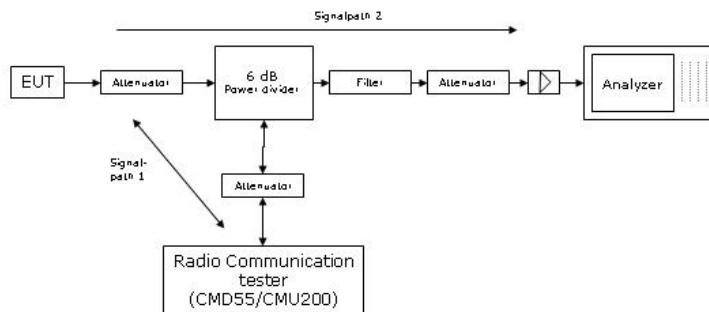

Remark: Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

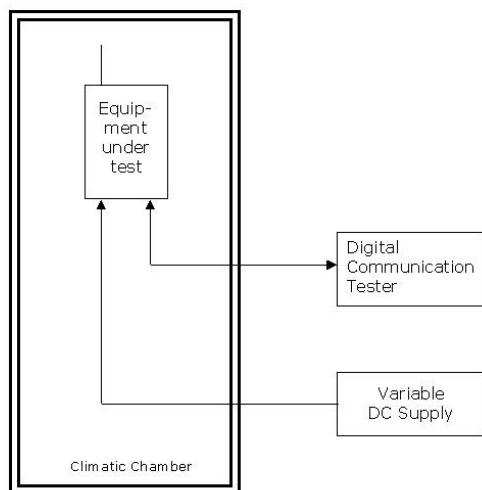

Principle set-up for tests under extreme test conditions

Correlation of measurement requirements for Cellular Equipment from FCC and IC

Test name – FCC	FCC reference CFR47				Test name – IC	IC reference			
	Part 2	Part 22	Part 24	Part 27		RSS-Gen	RSS-132 SRSP-503	RSS-133 SRSP-510	RSS-139 SRSP-513
						Issue:	4, 2014	3, 2013	6, 2013
RF power output	§ 2.1046	§ 22.913	§ 24.232	§ 27.50	Transmitter output power	6.12	5.4	6.4	6.4
Frequency stability	§ 2.1055	§ 22.355	§ 24.235	§ 27.54	Frequency stability	6.11	5.3	6.3	6.3
Spurious emissions at antenna terminals	§ 2.1051	§ 22.917	§ 24.238	§ 27.53	Transmitter unwanted emissions conducted	6.13	5.5	6.5	6.5
–	–	–	–	–	Receiver unwanted emissions conducted	5/7 *), 7.1.3	5.6	6.6	6.6
Field strength of spurious radiation	§ 2.1053	§ 22.917	§ 24.238	§ 27.53	Transmitter unwanted emissions radiated	6.13	5.5	6.5	6.5
–	–	–	–	–	Receiver unwanted emissions radiated	5/7 *), 7.1.2	5.6	6.6	6.6
Emission and Occupied Bandwidth	§ 2.1049	–	–	–	Emission and Occupied Bandwidth	6.6	5.5	2.3; 6.5	2.3; 6.5
Band edge compliance	§ 2.1053	§ 22.917	§ 24.238	§ 27.53	Band edge compliance	6.13	5.5	6.5	6.5

*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

Measurement Uncertainties

FCC Part 22, 24, 27, 90
IC RSS-132, RSS-133, RSS-139

Test Case	Parameter	Uncertainty
RF Power Output	Power	± 2.2 dB
Frequency Stability	Frequency	± 25 Hz
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Field strength of spurious radiation	Power	± 4.5 dB
Emission and Occupied Bandwidth	Power Frequency	± 2.9 dB GSM: ± 10.6 kHz UMTS, LTE: ± 120.0 kHz
Band Edge Compliance	Power Frequency	± 2.9 dB GSM: ± 14.6 kHz UMTS, LTE: ± 68.0 kHz

FCC Part 15b
IC ICES-003

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power+	± 5.5 dB

FCC Part 15c, 15e
IC RSS-210, IC RSS-247

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power		± 2.2 dB
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	7
3.3	List of Test Specification	7
3.4	Summary	8
3.5	Detailed Results	12
3.5.1	22.1 RF Power Output §2.1046, §22.913	12
3.5.2	22.2 Frequency stability §2.1055	15
3.5.3	22.3 Spurious emissions at antenna terminals §2.1051, §22.917	25
3.5.4	22.4 Field strength of spurious radiation §2.1053, §22.917	27
3.5.5	22.5 Emission and Occupied Bandwidth §2.1049, §22.917	42
3.5.6	22.6 Band edge compliance §2.1053, §22.917	45
3.5.7	24.1 RF Power Output §2.1046, §24.232	48
3.5.8	24.2 Frequency stability §2.1055, §24.235	51
3.5.9	24.3 Spurious emissions at antenna terminals §2.1051, §24.238	61
3.5.10	24.4 Field strength of spurious radiation §2.1053, §24.238	63
3.5.11	24.5 Emission and Occupied Bandwidth §2.1049, §24.238	78

according to FCC Part 22 Subpart H, Part 24 Subpart E and Part 27 Subpart C	
3.5.12 24.6 Band edge compliance §2.1053, §24.238	81
3.5.13 27.1 RF Power Output §2.1046, §27.250	83
3.5.14 27.2 Frequency stability §2.1055, §27.54	86
3.5.15 27.3 Spurious emissions at antenna terminals §2.1051, §27.53	94
3.5.16 27.4 Field strength of spurious radiation §2.1053, §27.53	96
3.5.17 27.5 Emission and Occupied Bandwidth §2.1049	104
3.5.18 27.6 Band edge compliance §2.1053, §27.53	106
4 Test Equipment Details	107
4.1 List of Used Test Equipment	107
5 Annex	115
5.1 Additional Information for Report	115
6 Index	142
