



# FCC Radio Test Report

## FCC ID: V2R-TN0630

**This report concerns: Original Grant**

**Project No.** : 2310C008  
**Equipment** : True Wireless Earphones  
**Brand Name** : PHIATON  
**Test Model** : TN0630  
**Series Model** : N/A  
**Applicant** : Cresyn Co., Ltd  
**Address** : 5 Gangnam-daero 107-gil, Seocho-gu, Seoul, South Korea  
**Manufacturer** : Cresyn Co., Ltd  
**Address** : 5 Gangnam-daero 107-gil, Seocho-gu, Seoul, South Korea  
**Factory** : CRESYN HANOI CO., LTD.  
**Address** : Dong Tho Industrial Complex, Yen Phong District, Bac Ninh Province, Vietnam  
**Date of Receipt** : Dec. 05, 2023  
**Date of Test** : Dec. 06, 2023 ~ Feb. 06, 2024  
**Issued Date** : Feb. 20, 2024  
**Report Version** : R02  
**Test Sample** : Engineering Sample No.: DG202312116 for radiated and AC Power Line Conducted Emissions, DG2023120598 for conducted.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by**

: Vincent. Tan  
Vincent Tan

**Approved by**

: Chay . Cai  
Chay Cai

Room 108, Building 2, No. 1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong 523000 China.

Tel: +86-769-8318-3000    Web: [www.newbtl.com](http://www.newbtl.com)    Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>6</b>    |
| <b>1 . APPLICABLE STANDARDS</b>                              | <b>7</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>7</b>    |
| 2.1 TEST FACILITY  | 8           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 8           |
| 2.3 TEST ENVIRONMENT CONDITIONS                              | 9           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>10</b>   |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 10          |
| 3.2 DESCRIPTION OF TEST MODES                                | 12          |
| 3.3 PARAMETERS OF TEST SOFTWARE                              | 13          |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 14          |
| 3.5 SUPPORT UNITS  | 15          |
| <b>4 . AC POWER LINE CONDUCTED EMISSIONS</b>                 | <b>16</b>   |
| 4.1 LIMIT  | 16          |
| 4.2 TEST PROCEDURE   | 16          |
| 4.3 DEVIATION FROM TEST STANDARD                             | 16          |
| 4.4 TEST SETUP   | 17          |
| 4.5 EUT OPERATING CONDITIONS                                 | 17          |
| 4.6 TEST RESULTS   | 17          |
| <b>5 . RADIATED EMISSIONS</b>                                | <b>18</b>   |
| 5.1 LIMIT  | 18          |
| 5.2 TEST PROCEDURE   | 18          |
| 5.3 DEVIATION FROM TEST STANDARD                             | 19          |
| 5.4 TEST SETUP   | 20          |
| 5.5 EUT OPERATING CONDITIONS                                 | 21          |
| 5.6 TEST RESULTS - 9 KHZ TO 30 MHZ                           | 21          |
| 5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 21          |
| 5.8 TEST RESULTS - ABOVE 1000 MHZ                            | 21          |
| <b>6 . NUMBER OF HOPPING FREQUENCY</b>                       | <b>22</b>   |
| 6.1 LIMIT  | 22          |
| 6.2 TEST PROCEDURE   | 22          |
| 6.3 DEVIATION FROM STANDARD                                  | 22          |
| 6.4 TEST SETUP   | 22          |

**Table of Contents**

|   | <b>Page</b> |
|---|-------------|
| 6.5 EUT OPERATION CONDITIONS            | 22          |
| 6.6 TEST RESULTS                        | 22          |
| <b>7 . AVERAGE TIME OF OCCUPANCY</b>    | <b>23</b>   |
| 7.1 LIMIT                               | 23          |
| 7.2 TEST PROCEDURE                      | 23          |
| 7.3 DEVIATION FROM STANDARD             | 23          |
| 7.4 TEST SETUP                          | 23          |
| 7.5 EUT OPERATION CONDITIONS            | 23          |
| 7.6 TEST RESULTS                        | 23          |
| <b>8 . HOPPING CHANNEL SEPARATION</b>   | <b>24</b>   |
| 8.1 LIMIT                               | 24          |
| 8.2 TEST PROCEDURE                      | 24          |
| 8.3 DEVIATION FROM STANDARD             | 24          |
| 8.4 TEST SETUP                          | 24          |
| 8.5 EUT OPERATION CONDITIONS            | 24          |
| 8.6 TEST RESULTS                        | 24          |
| <b>9 . BANDWIDTH</b>                    | <b>25</b>   |
| 9.1 LIMIT                               | 25          |
| 9.2 TEST PROCEDURE                      | 25          |
| 9.3 DEVIATION FROM STANDARD             | 25          |
| 9.4 TEST SETUP                          | 25          |
| 9.5 EUT OPERATION CONDITIONS            | 25          |
| 9.6 TEST RESULTS                        | 25          |
| <b>10 . MAXIMUM OUTPUT POWER</b>        | <b>26</b>   |
| 10.1 LIMIT                              | 26          |
| 10.2 TEST PROCEDURE                     | 26          |
| 10.3 DEVIATION FROM STANDARD            | 26          |
| 10.4 TEST SETUP                         | 26          |
| 10.5 EUT OPERATION CONDITIONS           | 26          |
| 10.6 TEST RESULTS                       | 26          |
| <b>11 . CONDUCTED SPURIOUS EMISSION</b> | <b>27</b>   |
| 11.1 LIMIT                              | 27          |
| 11.2 TEST PROCEDURE                     | 27          |
| 11.3 DEVIATION FROM STANDARD            | 27          |

| <b>Table of Contents</b>                                   | <b>Page</b> |
|--|-------------|
| 11.4 TEST SETUP  | 27          |
| 11.5 EUT OPERATION CONDITIONS                              | 27          |
| 11.6 TEST RESULTS  | 27          |
| <b>12 . MEASUREMENT INSTRUMENTS LIST</b>                   | <b>28</b>   |
| <b>13 . EUT TEST PHOTO</b>                                 | <b>30</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>      | <b>35</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>    | <b>38</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b> | <b>43</b>   |
| <b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>     | <b>46</b>   |
| <b>APPENDIX E - NUMBER OF HOPPING FREQUENCY</b>            | <b>57</b>   |
| <b>APPENDIX F - AVERAGE TIME OF OCCUPANCY</b>              | <b>59</b>   |
| <b>APPENDIX G - HOPPING CHANNEL SEPARATION</b>             | <b>64</b>   |
| <b>APPENDIX H - BANDWIDTH</b>                              | <b>66</b>   |
| <b>APPENDIX I - MAXIMUM OUTPUT POWER</b>                   | <b>68</b>   |
| <b>APPENDIX J - CONDUCTED SPURIOUS EMISSION</b>            | <b>73</b>   |
| <b>APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE</b>       | <b>78</b>   |

**REPORT ISSUED HISTORY**

| Report No.          | Version | Description                                     | Issued Date   | Note    |
|---------------------|---------|---|---------------|---------|
| BTL-FCCP-1-2310C008 | R00     | Original Report.                                | Jan. 22, 2024 | Invalid |
| BTL-FCCP-1-2310C008 | R01     | Revised report to address comments.             | Feb. 06, 2024 | Invalid |
| BTL-FCCP-1-2310C008 | R02     | Updated the applicant and manufacturer address. | Feb. 20, 2024 | Valid   |

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of NVLAP:

KDB 558074 D01 15.247 Meas Guidance v05r02

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart C |                                   |  |          |         |
|--------------------------------------|-----------------------------------|--|----------|---------|
| Standard(s) Section                  | Test Item                         | Test Result                            | Judgment | Remark  |
| 15.207                               | AC Power Line Conducted Emissions | APPENDIX A                             | PASS     | -----   |
| 15.247(d)<br>15.205(a)<br>15.209(a)  | Radiated Emission                 | APPENDIX B<br>APPENDIX C<br>APPENDIX D | PASS     | -----   |
| 15.247 (a)(1)(iii)                   | Number of Hopping Frequency       | APPENDIX E                             | PASS     | -----   |
| 15.247 (a)(1)(iii)                   | Average Time of Occupancy         | APPENDIX F                             | PASS     | -----   |
| 15.247(a)(1)                         | Hopping Channel Separation        | APPENDIX G                             | PASS     | -----   |
| 15.247(a)(1)                         | Bandwidth                         | APPENDIX H                             | PASS     | -----   |
| 15.247(a)(1)                         | Maximum Output Power              | APPENDIX I                             | PASS     | -----   |
| 15.247(d)                            | Conducted Spurious Emission       | APPENDIX J                             | PASS     | -----   |
| 15.203                               | Antenna Requirement               | -----                                  | PASS     | Note(2) |

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong 523792  
BTL's Registration Number for FCC: 162128  
BTL's Designation Number for FCC: CN5042

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))  
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | $U_{\text{(dB)}}$ |
|-----------|--------|-----------------------------|-------------------|
| DG-C02    | CISPR  | 150kHz ~ 30MHz              | 2.88              |

B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | $U_{\text{(dB)}}$ |
|-----------|--------|-----------------------------|-------------------|
| DG-CB01   | CISPR  | 9kHz ~ 30MHz                | 2.36              |

| Test Site       | Method | Measurement Frequency Range | Ant. H / V | $U_{\text{(dB)}}$ |
|-----------------|--------|-----------------------------|------------|-------------------|
| DG-CB03<br>(3m) | CISPR  | 30MHz ~ 200MHz              | V          | 4.40              |
|                 |        | 30MHz ~ 200MHz              | H          | 3.62              |
|                 |        | 200MHz ~ 1,000MHz           | V          | 4.58              |
|                 |        | 200MHz ~ 1,000MHz           | H          | 3.98              |

| Test Site       | Method | Measurement Frequency Range | $U_{\text{(dB)}}$ |
|-----------------|--------|-----------------------------|-------------------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 6GHz                 | 4.08              |
|                 |        | 6GHz ~ 18GHz                | 4.62              |

| Test Site       | Method | Measurement Frequency Range | $U_{\text{(dB)}}$ |
|-----------------|--------|-----------------------------|-------------------|
| DG-CB03<br>(1m) | CISPR  | 18 ~ 26.5 GHz               | 3.36              |
|                 |        | 26.5 ~ 40 GHz               | 3.58              |

**C. Other Measurement:**

| Test Item                   | Uncertainty |
|-----------------------------|-------------|
| Conducted Spurious Emission | 1.9 dB      |
| Maximum Output Power        | 1.3 dB      |
| Bandwidth                   | 0.90 %      |
| Temperature                 | 0.8 °C      |
| Humidity                    | 2.2 %       |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

**2.3 TEST ENVIRONMENT CONDITIONS**

| Test Item                             | Temperature | Humidity | Test Voltage | Tested By   |
|---------------------------------------|-------------|----------|--------------|-------------|
| AC Power Line Conducted Emissions     | 25°C        | 70%      | AC 120V/60Hz | Hayden Chen |
| Radiated Emissions-9 kHz to 30 MHz    | 20°C        | 54%      | DC 3.7V      | Hayden Chen |
| Radiated Emissions-30 MHz to 1000 MHz | 23°C        | 42%      | DC 3.7V      | Allen Tong  |
| Radiated Emissions-Above 1000 MHz     | 23°C        | 42%      | DC 3.7V      | Max Wang    |
| Number of Hopping Frequency           | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |
| Average Time of Occupancy             | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |
| Hopping Channel Separation            | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |
| Bandwidth                             | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |
| Maximum Output Power                  | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |
| Conducted Spurious Emission           | 25°C        | 55%      | DC 3.7V      | Steve Zhou  |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                         |  |                             |
|-------------------------|--|-----------------------------|
| Equipment               | True Wireless Earphones  |                             |
| Brand Name              | PHIATON  |                             |
| Test Model              | TN0630   |                             |
| Series Model            | N/A  |                             |
| Model Difference(s)     | N/A  |                             |
| Software Version        | 1.0.0  |                             |
| Hardware Version        | 1.0  |                             |
| Power Source            | <p>Earphones:<br/>1# Supplied from battery.<br/>Model: 1154RA<br/>2# Supplied from Charging Case.<br/>Charging Case:<br/>1# Supplied from battery.<br/>Model: 841538<br/>2# Supplied from USB Port.<br/>3# Supplied from wireless charging base.</p> |                             |
| Power Rating            | <p>Earphones:<br/>1# DC 3.7V 50mAh 0.185Wh<br/>2# DC 5V<br/>Charging Case:<br/>1# DC 3.7V 450mAh 1.665Wh<br/>2# DC 5V<br/>3# 3.5W</p>  |                             |
| Operation Frequency     | 2402 MHz ~ 2480 MHz  |                             |
| Modulation Type         | GFSK, π/4-DQPSK, 8-DPSK  |                             |
| Bit Rate of Transmitter | 1Mbps, 2Mbps, 3Mbps  |                             |
| Max. Output Power       | Left Earphone  | 3Mbps: 11.96 dBm (0.0157 W) |
|                         | Right Earphone   | 3Mbps: 12.29 dBm (0.0169 W) |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00      | 2402            | 27      | 2429            | 54      | 2456            |
| 01      | 2403            | 28      | 2430            | 55      | 2457            |
| 02      | 2404            | 29      | 2431            | 56      | 2458            |
| 03      | 2405            | 30      | 2432            | 57      | 2459            |
| 04      | 2406            | 31      | 2433            | 58      | 2460            |
| 05      | 2407            | 32      | 2434            | 59      | 2461            |
| 06      | 2408            | 33      | 2435            | 60      | 2462            |
| 07      | 2409            | 34      | 2436            | 61      | 2463            |
| 08      | 2410            | 35      | 2437            | 62      | 2464            |
| 09      | 2411            | 36      | 2438            | 63      | 2465            |
| 10      | 2412            | 37      | 2439            | 64      | 2466            |
| 11      | 2413            | 38      | 2440            | 65      | 2467            |
| 12      | 2414            | 39      | 2441            | 66      | 2468            |
| 13      | 2415            | 40      | 2442            | 67      | 2469            |
| 14      | 2416            | 41      | 2443            | 68      | 2470            |
| 15      | 2417            | 42      | 2444            | 69      | 2471            |
| 16      | 2418            | 43      | 2445            | 70      | 2472            |
| 17      | 2419            | 44      | 2446            | 71      | 2473            |
| 18      | 2420            | 45      | 2447            | 72      | 2474            |
| 19      | 2421            | 46      | 2448            | 73      | 2475            |
| 20      | 2422            | 47      | 2449            | 74      | 2476            |
| 21      | 2423            | 48      | 2450            | 75      | 2477            |
| 22      | 2424            | 49      | 2451            | 76      | 2478            |
| 23      | 2425            | 50      | 2452            | 77      | 2479            |
| 24      | 2426            | 51      | 2453            | 78      | 2480            |
| 25      | 2427            | 52      | 2454            |         |                 |
| 26      | 2428            | 53      | 2455            |         |                 |

## 3. Table for Filed Antenna:

| Ant.  | Brand | Model Name    | Antenna Type | Connector | Gain (dBi) |
|-------|-------|---------------|--------------|-----------|------------|
| Left  | AWAVE | PPU-TN0630(L) | PIFA         | N/A       | -2.43      |
| Right | AWAVE | PPU-TN0630(R) | PIFA         | N/A       | -1.84      |

Note: The antenna gain is provided by the manufacturer.

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description                    |
|--------------|--------------------------------|
| Mode 1       | TX Mode_1Mbps Channel 00/39/78 |
| Mode 2       | TX Mode_2Mbps Channel 00/39/78 |
| Mode 3       | TX Mode_3Mbps Channel 00/39/78 |
| Mode 4       | TX Mode_3Mbps Channel 00       |

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test |                          |
|--|--------------------------|
| Final Test Mode                        | Description              |
| Mode 4                                 | TX Mode_3Mbps Channel 00 |

| Radiated emissions test - Below 1GHz |                          |
|--------------------------------------|--------------------------|
| Final Test Mode                      | Description              |
| Mode 4                               | TX Mode_3Mbps Channel 00 |

| Radiated emissions test - Above 1GHz |                                |
|--------------------------------------|--------------------------------|
| Final Test Mode                      | Description                    |
| Mode 1                               | TX Mode_1Mbps Channel 00/39/78 |
| Mode 3                               | TX Mode_3Mbps Channel 00/39/78 |

| Maximum Output Power |                                |
|----------------------|--------------------------------|
| Final Test Mode      | Description                    |
| Mode 1               | TX Mode_1Mbps Channel 00/39/78 |
| Mode 2               | TX Mode_2Mbps Channel 00/39/78 |
| Mode 3               | TX Mode_3Mbps Channel 00/39/78 |

| Other Conducted test |                                |
|----------------------|--------------------------------|
| Final Test Mode      | Description                    |
| Mode 1               | TX Mode_1Mbps Channel 00/39/78 |
| Mode 3               | TX Mode_3Mbps Channel 00/39/78 |

**Note:**

- (1) The measurements for Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5) and 3Mbps (3DH5), only worst case were documented for other test items except Average Time of Occupancy.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) This product has the mode of BT AFH, which was considered during testing. 800/20/X(X = 2 of DH1, X = 4 of DH3 or X = 6 of DH5) with 20, 10 or 6.67 hops per second in a channel, and then multiply 0.4\*20 (20 # of hopping). But this mode is not the worst case mode as duration of the packet is same, and this report only shows the worst case mode.
- (4) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 3Mbps Channel 00 is found to be the worst case and recorded.
- (5) The measurements for RF Output Power are tested, the left earphone and right earphone are recorded in the report. The worst case is right earphone and only the worst case is documented for other test items.
- (6) For radiated emission above 1GHz test, the vertical and horizontal are tested and only record the worst case.
- (7) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case (Y) emissions.

### 3.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

**For Left Earphone**


| Test Software Version | AB157x_Airoha_Tool_Kit(ATK)_v3.7.5 |      |      |
|-----------------------|------------------------------------|------|------|
| Frequency (MHz)       | 2402                               | 2441 | 2480 |
| 1Mbps                 | 61                                 | 61   | 61   |
| 2Mbps                 | 63                                 | 63   | 63   |
| 3Mbps                 | 63                                 | 63   | 63   |

**For Right Earphone**


| Test Software Version | AB157x_Airoha_Tool_Kit(ATK)_v3.7.5 |      |      |
|-----------------------|------------------------------------|------|------|
| Frequency (MHz)       | 2402                               | 2441 | 2480 |
| 1Mbps                 | 61                                 | 61   | 61   |
| 2Mbps                 | 63                                 | 63   | 63   |
| 3Mbps                 | 63                                 | 63   | 63   |

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For AC power line conducted emissions Radiated Emissions-9 kHz to 30 MHz:

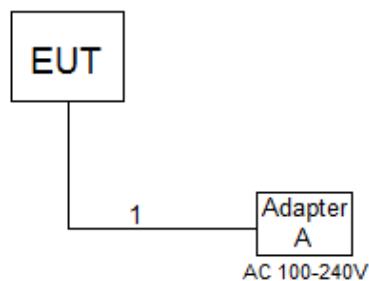

For Radiated Emissions-Above 30 MHz:

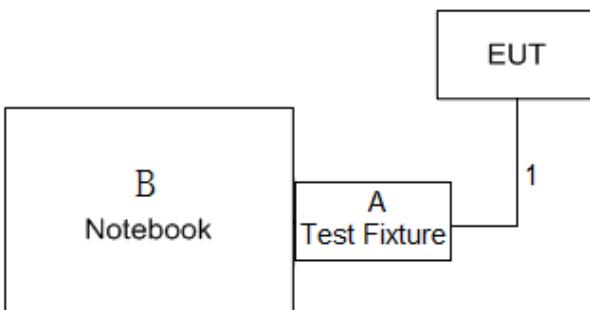

### 3.5 SUPPORT UNITS

**For AC power line conducted emissions Radiated Emissions-9 kHz to 30 MHz:**

| Item | Equipment | Brand  | Model No. | Series No. |
|------|-----------|--------|-----------|------------|
| A    | Adapter   | Huawei | N/A       | N/A        |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | USB Cable  | NO            | NO           | 0.5m   |

**For Radiated Emissions-Above 30 MHz:**

| Item | Equipment    | Brand | Model No.  | Series No. |
|------|--------------|-------|------------|------------|
| A    | Test Fixture | N/A   | N/A        | N/A        |
| B    | Notebook     | HONOR | NBLK-WAX9X | N/A        |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | Data Cable | NO            | NO           | 0.2m   |

#### 4. AC POWER LINE CONDUCTED EMISSIONS

##### 4.1 LIMIT

| Frequency of Emission (MHz) | Limit (dB $\mu$ V) |           |
|-----------------------------|--------------------|-----------|
|                             | Quasi-peak         | Average   |
| 0.15 - 0.5                  | 66 to 56*          | 56 to 46* |
| 0.5 - 5.0                   | 56                 | 46        |
| 5.0 - 30.0                  | 60                 | 50        |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

##### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

| Receiver Parameters | Setting  |
|---------------------|----------|
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

##### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4 TEST SETUP

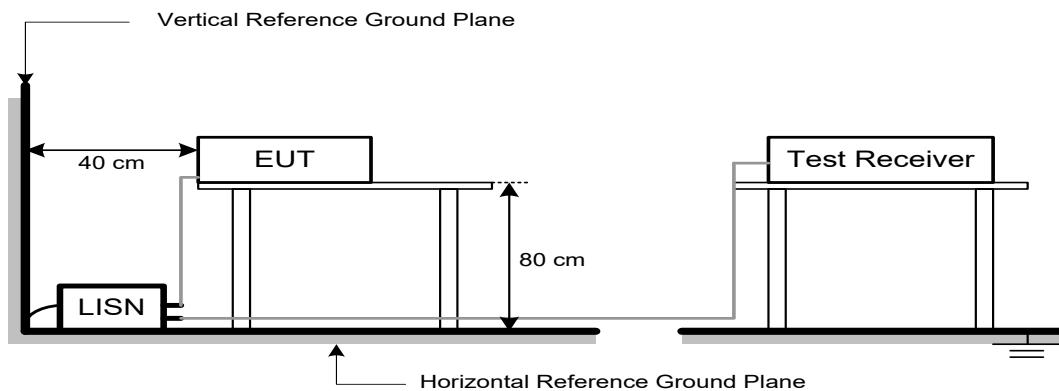

#### 4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

#### 4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 5. RADIATED EMISSIONS

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | (dBuV/m at 3 m) |         |
|-----------------|-----------------|---------|
|                 | Peak            | Average |
| Above 1000      | 74              | 54      |

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

| Spectrum Parameters    | Setting                         |
|------------------------|---------------------------------|
| Start ~ Stop Frequency | 9 kHz~150 kHz for RBW 200 Hz    |
| Start ~ Stop Frequency | 0.15 MHz~30 MHz for RBW 9 kHz   |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for RBW 100 kHz |

| Spectrum Parameters           | Setting                      |
|-------------------------------|------------------------------|
| Start Frequency               | 1000 MHz                     |
| Stop Frequency                | 10th carrier harmonic        |
| RBW / VBW                     | 1 MHz / 3 MHz for PK value   |
| (Emission in restricted band) | 1 MHz / 1/T Hz for AVG value |


| Spectrum Parameters    | Setting                             |
|------------------------|-------------------------------------|
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |
| Start ~ Stop Frequency | 1 GHz~26.5 GHz for PK/AVG detector  |

### 5.3 DEVIATION FROM TEST STANDARD


No deviation.


## 5.4 TEST SETUP

### 9 kHz to 30 MHz

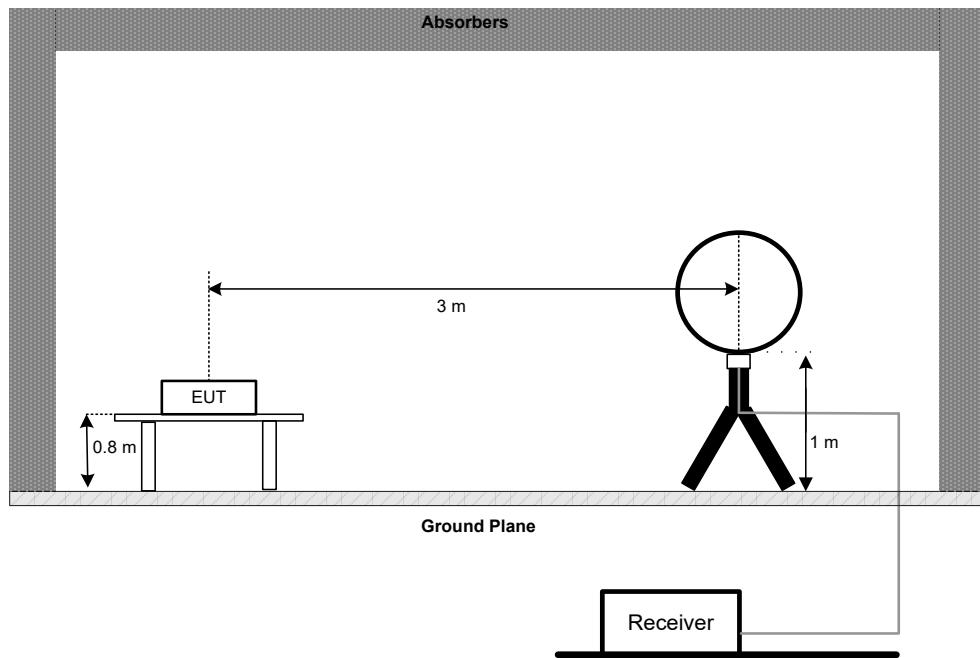

### 30 MHz to 1 GHz

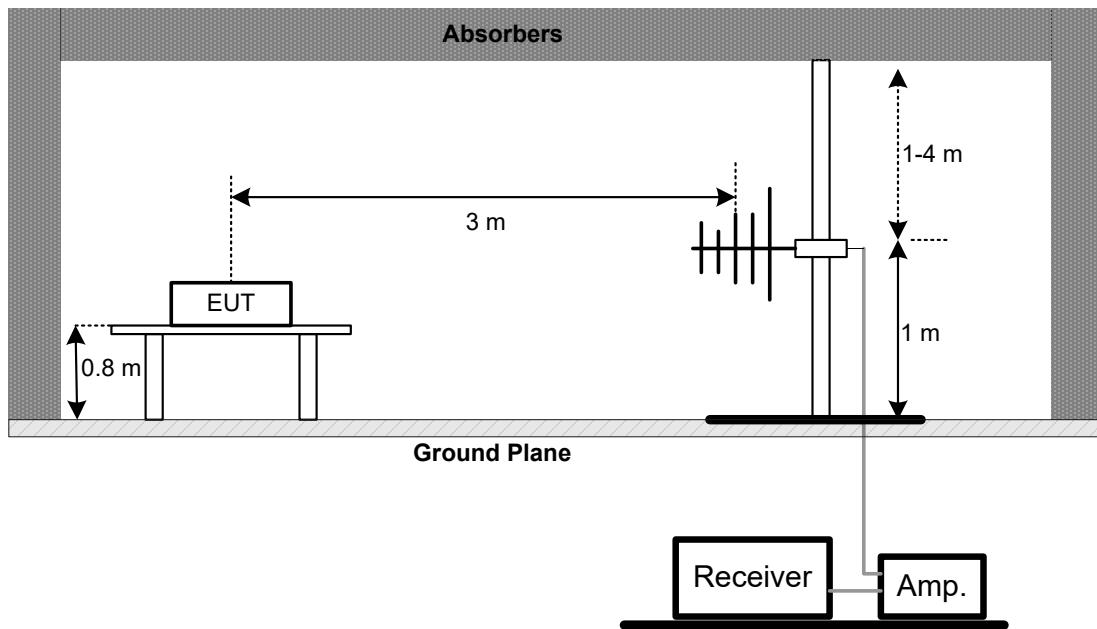

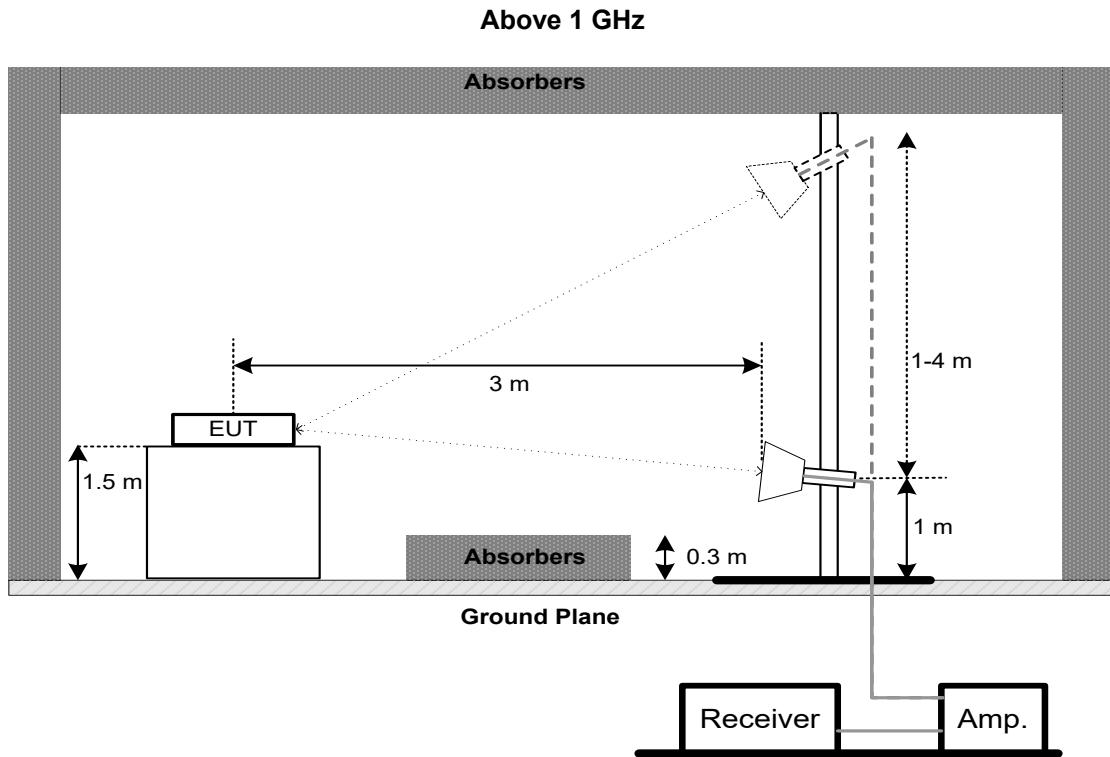

## 5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

## 5.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dB<sub>UV</sub>) + distance extrapolation factor.

## 5.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

## 5.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. NUMBER OF HOPPING FREQUENCY

### 6.1 LIMIT

| Section               | Test Item                   | Limit |
|-----------------------|-----------------------------|-------|
| FCC 15.247(a)(1)(iii) | Number of Hopping Frequency | 15    |

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Span Frequency      | > Operating Frequency Range |
| RBW                 | 100 kHz                     |
| VBW                 | 100 kHz                     |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. AVERAGE TIME OF OCCUPANCY

### 7.1 LIMIT

| Section               | Test Item                 | Limit  |
|-----------------------|---------------------------|--------|
| FCC 15.247(a)(1)(iii) | Average Time of Occupancy | 0.4sec |

### 7.2 TEST PROCEDURE


- a. Set the EUT for DH1, DH3 and DH5 packet transmitting.
- b. Measure the maximum time duration of one single pulse.
- c. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.
- d. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- e. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- f. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- g. The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting   |
|---------------------|---|
| Span Frequency      | 0 MHz   |
| RBW                 | 1 MHz   |
| VBW                 | 1 MHz   |
| Detector            | Peak  |
| Trace               | Max Hold  |
| Sweep Time          | As necessary to capture the entire dwell time per hopping channel |

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

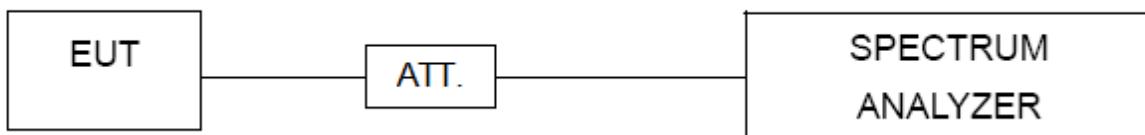

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. HOPPING CHANNEL SEPARATION

### 8.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 8.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting   |
|---------------------|---|
| Span Frequency      | Wide enough to capture the peaks of two adjacent channels |
| RBW                 | 30 kHz  |
| VBW                 | 100 kHz   |
| Detector            | Peak  |
| Trace               | Max Hold  |
| Sweep Time          | Auto  |

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

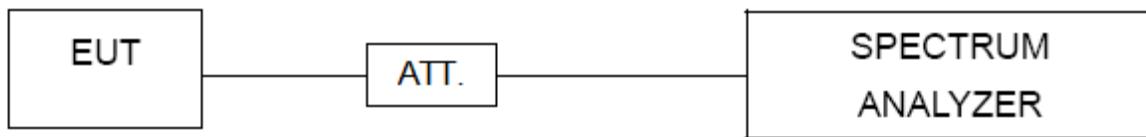

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

## 9. BANDWIDTH

### 9.1 LIMIT

| Section          | Test Item |
|------------------|-----------|
| FCC 15.247(a)(1) | Bandwidth |

### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting                 |
|---------------------|-------------------------|
| Span Frequency      | > Measurement Bandwidth |
| RBW                 | 30 kHz                  |
| VBW                 | 100 kHz                 |
| Detector            | Peak                    |
| Trace               | Max Hold                |
| Sweep Time          | Auto                    |

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H.

## 10. MAXIMUM OUTPUT POWER

### 10.1 LIMIT

| Section          | Test Item            | Limit                    |
|------------------|----------------------|--------------------------|
| FCC 15.247(a)(1) | Maximum Output Power | 0.1250 Watt or 20.97 dBm |

Note: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 10.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting  |
|---------------------|--|
| Span Frequency      | Approximately five times the 20 dB bandwidth, centered on a hopping channel. |
| RBW                 | 3 MHz  |
| VBW                 | 3 MHz  |
| Detector            | Peak   |
| Trace               | Max Hold   |
| Sweep Time          | Auto   |

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP

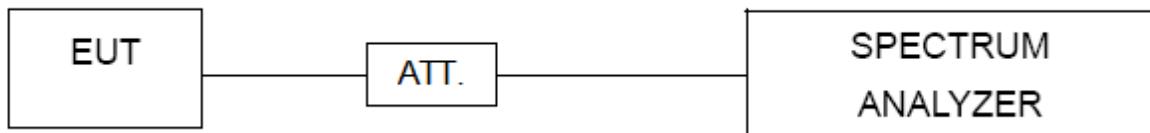

### 10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 10.6 TEST RESULTS

Please refer to the APPENDIX I.

## 11. CONDUCTED SPURIOUS EMISSION

### 11.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 11.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting  |
|---------------------|----------|
| Start Frequency     | 30 MHz   |
| Stop Frequency      | 26.5 GHz |
| RBW                 | 100 kHz  |
| VBW                 | 100 kHz  |
| Detector            | Peak     |
| Trace               | Max Hold |
| Sweep Time          | Auto     |

### 11.3 DEVIATION FROM STANDARD

No deviation.

### 11.4 TEST SETUP



### 11.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 11.6 TEST RESULTS

Please refer to the APPENDIX J.

**12. MEASUREMENT INSTRUMENTS LIST**

| <b>AC Power Line Conducted Emissions</b> |                      |              |                       |            |                  |
|--|----------------------|--------------|-----------------------|------------|------------------|
| Item                                     | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1  | EMI Test Receiver    | R&S          | ESR3                  | 103027     | Jun. 16, 2024    |
| 2  | TWO-LINE V-NETWORK   | R&S          | ENV216                | 101447     | Jan. 07, 2024    |
| 3  | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |
| 4  | Cable                | N/A          | SFT205-NMNM-9M -001   | 9M         | Nov. 27, 2024    |
| 5  | 643 Shield Room      | ETS          | 6*4*3                 | N/A        | N/A              |

| <b>Radiated Emissions - 9 kHz to 30 MHz</b> |                      |              |                        |               |                  |
|---|----------------------|--------------|------------------------|---------------|------------------|
| Item  | Kind of Equipment    | Manufacturer | Type No.               | Serial No.    | Calibrated until |
| 1   | Active Loop Antenna  | Schwarzbeck  | FMZB 1513-60B          | 1513-60 B-034 | Apr. 01, 2024    |
| 2   | MXE EMI Receiver     | Keysight     | N9038A                 | MY56400091    | Jan. 07, 2024    |
| 3   | Cable                | N/A          | RW2350-3.8A-NMB M-1.5M | N/A           | Jun. 10, 2024    |
| 4   | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01  | N/A           | N/A              |
| 5   | 966 Chamber room     | ETS          | 9*6*6                  | N/A           | Jul. 11, 2024    |

| <b>Radiated Emissions - 30 MHz to 1 GHz</b> |                          |                |                       |            |                  |
|---|--------------------------|----------------|-----------------------|------------|------------------|
| Item  | Kind of Equipment        | Manufacturer   | Type No.              | Serial No. | Calibrated until |
| 1   | Trilog-Broadband Antenna | Schwarzbeck    | VULB 9168             | 1461       | Nov. 28, 2024    |
| 2   | Attenuator               | EMC INSTRUMENT | EMCI-N-6-06           | AT-06010   | Nov. 28, 2024    |
| 3   | Preamplifier             | EMC INSTRUMENT | EMC001330             | 980863     | Nov. 17, 2024    |
| 4   | Cable                    | RegalWay       | LMR400-NMNM-12 .5m    | N/A        | Jul. 04, 2024    |
| 5   | Cable                    | RegalWay       | LMR400-NMNM-3 m       | N/A        | Jul. 04, 2024    |
| 6   | Cable                    | RegalWay       | LMR400-NMNM-0. 5m     | N/A        | Jul. 04, 2024    |
| 7   | Receiver                 | Agilent        | N9038A                | MY52130039 | Jan. 07, 2024    |
| 8   | Positioning Controller   | MF             | MF-7802               | N/A        | N/A              |
| 9   | Measurement Software     | Farad          | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |
| 10  | 966 Chamber room         | CM             | 9*6*6                 | N/A        | May 17, 2024     |

| Radiated Emissions - Above 1 GHz |                             |                |                              |            |                  |
|----------------------------------|-----------------------------|----------------|------------------------------|------------|------------------|
| Item                             | Kind of Equipment           | Manufacturer   | Type No.                     | Serial No. | Calibrated until |
| 1                                | Receiver                    | Agilent        | N9038A                       | MY52130039 | Jan. 07, 2024    |
| 2                                | Preamplifier                | EMC INSTRUMENT | EMC118A45SE                  | 980888     | Nov. 17, 2024    |
| 3                                | EXA Spectrum Analyzer       | Keysight       | N9010A                       | MY55150209 | Jun. 16, 2024    |
| 4                                | Double Ridged Guide Antenna | ETS            | 3115                         | 75789      | May 31, 2024     |
| 5                                | Cable                       | RegalWay       | A81-SMAMSMAM-12.5M           | N/A        | Aug. 08, 2024    |
| 6*                               | Cable                       | RegalWay       | RWLP50-4.0A-NM RASM-2.5M     | N/A        | Aug. 08, 2024    |
| 7                                | Cable                       | RegalWay       | RWLP50-4.0A-NM RASMRA-0.8M   | N/A        | Aug. 08, 2024    |
| 8                                | 966 Chamber room            | CM             | 9*6*6                        | N/A        | May 17, 2024     |
| 9                                | Positioning Controller      | MF             | MF-7802                      | N/A        | N/A              |
| 10                               | Measurement Software        | Farad          | EZ-EMC Ver.NB-03A1-01        | N/A        | N/A              |
| 11                               | Low Noise Amplifier         | CONNPHY        | CLN-18G40G-4330-K            | 619413     | Jul. 06, 2024    |
| 12                               | Cable                       | RegalWay       | RWLP50-2.6A-2.92 M2.92M-1.1M | N/A        | Jul. 26, 2024    |
| 13                               | Cable                       | Tonscend       | HF160-KMKM-3M                | N/A        | Jul. 26, 2024    |
| 14                               | Broad-Band Horn Antenna     | Schwarzbeck    | BBHA9170(3m)                 | 9170-319   | Jun. 20, 2024    |

**Number of Hopping Frequency &  
Average Time of Occupancy &  
Hopping Channel Separation &  
Bandwidth &  
Maximum Output Power &  
Conducted Spurious Emission**


| Item | Kind of Equipment            | Manufacturer     | Type No.           | Serial No. | Calibrated until |
|------|------------------------------|------------------|--------------------|------------|------------------|
| 1    | Spectrum Analyzer            | R&S              | FSP40              | 100185     | Jun. 16, 2024    |
| 2    | Attenuator                   | Talent Microwave | TA10A0-S-26.5      | N/A        | N/A              |
| 3    | Multi-output DC Power Supply | GW Instek        | GPC-3030DN         | EK880675   | Jul. 07, 2024    |
| 4    | Measurement Software         | BTL              | BTL Conducted Test | N/A        | N/A              |

Remark "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

|           |                          |       |      |
|-----------|--------------------------|-------|------|
| Test Mode | TX Mode_3Mbps Channel 00 | Phase | Line |
|-----------|--------------------------|-------|------|

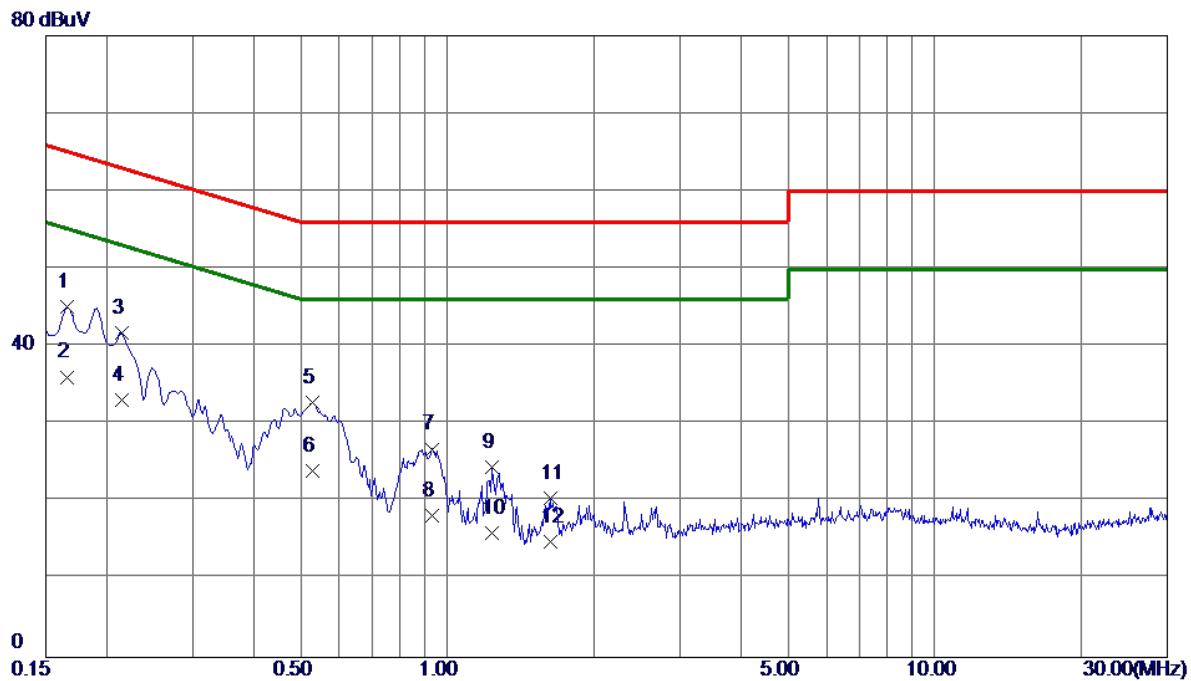


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |         | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|---------|
|     |              |                          |                         |                         |               |              | Detector | Comment |         |
| 1   | 0.1658       | 35.37                    | 9.68                    | 45.05                   | 65.17         | -20.12       | QP       |         |         |
| 2 * | 0.1658       | 26.40                    | 9.68                    | 36.08                   | 55.17         | -19.09       | AVG      |         |         |
| 3   | 0.2153       | 32.02                    | 9.68                    | 41.70                   | 63.00         | -21.30       | QP       |         |         |
| 4   | 0.2153       | 23.50                    | 9.68                    | 33.18                   | 53.00         | -19.82       | AVG      |         |         |
| 5   | 0.5302       | 23.05                    | 9.70                    | 32.75                   | 56.00         | -23.25       | QP       |         |         |
| 6   | 0.5302       | 14.30                    | 9.70                    | 24.00                   | 46.00         | -22.00       | AVG      |         |         |
| 7   | 0.9285       | 17.09                    | 9.71                    | 26.80                   | 56.00         | -29.20       | QP       |         |         |
| 8   | 0.9285       | 8.60                     | 9.71                    | 18.31                   | 46.00         | -27.69       | AVG      |         |         |
| 9   | 1.2368       | 14.77                    | 9.73                    | 24.50                   | 56.00         | -31.50       | QP       |         |         |
| 10  | 1.2368       | 6.30                     | 9.73                    | 16.03                   | 46.00         | -29.97       | AVG      |         |         |
| 11  | 1.6238       | 10.80                    | 9.75                    | 20.55                   | 56.00         | -35.45       | QP       |         |         |
| 12  | 1.6238       | 5.20                     | 9.75                    | 14.95                   | 46.00         | -31.05       | AVG      |         |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                          |       |         |
|-----------|--------------------------|-------|---------|
| Test Mode | TX Mode_3Mbps Channel 00 | Phase | Neutral |
|-----------|--------------------------|-------|---------|

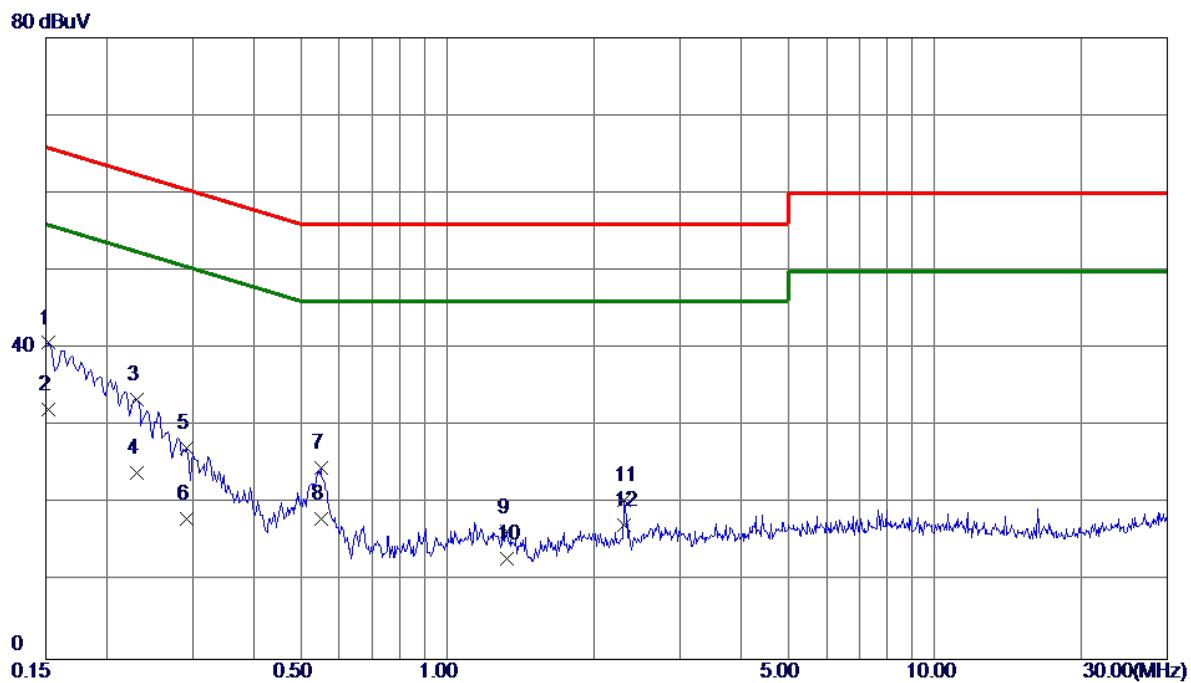


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin   |         |
|-----|--------------|--------------------------|-------------------|-------------------------|---------------|----------|---------|
|     |              |                          |                   |                         |               | Detector | Comment |
| 1   | 0. 1522      | 31. 06                   | 9. 66             | 40. 72                  | 65. 88        | -25. 16  | QP      |
| 2 * | 0. 1522      | 22. 50                   | 9. 66             | 32. 16                  | 55. 88        | -23. 72  | AVG     |
| 3   | 0. 2310      | 23. 82                   | 9. 65             | 33. 47                  | 62. 41        | -28. 94  | QP      |
| 4   | 0. 2310      | 14. 30                   | 9. 65             | 23. 95                  | 52. 41        | -28. 46  | AVG     |
| 5   | 0. 2917      | 17. 47                   | 9. 66             | 27. 13                  | 60. 48        | -33. 35  | QP      |
| 6   | 0. 2917      | 8. 40                    | 9. 66             | 18. 06                  | 50. 48        | -32. 42  | AVG     |
| 7   | 0. 5503      | 14. 91                   | 9. 66             | 24. 57                  | 56. 00        | -31. 43  | QP      |
| 8   | 0. 5503      | 8. 40                    | 9. 66             | 18. 06                  | 46. 00        | -27. 94  | AVG     |
| 9   | 1. 3245      | 6. 69                    | 9. 71             | 16. 40                  | 56. 00        | -39. 60  | QP      |
| 10  | 1. 3245      | 3. 20                    | 9. 71             | 12. 91                  | 46. 00        | -33. 09  | AVG     |
| 11  | 2. 3100      | 10. 75                   | 9. 74             | 20. 49                  | 56. 00        | -35. 51  | QP      |
| 12  | 2. 3100      | 7. 51                    | 9. 74             | 17. 25                  | 46. 00        | -28. 75  | AVG     |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

|           |                          |              |        |
|-----------|--------------------------|--------------|--------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Ant 0° |
|-----------|--------------------------|--------------|--------|

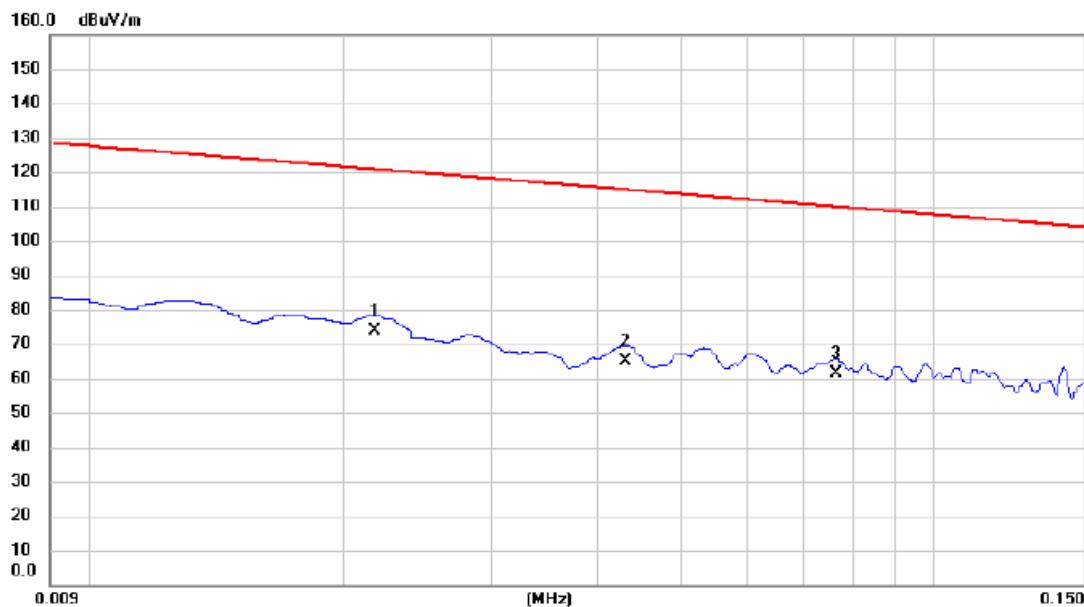


| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit  | Margin | Detector | Comment |
|-----|-----|--------|---------|---------|----------|--------|--------|----------|---------|
|     |     |        | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz    | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   | *   | 0.0218 | 53.64   | 20.25   | 73.89    | 120.84 | -46.95 | AVG      |         |
| 2   |     | 0.0431 | 45.25   | 19.80   | 65.05    | 114.92 | -49.87 | AVG      |         |
| 3   |     | 0.0765 | 41.69   | 19.89   | 61.58    | 109.93 | -48.35 | AVG      |         |

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |        |
|-----------|--------------------------|--------------|--------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Ant 0° |
|-----------|--------------------------|--------------|--------|

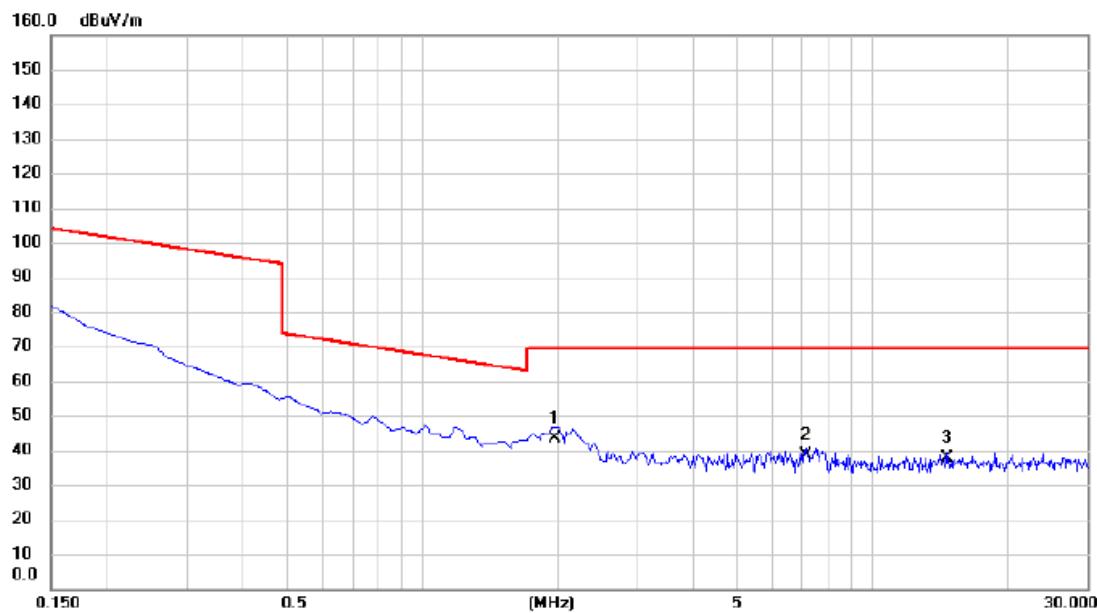


| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measure-<br>ment | Limit | Margin   |         |
|-----|-----|---------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   | *   | 1.9708  | 23.56         | 19.79          | 43.35            | 69.54 | -26.19   | QP      |
| 2   |     | 7.1350  | 18.69         | 20.03          | 38.72            | 69.54 | -30.82   | QP      |
| 3   |     | 14.6720 | 17.62         | 20.29          | 37.91            | 69.54 | -31.63   | QP      |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |         |
|-----------|--------------------------|--------------|---------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Ant 90° |
|-----------|--------------------------|--------------|---------|

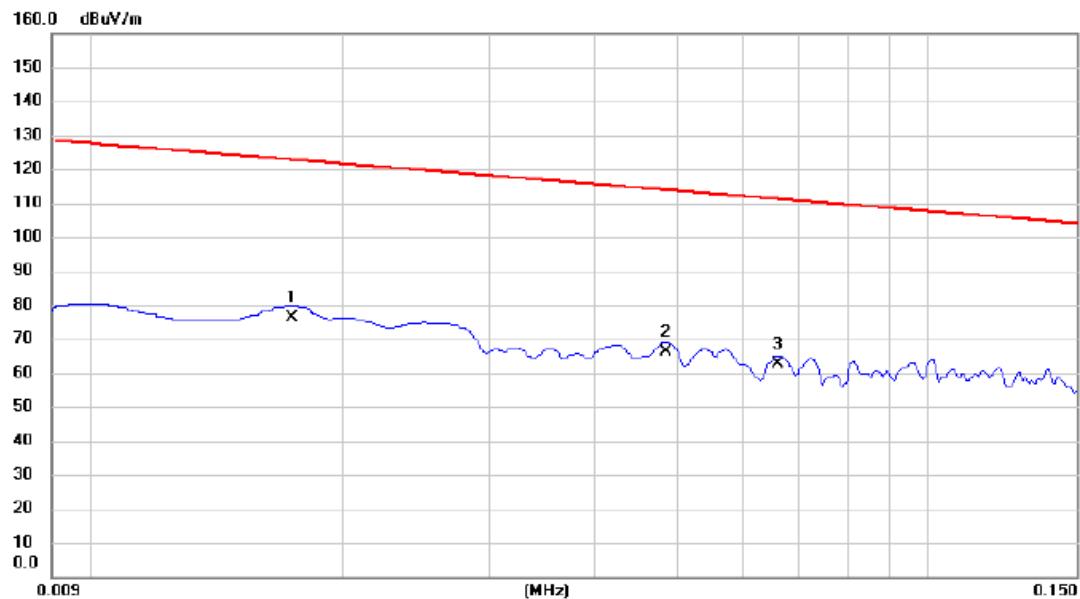


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin   |         |
|-----|-----|--------|---------------|----------------|-------------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dB     | Detector | Comment |
| 1   | *   | 0.0174 | 55.68         | 20.49          | 76.17       | 122.79 | -46.62   | AVG     |
| 2   |     | 0.0485 | 46.48         | 19.80          | 66.28       | 113.89 | -47.61   | AVG     |
| 3   |     | 0.0662 | 42.69         | 19.85          | 62.54       | 111.19 | -48.65   | AVG     |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |         |
|-----------|--------------------------|--------------|---------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Ant 90° |
|-----------|--------------------------|--------------|---------|

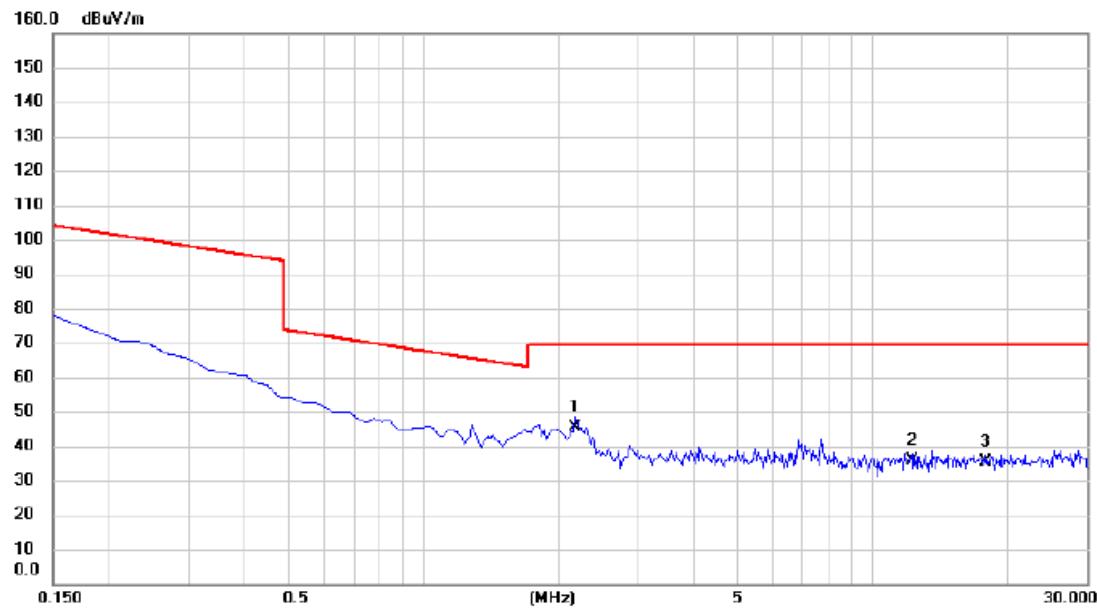


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2.1798       | 25.68                    | 19.81                   | 45.49                      | 69.54           | -24.05       | QP       |         |
| 2   |     | 12.2393      | 15.64                    | 20.23                   | 35.87                      | 69.54           | -33.67       | QP       |         |
| 3   |     | 17.8511      | 14.84                    | 20.48                   | 35.32                      | 69.54           | -34.22       | QP       |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

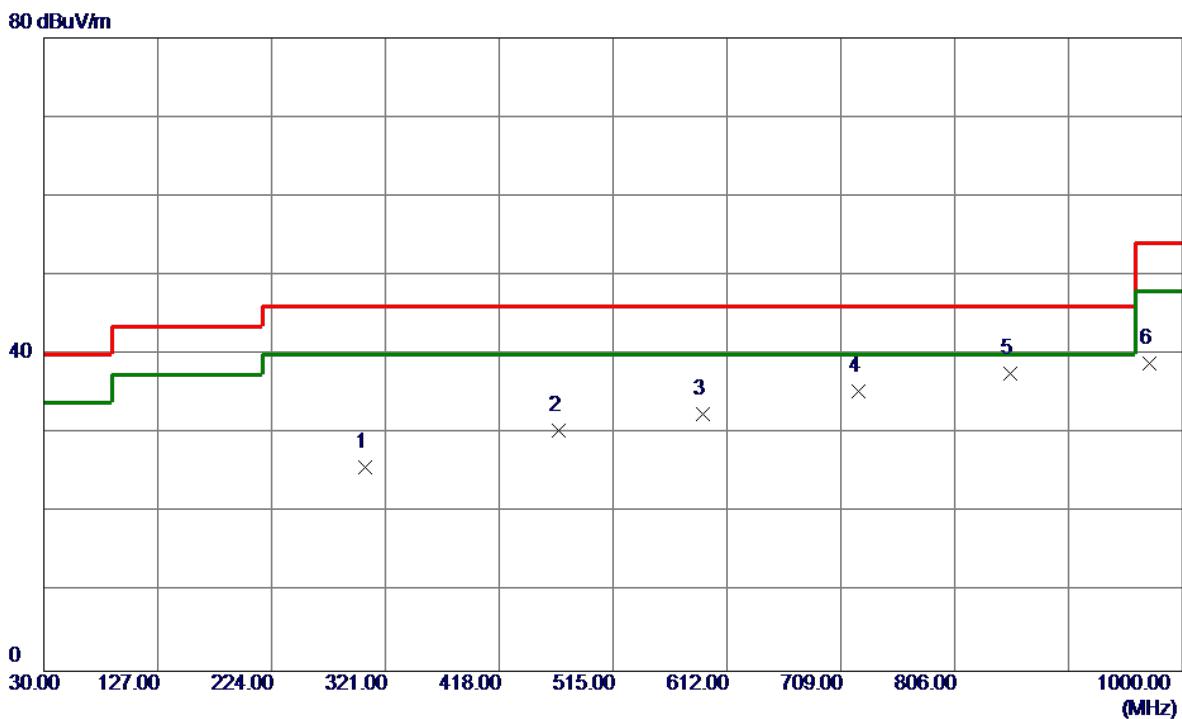


| No. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |          |               |                |             | MHz   | dBuV/m |          |         |
| 1   | 303.5400 | 36.25         | -10.52         | 25.73       | 46.00 | -20.27 | Peak     |         |
| 2   | 468.4400 | 36.82         | -6.48          | 30.34       | 46.00 | -15.66 | Peak     |         |
| 3   | 591.1450 | 36.30         | -3.76          | 32.54       | 46.00 | -13.46 | Peak     |         |
| 4   | 724.5200 | 37.37         | -1.97          | 35.40       | 46.00 | -10.60 | Peak     |         |
| 5 * | 853.0450 | 37.77         | -0.18          | 37.59       | 46.00 | -8.41  | Peak     |         |
| 6   | 972.3550 | 38.18         | 0.64           | 38.82       | 54.00 | -15.18 | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX Mode_3Mbps Channel 00 | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

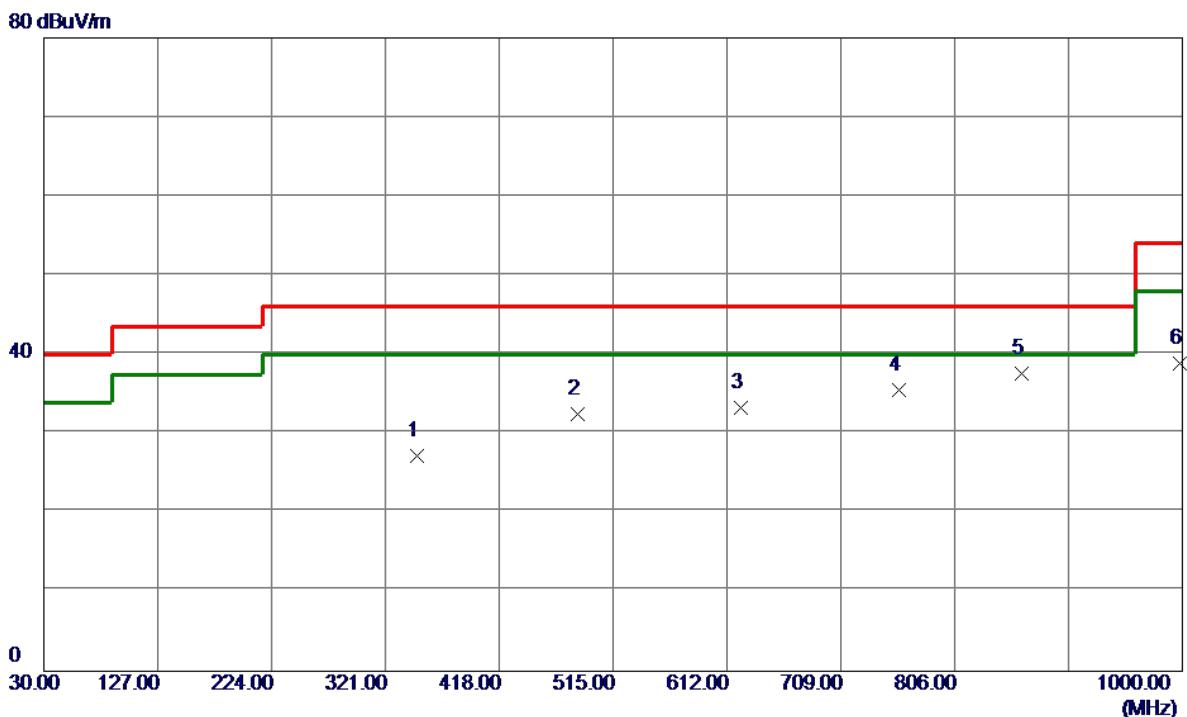


| No. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |          |               |                |             | dBuV/m | dB     |          |         |
| 1   | 348.1600 | 36.77         | -9.62          | 27.15       | 46.00  | -18.85 | Peak     |         |
| 2   | 484.4450 | 38.63         | -6.22          | 32.41       | 46.00  | -13.59 | Peak     |         |
| 3   | 623.6400 | 36.69         | -3.36          | 33.33       | 46.00  | -12.67 | Peak     |         |
| 4   | 758.4699 | 37.10         | -1.56          | 35.54       | 46.00  | -10.46 | Peak     |         |
| 5 * | 862.7450 | 37.76         | -0.18          | 37.58       | 46.00  | -8.42  | Peak     |         |
| 6   | 998.0600 | 37.92         | 1.02           | 38.94       | 54.00  | -15.06 | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

|           |                         |              |          |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

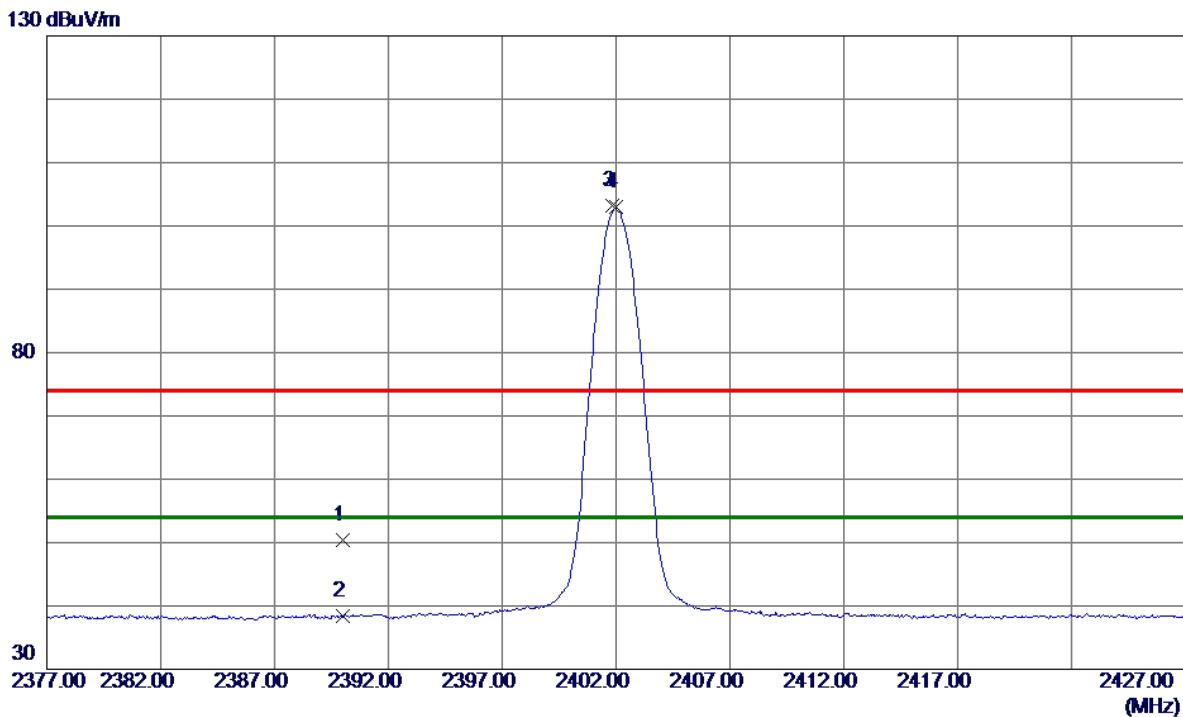


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment  |
|-----|-----------|---------------|----------------|-------------|-------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dB    |        |          |          |
| 1   | 2390.0000 | 44.19         | 6.17           | 50.36       | 74.00 | -23.64 | Peak     |          |
| 2   | 2390.0000 | 32.20         | 6.17           | 38.37       | 54.00 | -15.63 | AVG      |          |
| 3   | 2401.8500 | 97.00         | 6.18           | 103.18      | 74.00 | 29.18  | Peak     | No Limit |
| 4 * | 2402.0250 | 96.72         | 6.18           | 102.90      | 54.00 | 48.90  | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2402 MHz _CH00_1Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|

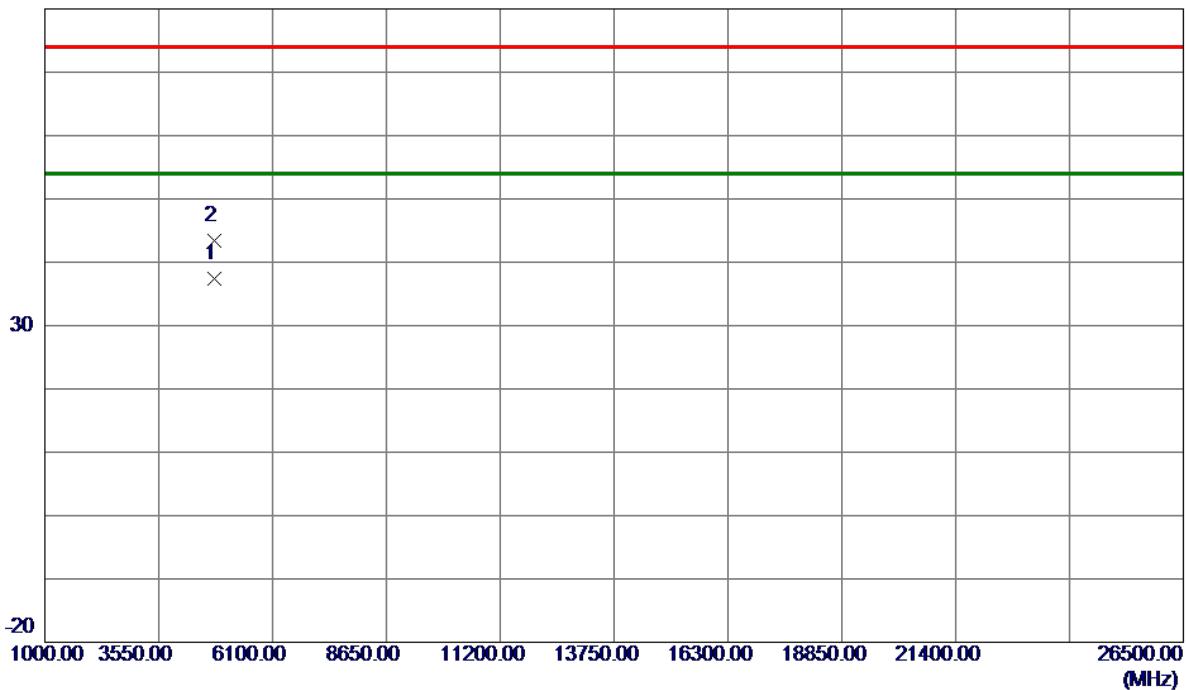**80 dBuV/m**

| No. | Freq.     | Reading | Correct | Measure | Limit  | Margin | Detector | Comment |
|-----|-----------|---------|---------|---------|--------|--------|----------|---------|
|     |           | Level   | Factor  | dBuV/m  | dBuV/m | dB     |          |         |
| 1 * | 4804.0099 | 36.55   | 0.90    | 37.45   | 54.00  | -16.55 | AVG      |         |
| 2   | 4804.0800 | 42.47   | 0.90    | 43.37   | 74.00  | -30.63 | Peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2441 MHz _CH39_1Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|




| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |         |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
|     |              |                            |                         |                           |                 |              | Detector | Comment |
| 1   | 4881.8800    | 41.32                      | 1.10                    | 42.42                     | 74.00           | -31.58       | Peak     |         |
| 2 * | 4882.1400    | 33.35                      | 1.10                    | 34.45                     | 54.00           | -19.55       | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |          |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

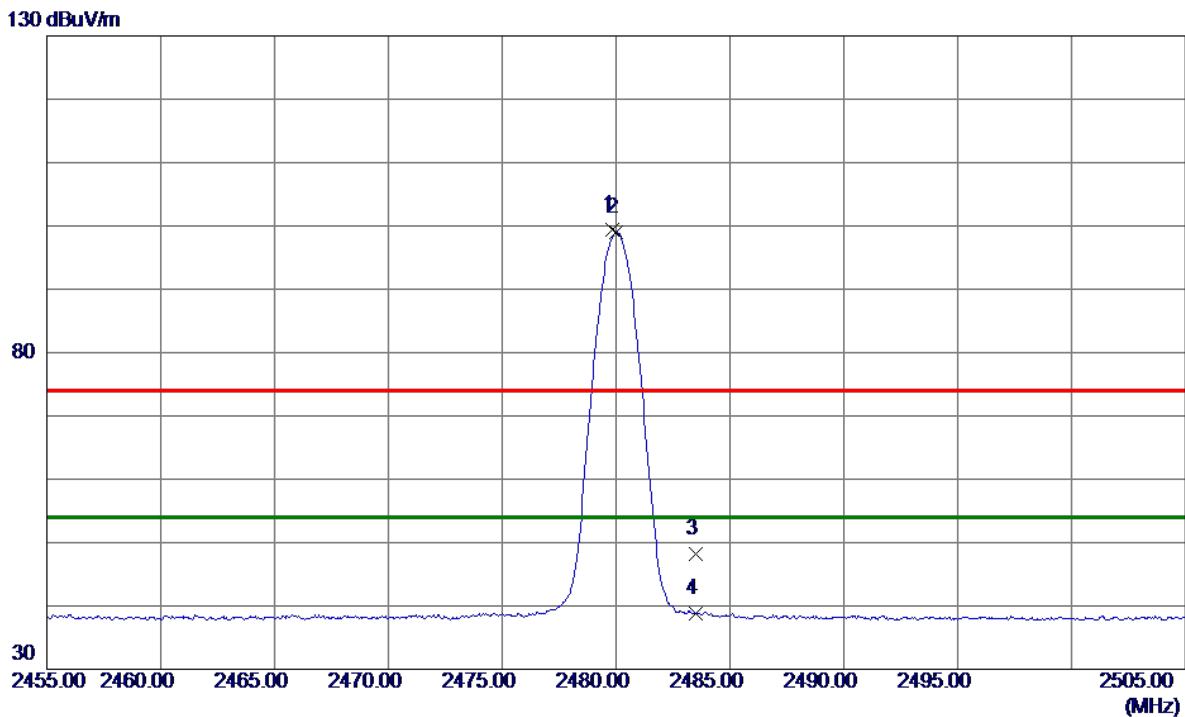


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment  |
|-----|-----------|---------------|----------------|-------------|-------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dB    |        |          |          |
| 1   | 2479.8500 | 93.20         | 6.23           | 99.43       | 74.00 | 25.43  | Peak     | No Limit |
| 2 * | 2480.0000 | 92.78         | 6.23           | 99.01       | 54.00 | 45.01  | AVG      | No Limit |
| 3   | 2483.5000 | 41.90         | 6.23           | 48.13       | 74.00 | -25.87 | Peak     |          |
| 4   | 2483.5000 | 32.65         | 6.23           | 38.88       | 54.00 | -15.12 | AVG      |          |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2480 MHz _CH78_1Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|

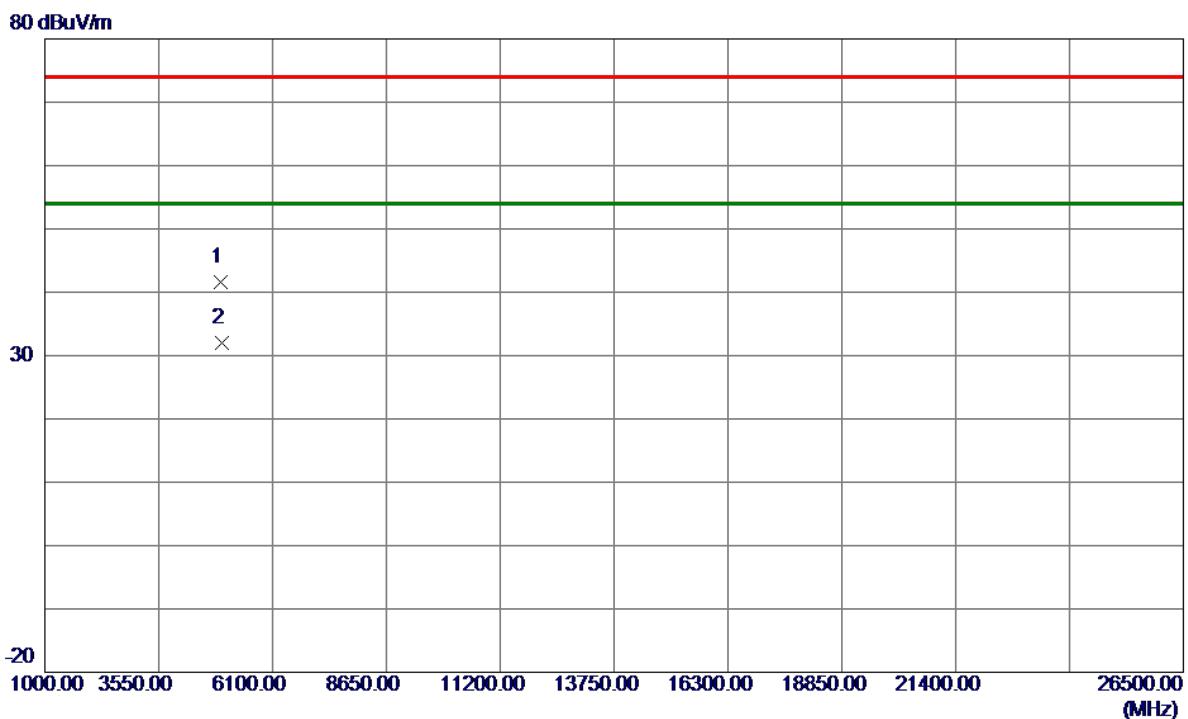


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |         |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
|     |              |                            |                         |                           |                 |              | Detector | Comment |
| 1   | 4950.4600    | 40.41                      | 1.27                    | 41.68                     | 74.00           | -32.32       | Peak     |         |
| 2 * | 4959.9500    | 30.76                      | 1.30                    | 32.06                     | 54.00           | -21.94       | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |          |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

130 dBuV/m

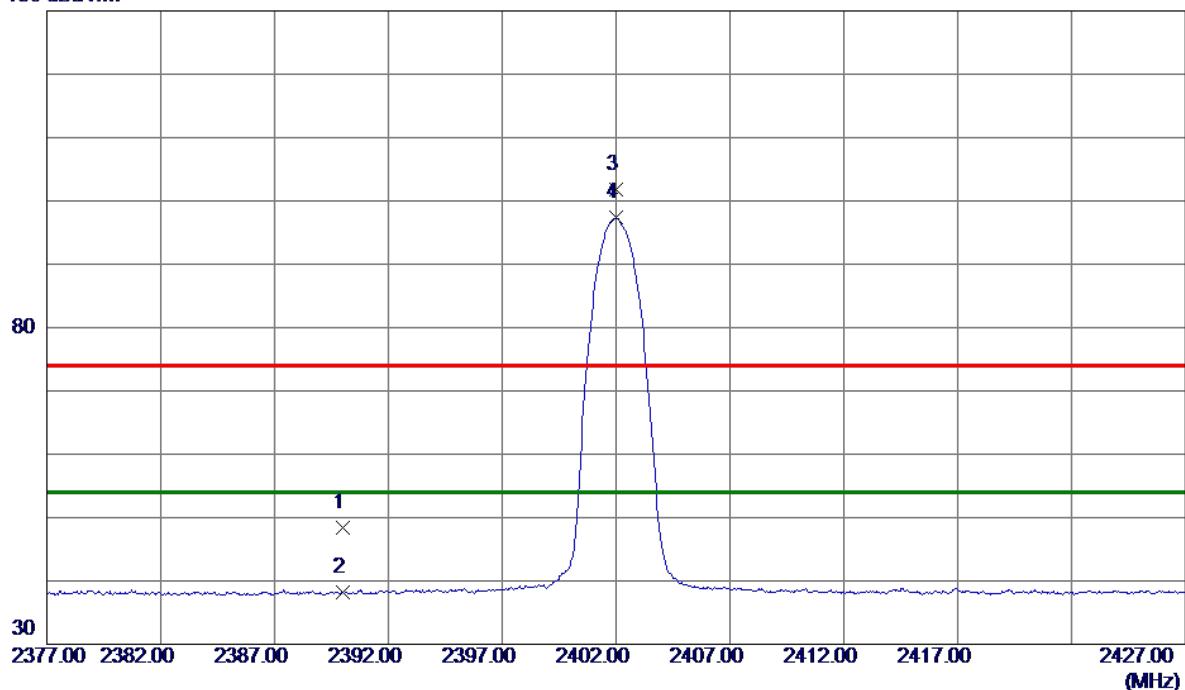

| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment  |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |          |
| 1   | 2390.0000 | 42.20         | 6.17           | 48.37       | 74.00  | -25.63 | Peak     |          |
| 2   | 2390.0000 | 32.00         | 6.17           | 38.17       | 54.00  | -15.83 | AVG      |          |
| 3   | 2401.9750 | 95.58         | 6.18           | 101.76      | 74.00  | 27.76  | Peak     | No Limit |
| 4 * | 2401.9750 | 91.13         | 6.18           | 97.31       | 54.00  | 43.31  | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2402 MHz _CH00_3Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|



| No. | Freq.     | Reading | Correct | Measure | Limit | Margin | Detector | Comment |
|-----|-----------|---------|---------|---------|-------|--------|----------|---------|
|     |           | Level   | Factor  | ment    |       |        |          |         |
|     | MHz       | dBuV/m  | dB      | dBuV/m  | dB    |        |          |         |
| 1   | 4803.7400 | 42.60   | 0.90    | 43.50   | 74.00 | -30.50 | Peak     |         |
| 2 * | 4804.1650 | 34.56   | 0.90    | 35.46   | 54.00 | -18.54 | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2441 MHz _CH39_3Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|




| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |         |
|-----|--------------|----------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
|     |              |                            |                         |                            |                 |              | Detector | Comment |
| 1   | 4881.8650    | 42.14                      | 1.10                    | 43.24                      | 74.00           | -30.76       | Peak     |         |
| 2 * | 4882.0550    | 33.15                      | 1.10                    | 34.25                      | 54.00           | -19.75       | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |          |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

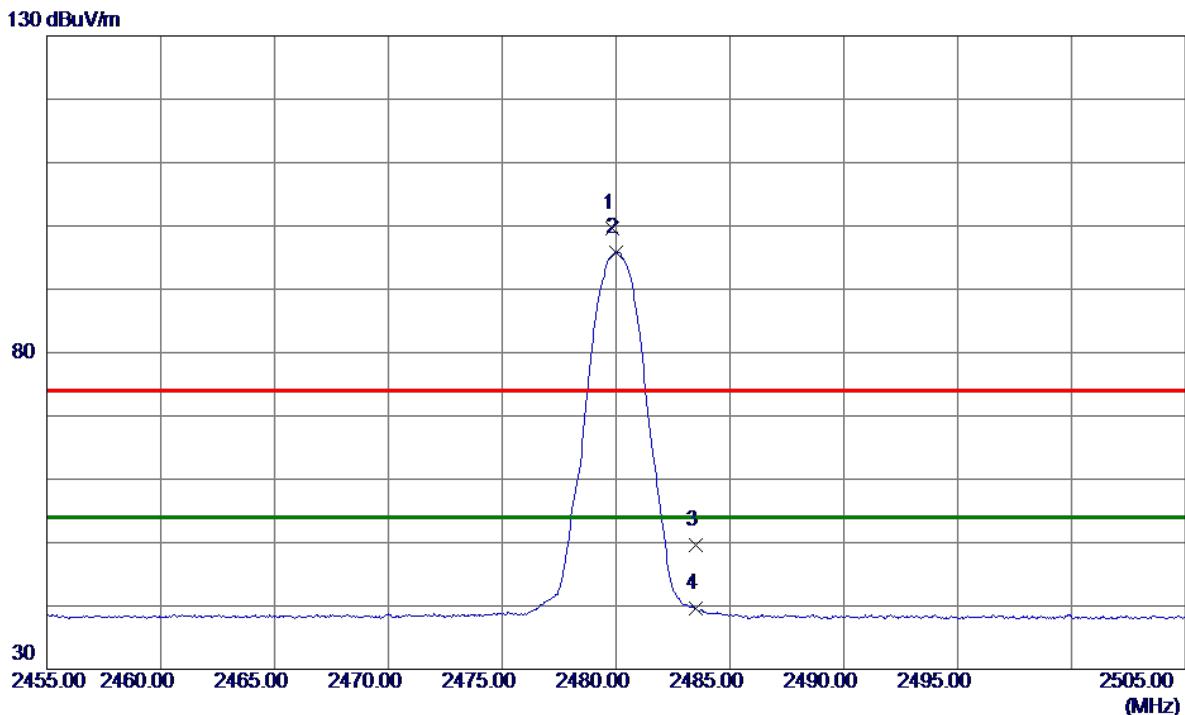

| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment  |
|-----|-----------|---------------|----------------|-------------|-------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dB    |        |          |          |
| 1   | 2479.8500 | 93.43         | 6.23           | 99.66       | 74.00 | 25.66  | Peak     | No Limit |
| 2 * | 2480.0250 | 89.65         | 6.23           | 95.88       | 54.00 | 41.88  | AVG      | No Limit |
| 3   | 2483.5000 | 43.42         | 6.23           | 49.65       | 74.00 | -24.35 | Peak     |          |
| 4   | 2483.5000 | 33.36         | 6.23           | 39.59       | 54.00 | -14.41 | AVG      |          |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                         |              |            |
|-----------|-------------------------|--------------|------------|
| Test Mode | TX 2480 MHz _CH78_3Mbps | Polarization | Horizontal |
|-----------|-------------------------|--------------|------------|



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |         |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
|     |              |                            |                         |                           |                 |              | Detector | Comment |
| 1 * | 4959.9150    | 31.78                      | 1.30                    | 33.08                     | 54.00           | -20.92       | AVG      |         |
| 2   | 4960.1050    | 40.64                      | 1.30                    | 41.94                     | 74.00           | -32.06       | Peak     |         |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - NUMBER OF HOPPING FREQUENCY

|            |               |
|------------|---------------|
| Test Mode: | TX Mode_1Mbps |
|------------|---------------|


| Test Mode                   | Hopping Mode_1Mbps | Limit | Test Result |
|-----------------------------|--------------------|-------|-------------|
| Number of Hopping Frequency | 79                 | 15    | Pass        |

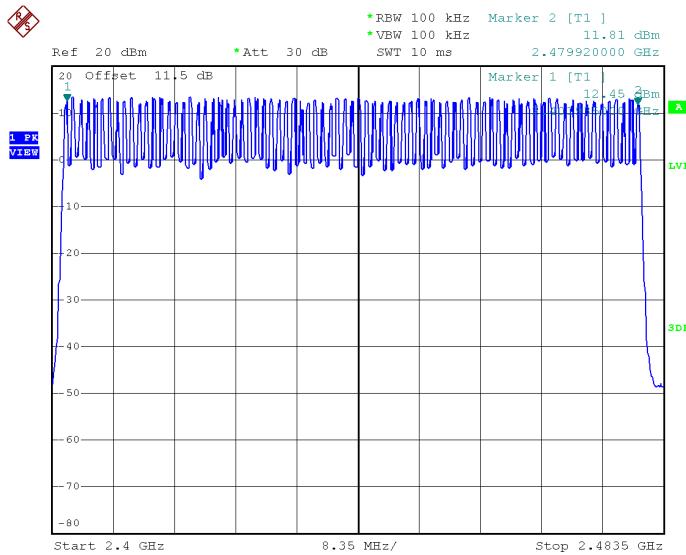

Date: 6.FEB.2024 11:47:54

|            |               |
|------------|---------------|
| Test Mode: | TX Mode_3Mbps |
|------------|---------------|

| Test Mode                   | Hopping Mode_3Mbps | Limit | Test Result |
|-----------------------------|--------------------|-------|-------------|
| Number of Hopping Frequency | 79                 | 15    | Pass        |



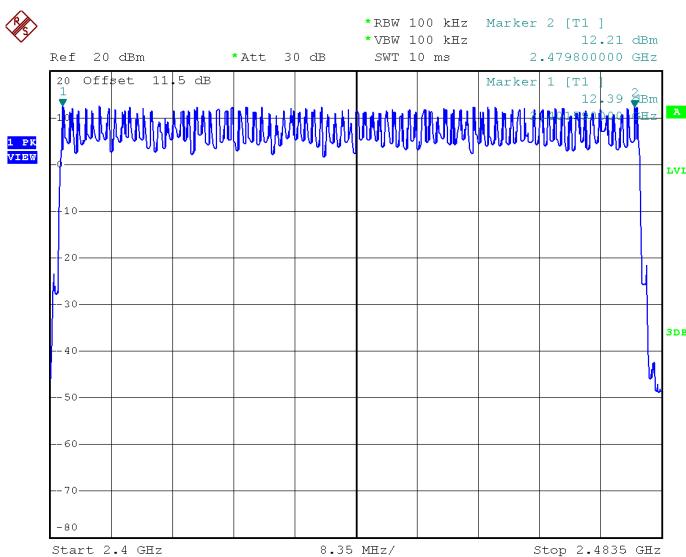


Date: 6.FEB.2024 12:08:12


## APPENDIX F - AVERAGE TIME OF OCCUPANCY

|           |                    |
|-----------|--------------------|
| Test Mode | Hopping Mode_1Mbps |
|-----------|--------------------|


| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| DH1         | 2402            | 0.3800              | 0.1216         | 0.4000     | Pass        |
| DH3         | 2402            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH5         | 2402            | 2.9200              | 0.3115         | 0.4000     | Pass        |
| DH1         | 2441            | 0.3800              | 0.1216         | 0.4000     | Pass        |
| DH3         | 2441            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH5         | 2441            | 2.8800              | 0.3072         | 0.4000     | Pass        |
| DH1         | 2480            | 0.3800              | 0.1216         | 0.4000     | Pass        |
| DH3         | 2480            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH5         | 2480            | 2.8800              | 0.3072         | 0.4000     | Pass        |

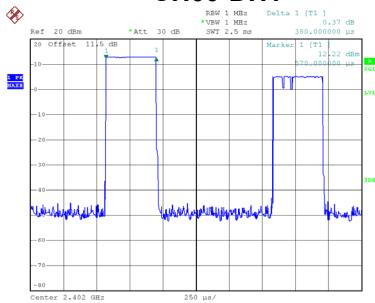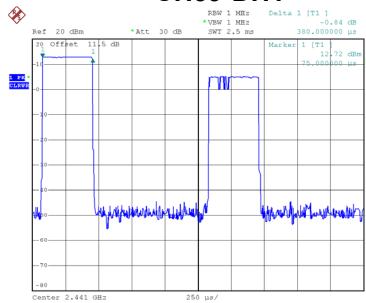**CH00-DH1**

**CH39-DH1**

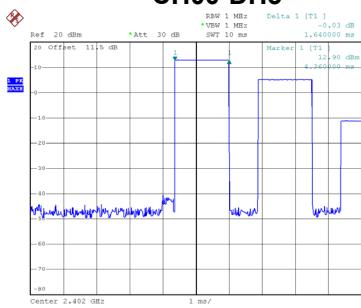**CH78-DH1**



Date: 6.FEB.2024 11:40:36

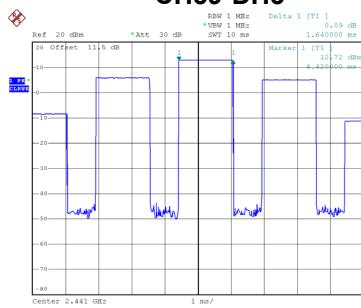**CH00-DH3**


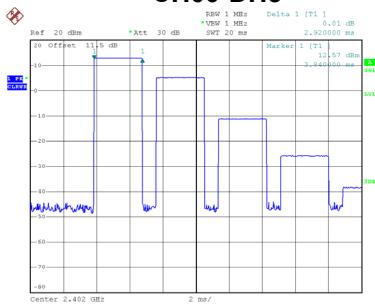
Date: 6.FEB.2024 11:41:37

**CH39-DH3**


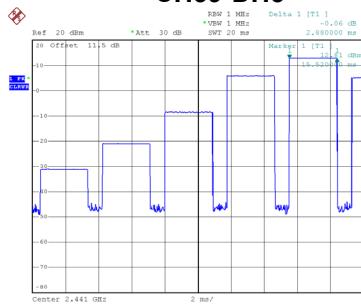
Date: 6.FEB.2024 11:42:35

**CH78-DH3**



Date: 6.FEB.2024 11:50:07

**CH00-DH5**


Date: 6.FEB.2024 11:50:14

**CH39-DH5**


Date: 6.FEB.2024 11:52:23

**CH78-DH5**


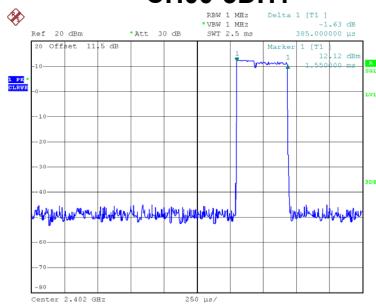
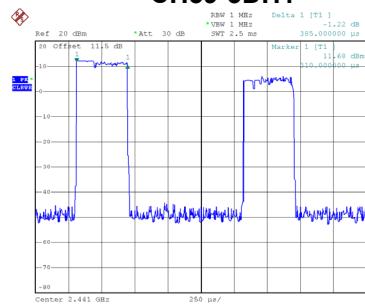

Date: 6.FEB.2024 11:52:47

Date: 6.FEB.2024 11:54:40


Date: 6.FEB.2024 11:53:57

|           |                    |
|-----------|--------------------|
| Test Mode | Hopping Mode_3Mbps |
|-----------|--------------------|


| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| 3DH1        | 2402            | 0.3850              | 0.1232         | 0.4000     | Pass        |
| 3DH3        | 2402            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| 3DH5        | 2402            | 2.9200              | 0.3115         | 0.4000     | Pass        |
| 3DH1        | 2441            | 0.3850              | 0.1232         | 0.4000     | Pass        |
| 3DH3        | 2441            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| 3DH5        | 2441            | 2.8800              | 0.3072         | 0.4000     | Pass        |
| 3DH1        | 2480            | 0.3850              | 0.1232         | 0.4000     | Pass        |
| 3DH3        | 2480            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| 3DH5        | 2480            | 2.9200              | 0.3115         | 0.4000     | Pass        |

**CH00-3DH1**

**CH39-3DH1**

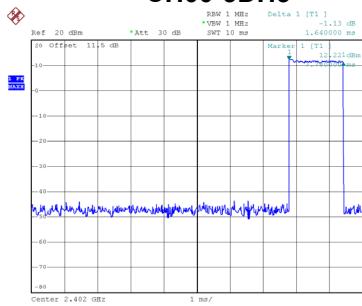**CH78-3DH1**



Date: 6.FEB.2024 12:02:04

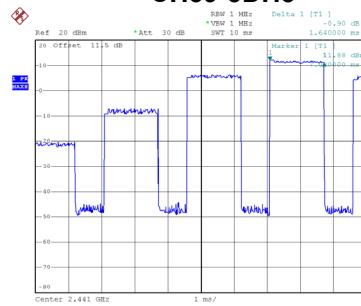**CH00-3DH3**


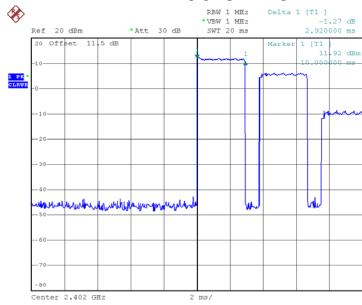
Date: 6.FEB.2024 12:01:43

**CH39-3DH3**


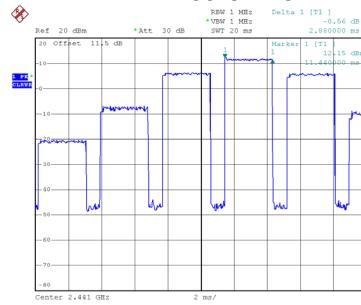
Date: 6.FEB.2024 12:02:49

**CH78-3DH3**



Date: 6.FEB.2024 12:10:23

**CH00-3DH5**


Date: 6.FEB.2024 12:13:16

**CH39-3DH5**


Date: 6.FEB.2024 12:11:16

**CH78-3DH5**


Date: 6.FEB.2024 12:14:03

Date: 6.FEB.2024 12:14:26

Date: 6.FEB.2024 12:16:57

## APPENDIX G - HOPPING CHANNEL SEPARATION

|           |                    |
|-----------|--------------------|
| Test Mode | Hopping Mode_1Mbps |
|-----------|--------------------|

| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00      | 2402            | 1.002                    | 0.672                        | Pass        |
| 39      | 2441            | 0.879                    | 0.641                        | Pass        |
| 78      | 2480            | 0.917                    | 0.640                        | Pass        |




Date: 6.FEB.2024 11:43:41

Date: 6.FEB.2024 11:44:52

Date: 6.FEB.2024 11:46:03

|           |                    |
|-----------|--------------------|
| Test Mode | Hopping Mode_3Mbps |
|-----------|--------------------|

| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00      | 2402            | 1.017                    | 0.873                        | Pass        |
| 39      | 2441            | 1.010                    | 0.864                        | Pass        |
| 78      | 2480            | 0.830                    | 0.851                        | -           |

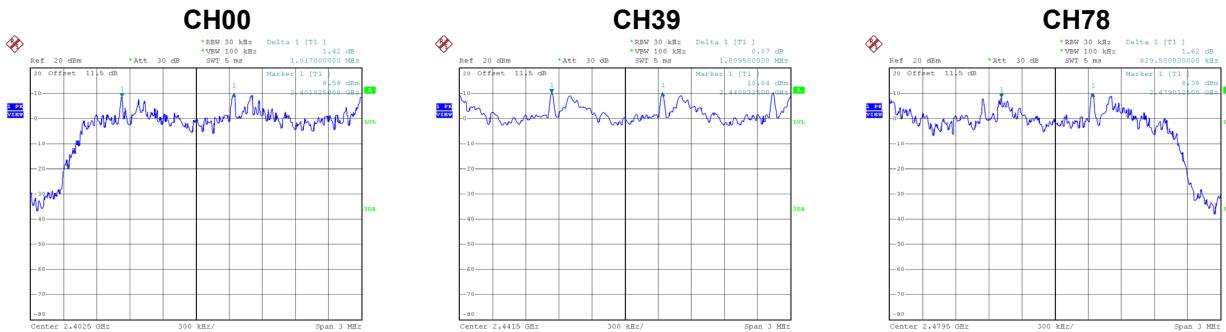

Date: 6.FEB.2024 12:04:00

Date: 6.FEB.2024 12:05:11

Date: 6.FEB.2024 12:06:21

## APPENDIX H - BANDWIDTH

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _1Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00      | 2402            | 1.008                 | 0.888                         |
| 39      | 2441            | 0.962                 | 0.880                         |
| 78      | 2480            | 0.960                 | 0.888                         |



|           |                |
|-----------|----------------|
| Test Mode | TX Mode _3Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00      | 2402            | 1.310                 | 1.212                         |
| 39      | 2441            | 1.296                 | 1.184                         |
| 78      | 2480            | 1.276                 | 1.180                         |



## APPENDIX I - MAXIMUM OUTPUT POWER

**For Left Earphone:**

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _1Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 11.28              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 11.17              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 11.08              | 20.97            | 0.1250         | Pass        |



Date: 6.FEB.2024 12:38:58

Date: 6.FEB.2024 12:39:38

Date: 6.FEB.2024 12:39:51

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _2Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 11.66              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 11.60              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 11.53              | 20.97            | 0.1250         | Pass        |





Date: 6.FEB.2024 12:41:34

Date: 6.FEB.2024 12:41:43

Date: 6.FEB.2024 12:41:53

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _3Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 11.96              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 11.89              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 11.80              | 20.97            | 0.1250         | Pass        |

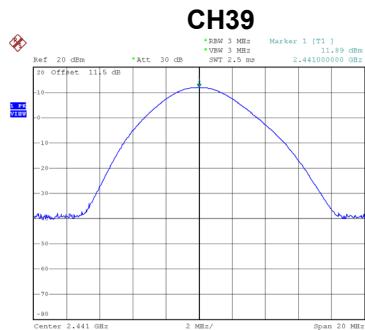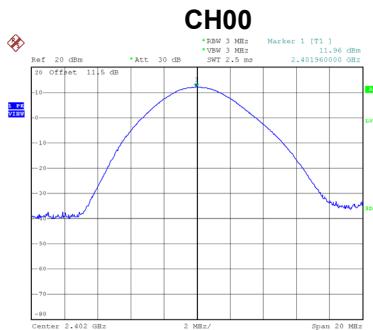

Date: 6.FEB.2024 12:40:40

Date: 6.FEB.2024 12:40:54

Date: 6.FEB.2024 12:41:07

**For Right Earphone:**

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _1Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 11.79              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 11.74              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 11.64              | 20.97            | 0.1250         | Pass        |



Date: 6.FEB.2024 12:37:09

Date: 6.FEB.2024 12:37:24

Date: 6.FEB.2024 12:37:37

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _2Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 12.01              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 11.92              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 11.83              | 20.97            | 0.1250         | Pass        |




Date: 6.FEB.2024 12:17:56

Date: 6.FEB.2024 12:18:29

Date: 6.FEB.2024 12:18:40

|           |                |
|-----------|----------------|
| Test Mode | TX Mode _3Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00      | 2402            | 12.29              | 20.97            | 0.1250         | Pass        |
| 39      | 2441            | 12.24              | 20.97            | 0.1250         | Pass        |
| 78      | 2480            | 12.14              | 20.97            | 0.1250         | Pass        |

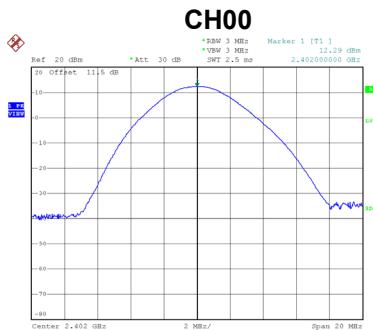


**APPENDIX J - CONDUCTED SPURIOUS EMISSION**


Test Mode

TX Mode \_1Mbps

### Bandedge CH00 (Lower)

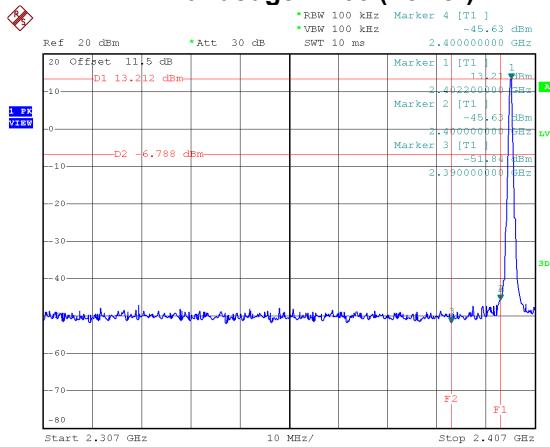


### Bandedge CH78 (Upper)

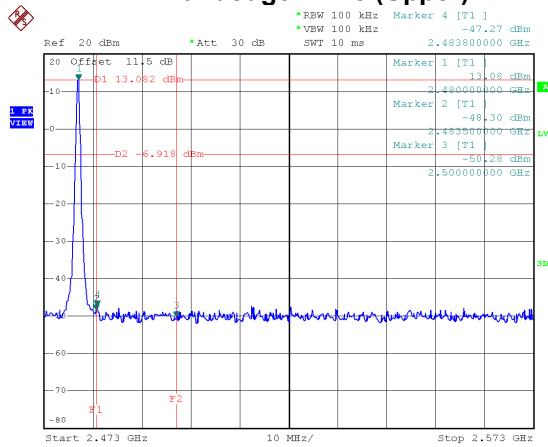


Date: 6.FEB.2024 11:33:54

Date: 6.FEB.2024 11:38:59

### Hopping on mode (Lower)

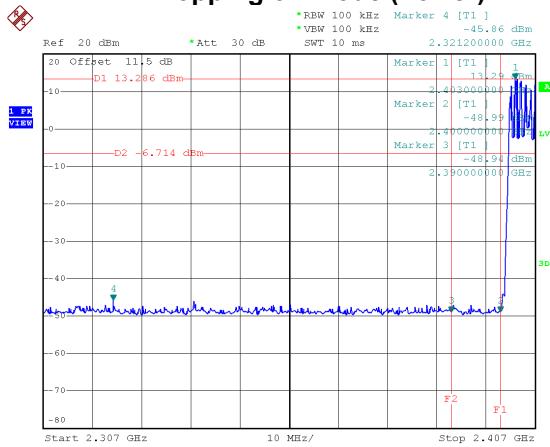


### Hopping on mode (Upper)

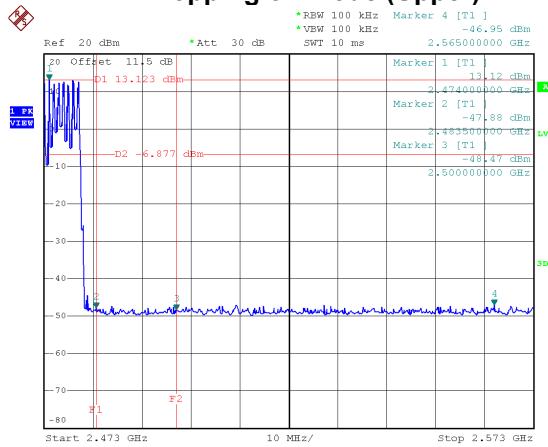

Date: 6.FEB.2024 11:48:29

Date: 6.FEB.2024 11:49:46

### CH00 – 10th Harmonic of the fundamental frequency

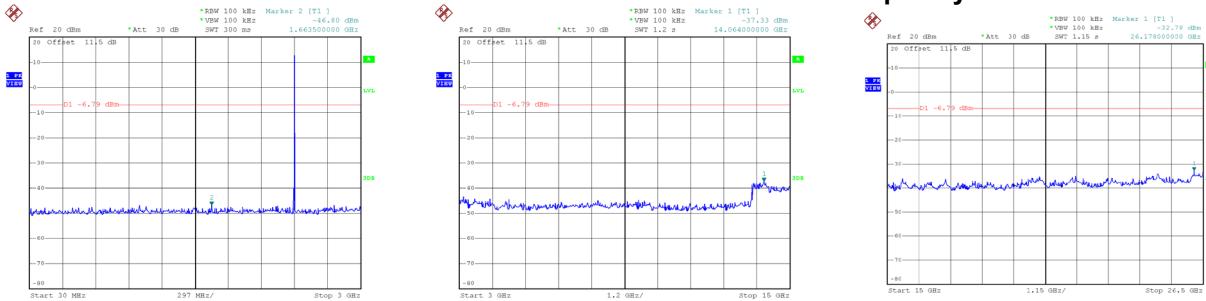


Date: 6.FEB.2024 11:34:47

Date: 6.FEB.2024 11:34:56

Date: 6.FEB.2024 11:35:05

### CH39 – 10th Harmonic of the fundamental frequency

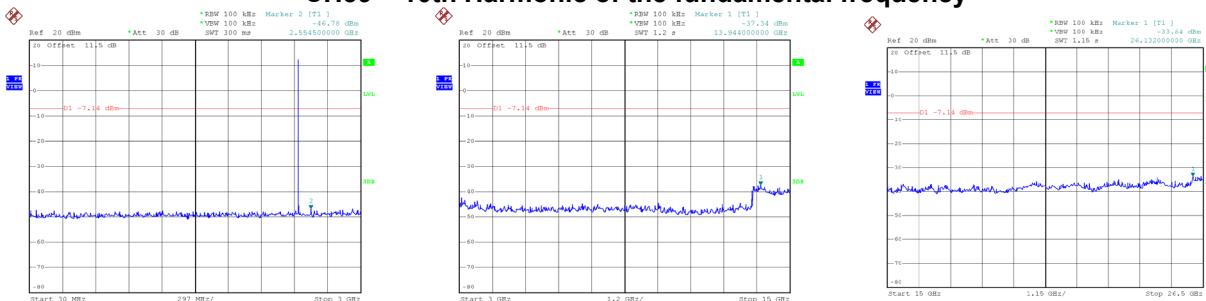


Date: 6.FEB.2024 11:36:57

Date: 6.FEB.2024 11:37:05

Date: 6.FEB.2024 11:37:14

### CH78 – 10th Harmonic of the fundamental frequency

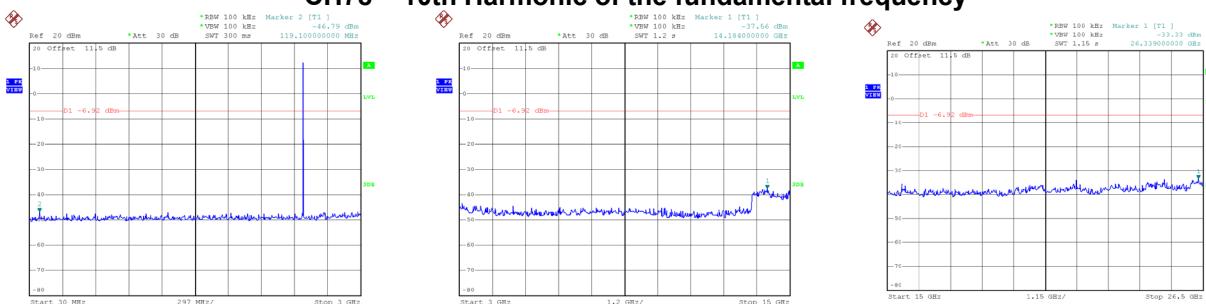

Date: 6.FEB.2024 11:39:53


Date: 6.FEB.2024 11:40:02

Date: 6.FEB.2024 11:40:11

Test Mode

TX Mode \_3Mbps

### Bandedge CH00 (Lower)

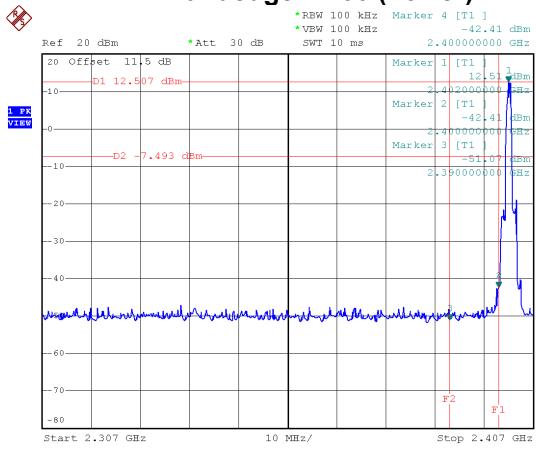


Start 2.307 GHz

10 MHz/

Stop 2.407 GHz

### Bandedge CH78 (Upper)

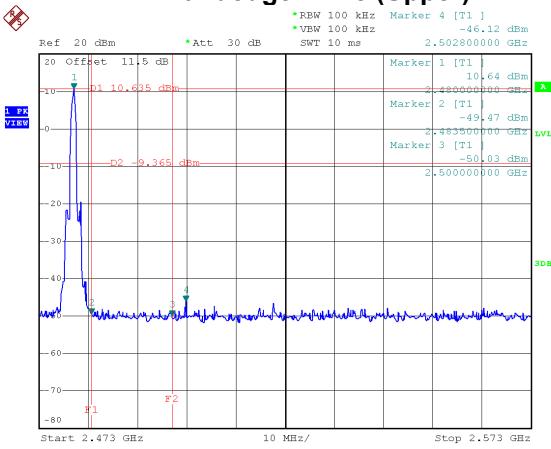

Start 2.473 GHz


10 MHz/

Stop 2.573 GHz

Date: 6.FEB.2024 11:56:01

Date: 6.FEB.2024 11:59:59

### Hopping on mode (Lower)

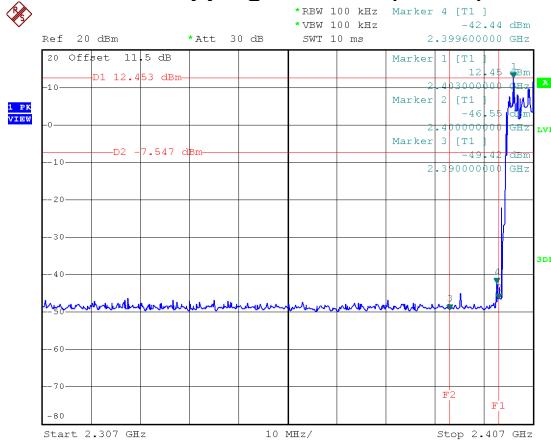


Start 2.307 GHz

10 MHz/

Stop 2.407 GHz

Date: 6.FEB.2024 12:09:27

### Hopping on mode (Upper)

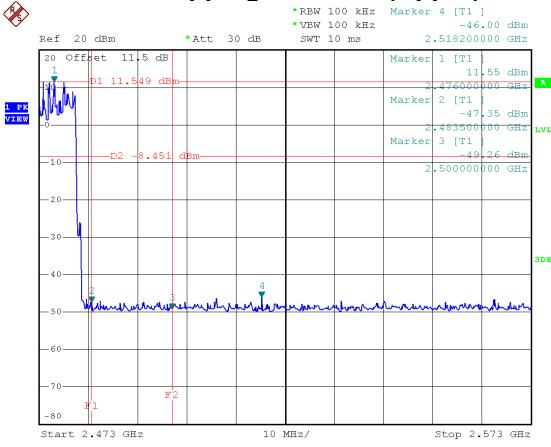




Start 2.473 GHz

10 MHz/




Stop 2.573 GHz

Date: 6.FEB.2024 12:10:02




### CH00 – 10th Harmonic of the fundamental frequency

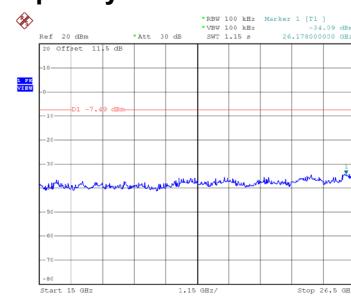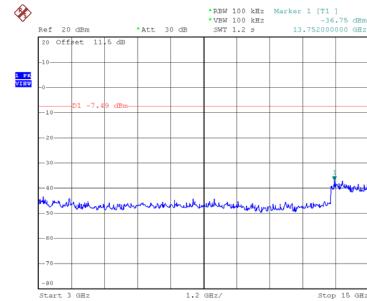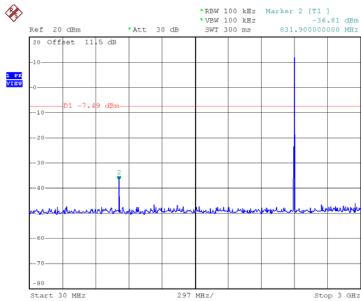

### CH39 – 10th Harmonic of the fundamental frequency

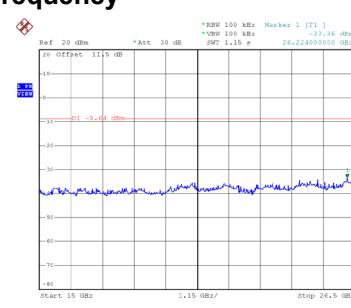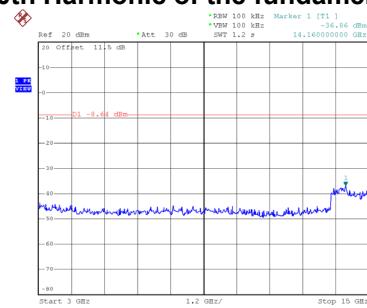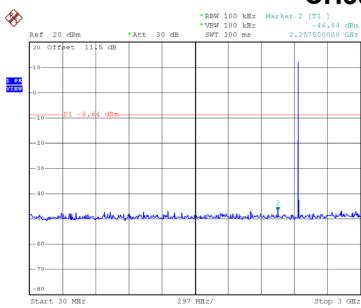

### CH78 – 10th Harmonic of the fundamental frequency

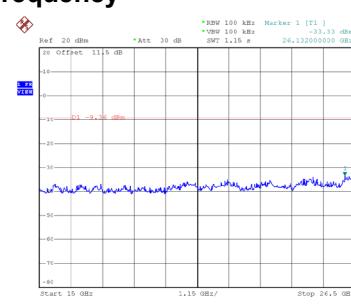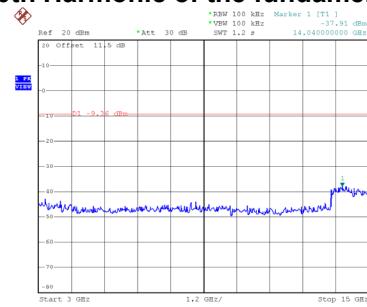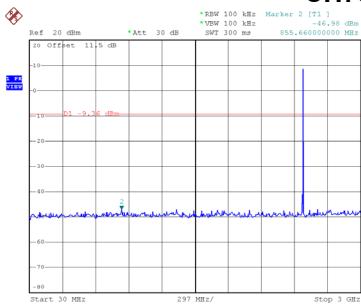

## APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE

**1. Output power and channel separation of a Bluetooth device in the different operating modes:**

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

**2. Frequency range of a Bluetooth device:**

Hereby we declare that the maximum frequency of this device is: 2402 - 2480MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

**3. Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:**

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

**4. Example of a hopping sequence in data mode:**

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

**5. Equally average use of frequencies in data mode and behaviour for short transmissions:**

The generation of the hopping sequence in connection mode depends essentially on two input values:

- a) LAP/UAP of the master of the connection.
- b) Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 µs. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 µs). The hopping sequence will always differ from the first one.

**6. Receiver input bandwidth and behaviour for repeated single or multiple packets:**

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.