

MRT Technology (Suzhou) Co., Ltd

Phone: +86-512-66308358 +86-512-66308368 www.mrt-cert.com

Report No.: 1406RSU05101 Report Version: Issue Date: 08-11-2014

# **MEASUREMENT REPORT**

FCC PART 15.249

FCC ID: V2S-RFC01

APPLICANT: C-M GLO, LLC

Application Type: Certification

**Product:** 2.4g Wireless Remote

Model No.: GT-RFC01, GT-RFC01-A

FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): Part 15.249

Test Procedure(s): ANSI C63.10-2009

Test Date: August 08 ~ 11, 2014

(Robin Wu) Reviewed By

Approved By

( Marlin Chen )

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

FCC ID: V2S-RFC01 Page Number: 1 of 35



# **Revision History**

Report No.	Version	Description	Issue Date
1406RSU05101	Rev. 01	Initial report	08-11-2014

FCC ID: V2S-RFC01 Page Number: 2 of 35



# **CONTENTS**

De	scription	on	Page
1.	INTR	ODUCTION	6
	1.1.	Scope	6
	1.2.	MRT Test Location	6
2.	PRO	DUCT INFORMATION	7
	2.1.	Equipment Description	7
	2.2.	Channel List	8
	2.3.	Mode of Operation	9
	2.4.	Test Configuration	9
	2.5.	EMI Suppression Device(s)/Modifications	9
	2.6.	Labeling Requirements	9
	2.7.	Test Software	9
3.	DES	CRIPTION OF TEST	10
	3.1.	Evaluation Procedure	10
	3.2.	AC Line Conducted Emissions	10
	3.3.	Radiated Emissions	11
4.	ANT	ENNA REQUIREMENTS	12
5.	TEST	T EQUIPMENT CALIBRATION DATA	13
6.	MEA	SUREMENT UNCERTAINTY	14
7.	TEST	T RESULT	15
	7.1.	Summary	15
	7.2.	Conducted Emission	16
	7.2.1.	Test Limit	16
	7.2.2.	Test Setup	16
	7.2.3.	Test Result	16
	7.3.	Radiated Emission	17
	7.3.1.	Test Limit	17
	7.3.2.	Test Setup	18
	7.3.3.	Test Result	20
	7.4.	Band-edge Compliance of RF Conducted Emissions	32
	7.4.1.	Test Limit	32
	7.4.2.	Test Procedure	32
	7.4.3.	Test Setup	33
	7.4.4.	. Test Result	34





## §2.1033 General Information

Applicant:	C-M GLO, LLC	
Applicant Address:	1201 North 4th Street, Watertown, WI 53098, USA	
Manufacturer:	NINGBO YINZHOU JETECH ELECTRONICS CO., LTD	
Manufacturer Address:	3/F, B Dong, No 90, Lane 655, QiMing Road, NingBo, Zhejiang 315105,	
	China	
Test Site:	MRT Technology (Suzhou) Co., Ltd	
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong	
	Economic Development Zone, Suzhou, China	
MRT Registration No.:	809388	
FCC Rule Part(s):	Part 15.249	
Model No.:	GT-RFC01, GT-RFC01-A	
FCC ID:	V2S-RFC01	
Test Device Serial No.:	N/A ☐ Production ☐ Pre-Production ☐ Engineering	
FCC Classification:	Low Power Communication Device Transmitter (DXX)	
Date(s) of Test:	August 08 ~ 11, 2014	
Test Report S/N:	1406RSU05101	

### **Test Facility / Accreditations**

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory
   Accreditation (A2LA) under the American Association for Laboratory Accreditation
   Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC,
   Industry Canada, EU and TELEC Rules.
- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (11384A-1).
- MRT facility is an IC registered (11384A-1) test laboratory with the site description on file at Industry Canada.

FCC ID: V2S-RFC01 Page Number: 5 of 35



#### 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



FCC ID: V2S-RFC01 Page Number: 6 of 35



## 2. PRODUCT INFORMATION

## 2.1. Equipment Description

Product Name	2.4g Wireless Remote
Model No.	GT-RFC01, GT-RFC01-A
Working Voltage	DC 3.0V
Frequency Range	2402 - 2472 MHz
Channel Number	71
Type of Modulation	GFSK
Data Rate	62.5Kbps
Channel Control	Auto
Antenna Type	PCB Antenna
Antenna Gain	3dBi

FCC ID: V2S-RFC01 Page Number: 7 of 35



## 2.2. Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2410 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	N/A	N/A

FCC ID: V2S-RFC01 Page Number: 8 of 35



#### 2.3. Mode of Operation

All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

#### Test Mode

Mode 1: Transmit

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

## 2.4. Test Configuration

The **2.4g Wireless Remote FCC ID: V2S-RFC01** was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207,15.209, 15.215 and 15.249. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.6. Labeling Requirements

#### Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

#### 2.7. Test Software

The test unit set it at the low, middle and high channel by pressing the button.

FCC ID: V2S-RFC01 Page Number: 9 of 35



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz,  $50\Omega/50$ uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2009 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.2.

FCC ID: V2S-RFC01 Page Number: 10 of 35



#### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB BeamWidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

FCC ID: V2S-RFC01 Page Number: 11 of 35



## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the **2.4g Wireless Remote** is **permanently attached**.
- There are no provisions for connection to an external antenna.

#### **Conclusion:**

The **2.4g Wireless Remote FCC ID: V2S-RFC01** unit complies with the requirement of §15.203.

FCC ID: V2S-RFC01 Page Number: 12 of 35



## 5. TEST EQUIPMENT CALIBRATION DATA

## **Conducted Emissions**

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101684	1 year	2014/11/08
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2014/11/15

#### Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Preamplifier	MRT	AP01G18	1310002	1 year	2014/12/14
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2014/11/24
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2014/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2014/11/24
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	1 year	2014/12/11
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2014/11/15

## Conducted Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Power Sensor	Agilent	U2021XA	MY52450003	1 year	2014/12/14
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/11/15

FCC ID: V2S-RFC01 Page Number: 13 of 35



## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

#### **AC Conducted Emission Measurement**

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)):

150kHz~30MHz: ± 3.46dB

#### Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)):

9kHz ~ 1GHz: ± 4.18dB 1GHz ~ 40GHz: ± 4.76dB

FCC ID: V2S-RFC01 Page Number: 14 of 35



## 7. TEST RESULT

## 7.1. Summary

Company Name: <u>C-M GLO, LLC</u> FCC ID: <u>V2S-RFC01</u>

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.207	AC Conducted Emissions	< FCC 15.207 limits	Line	N/A	Section 7.2
15.207	150kHz - 30MHz	< FOC 15.207 IIIIIIIS	Conducted	IN/A	Section 7.2
	General Field Strength	Emissions in restricted			
15.209	Limits (Restricted Bands	bands must meet the	Radiated	Pass	Section 7.3
15.249	and Radiated Emission	radiated limits detailed	Radialed	F455	Section 7.5
	Limits)	in 15.209			
15 215(0)	Band Edge / Out-of-Band	> 20dPo(Pook)	Conducted	Pass	Section 7.4
15.215(c)	Emissions	≥ 20dBc(Peak)	Conducted	rass	Section 7.4

#### Notes:

- 1) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

FCC ID: V2S-RFC01 Page Number: 15 of 35



#### 7.2. Conducted Emission


#### 7.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits						
Frequency (MHz)	QP (dBuV)	AV (dBuV)				
0.15 - 0.50	66 - 56	56 - 46				
0.50 - 5.0	56	46				
5.0 - 30	60	50				

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## 7.2.2. Test Setup

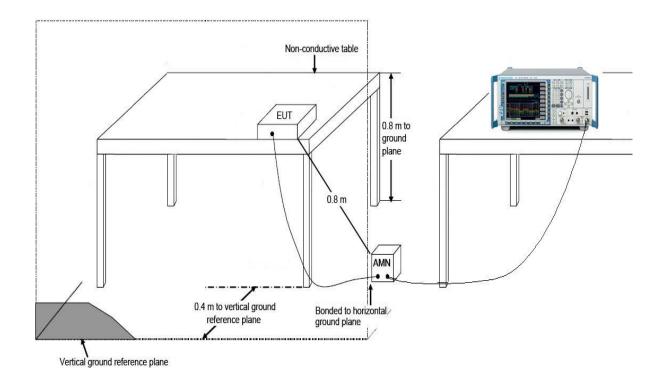

#### 7.2.3. Test Result

Not Application

FCC ID: V2S-RFC01 Page Number: 16 of 35



#### 7.3. Radiated Emission

#### 7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209						
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (uV/m)				
0.009-0.490	2400/F(kHz)	300				
0.490-1.705	24000/F(kHz)	30				
1.705-30.0	30	30				
30-80	100**	3				
80-216	150**	3				
216-960	200**	3				
Above 960	500	3				

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength  $(dBuV/m) = 20 \log E$  field strength (uV/m).

FCC Part 15 Subpart C Paragraph 15.249						
Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)				
902-928(MHz)	50	500				
2400-2483.5(MHz)	50	500				
5725-5875(MHz)	50	500				
24.0-24.25(GHz)	250	2500				

FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general


FCC ID: V2S-RFC01 Page Number: 17 of 35




radiated emission limits in §15.209, whichever is the lesser attenuation.

## 7.3.2. Test Setup

## 9kHz ~ 30MHz Test Setup:

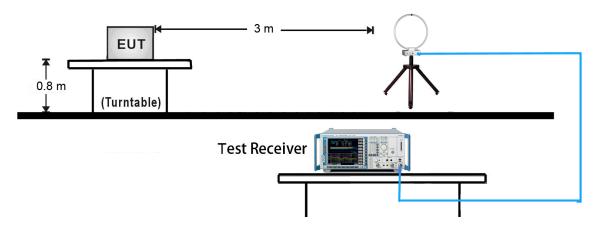


## 30MHz ~ 1GHz Test Setup:

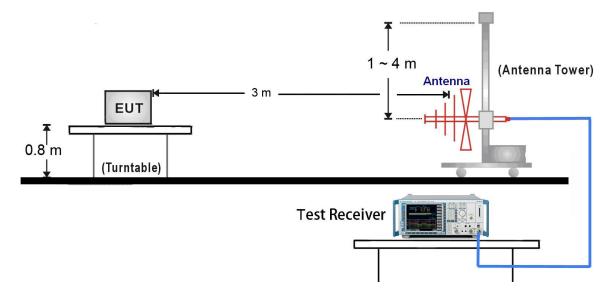

FCC ID: V2S-RFC01 Page Number: 18 of 35



## 1GHz ~ 25GHz Test Setup:

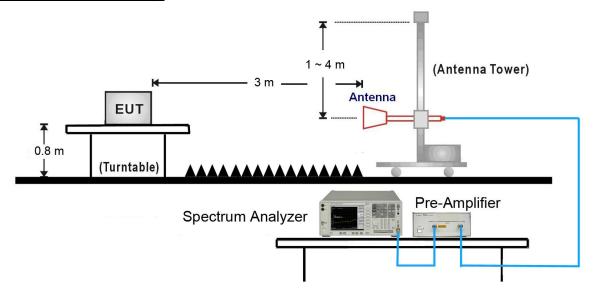

FCC ID: V2S-RFC01 Page Number: 19 of 35



## 7.3.3. Test Result

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00-70	Test Engineer:	Roy Cheng
Remark:	Fundamental Radiated Emission		

Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBµV/m)	Margin (dB)	Detector	Polarization
	(dBµV)		(dBµV/m)				
	54.716	30.661	85.377	114.0	-28.623	Peak	Horizontal
2402	45.722	30.661	76.383	94.0	-17.617	AV	Horizontal
2402	54.546	30.661	85.207	114.0	-28.793	Peak	Vertical
	44.654	30.661	75.315	94.0	-18.685	AV	Vertical
	55.563	30.642	86.205	114.0	-27.795	Peak	Horizontal
2435	53.693	30.642	84.335	94.0	-9.665	AV	Horizontal
2433	52.692	30.642	83.334	114.0	-30.666	Peak	Vertical
	50.635	30.642	81.277	94.0	-12.723	AV	Vertical
	56.956	30.639	87.595	114.0	-26.405	Peak	Horizontal
2472	56.155	30.639	86.795	94.0	-7.205	AV	Horizontal
2412	51.481	30.639	82.120	114.0	-31.880	Peak	Vertical
	50.696	30.639	81.336	94.0	-12.664	AV	Vertical

Note: Measure Level  $(dB\mu V/m)$  = Reading Level  $(dB\mu V)$  + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 20 of 35



Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBµV/m)	Margin (dB)	Detector	Polarization
	(dBµV)		(dBµV/m)				
4808.0	54.863	6.369	61.232	74.0	-12.768	PK	Horizontal
4808.0	46.363	6.369	52.732	54.0	-1.268	AV	Horizontal
4808.0	50.354	6.369	56.723	74.0	-17.277	PK	Vertical
4808.0	40.533	6.369	46.902	54.0	-7.098	AV	Vertical
7205.0	50.328	13.633	63.961	74.0	-10.039	PK	Horizontal
7205.0	7205.0 38.365		51.998	54.0	-2.002	AV	Horizontal
7205.0	51.776	13.633	65.409	74.0	-8.591	PK	Vertical
7205.0	39.156	13.633	52.789	54.0	-1.211	AV	Vertical

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	32	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency	Reading	Factor	Measure	Limit	Margin (dB)	Detector	Polarization
(MHz)	Level	(dB)	Level	(dBµV/m)			
	(dBµV)		(dBµV/m)				
4867.5	56.875	6.573	63.448	74.0	-10.552	PK	Horizontal
4874.0	45.553	6.573	52.126	54.0	-1.874	AV	Horizontal
4867.5	51.662	6.573	58.235	74.0	-15.765	PK	Vertical
4876.0	39.335	6.573	45.908	54.0	-8.092	AV	Vertical
7307.0	44.809	13.985	58.794	74.0	-15.206	PK	Horizontal
7310.9	37.695	13.985	51.680	54.0	-2.320	AV	Horizontal
7307.0	45.889	13.985	59.874	74.0	-14.126	PK	Vertical
7311.0	37.053	13.985	51.038	54.0	-2.962	AV	Vertical

Note: Measure Level  $(dB\mu V/m)$  = Reading Level  $(dB\mu V)$  + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

FCC ID: V2S-RFC01 Page Number: 21 of 35



Test Mode:	Transmission	Test Site:	AC1
Test Channel:	70	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level	Factor	Measure Level		Margin (dB)	Detector	Polarization
(IVIFIZ)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)			
4944.0	50.154	6.756	54.910	74.0	-19.090	PK	Horizontal
4944.0	40.365	6.756	47.121	54.0	-6.879	AV	Horizontal
4944.0	56.317	6.756	58.073	74.0	-15.927	PK	Vertical
4944.0	45.662	6.756	52.418	54.0	-1.582	AV	Vertical
7417.5	43.437	14.165	57.602	74.0	-16.398	PK	Horizontal
7417.5	417.5 34.365		48.530	54.0	-5.470	AV	Horizontal
7417.5	44.345	14.165	58.510	74.0	-15.490	PK	Vertical
7417.5	35.962	14.165	50.127	54.0	-3.873	AV	Vertical

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

FCC ID: V2S-RFC01 Page Number: 22 of 35



Test Mode:	Transmission	Test Site:	AC1				
Test Channel:	32	Test Engineer:	Roy Cheng				
Remark:	The worst case of General Radiated Emission						

Frequency (MHz)	Reading Level	Factor (dB)	Measure Level	Limit (dBµV/m)	Margin (dB)	Detector	Polarization
,	(dBµV)	,	(dBµV/m)	,			
252.3	17.26	13.31	30.57	46	-15.43	QP	Horizontal
252.1	14.63	13.31	27.94	46	-18.06	QP	Vertical
301.2	16.35	14.13	30.48	46	-15.52	QP	Horizontal
712.1	12.63	21.06	33.69	46	-12.31	QP	Vertical
4331.6	34.66	5.34	40.0	74	-34.0	PK	Horizontal
4017.4	4017.4 35.25		39.75	74	-34.25	PK	Vertical
5411.6	33.23	6.99	40.22	74	-33.78	PK	Horizontal
5411.6	33.02	6.99	40.01	74	-33.99	PK	Vertical

Note 1: Measure Level  $(dB\mu V/m)$  = Reading Level  $(dB\mu V)$  + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

Note 2: The test trace is same as the ambient noise (the test frequency range:  $9kHz \sim 30MHz$ ,  $18GHz \sim 25GHz$ ), therefore no data appear in the report.

FCC ID: V2S-RFC01 Page Number: 23 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:44				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2402MHz					

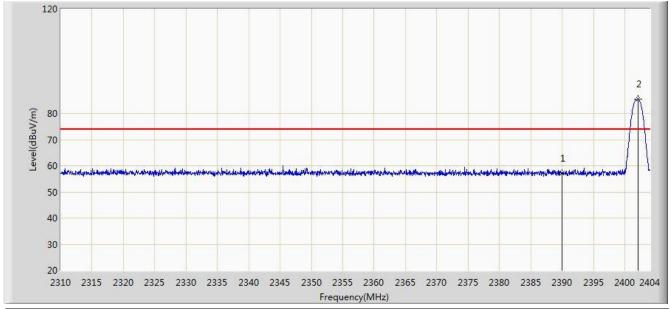


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1			2390.000	57.231	26.547	-16.769	74.000	30.684	PK
2		*	2402.120	85.377	54.716	N/A	N/A	30.661	PK

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 24 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:45				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2402MHz					

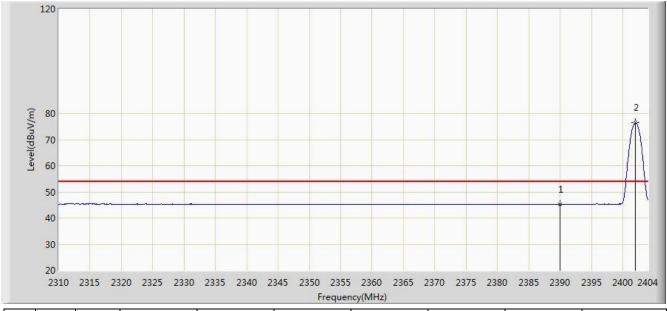


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1			2390.000	45.298	14.614	-8.702	54.000	30.684	AV
2		*	2401.979	76.383	45.722	N/A	N/A	30.662	AV

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 25 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:46				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Vertical				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2402MHz					

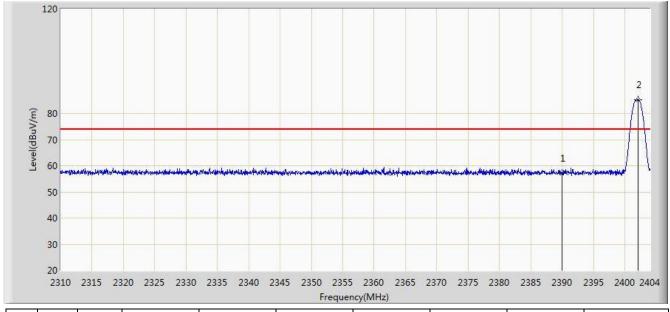


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1			2390.000	57.100	26.416	-16.900	74.000	30.684	PK
2		*	2402.073	85.207	54.546	N/A	N/A	30.661	PK

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 26 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:46				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Vertical				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2402MHz					

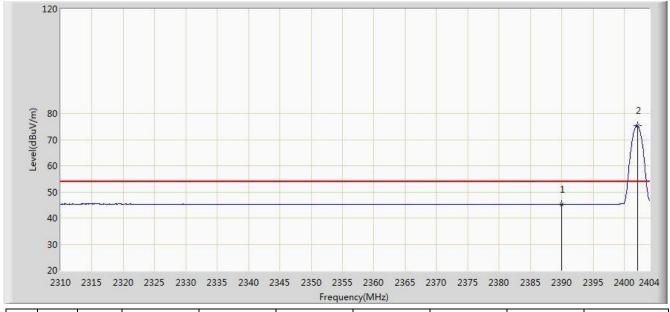


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1			2390.000	45.294	14.610	-8.706	54.000	30.684	AV
2		*	2402.073	75.315	44.654	N/A	N/A	30.661	AV

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 27 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:47				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2472MHz					

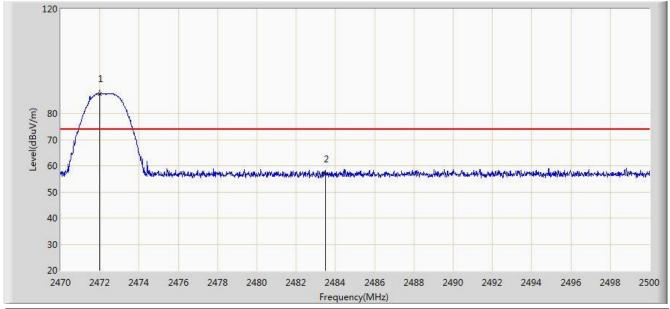


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1		*	2471.995	87.595	56.956	N/A	N/A	30.639	PK
2			2483.500	56.794	26.121	-17.206	74.000	30.673	PK

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 28 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:57				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2472MHz					

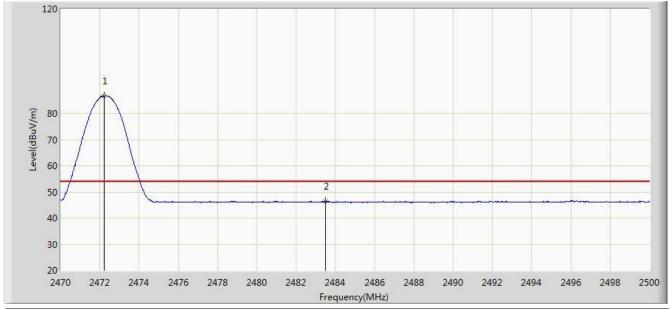


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1		*	2472.220	86.795	56.155	N/A	N/A	30.639	AV
2			2483.500	46.298	15.625	-7.702	54.000	30.673	AV

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 29 of 35



Engineer: Roy Cheng					
Site: AC1	Time: 2014/08/09 - 15:58				
Limit: FCC_Part15.209_RE(3m)	Margin: 0				
Probe: BBHA9120D_1-18GHz	Polarity: Vertical				
EUT: 2.4g Wireless Remote	Power: DC 3.0V				
Note: Transmit at channel 2472MHz					

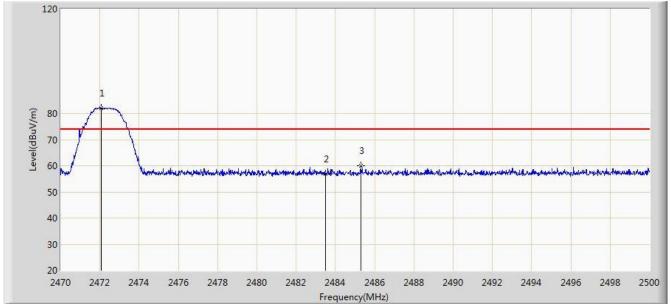


No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1		*	2472.055	82.120	51.481	N/A	N/A	30.639	PK
2			2483.500	56.670	25.997	-17.330	74.000	30.673	PK
3			2485.285	59.935	29.257	-14.065	74.000	30.678	PK

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 30 of 35



Engineer: Roy Cheng				
Site: AC1	Time: 2014/08/09 - 16:03			
Limit: FCC_Part15.209_RE(3m)	Margin: 0			
Probe: BBHA9120D_1-18GHz	Polarity: Vertical			
EUT: 2.4g Wireless Remote	Power: DC 3.0V			
Note: Transmit at channel 2472MHz				

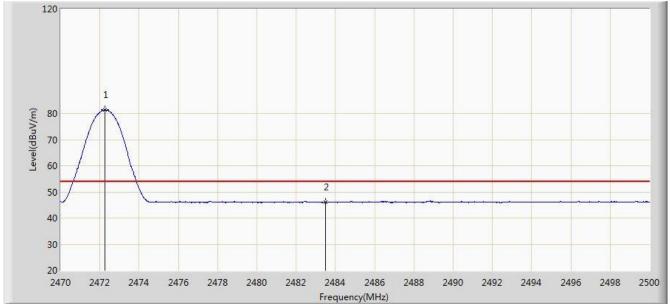

No	Flag	Mark	Frequency	Measure	Reading	Over Limit	Limit	Factor	Туре
			(MHz)	Level	Level	(dB)	(dBuV/m)	(dB)	
				(dBuV/m)	(dBuV)				
1		*	2472.265	81.336	50.696	N/A	N/A	30.639	AV
2			2483.500	46.034	15.361	-7.966	54.000	30.673	AV

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

FCC ID: V2S-RFC01 Page Number: 31 of 35



### 7.4. Band-edge Compliance of RF Conducted Emissions

#### 7.4.1. Test Limit

FCC Part 15.215 (c), Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 7.4.2. Test Procedure


Use the following spectrum analyzer settings:

- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW  $\geq$  1% of the span
- 3. VBW  $\geq$  RBW
- 4. Sweep = auto
- 5. Detector function = peak
- 6. Trace = max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge.
  Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.
- 8. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

FCC ID: V2S-RFC01 Page Number: 32 of 35



## 7.4.3. Test Setup

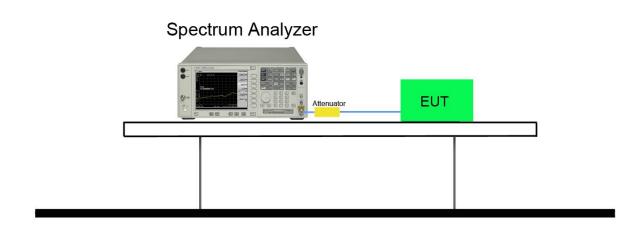


FCC ID: V2S-RFC01 Page Number: 33 of 35



#### 7.4.4. Test Result

Product:	2.4g Wireless Remote	Test Site:	AC1			
Test Channel:	00,70	Test Engineer:	Roy Cheng			
Test Item:	Band-edge Compliance of RF Conducted Emissions for FCC Part15.215					

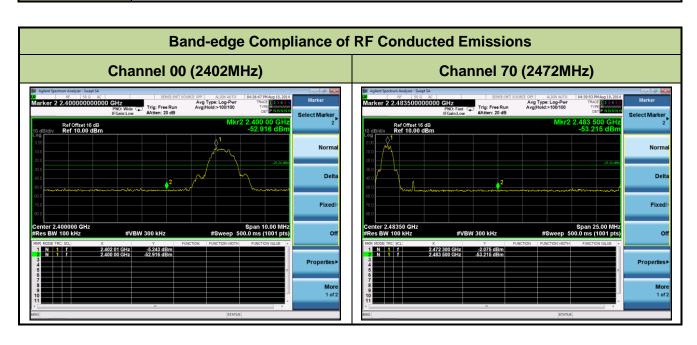

FCC ID: V2S-RFC01 Page Number: 34 of 35



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **2.4g Wireless Remote FCC ID: V2S-RFC01** is in compliance with Part 15C of the FCC Rules.

FCC ID: V2S-RFC01 Page Number: 35 of 35