

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2105-0046

2. Customer

- Name : Point Mobile Co., LTD.
- Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Computer / PM30

FCC ID : V2X-PM30

5. FCC Regulation(s): Part 22, 90

Test Method Used : KDB971168 D01v03r01, ANSI C63.26-2015, ANSI/TIA-603-E-2016

6. Date of Test : 2021.03.24 ~ 2021.04.27

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by Name : ChangWon Lee (Signature)	Reviewed by Name : JaeJin Lee (Signature)
-------------	---	---

2021 . 05 . 18 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2105-0046	May. 18, 2021	Initial issue	ChangWon Lee	JaeJin Lee

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1 EUT DESCRIPTION	5
2.2 TESTING ENVIRONMENT	5
2.3 MEASURING INSTRUMENT CALIBRATION.....	5
2.4 MEASUREMENT UNCERTAINTY.....	5
2.5 TEST FACILITY.....	5
3. DESCRIPTION OF TESTS.....	6
3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	6
3.2 OCCUPIED BANDWIDTH.....	8
3.3 BAND EDGE EMISSIONS AT ANTENNA TERMINAL	9
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	10
3.5 EMISSION MASK.....	11
3.6 UNDESIRABLE EMISSIONS	12
3.7 FREQUENCY STABILITY	13
4. LIST OF TEST EQUIPMENT	14
5. SUMMARY OF TEST RESULTS	15
6. EMISSION DESIGNATOR AND SAMPLE CALCULATION	16
7. TEST DATA.....	17
7.1 CONDUCTED OUTPUT POWER.....	17
7.2 OCCUPIED BANDWIDTH.....	18
7.3 BAND EDEG EMISSIONS (Conducted).....	18
7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted).....	18
7.5 EMISSION MASK (Conducted).....	18
7.6 ERP	19
7.7 UNDESIRABLE EMISSIONS (Radiated).....	20
7.8 FREQUENCY STABILITY	21
8. TEST PLOTS	22
8.1 OCCUPIED BANDWIDTH.....	22
8.2 BAND EDGE EMISSIONS(Conducted).....	27
8.3 SPURIOUS AND HARMONICS EMISSIONS(Conducted)	32
8.4 EMISSION MASK (Conducted).....	37

1. GENERAL INFORMATION

FCC Classification : PCS Licensed Transmitter held to ear(PCE)
FCC ID : V2X-PM30
IC : 10664A-PM30
Product Name : Mobile Computer
Model Name : PM30
Add Model Name : -
Hardware Version : MP
Software Version : 30.00xx
Serial Number : 2034310066(Conducted), 2034010538(Radiated)
Supplying power : DC 3.85 V
Antenna Type : LDS Antenna

Mode	TX Frequency (MHz)	Emission Designator	Modulation	Conducted output power		ERP	
				Max power (dBm)	Max power (W)	Max power (dBm)	Max power (W)
LTE Band 26	821.5	13M4G7D	QPSK	22.96	0.198	21.09	0.129
LTE Band 26	821.5	13M4W7D	16QAM	21.93	0.156	20.34	0.108
LTE Band 26	819.0	8M92G7D	QPSK	22.85	0.193	21.14	0.130
LTE Band 26	819.0	8M92W7D	16QAM	21.89	0.155	20.27	0.106
LTE Band 26	816.5 ~ 821.5	4M47G7D	QPSK	22.92	0.196	21.26	0.134
LTE Band 26	816.5 ~ 821.5	4M46W7D	16QAM	21.90	0.155	20.56	0.114
LTE Band 26	815.5 ~ 822.5	2M68G7D	QPSK	22.90	0.195	21.45	0.140
LTE Band 26	815.5 ~ 822.5	2M67W7D	16QAM	21.86	0.153	20.83	0.121
LTE Band 26	814.7 ~ 823.3	1M08G7D	QPSK	22.89	0.195	21.42	0.139
LTE Band 26	814.7 ~ 823.3	1M08W7D	16QAM	21.91	0.155	20.74	0.119

2. INTRODUCTION

2.1 EUT DESCRIPTION

The Equipment Under Test (EUT) supports 850/1900 GSM, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n WLAN(2.4GHz), 802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE) and NFC.

2.2 TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+22 °C ~ +25 °C
▪ Relative Humidity	42 % ~ 45 %

2.3 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Above 18 GHz)	5.3 dB (The confidence level is about 95 %, $k = 2$)

2.5 TEST FACILITY

DT&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.

- FCC & IC MRA Designation No. : KR0034

- ISED#: 5740A


www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

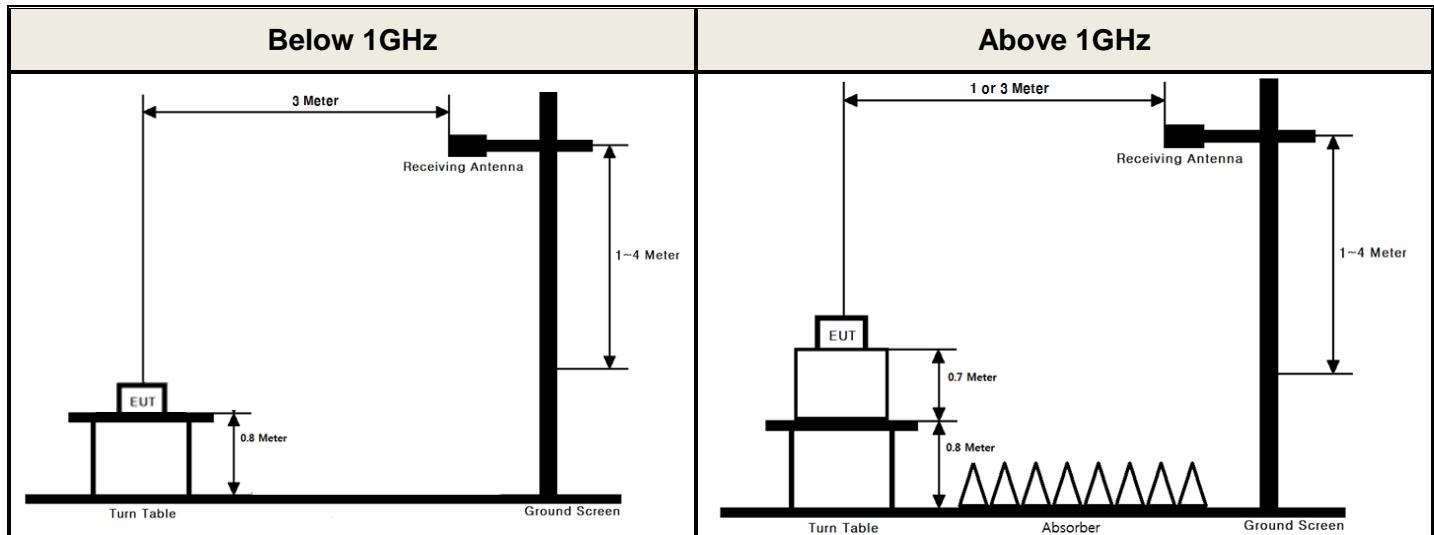

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI C63.26-2015 – Section 5.2.4.4.1

Test setting

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately

determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 OCCUPIED BANDWIDTH.

Test set-up

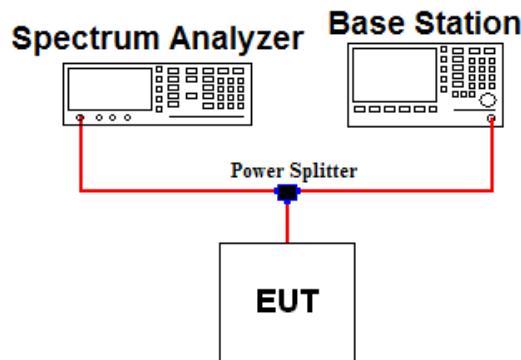

Test Procedure

- **KDB971168 D01v03 - Section 4.3**
- **ANSI C63.26-2015 – Section 5.4.4**


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1\% \sim 5\%$ of the expected OBW & $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 % ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.3 BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

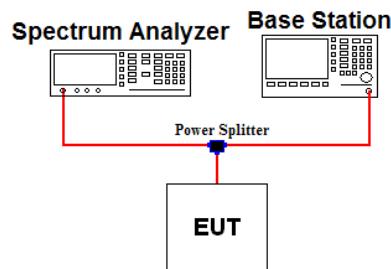

Test Procedure

- **KDB971168 D01v03 - Section 6, KDB971168D02v02 - Section 8**
- **ANSI C63.26-2015 – Section 5.7**

All out of band emissions are measured by means of a calibrated spectrum analyzer. Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.


Section 90.691(a) compliance testing, use $\text{RBW} = 300 \text{ Hz}$ for offsets less than 37.5 kHz from a channel edge; $\text{RBW} = 100 \text{ kHz}$ for offsets greater than 37.5 kHz is allowed.

Test setting

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. $\text{RBW} = 300 \text{ Hz}$ & $\text{VBW} \geq 3 \times \text{RBW}$ (less than 37.5 kHz from a channel edge)
 $\text{RBW} = 100 \text{ kHz}$ & $\text{VBW} \geq 3 \times \text{RBW}$ (greater than 37.5 kHz from a channel edge)
3. Detector = RMS & Trace mode = Average
4. Sweep time = Auto couple
5. The trace was allowed to stabilize

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

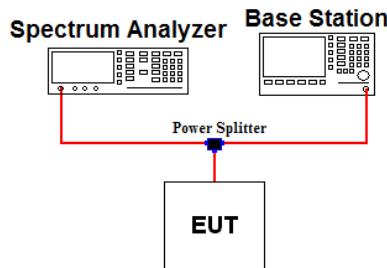

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.


Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

3.5 EMISSION MASK

Test set-up

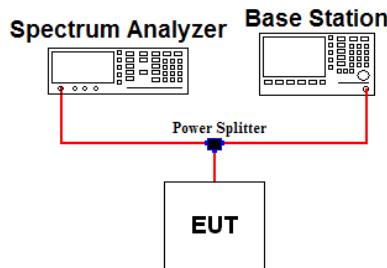

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations.

Transmitters used in the radio services by Part 90 must comply with the emission masks.


Test setting

6. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW \geq 3 X RBW (Refer to Note 1)
7. Detector = RMS & Trace mode = Max hold
8. Sweep time = Auto couple
9. Number of sweep point \geq 2 X span / RBW
10. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

3.6 UNDESIRABLE EMISSIONS

Test Set-up

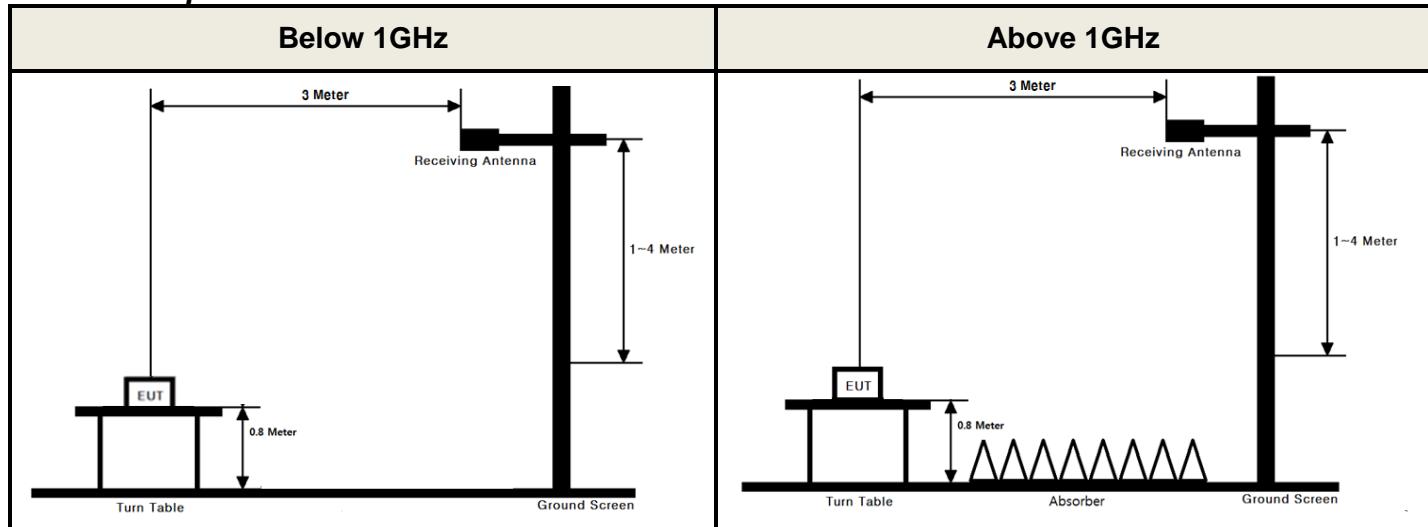

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- **ANSI/TIA-603-E-2016 - Section 2.2.12**
- **KDB971168 D01v03 - Section 5.8**
- **ANSI C63.26-2015 – Section 5.5**

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize


The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

3.7 FREQUENCY STABILITY

Test Set-up

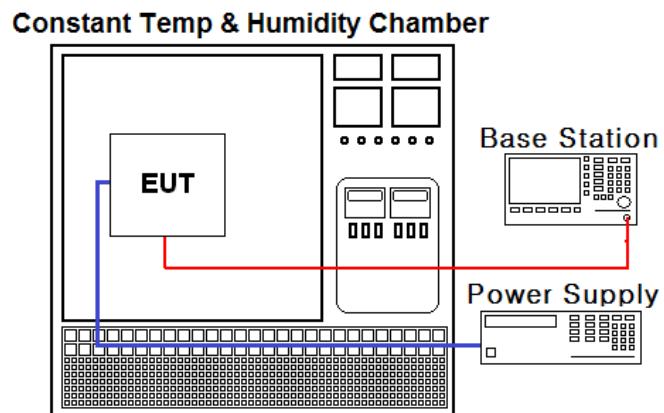

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 – Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from – 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency for Part 90.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	20/10/22	21/10/22	MY50200867
Spectrum Analyzer	Agilent Technologies	N9020A	20/06/24	21/06/24	US47360812
DC power supply	Agilent Technologies	66332A	20/06/24	21/06/24	US37473627
Multimeter	FLUKE	17B+	20/12/16	21/12/16	36390701WS
Power Splitter	Anritsu	K241B	20/12/16	21/12/16	016681
Temp & Humi	SJ Science	SJ-TH-S50	20/12/14	21/12/14	U5542113
Radio Communication Analyzer	Anritsu	MT8820C	20/12/16	21/12/16	6201274516
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-1
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
Bilog Antenna	Schwarzbeck	VULB 9160	20/12/16	21/12/16	9160-3362
Dipole Antenna	A.H.Systems Inc.	FCC-4	20/12/16	22/12/16	710A
Dipole Antenna	Schwarzbeck	UHA9105	20/04/10	22/04/10	2262
HORN ANT	ETS	3117	20/12/16	21/12/16	00140394
HORN ANT	ETS	3117	20/10/23	21/10/23	00143278
Amplifier	EMPOWER	BBS3Q7ELU	20/06/24	21/06/24	1020
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
PreAmplifier	Agilent	8449B	20/06/24	21/06/24	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	20/06/24	21/06/24	7
High-pass filter	Wainwright	WHKX10-2838-3300-18000-60SS	20/06/24	21/06/24	2
High-pass filter	Wainwright	WHKX6-6320-8000-26500-40CC	20/06/24	21/06/24	2
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-2
Cable	JUNFLON	MWX241/B	21/01/08	22/01/08	M-3
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-4
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-5
Cable	DTNC	Cable	21/01/08	22/01/08	M-6
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	21/01/08	22/01/08	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-9
Cable	Radiall	Cable	21/01/16	22/01/16	RF-48

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046 90.635	Conducted Output Power	< 100 Watts	Conducted	C
2.1049	Occupied Bandwidth	N/A		C
2.1051 90.691	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions except > 50 + 10log ₁₀ (P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C
90.210(n)	Emission Mask	Emission Mask B: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB. (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB. (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.		C
2.1055 90.213	Frequency Stability	< 2.5 ppm		C
22.913(a.5)	Radiated Output Power	< 7 Watts max. ERP	Radiated	C ^{Note2, 3}
2.1053 90.691	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions except > 50 + 10log ₁₀ (P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C ^{Note2, 3}

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

Note 3: This device supports wireless charging.

So per KDB648474 D03v01r0, the radiated test items were performed all not charging, charging, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

6. EMISSION DESIGNATOR AND SAMPLE CALCULATION

A. Emission Designator

LTE Band 26(QPSK)

Emission Designator = **13M4G7D**
LTE OBW = 13.399 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 26(16QAM)

Emission Designator = **13M4W7D**
LTE OBW = 13.386 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

B. For substitution method

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4). (ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

EIRP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBi)


ERP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBd)

Where, TX Antenna Gain (dBd) = TX Antenna Gain (dBi) - 2.15 dB

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

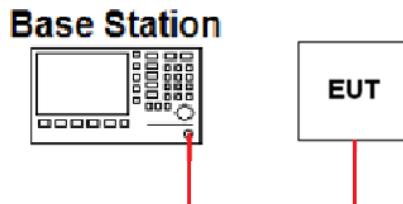

Note 1: The conducted output power was measured using the Anritsu MT8820C.

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	Conducted Output power (dBm)	Conducted Output power (W)
15	821.5	QPSK	22.96	0.198
		16QAM	21.93	0.156
10	819	QPSK	22.85	0.193
		16QAM	21.89	0.155
5	816.5	QPSK	22.89	0.195
		16QAM	21.83	0.152
	821.5	QPSK	22.92	0.196
		16QAM	21.90	0.155
3	815.5	QPSK	22.82	0.191
		16QAM	21.79	0.151
	819	QPSK	22.90	0.195
		16QAM	21.86	0.153
1.4	822.5	QPSK	22.88	0.194
		16QAM	21.82	0.152
	814.7	QPSK	22.79	0.190
		16QAM	21.73	0.149
	819	QPSK	22.89	0.195
		16QAM	21.91	0.155
	823.3	QPSK	22.83	0.192
		16QAM	21.90	0.155

7.2 OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.3 BAND EDEG EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.2

7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.3

7.5 EMISSION MASK (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.4

7.6 ERP

- Test Notes

This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

- Measurement data:

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
15	821.5	QPSK	1/36	H	21.83	-0.74	21.09	0.129
		16QAM	1/36	H	21.08	-0.74	20.34	0.108
10	819	QPSK	1/25	H	21.86	-0.72	21.14	0.130
		16QAM	1/25	H	20.99	-0.72	20.27	0.106
5	816.5	QPSK	1/12	H	21.45	-0.70	20.75	0.119
		16QAM	1/12	H	20.58	-0.70	19.88	0.097
	821.5	QPSK	1/12	H	22.00	-0.74	21.26	0.134
		16QAM	1/12	H	21.30	-0.74	20.56	0.114
3	815.5	QPSK	1/14	H	21.35	-0.69	20.66	0.116
		16QAM	1/14	H	20.42	-0.69	19.73	0.094
	819	QPSK	1/14	H	22.06	-0.72	21.34	0.136
		16QAM	1/14	H	21.33	-0.72	20.61	0.115
	822.5	QPSK	1/7	H	22.20	-0.75	21.45	0.140
		16QAM	1/7	H	21.58	-0.75	20.83	0.121
	814.7	QPSK	1/0	H	21.31	-0.69	20.62	0.115
		16QAM	1/0	H	20.40	-0.69	19.71	0.094
1.4	819	QPSK	1/0	H	21.91	-0.72	21.19	0.132
		16QAM	1/0	H	21.22	-0.72	20.50	0.112
	823.3	QPSK	1/0	H	22.17	-0.75	21.42	0.139
		16QAM	1/0	H	21.49	-0.75	20.74	0.119

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
15	821.5	QPSK	1/36	H	21.65	-0.74	20.91	0.123
		16QAM	1/36	H	20.80	-0.74	20.06	0.101
10	819	QPSK	1/25	H	21.47	-0.72	20.75	0.119
		16QAM	1/25	H	20.51	-0.72	19.79	0.095
5	821.5	QPSK	1/12	H	21.95	-0.74	21.21	0.132
		16QAM	1/12	H	20.81	-0.74	20.07	0.102
3	822.5	QPSK	1/7	H	21.92	-0.75	21.17	0.131
		16QAM	1/7	H	20.76	-0.75	20.01	0.100
1.4	823.3	QPSK	1/0	H	21.96	-0.75	21.21	0.132
		16QAM	1/0	H	20.79	-0.75	20.04	0.101

7.7 UNDESIRABLE EMISSIONS (Radiated)

- Test Notes

1. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported.
2. Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$
3. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.
4. The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

- Measurement data:

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
15	821.5	1/36	QPSK	1 642.56	H	-58.79	4.45	-54.34	75.43	34.09
				2 463.97	V	-57.72	4.14	-53.58	74.67	
			16QAM	1 642.66	H	-59.53	4.45	-55.08	75.42	33.34
				2 463.95	V	-57.51	4.14	-53.37	73.71	
3	822.5	1/12	QPSK	1 645.02	H	-58.73	4.47	-54.26	75.71	34.45
				2 467.48	V	-57.21	4.14	-53.07	74.52	
			16QAM	1 645.05	H	-59.54	4.47	-55.07	75.90	33.83
				2 467.42	V	-57.68	4.14	-53.54	74.37	

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
15	821.5	1/36	QPSK	1643.13	H	-59.08	4.46	-54.62	75.53	33.91
				2463.22	V	-58.11	4.14	-53.97	74.88	
3	822.5	1/7	QPSK	1645.78	H	-58.93	4.48	-54.45	75.62	34.17
				2467.13	V	-57.34	4.14	-53.20	74.37	

7.8 FREQUENCY STABILITY

- Test Notes


Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING FREQUENCY : 819 MHz
REFERENCE VOLTAGE : 3.85 VDC
LIMIT : 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	819,000,004	+4	+0.0049	+0.000 000 488
100 %		-30	819,000,008	+8	+0.0098	+0.000 000 977
100 %		-20	818,999,993	-7	-0.0085	-0.000 000 855
100 %		-10	818,999,989	-11	-0.0134	-0.000 001 343
100 %		0	819,000,009	+9	+0.0110	+0.000 001 099
100 %		+10	819,000,001	+1	+0.0012	+0.000 000 122
100 %		+20	819,000,004	+4	+0.0049	+0.000 000 488
100 %		+30	819,000,003	+3	+0.0037	+0.000 000 366
100 %		+40	819,000,007	+7	+0.0085	+0.000 000 855
100 %		+50	818,999,998	-2	-0.0024	-0.000 000 244
115 %	4.43	+20	818,999,999	-1	-0.0012	-0.000 000 122
BATT.ENDPOINT	3.20	+20	819,000,004	+4	+0.0049	+0.000 000 488

8. TEST PLOTS


8.1 OCCUPIED BANDWIDTH

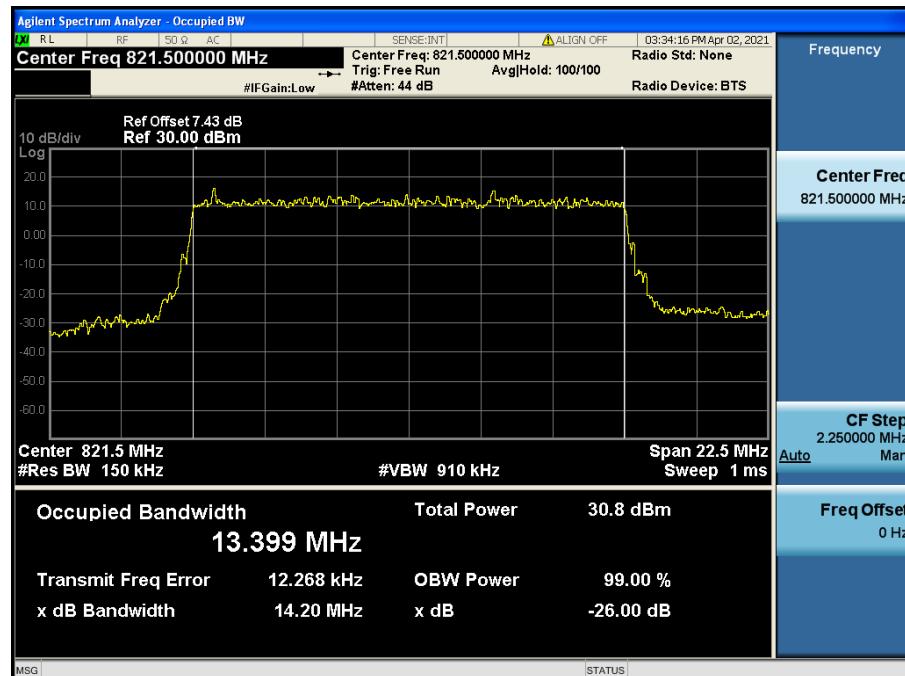


LTE Band 26 / 15 MHz / QPSK - RB Size 75

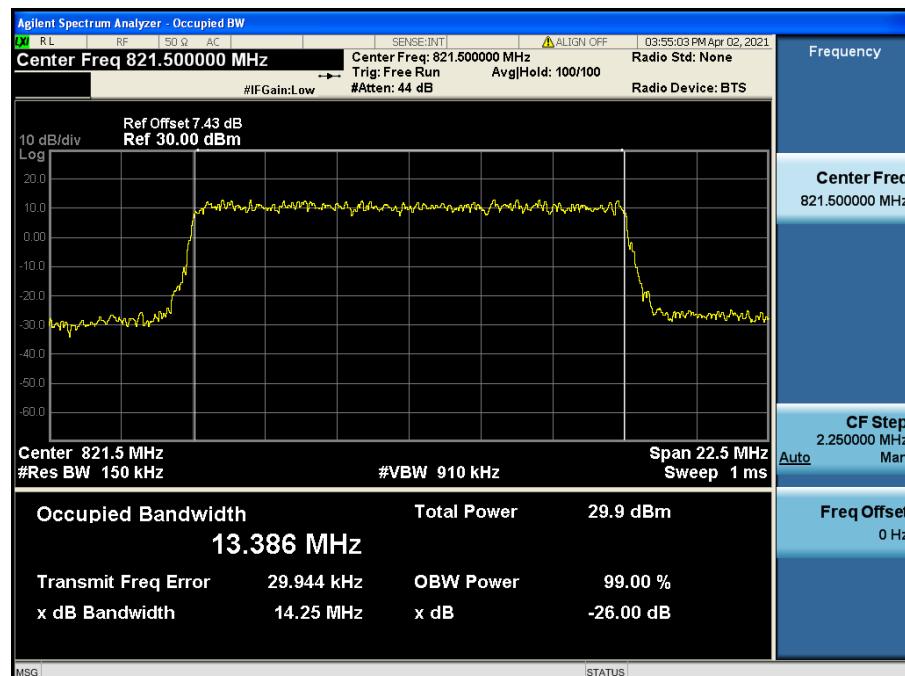


LTE Band 26 / 15 MHz / 16QAM - RB Size 75

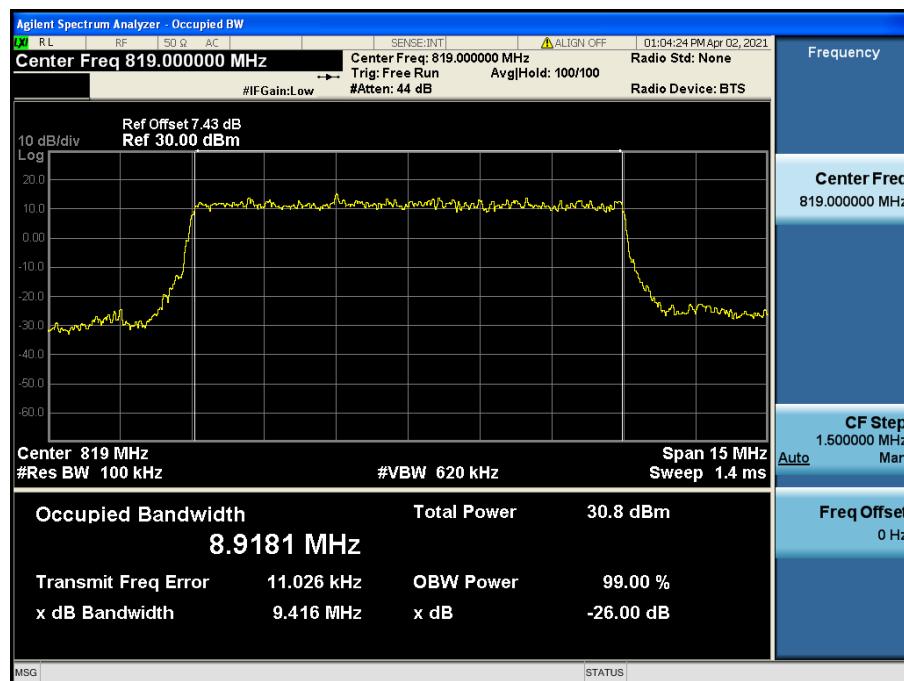


LTE Band 26 / 10 MHz / QPSK - RB Size 50

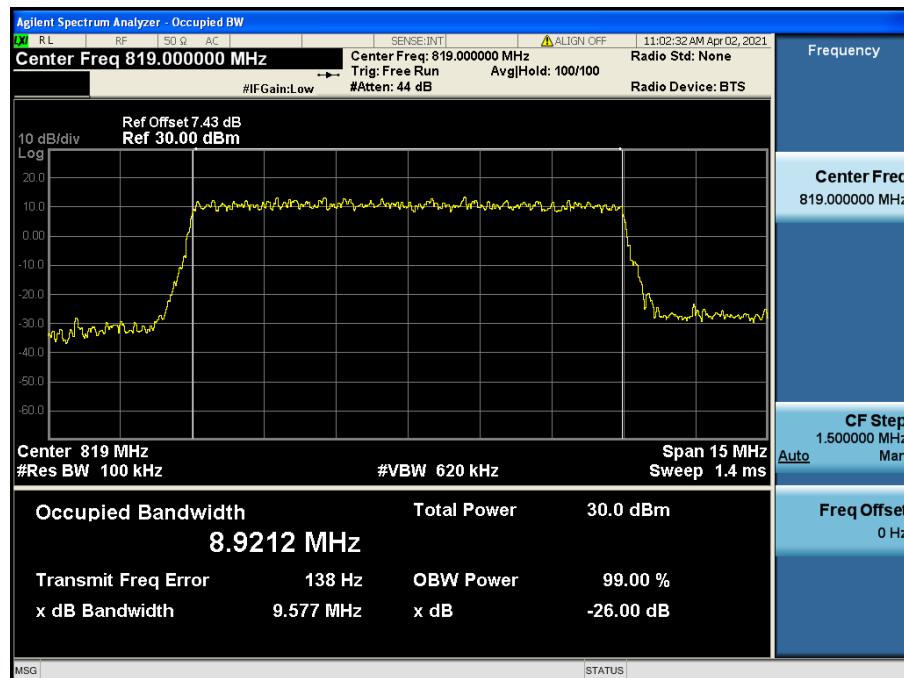


LTE Band 26 / 10 MHz / 16QAM - RB Size 50

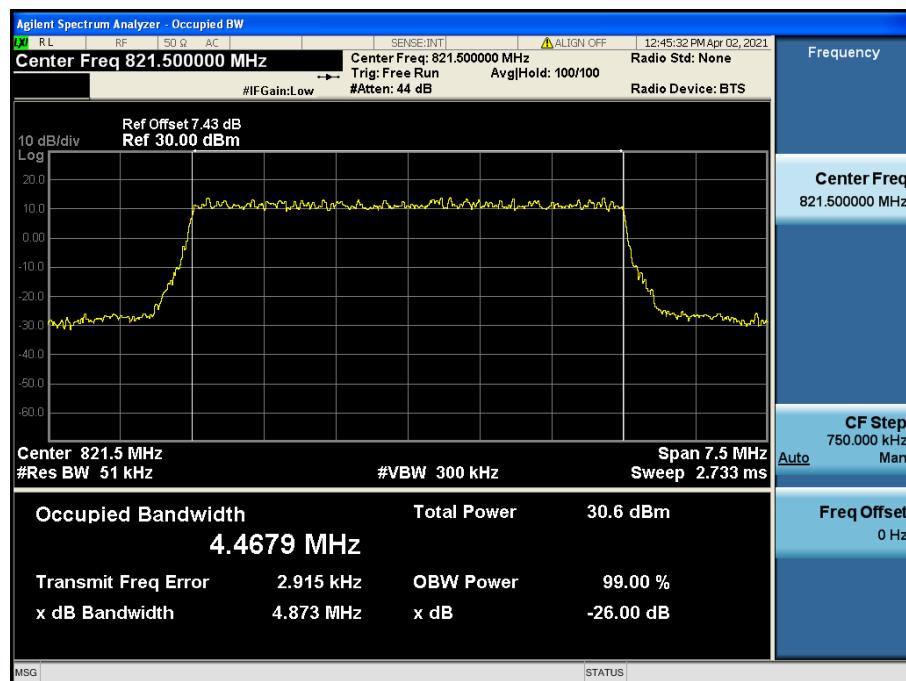


LTE Band 26 / 5 MHz / QPSK - RB Size 25

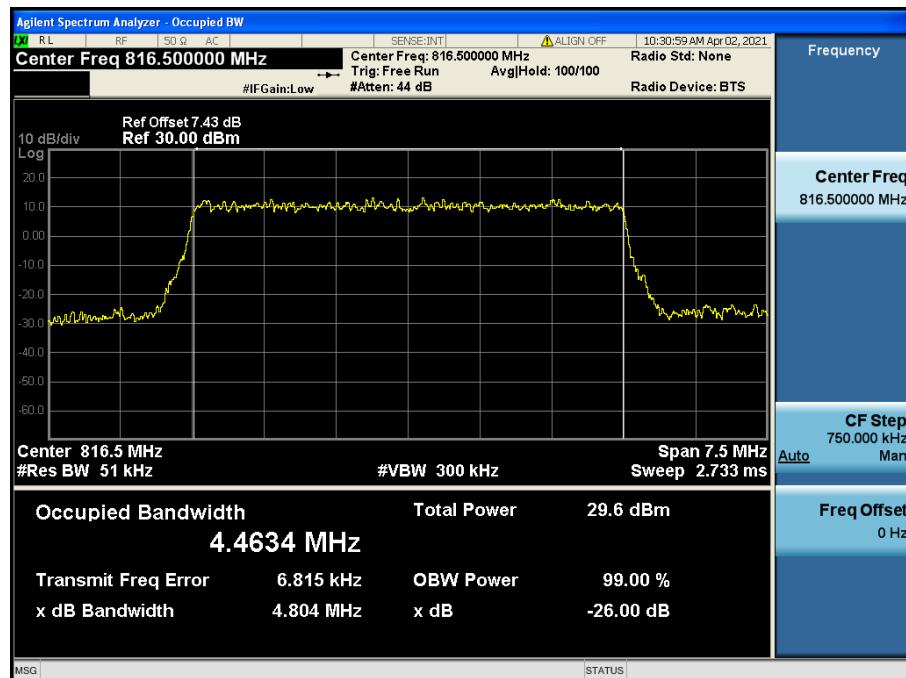



LTE Band 26 / 5 MHz / 16QAM - RB Size 25

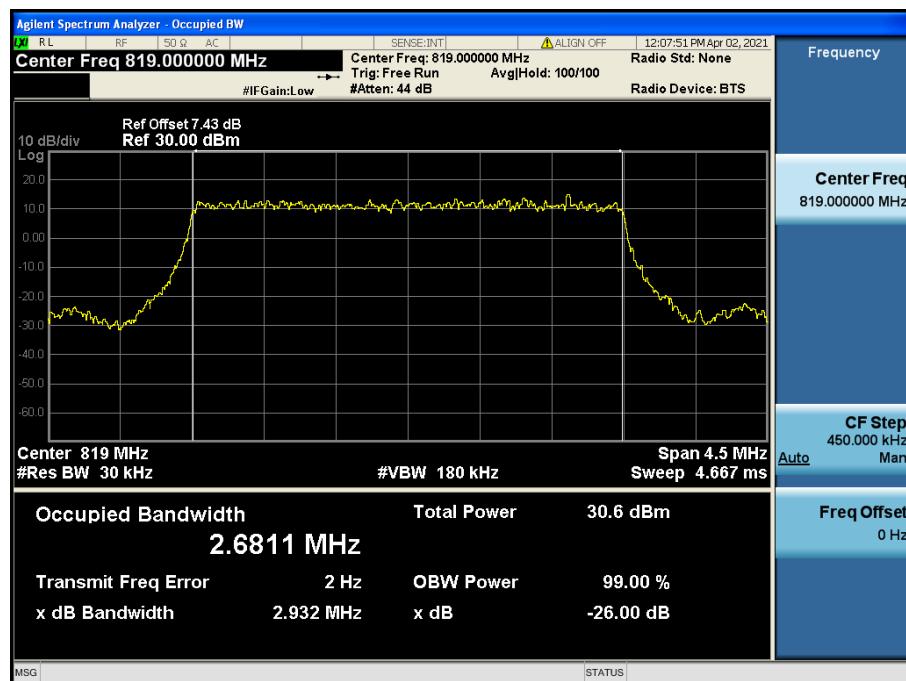

LTE Band 26 / 3 MHz / QPSK - RB Size 15

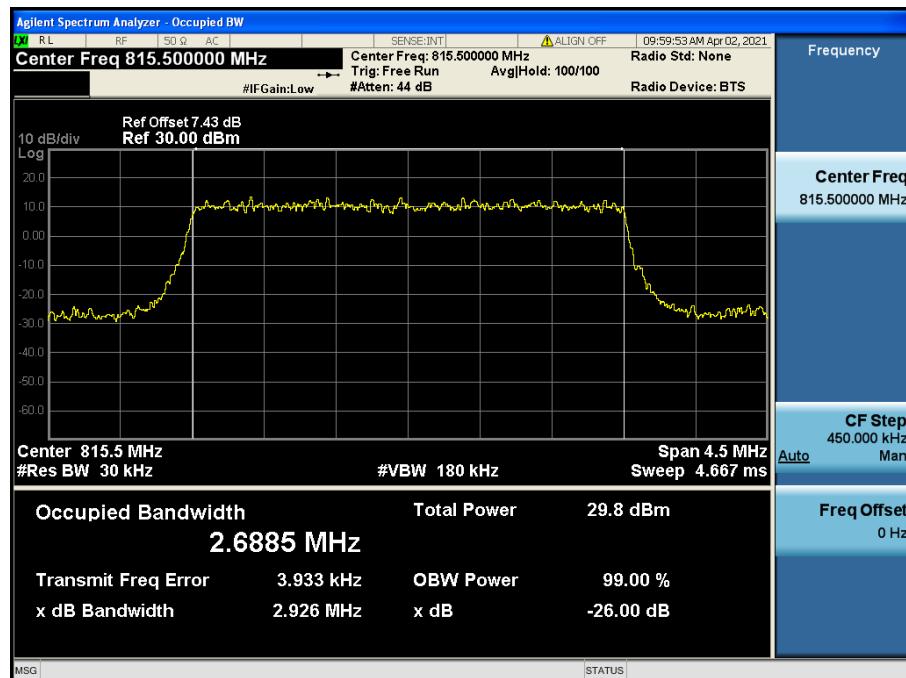


LTE Band 26 / 3 MHz / 16QAM - RB Size 15

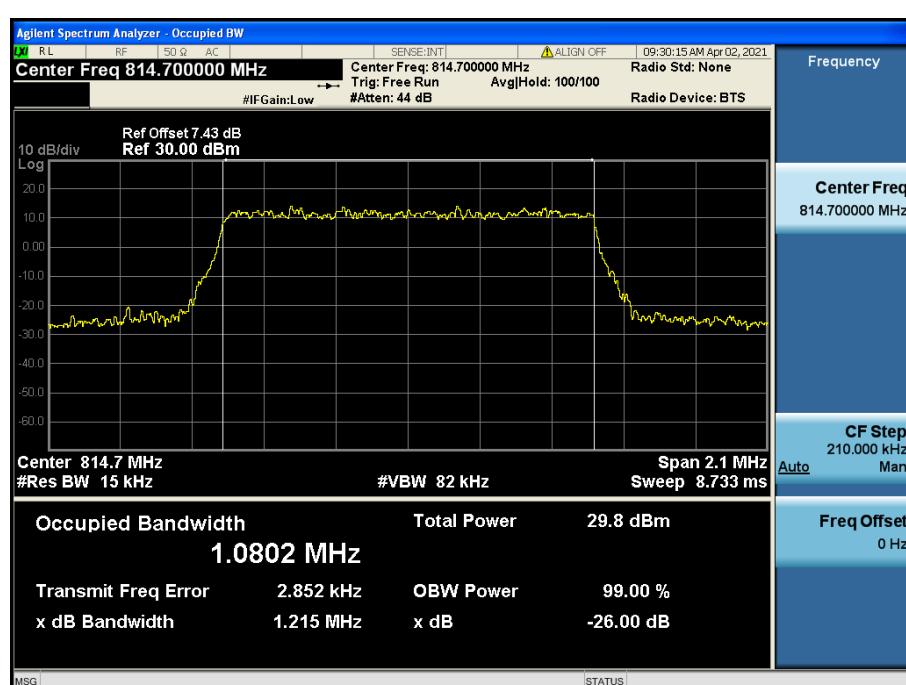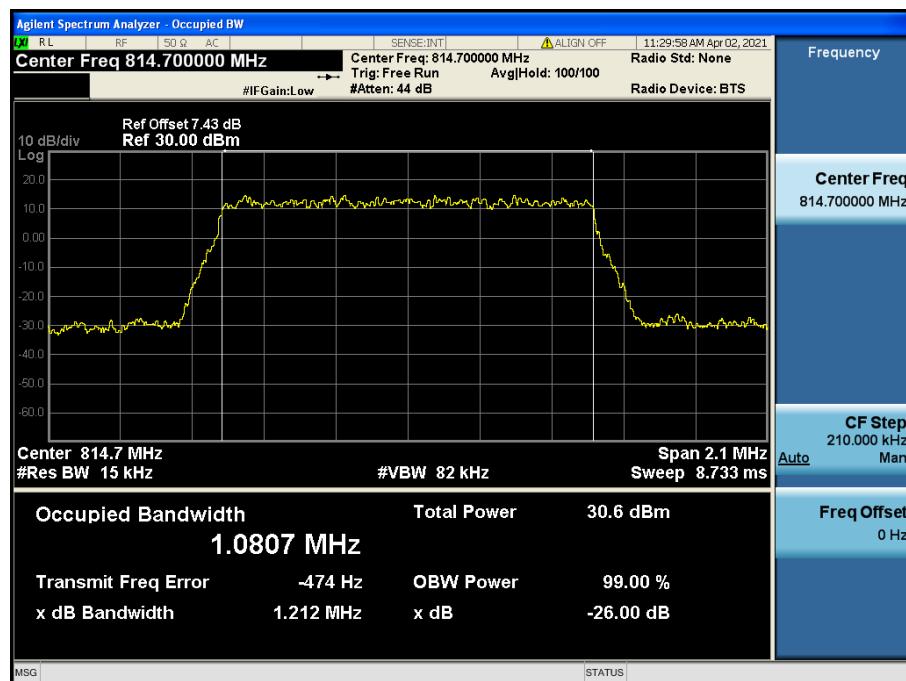


8.2 BAND EDGE EMISSIONS(Conducted)

- Band Edge & Extended Band Edge

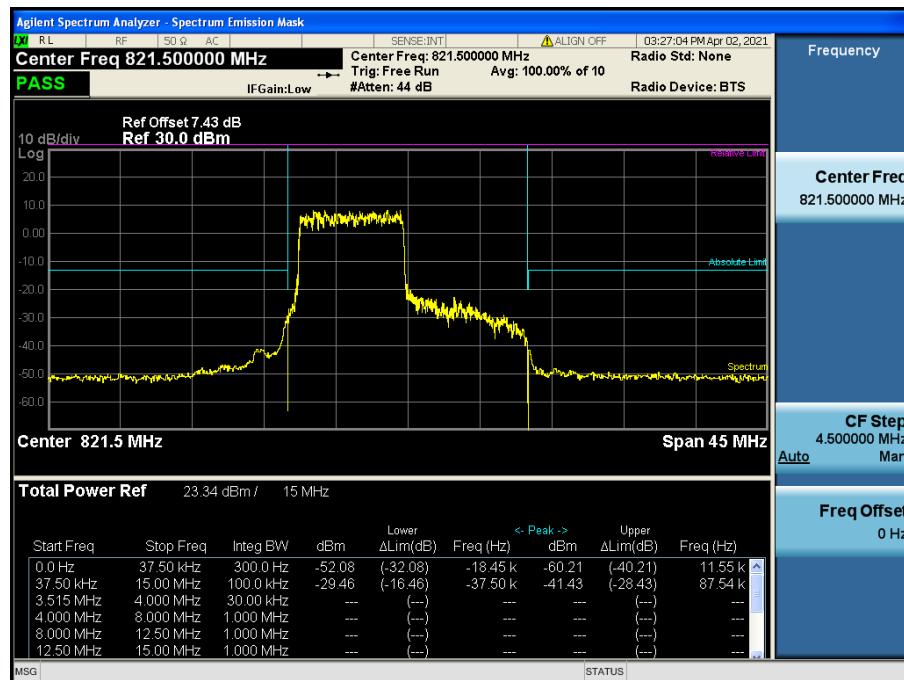


LTE Band 26 / 15MHz / QPSK - RB Size/Offset (36/0)

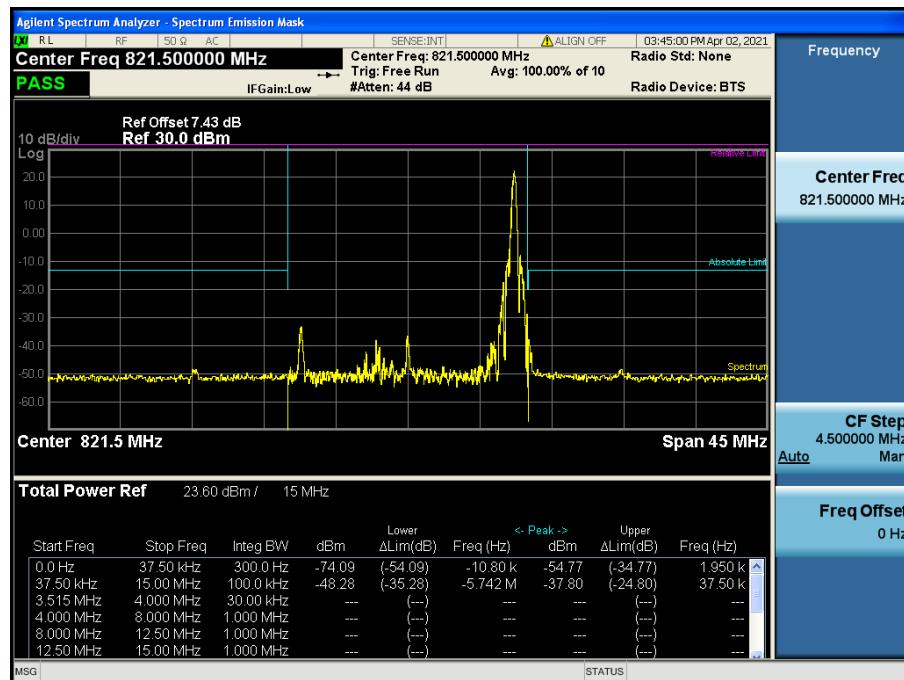

LTE Band 26 / 15MHz / 16QAM - RB Size/Offset (1/74)




LTE Band 26 / 10MHz / QPSK - RB Size/Offset (25/0)

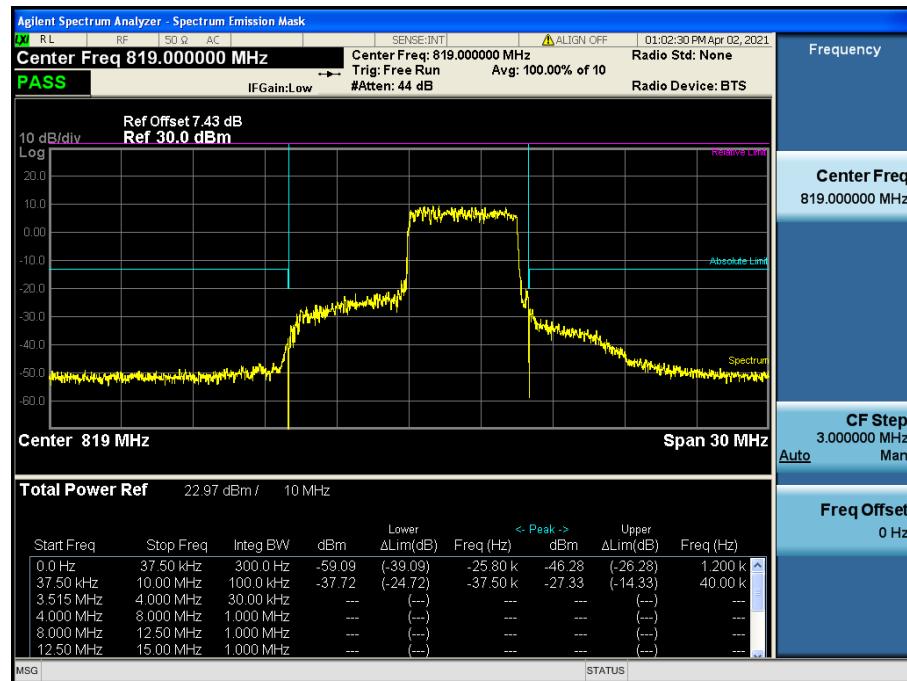

LTE Band 26 / 10MHz / QPSK - RB Size/Offset (25/25)




LTE Band 26 / 5MHz / 16QAM - RB Size/Offset (1/0)

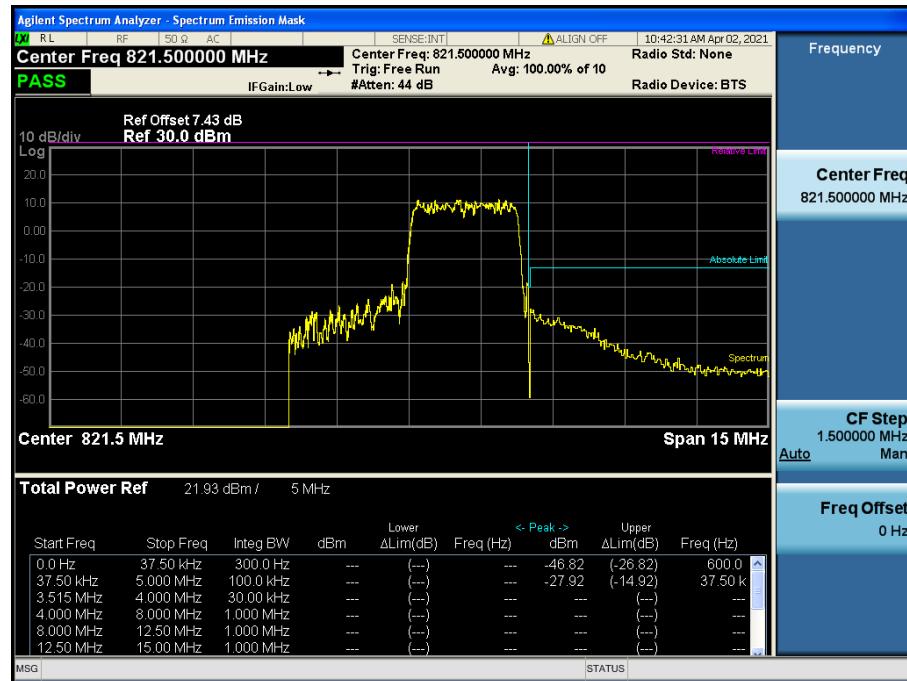

LTE Band 26 / 5MHz / 16QAM - RB Size/Offset (12/13)




LTE Band 26 / 3MHz / QPSK - RB Size/Offset (1/0)

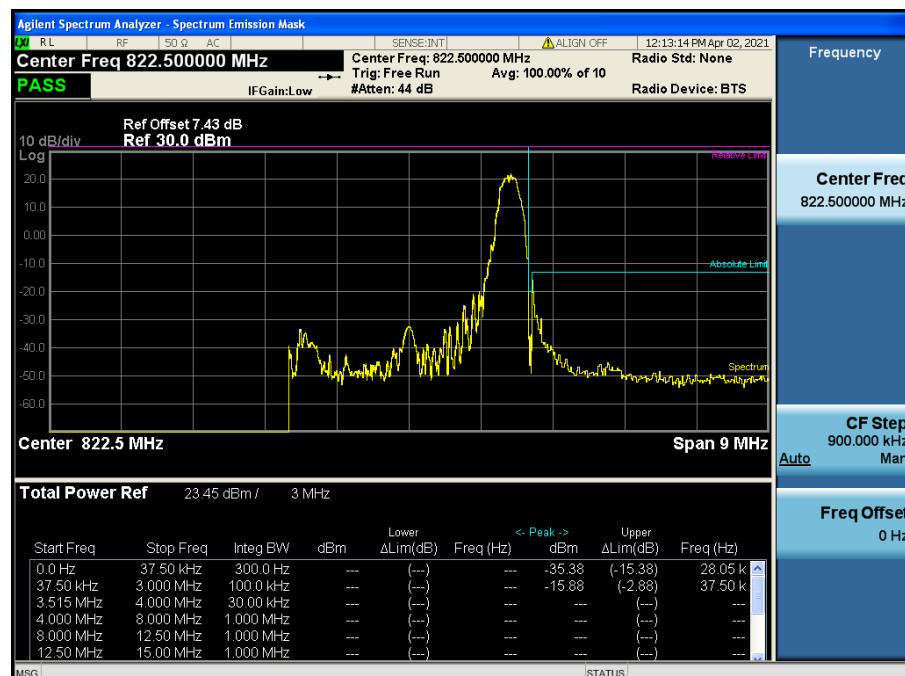

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (1/14)




LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (3/0)

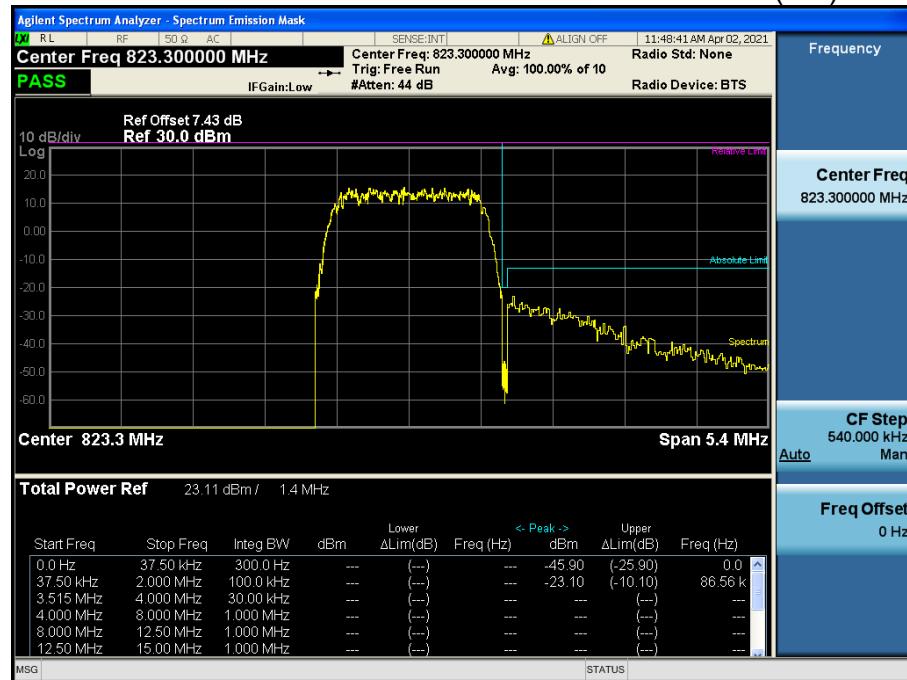


LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (6/0)


8.3 SPURIOUS AND HARMONICS EMISSIONS(Conducted)

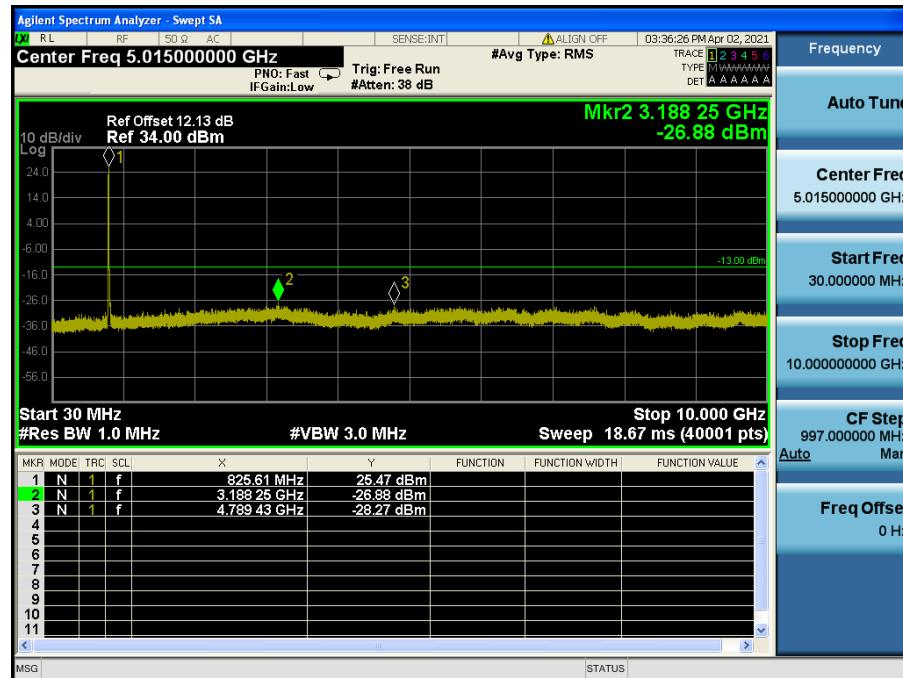


LTE Band 26 / 15MHz / QPSK - RB Size/Offset (75/0) - Low Channel

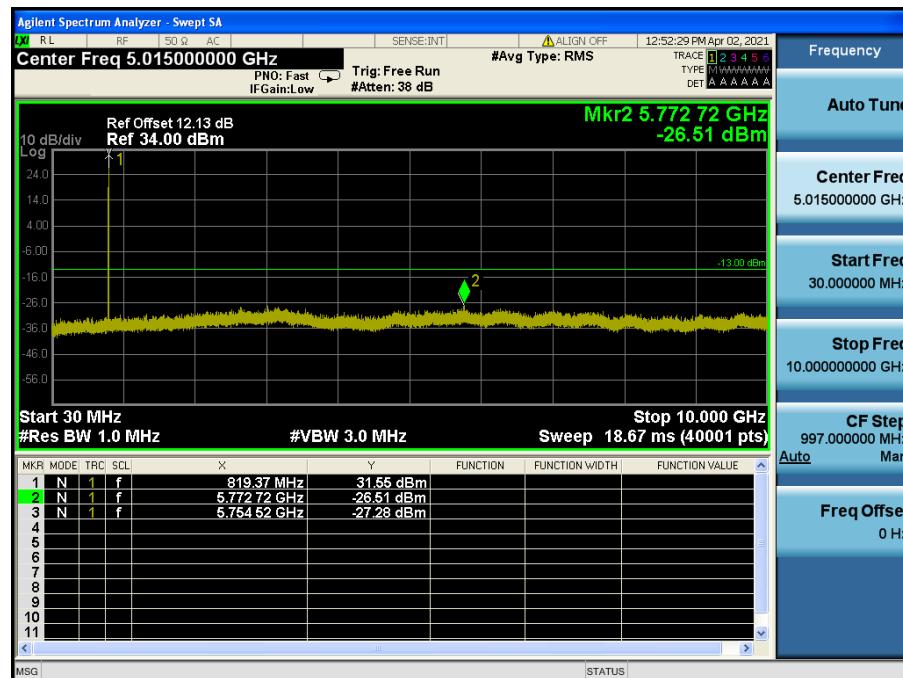


LTE Band 26 / 10MHz / QPSK - RB Size/Offset (1/36) - Mid Channel

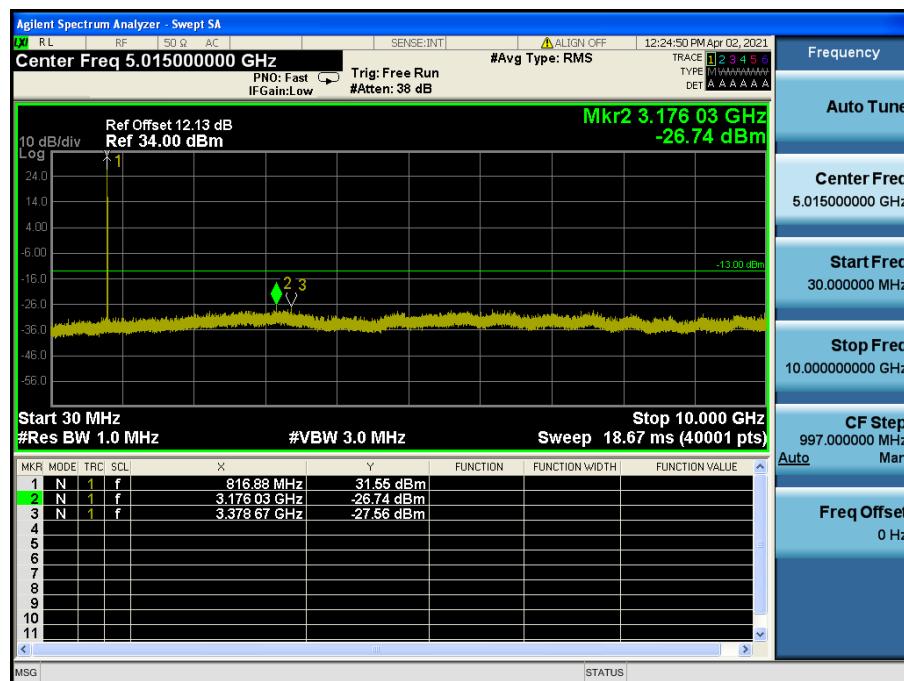


LTE Band 26 / 5MHz / QPSK - RB Size/Offset (1/12) - Low Channel

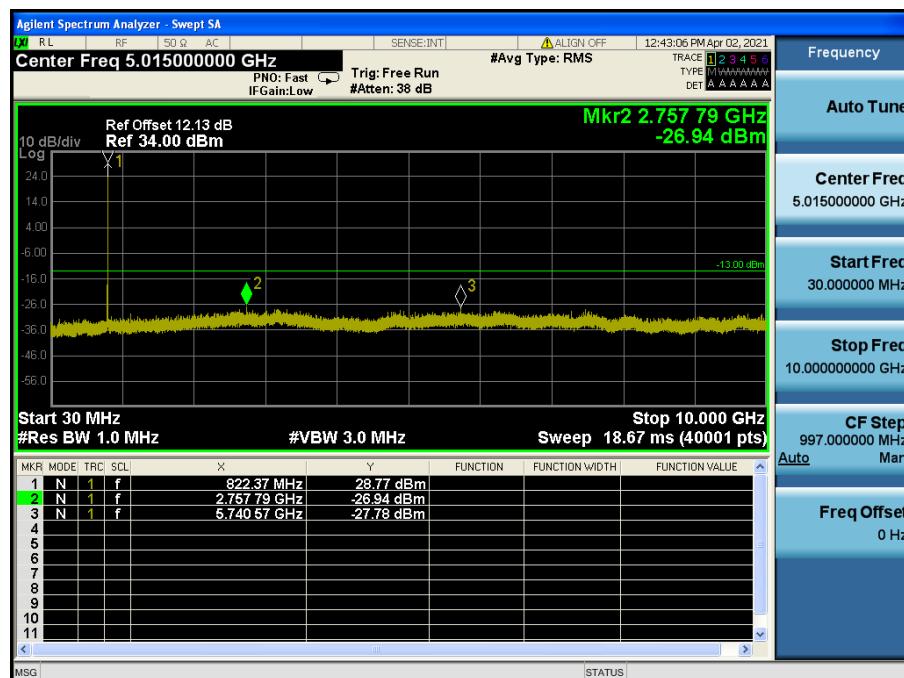


LTE Band 26 / 5MHz / QPSK - RB Size/Offset (12/6) - High Channel

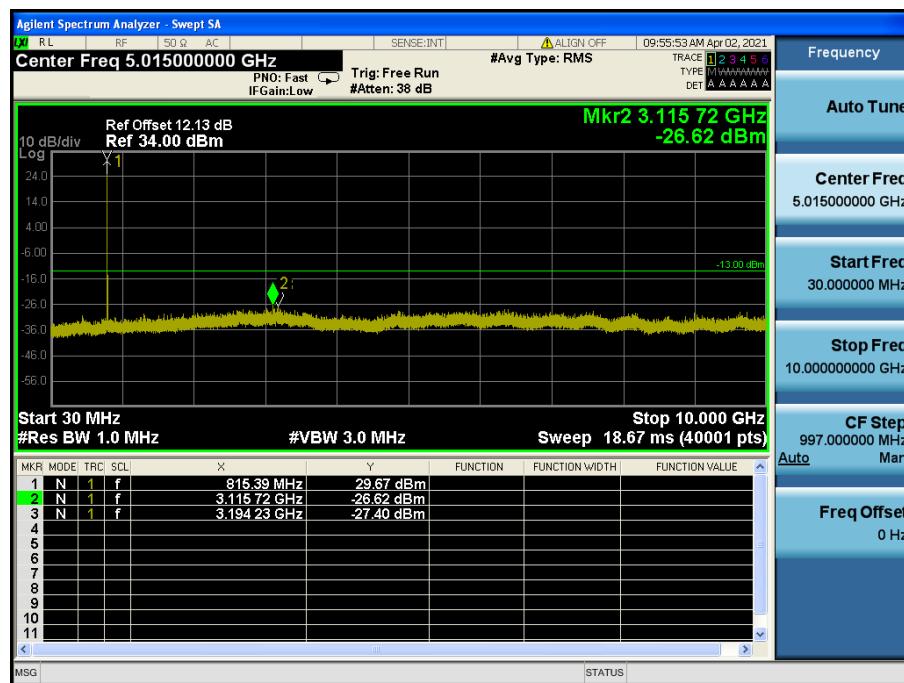


LTE Band 26 / 3MHz / 16QAM - RB Size/Offset (8/0) - Low Channel

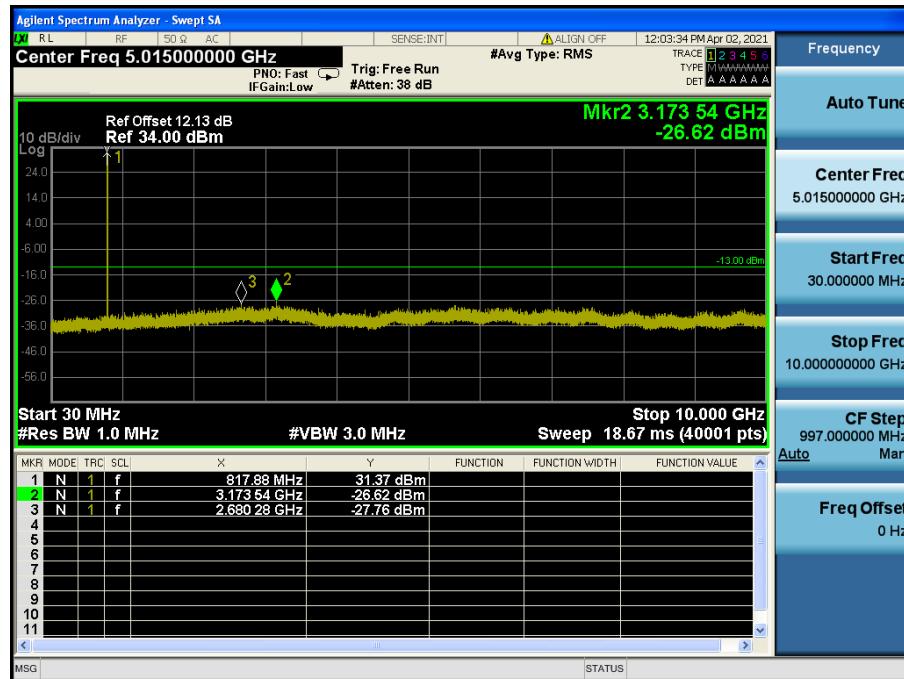


LTE Band 26 / 3MHz / QPSK - RB Size/Offset (1/0) - Mid Channel

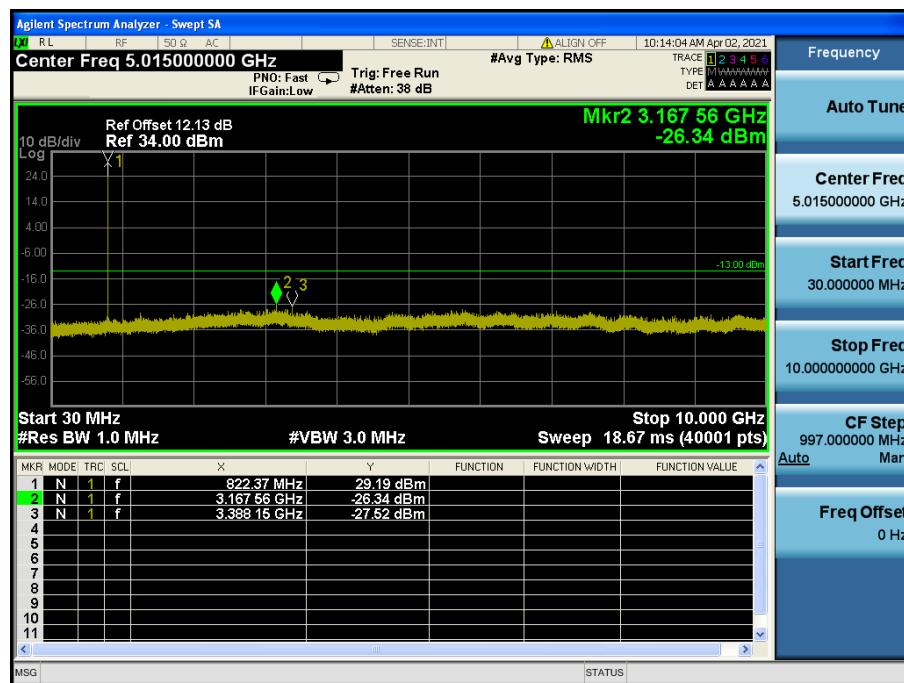


LTE Band 26 / 3MHz / 16QAM - RB Size/Offset (8/0) - High Channel

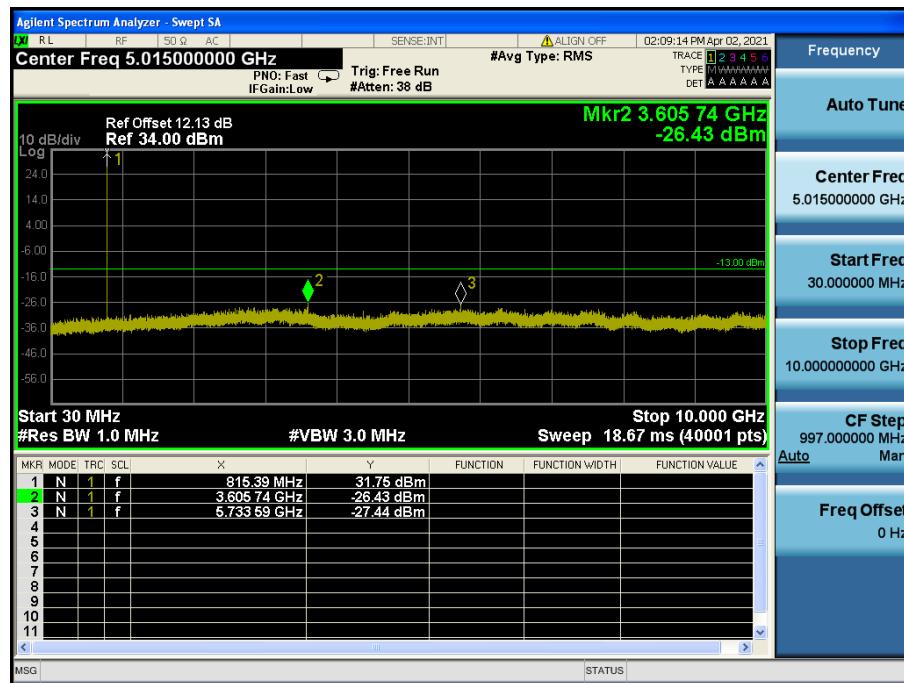

LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (1/5) – Low Channel

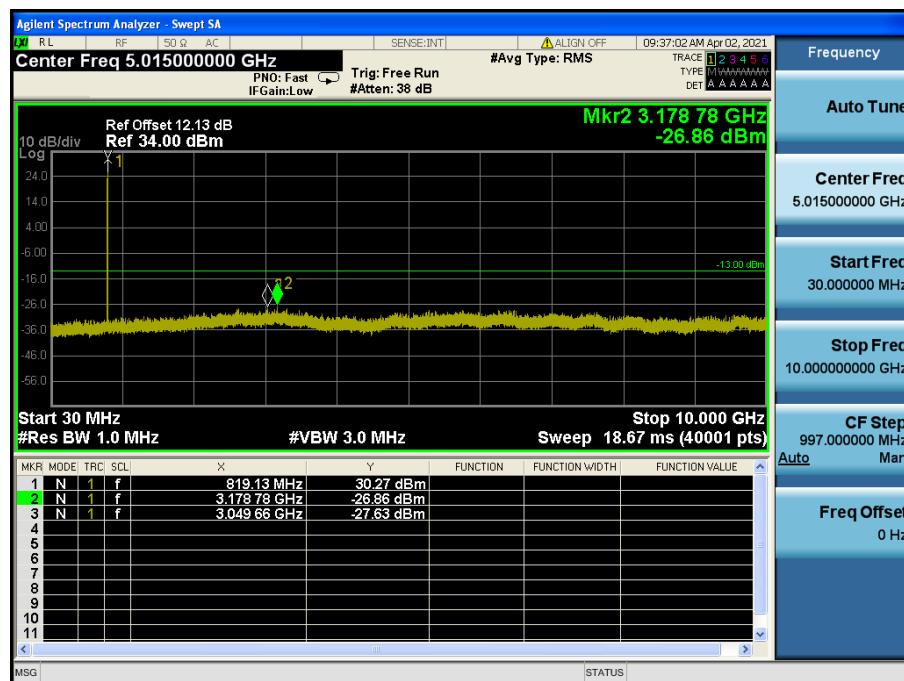


LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (6/0) – Mid Channel

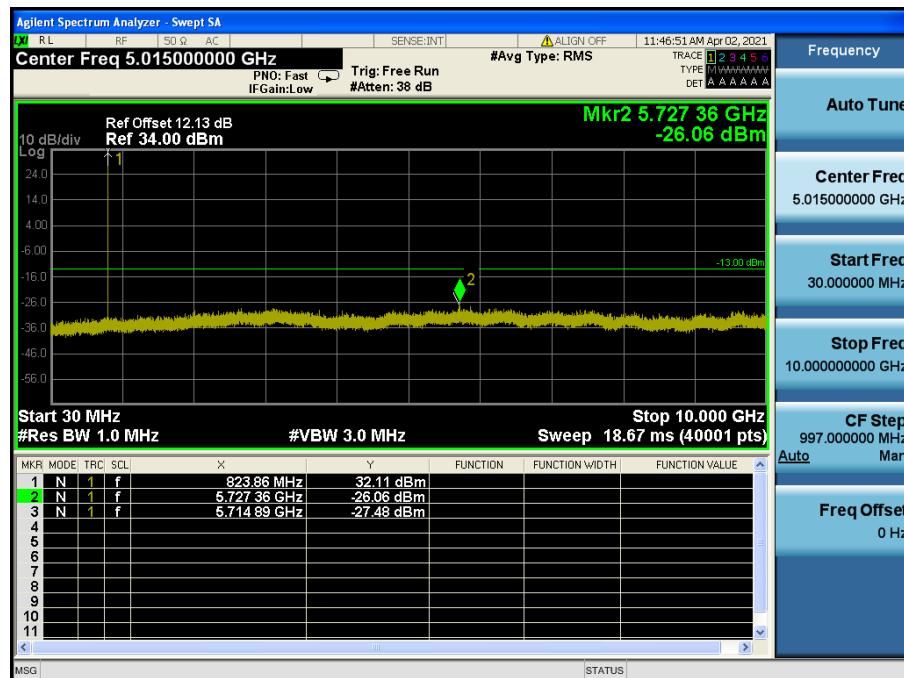


LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (3/3) – High Channel


8.4 EMISSION MASK (Conducted)

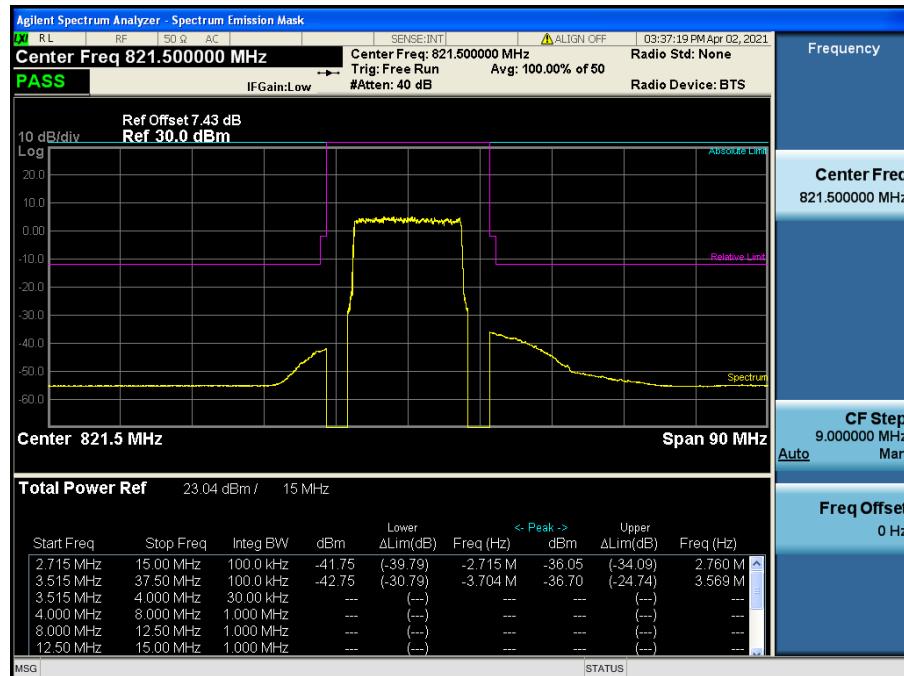


LTE Band 26 / 15MHz / QPSK - RB Size/Offset (75/0) - Low Channel

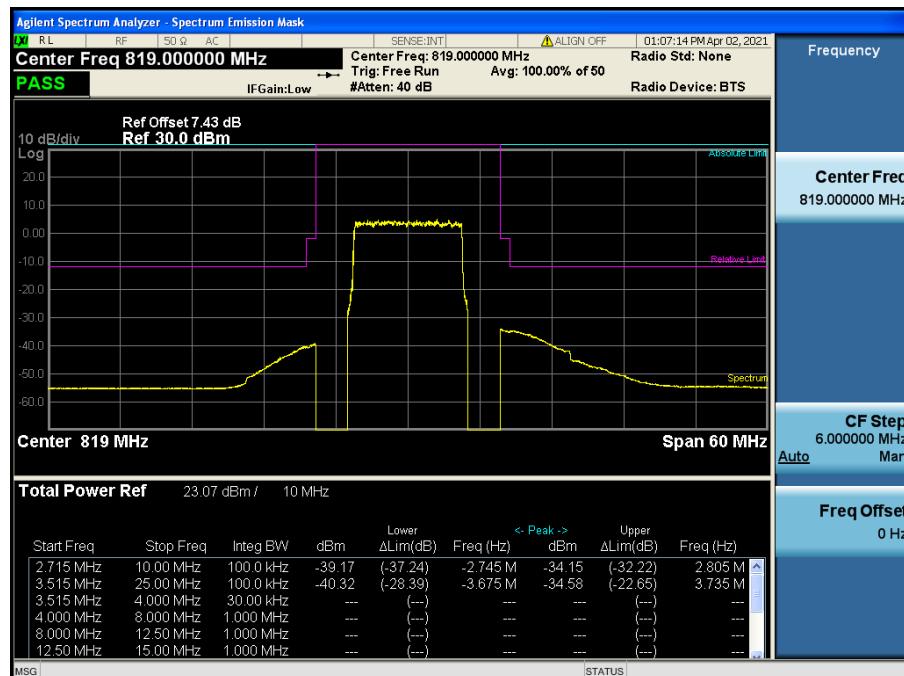


LTE Band 26 / 10MHz / QPSK - RB Size/Offset (50/0) - Low Channel

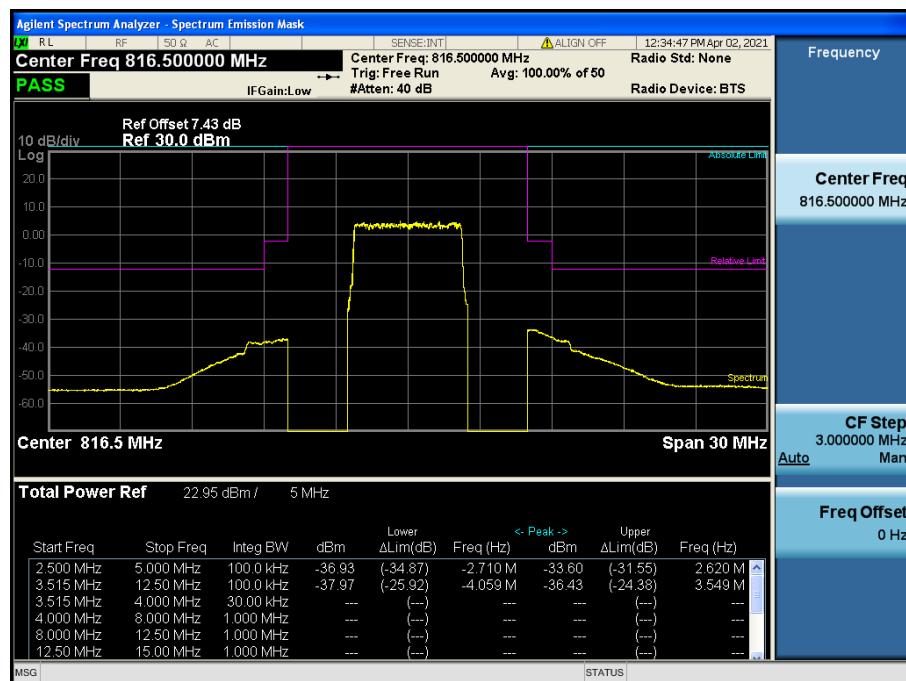


LTE Band 26 / 5MHz / QPSK - RB Size/Offset (25/0) - Low Channel

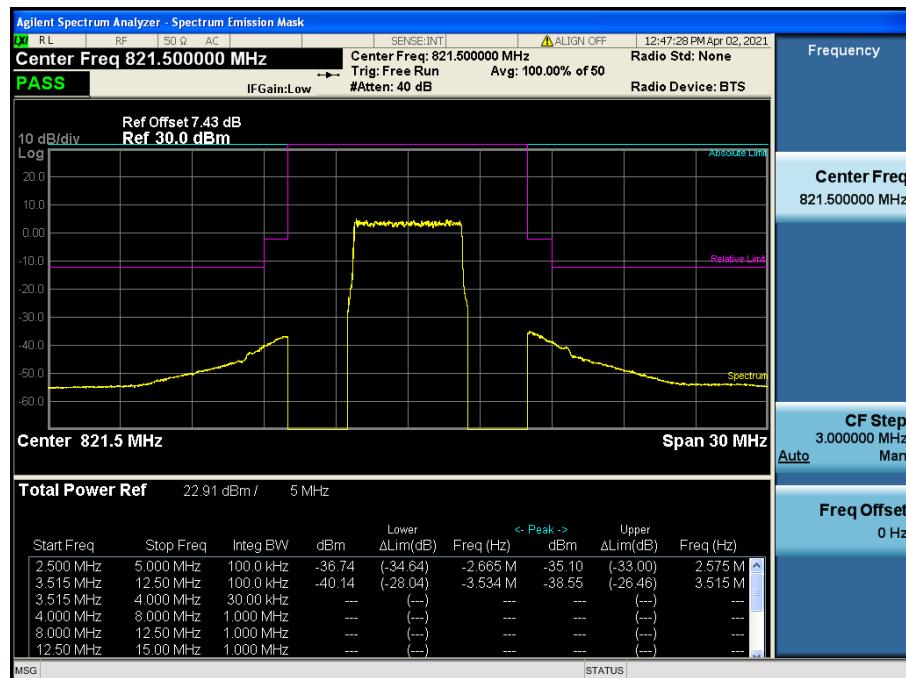

LTE Band 26 / 5MHz / QPSK - RB Size/Offset (25/0) - High Channel

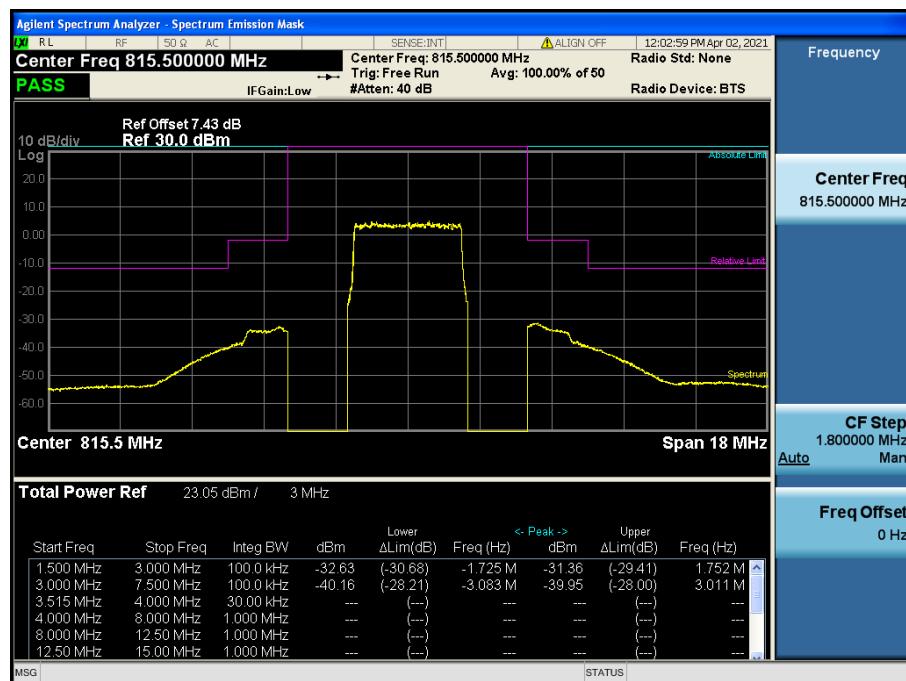

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (15/0) - Low Channel

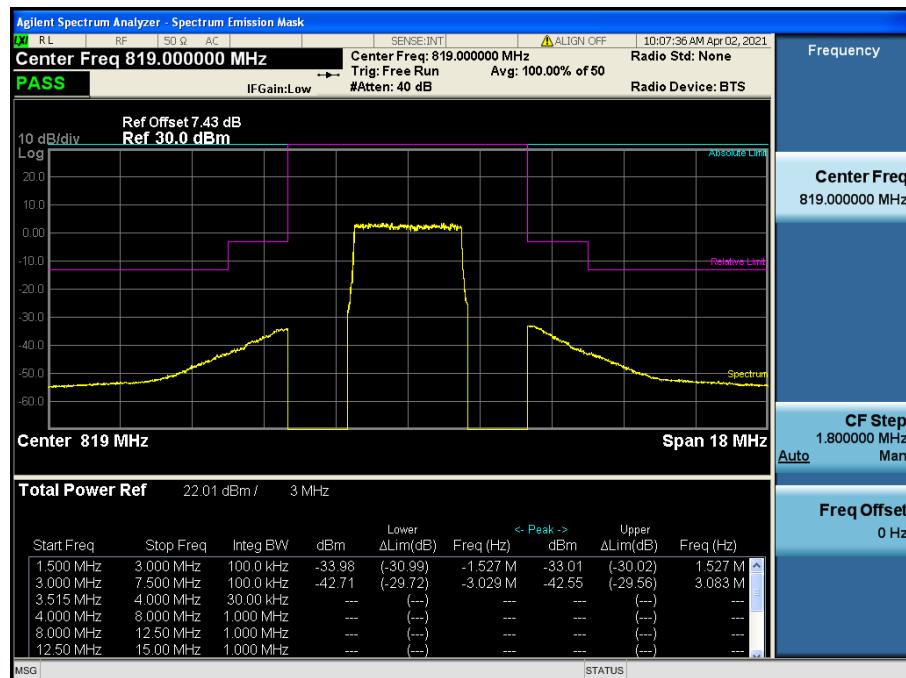

LTE Band 26 / 3MHz / 16QAM - RB Size/Offset (15/0) - Mid Channel




LTE Band 26 / 3MHz / 16QAM - RB Size/Offset (15/0) - High Channel



LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (6/0) - Low Channel



LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (6/0) - Mid Channel

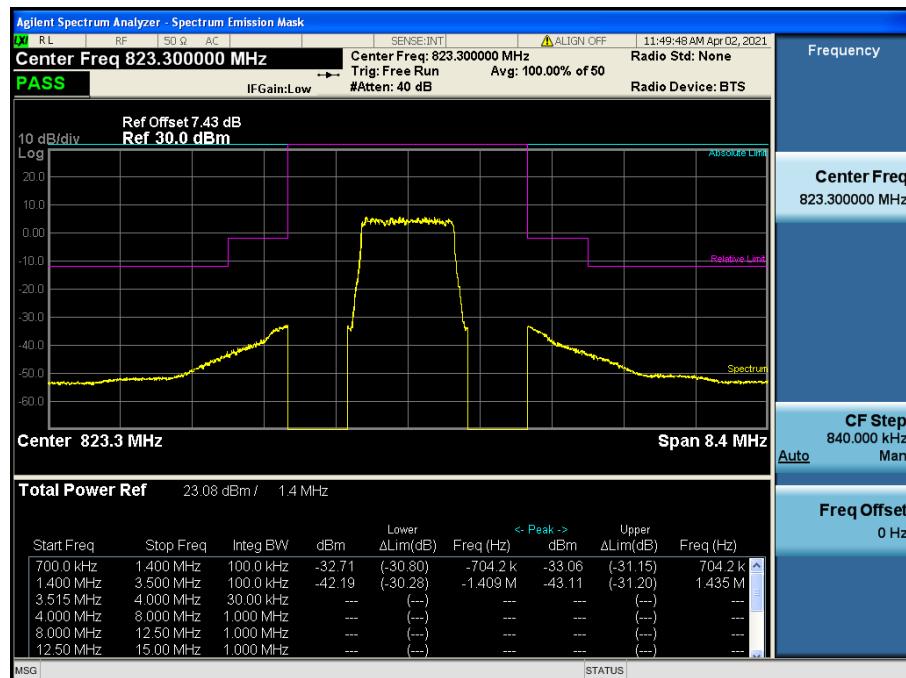

LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (6/0) - High Channel