




Test report No:
24C0966R-RF-US-P09V01

FCC TEST REPORT

Product Name	Mobile Computer
Model and /or type reference	PM68
Trademark	N/A
FCC ID	V2X-PM68
Applicant's name / address	Point Mobile Co.,LTD. A-26F, Building Gasan Publik 178, Digital-ro, Geumcheon-gu Seoul, 08513 Republic of Korea
Test method requested, standard	47 CFR FCC Part 15 (Section 15.407) ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Jun Xu/ Project Engineer 
Approved by (name / position & signature)	Frank He / Manager 
Date of issue	2025-03-27
Report Version	V1.0
Report template No	Template_FCC-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations.....	6
Document History.....	7
Remarks and Comments	7
Used Equipment.....	8
Uncertainty	12
1 General Information	13
1.1 General Description of the Item(s).....	13
1.2 Antenna Information	15
1.3 Channel List.....	16
1.4 Data Rate.....	17
2 Description of Test Setup.....	18
2.1 Operating mode(s) used for tests	18
2.2 Auxiliary equipment / Test software for the EUT	19
2.3 Test Configuration / Block diagram used for tests.....	20
2.4 Testing process	22
3 Verdict summary section.....	23
3.1 Standards	23
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	23
3.3 Overview of results	24
3.4 Power setting in test	25
3.5 Test Matrix	27
3.6 Test Facility.....	28
4 Test Results	29
4.1 AC Power Line Conducted Emission.....	29
4.1.1 Limit	29
4.1.2 Test Setup	29
4.1.3 Test Procedure	29
4.2 Radiated Emissions	30
4.2.1 Limit	30
4.2.2 Test Setup	32
4.2.3 Test Procedure	33

4.3	Emission bandwidth	34
4.3.1	Limit	34
4.3.2	Test Setup	34
4.3.3	Test Procedure	34
	Test Method	34
4.4	6dB bandwidth	35
4.4.1	Limit	35
4.4.2	Test Setup	35
4.4.3	Test Procedure	35
4.5	Duty cycle	36
4.5.1	Limit	36
4.5.2	Test Setup	36
4.5.3	Test Procedure	36
4.6	Power Output	37
4.6.1	Limit	37
4.6.2	Test Setup	38
4.6.3	Test Procedure	38
4.7	Maximum Power Spectral Density	39
4.7.1	Limit	39
4.7.2	Test Setup	39
4.7.3	Test Procedure	40
4.8	Radiated Emission Band Edge	41
4.8.1	Limit	41
4.8.2	Test Setup	43
4.8.3	Test Procedure	43
4.9	Frequency Stability	45
4.9.1	Limit:	45
4.9.2	Test Setup	45
4.9.3	Test Procedure	45
4.10	Antenna Requirement	46
4.10.1	Limit:	46
4.10.2	Antenna Connector Construction:	46
5	Test setup photo and EUT Photo	47
6	Test Result	48
	Appendix A: Conducted Emission	48
	Appendix B: Radiated Emission	50
	Appendix C: Emission bandwidth and occupied bandwidth	170



Appendix D: 6dB Emission Bandwidth	232
Appendix E: Duty cycle	240
Appendix F: Power Output.....	271
Appendix G: Maximum Power Spectral Density	273
Appendix H: Radiated Emission Band Edge	304

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location A	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Test Location B	No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China
Date(receive sample)	Feb. 17, 2025
Date (start test)	Feb. 18, 2025
Date (finish test)	Mar. 18, 2025
Note: Radiated Emission and Radiated Emission Band Edge were completed at Test Location B, and other tests were completed at Test Location A.	

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
24C0966R-RF-US-P09V01	V1.0	Initial issue of report.	2025-03-27

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.407).
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 Data Rate;

USED EQUIPMENT

Test Location A :Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	2024.05.15	2025.05.14	V 4.0.60	N/A
Coaxial Cable	N/A	N/A	2477	2024.06.11	2025.06.10	N/A	N/A
Coaxial Cable	N/A	N/A	2478	2024.06.11	2025.06.10	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2024.04.21	2025.04.20	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	RF07	2024.07.04	2025.07.03	N/A	N/A
Test system							
Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2024.10.26	2025.10.25	A.14.03	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	2025.01.26	2026.01.25	N/A	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2024.05.12	2025.05.11	B.01.96	N/A
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2024.05.12	2025.05.11	N/A	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2024.07.06	2025.07.05	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A	N/A	V3.0.22

Test Location A :AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100726	2024.07.06	2025.07.05	4.42 SP1	N/A
Two-Line V-Network	R&S	ENV 216	101044	2024.10.26	2025.10.25	N/A	N/A
Two-Line V-Network	R&S	ENV 216	101189	2024.07.06	2025.07.05	N/A	N/A
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2024.04.20	2025.04.19	N/A	N/A
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	2024.04.27	2025.04.26	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2024.02.27	2025.02.26	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2025.02.25	2026.02.24	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	EMC01	2024.07.04	2025.07.03	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	N/A

Test Location A :Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100176	2024.05.12	2025.05.11	4.42 SP3	N/A
Loop Antenna	R&S	HFH2-Z2E	101149	2024.03.27	2025.03.26	N/A	N/A
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2024.09.08	2025.09.07	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2024.07.04	2025.07.03	N/A	N/A
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2024.04.27	2025.04.26	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Test Location A: Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EXA Spectrum Analyzer	Keysight	N9020B	MY60112218	2024.11.02	2025.11.01	A.31.05	N/A
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2024.04.27	2025.04.26	N/A	N/A
Preamplifier	CHENGYI	EMC184045SE	980263	2024.07.06	2025.07.05	N/A	N/A
DRG Horn	ETS-Lindgren	3117	00167055	2024.08.29	2025.08.28	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2024.05.30	2025.05.29	N/A	N/A
Filter Switch Box	MVE	MSW-F196	C070001S	2024.04.20	2025.04.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	THM-024	2024.05.17	2025.05.16	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2025.01.18	2026.01.17	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G-2	2024.05.26	2025.05.25	N/A	N/A
Cable	Rosenberger	LA1-C011-1000	0523	2024.05.26	2025.05.25	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Test Location B: Radiated Emission Band Edge / AC103

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
Signal analyzer	keysight	N9020B	MY63490118	2024.07.26	2025.07.25	A 08.54	N/A
Bilog Antenna	TESEQ	CBL6112D	64164	2024.11.23	2025.11.22	N/A	N/A
Horn Antenna	RF SPIN	DRH18-E	KV2D11A18ES	2024.11.02	2025.11.01	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01312	2024.10.28	2025.10.27	N/A	N/A
Amplifier	ESE	LNA0118	LNA23100009	2024.08.10	2025.08.09	N/A	N/A
Amplifier	Tonscend	TAP01018048S	AP23J8060307	2024.11.16	2025.11.15	N/A	N/A
Band Reject Filter Group	Tonscend	JS0806-F	23G806F0701	2024.11.20	2025.11.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	026	2024.09.04	2025.09.03	N/A	N/A
Test Software	Tonscend	JS36	N/A	N/A	N/A	N/A	5.0.0

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item Test Location A	Uncertainty
AC Power Line Conducted Emission	± 2.92 dB
Peak Power Output	± 1.13 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.60 dB 200MHz~1GHz: 4.10 dB Vertical: 30MHz~200MHz: 4.80 dB 200MHz~1GHz: 4.10 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~40GHz: 4.70 dB Vertical: 18GHz~40GHz: 4.60 dB
RF antenna conducted test	± 1.13 dB
Radiated Emission Band Edge	± 5.00 dB
DTS Bandwidth	± 279 Hz
Occupied Bandwidth	± 279 Hz
Power Density	± 1.13 dB

Test item Test Location B	Uncertainty
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.86 dB 300MHz~1GHz: 4.86 dB Vertical: 30MHz~200MHz: 4.92 dB 300MHz~1GHz: 4.92 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.99 dB Vertical: 1GHz~18GHz: 5.76 dB Horizontal: 18GHz~40GHz: 5.99 dB Vertical: 18GHz~40GHz: 5.76 dB
Radiated Emission Band Edge	± 5.99 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Mobile Computer
Model No.	PM68
Trademark.	N/A
FCC ID.....	V2X-PM68
Hardware Version.....	MP
Software Version	68.00
Manufacturer	Point Mobile Co.,LTD.
Manufacturer Address.....	A-26F, Building Gasan Publik 178, Digital-ro, Geumcheon-gu Seoul, 08513 Republic of Korea

Wireless specification.....:	WIFI						
Transmit modes.....:	☒	802.11a	☒	802.11n(20MHz)	☒	802.11n(40MHz)	
	☒	802.11ac(20MHz)	☒	802.11ac(40MHz)	☒	802.11ac(80MHz)	
Frequency Range	☒	802.11a/n/ac(20MHz):5180MHz~5240Mz 802.11n/ac(40MHz):5190MHz~5230Mz 802.11ac(80MHz):5210Mz					
		☐	Ooutdoor access point				
		☐	RF Module				
		☐	Fixed point-to-point AP				
		☒	Mobile and Portable Client				
	☒	802.11a/n/ac(20MHz):5260MHz~5320Mz 802.11n/ac(40MHz):5270MHz~5310Mz 802.11ac(80MHz):5290Mz					
	☒	802.11a/n/ac(20MHz):5500MHz~5700MHz 802.11n/ac(40MHz):5510MHz~5670Mz 802.11ac(80MHz):5530~5610Mz					
	☒	802.11a/n/ac(20MHz):5745MHz~5825MHz 802.11n/ac(40MHz):5755MHz~5805Mz 802.11ac(80MHz):5775Mz					
Type of Modulation & Data Rate:	Refer to Clause 1.4						
Number of channels	802.11a/n/ac(20MHz): 24 802.11n/ac(40MHz): 11 802.11ac(80MHz): 5						

Rated power supply :	Voltage and Frequency	
	☐	AC: 220 - 240 V, 50/60 Hz
	☐	AC: 110-130 V, 50/60 Hz, 13.5W
	☐	DC: 24 Vdc
	☒	Battery: 3.8V
	☒	Adapter: Input:100-240V, 50/60 Hz,0.3A; Output:5.0V,2.0A,10W
Mounting position :	☐	Tabletop equipment
	☐	Door mounted equipment
	☐	Floor standing equipment
	☒	Hand-held/Portable equipment
	☐	Other:

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
Antenna technology.....	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☒ PIFA
			☐ FPC
			☐ Others.....
Antenna Gain	5150-5250: 1.04 dBi 5250-5350: 0.79 dBi 5470-5725: 2.99 dBi 5725-5850: 1.18 dBi		

1.3 Channel List

802.11a/n/ac(20MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5550 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n/ac(40MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz	N/A	N/A

802.11ac(80MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530MHz	122	5610 MHz
155	5775 MHz	N/A	N/A	N/A	N/A	N/A	N/A

1.4 Data Rate

IEEE 802.11a

Modulation	R	Data Rate(Mb/s)
BPSK	1/2	6
BPSK	3/4	9
QPSK	1/2	12
QPSK	3/4	18
16-QAM	1/2	24
16-QAM	3/4	36
64-QAM	2/3	48
64-QAM	3/4	54

Note : We have evaluated low/mid/high data rate, the blue font is the highest power data rate.

IEEE 802.11n/ac

Spatial streames	MCS Index	Modulation	R	Data Rate(Mb/s)					
				400ns GI			800ns GI		
				20MHz	40MHz	80MHz	20MHz	40MHz	80MHz
1	0	BPSK	1/2	7.2	15	32.5	6.5	13.5	29.3
1	1	QPSK	1/2	14.4	30	65	13	27	58.5
1	2	QPSK	3/4	21.7	45	97.5	19.5	40.5	87.8
1	3	16-QAM	1/2	28.9	60	130	26	54	117
1	4	16-QAM	3/4	43.3	90	195	39	81	175.5
1	5	64-QAM	2/3	57.8	120	260	52	108	234
1	6	64-QAM	3/4	65	135	292.5	58.5	121.5	263.3
1	7	64-QAM	5/6	72.2	150	325	65	135	292.5
1	8	256QAM	3/4	86.7	180	390	78	162	351
1	9	256QAM	5/6	N/A	200	433.3	N/A	180	390

Note : We have evaluated low/mid/high data rate, the blue font is the highest power data rate.

Note: The general description of the Item(s), antenna information, data rate and channel list in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n (20MHz)
	Mode 3: Transmit by 802.11n (40MHz)
	Mode 4: Transmit by 802.11ac (20MHz)
	Mode 5: Transmit by 802.11ac (40MHz)
	Mode 6: Transmit by 802.11ac (80MHz)


Note 1: Regards to the frequency band operation: the lowest, middle and highest frequency channel were selected to perform the test, then shown on this report.

Note 2: For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case on this report.


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) N/A	N/A	N/A	N/A
(2) N/A	N/A	N/A	N/A
(3) N/A	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
N/A	N/A	N/A	N/A

2.3 Test Configuration / Block diagram used for tests

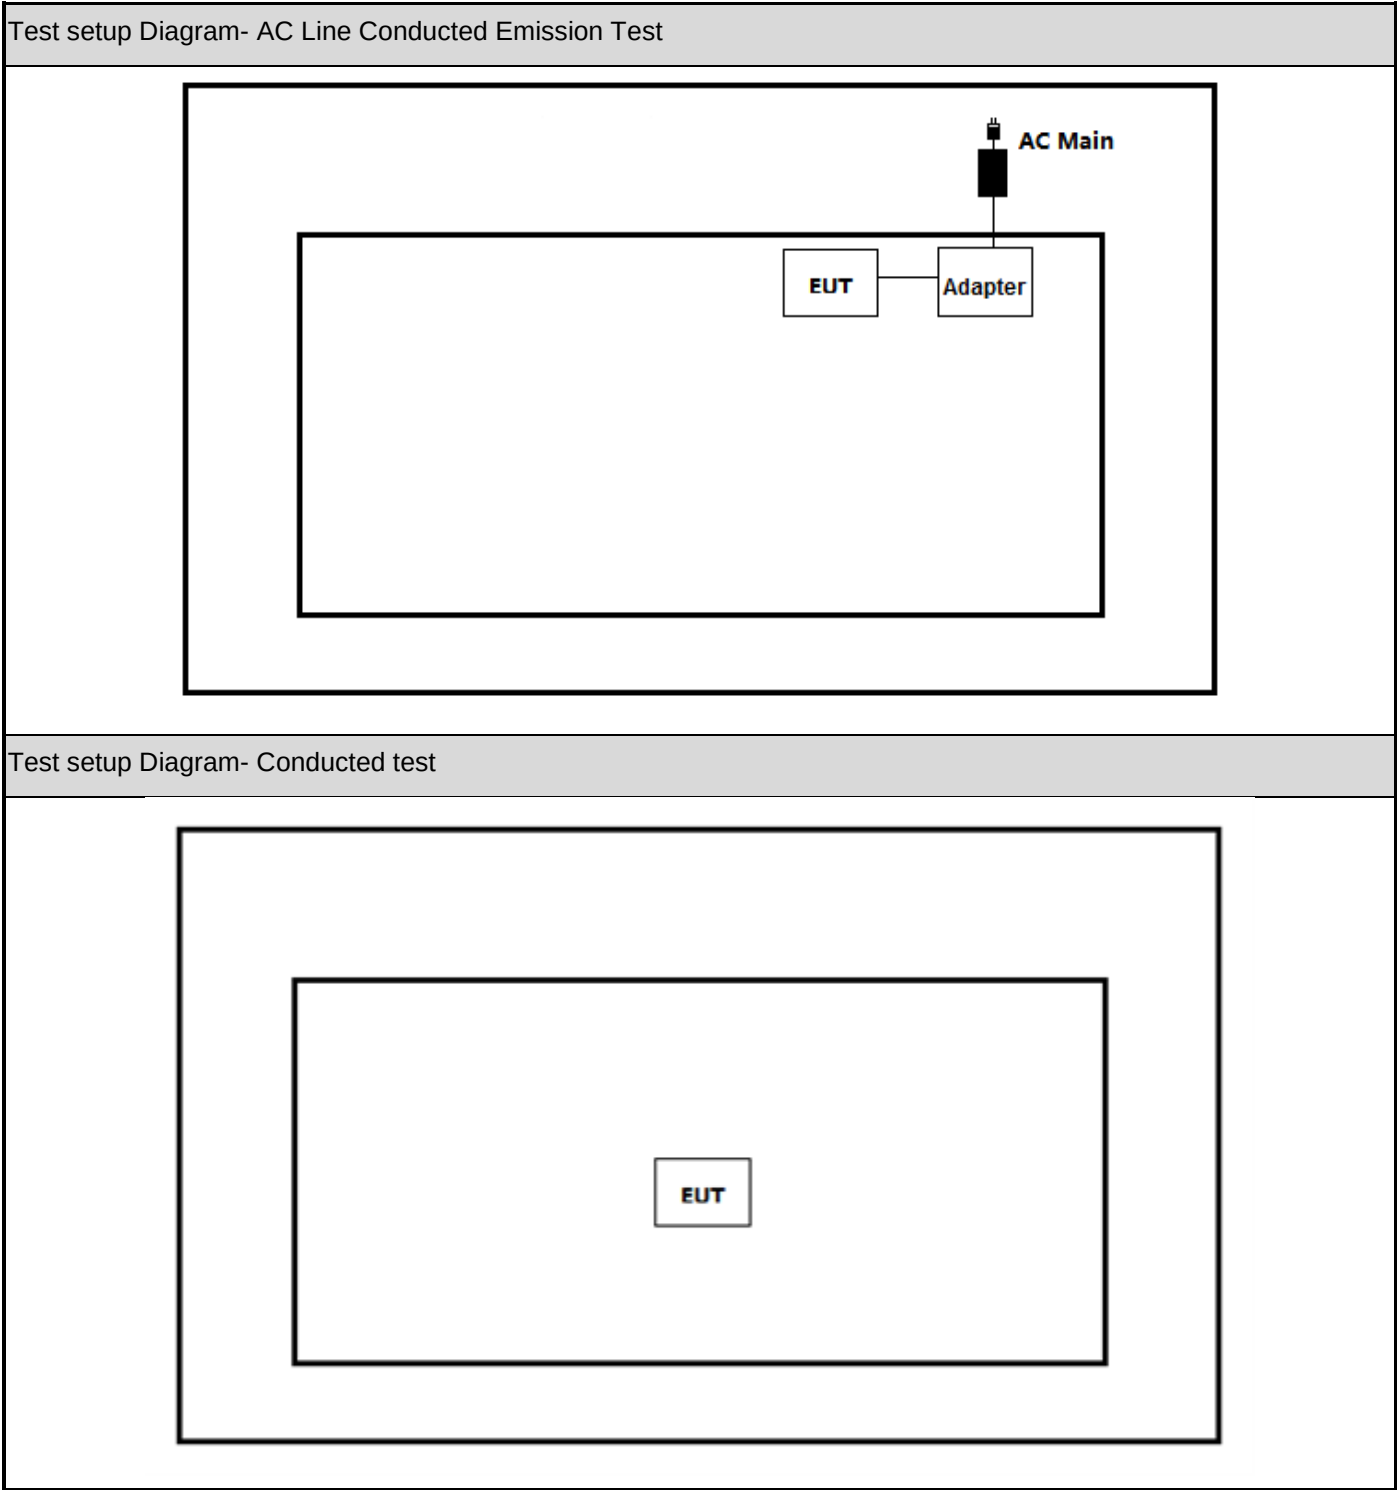

Test setup Diagram- Radiated Emission

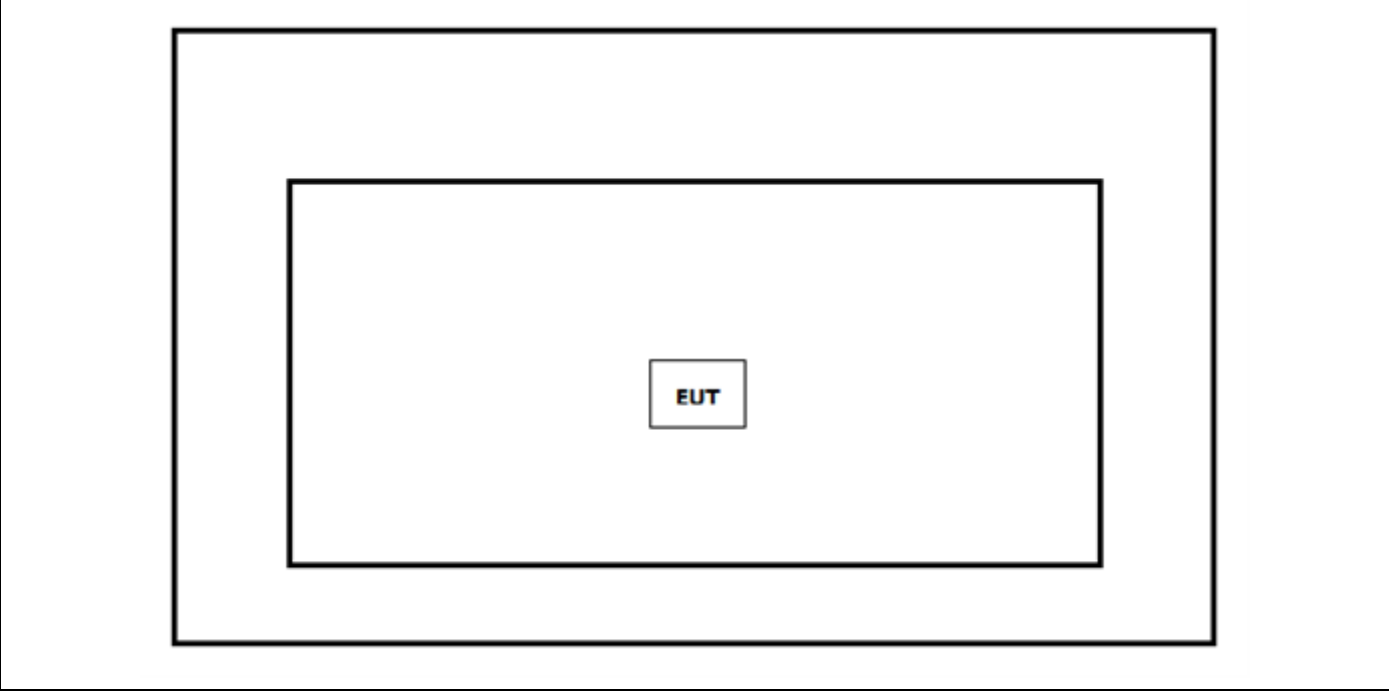

2.4 Testing process

1	Setup the EUT shown in Section 2.3.
2	Enter the engineering code on the EUT.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
FCC CFR Title 47 Part 15 Subpart E	2024	FCC CFR Title 47 Part 15 Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	2017	This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules.

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.
(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test case of FCC	Basic standard(s)	Verdict	Remark
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.207	PASS	Test data please refer to Appendix A
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.209	PASS	Test data please refer to Appendix B
Emission bandwidth and occupied bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	Test data please refer to Appendix C
6dB Emission Bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	PASS	Test data please refer to Appendix D
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix E
Power Output	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	Test data please refer to Appendix F
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	Test data please refer to Appendix G
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b)	PASS	Test data please refer to Appendix H
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(g)	N/A(See Note)	N/A(See Note)
Dynamic Frequency Selection (DFS)	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(h)	PASS	Test report please refer to 24C0966R-RF-US-DFS-P09V02
Antenna Requirement	FCC 15.203	PASS	---
Note: Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.			

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
802.11a	36	5180	17.5
	44	5220	17.5
	48	5240	17.5
	52	5260	17.5
	60	5300	17.5
	64	5320	17.5
	100	5500	17.5
	116	5580	17.5
	140	5700	17.5
	149	5745	17.5
	157	5785	17.5
	165	5825	17.5
802.11n(20MHz)	36	5180	17.5
	44	5220	17.5
	48	5240	17.5
	52	5260	17.5
	60	5300	17.5
	64	5320	17.5
	100	5500	17.5
	116	5580	17.5
	140	5700	17.5
	149	5745	17.5
	157	5785	17.5
	165	5825	17.5
802.11n(40MHz)	38	5190	17.0
	46	5230	17.0
	54	5270	17.0
	62	5310	17.0
	102	5510	17.0
	118	5590	17.0
	134	5670	17.0
	151	5755	17.0
	159	5795	17.0

802.11ac(20MHz)	36	5180	17.5
	44	5220	17.5
	48	5240	17.5
	52	5260	17.5
	60	5300	17.5
	64	5320	17.5
	100	5500	17.5
	116	5580	17.5
	140	5700	17.5
	149	5745	17.5
	157	5785	17.5
	165	5825	17.5
802.11ac(40MHz)	38	5190	16.0
	46	5230	16.0
	54	5270	16.0
	62	5310	16.0
	102	5510	16.0
	118	5590	16.0
	134	5670	16.0
	151	5755	16.0
	159	5795	16.0
802.11ac(80MHz)	42	5210	16.0
	58	5290	16.0
	106	5530	16.0
	122	5610	16.0
	155	5775	16.0

3.5 Test Matrix

Test item	Mode: PM68	
	1(#1)	2(#2)
Conducted Emission	☐	☒
Radiated Emission	☐	☒
Emission bandwidth and occupied bandwidth	☒	☐
6dB Emission Bandwidth	☒	☐
Duty cycle	☒	☐
Power Output	☒	☐
Peak Power Spectral Density	☒	☐
Band Edge	☐	☒
Note: The only difference between sample #1 and sample #2 is whether to keep the original antenna, sample #1 is a conduction test product that removes the original antenna and is equipped with SMA wires, and sample #2 is a complete product that retains the original antenna.		

3.6 Test Facility

Tset Location A : FCC Designation Number: CN1199

Tset Location B : FCC Designation Number: CN1321

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207;	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

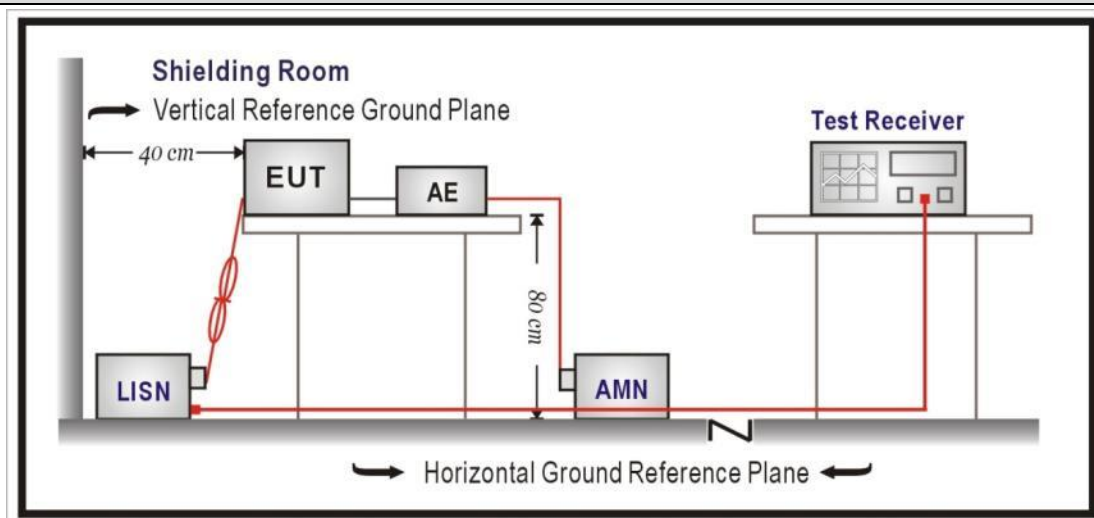

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Radiated Emissions**VERDICT: PASS****4.2.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205, RSS-Gen Issue 5:Section 8.9;

Restricted Bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.

Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).


FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit),

Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3

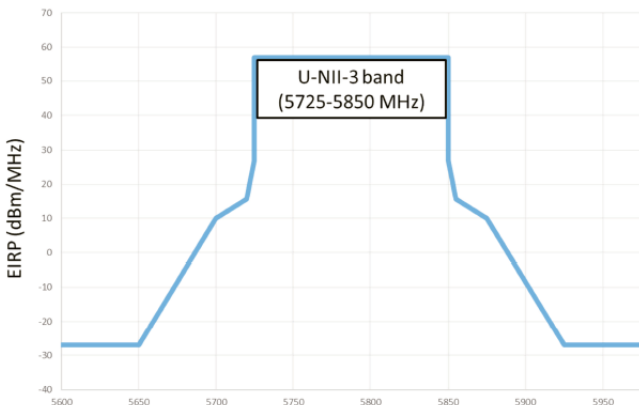
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)
5725 - 5850	 U-NII-3 band (5725-5850 MHz)

4.2.2 Test Setup


Below 30MHz Test Setup:

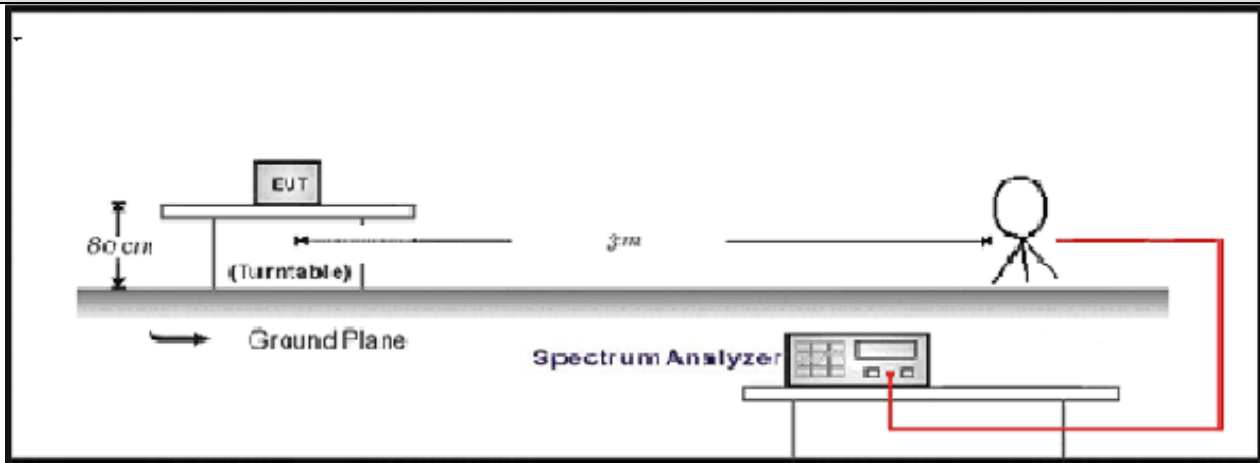

30MHz-1GHz Test Setup:

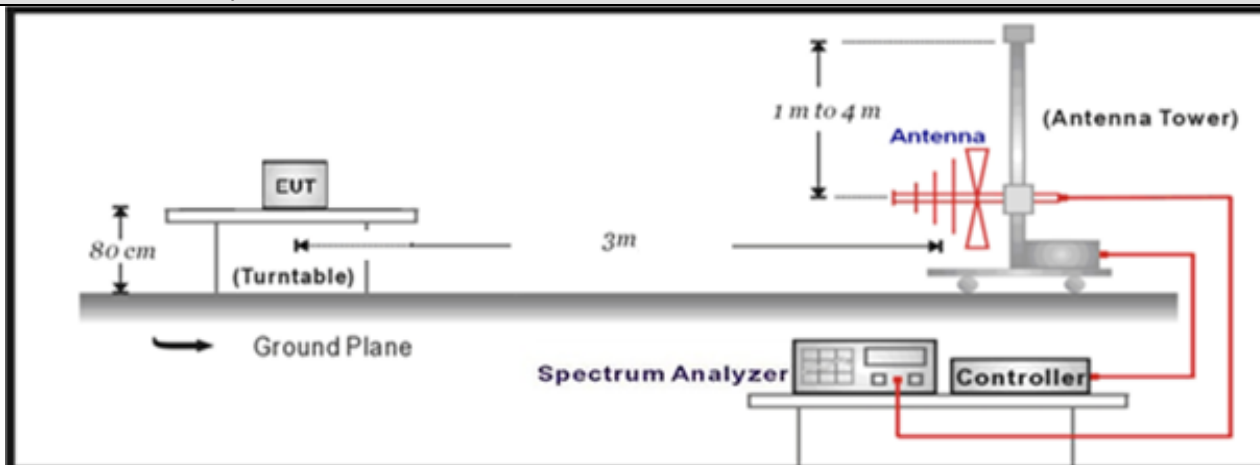

Above 1GHz Test Setup:

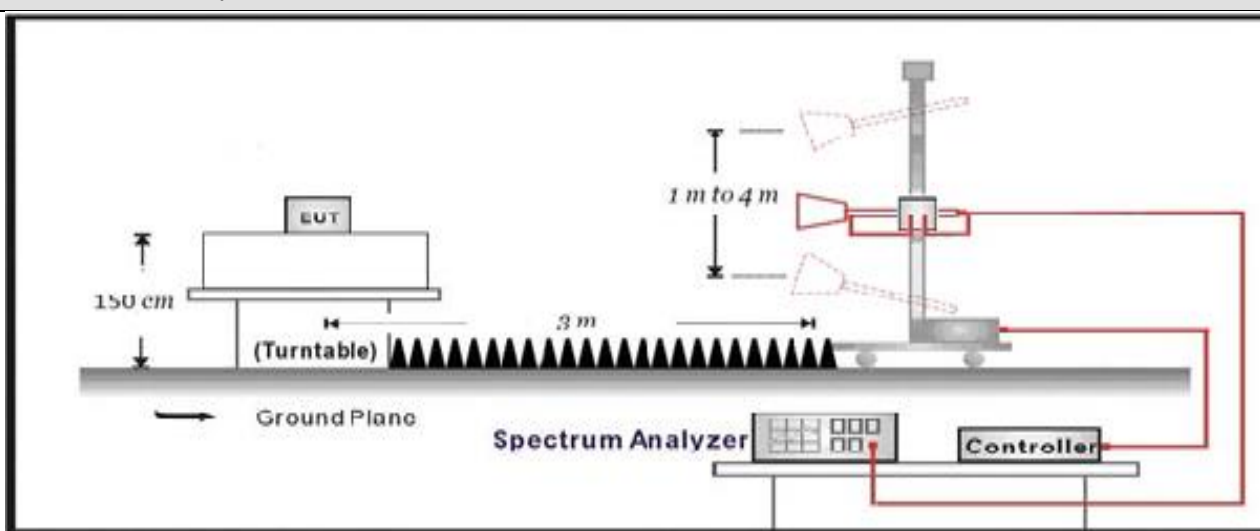


4.2.3 Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10	12.7.2	Emissions in restricted frequency bands
☒	ANSI C63.10	12.7.5	Radiated emission measurements
☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emission bandwidth**VERDICT: PASS****4.3.1 Limit**

Standard	FCC CFR Title 47 Part 15 Subpart E: Section 15.407.
-----------------	---


Whin the Frequency band.

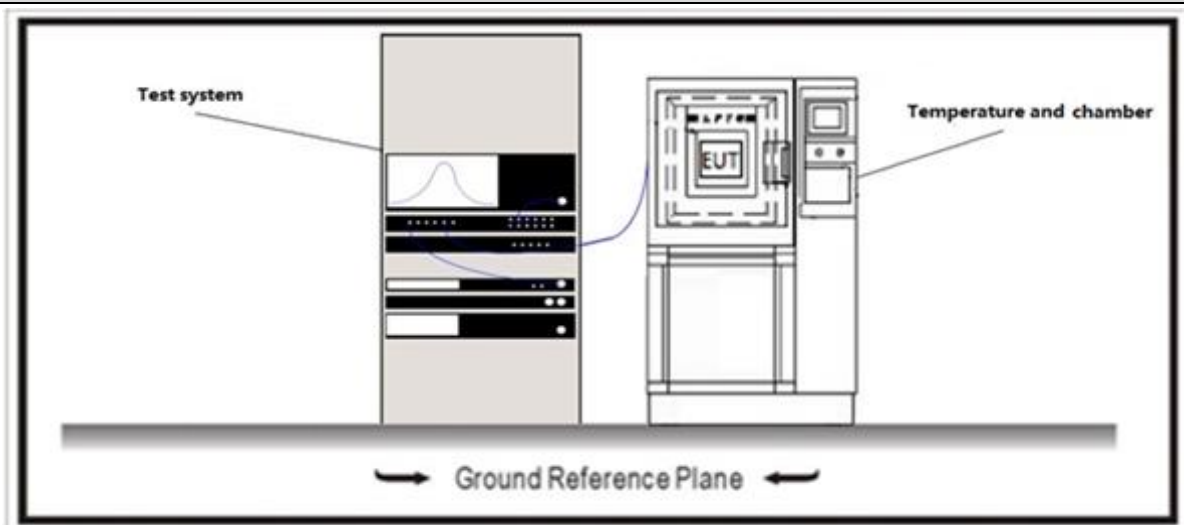4.3.2 Test Setup**4.3.3 Test Procedure****Test Method**

	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
☐	ANSI C63.10	12.4.1	Emission bandwidth (26dB)
☐	ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☒	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☐	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☒	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

4.4 6dB bandwidth**VERDICT: PASS****4.4.1 Limit****Standard**


FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e).

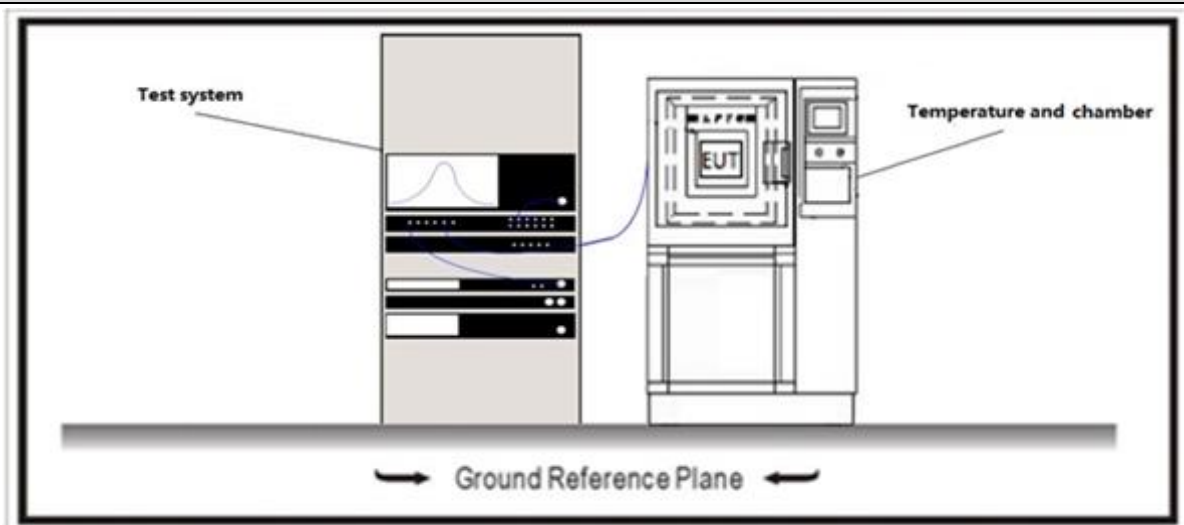6dB Bandwidth $\geq 500\text{KHz}$ **4.4.2 Test Setup****4.4.3 Test Procedure****Test Method**

	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
☐	ANSI C63.10	12.4.1	Emission bandwidth (26dB)
☐	ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☐	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☒	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☐	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

4.5 Duty cycle	VERDICT: PASS
----------------	---------------

4.5.1 Limit
N/A

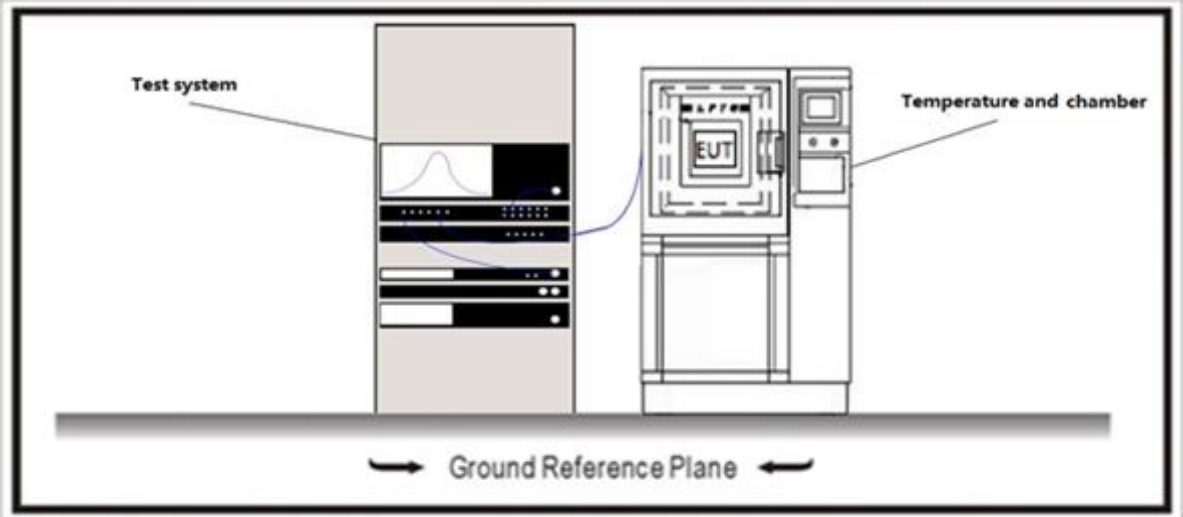4.5.2 Test Setup


4.5.3 Test Procedure			
References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.6 Power Output**VERDICT: PASS****4.6.1 Limit**

Standard		FCC Part 15 Subpart E Paragraph 15.407 (a)
☒	For the band 5.15-5.25 GHz	
☐	Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees	
☐	Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$	
☐	Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$	
☒	Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$	
☒	For the band 5.25-5.35 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the 5.47-5.725 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the band 5.725-5.85 GHz:	
☒	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$	
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W	

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum conducted output power .

4.6.2 Test Setup

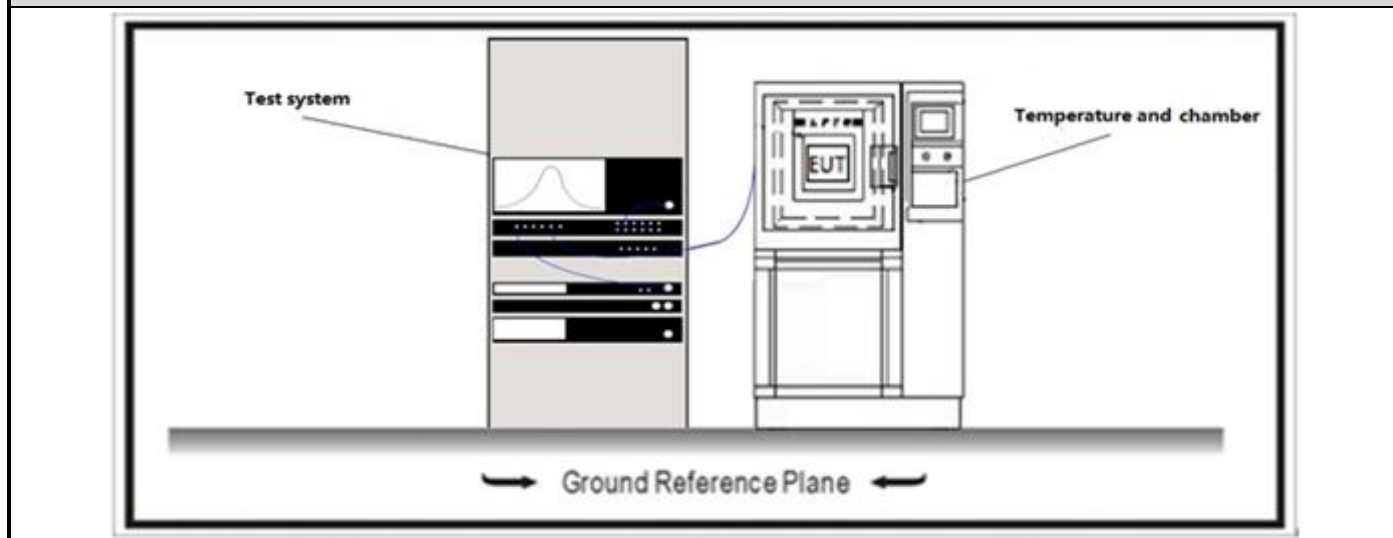

4.6.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		12.3	Maximum conducted output power
	☒	ANSI C63.10	12.3.2	Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver
		☐ ANSI C63.10	12.3.2.2	Method SA-1
		☐ ANSI C63.10	12.3.2.3	Method SA-1A (alternative)
		☒ ANSI C63.10	12.3.2.4	Method SA-2
		☐ ANSI C63.10	12.3.2.5	Method SA-2A (alternative)
		☐ ANSI C63.10	12.3.2.6	Method SA-3
		☐ ANSI C63.10	12.3.2.7	Method SA-3A (alternative)
	☒	ANSI C63.10	12.3.3	Maximum conducted output power using a power meter
		☐ ANSI C63.10	12.3.3.1	Method PM
		☒ ANSI C63.10	12.3.3.2	Method PM-G


4.7 Maximum Power Spectral Density

VERDICT: PASS

4.7.1 Limit

Standard		FCC Part 15 Subpart E Paragraph 15.407 (a)
☒	For the band 5.15-5.25 GHz	
	☐	Outdoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
	☐	Indoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
	☐	Fixed point-to-point access points: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 23)$
	☒	Mobile and portable client devices: the maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.25-5.35 GHz:	
	☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.47-5.725 GHz:	
	☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the band 5.725-5.85 GHz:	
	☒	The maximum power spectral density shall not exceed 30 dBm/500KHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
Note 1: G_{TX} directional gain of transmitting antennas.		
Note 2: P_{out} is maximum power spectral density.		

4.7.2 Test Setup

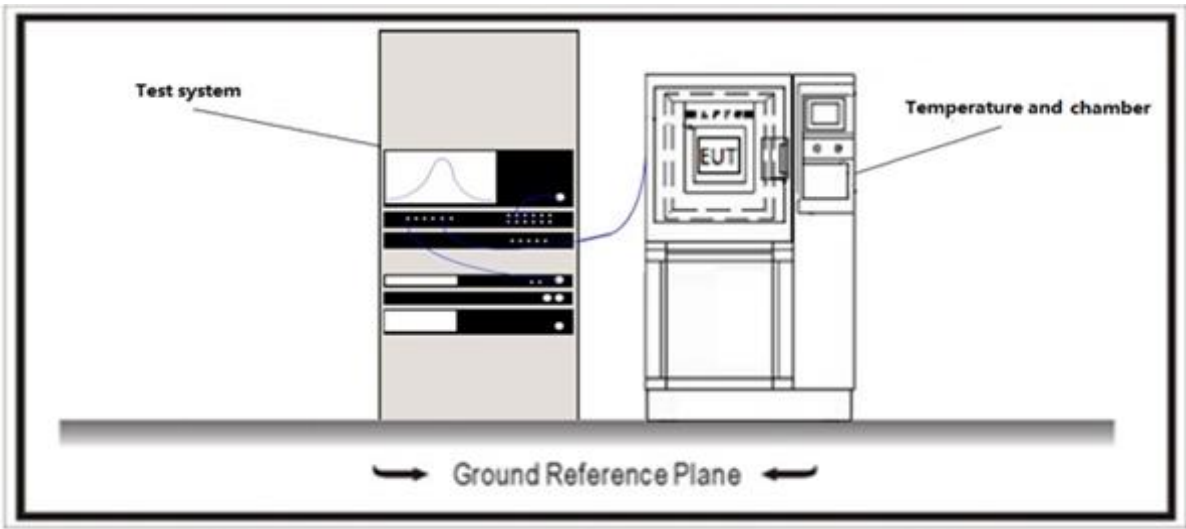

4.7.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	12.5	Peak power spectral density
☒	FCC KDB 789033 D02v02r01	F	Maximum Power Spectral Density (PSD)

4.8 Radiated Emission Band Edge**VERDICT: PASS****4.8.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205, RSS-Gen Issue 5:Section 8.9.

Restricted Bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit).

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.

Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).


FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit).

Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3

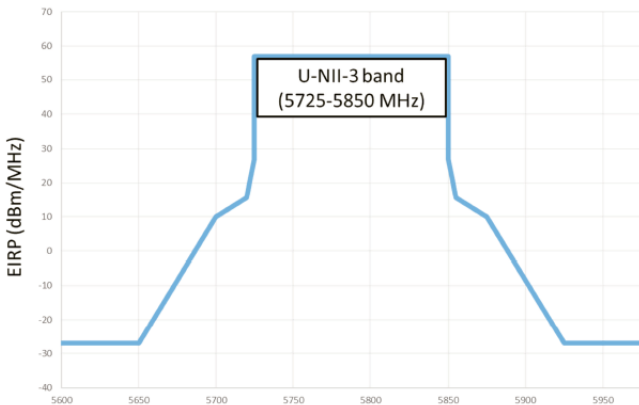Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)
5725 - 5850	 U-NII-3 band (5725-5850 MHz)

4.8.2 Test Setup

Above 1GHz Test Setup:

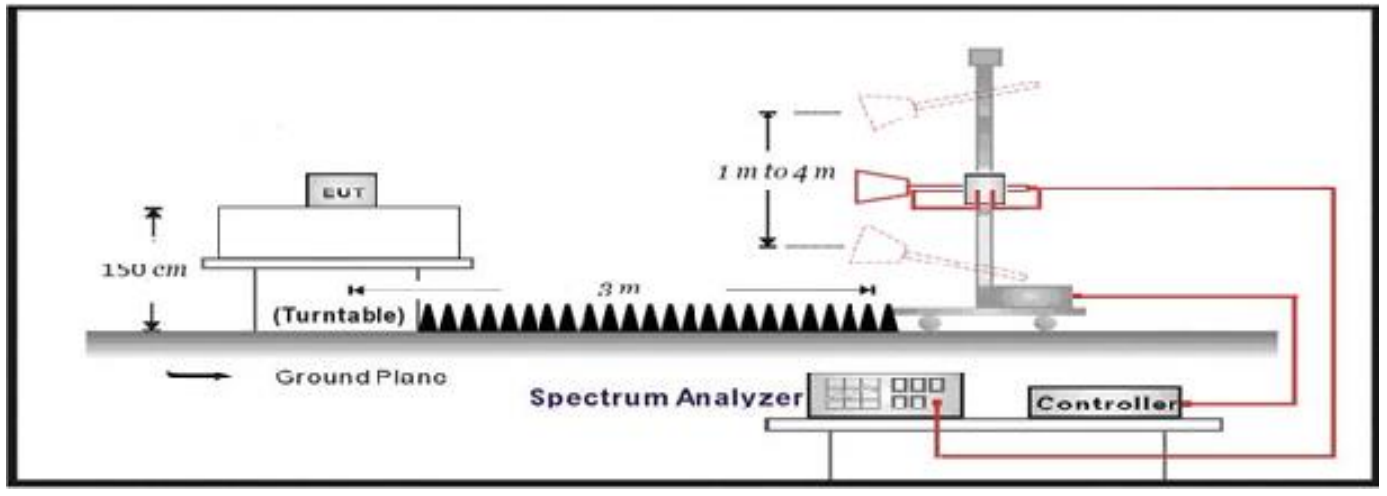

4.8.3 Test Procedure

	References Rule	Chapter	Description
☐	ANSI C63.10	12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10	12.7.2	Emissions in restricted frequency bands
☐	ANSI C63.10	12.7.5	Radiated emission measurements
☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☐	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
☐	FCC KDB 789033 D02v02r01	G.2	Unwanted Emissions that fall Outside of the Restricted Bands
☐	FCC KDB 789033 D02v02r01	G.1	Unwanted Emissions in the Restricted Bands
☐	FCC KDB 789033 D02v02r01	G.4	Procedure for Unwanted Emissions Measurements below 1000 MHz
☐	FCC KDB 789033 D02v02r01	G.5	Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz
☐	FCC KDB 789033 D02v02r01	G.6	Procedures for Average Unwanted Emissions Measurements above 1000 MHz

	☐	FCC KDB 789033 D02v02r01	G.6.c	Method AD (Average detection)—primary method
	☐	FCC KDB 789033 D02v02r01	G.6.d	Method VB (Averaging using reduced video bandwidth): Alternative method.


4.9 Frequency Stability

VERDICT: N/A

4.9.1 Limit:

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.
The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.

4.9.2 Test Setup

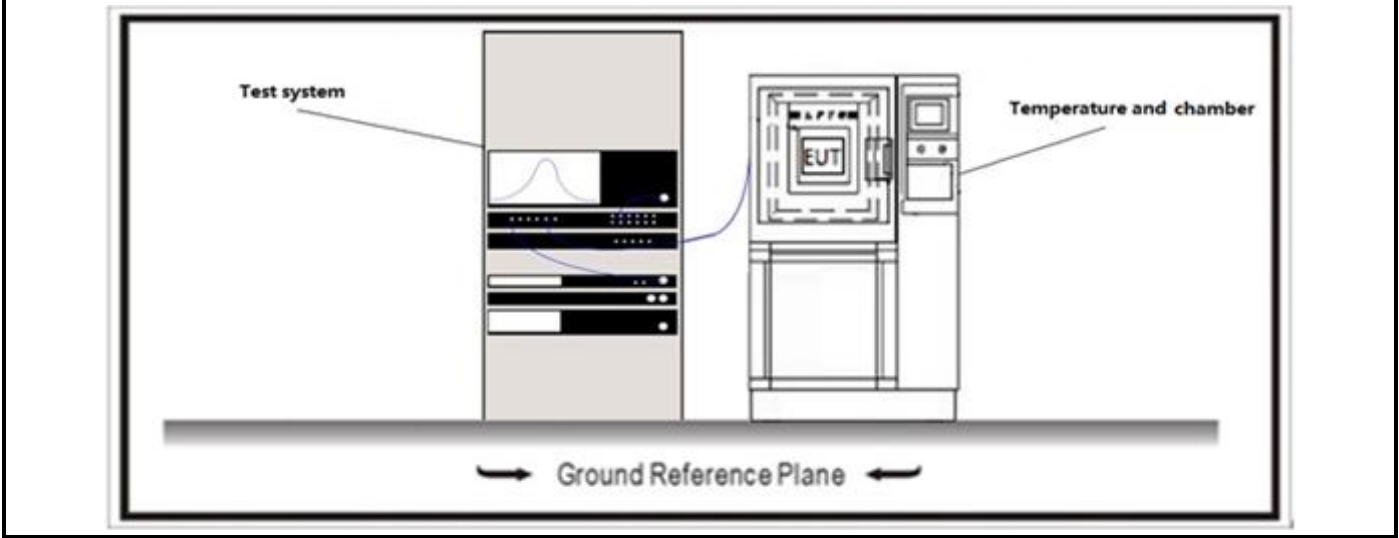

4.9.3 Test Procedure

	References Rule		Chapter	Description
☐	ANSI C63.10		6.8	Frequency stability tests
	☐	ANSI C63.10	6.8.1	Frequency stability with respect to ambient temperature
	☐	ANSI C63.10	6.8.2	Frequency stability when varying supply voltage

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.10.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector

Please refer to the attached document "Internal Photograph" to show the antenna connector.


5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT


Appendix A: Conducted Emission

Profile: 24C0966R	Page No.: 7
Engineer: Yu Liu	
Site: TR1	Time: 2025/03/03 - 20:46
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT:Mobile Computer	Power: 120Vac/60Hz
Note: mode 1:Transmit at 5180MHz by 802.11a	

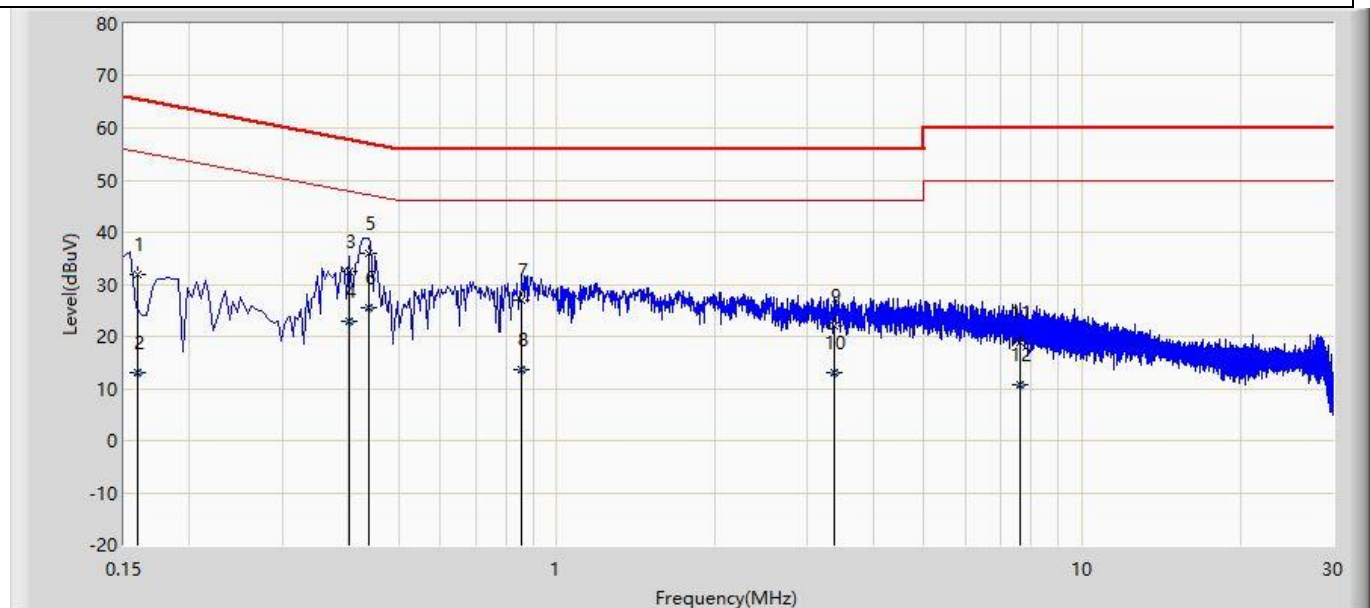

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.159	31.791	22.167	-33.727	65.518	9.624	QP
2		0.159	13.162	3.538	-42.356	55.518	9.624	AV
3		0.402	32.595	22.963	-25.217	57.812	9.632	QP
4		0.402	22.860	13.228	-24.952	47.812	9.632	AV
5	*	0.438	35.982	26.348	-21.118	57.100	9.634	QP
6		0.438	25.398	15.765	-21.701	47.100	9.634	AV
7		0.858	26.987	17.328	-29.013	56.000	9.658	QP
8		0.858	13.663	4.004	-32.337	46.000	9.658	AV
9		3.362	21.982	12.254	-34.018	56.000	9.728	QP
10		3.362	13.040	3.312	-32.960	46.000	9.728	AV
11		7.598	18.953	9.126	-41.047	60.000	9.827	QP
12		7.598	10.834	1.007	-39.166	50.000	9.827	AV

Profile: 24C0966R	Page No.: 8
Engineer: Yu Liu	
Site: TR1	Time: 2025/03/03 - 20:49
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT:Mobile Computer	Power: 120Vac/60Hz
Note: mode 1:Transmit at 5180MHz by 802.11a	

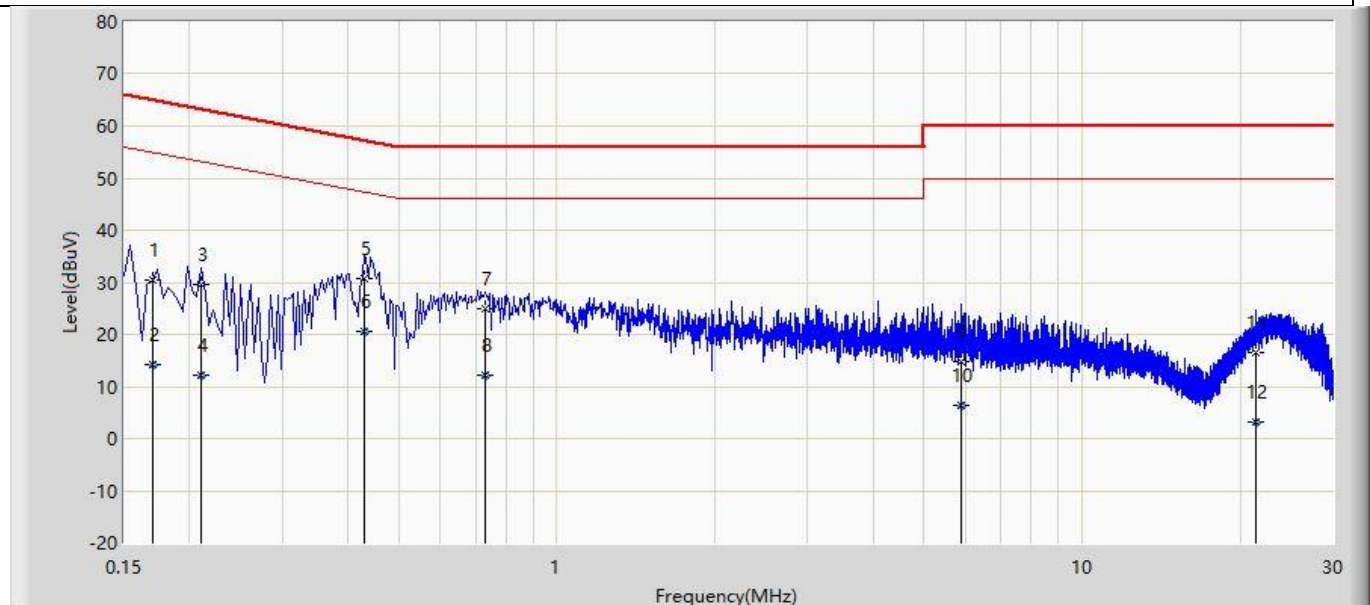

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.170	30.404	20.773	-34.563	64.967	9.631	QP
2		0.170	14.222	4.591	-40.745	54.967	9.631	AV
3		0.210	29.709	20.076	-33.497	63.205	9.633	QP
4		0.210	12.257	2.624	-40.949	53.205	9.633	AV
5	*	0.430	30.793	21.150	-26.459	57.253	9.643	QP
6		0.430	20.575	10.931	-26.678	47.253	9.643	AV
7		0.730	24.919	15.261	-31.081	56.000	9.657	QP
8		0.730	12.231	2.573	-33.769	46.000	9.657	AV
9		5.898	14.852	5.061	-45.148	60.000	9.791	QP
10		5.898	6.265	-3.526	-43.735	50.000	9.791	AV
11		21.386	16.446	6.372	-43.554	60.000	10.074	QP
12		21.386	3.326	-6.748	-46.674	50.000	10.074	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


Appendix B: Radiated Emission

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

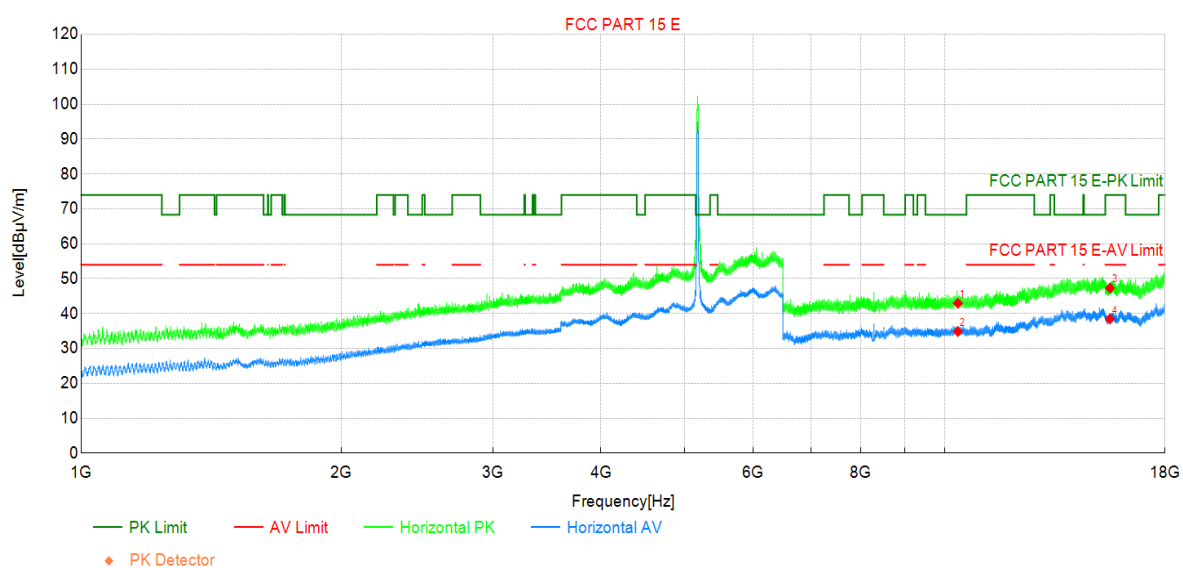

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	36.35	42.93	6.58	68.30	25.37	PK	Horizo	PASS
2	10360.00	28.26	34.84	6.58	-	-	AV	Horizo	NA
3	15540.00	33.41	47.31	13.90	74.00	26.69	PK	Horizo	PASS
4	15540.00	24.54	38.44	13.90	54.00	15.56	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

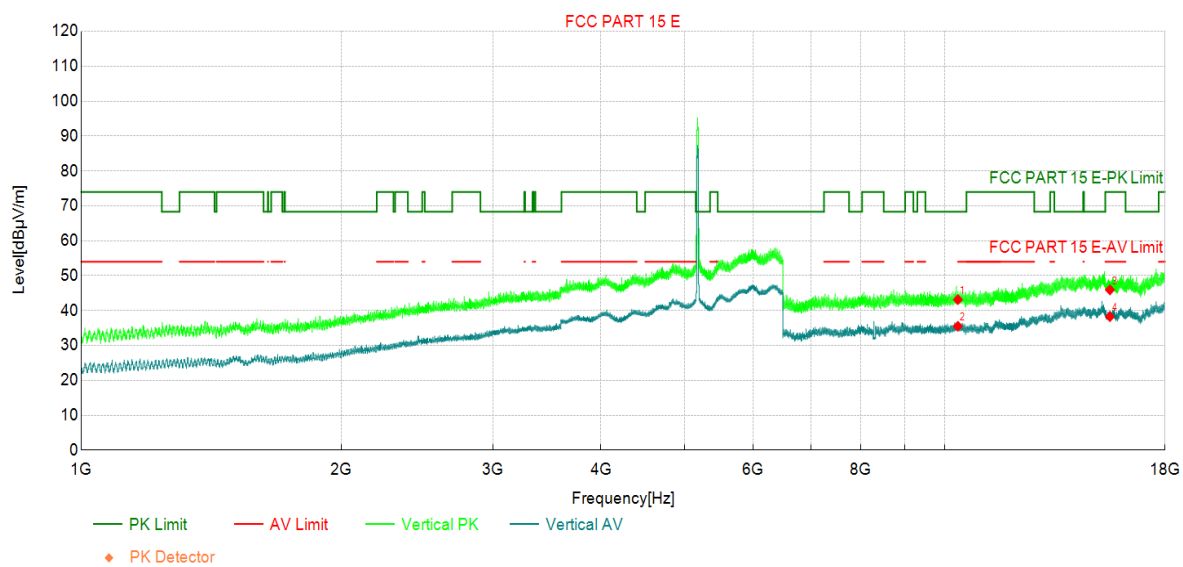

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	36.55	43.13	6.58	68.30	25.17	PK	Vertic	PASS
2	10360.00	28.91	35.49	6.58	54.00	18.51	AV	Vertic	PASS
3	15540.00	32.03	45.93	13.90	74.00	28.07	PK	Vertic	PASS
4	15540.00	24.36	38.26	13.90	54.00	15.74	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5220MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

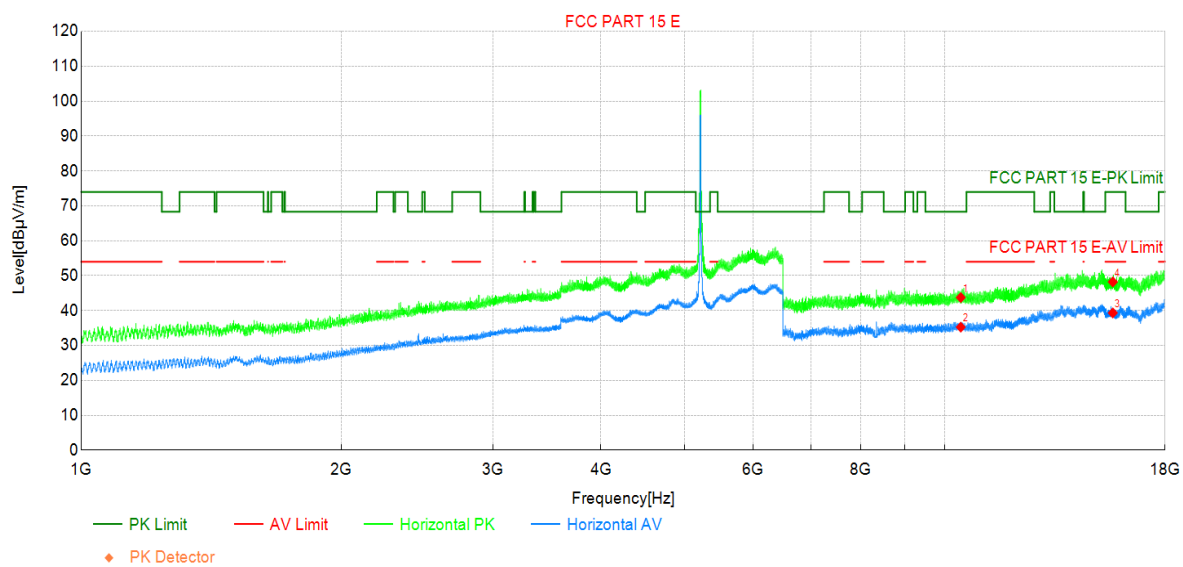

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	37.09	43.73	6.64	68.30	24.57	PK	Horizo	PASS
2	10440.00	28.61	35.25	6.64	-	-	AV	Horizo	NA
3	15660.00	25.24	39.33	14.09	54.00	14.67	AV	Horizo	PASS
4	15660.00	34.13	48.22	14.09	74.00	25.78	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5220MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

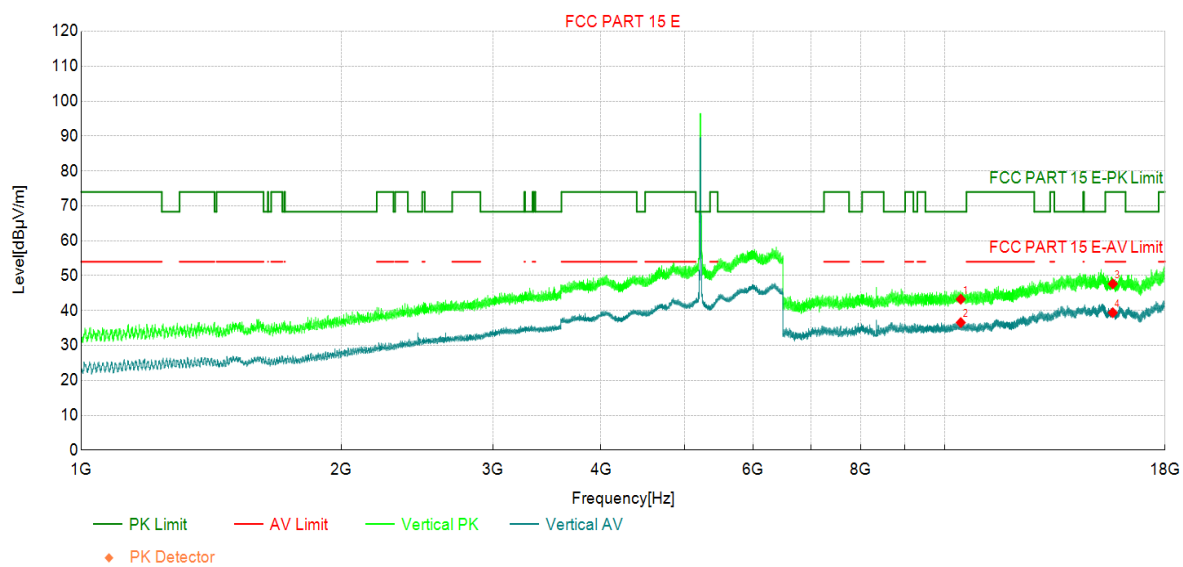

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	36.61	43.25	6.64	68.30	25.05	PK	Vertic	PASS
2	10440.00	29.92	36.56	6.64	-	-	AV	Vertic	NA
3	15660.00	33.56	47.65	14.09	74.00	26.35	PK	Vertic	PASS
4	15660.00	25.31	39.40	14.09	54.00	14.60	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5240MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

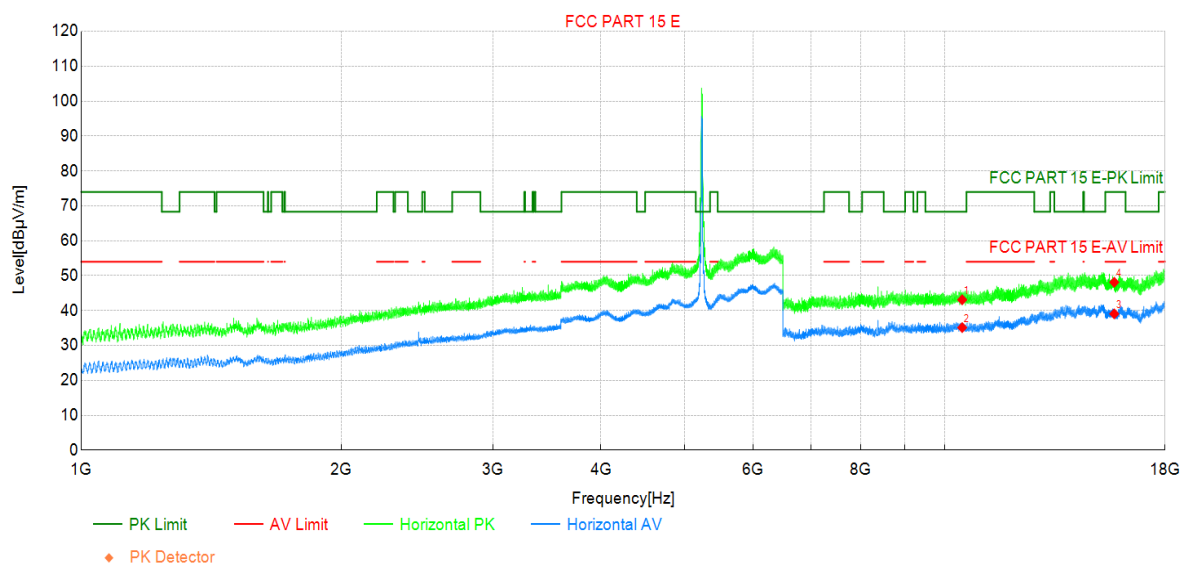

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	36.39	43.10	6.71	68.30	25.20	PK	Horizo	PASS
2	10480.00	28.42	35.13	6.71	-	-	AV	Horizo	NA
3	15720.00	24.64	39.05	14.41	54.00	14.95	AV	Horizo	PASS
4	15720.00	33.70	48.11	14.41	74.00	25.89	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5240MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

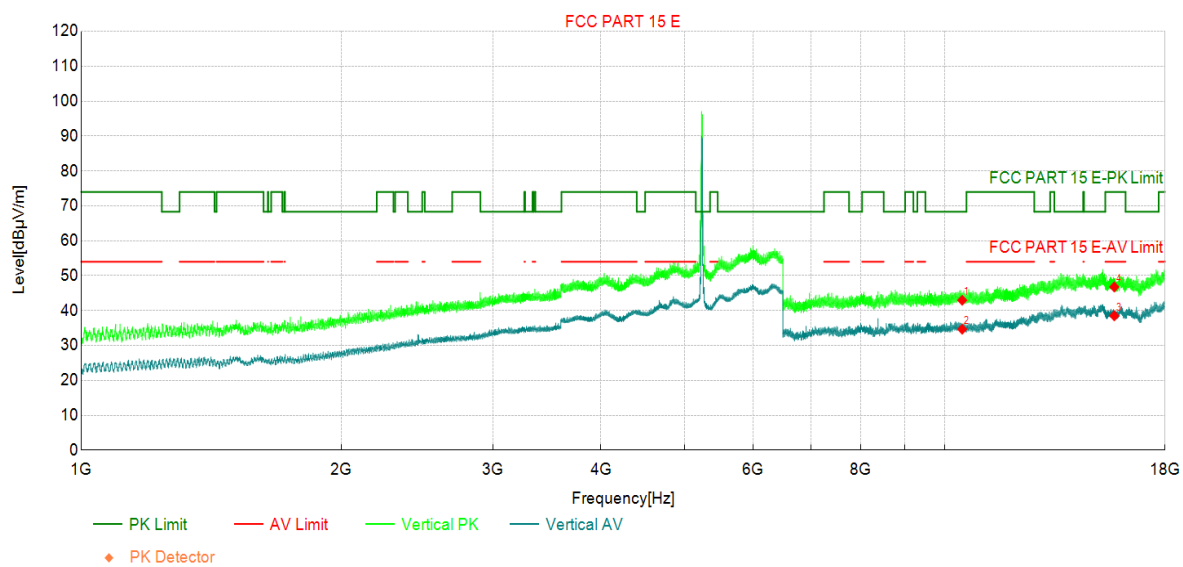

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	36.24	42.95	6.71	68.30	25.35	PK	Vertic	PASS
2	10480.00	27.94	34.65	6.71	-	-	AV	Vertic	NA
3	15720.00	24.09	38.50	14.41	54.00	15.50	AV	Vertic	PASS
4	15720.00	32.36	46.77	14.41	74.00	27.23	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5260MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

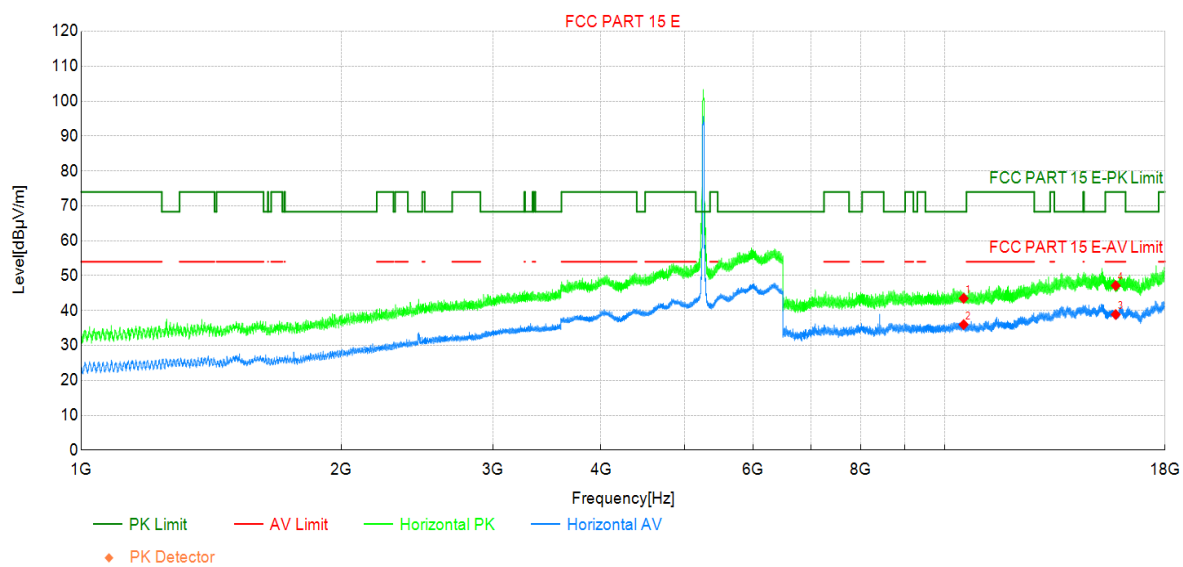

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	36.74	43.50	6.76	68.30	24.80	PK	Horizo	PASS
2	10520.00	29.22	35.98	6.76	-	-	AV	Horizo	NA
3	15780.00	24.77	38.86	14.09	54.00	15.14	AV	Horizo	PASS
4	15780.00	33.07	47.16	14.09	74.00	26.84	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5260MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

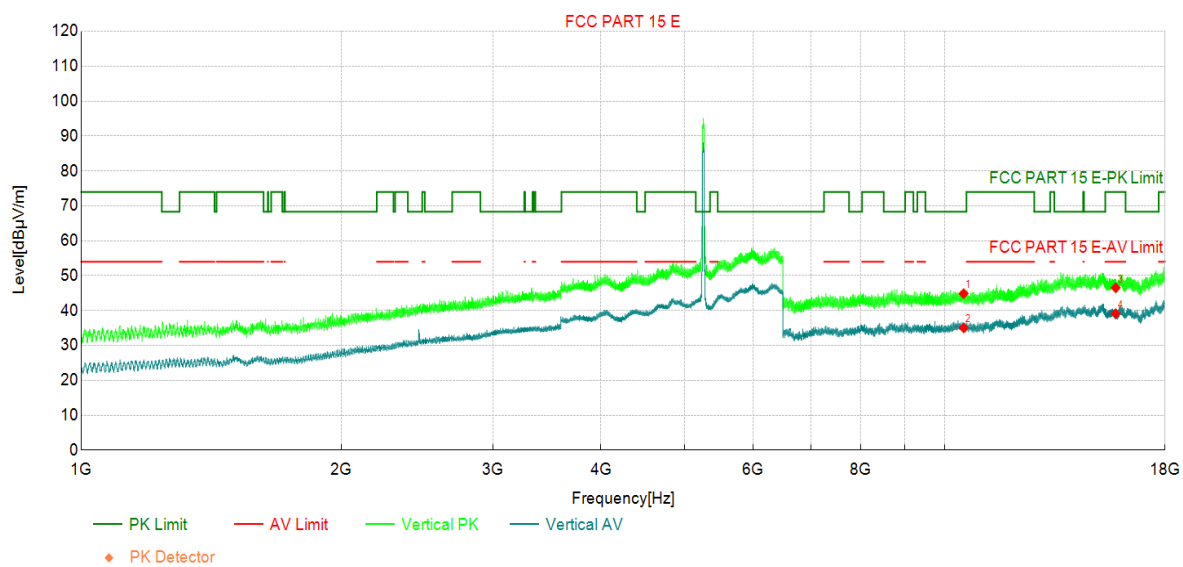

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	38.09	44.85	6.76	68.30	23.45	PK	Vertic	PASS
2	10520.00	28.30	35.06	6.76	-	-	AV	Vertic	NA
3	15780.00	32.45	46.54	14.09	74.00	27.46	PK	Vertic	PASS
4	15780.00	25.03	39.12	14.09	54.00	14.88	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5300MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

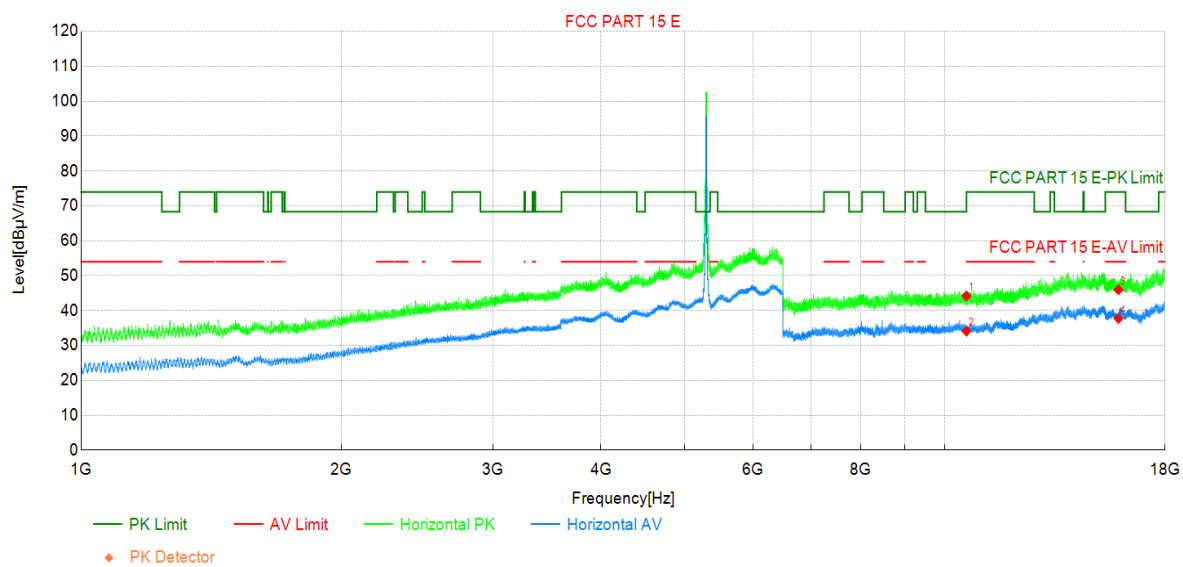

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	37.42	44.20	6.78	68.30	24.10	PK	Horizo	PASS
2	10600.00	27.32	34.10	6.78	54.00	19.90	AV	Horizo	PASS
3	15900.00	31.85	45.97	14.12	74.00	28.03	PK	Horizo	PASS
4	15900.00	23.61	37.73	14.12	54.00	16.27	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5300MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

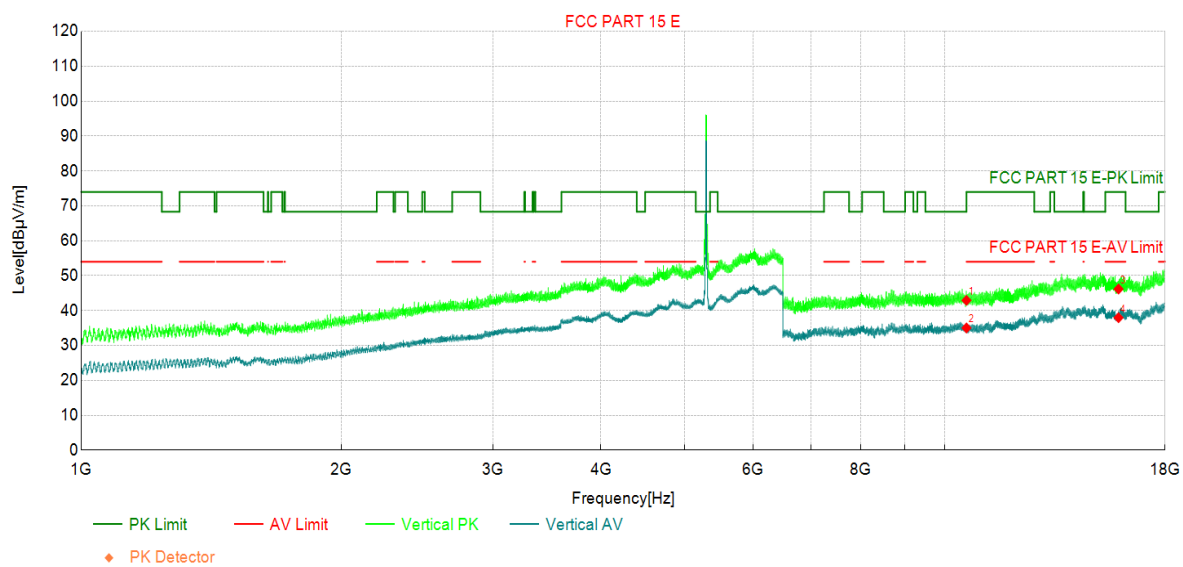

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	36.14	42.92	6.78	68.30	25.38	PK	Vertic	PASS
2	10600.00	28.23	35.01	6.78	54.00	18.99	AV	Vertic	PASS
3	15900.00	32.05	46.17	14.12	74.00	27.83	PK	Vertic	PASS
4	15900.00	23.84	37.96	14.12	54.00	16.04	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

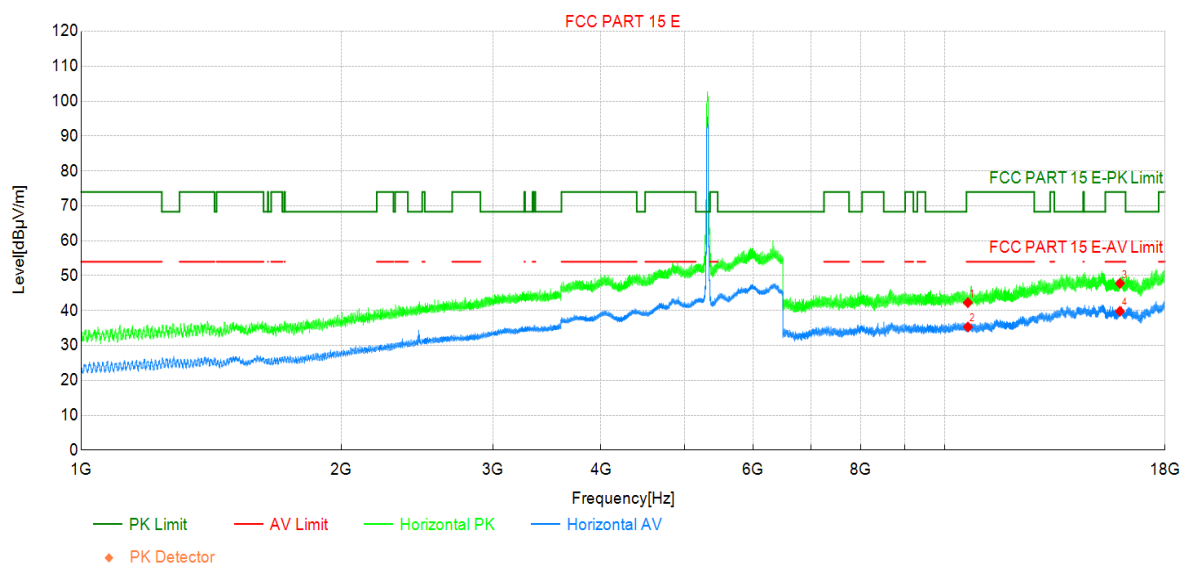

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.46	42.26	6.80	74.00	31.74	PK	Horizo	PASS
2	10640.00	28.50	35.30	6.80	54.00	18.70	AV	Horizo	PASS
3	15960.00	33.16	47.79	14.63	74.00	26.21	PK	Horizo	PASS
4	15960.00	25.16	39.79	14.63	54.00	14.21	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

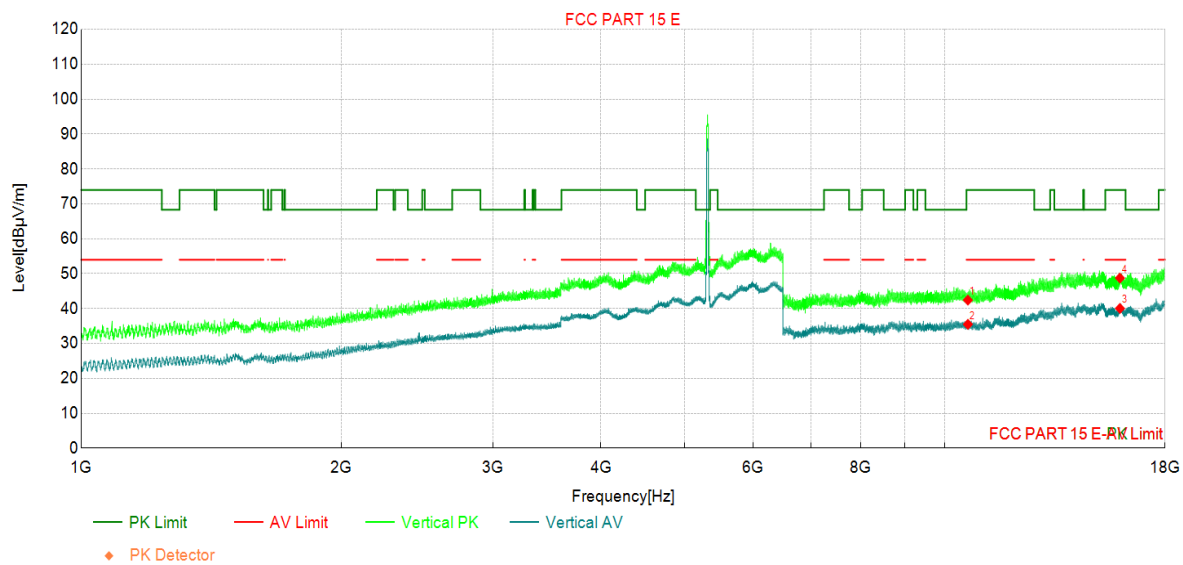

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.62	42.42	6.80	74.00	31.58	PK	Vertic	PASS
2	10640.00	28.68	35.48	6.80	54.00	18.52	AV	Vertic	PASS
3	15960.00	25.40	40.03	14.63	54.00	13.97	AV	Vertic	PASS
4	15960.00	34.11	48.74	14.63	74.00	25.26	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

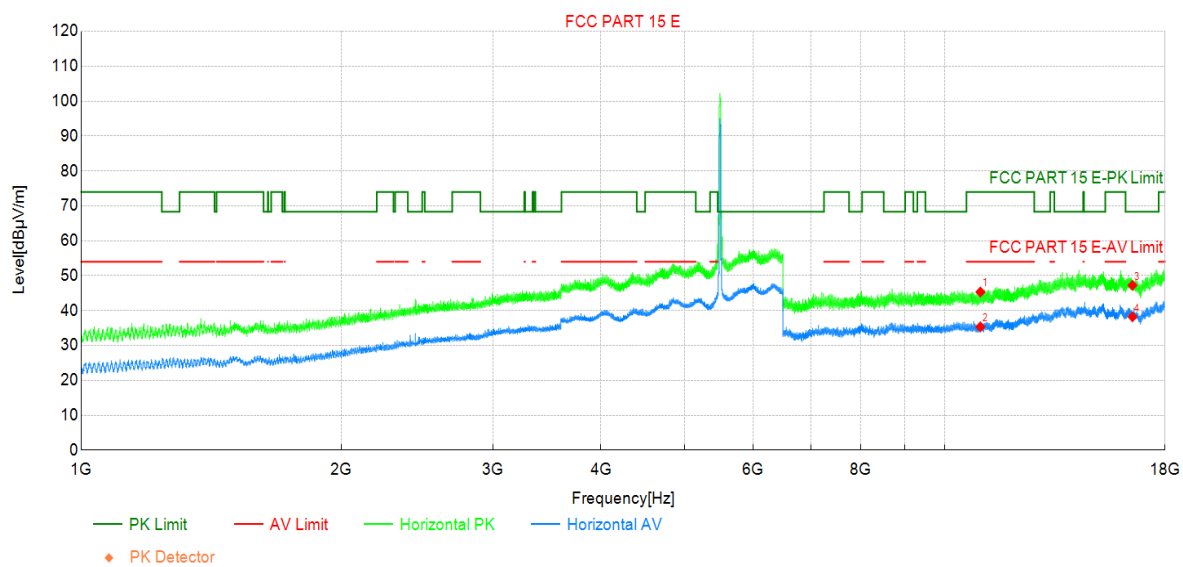

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	37.91	45.31	7.40	74.00	28.69	PK	Horizo	PASS
2	11000.00	27.93	35.33	7.40	54.00	18.67	AV	Horizo	PASS
3	16500.00	32.13	47.24	15.11	68.30	21.06	PK	Horizo	PASS
4	16500.00	23.12	38.23	15.11	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

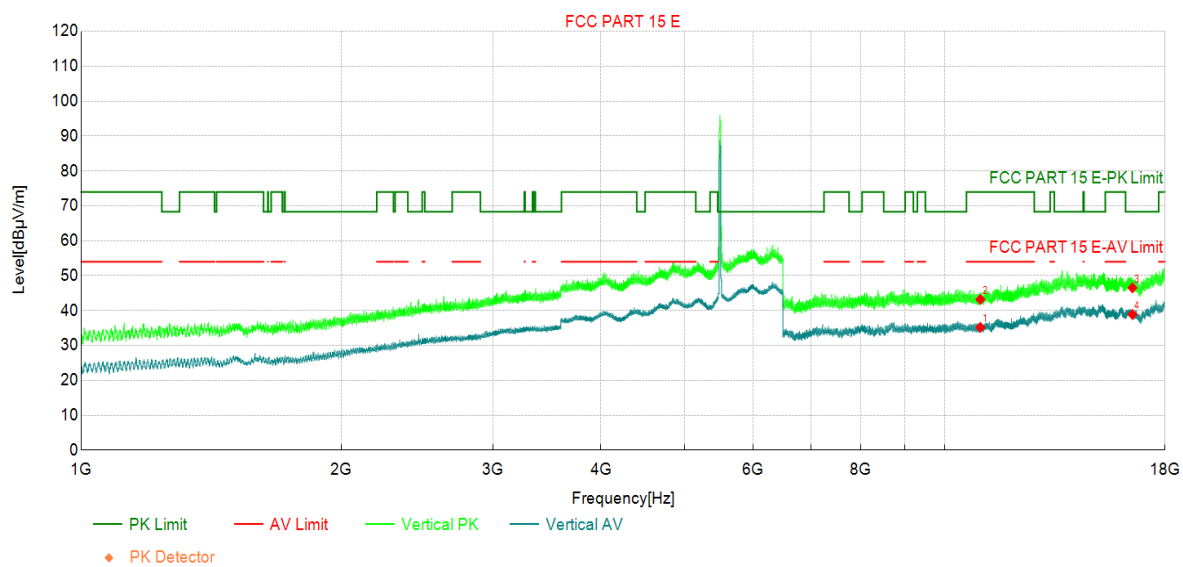

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	27.78	35.18	7.40	54.00	18.82	AV	Vertic	PASS
2	11000.00	35.78	43.18	7.40	74.00	30.82	PK	Vertic	PASS
3	16500.00	31.40	46.51	15.11	68.30	21.79	PK	Vertic	PASS
4	16500.00	23.77	38.88	15.11	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5580MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

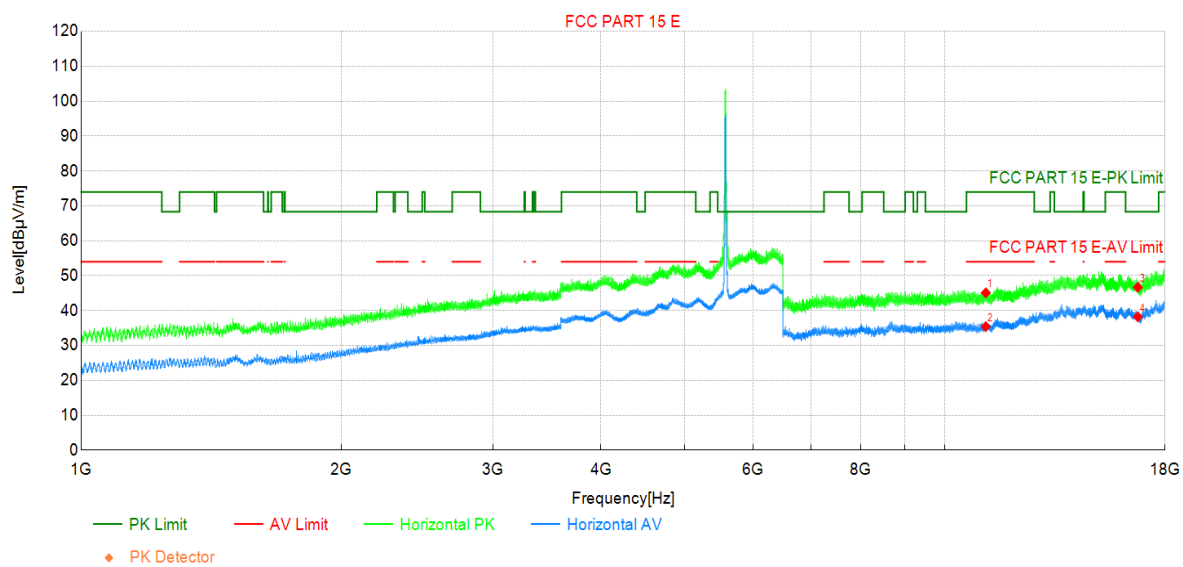

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	37.80	45.09	7.29	74.00	28.91	PK	Horizo	PASS
2	11160.00	28.10	35.39	7.29	54.00	18.61	AV	Horizo	PASS
3	16740.00	32.04	46.66	14.62	68.30	21.64	PK	Horizo	PASS
4	16740.00	23.58	38.20	14.62	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5580MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

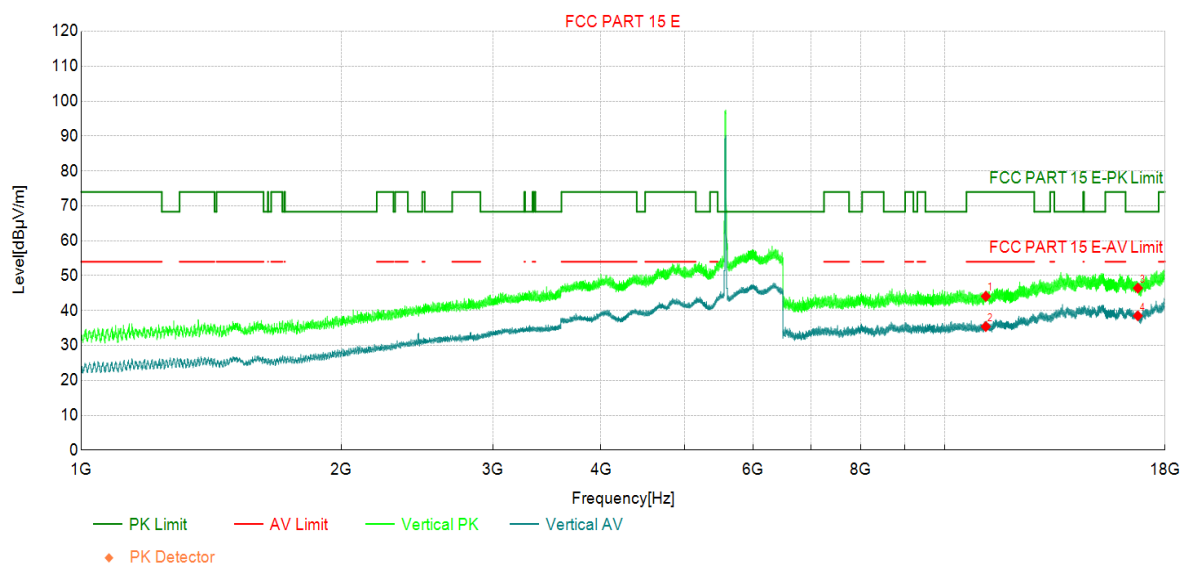

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	36.79	44.08	7.29	74.00	29.92	PK	Vertic	PASS
2	11160.00	28.12	35.41	7.29	54.00	18.59	AV	Vertic	PASS
3	16740.00	31.82	46.44	14.62	68.30	21.86	PK	Vertic	PASS
4	16740.00	23.88	38.50	14.62	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

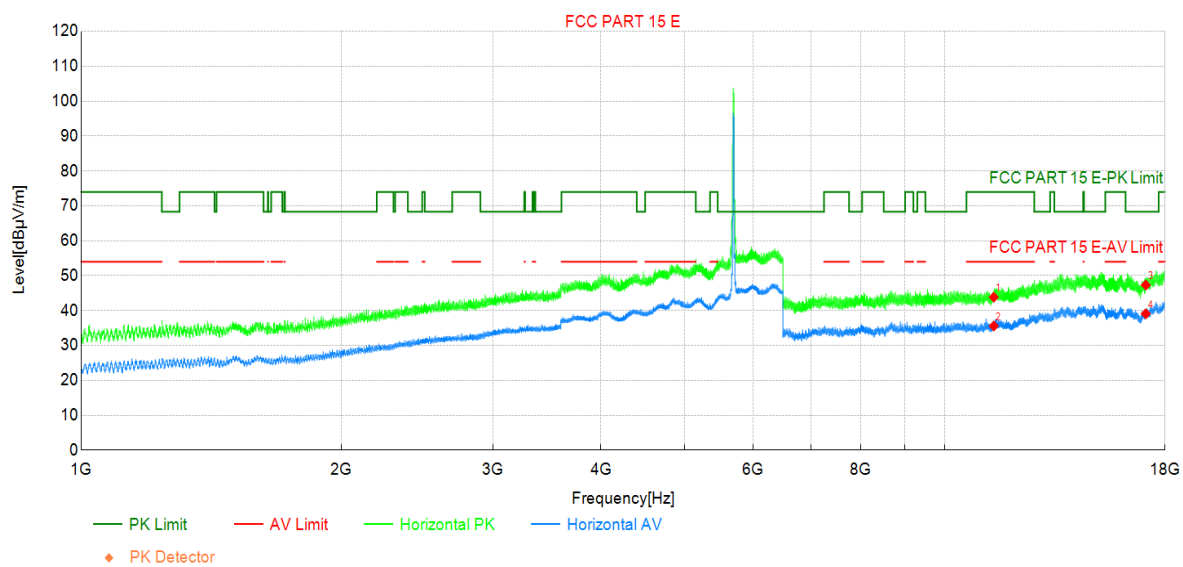

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	36.01	43.84	7.83	74.00	30.16	PK	Horizo	PASS
2	11400.00	27.75	35.58	7.83	54.00	18.42	AV	Horizo	PASS
3	17100.00	31.49	47.31	15.82	68.30	20.99	PK	Horizo	PASS
4	17100.00	23.27	39.09	15.82	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

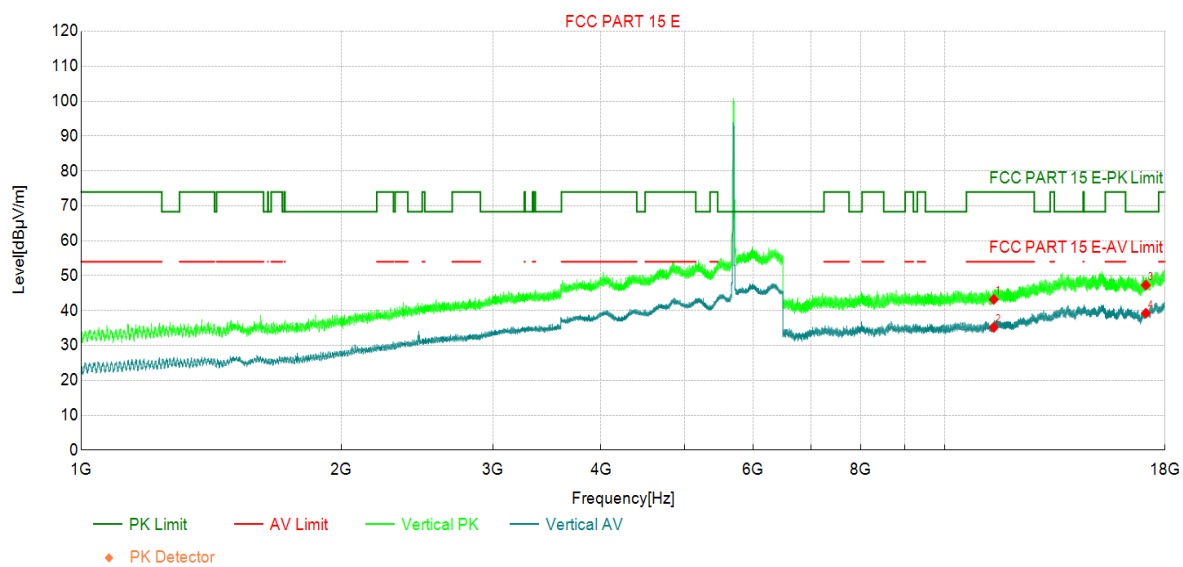

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	35.36	43.19	7.83	74.00	30.81	PK	Vertic	PASS
2	11400.00	27.33	35.16	7.83	54.00	18.84	AV	Vertic	PASS
3	17100.00	31.46	47.28	15.82	68.30	21.02	PK	Vertic	PASS
4	17100.00	23.41	39.23	15.82	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

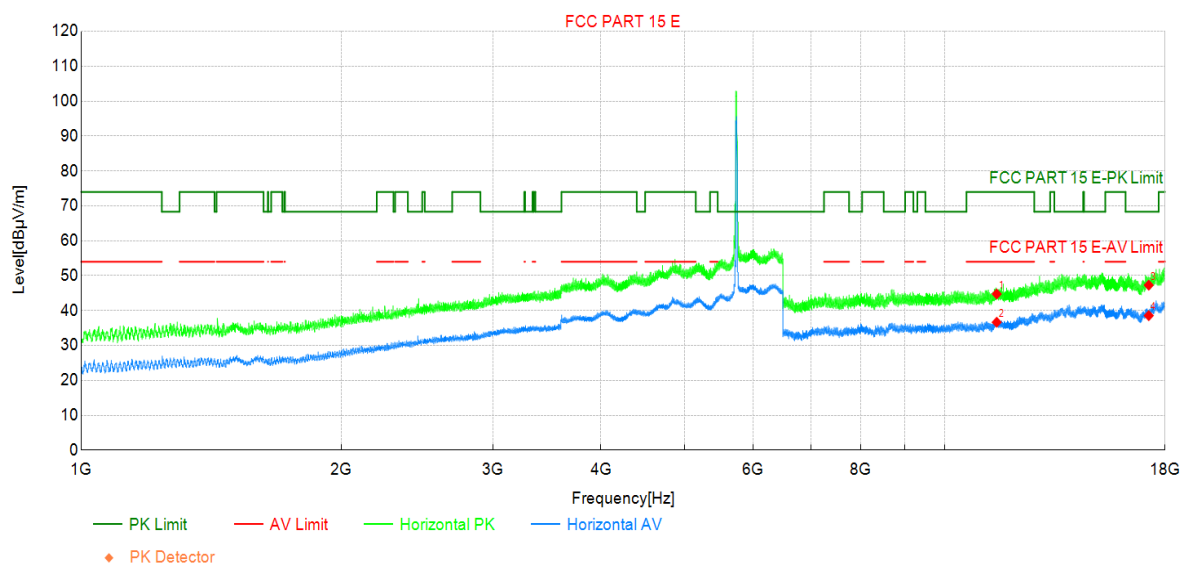

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	36.37	44.75	8.38	74.00	29.25	PK	Horizo	PASS
2	11490.00	28.28	36.66	8.38	54.00	17.34	AV	Horizo	PASS
3	17235.00	31.82	47.28	15.46	68.30	21.02	PK	Horizo	PASS
4	17235.00	23.09	38.55	15.46	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

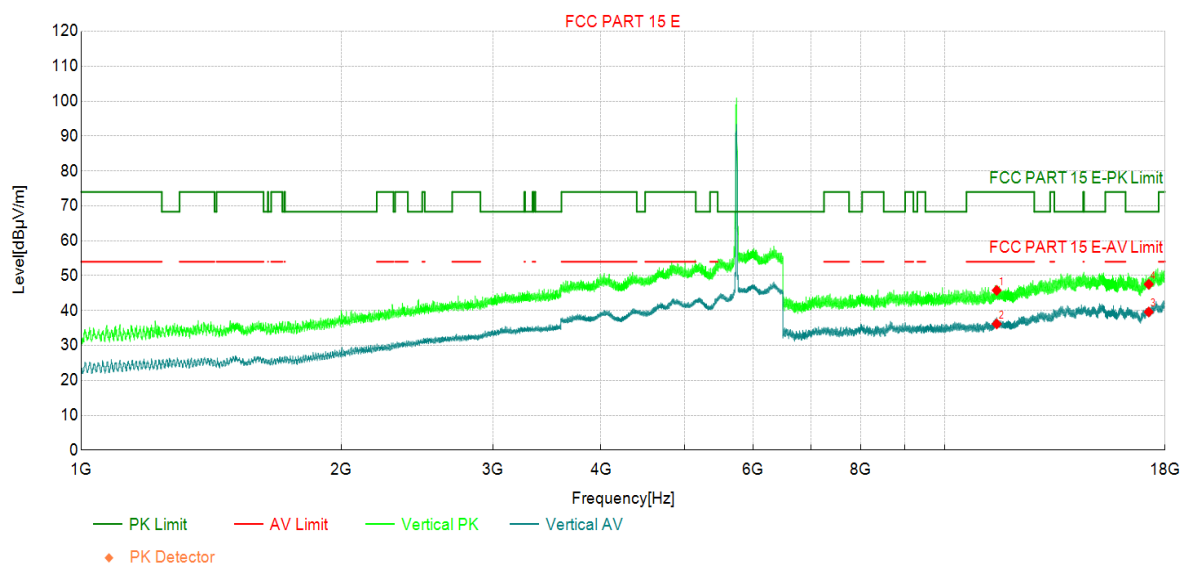

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	37.40	45.78	8.38	74.00	28.22	PK	Vertic	PASS
2	11490.00	27.79	36.17	8.38	54.00	17.83	AV	Vertic	PASS
3	17235.00	24.14	39.60	15.46	-	-	AV	Vertic	NA
4	17235.00	32.08	47.54	15.46	68.30	20.76	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5785MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

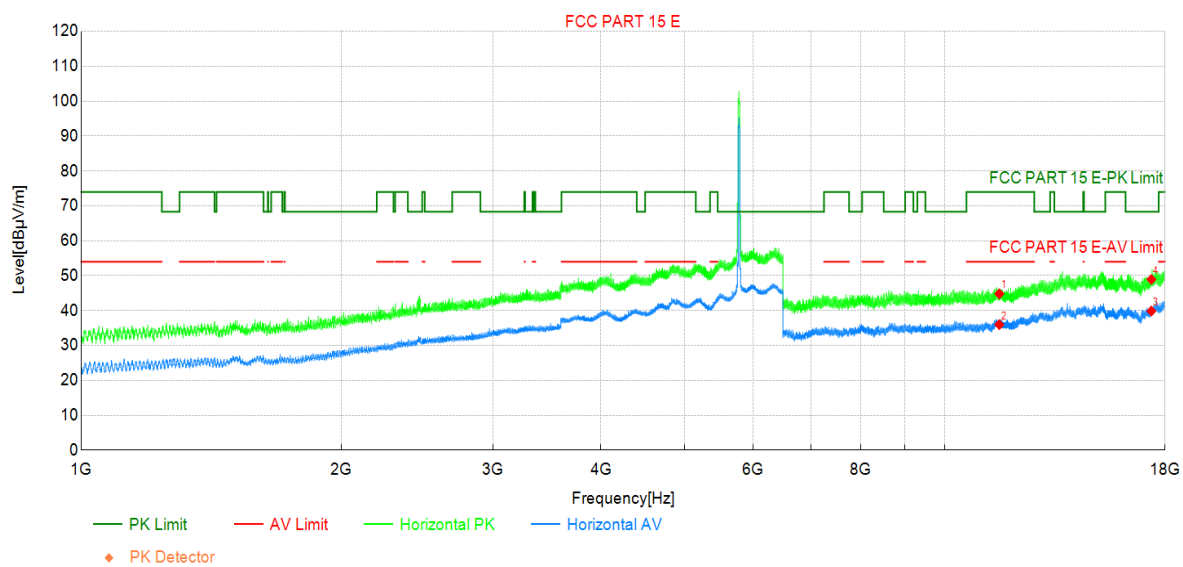

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.12	44.80	8.68	74.00	29.20	PK	Horizo	PASS
2	11570.00	27.28	35.96	8.68	54.00	18.04	AV	Horizo	PASS
3	17355.00	23.65	39.87	16.22	-	-	AV	Horizo	NA
4	17355.00	32.71	48.93	16.22	68.30	19.37	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5785MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

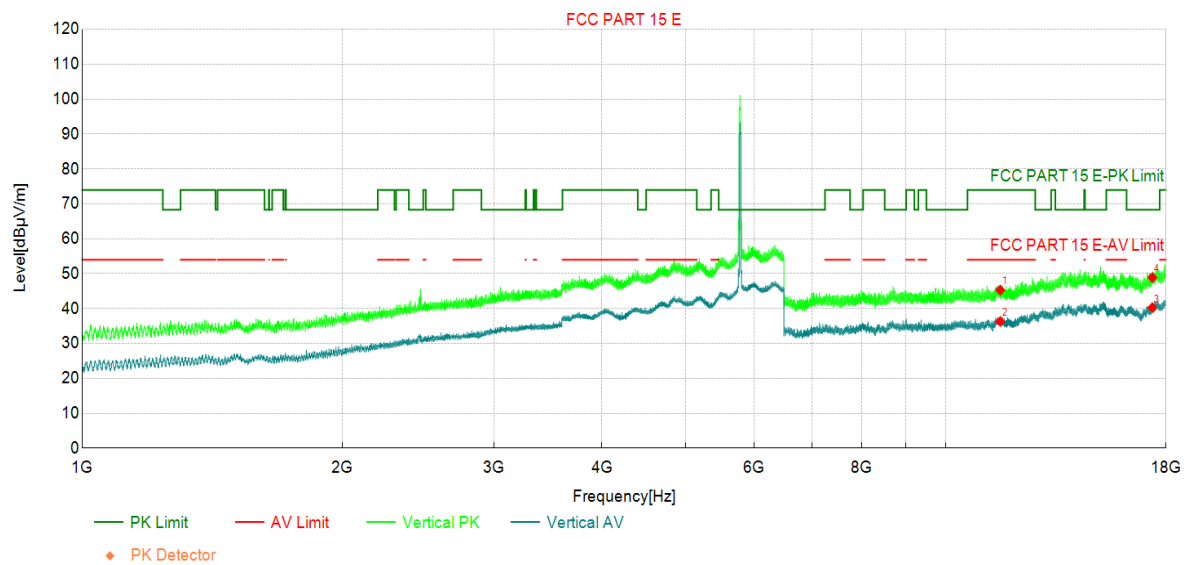

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.62	45.30	8.68	74.00	28.70	PK	Vertic	PASS
2	11570.00	27.61	36.29	8.68	54.00	17.71	AV	Vertic	PASS
3	17355.00	24.04	40.26	16.22	-	-	AV	Vertic	NA
4	17355.00	32.66	48.88	16.22	68.30	19.42	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

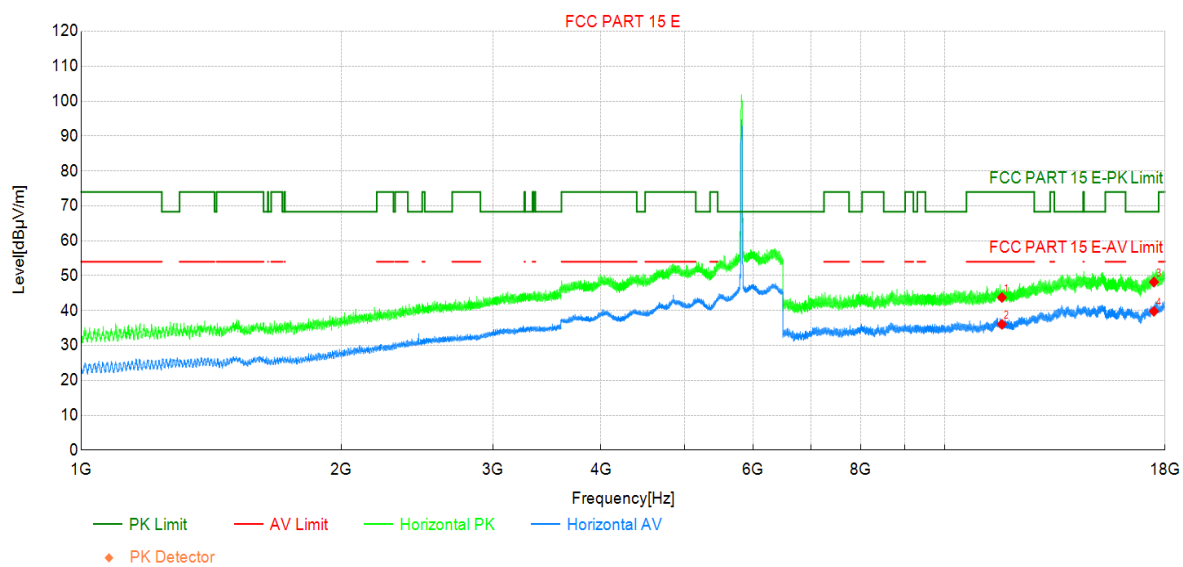

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	35.01	43.75	8.74	74.00	30.25	PK	Horizo	PASS
2	11650.00	27.32	36.06	8.74	54.00	17.94	AV	Horizo	PASS
3	17475.00	31.10	48.17	17.07	68.30	20.13	PK	Horizo	PASS
4	17475.00	22.72	39.79	17.07	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

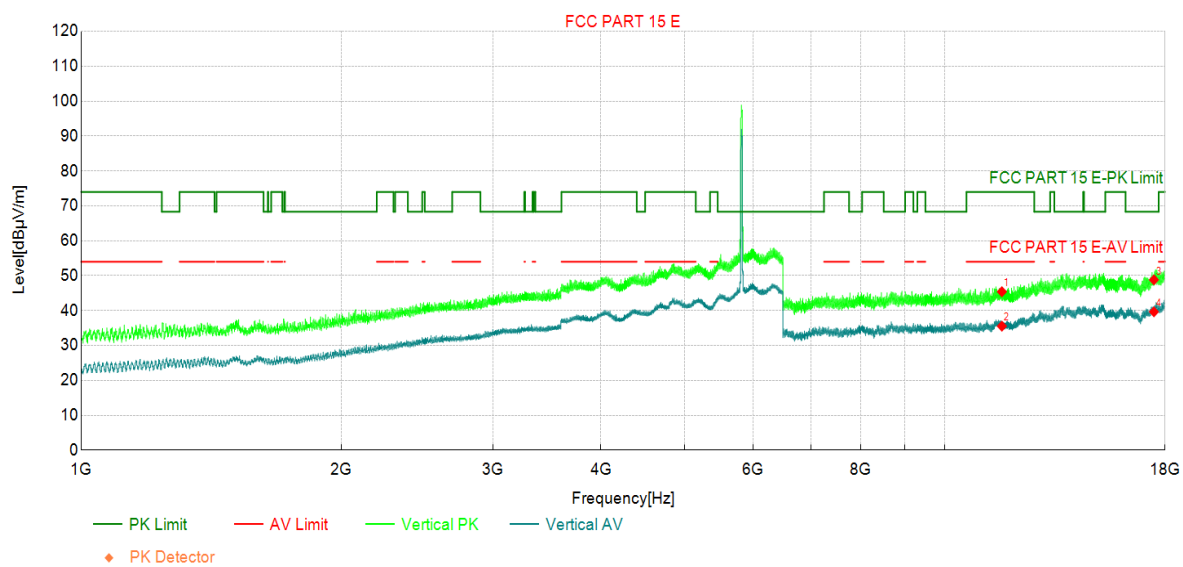

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	36.66	45.40	8.74	74.00	28.60	PK	Vertic	PASS
2	11650.00	26.80	35.54	8.74	54.00	18.46	AV	Vertic	PASS
3	17475.00	31.74	48.81	17.07	68.30	19.49	PK	Vertic	PASS
4	17475.00	22.57	39.64	17.07	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

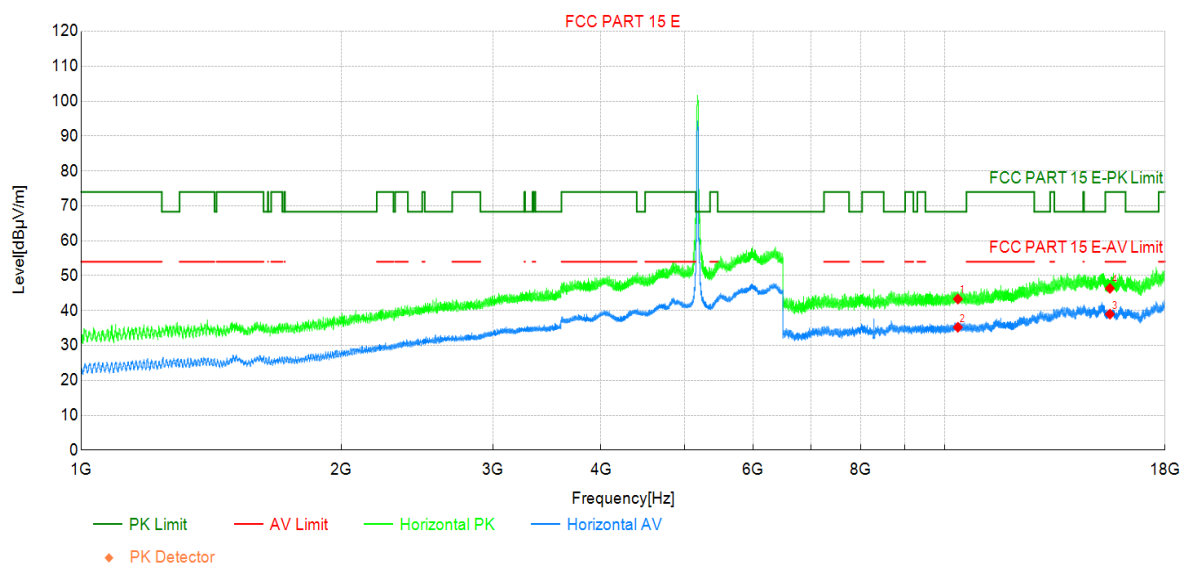

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	36.72	43.30	6.58	68.30	25.00	PK	Horizo	PASS
2	10360.00	28.63	35.21	6.58	-	-	AV	Horizo	NA
3	15540.00	25.08	38.98	13.90	54.00	15.02	AV	Horizo	PASS
4	15540.00	32.46	46.36	13.90	74.00	27.64	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5180MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

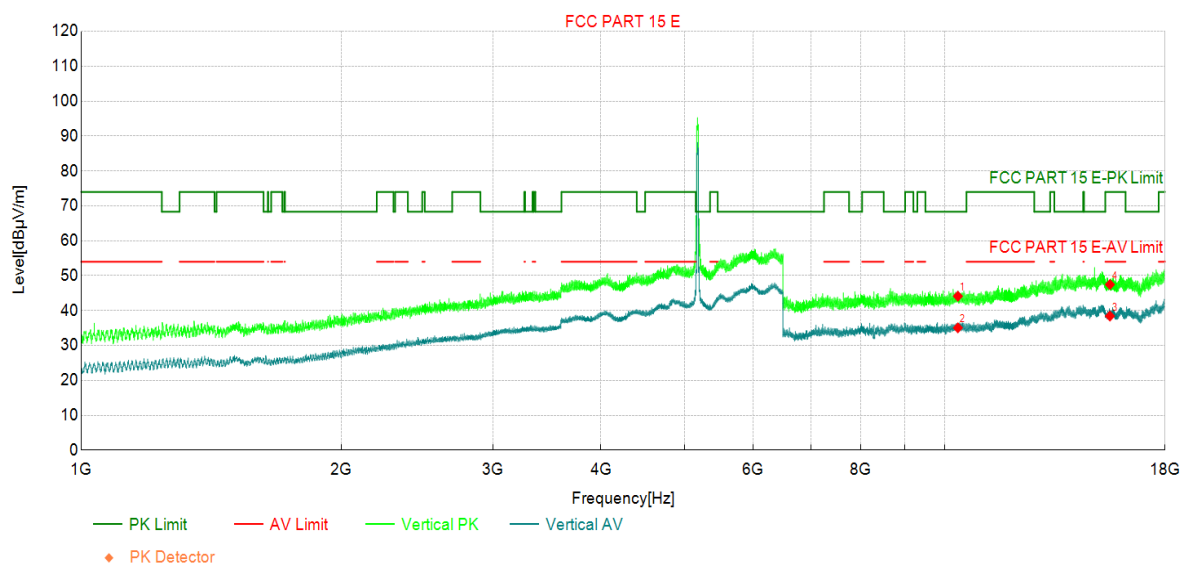

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	37.54	44.12	6.58	68.30	24.18	PK	Vertic	PASS
2	10360.00	28.47	35.05	6.58	-	-	AV	Vertic	NA
3	15540.00	24.52	38.42	13.90	54.00	15.58	AV	Vertic	PASS
4	15540.00	33.57	47.47	13.90	74.00	26.53	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5220MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

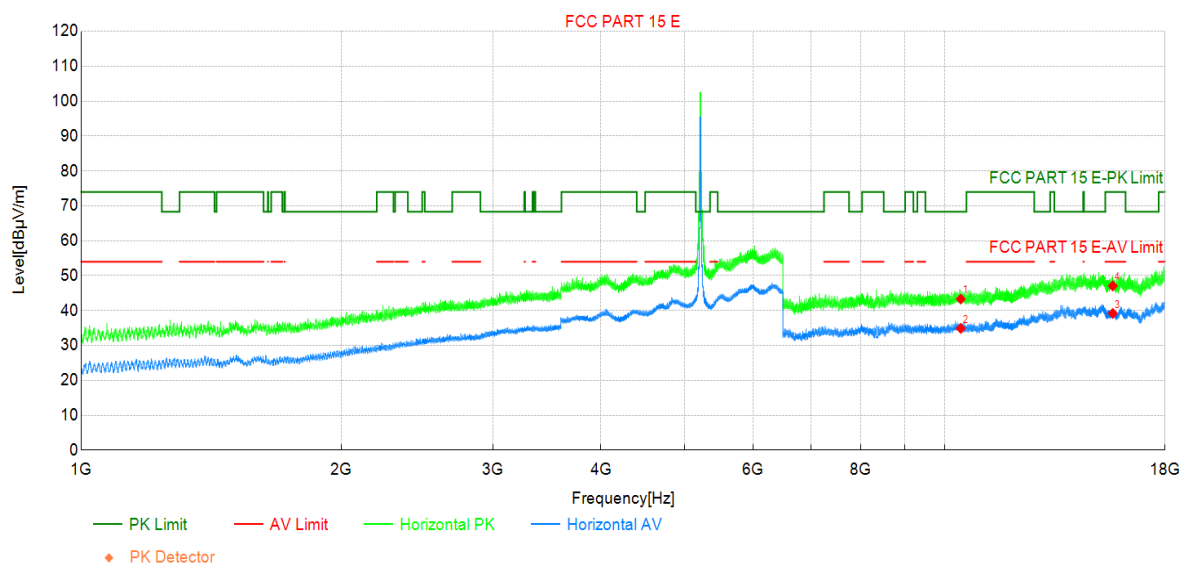

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	36.66	43.30	6.64	68.30	25.00	PK	Horizo	PASS
2	10440.00	28.25	34.89	6.64	-	-	AV	Horizo	NA
3	15660.00	25.09	39.18	14.09	54.00	14.82	AV	Horizo	PASS
4	15660.00	32.98	47.07	14.09	74.00	26.93	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5220MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

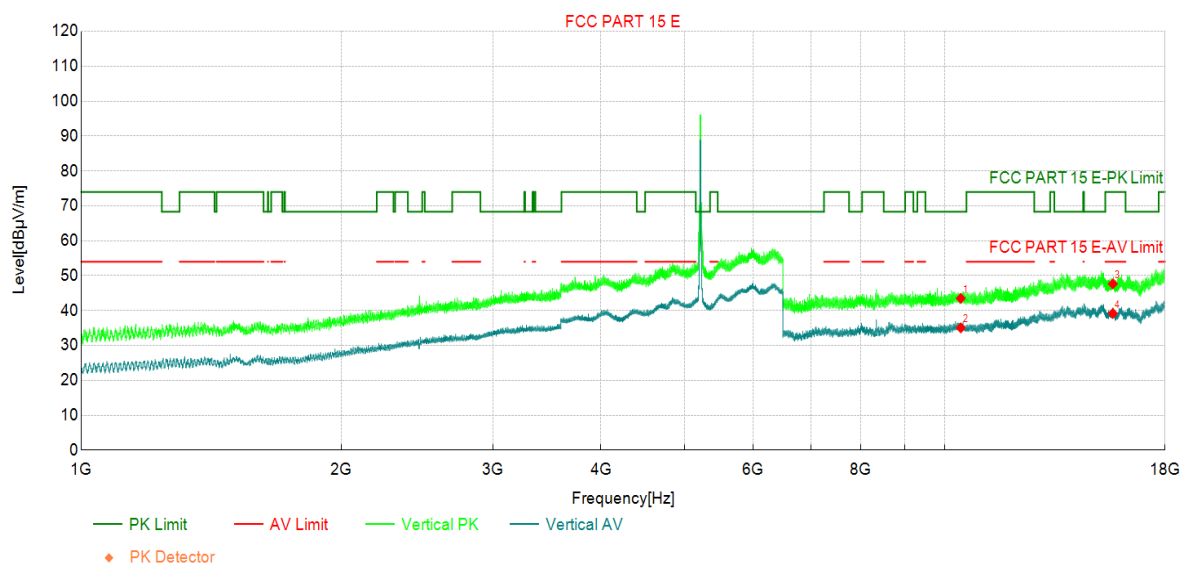

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	36.84	43.48	6.64	68.30	24.82	PK	Vertic	PASS
2	10440.00	28.40	35.04	6.64	-	-	AV	Vertic	NA
3	15660.00	33.56	47.65	14.09	74.00	26.35	PK	Vertic	PASS
4	15660.00	25.08	39.17	14.09	54.00	14.83	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5240MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

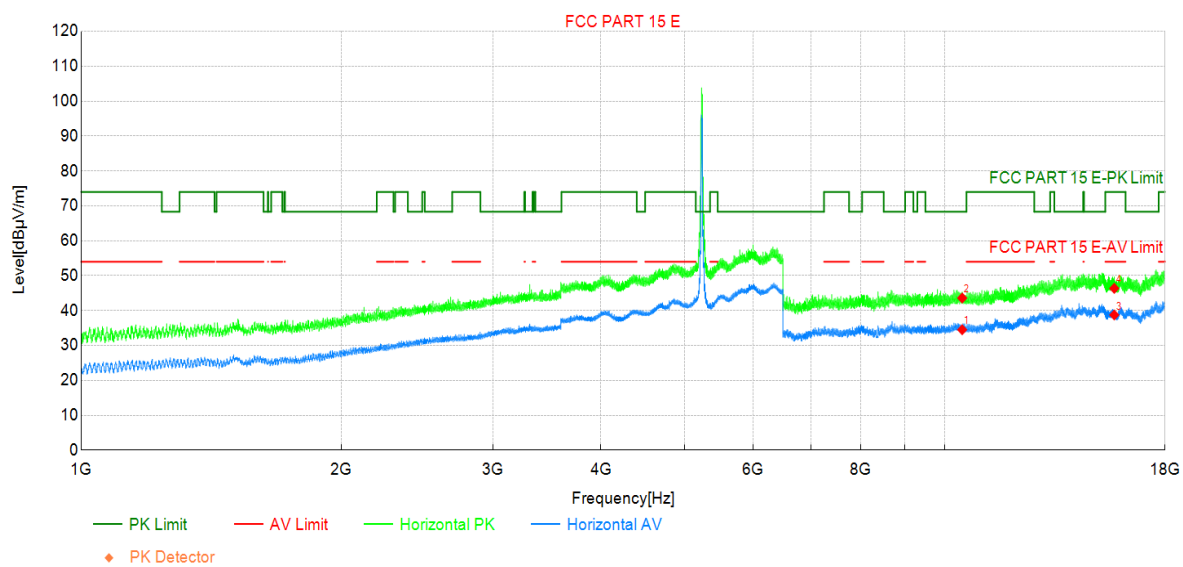

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	27.80	34.51	6.71	-	-	AV	Horizo	NA
2	10480.00	36.89	43.60	6.71	68.30	24.70	PK	Horizo	PASS
3	15720.00	24.33	38.74	14.41	54.00	15.26	AV	Horizo	PASS
4	15720.00	31.95	46.36	14.41	74.00	27.64	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5240MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

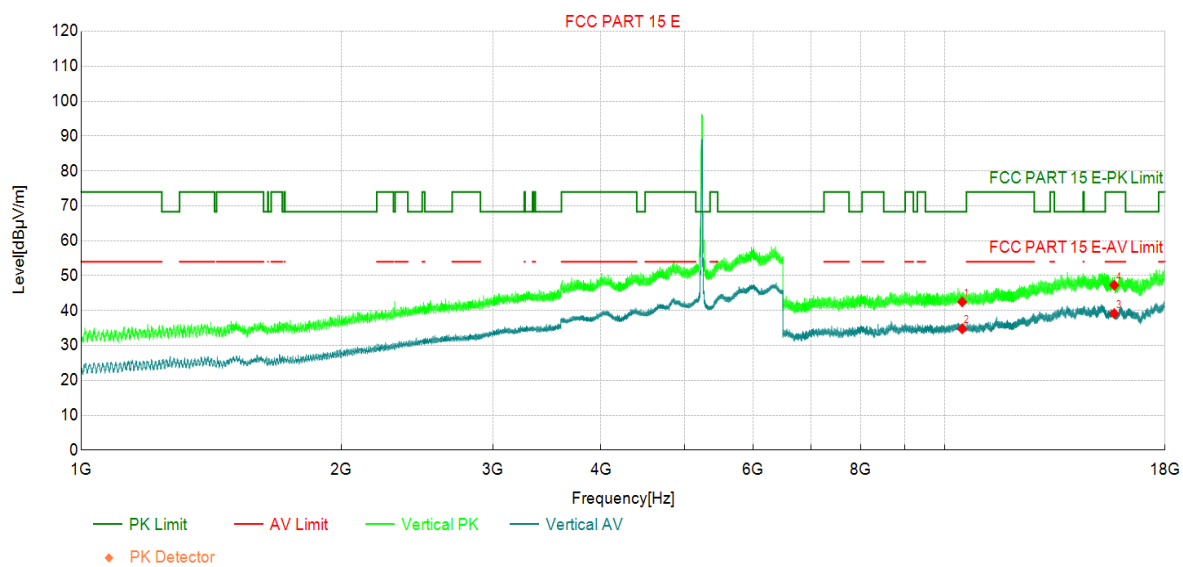

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	35.77	42.48	6.71	68.30	25.82	PK	Vertic	PASS
2	10480.00	28.06	34.77	6.71	-	-	AV	Vertic	NA
3	15720.00	24.74	39.15	14.41	54.00	14.85	AV	Vertic	PASS
4	15720.00	32.88	47.29	14.41	74.00	26.71	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5260MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

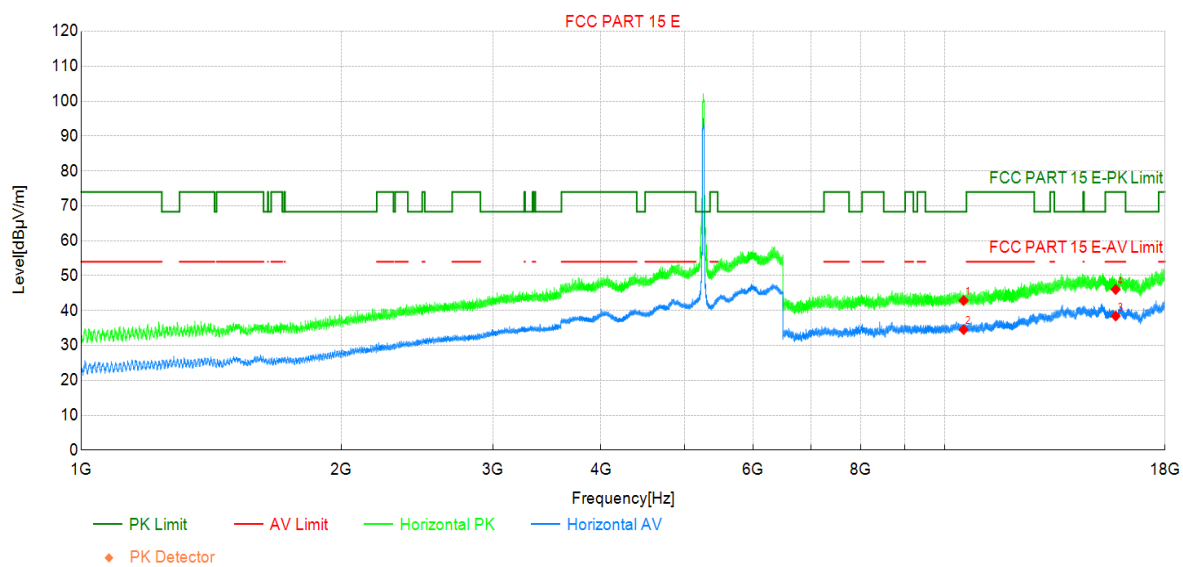

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	36.11	42.87	6.76	68.30	25.43	PK	Horizo	PASS
2	10520.00	27.78	34.54	6.76	-	-	AV	Horizo	NA
3	15780.00	24.34	38.43	14.09	54.00	15.57	AV	Horizo	PASS
4	15780.00	31.96	46.05	14.09	74.00	27.95	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5260MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

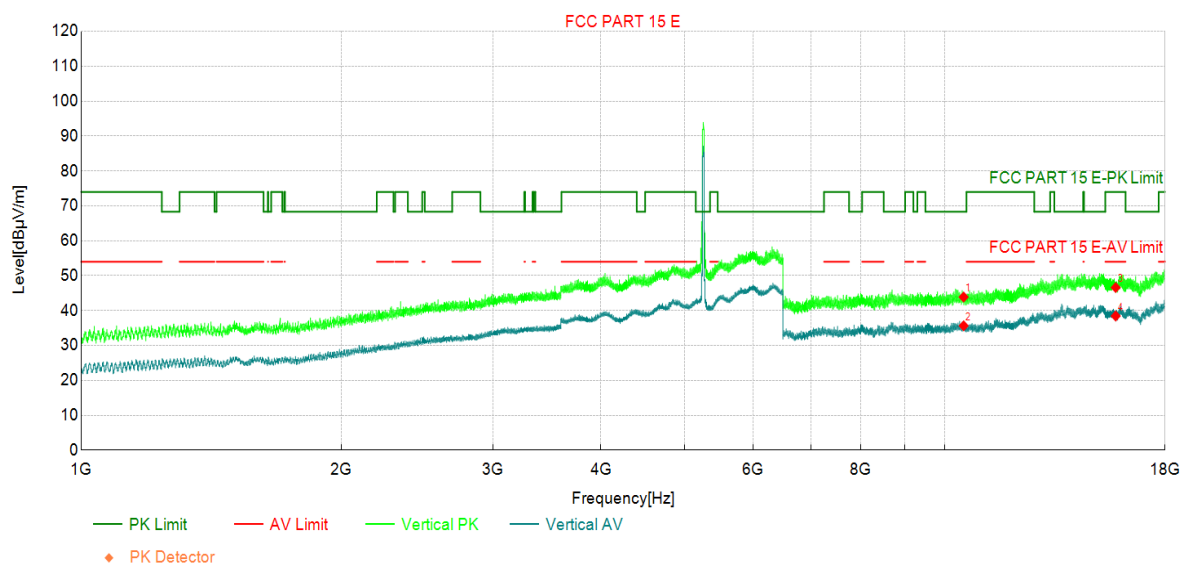

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	37.12	43.88	6.76	68.30	24.42	PK	Vertic	PASS
2	10520.00	28.87	35.63	6.76	-	-	AV	Vertic	NA
3	15780.00	32.51	46.60	14.09	74.00	27.40	PK	Vertic	PASS
4	15780.00	24.35	38.44	14.09	54.00	15.56	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5300MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

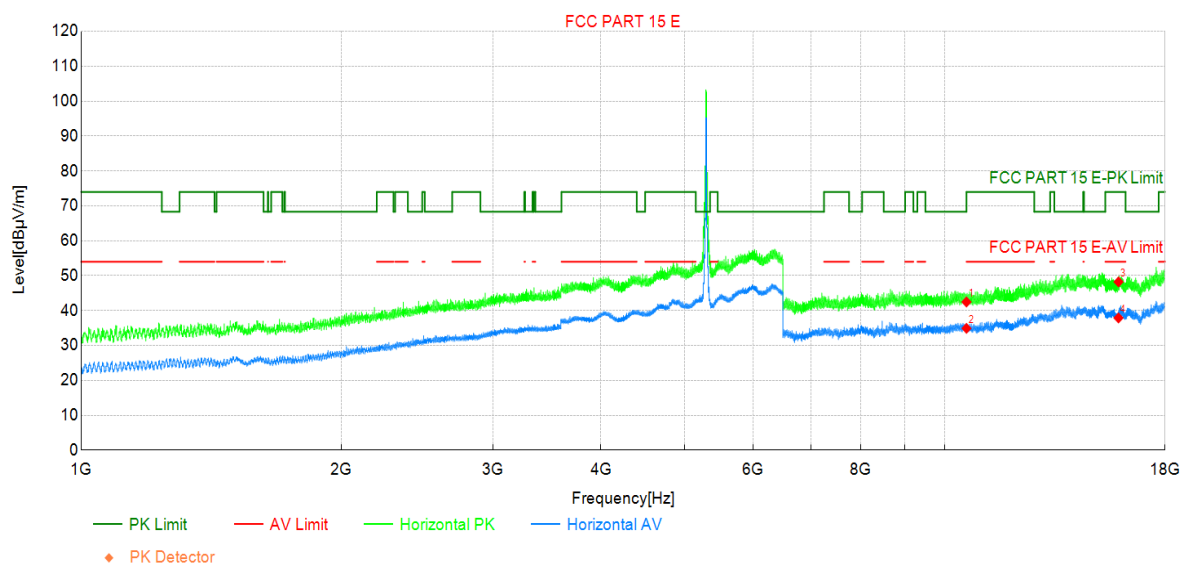

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.68	42.46	6.78	68.30	25.84	PK	Horizo	PASS
2	10600.00	28.12	34.90	6.78	54.00	19.10	AV	Horizo	PASS
3	15900.00	34.11	48.23	14.12	74.00	25.77	PK	Horizo	PASS
4	15900.00	23.77	37.89	14.12	54.00	16.11	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5300MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

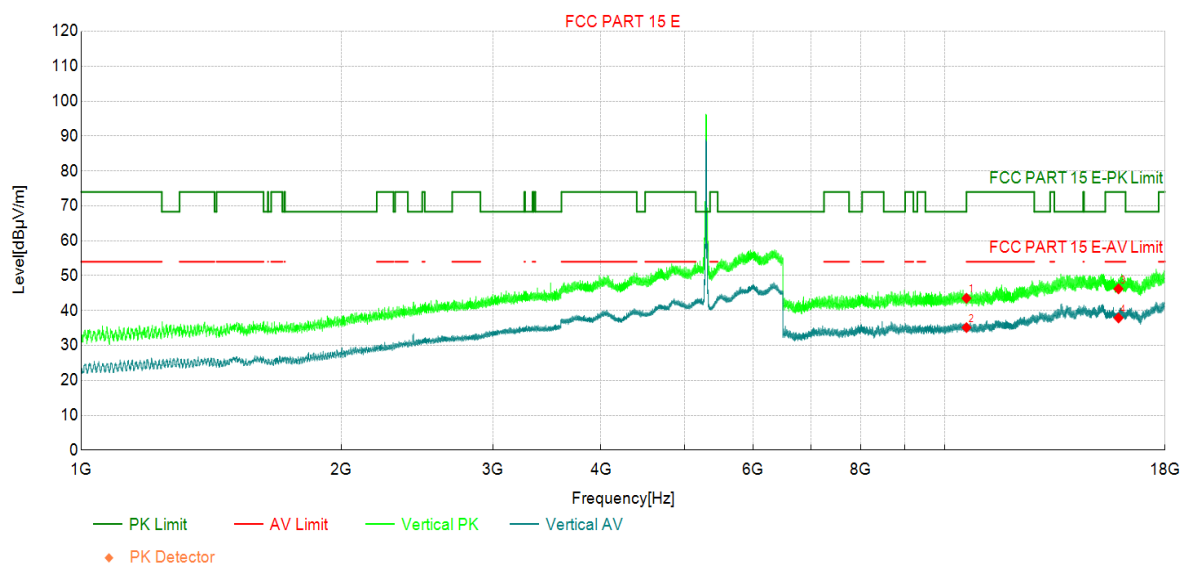

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	36.76	43.54	6.78	68.30	24.76	PK	Vertic	PASS
2	10600.00	28.35	35.13	6.78	54.00	18.87	AV	Vertic	PASS
3	15900.00	32.10	46.22	14.12	74.00	27.78	PK	Vertic	PASS
4	15900.00	23.75	37.87	14.12	54.00	16.13	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

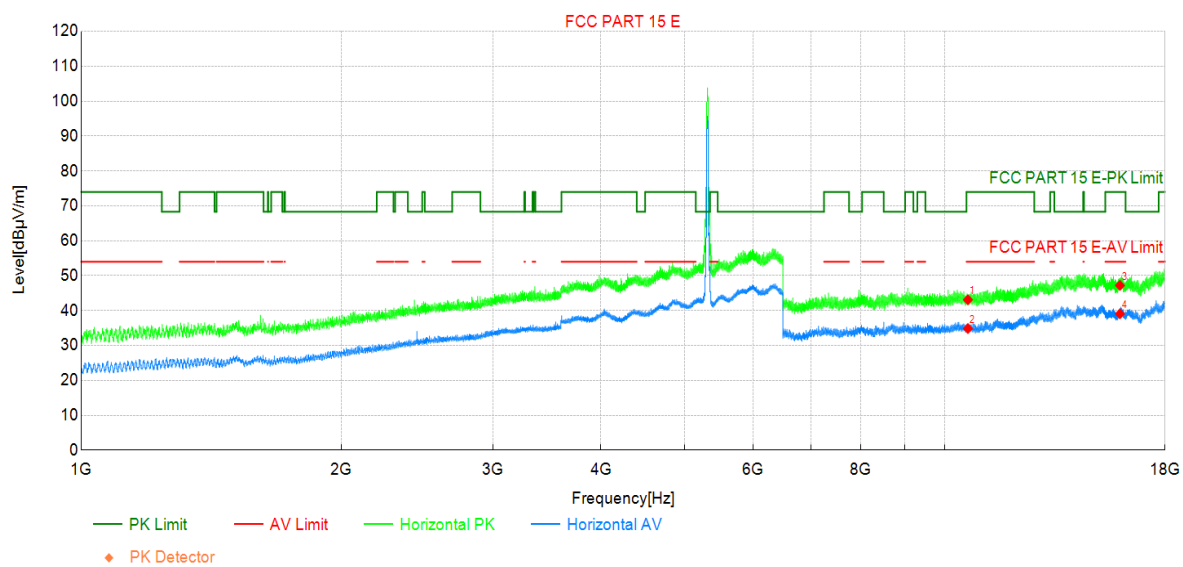

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	36.29	43.09	6.80	74.00	30.91	PK	Horizo	PASS
2	10640.00	28.06	34.86	6.80	54.00	19.14	AV	Horizo	PASS
3	15960.00	32.57	47.20	14.63	74.00	26.80	PK	Horizo	PASS
4	15960.00	24.44	39.07	14.63	54.00	14.93	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5320MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

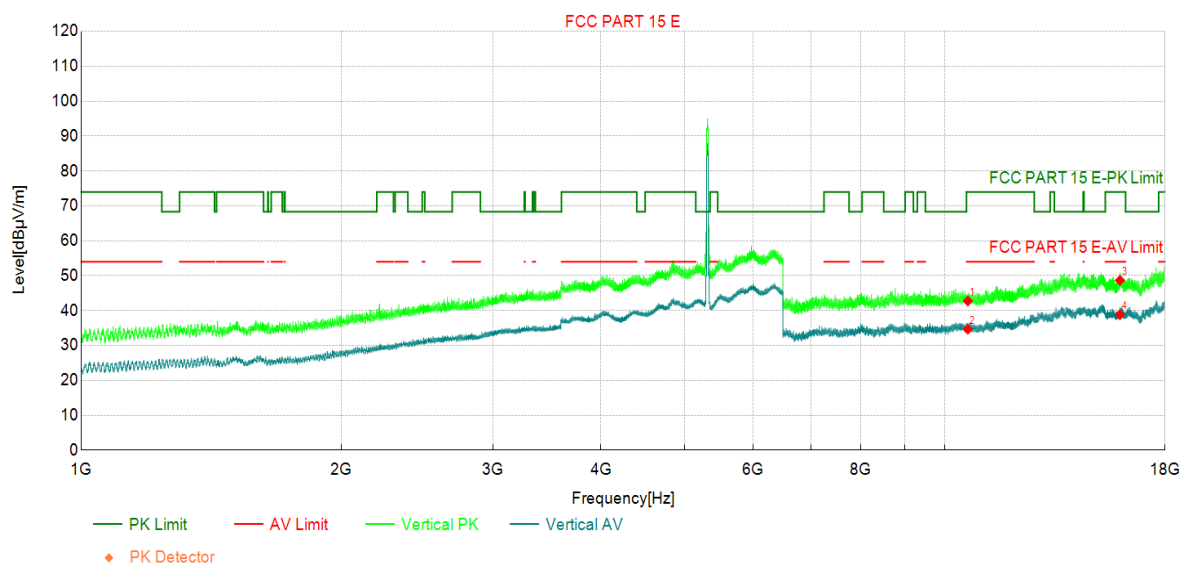

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.96	42.76	6.80	74.00	31.24	PK	Vertic	PASS
2	10640.00	27.86	34.66	6.80	54.00	19.34	AV	Vertic	PASS
3	15960.00	34.04	48.67	14.63	74.00	25.33	PK	Vertic	PASS
4	15960.00	24.16	38.79	14.63	54.00	15.21	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

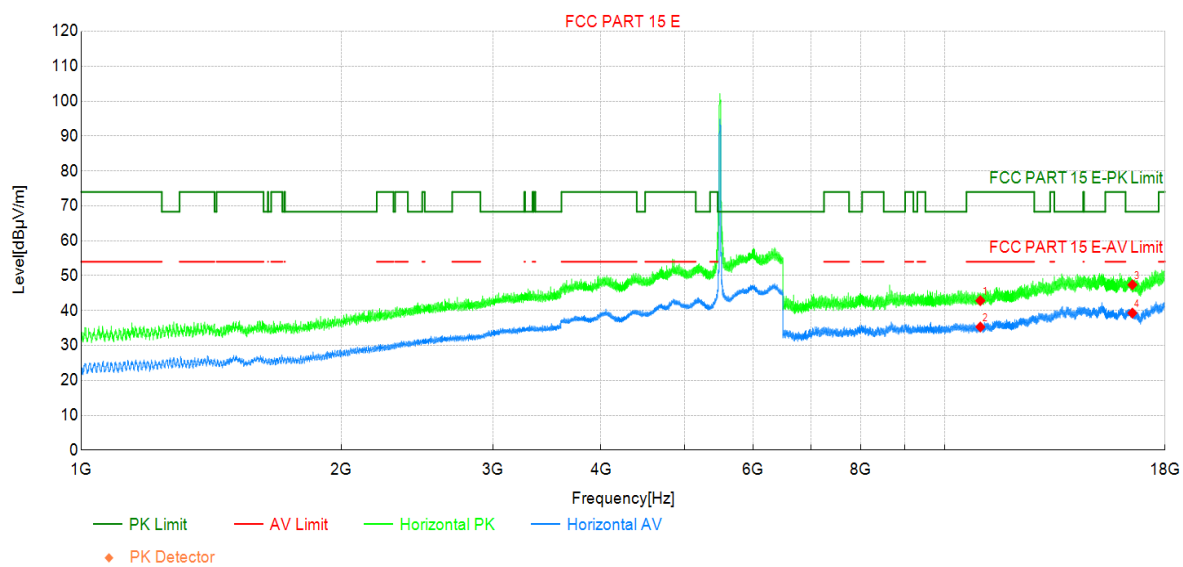

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	35.44	42.84	7.40	74.00	31.16	PK	Horizo	PASS
2	11000.00	27.90	35.30	7.40	54.00	18.70	AV	Horizo	PASS
3	16500.00	32.28	47.39	15.11	68.30	20.91	PK	Horizo	PASS
4	16500.00	24.18	39.29	15.11	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5500MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

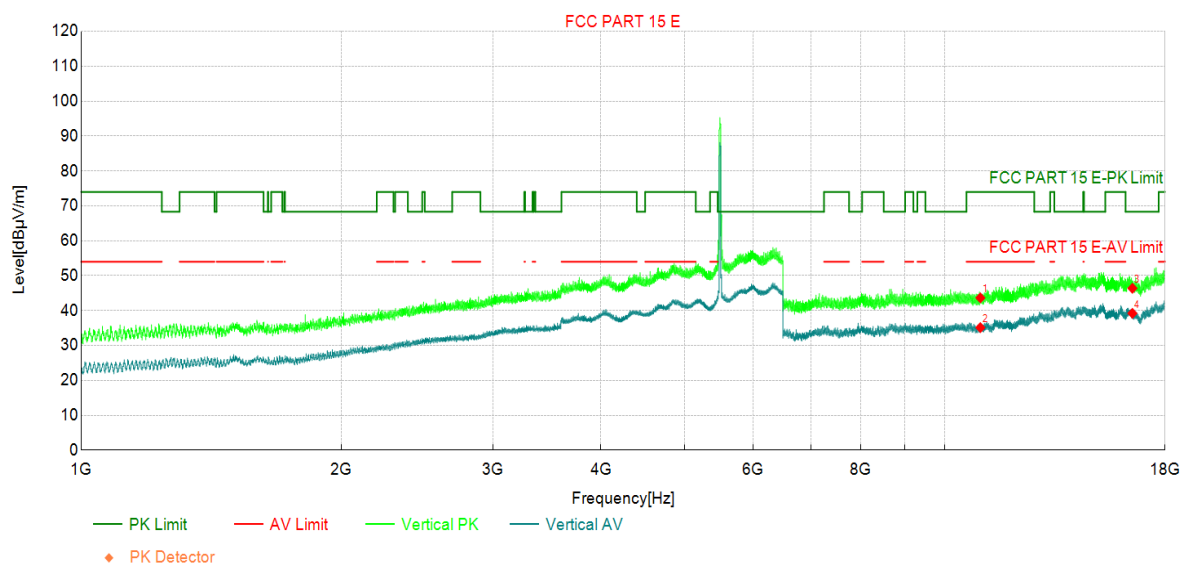

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	36.24	43.64	7.40	74.00	30.36	PK	Vertic	PASS
2	11000.00	27.72	35.12	7.40	54.00	18.88	AV	Vertic	PASS
3	16500.00	31.28	46.39	15.11	68.30	21.91	PK	Vertic	PASS
4	16500.00	24.09	39.20	15.11	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5580MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

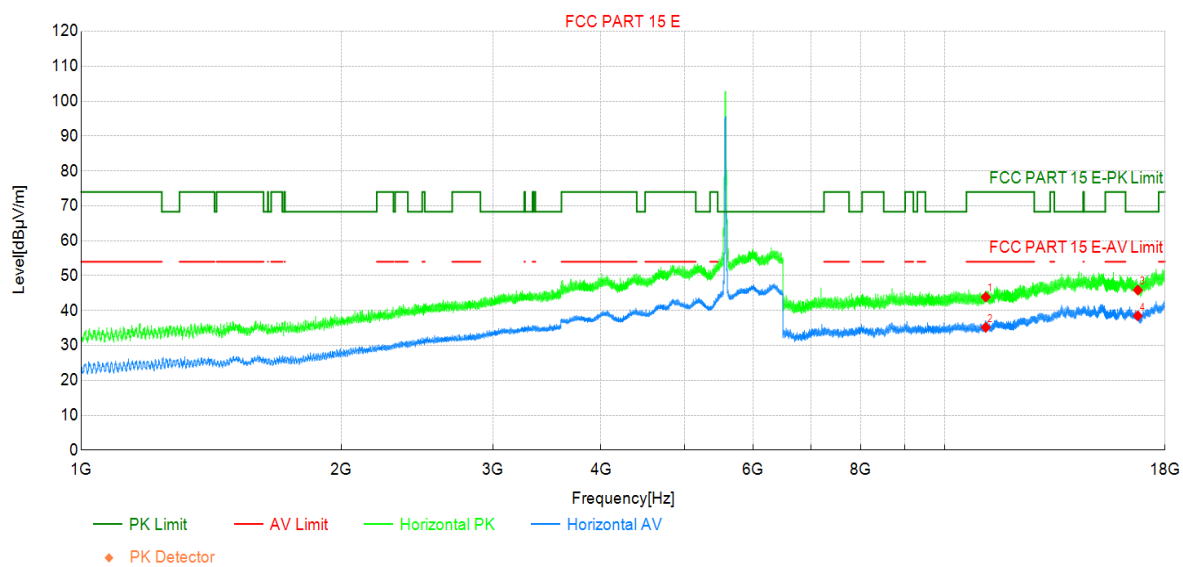

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	36.59	43.88	7.29	74.00	30.12	PK	Horizo	PASS
2	11160.00	27.88	35.17	7.29	54.00	18.83	AV	Horizo	PASS
3	16740.00	31.25	45.87	14.62	68.30	22.43	PK	Horizo	PASS
4	16740.00	23.88	38.50	14.62	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5580MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

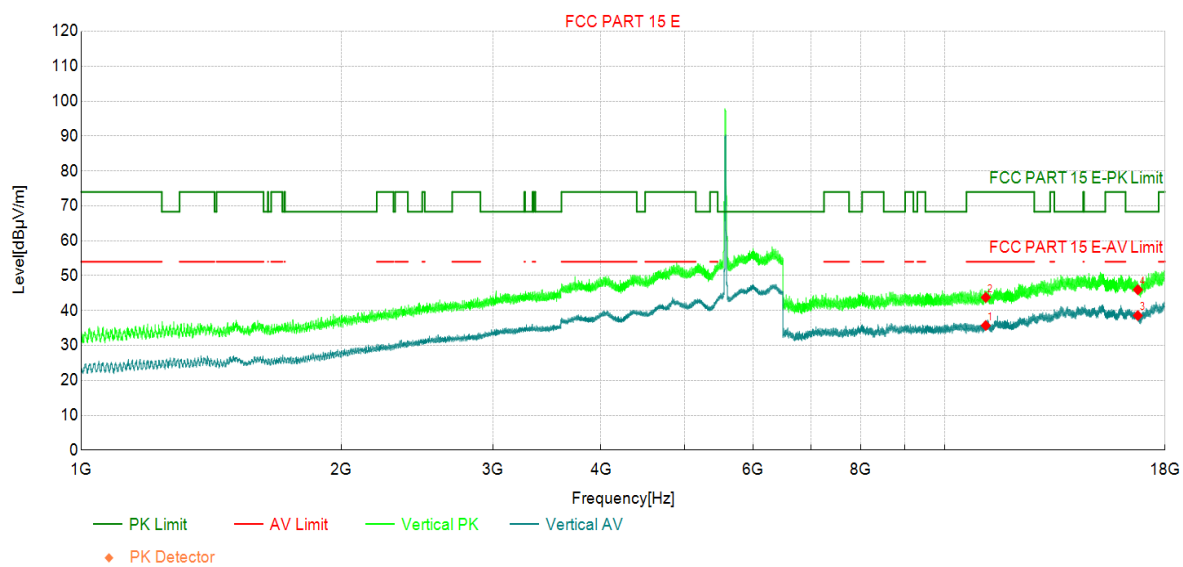

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	28.42	35.71	7.29	54.00	18.29	AV	Vertic	PASS
2	11160.00	36.48	43.77	7.29	74.00	30.23	PK	Vertic	PASS
3	16740.00	23.95	38.57	14.62	-	-	AV	Vertic	NA
4	16740.00	31.35	45.97	14.62	68.30	22.33	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5700MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

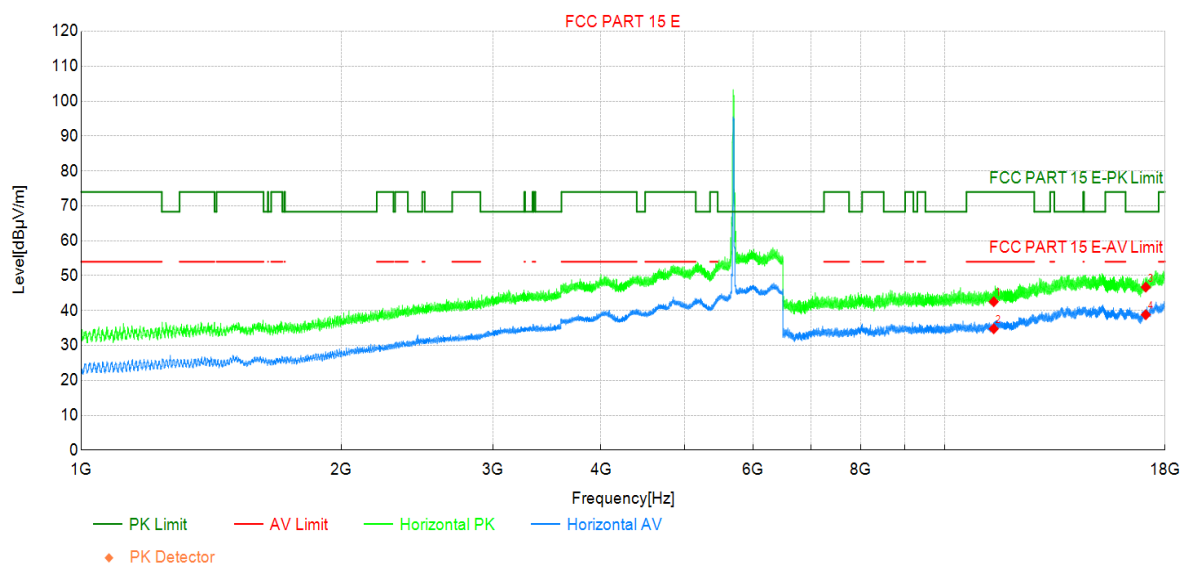

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	34.71	42.54	7.83	74.00	31.46	PK	Horizo	PASS
2	11400.00	26.95	34.78	7.83	54.00	19.22	AV	Horizo	PASS
3	17100.00	30.88	46.70	15.82	68.30	21.60	PK	Horizo	PASS
4	17100.00	22.98	38.80	15.82	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5700MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

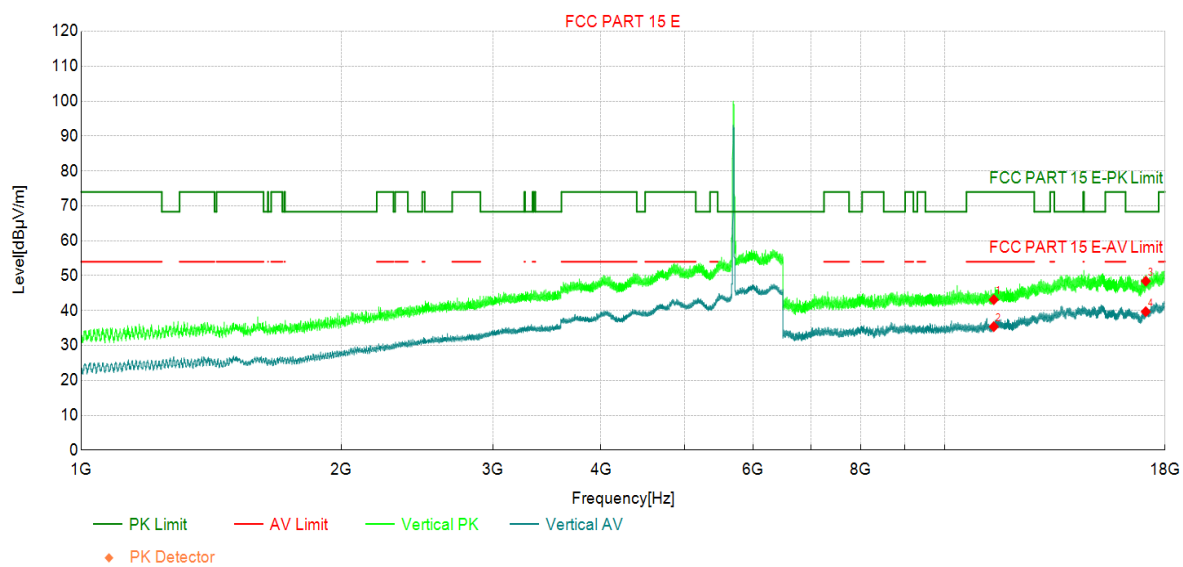

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	35.29	43.12	7.83	74.00	30.88	PK	Vertic	PASS
2	11400.00	27.56	35.39	7.83	54.00	18.61	AV	Vertic	PASS
3	17100.00	32.61	48.43	15.82	68.30	19.87	PK	Vertic	PASS
4	17100.00	23.87	39.69	15.82	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5745MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

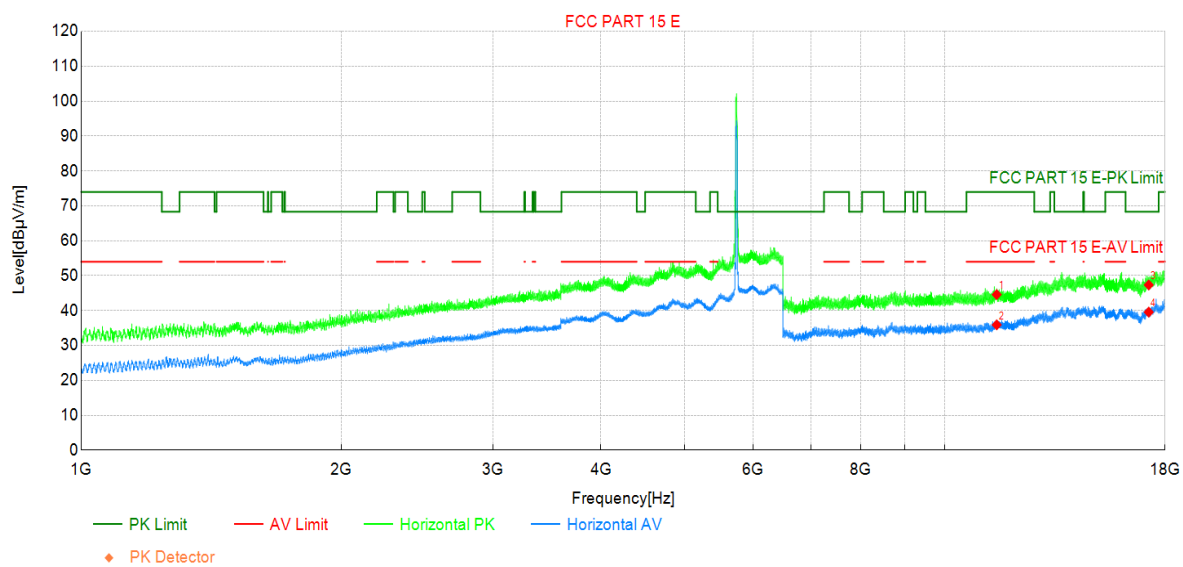

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	36.20	44.58	8.38	74.00	29.42	PK	Horizo	PASS
2	11490.00	27.52	35.90	8.38	54.00	18.10	AV	Horizo	PASS
3	17235.00	31.87	47.33	15.46	68.30	20.97	PK	Horizo	PASS
4	17235.00	24.09	39.55	15.46	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5745MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

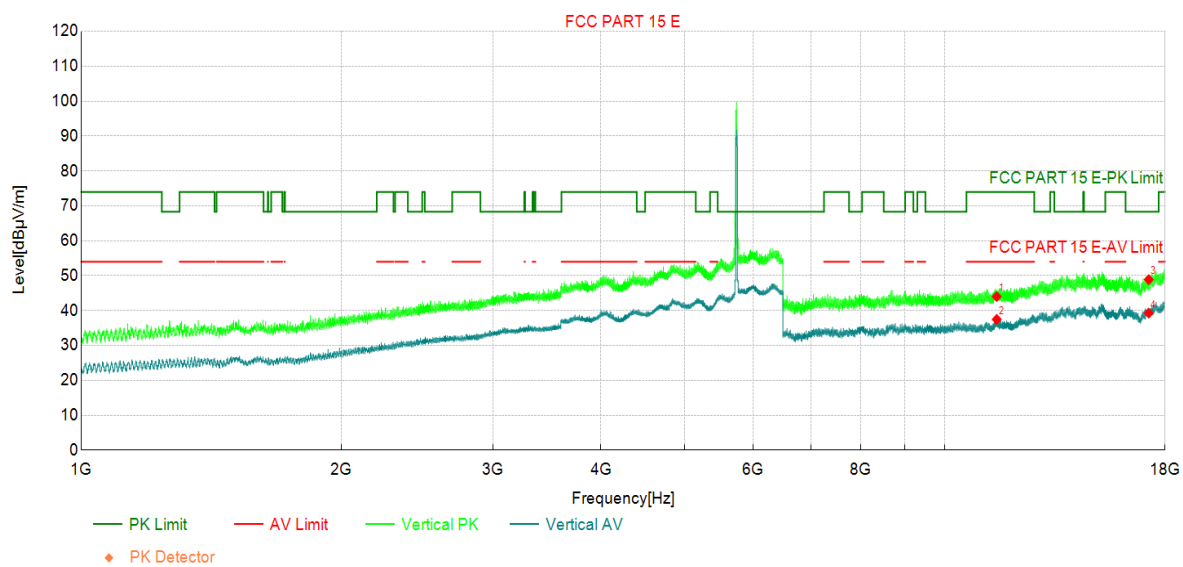

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	35.63	44.01	8.38	74.00	29.99	PK	Vertic	PASS
2	11490.00	29.09	37.47	8.38	54.00	16.53	AV	Vertic	PASS
3	17235.00	33.41	48.87	15.46	68.30	19.43	PK	Vertic	PASS
4	17235.00	23.80	39.26	15.46	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5785MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

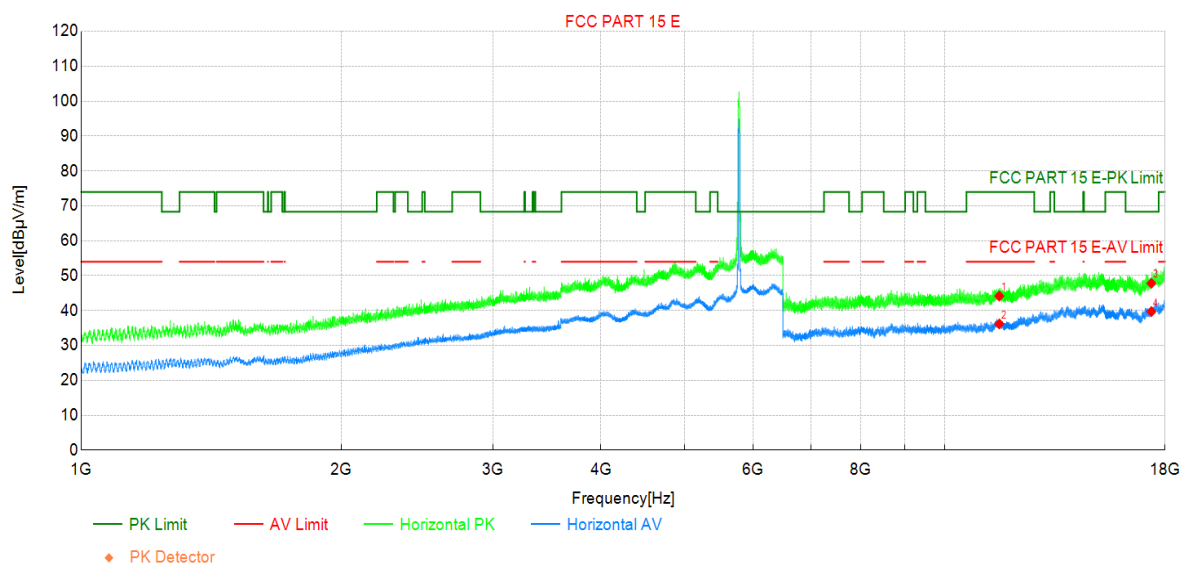

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	35.48	44.16	8.68	74.00	29.84	PK	Horizo	PASS
2	11570.00	27.49	36.17	8.68	54.00	17.83	AV	Horizo	PASS
3	17355.00	31.61	47.83	16.22	68.30	20.47	PK	Horizo	PASS
4	17355.00	23.48	39.70	16.22	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5785MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

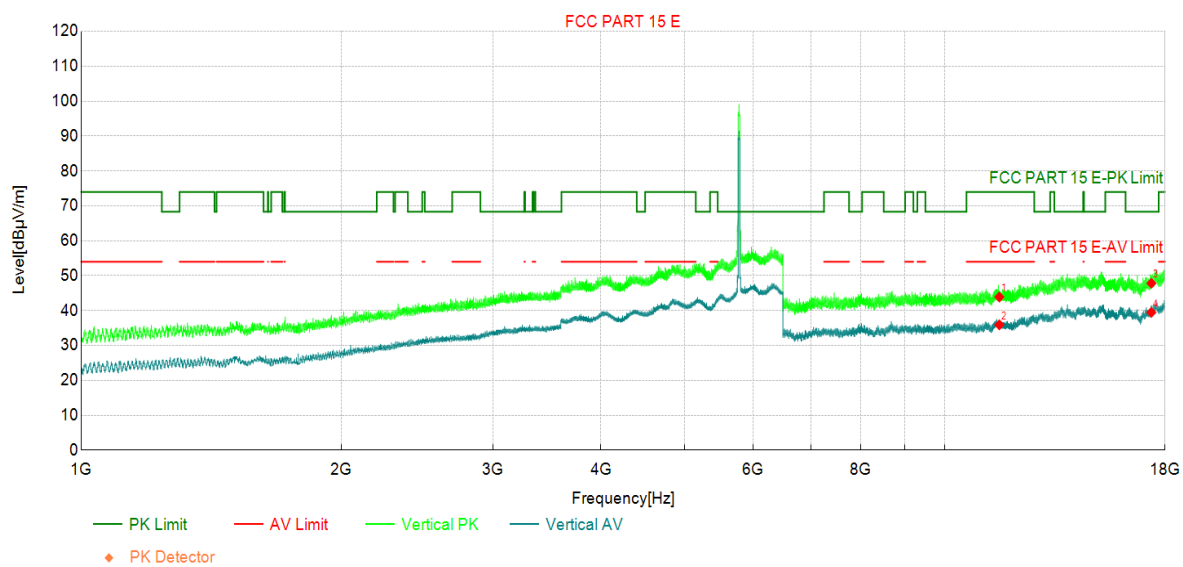

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	35.21	43.89	8.68	74.00	30.11	PK	Vertic	PASS
2	11570.00	27.23	35.91	8.68	54.00	18.09	AV	Vertic	PASS
3	17355.00	31.60	47.82	16.22	68.30	20.48	PK	Vertic	PASS
4	17355.00	23.25	39.47	16.22	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5825MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

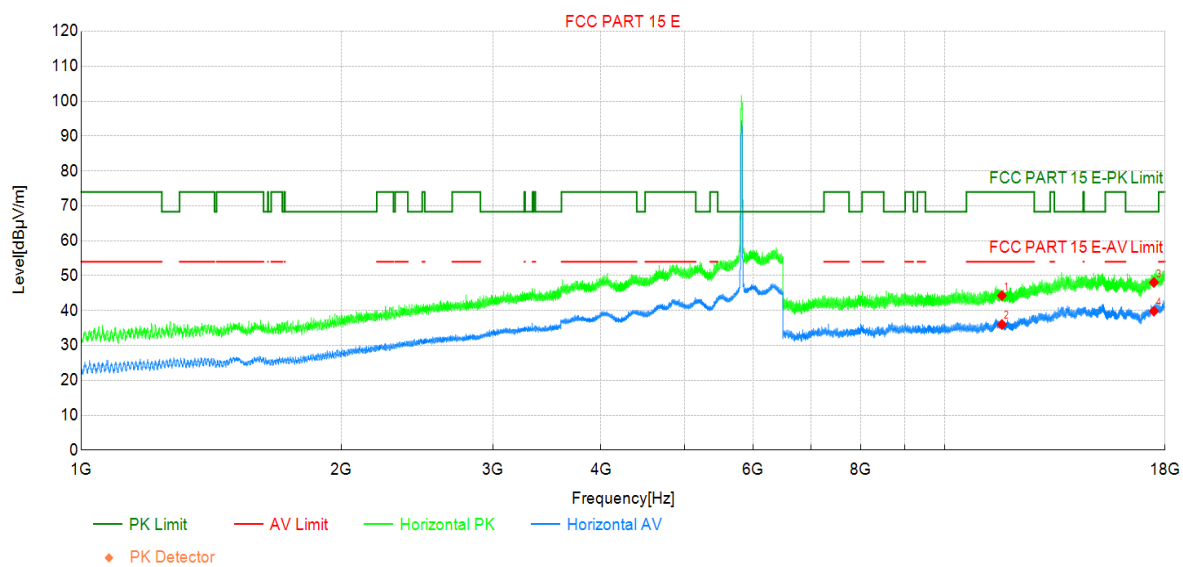

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	35.55	44.29	8.74	74.00	29.71	PK	Horizo	PASS
2	11650.00	27.27	36.01	8.74	54.00	17.99	AV	Horizo	PASS
3	17475.00	30.99	48.06	17.07	68.30	20.24	PK	Horizo	PASS
4	17475.00	22.75	39.82	17.07	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode2:Transmit at 5825MHz by 802.11n(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

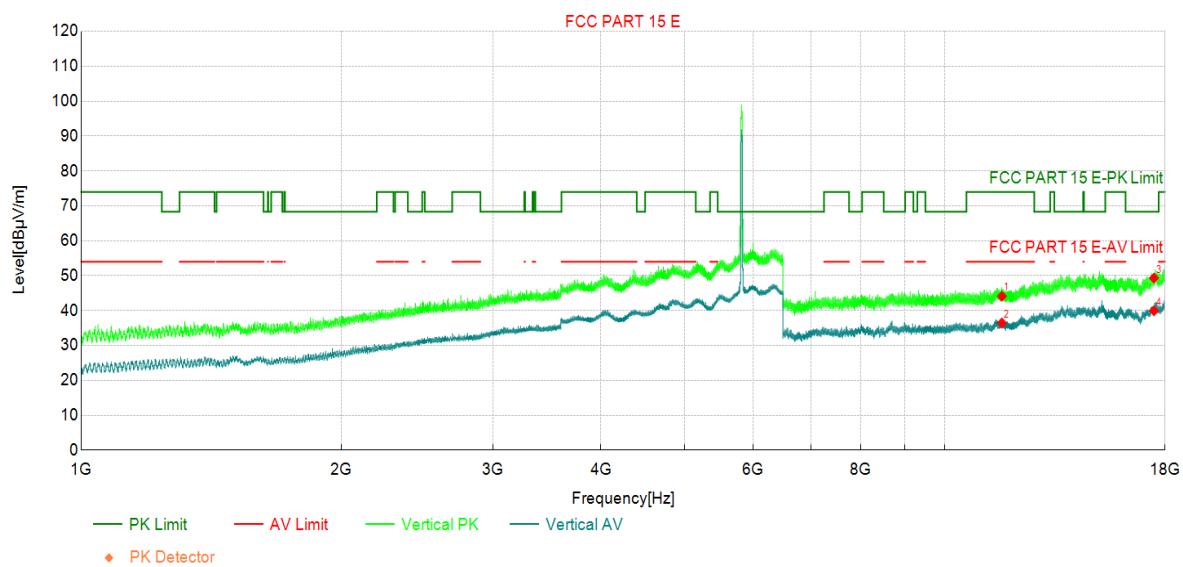

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	35.38	44.12	8.74	74.00	29.88	PK	Vertic	PASS
2	11650.00	27.70	36.44	8.74	54.00	17.56	AV	Vertic	PASS
3	17475.00	32.24	49.31	17.07	68.30	18.99	PK	Vertic	PASS
4	17475.00	22.87	39.94	17.07	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

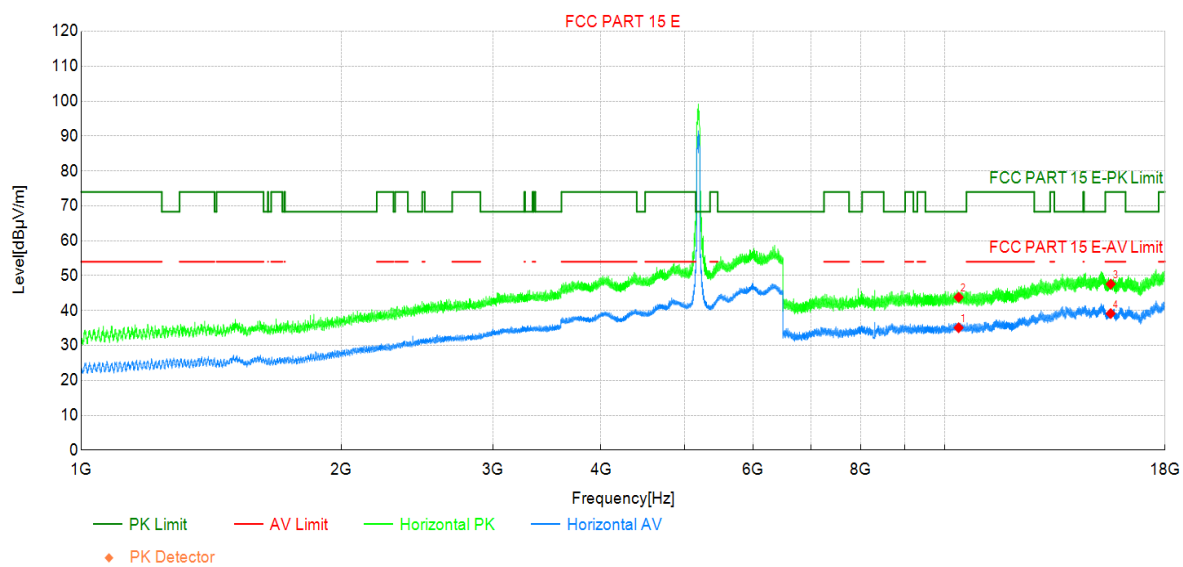

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	28.51	35.08	6.57	-	-	AV	Horizo	NA
2	10380.00	37.25	43.82	6.57	68.30	24.48	PK	Horizo	PASS
3	15570.00	33.90	47.59	13.69	74.00	26.41	PK	Horizo	PASS
4	15570.00	25.45	39.14	13.69	54.00	14.86	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5190MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

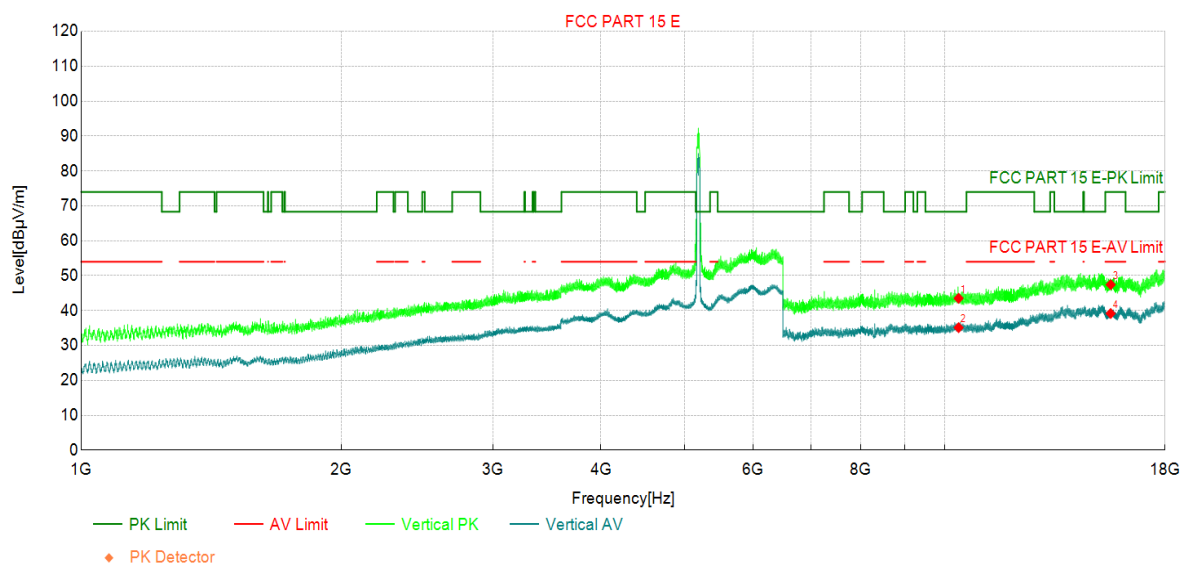

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	36.94	43.51	6.57	68.30	24.79	PK	Vertic	PASS
2	10380.00	28.54	35.11	6.57	-	-	AV	Vertic	NA
3	15570.00	33.73	47.42	13.69	74.00	26.58	PK	Vertic	PASS
4	15570.00	25.47	39.16	13.69	54.00	14.84	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5230MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

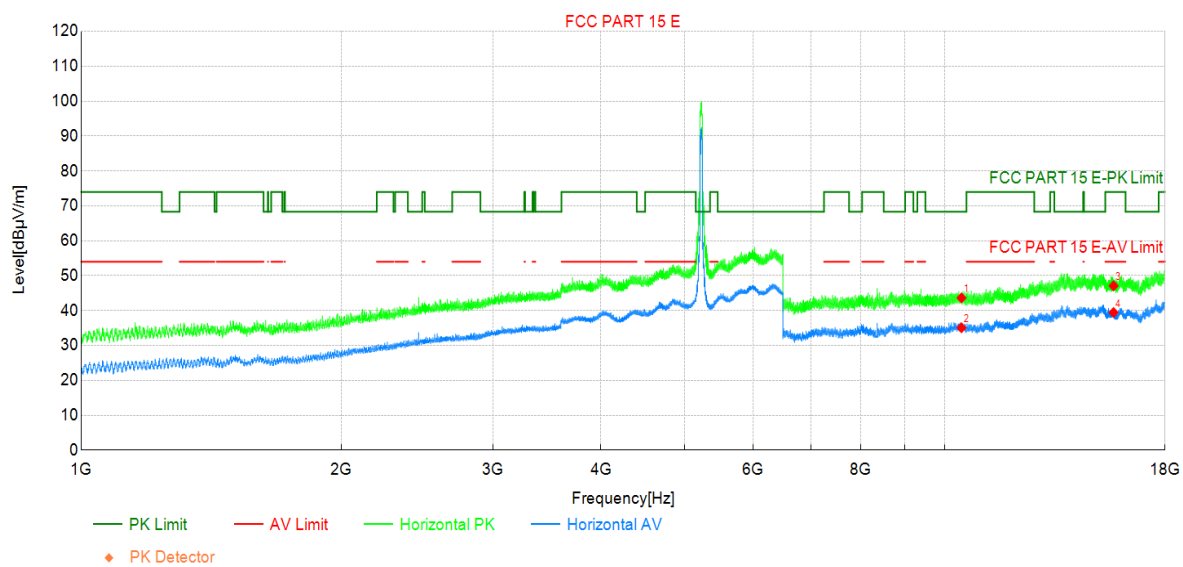

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	36.96	43.63	6.67	68.30	24.67	PK	Horizo	PASS
2	10460.00	28.40	35.07	6.67	-	-	AV	Horizo	NA
3	15690.00	32.68	47.09	14.41	74.00	26.91	PK	Horizo	PASS
4	15690.00	25.04	39.45	14.41	54.00	14.55	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5230MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

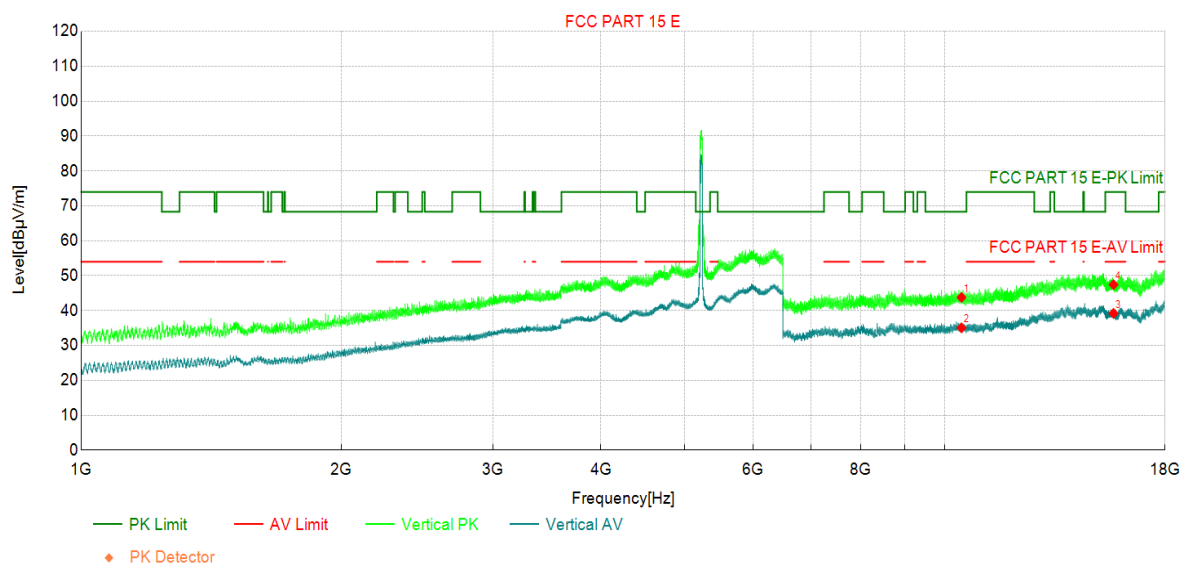

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	37.10	43.77	6.67	68.30	24.53	PK	Vertic	PASS
2	10460.00	28.37	35.04	6.67	-	-	AV	Vertic	NA
3	15690.00	24.78	39.19	14.41	54.00	14.81	AV	Vertic	PASS
4	15690.00	33.00	47.41	14.41	74.00	26.59	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5270MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

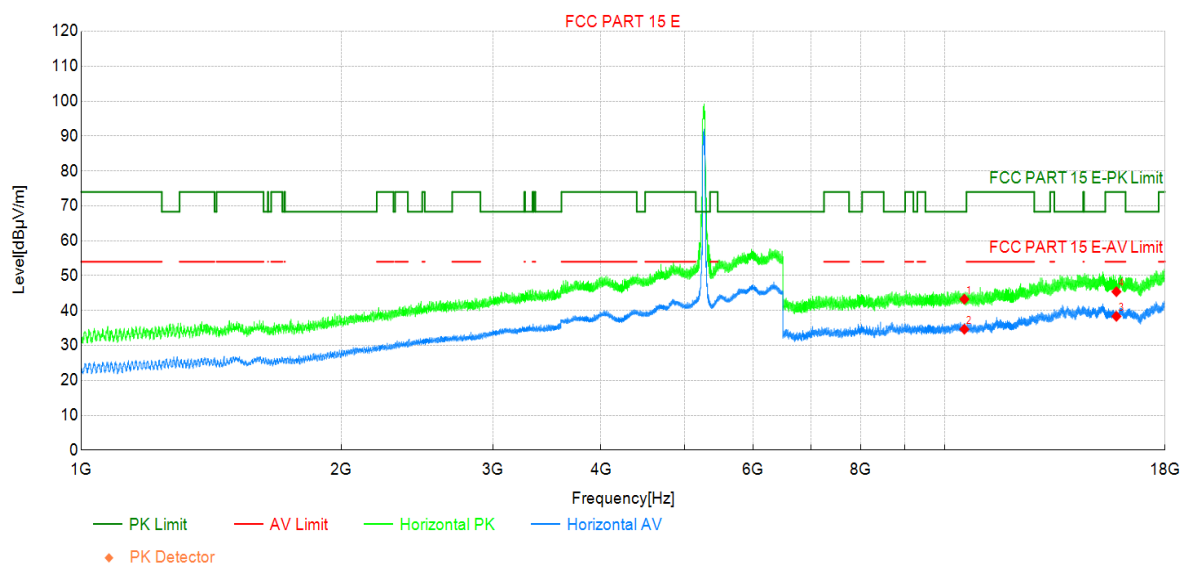

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	36.50	43.26	6.76	68.30	25.04	PK	Horizo	PASS
2	10540.00	27.88	34.64	6.76	-	-	AV	Horizo	NA
3	15810.00	24.34	38.35	14.01	54.00	15.65	AV	Horizo	PASS
4	15810.00	31.39	45.40	14.01	74.00	28.60	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5270MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

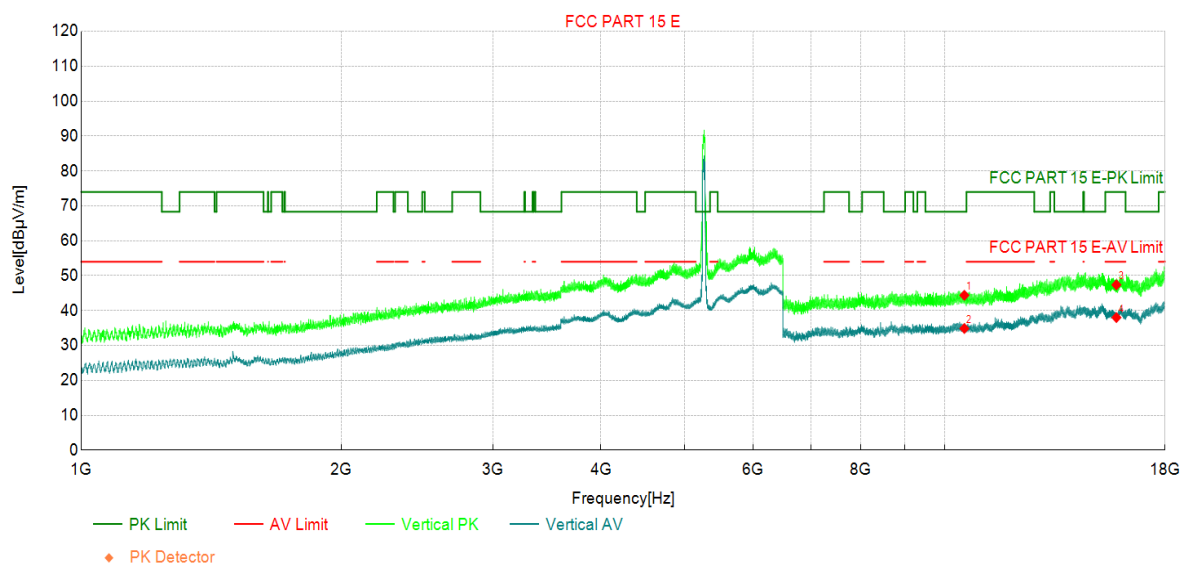

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	37.61	44.37	6.76	68.30	23.93	PK	Vertic	PASS
2	10540.00	28.11	34.87	6.76	-	-	AV	Vertic	NA
3	15810.00	33.36	47.37	14.01	74.00	26.63	PK	Vertic	PASS
4	15810.00	23.99	38.00	14.01	54.00	16.00	AV	Vertic	PASS