


Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

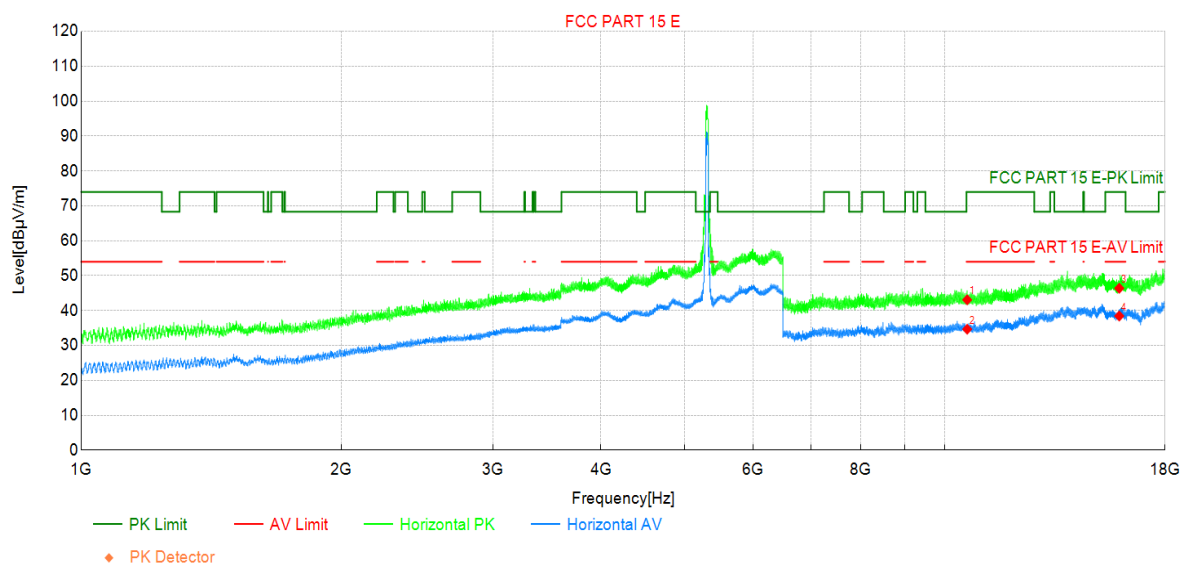

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	36.29	43.08	6.79	74.00	30.92	PK	Horizo	PASS
2	10620.00	27.87	34.66	6.79	54.00	19.34	AV	Horizo	PASS
3	15930.00	32.03	46.40	14.37	74.00	27.60	PK	Horizo	PASS
4	15930.00	24.07	38.44	14.37	54.00	15.56	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5310MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

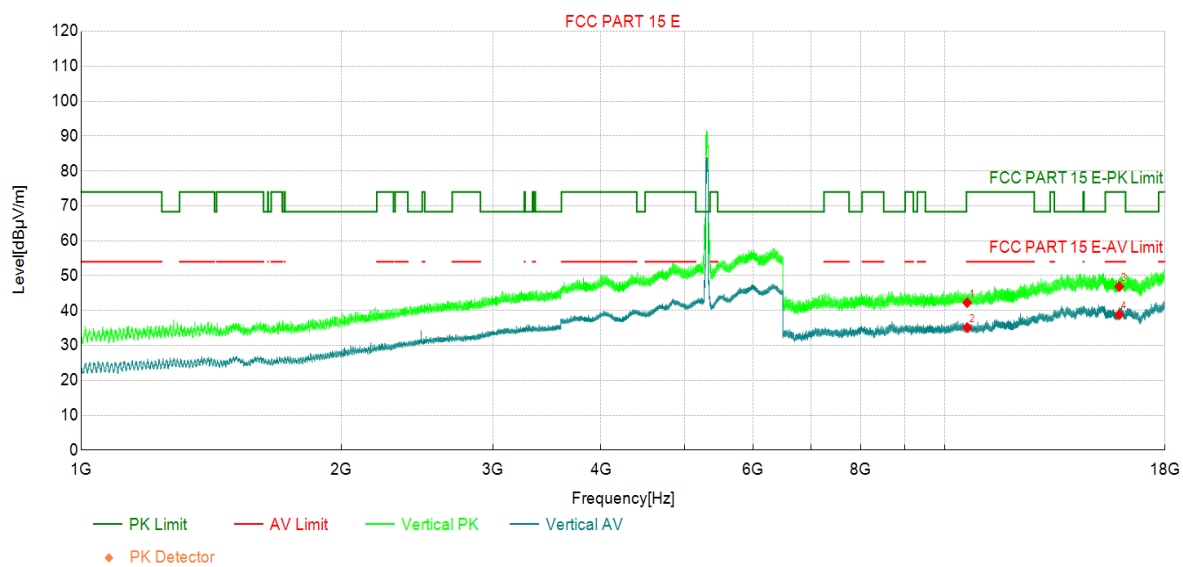

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	35.47	42.26	6.79	74.00	31.74	PK	Vertic	PASS
2	10620.00	28.34	35.13	6.79	54.00	18.87	AV	Vertic	PASS
3	15930.00	32.50	46.87	14.37	74.00	27.13	PK	Vertic	PASS
4	15930.00	24.45	38.82	14.37	54.00	15.18	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

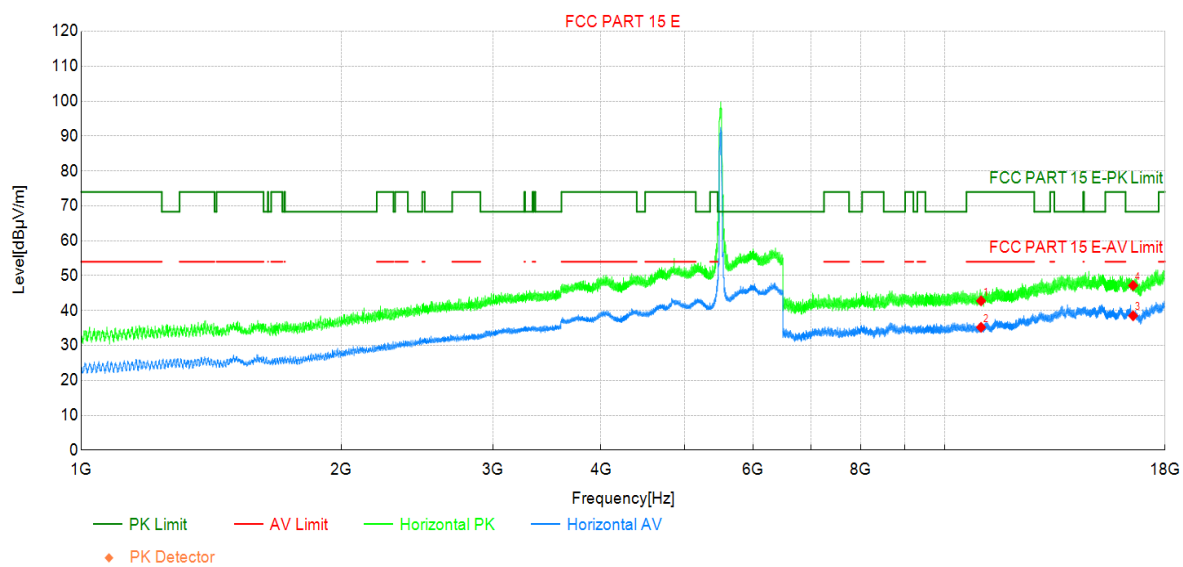

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	35.53	42.78	7.25	74.00	31.22	PK	Horizo	PASS
2	11020.00	27.95	35.20	7.25	54.00	18.80	AV	Horizo	PASS
3	16530.00	23.50	38.51	15.01	-	-	AV	Horizo	NA
4	16530.00	32.17	47.18	15.01	68.30	21.12	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

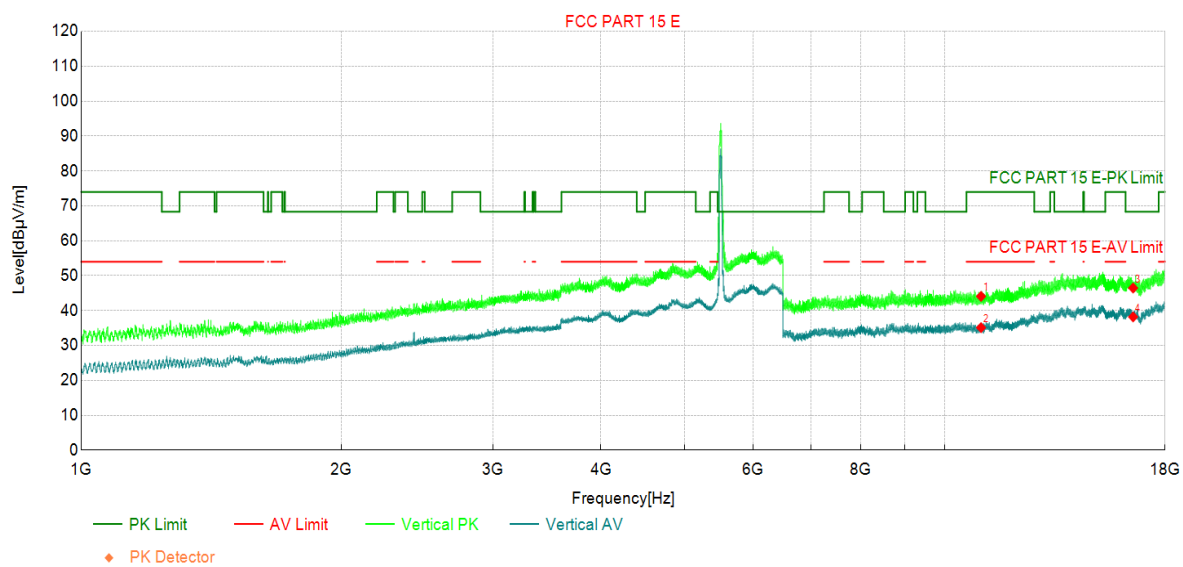

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	36.82	44.07	7.25	74.00	29.93	PK	Vertic	PASS
2	11020.00	27.86	35.11	7.25	54.00	18.89	AV	Vertic	PASS
3	16530.00	31.44	46.45	15.01	68.30	21.85	PK	Vertic	PASS
4	16530.00	23.18	38.19	15.01	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5550MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

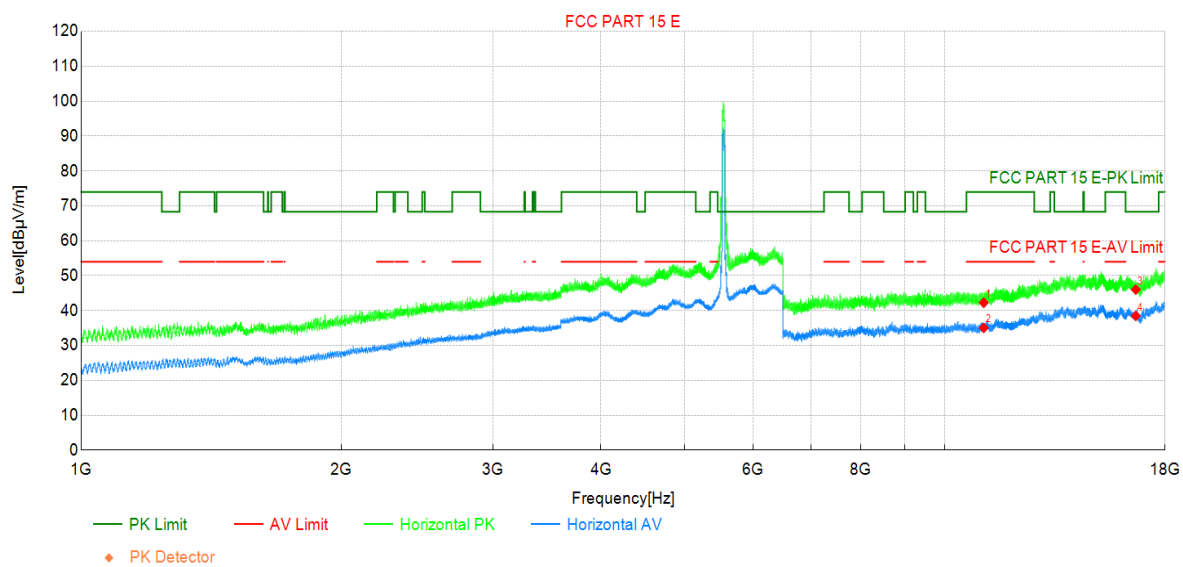

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	35.60	42.26	6.66	74.00	31.74	PK	Horizo	PASS
2	11100.00	28.39	35.05	6.66	54.00	18.95	AV	Horizo	PASS
3	16650.00	31.32	46.01	14.69	68.30	22.29	PK	Horizo	PASS
4	16650.00	23.78	38.47	14.69	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5550MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

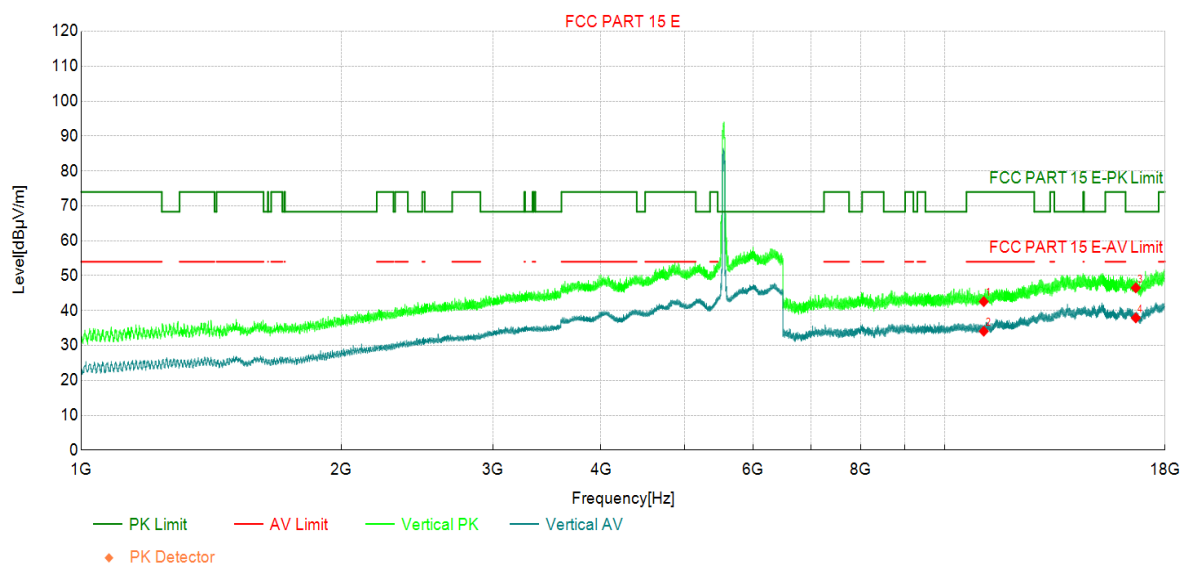

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	35.92	42.58	6.66	74.00	31.42	PK	Vertic	PASS
2	11100.00	27.41	34.07	6.66	54.00	19.93	AV	Vertic	PASS
3	16650.00	31.81	46.50	14.69	68.30	21.80	PK	Vertic	PASS
4	16650.00	23.20	37.89	14.69	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

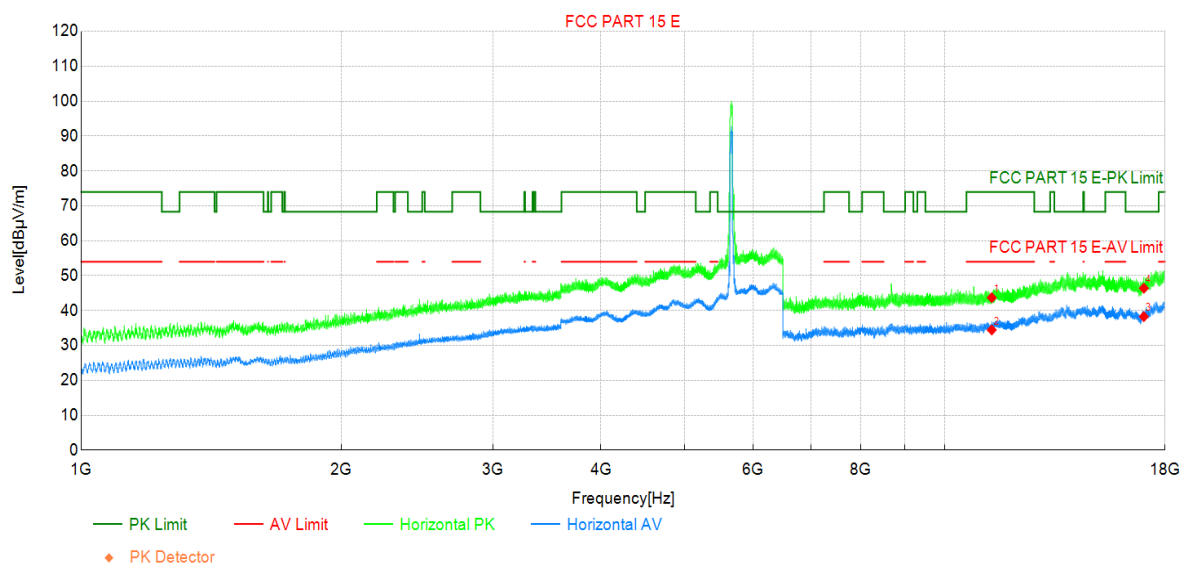

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	35.84	43.70	7.86	74.00	30.30	PK	Horizo	PASS
2	11340.00	26.59	34.45	7.86	54.00	19.55	AV	Horizo	PASS
3	17010.00	22.22	38.26	16.04	-	-	AV	Horizo	NA
4	17010.00	30.37	46.41	16.04	68.30	21.89	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

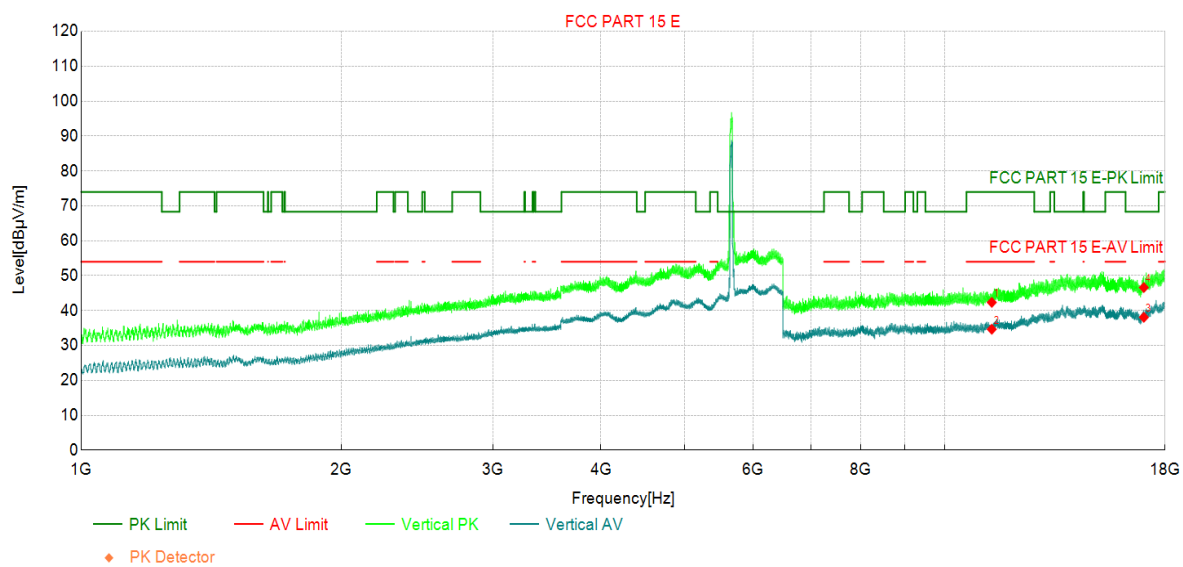

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	34.49	42.35	7.86	74.00	31.65	PK	Vertic	PASS
2	11340.00	26.79	34.65	7.86	54.00	19.35	AV	Vertic	PASS
3	17010.00	22.03	38.07	16.04	-	-	AV	Vertic	NA
4	17010.00	30.56	46.60	16.04	68.30	21.70	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5755MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

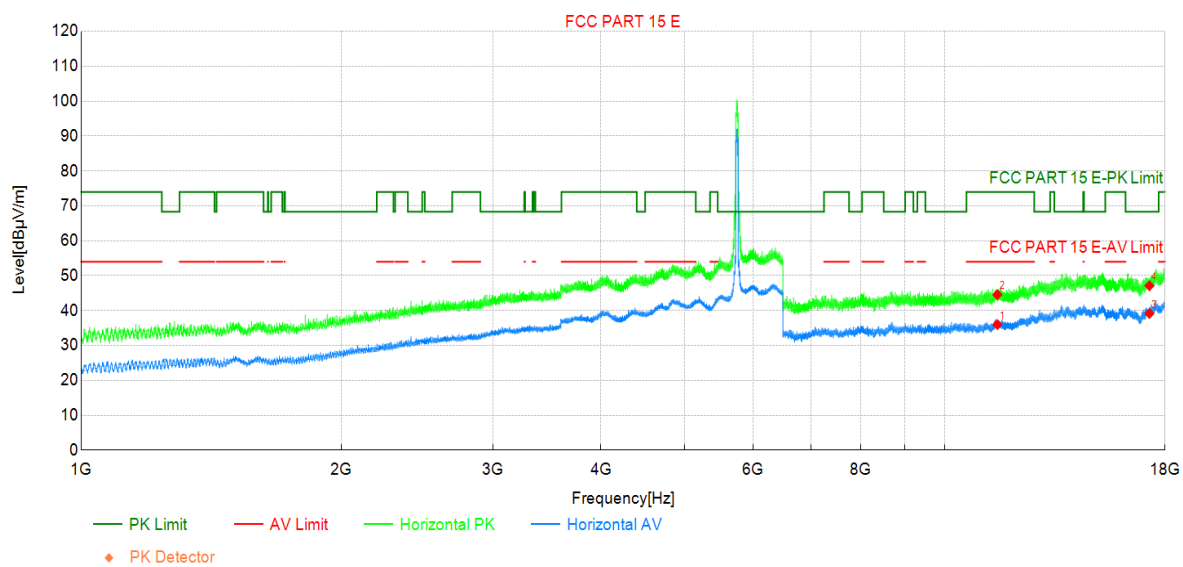

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	27.50	35.98	8.48	54.00	18.02	AV	Horizo	PASS
2	11510.00	36.09	44.57	8.48	74.00	29.43	PK	Horizo	PASS
3	17265.00	23.65	39.16	15.51	-	-	AV	Horizo	NA
4	17265.00	31.61	47.12	15.51	68.30	21.18	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5755MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

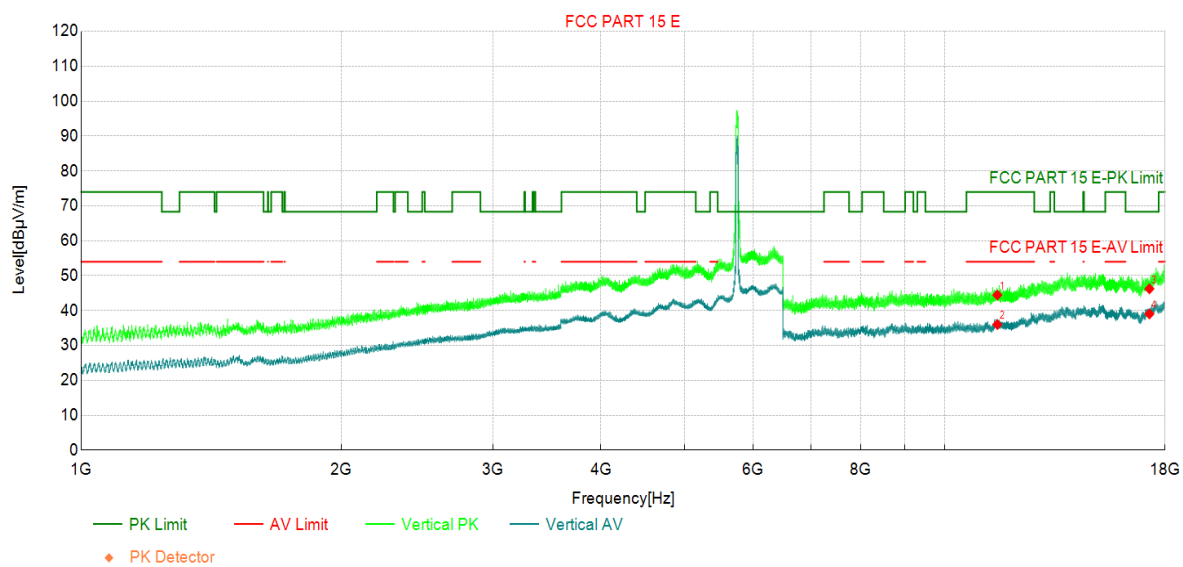

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	35.98	44.46	8.48	74.00	29.54	PK	Vertic	PASS
2	11510.00	27.53	36.01	8.48	54.00	17.99	AV	Vertic	PASS
3	17265.00	30.72	46.23	15.51	68.30	22.07	PK	Vertic	PASS
4	17265.00	23.53	39.04	15.51	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5795MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

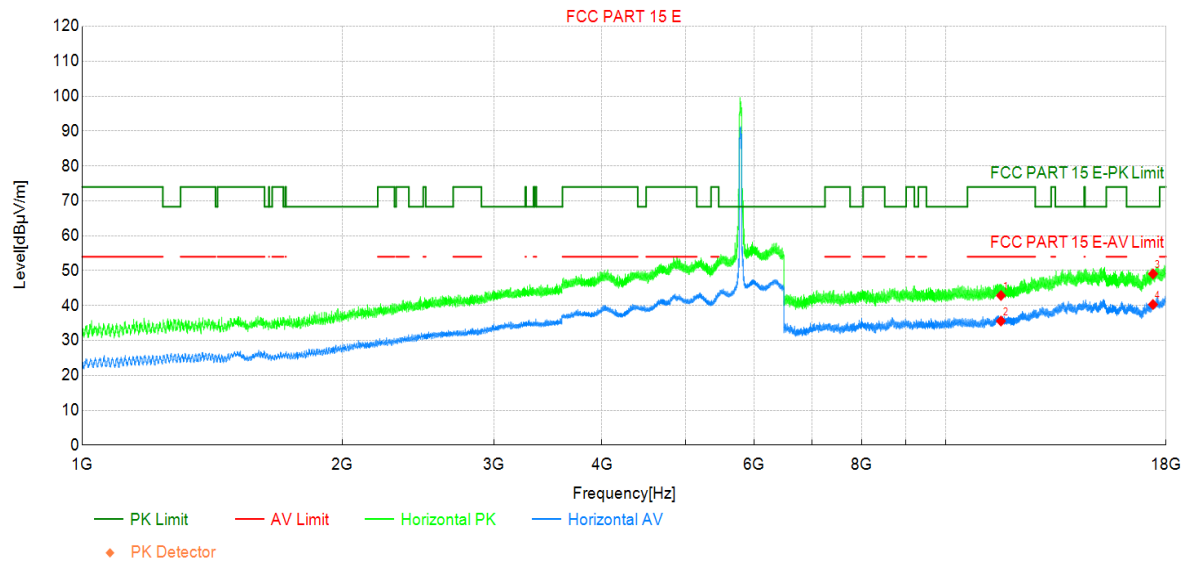

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	34.13	42.87	8.74	74.00	31.13	PK	Horizo	PASS
2	11590.00	26.83	35.57	8.74	54.00	18.43	AV	Horizo	PASS
3	17385.00	32.51	49.09	16.58	68.30	19.21	PK	Horizo	PASS
4	17385.00	23.72	40.30	16.58	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode3:Transmit at 5795MHz by 802.11n(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

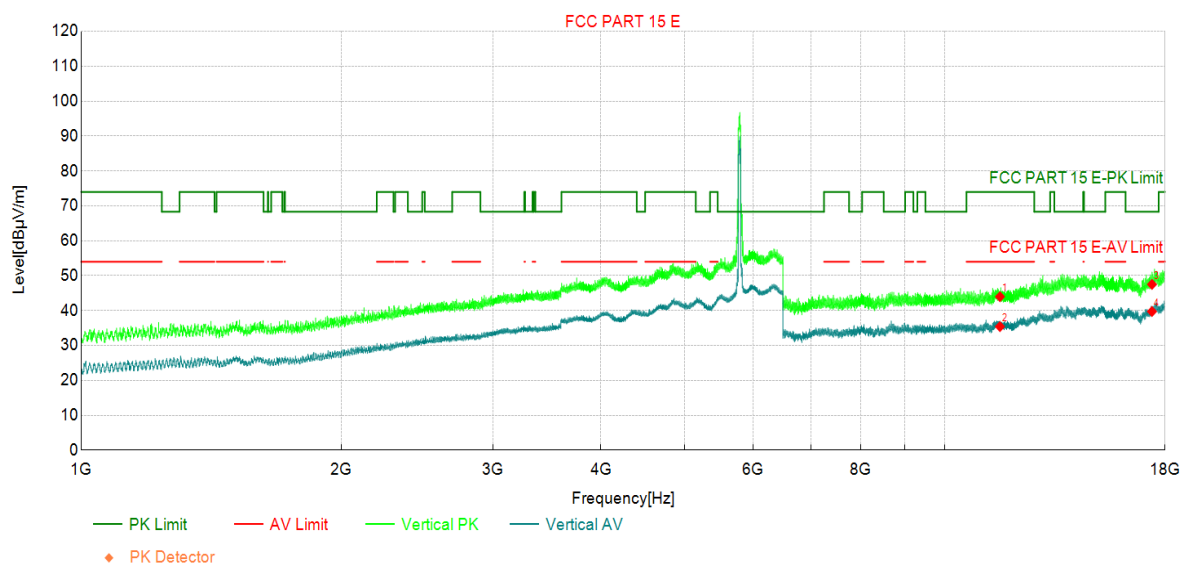

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	35.23	43.97	8.74	74.00	30.03	PK	Vertic	PASS
2	11590.00	26.66	35.40	8.74	54.00	18.60	AV	Vertic	PASS
3	17385.00	30.92	47.50	16.58	68.30	20.80	PK	Vertic	PASS
4	17385.00	23.15	39.73	16.58	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

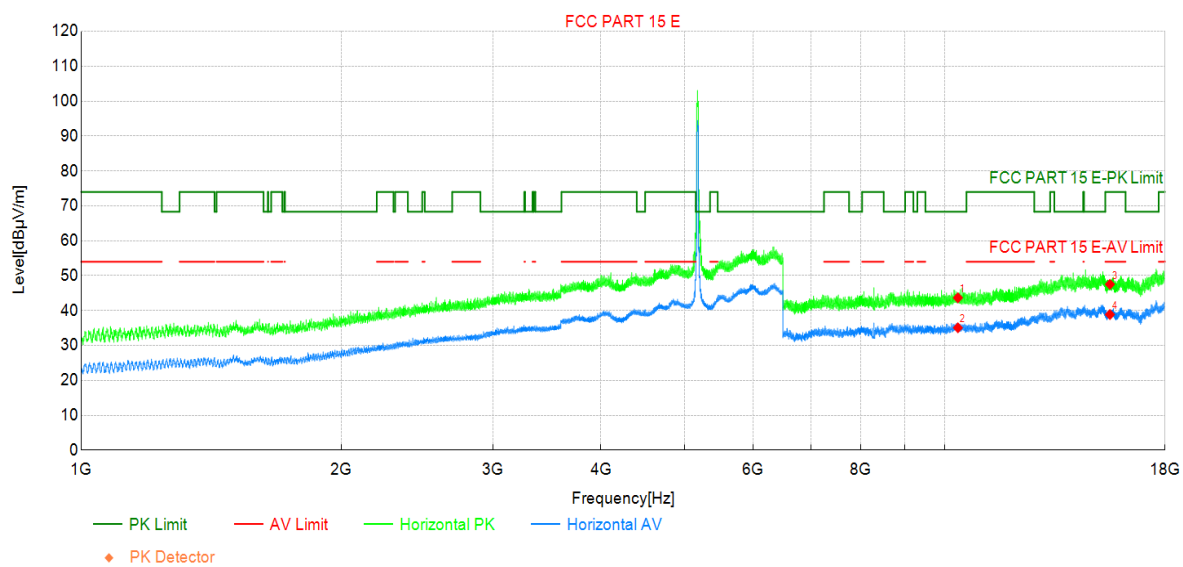

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	37.08	43.66	6.58	68.30	24.64	PK	Horizo	PASS
2	10360.00	28.49	35.07	6.58	-	-	AV	Horizo	NA
3	15540.00	33.62	47.52	13.90	74.00	26.48	PK	Horizo	PASS
4	15540.00	24.96	38.86	13.90	54.00	15.14	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

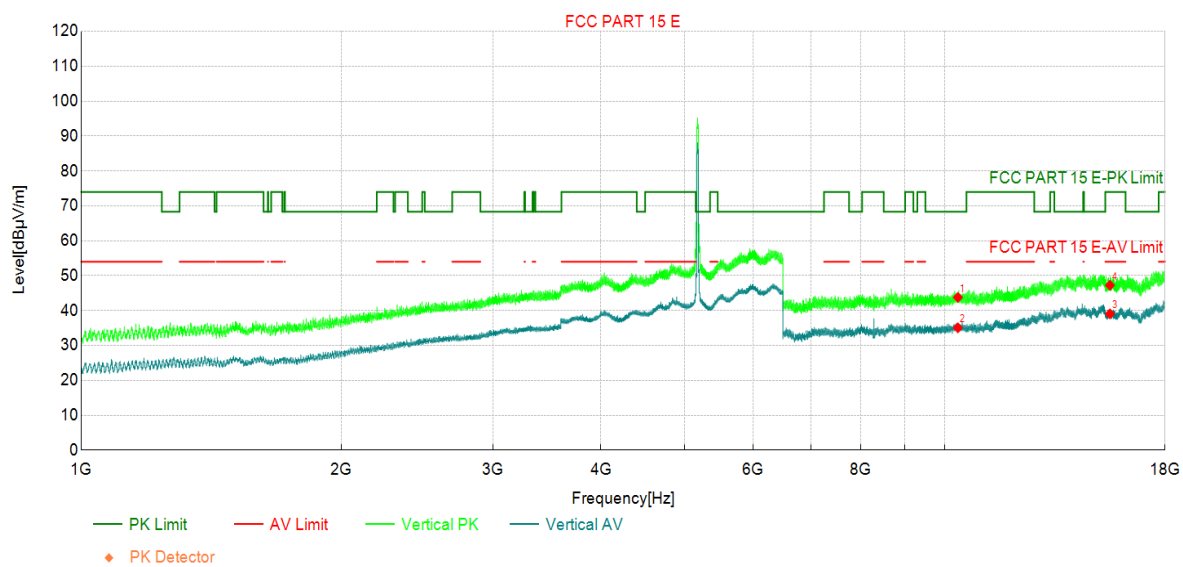

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	37.20	43.78	6.58	68.30	24.52	PK	Vertic	PASS
2	10360.00	28.48	35.06	6.58	-	-	AV	Vertic	NA
3	15540.00	25.16	39.06	13.90	54.00	14.94	AV	Vertic	PASS
4	15540.00	33.34	47.24	13.90	74.00	26.76	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5220MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

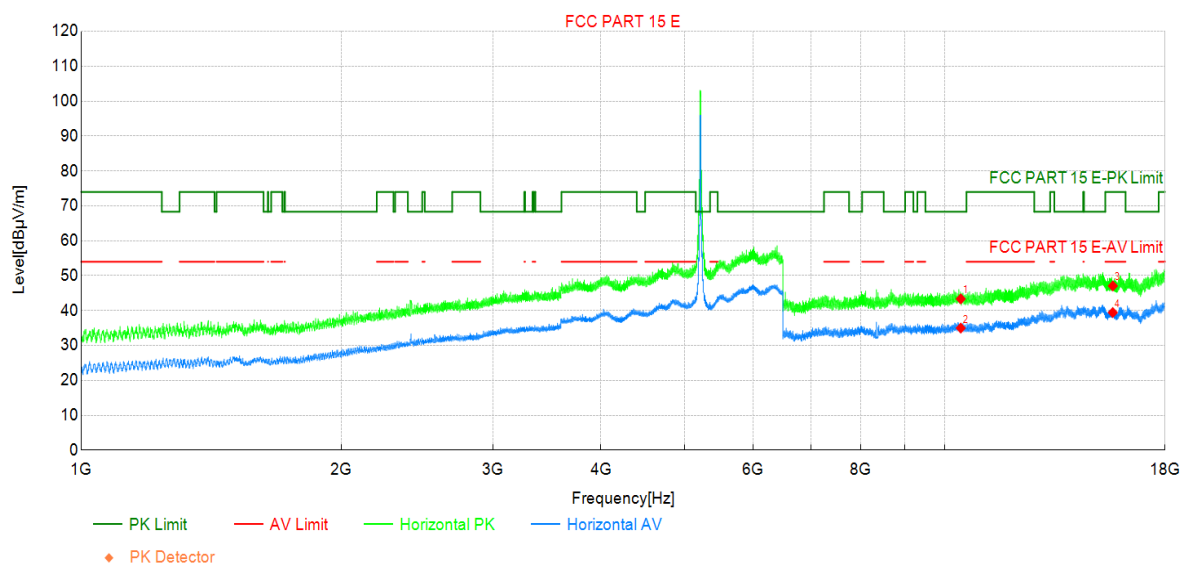

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	36.71	43.35	6.64	68.30	24.95	PK	Horizo	PASS
2	10440.00	28.34	34.98	6.64	-	-	AV	Horizo	NA
3	15660.00	32.97	47.06	14.09	74.00	26.94	PK	Horizo	PASS
4	15660.00	25.34	39.43	14.09	54.00	14.57	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5220MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

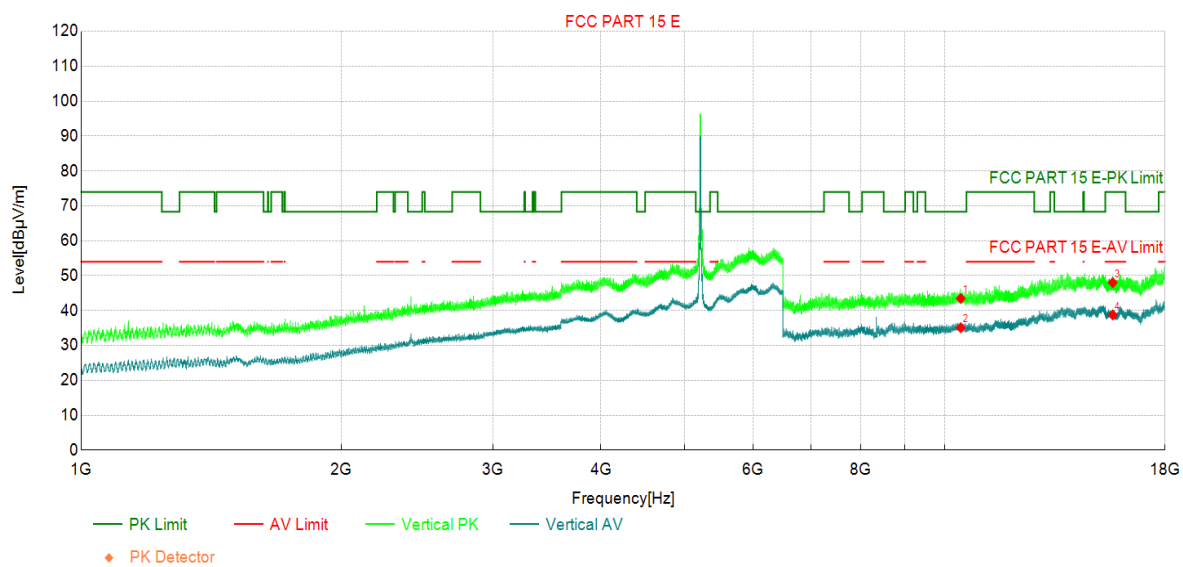

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	36.83	43.47	6.64	68.30	24.83	PK	Vertic	PASS
2	10440.00	28.43	35.07	6.64	-	-	AV	Vertic	NA
3	15660.00	33.93	48.02	14.09	74.00	25.98	PK	Vertic	PASS
4	15660.00	24.63	38.72	14.09	54.00	15.28	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5240MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

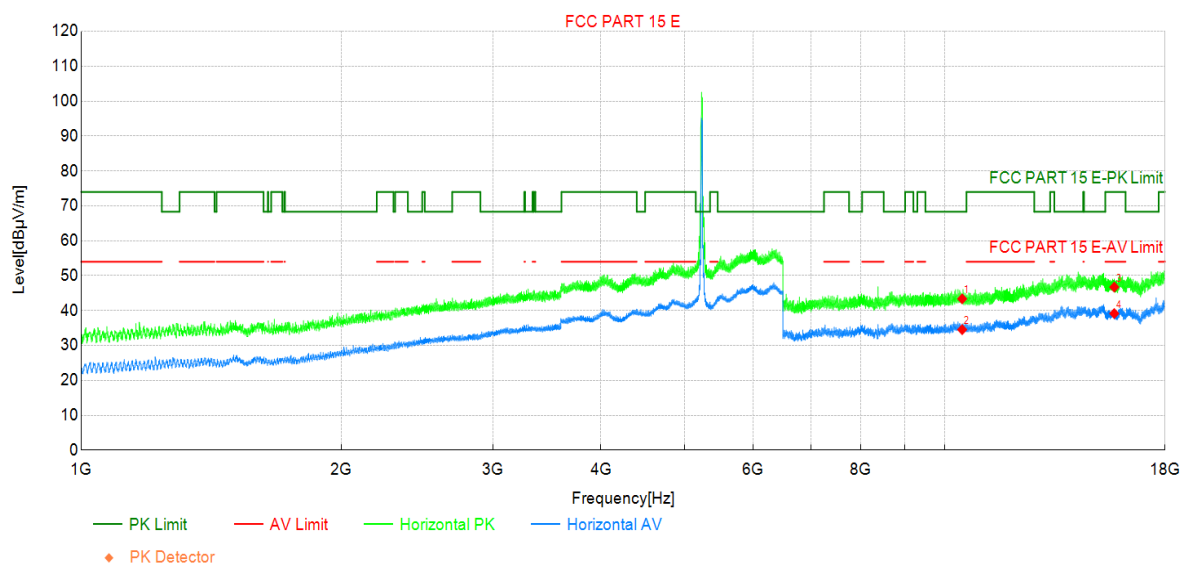

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	36.65	43.36	6.71	68.30	24.94	PK	Horizo	PASS
2	10480.00	27.84	34.55	6.71	-	-	AV	Horizo	NA
3	15720.00	32.31	46.72	14.41	74.00	27.28	PK	Horizo	PASS
4	15720.00	24.73	39.14	14.41	54.00	14.86	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5240MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

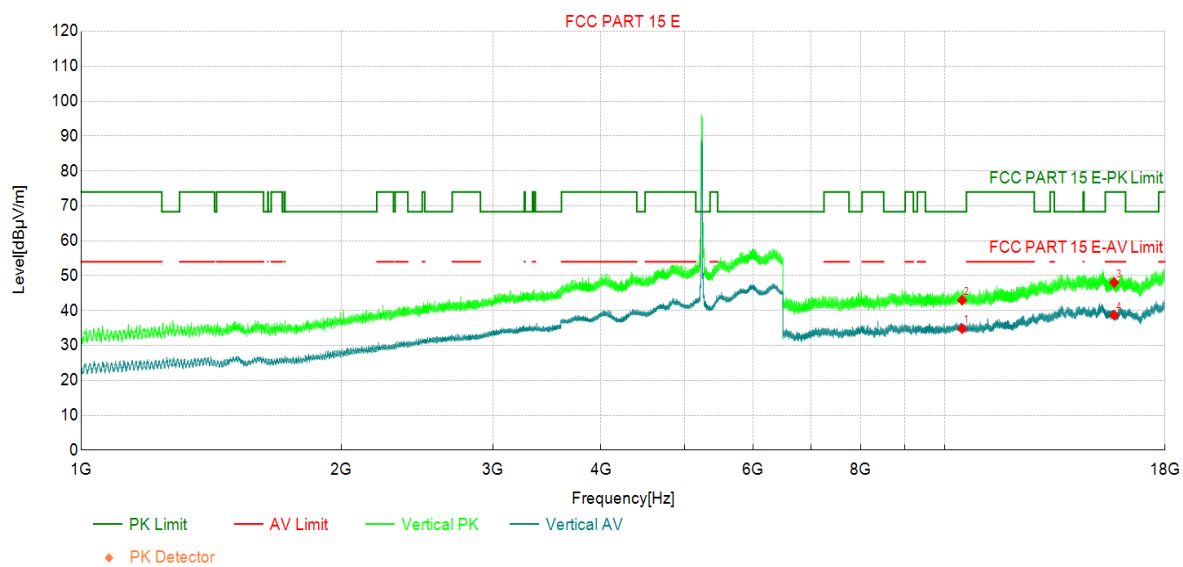

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	28.10	34.81	6.71	-	-	AV	Vertic	NA
2	10480.00	36.25	42.96	6.71	68.30	25.34	PK	Vertic	PASS
3	15720.00	33.64	48.05	14.41	74.00	25.95	PK	Vertic	PASS
4	15720.00	24.25	38.66	14.41	54.00	15.34	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5260MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

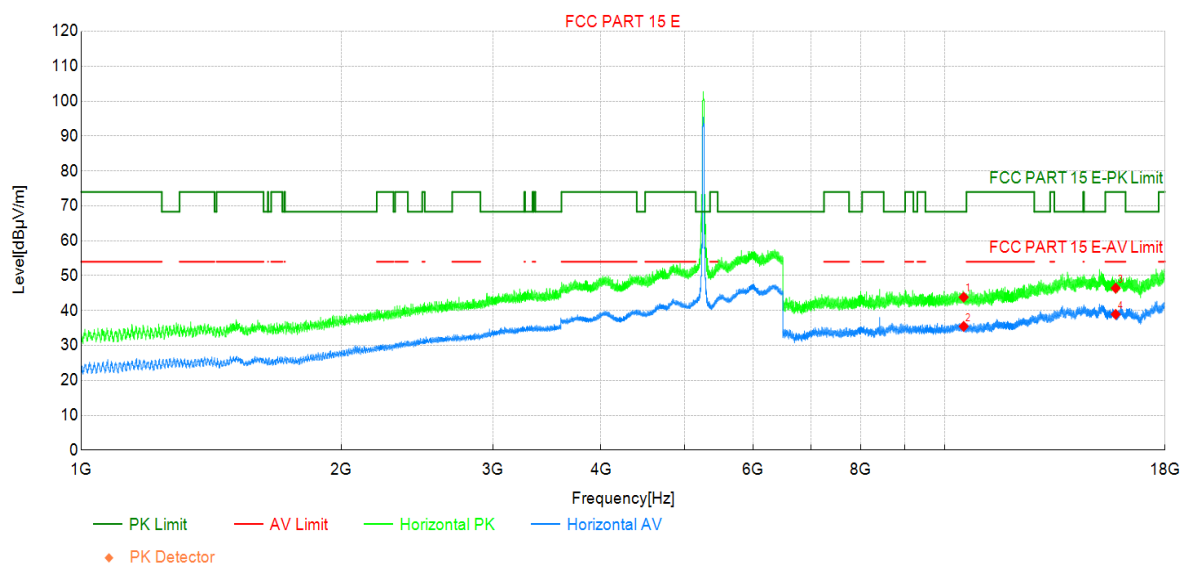

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	37.07	43.83	6.76	68.30	24.47	PK	Horizo	PASS
2	10520.00	28.71	35.47	6.76	-	-	AV	Horizo	NA
3	15780.00	32.34	46.43	14.09	74.00	27.57	PK	Horizo	PASS
4	15780.00	24.83	38.92	14.09	54.00	15.08	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5260MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

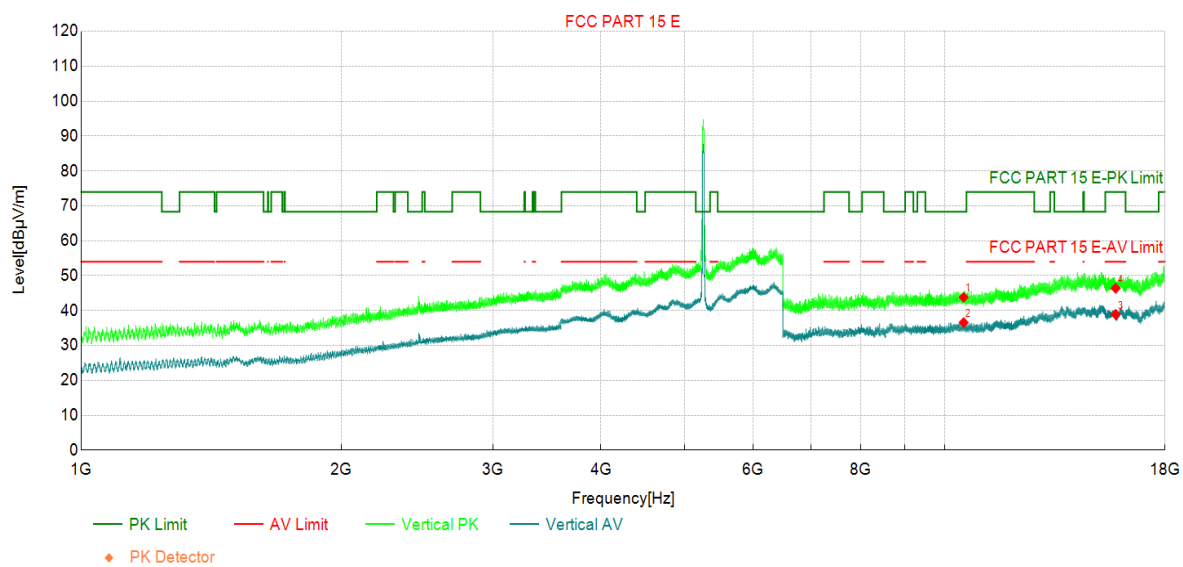

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	37.03	43.79	6.76	68.30	24.51	PK	Vertic	PASS
2	10520.00	29.80	36.56	6.76	-	-	AV	Vertic	NA
3	15780.00	24.82	38.91	14.09	54.00	15.09	AV	Vertic	PASS
4	15780.00	32.30	46.39	14.09	74.00	27.61	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5300MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

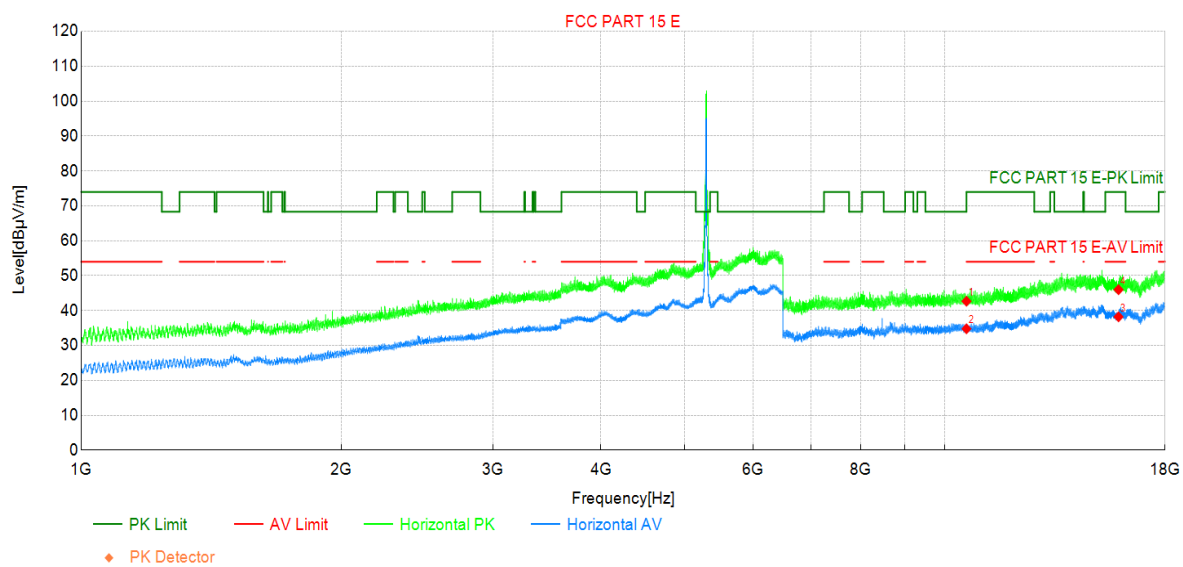

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.89	42.67	6.78	68.30	25.63	PK	Horizo	PASS
2	10600.00	28.00	34.78	6.78	54.00	19.22	AV	Horizo	PASS
3	15900.00	24.09	38.21	14.12	54.00	15.79	AV	Horizo	PASS
4	15900.00	31.87	45.99	14.12	74.00	28.01	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5300MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

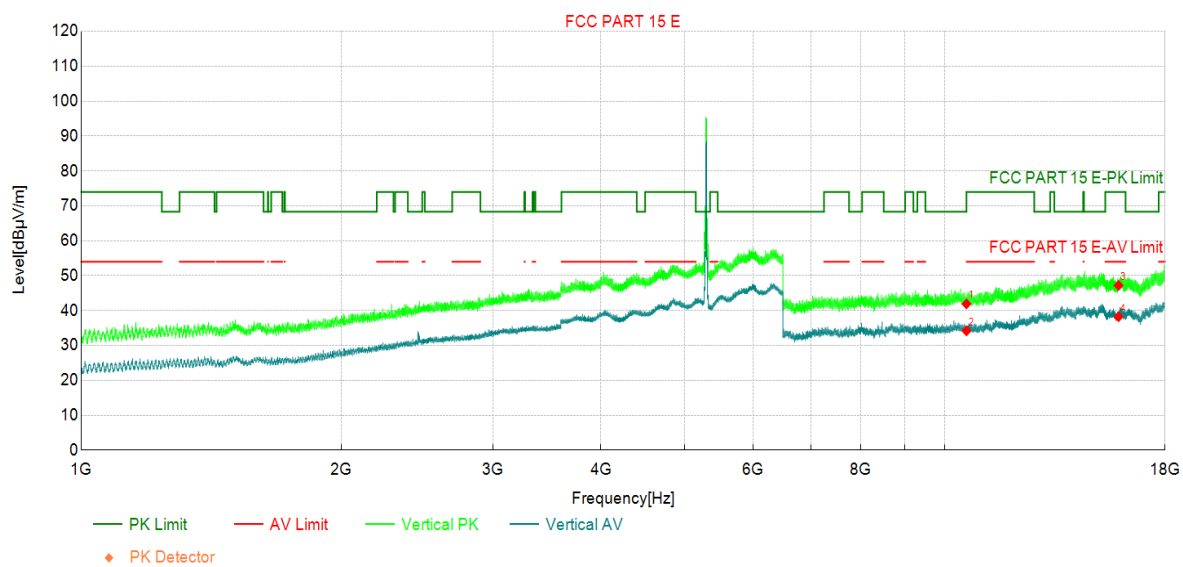

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.14	41.92	6.78	68.30	26.38	PK	Vertic	PASS
2	10600.00	27.42	34.20	6.78	54.00	19.80	AV	Vertic	PASS
3	15900.00	33.07	47.19	14.12	74.00	26.81	PK	Vertic	PASS
4	15900.00	24.13	38.25	14.12	54.00	15.75	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

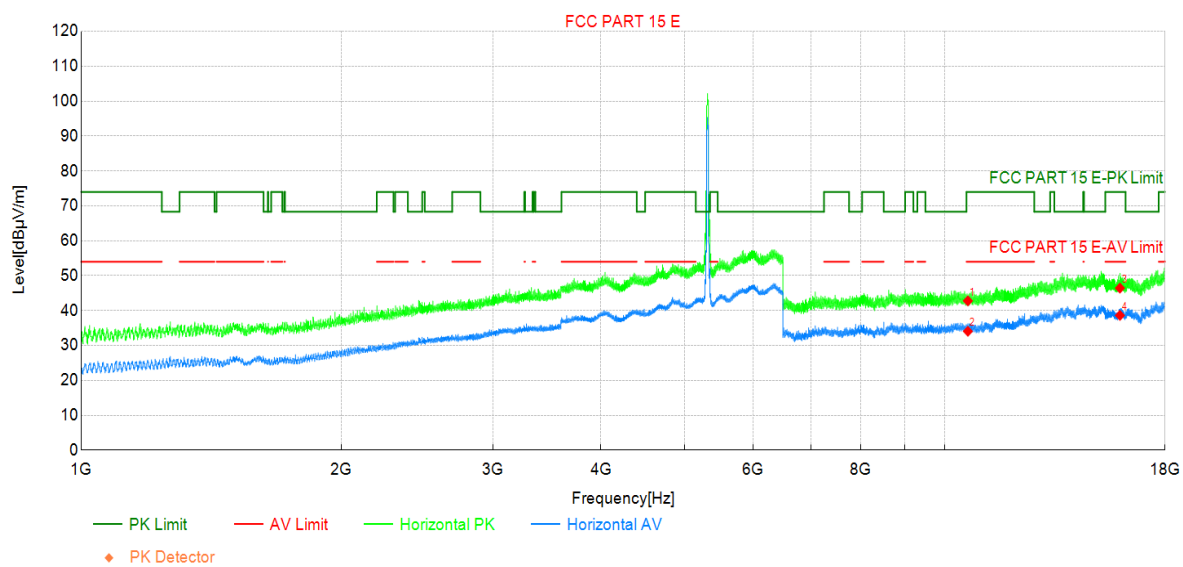

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.97	42.77	6.80	74.00	31.23	PK	Horizo	PASS
2	10640.00	27.26	34.06	6.80	54.00	19.94	AV	Horizo	PASS
3	15960.00	31.80	46.43	14.63	74.00	27.57	PK	Horizo	PASS
4	15960.00	23.99	38.62	14.63	54.00	15.38	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

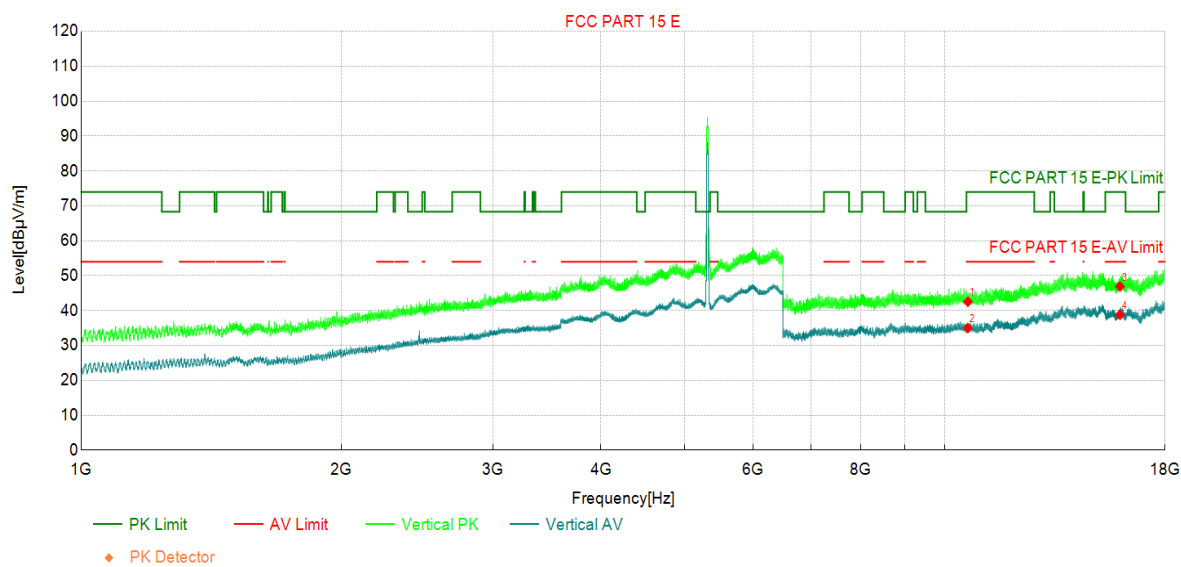

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.74	42.54	6.80	74.00	31.46	PK	Vertic	PASS
2	10640.00	28.20	35.00	6.80	54.00	19.00	AV	Vertic	PASS
3	15960.00	32.26	46.89	14.63	74.00	27.11	PK	Vertic	PASS
4	15960.00	24.18	38.81	14.63	54.00	15.19	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

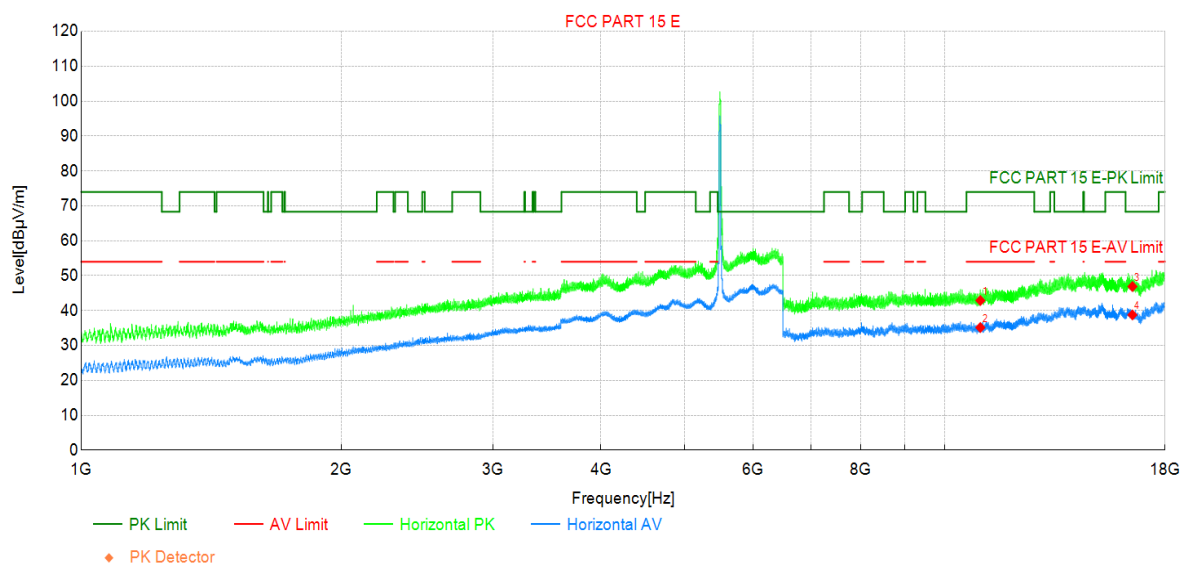

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	35.48	42.88	7.40	74.00	31.12	PK	Horizo	PASS
2	11000.00	27.74	35.14	7.40	54.00	18.86	AV	Horizo	PASS
3	16500.00	31.77	46.88	15.11	68.30	21.42	PK	Horizo	PASS
4	16500.00	23.65	38.76	15.11	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

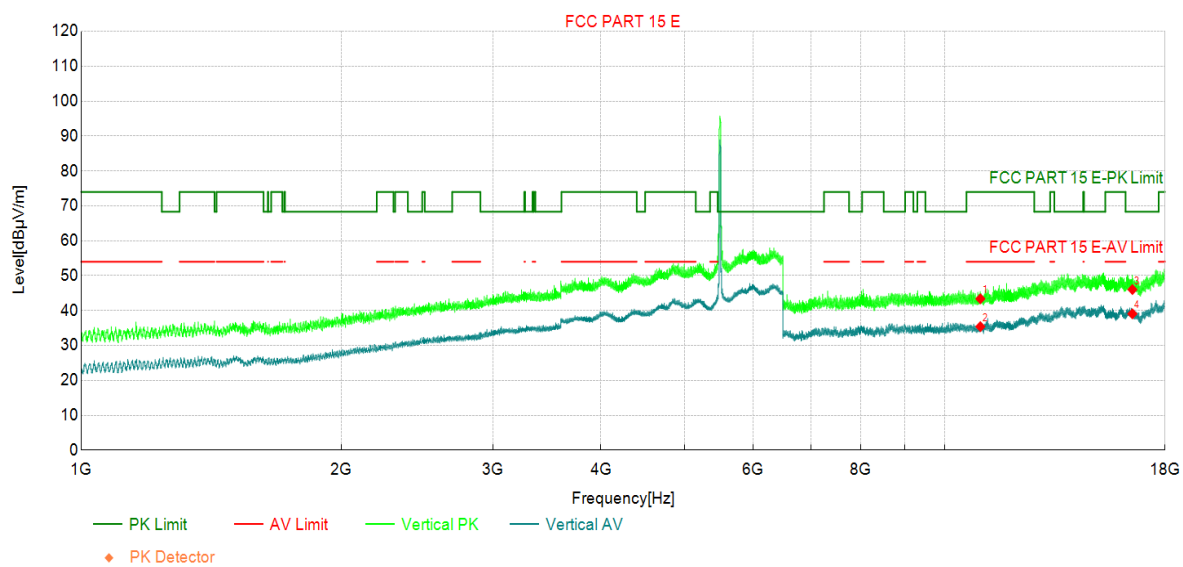

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	35.97	43.37	7.40	74.00	30.63	PK	Vertic	PASS
2	11000.00	28.00	35.40	7.40	54.00	18.60	AV	Vertic	PASS
3	16500.00	30.91	46.02	15.11	68.30	22.28	PK	Vertic	PASS
4	16500.00	23.96	39.07	15.11	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5580MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

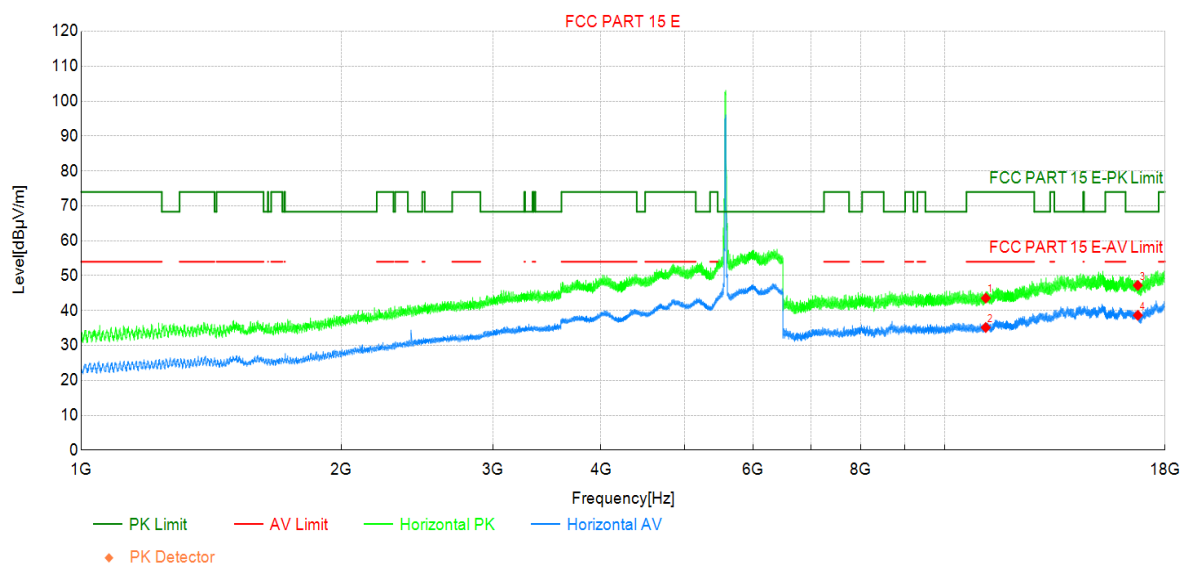

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	36.27	43.56	7.29	74.00	30.44	PK	Horizo	PASS
2	11160.00	27.85	35.14	7.29	54.00	18.86	AV	Horizo	PASS
3	16740.00	32.59	47.21	14.62	68.30	21.09	PK	Horizo	PASS
4	16740.00	24.03	38.65	14.62	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5580MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

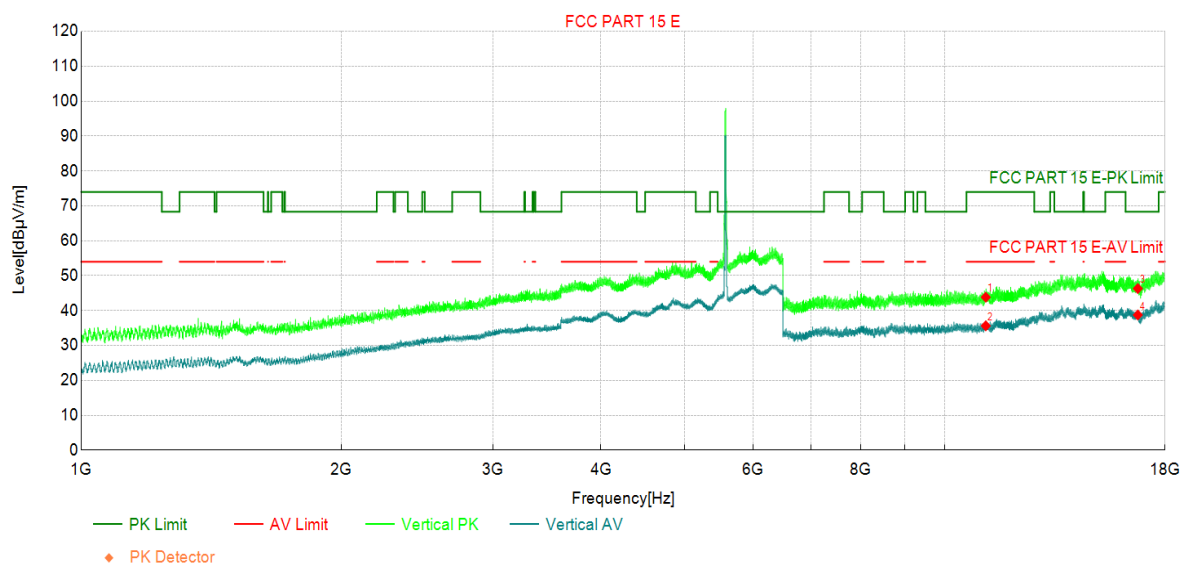

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	36.53	43.82	7.29	74.00	30.18	PK	Vertic	PASS
2	11160.00	28.33	35.62	7.29	54.00	18.38	AV	Vertic	PASS
3	16740.00	31.69	46.31	14.62	68.30	21.99	PK	Vertic	PASS
4	16740.00	24.13	38.75	14.62	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

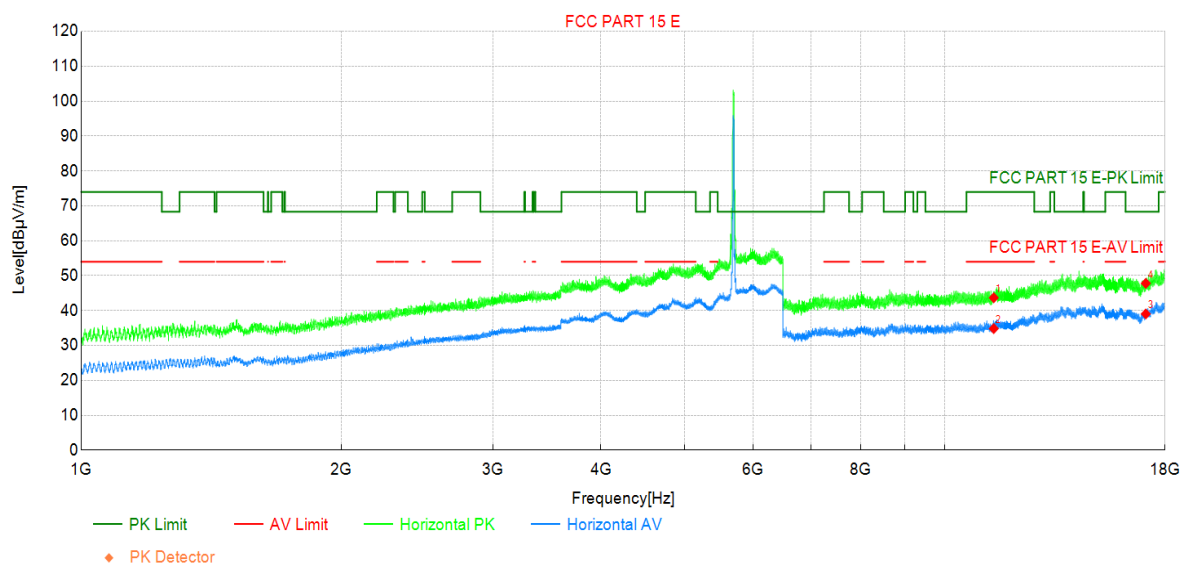

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	35.84	43.67	7.83	74.00	30.33	PK	Horizo	PASS
2	11400.00	27.00	34.83	7.83	54.00	19.17	AV	Horizo	PASS
3	17100.00	23.22	39.04	15.82	-	-	AV	Horizo	NA
4	17100.00	31.97	47.79	15.82	68.30	20.51	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

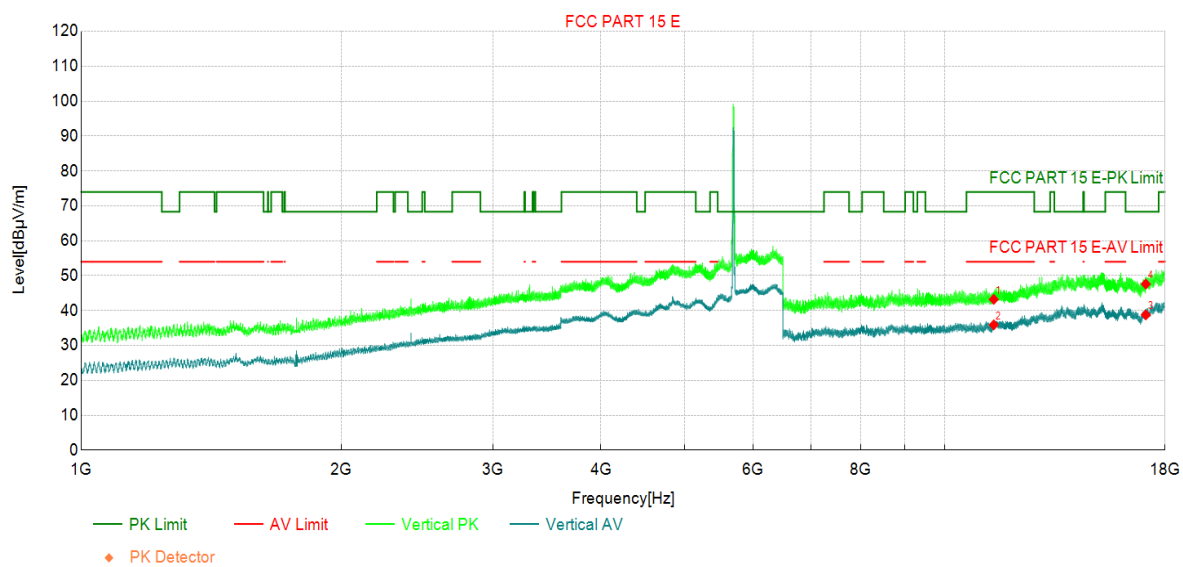

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	35.38	43.21	7.83	74.00	30.79	PK	Vertic	PASS
2	11400.00	28.07	35.90	7.83	54.00	18.10	AV	Vertic	PASS
3	17100.00	22.95	38.77	15.82	-	-	AV	Vertic	NA
4	17100.00	31.79	47.61	15.82	68.30	20.69	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5745MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

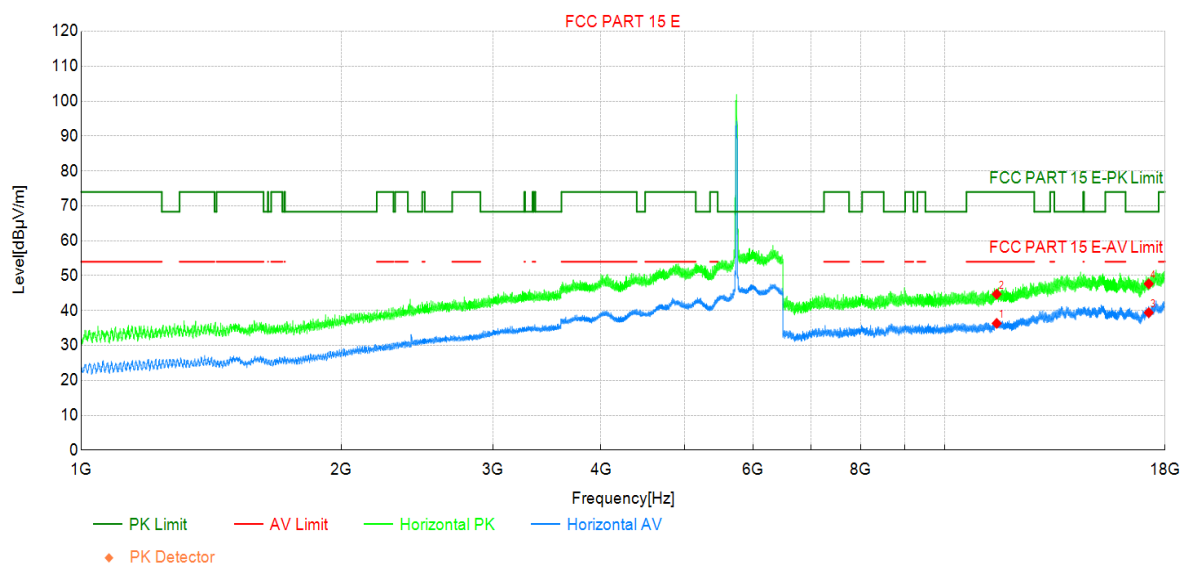

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	27.95	36.33	8.38	54.00	17.67	AV	Horizo	PASS
2	11490.00	36.33	44.71	8.38	74.00	29.29	PK	Horizo	PASS
3	17235.00	23.94	39.40	15.46	-	-	AV	Horizo	NA
4	17235.00	32.20	47.66	15.46	68.30	20.64	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5745MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

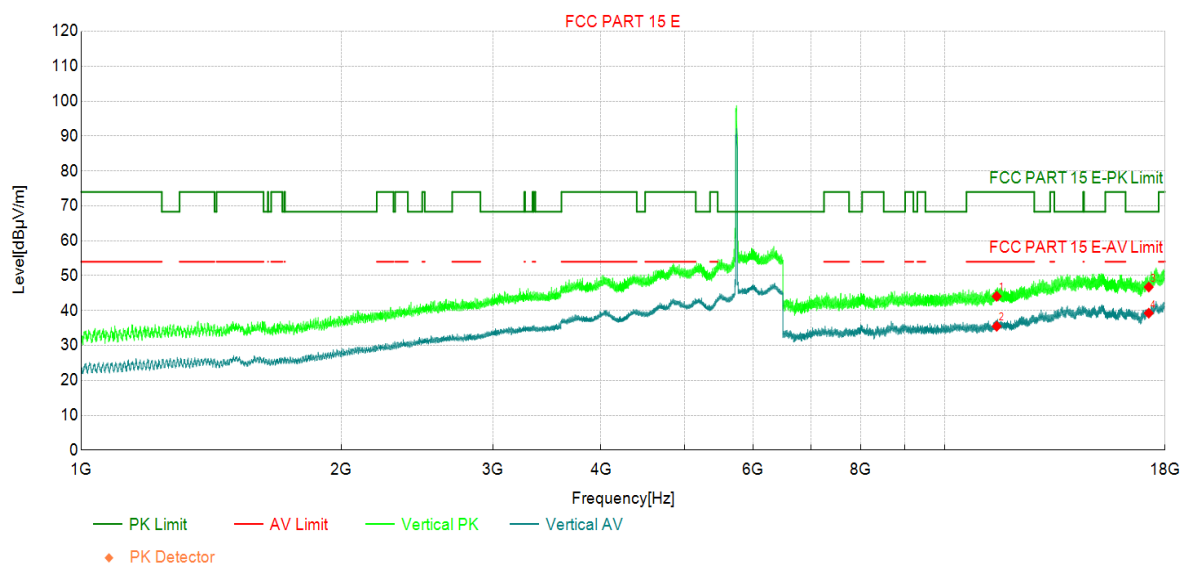

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	35.70	44.08	8.38	74.00	29.92	PK	Vertic	PASS
2	11490.00	27.11	35.49	8.38	54.00	18.51	AV	Vertic	PASS
3	17235.00	31.28	46.74	15.46	68.30	21.56	PK	Vertic	PASS
4	17235.00	23.79	39.25	15.46	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5785MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

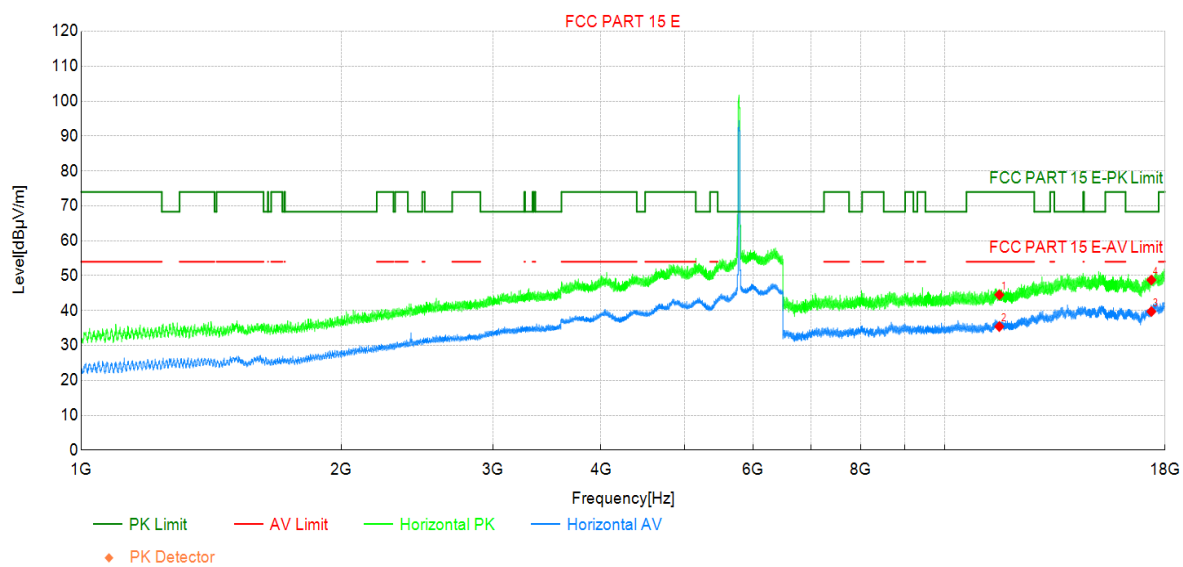

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	35.84	44.52	8.68	74.00	29.48	PK	Horizo	PASS
2	11570.00	26.73	35.41	8.68	54.00	18.59	AV	Horizo	PASS
3	17355.00	23.49	39.71	16.22	-	-	AV	Horizo	NA
4	17355.00	32.54	48.76	16.22	68.30	19.54	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5785MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

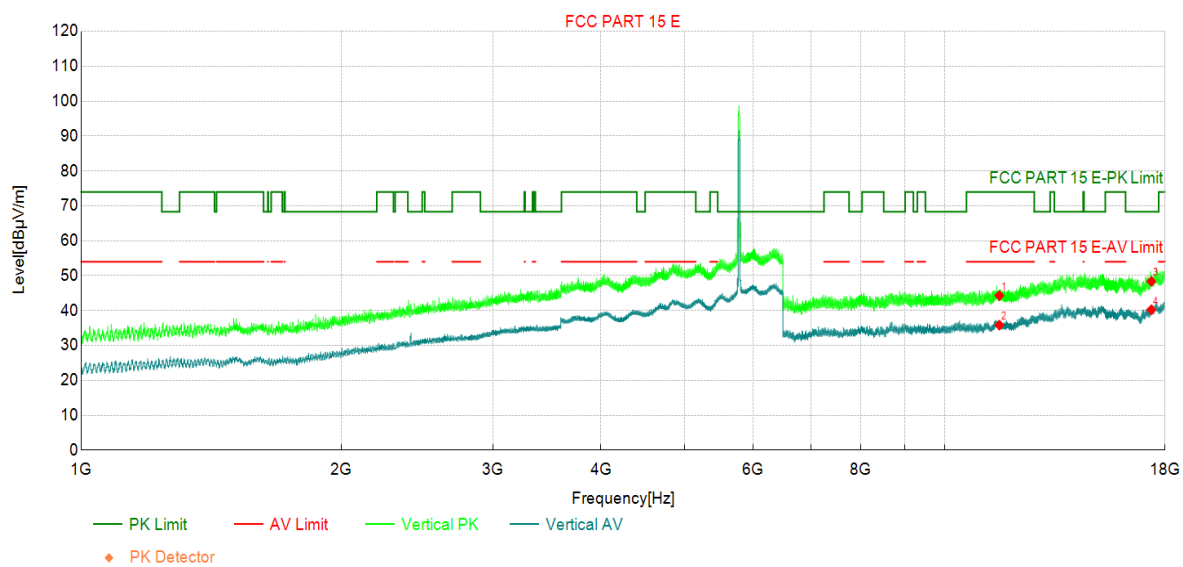

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	35.61	44.29	8.68	74.00	29.71	PK	Vertic	PASS
2	11570.00	27.13	35.81	8.68	54.00	18.19	AV	Vertic	PASS
3	17355.00	32.14	48.36	16.22	68.30	19.94	PK	Vertic	PASS
4	17355.00	24.02	40.24	16.22	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5825MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

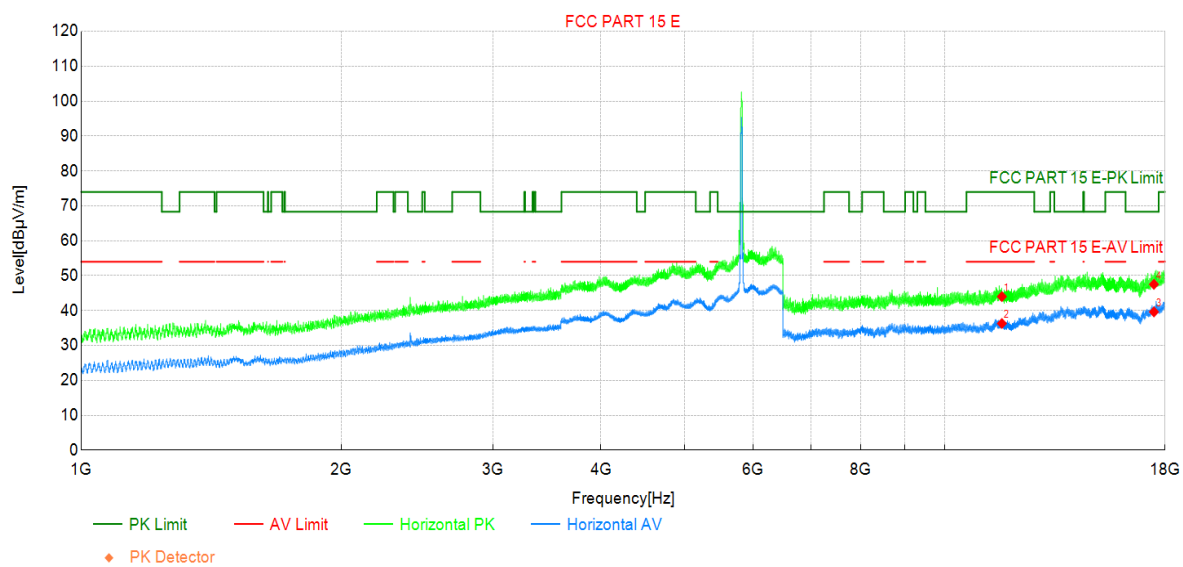

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	35.27	44.01	8.74	74.00	29.99	PK	Horizo	PASS
2	11650.00	27.57	36.31	8.74	54.00	17.69	AV	Horizo	PASS
3	17475.00	22.55	39.62	17.07	-	-	AV	Horizo	NA
4	17475.00	30.45	47.52	17.07	68.30	20.78	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode4:Transmit at 5825MHz by 802.11ac(20Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

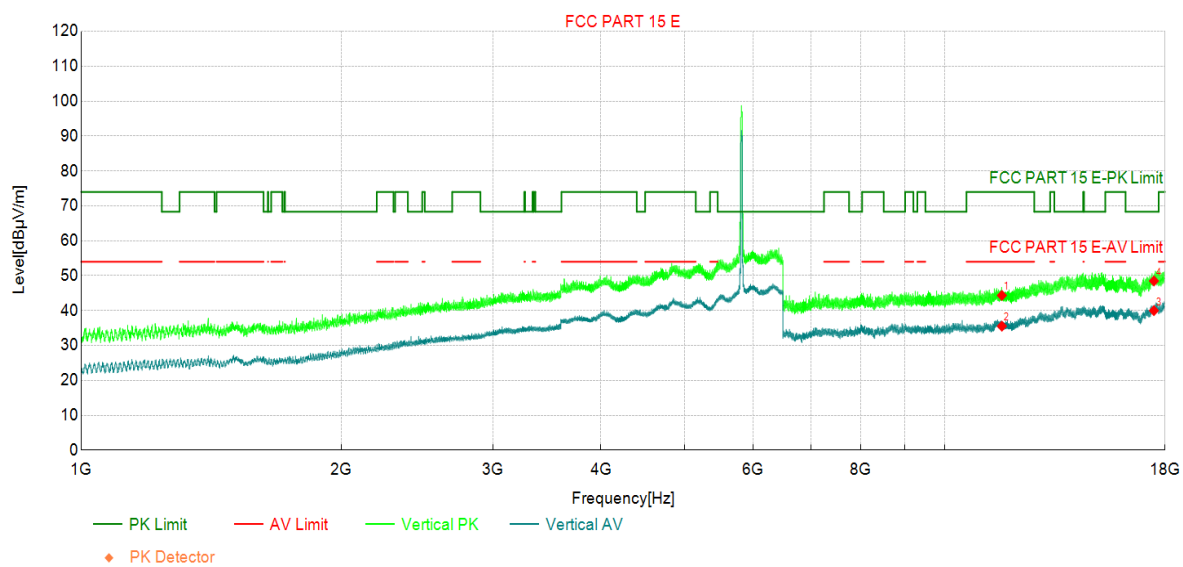

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	35.60	44.34	8.74	74.00	29.66	PK	Vertic	PASS
2	11650.00	26.80	35.54	8.74	54.00	18.46	AV	Vertic	PASS
3	17475.00	22.91	39.98	17.07	-	-	AV	Vertic	NA
4	17475.00	31.42	48.49	17.07	68.30	19.81	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

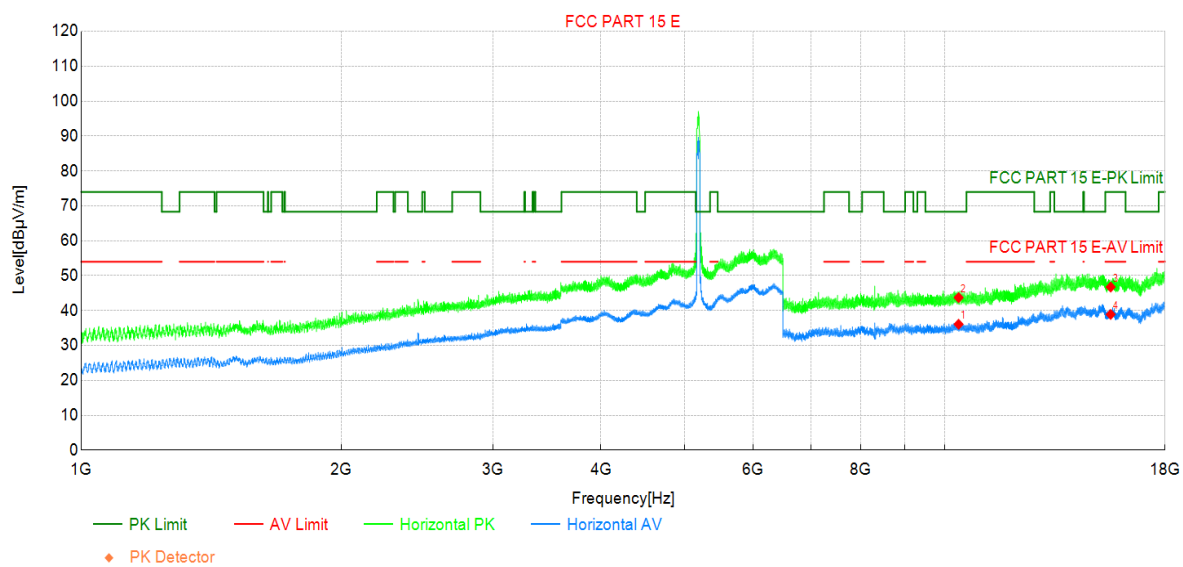

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	29.50	36.07	6.57	-	-	AV	Horizo	NA
2	10380.00	37.15	43.72	6.57	68.30	24.58	PK	Horizo	PASS
3	15570.00	33.05	46.74	13.69	74.00	27.26	PK	Horizo	PASS
4	15570.00	25.20	38.89	13.69	54.00	15.11	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

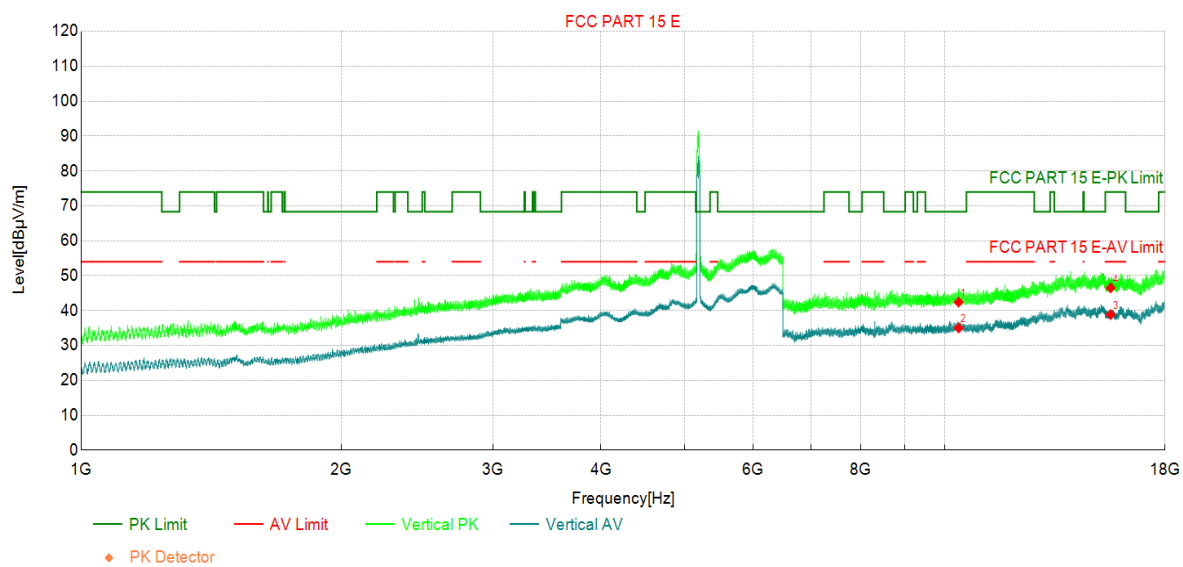

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	35.84	42.41	6.57	68.30	25.89	PK	Vertic	PASS
2	10380.00	28.45	35.02	6.57	-	-	AV	Vertic	NA
3	15570.00	25.15	38.84	13.69	54.00	15.16	AV	Vertic	PASS
4	15570.00	32.80	46.49	13.69	74.00	27.51	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5230MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

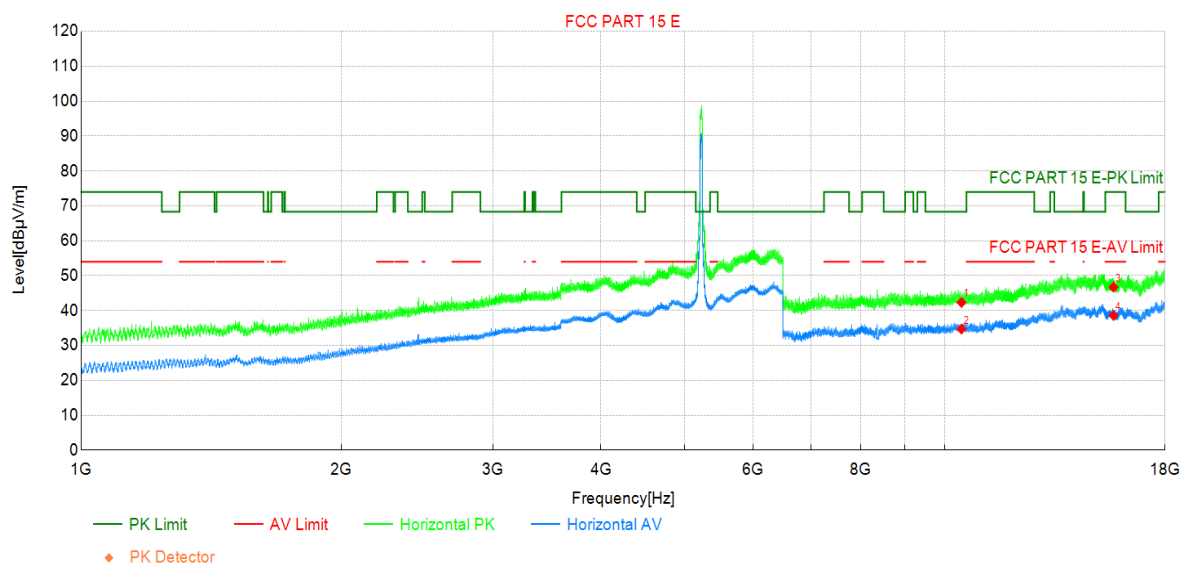

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	35.67	42.34	6.67	68.30	25.96	PK	Horizo	PASS
2	10460.00	28.03	34.70	6.67	-	-	AV	Horizo	NA
3	15690.00	32.30	46.71	14.41	74.00	27.29	PK	Horizo	PASS
4	15690.00	24.17	38.58	14.41	54.00	15.42	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5230MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

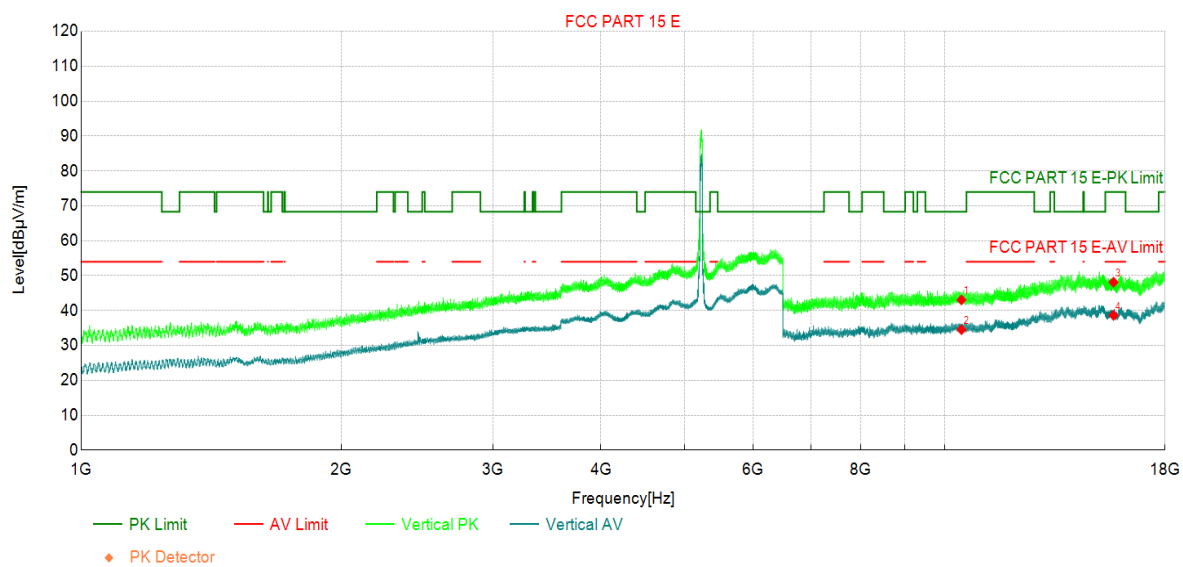

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	36.38	43.05	6.67	68.30	25.25	PK	Vertic	PASS
2	10460.00	27.87	34.54	6.67	-	-	AV	Vertic	NA
3	15690.00	33.72	48.13	14.41	74.00	25.87	PK	Vertic	PASS
4	15690.00	24.22	38.63	14.41	54.00	15.37	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5270MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

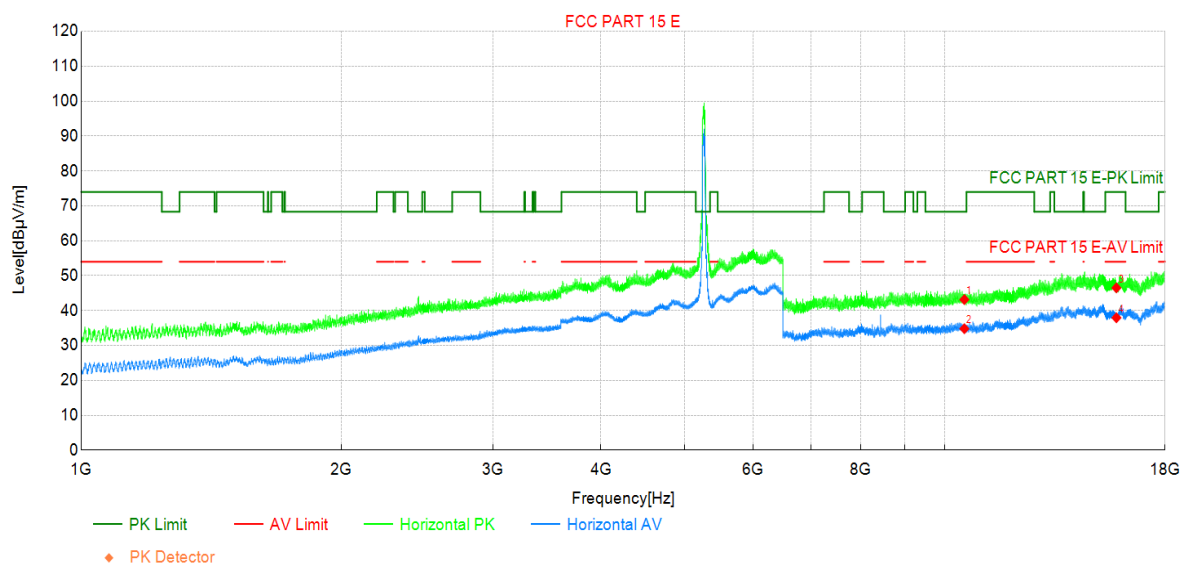

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	36.39	43.15	6.76	68.30	25.15	PK	Horizo	PASS
2	10540.00	28.04	34.80	6.76	-	-	AV	Horizo	NA
3	15810.00	32.49	46.50	14.01	74.00	27.50	PK	Horizo	PASS
4	15810.00	23.93	37.94	14.01	54.00	16.06	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5270MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

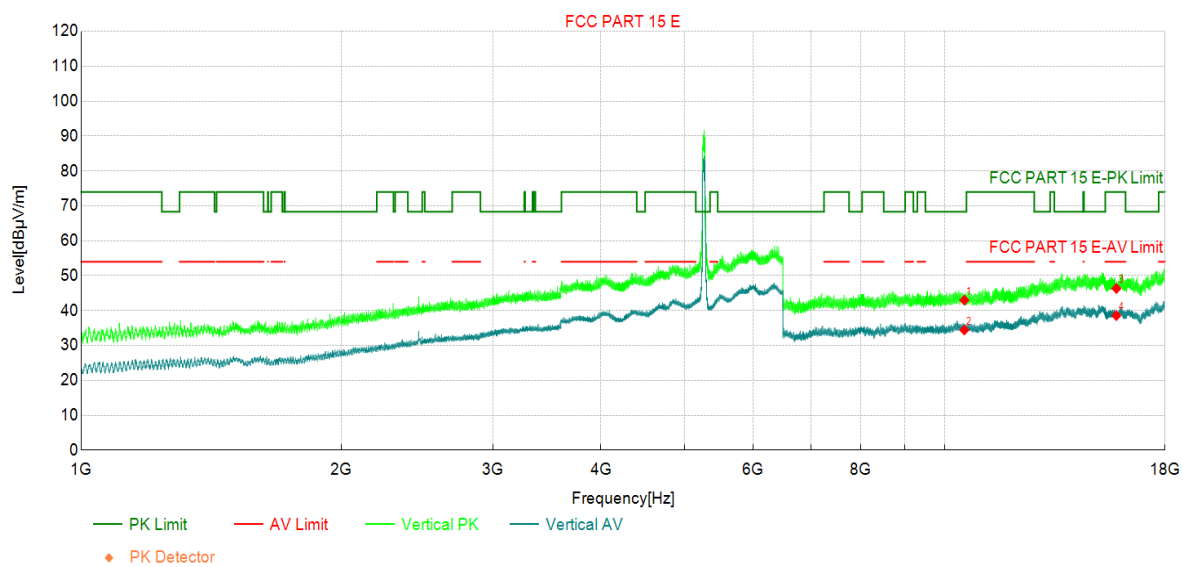

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	36.21	42.97	6.76	68.30	25.33	PK	Vertic	PASS
2	10540.00	27.68	34.44	6.76	-	-	AV	Vertic	NA
3	15810.00	32.32	46.33	14.01	74.00	27.67	PK	Vertic	PASS
4	15810.00	24.56	38.57	14.01	54.00	15.43	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

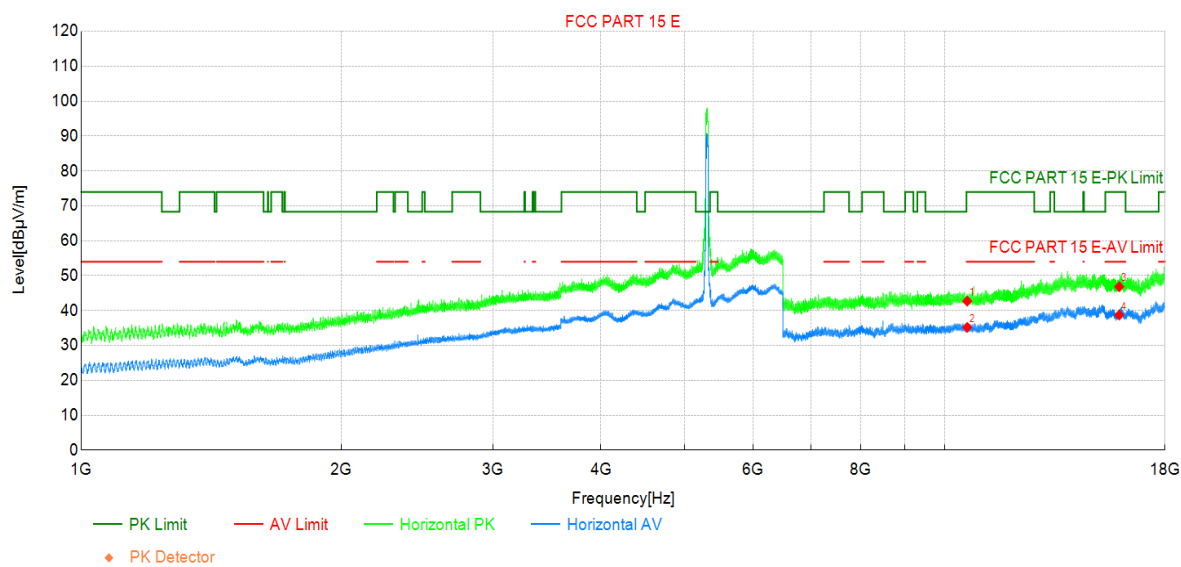

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	35.93	42.72	6.79	74.00	31.28	PK	Horizo	PASS
2	10620.00	28.40	35.19	6.79	54.00	18.81	AV	Horizo	PASS
3	15930.00	32.47	46.84	14.37	74.00	27.16	PK	Horizo	PASS
4	15930.00	24.35	38.72	14.37	54.00	15.28	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

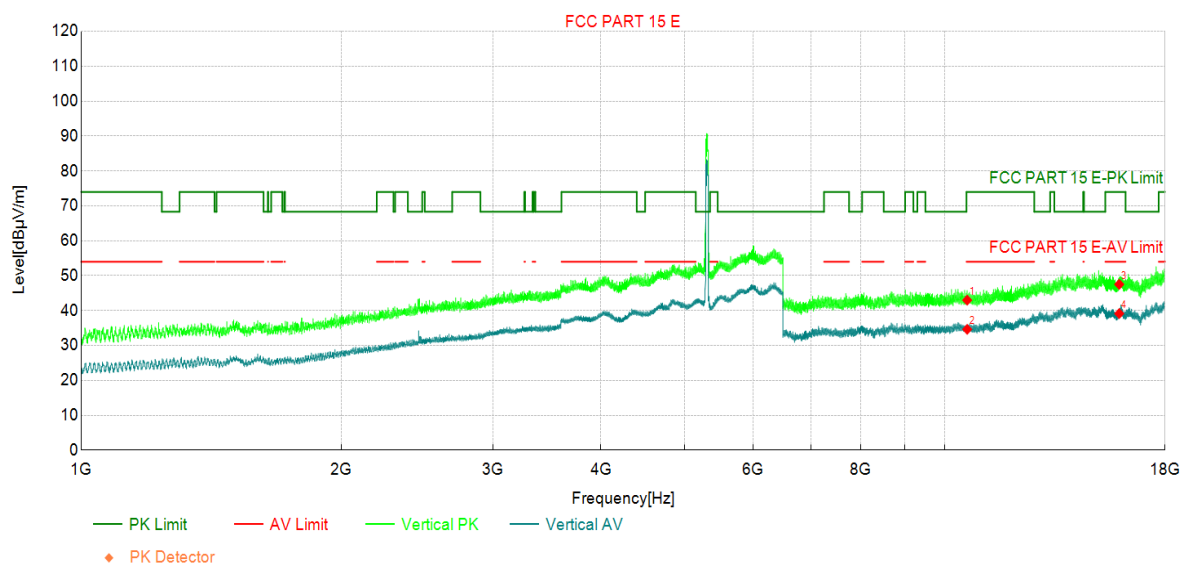

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	36.19	42.98	6.79	74.00	31.02	PK	Vertic	PASS
2	10620.00	27.83	34.62	6.79	54.00	19.38	AV	Vertic	PASS
3	15930.00	33.14	47.51	14.37	74.00	26.49	PK	Vertic	PASS
4	15930.00	24.77	39.14	14.37	54.00	14.86	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

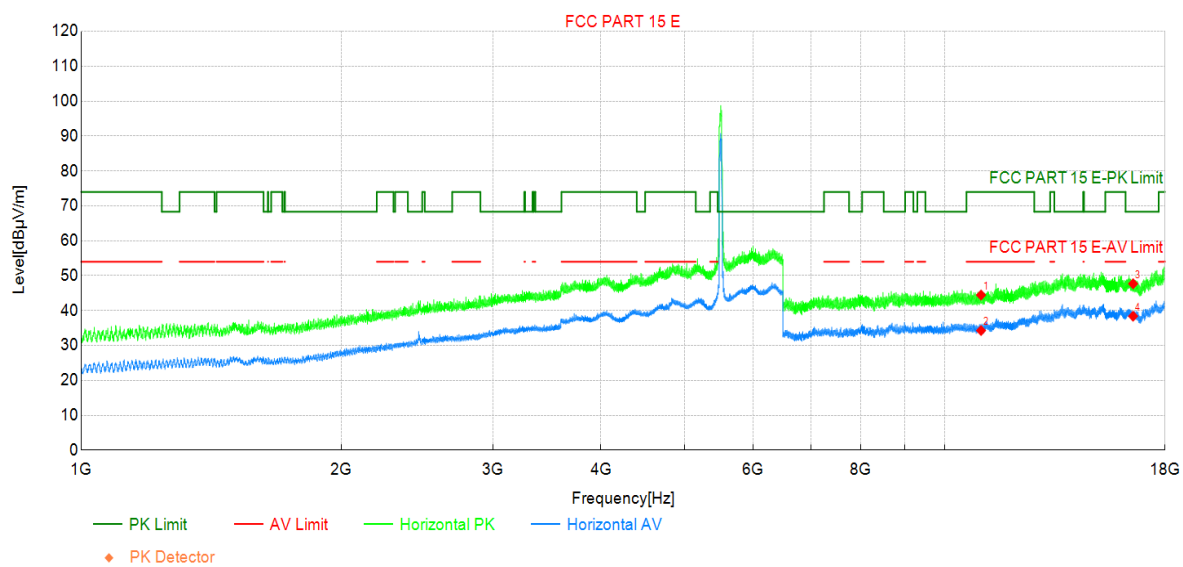

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	37.20	44.45	7.25	74.00	29.55	PK	Horizo	PASS
2	11020.00	27.03	34.28	7.25	54.00	19.72	AV	Horizo	PASS
3	16530.00	32.68	47.69	15.01	68.30	20.61	PK	Horizo	PASS
4	16530.00	23.38	38.39	15.01	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

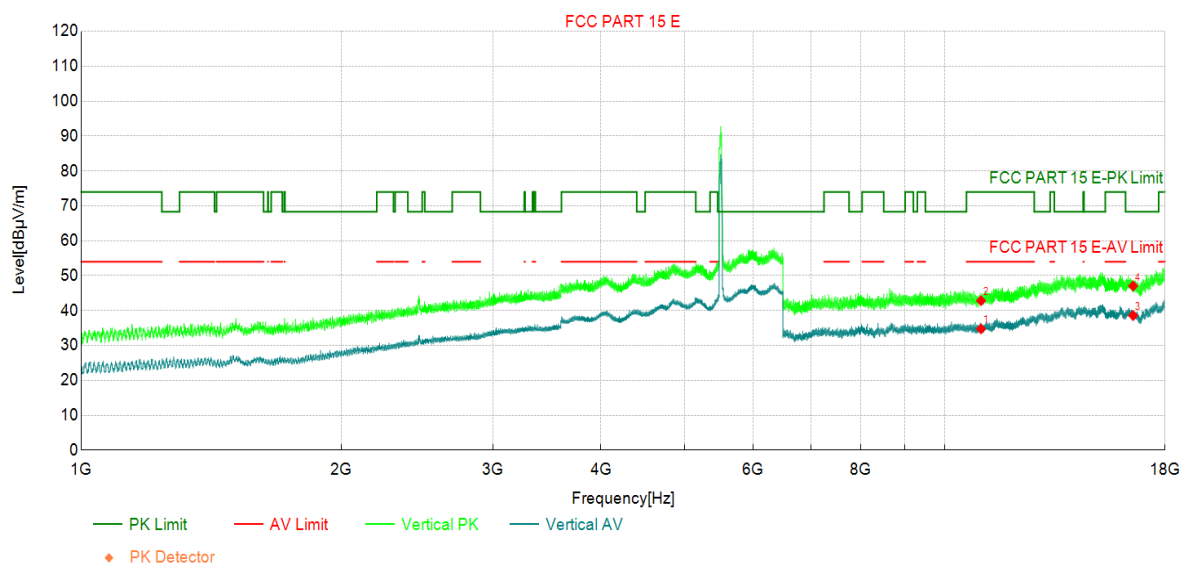

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	27.49	34.74	7.25	54.00	19.26	AV	Vertic	PASS
2	11020.00	35.57	42.82	7.25	74.00	31.18	PK	Vertic	PASS
3	16530.00	23.55	38.56	15.01	-	-	AV	Vertic	NA
4	16530.00	32.04	47.05	15.01	68.30	21.25	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5550MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

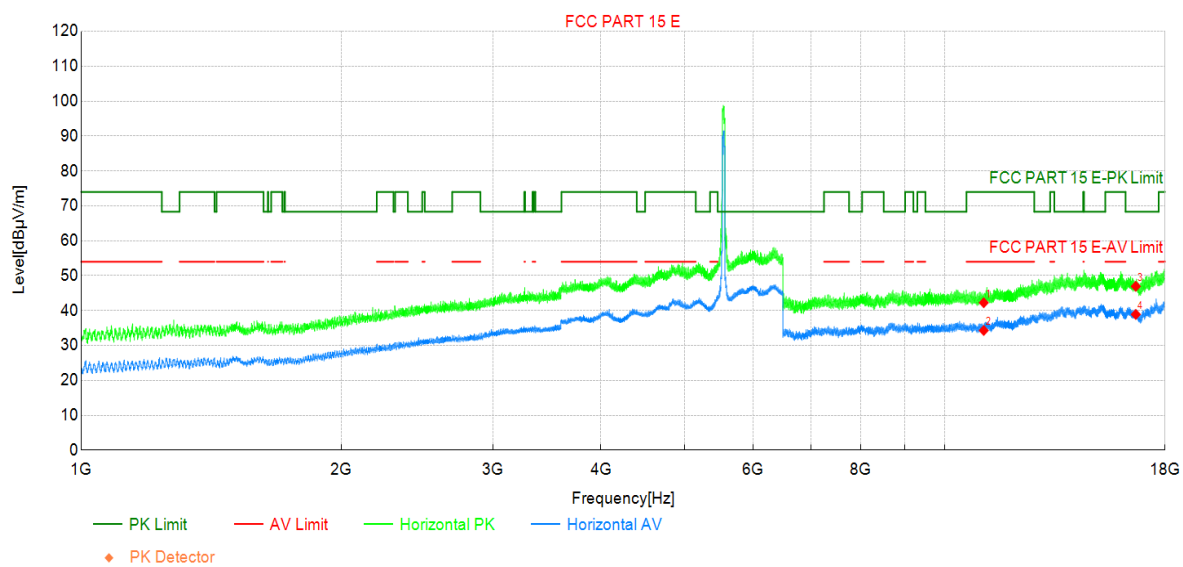

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	35.59	42.25	6.66	74.00	31.75	PK	Horizo	PASS
2	11100.00	27.63	34.29	6.66	54.00	19.71	AV	Horizo	PASS
3	16650.00	32.25	46.94	14.69	68.30	21.36	PK	Horizo	PASS
4	16650.00	24.20	38.89	14.69	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5550MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

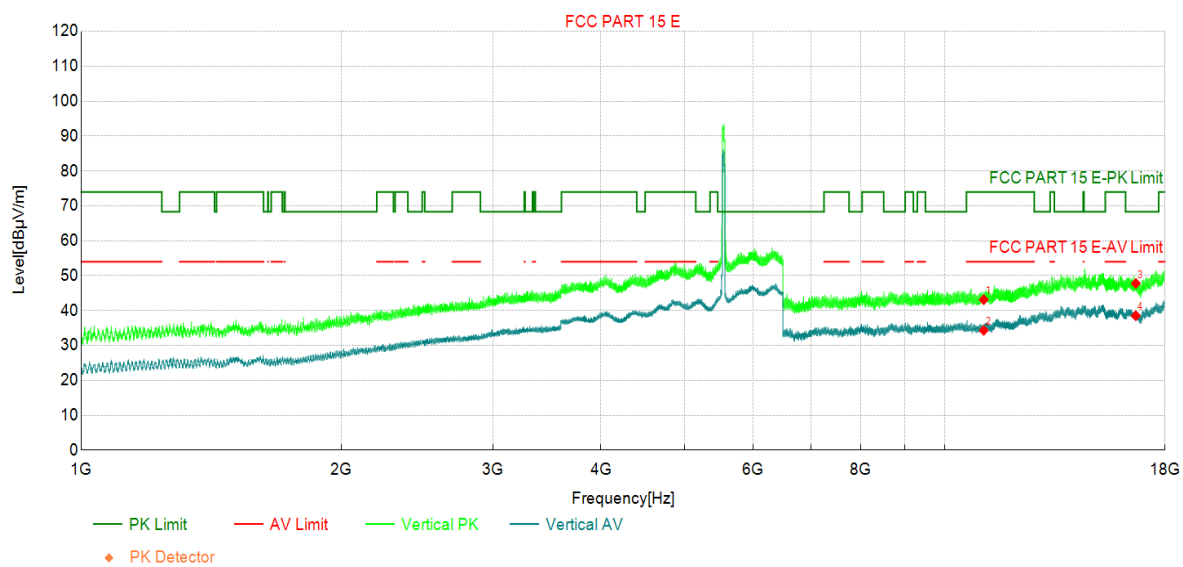

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	36.46	43.12	6.66	74.00	30.88	PK	Vertic	PASS
2	11100.00	27.67	34.33	6.66	54.00	19.67	AV	Vertic	PASS
3	16650.00	33.09	47.78	14.69	68.30	20.52	PK	Vertic	PASS
4	16650.00	23.83	38.52	14.69	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

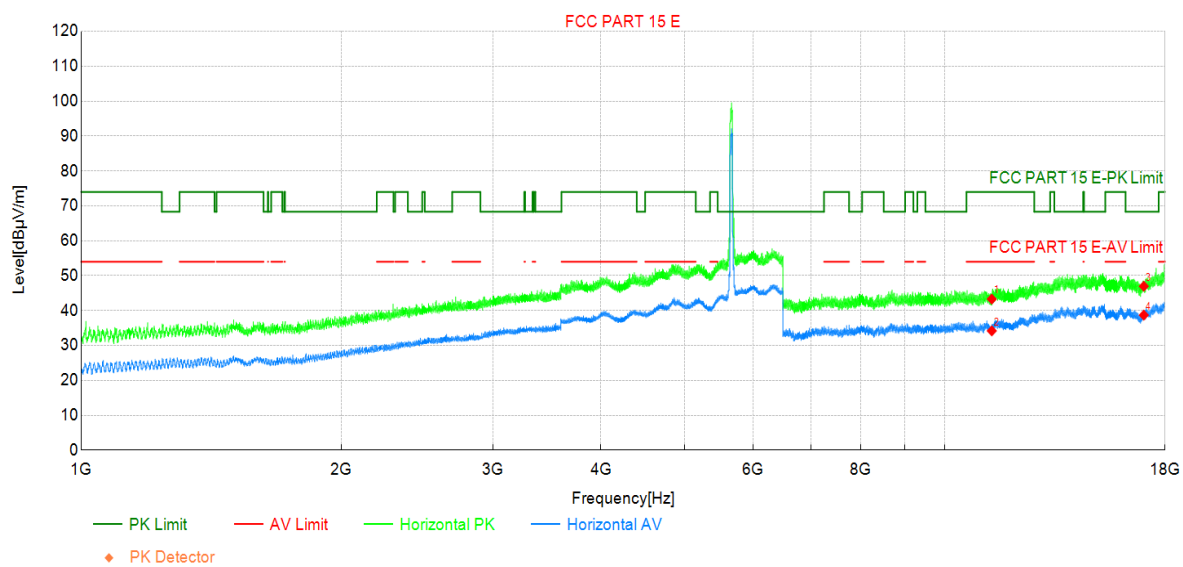

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	35.43	43.29	7.86	74.00	30.71	PK	Horizo	PASS
2	11340.00	26.32	34.18	7.86	54.00	19.82	AV	Horizo	PASS
3	17010.00	30.92	46.96	16.04	68.30	21.34	PK	Horizo	PASS
4	17010.00	22.65	38.69	16.04	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

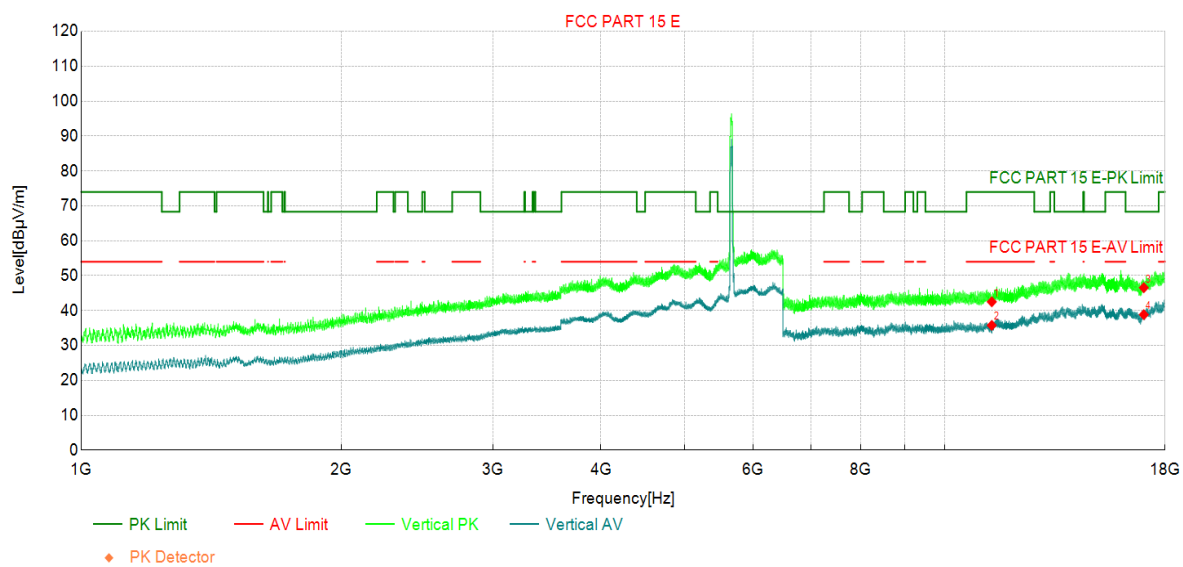

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	34.65	42.51	7.86	74.00	31.49	PK	Vertic	PASS
2	11340.00	27.90	35.76	7.86	54.00	18.24	AV	Vertic	PASS
3	17010.00	30.51	46.55	16.04	68.30	21.75	PK	Vertic	PASS
4	17010.00	22.78	38.82	16.04	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5755MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

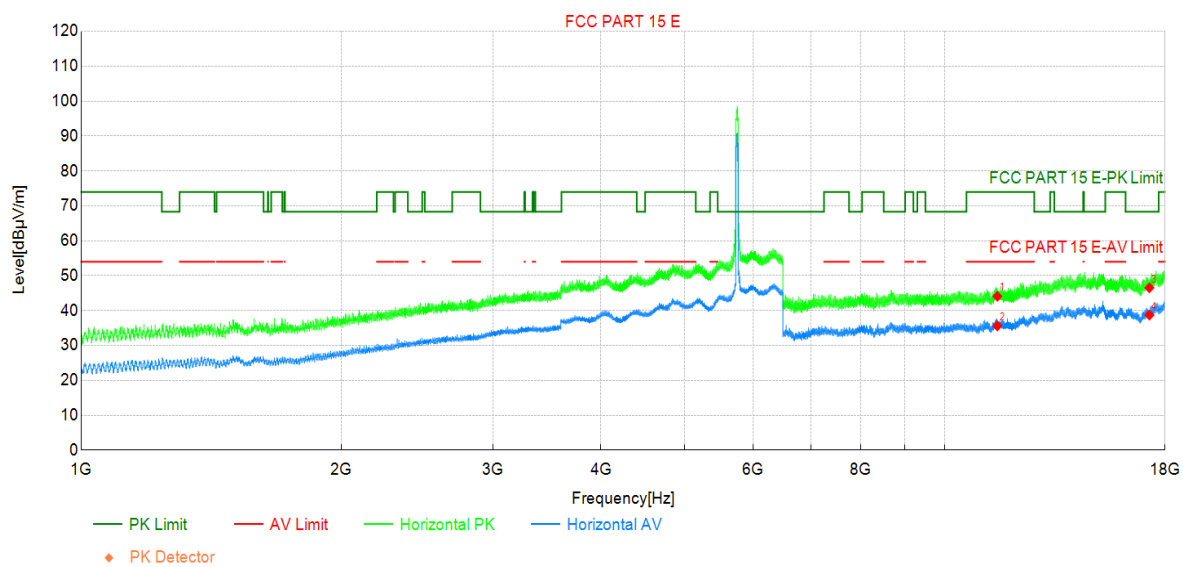

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	35.60	44.08	8.48	74.00	29.92	PK	Horizo	PASS
2	11510.00	27.13	35.61	8.48	54.00	18.39	AV	Horizo	PASS
3	17265.00	31.02	46.53	15.51	68.30	21.77	PK	Horizo	PASS
4	17265.00	23.21	38.72	15.51	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5755MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

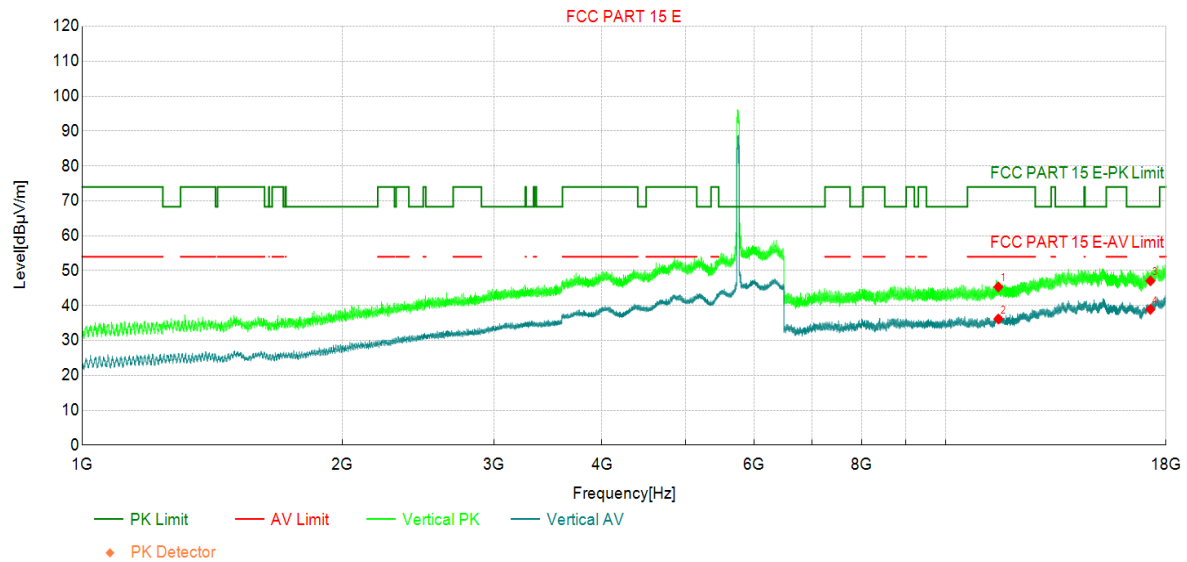

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	36.85	45.33	8.48	74.00	28.67	PK	Vertic	PASS
2	11510.00	27.67	36.15	8.48	54.00	17.85	AV	Vertic	PASS
3	17265.00	31.58	47.09	15.51	68.30	21.21	PK	Vertic	PASS
4	17265.00	23.38	38.89	15.51	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5795MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

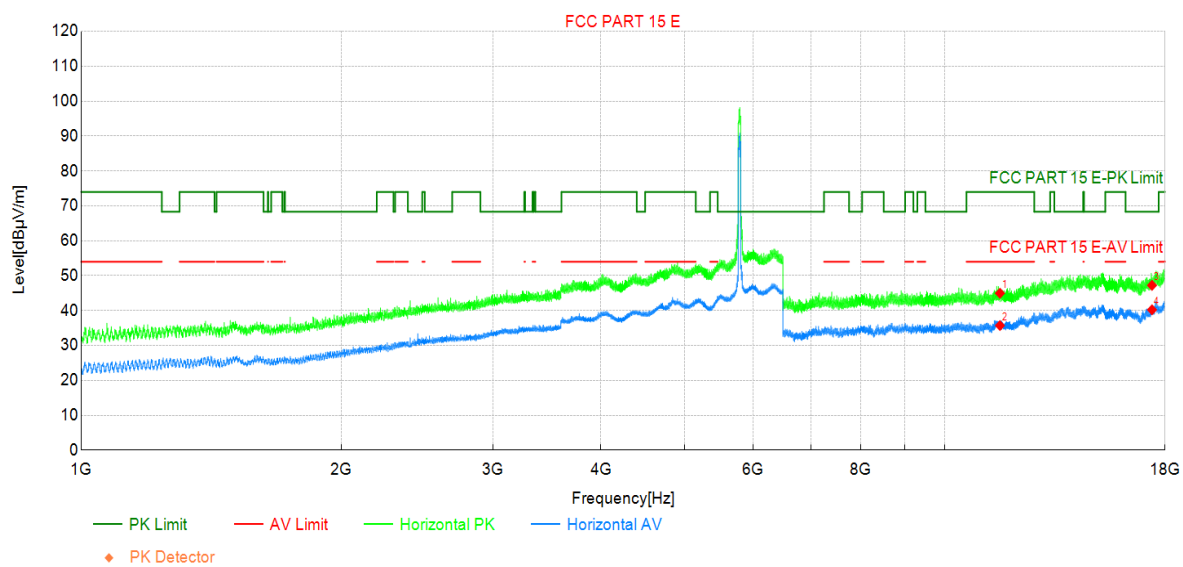

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	36.23	44.97	8.74	74.00	29.03	PK	Horizo	PASS
2	11590.00	26.97	35.71	8.74	54.00	18.29	AV	Horizo	PASS
3	17385.00	30.65	47.23	16.58	68.30	21.07	PK	Horizo	PASS
4	17385.00	23.64	40.22	16.58	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode5:Transmit at 5795MHz by 802.11ac(40Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

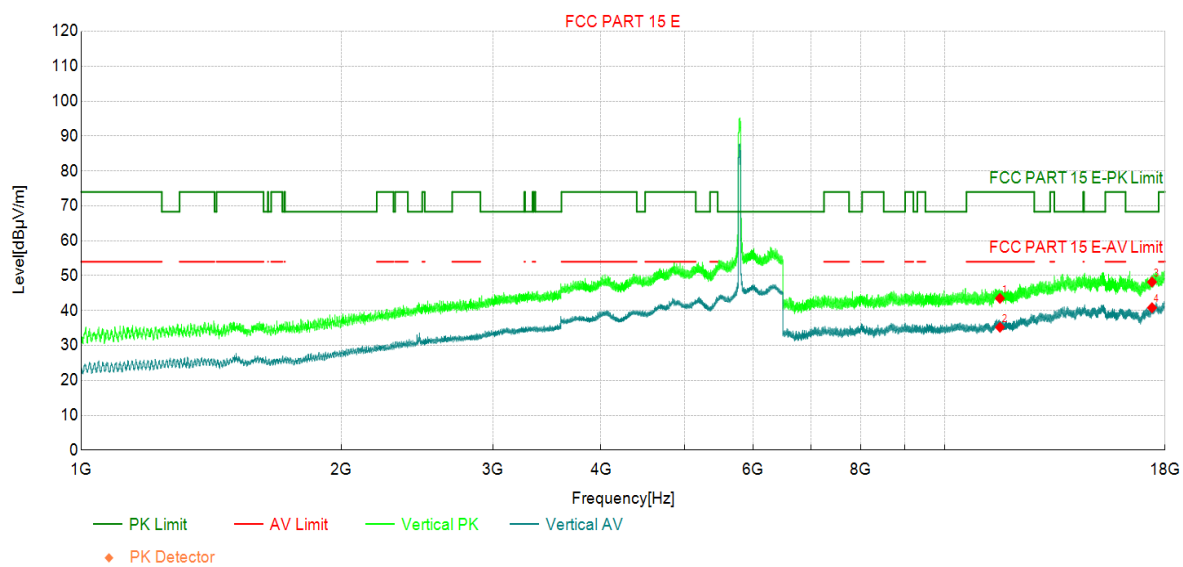

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	34.74	43.48	8.74	74.00	30.52	PK	Vertic	PASS
2	11590.00	26.47	35.21	8.74	54.00	18.79	AV	Vertic	PASS
3	17385.00	31.60	48.18	16.58	68.30	20.12	PK	Vertic	PASS
4	17385.00	24.24	40.82	16.58	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

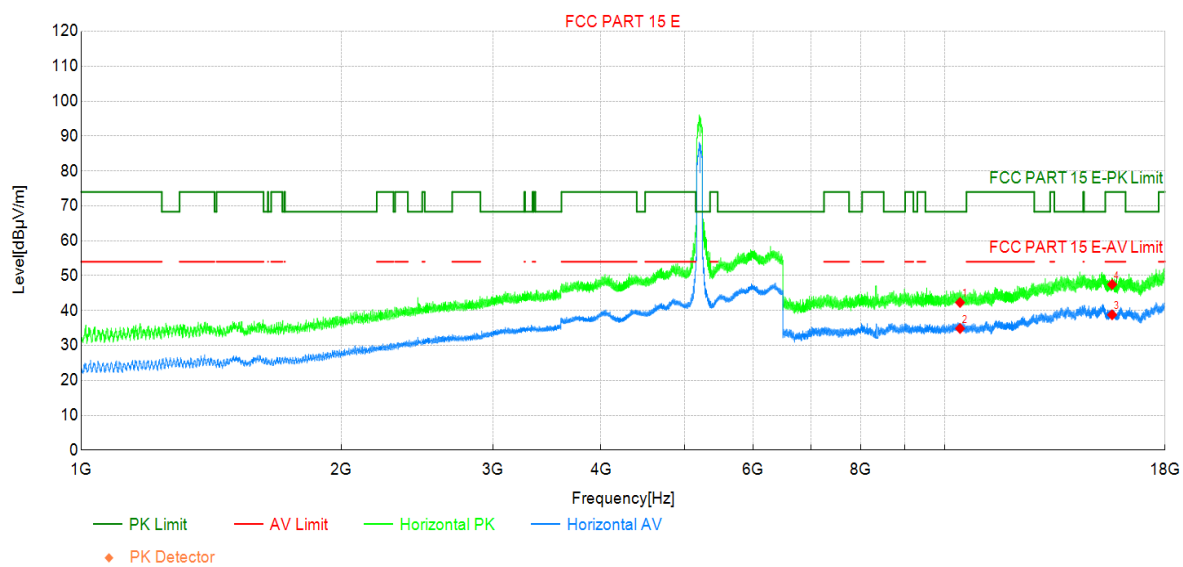

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420.00	35.71	42.31	6.60	68.30	25.99	PK	Horizo	PASS
2	10420.00	28.26	34.86	6.60	-	-	AV	Horizo	NA
3	15630.00	25.01	38.79	13.78	54.00	15.21	AV	Horizo	PASS
4	15630.00	33.72	47.50	13.78	74.00	26.50	PK	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

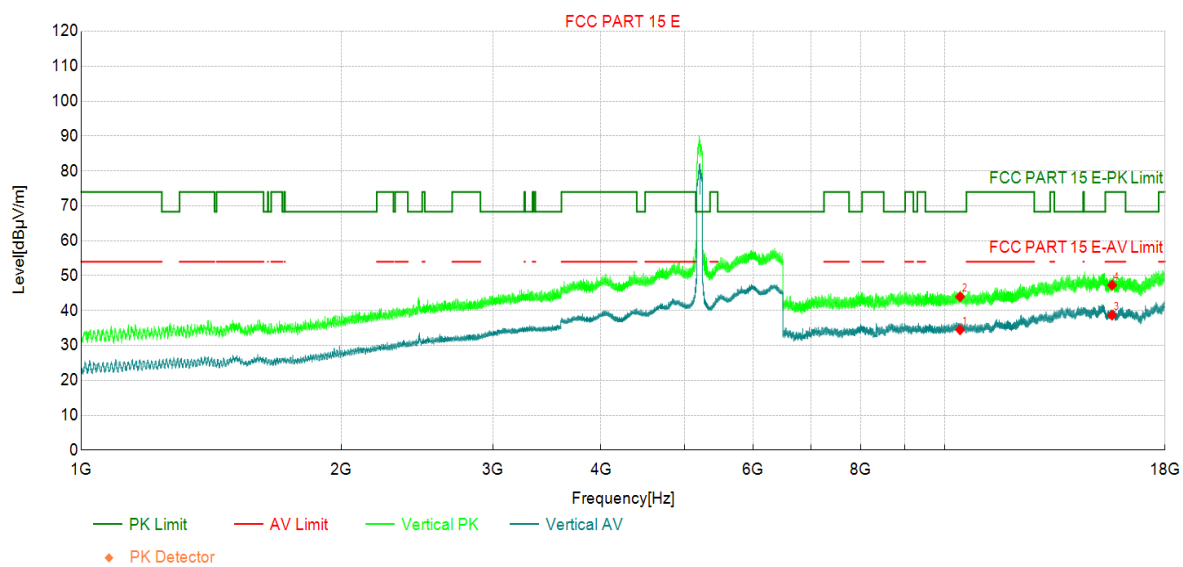

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420.00	27.88	34.48	6.60	-	-	AV	Vertic	NA
2	10420.00	37.36	43.96	6.60	68.30	24.34	PK	Vertic	PASS
3	15630.00	24.89	38.67	13.78	54.00	15.33	AV	Vertic	PASS
4	15630.00	33.49	47.27	13.78	74.00	26.73	PK	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

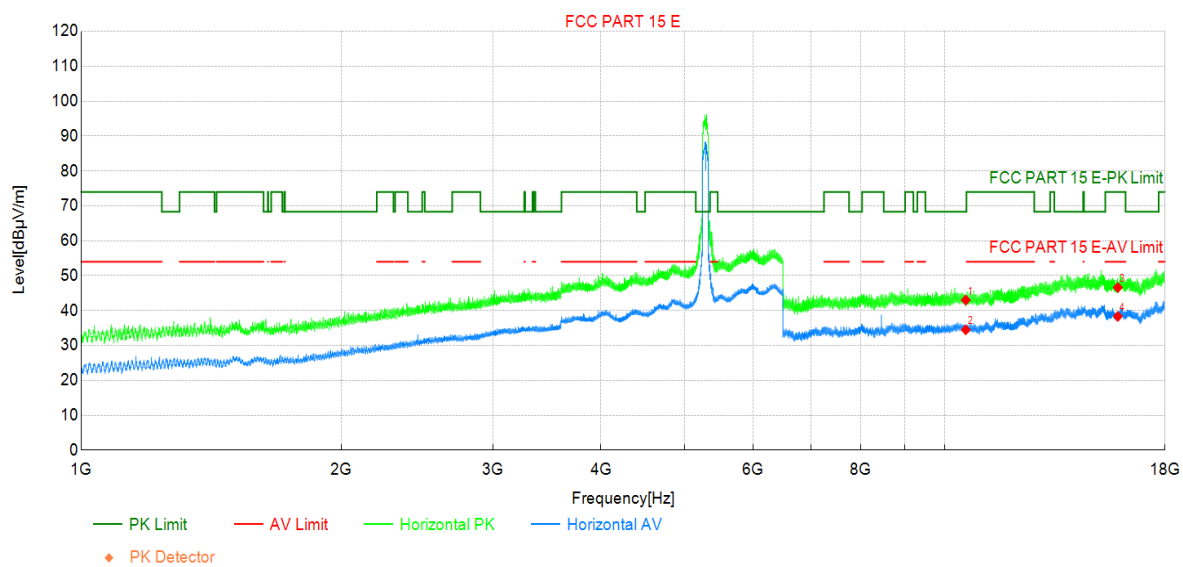

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580.00	36.24	43.01	6.77	68.30	25.29	PK	Horizo	PASS
2	10580.00	27.73	34.50	6.77	-	-	AV	Horizo	NA
3	15870.00	32.53	46.62	14.09	74.00	27.38	PK	Horizo	PASS
4	15870.00	24.24	38.33	14.09	54.00	15.67	AV	Horizo	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Enginee	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

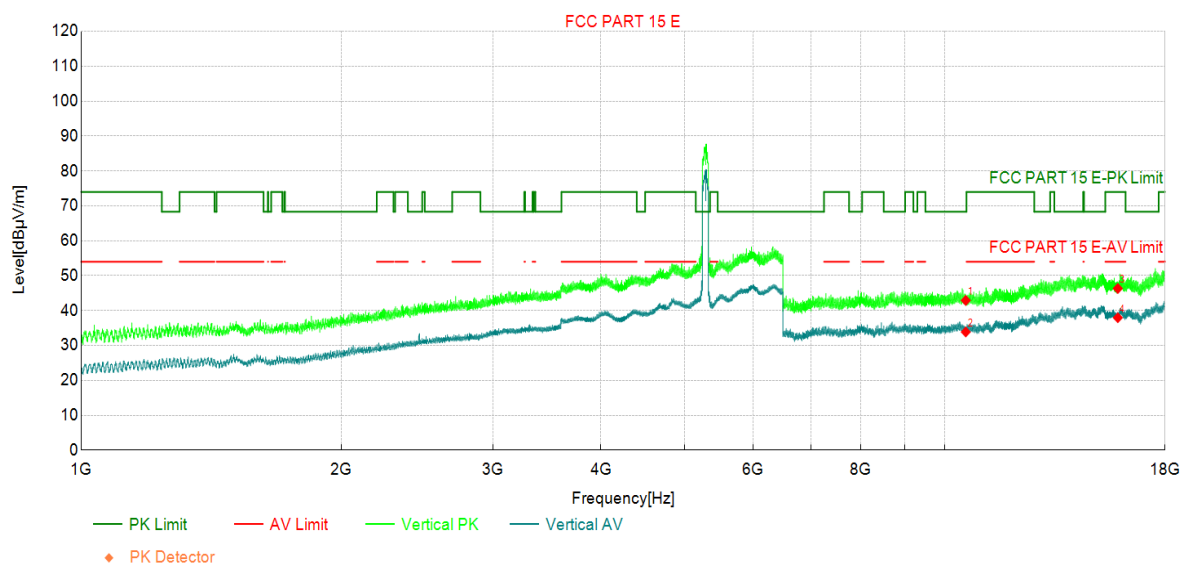

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580.00	36.14	42.91	6.77	68.30	25.39	PK	Vertic	PASS
2	10580.00	27.10	33.87	6.77	-	-	AV	Vertic	NA
3	15870.00	32.24	46.33	14.09	74.00	27.67	PK	Vertic	PASS
4	15870.00	23.87	37.96	14.09	54.00	16.04	AV	Vertic	PASS

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5530MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

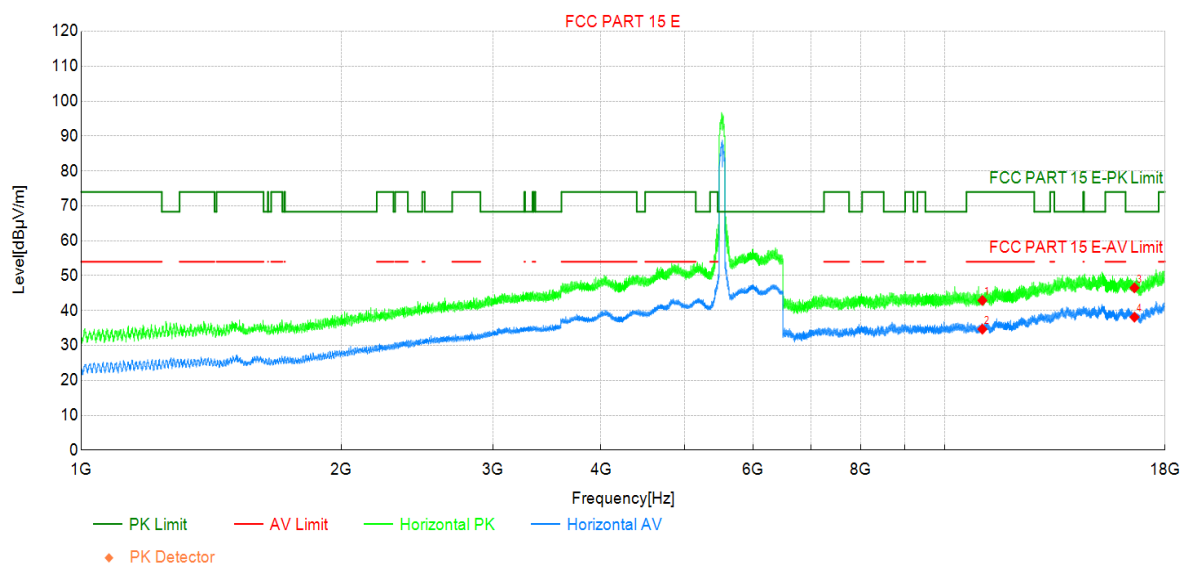

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060.00	35.94	42.90	6.96	74.00	31.10	PK	Horizo	PASS
2	11060.00	27.71	34.67	6.96	54.00	19.33	AV	Horizo	PASS
3	16590.00	31.71	46.51	14.80	68.30	21.79	PK	Horizo	PASS
4	16590.00	23.32	38.12	14.80	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5530MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

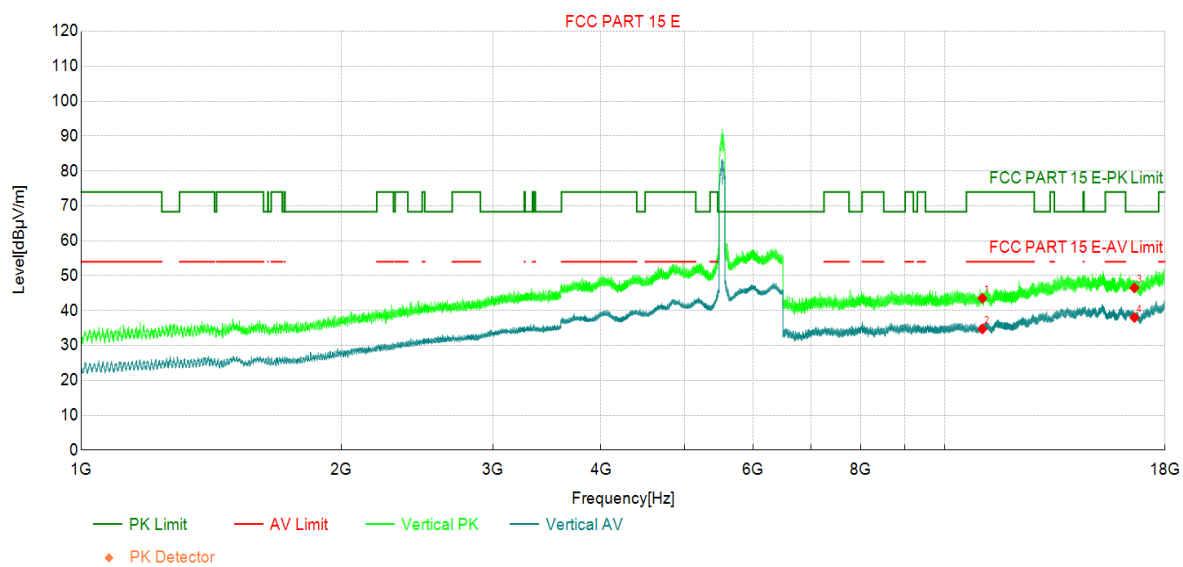

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060.00	36.57	43.53	6.96	74.00	30.47	PK	Vertic	PASS
2	11060.00	27.74	34.70	6.96	54.00	19.30	AV	Vertic	PASS
3	16590.00	31.71	46.51	14.80	68.30	21.79	PK	Vertic	PASS
4	16590.00	23.19	37.99	14.80	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5610MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

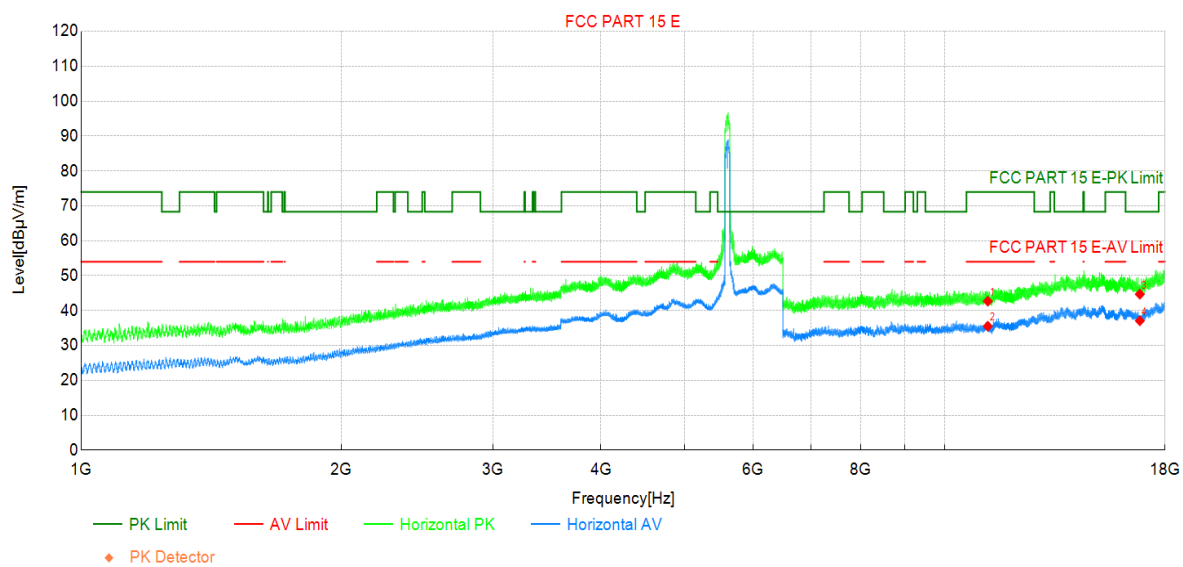

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220.00	34.96	42.69	7.73	74.00	31.31	PK	Horizo	PASS
2	11220.00	27.77	35.50	7.73	54.00	18.50	AV	Horizo	PASS
3	16830.00	29.78	44.70	14.92	68.30	23.60	PK	Horizo	PASS
4	16830.00	22.16	37.08	14.92	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5610MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

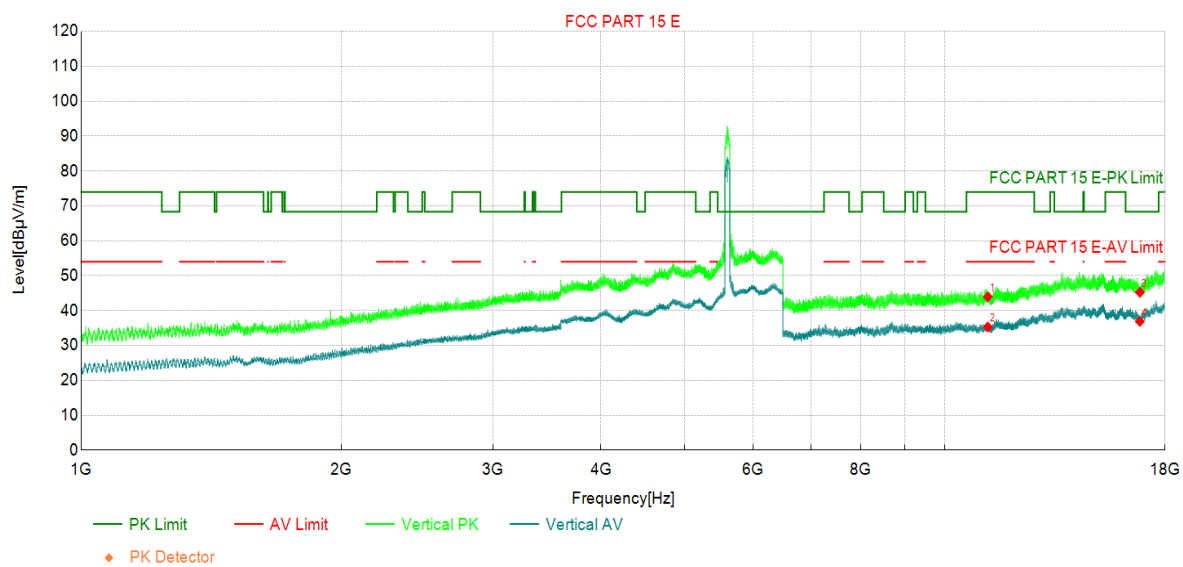

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220.00	36.20	43.93	7.73	74.00	30.07	PK	Vertic	PASS
2	11220.00	27.54	35.27	7.73	54.00	18.73	AV	Vertic	PASS
3	16830.00	30.31	45.23	14.92	68.30	23.07	PK	Vertic	PASS
4	16830.00	21.96	36.88	14.92	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	24C0966R	EUT:	Mobile Computer
Mode:	Mode6:Transmit at 5775MHz by 802.11ac(80Mhz)	Voltage:	By Battery
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

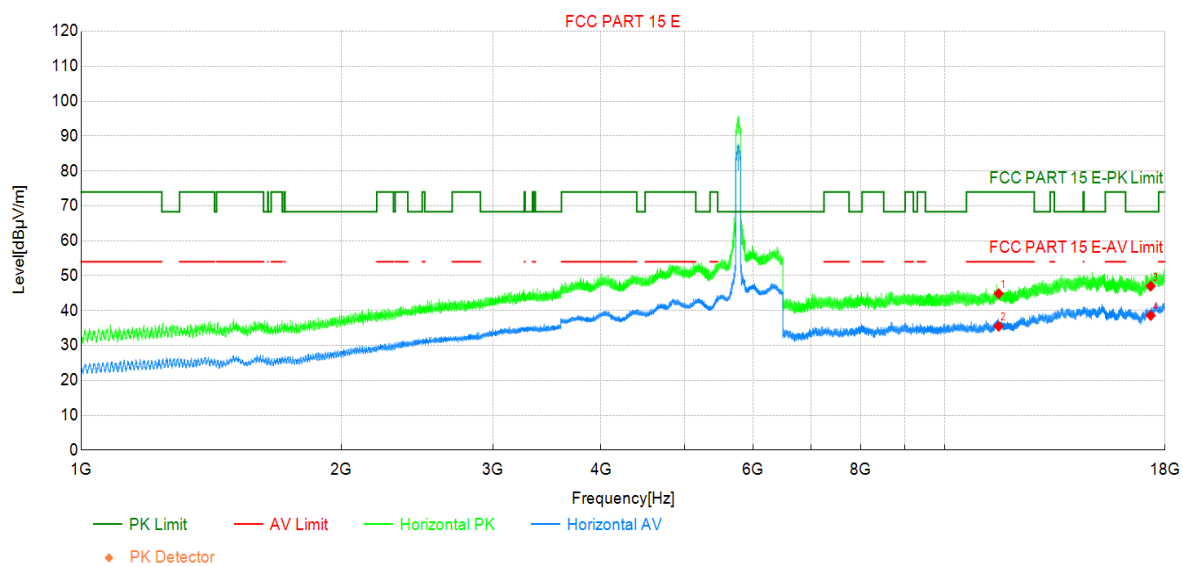

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550.00	36.25	44.86	8.61	74.00	29.14	PK	Horizo	PASS
2	11550.00	26.88	35.49	8.61	54.00	18.51	AV	Horizo	PASS
3	17325.00	31.13	47.00	15.87	68.30	21.30	PK	Horizo	PASS
4	17325.00	22.70	38.57	15.87	-	-	AV	Horizo	NA