



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 15.247 FHSS

TEST REPORT

APPLICANT	ZTX Wireless, Inc.
ADDRESS	8886 N. Government Way Ste. J Hayden, ID 83835
PROPOSED FCC ID	V35ZTX965D
MODEL NUMBER	ZTX965D
PRODUCT DESCRIPTION	15.247 FHSS Radio
DATE SAMPLE RECEIVED	March 17, 2008
DATE TESTED	March 19, 2008
TESTED BY	Joe Scoglio
APPROVED BY	Mario R. de Aranzeta
TIMCO REPORT NO.	384YUT8Testreport.pdf
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



TABLE OF CONTENTS

ATTESTATION	3
REPORT SUMMARY.....	4
TEST ENVIRONMENT AND TEST SETUP	4
DUT DESCRIPTION	5
EMC EQUIPMENT LIST	6
TEST PROCEDURES	7
POWER LINE CONDUCTED INTERFERENCE.....	9
NUMBER OF HOPPING CHANNELS	10
DWELL TIME OF A HOPPING CHANNEL.....	12
20 dB BANDWIDTH	13
CARRIER FREQUENCY SEPARATION	14
POWER OUTPUT	15
SPURIOUS EMISSIONS AT ANTENNA TERMINALS	16
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	17
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND.....	21

APPLICANT: ZTX WIRELESS, INC.

FCC ID: V35ZTX965D

REPORT: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport.doc



ATTESTATION

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.



Test Certificate #0955-01

AUTHORIZED BY: Mario de Aranzeta



SIGNATURE:

FUNCTION: Lab Supervisor/ Test Engineer

DATE: March 27, 2008

TESTED BY: Nam Nguyen, Joe Scoglio
Test Technicians

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 3 of 22

REPORT SUMMARY

Disclaimer:	The test results relate only to the items tested.
Purpose of Test:	To demonstrate that the DUT is in compliant with FCC Pt 15.247 requirements for a 902-928 MHz FHSS radio.
Applicable Standards:	FCC Pt 15.247, ANSI C63.4: 2003, ANSI TIA-603: 2004, FCC Pt 15.109
Related Reports:	N/A

TEST ENVIRONMENT AND TEST SETUP

Test Facilities:	All measurements were made at one or more of the test sites of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.
Laboratory Test Conditions:	Temperature: 26°C, Humidity: 55%
Test Exercise:	The DUT was set in continuous transmit mode of operation.
Deviation to the Standards:	There was no deviation from the standard.
Modification to the DUT:	No modification was made.
Supporting Accessories:	None

DUT DESCRIPTION

Manufacturer:	ZTX Wireless, Inc.
Product Description	A Pt 15.247 FHSS transceiver
FCC ID:	V35ZTX965D
Model Number:	ZTX965D
Brand Name:	N/A
Operating Frequency:	903 ~ 927 MHz
Max. Output Pwr:	4.7 mWatt
Type of Modulation:	GFSK
EUT Power Source:	Primary Power – Any 3V dc source (battery) Secondary Power – N/A
Test Item:	Prototype
Type of Equipment	Mobile
Antenna	(Fixed) integral quarter wave wire
Antenna Connector	none

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 5 of 22

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 452	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan tower Quasi-Peak Adapter	HP	85650A	303A01690	CAL 11/30/07	11/30/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/07	12/12/09
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 7/18/07	7/18/09
Antenna: Double-Ridged Horn	Electro-Metrics	RGA-180	2319	CAL 7/18/07	7/18/09
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 7/23/07	7/23/09
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/07	12/14/09
Receiver	R & S	ESIB40		11/25/2007	11/25/2009

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 6 of 22


TEST PROCEDURES

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The resolution bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

BANDWIDTH 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.


RF Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Output Power Test Setup Diagram

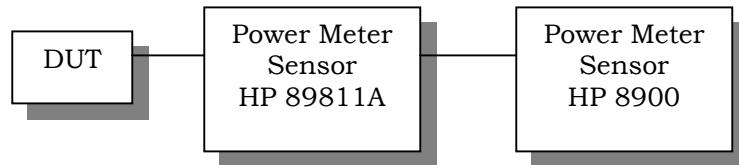

ANTENNA CONDUCTED EMISSIONS: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a peak power meter. The antenna is non-directional and doesn't exceed 6 dBi gain. The power output was measured at three places in the band highest is reported below.

Spurious Emissions at
Antenna Terminals

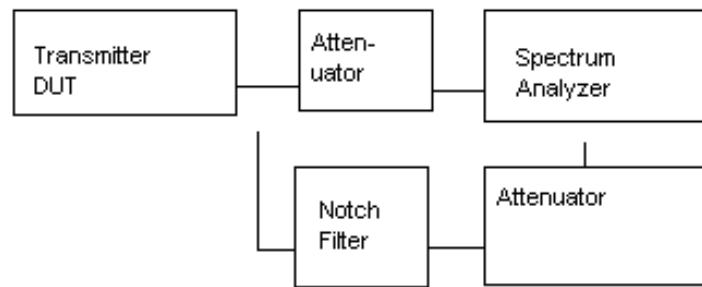



RADIATION INTERFERENCE: The test procedure used was ANSI C63.4-2003 using an Agilent spectrum receiver with preselector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND: An in band field strength measurement of the fundamental emission using the RBW and detector function required by ANSI C63.4-2003 and the FCC rules.

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 8 of 22

POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.207

REQUIREMENTS:

Emission Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak (QP)	Average (AV)
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

TEST DATA: Not applicable to this device. Battery operated.


NUMBER OF HOPPING CHANNELS

Rules Part No.: 15.247(a)(1)

Requirements:

902-928 MHz	If the 20 dB bandwidth is < 250 kHz, the system shall use at least 50 hopping frequencies.
	If the 20 dB bandwidth is 250 kHz or greater, the system shall use at least 25 hopping frequencies.
2400-2483.5 MHz	At least 15 channels
5725-5850 MHz	At least 75 channels

Test Data: There are 50 hopping channels

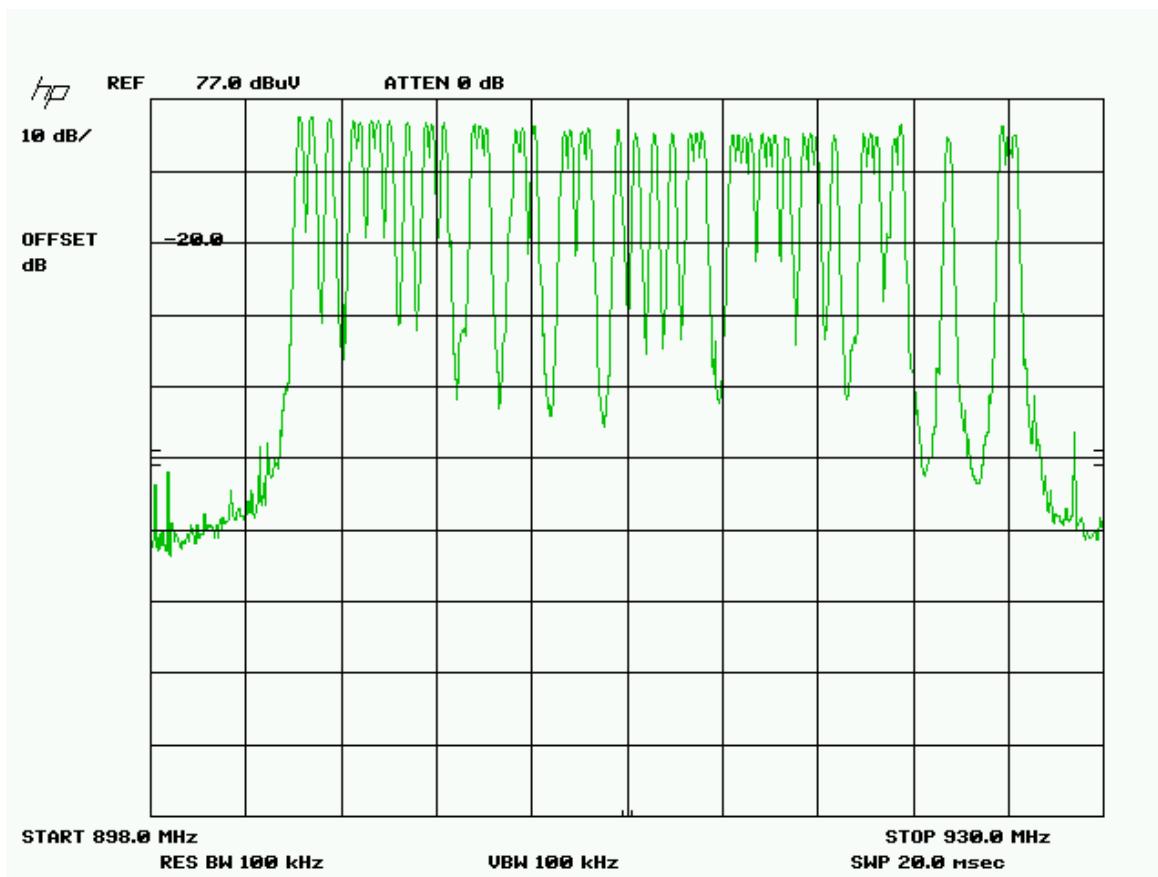

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 10 of 22

Channel list

902.999725	915.396698
903.399627	915.996551
903.999481	916.196502
904.799286	916.396454
904.999237	917.396209
905.399139	917.596161
905.59909	917.796112
905.998993	917.996063
906.598846	918.395965
907.1987	918.595916
907.398651	918.795868
907.798553	919.19577
908.798309	919.795623
908.99826	919.995575
909.198211	920.195526
910.197967	920.795379
910.397918	921.795135
910.797821	921.995086
911.797577	922.195038
911.997528	922.794891
912.39743	922.994842
912.597381	924.594452
913.597137	926.394012
914.196991	926.593963
914.796844	926.793914

DWELL TIME OF A HOPPING CHANNEL


RULES PART NO.: 15.247(a)(1)(i)

REQUIREMENTS:

902-928 MHz	If 20 dB bandwidth is < 250 kHz, average time of occupancy of any frequency shall not exceed 0.4 sec in 20 seconds.
	If 20 dB bandwidth is 250 kHz or greater, dwell time < = 0.4 seconds in a 10 second period.
2400-2483.5 MHz	< = 0.4 seconds in a 0.4 seconds multiplied the number of hopping channels employed.
5725-5850 MHz	< = 0.4 seconds in a 30 second period.

TEST DATA: The dwell time is 39.2 msec per hop.

Three places in the band were measured and the worst case presented.

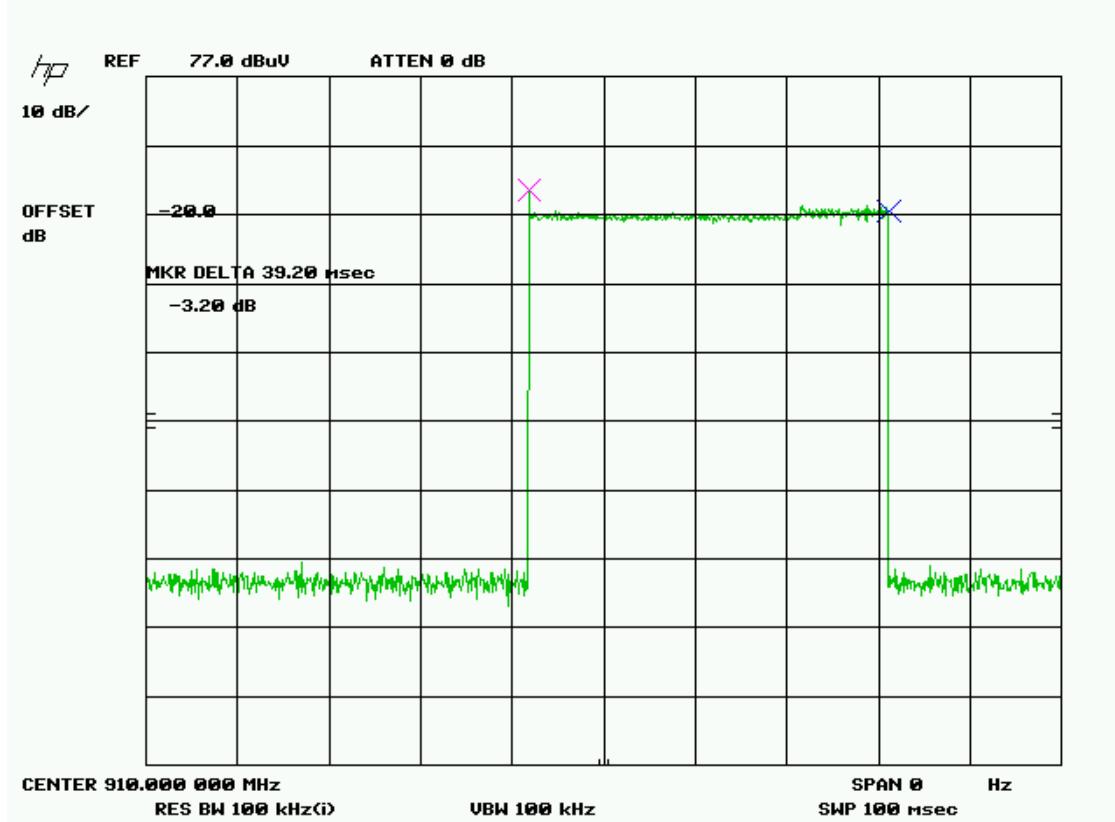

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport


Page 12 of 22

20 dB BANDWIDTH

RULES PART NO.: 15.247(a)(2)

REQUIREMENTS: The 20 dB bandwidth must be less than 500 kHz.

TEST DATA: See the following plot(s)

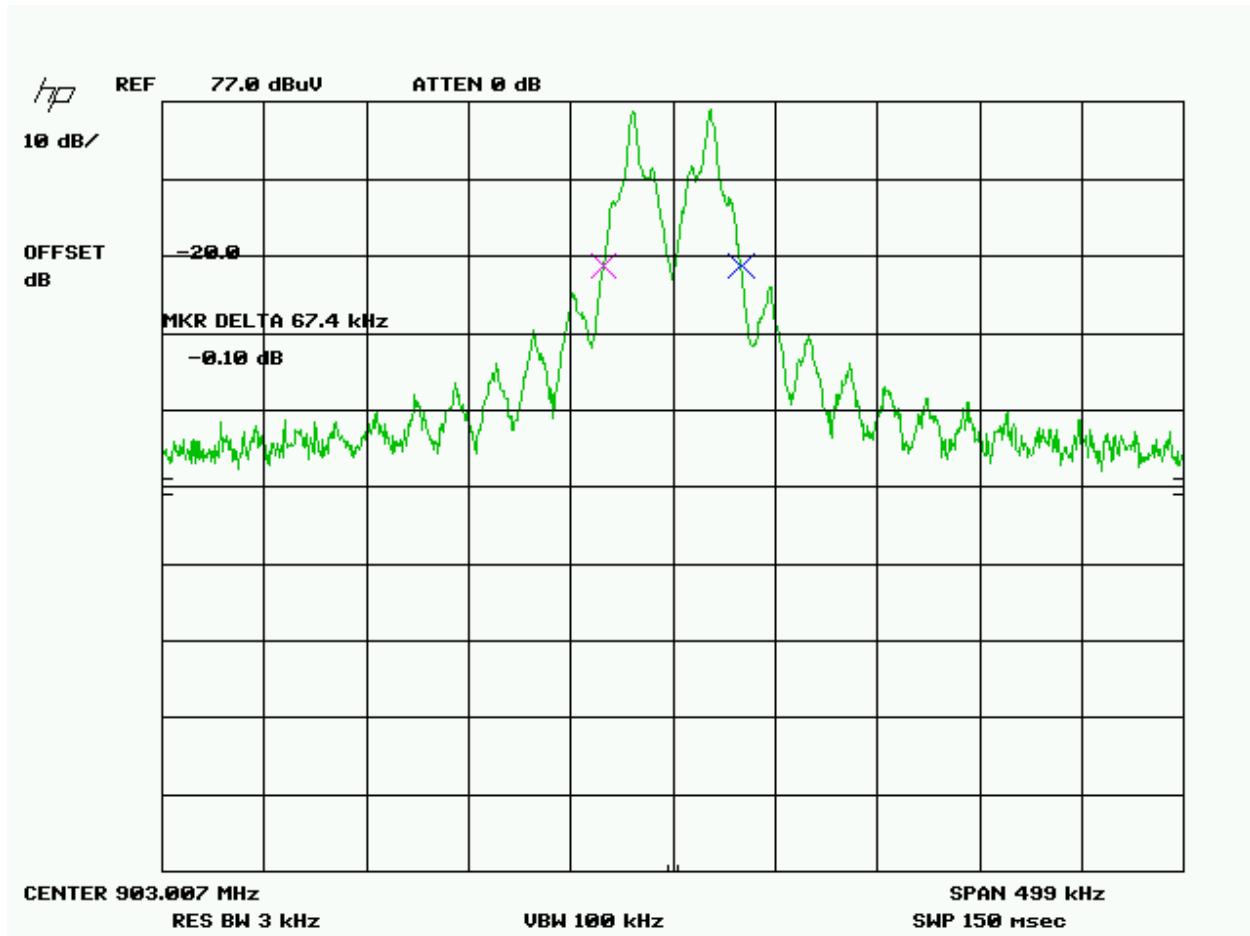


Three places in the band were measured and the worst case presented above.

CARRIER FREQUENCY SEPARATION

RULES PART NO.: 15.247(a)(2)

REQUIREMENTS: The hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

TEST DATA: See the following plot

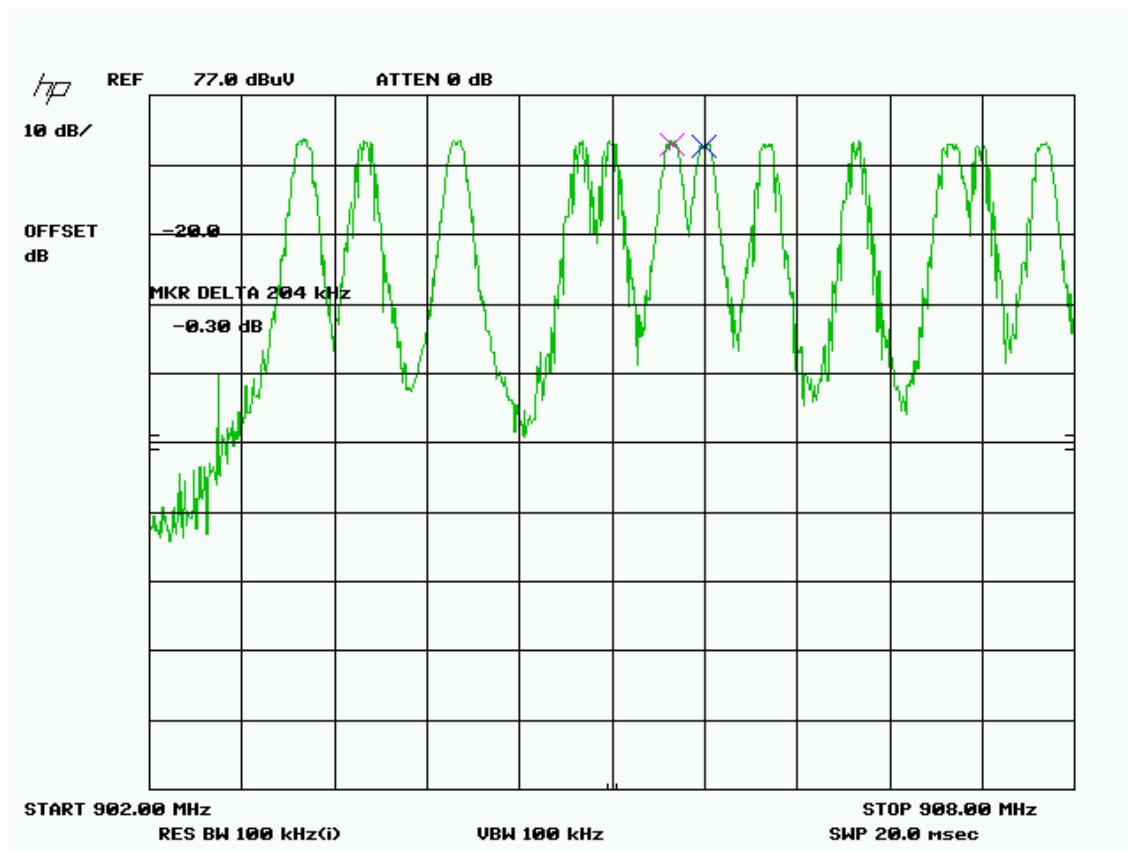

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 14 of 22

POWER OUTPUT

Rules Part No.: 15.247(b)

Requirements: The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Data: The device under test has an integral antenna and the power was measured on a radiated basis.

Frequency MHz	Power (EIRP) mW
903	2.8
915	4.1
927	4.7

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

RULES PART NO.: 15.247(c)

REQUIREMENTS: Emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

Note: The spectrum was scanned to the tenth harmonic.

TEST DATA: The device under test has an integral antenna and the power was measured on a radiated basis.

FIELD STRENGTH OF SPURIOUS EMISSIONS

RULES PART NO.: 15.247(c), 15.205 &15.209(b)

REQUIREMENTS:

§15.247(c)& §15.205	
(Fundamental) Frequency	(Field Strength) Limits
902 – 928MHz	127.37dBuV/m
2.4 – 2.4835GHz	
	54 dBuV/m @3m
§15.209	
30 - 88 MHz	40 dBuV/m @3M
88 -216 MHz	43.5 dBuV/m @3M
216 -960 MHz	46 dBuV/m @3M
ABOVE 960 MHz	54dBuV/m

Emissions that fall in the restricted bands (15.205) must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20 dBc.

Harmonics were measured to the 10th harmonic.

Test Data: Please see the following tables.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty cycle dB	Field Strength dBuV/m	Margin dB
903	903	72.5	H	1.95	23.33		97.78	29.6
903	903	75.1	V	1.95	22.67		99.72	27.66
903	1,806.00	18.3	H	2.74	29.96		51	3
903	1,806.00	20.8	V	2.74	29.96		53.5	0.5
903	2,709.00	12.5	H	3.4	32.54		48.44	5.56
903	2,709.00	14.8	V	3.4	32.54		50.74	3.26
903	3,612.00	7.3	H	4.15	32.98		44.43	9.57
903	3,612.00	7.4	V	4.15	32.98		44.53	9.47

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 17 of 22

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty cycle dB	Field Strength dBuV/m	Margin dB
903	4,515.00	7	V	4.76	34.1		45.86	8.14
903	4,515.00	8.4	H	4.76	34.1		47.26	6.74
903	5,418.00	13.1	V	5.13	34.6		52.83	21.17
903	5,418.00	16.5	H	5.13	34.6		56.23	17.77
903	6,321.00	17	V	5.4	35.66		58.06P	15.94
903	6,321.00	17	V	5.4	35.66	9.6	48.46A	5.54
903	6,321.00	20.2	H	5.4	35.66		61.26P	12.74
903	6,321.00	20.2	H	5.4	35.66	9.6	51.66A	2.34
903	7,224.00	11.1	V	5.73	36.04		52.87	1.13
903	7,224.00	15.1	H	5.73	36.04		56.87P	17.13
903	7,224.00	15.1	H	5.73	36.04	9.6	47.27A	6.73
903	8,127.00	11.3	V	6.25	36		53.55	20.45
903	8,127.00	15.2	H	6.25	36		57.45	16.55
903	9,030.00	9.2	V	6.61	36.32		52.13	21.87
903	9,030.00	11.3	H	6.61	36.32		54.23	19.77
915	915	71.7	H	1.97	23.35		97.02	30.36
915	915	76.8	V	1.97	22.6		101.37	26.01
915	1,830.00	17.5	V	2.76	30.11		50.37	3.63
915	1,830.00	19.8	H	2.76	30.11		52.67	1.33
915	2,745.00	11.6	H	3.42	32.55		47.57	6.43
915	2,745.00	16.2	V	3.42	32.55		52.17	1.83
915	3,660.00	8.1	H	4.19	33.06		45.35	8.65
915	3,660.00	9	V	4.19	33.06		46.25	7.75
915	4,575.00	7.1	V	4.79	34.1		45.99	8.01
915	4,575.00	8.5	H	4.79	34.1		47.39	6.61
915	5,490.00	18	V	5.15	34.69		57.84P	16.16
915	5,490.00	18	V	5.15	34.69	9.6	48.24A	5.76
915	5,490.00	18.9	H	5.15	34.69		58.74P	15.26
915	5,490.00	18.9	H	5.15	34.69	9.6	49.14A	4.86

[Continued]

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 18 of 22

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty cycle dB	Field Strength dBuV/m	Margin dB
915	6,405.00	16.5	V	5.42	35.72		57.64P	16.36
915	6,405.00	16.5	V	5.42	35.72	9.6	48.04A	5.96
915	6,405.00	20.1	H	5.42	35.72		61.24P	12.76
915	6,405.00	20.1	H	5.42	35.72	9.6	51.64A	2.36
915	7,320.00	13	V	5.79	36.06		54.85	19.15
915	7,320.00	17.3	H	5.79	36.06		59.15	14.85
915	8,235.00	10.1	V	6.29	36		52.39	21.61
915	8,235.00	12.8	H	6.29	36		55.09	18.91
915	9,150.00	8.6	V	6.65	36.39		51.64	22.36
915	9,150.00	12.5	H	6.65	36.39		55.54	18.46
927	927	73.5	H	1.99	23.44		98.93	28.45
927	927	77.3	V	1.99	22.67		101.96	25.42
927	1,854.00	17.7	V	2.78	30.27		50.75	3.25
927	1,854.00	19.7	H	2.78	30.27		52.75	1.25
927	2,781.00	12.2	H	3.45	32.56		48.21	5.79
927	2,781.00	13.1	V	3.45	32.56		49.11	4.89
927	3,708.00	9	V	4.24	33.13		46.37	7.63
927	3,708.00	10.2	H	4.24	33.13		47.57	6.43
927	4,635.00	10.7	V	4.82	34.1		49.62	24.38
927	4,635.00	14.6	H	4.82	34.1		53.52	20.48
927	5,562.00	21.3	V	5.17	34.79		61.26P	12.74
927	5,562.00	21.3	V	5.17	34.79	9.6	51.66A	2.34
927	5,562.00	21.6	H	5.17	34.79		61.56P	12.44
927	5,562.00	21.6	H	5.17	34.79	9.6	51.96A	2.04
927	6,489.00	17.3	V	5.45	35.79		58.54P	15.46
927	6,489.00	17.3	V	5.45	35.79	9.6	48.94A	5.06
927	6,489.00	17.6	H	5.45	35.79		58.84P	15.16
927	6,489.00	17.6	H	5.45	35.79	9.6	49.24A	4.76
927	7,416.00	13	V	5.85	36.08		54.93	19.07
927	7,416.00	14.4	H	5.85	36.08		56.33	17.67

(Continued)

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 19 of 22

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty cycle dB	Field Strength dBuV/m	Margin dB
927	8,343.00	9.6	V	6.34	36		51.94	22.06
927	8,343.00	11.2	H	6.34	36		53.54	20.46
927	9,270.00	7.9	V	6.68	36.46		51.04	2.96
927	9,270.00	10.6	V	6.68	36.46		53.74	0.26

All readings are peak unless marked otherwise.

P= Peak

A= Average

R= Restricted band frequency


Harmonics were checked through the 10th harmonic.

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND


REQUIREMENTS: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54dBuV/m). Emissions not in the restricted band must be 20 dBc.

TEST DATA: The plots are presented below.

Lower bandedge

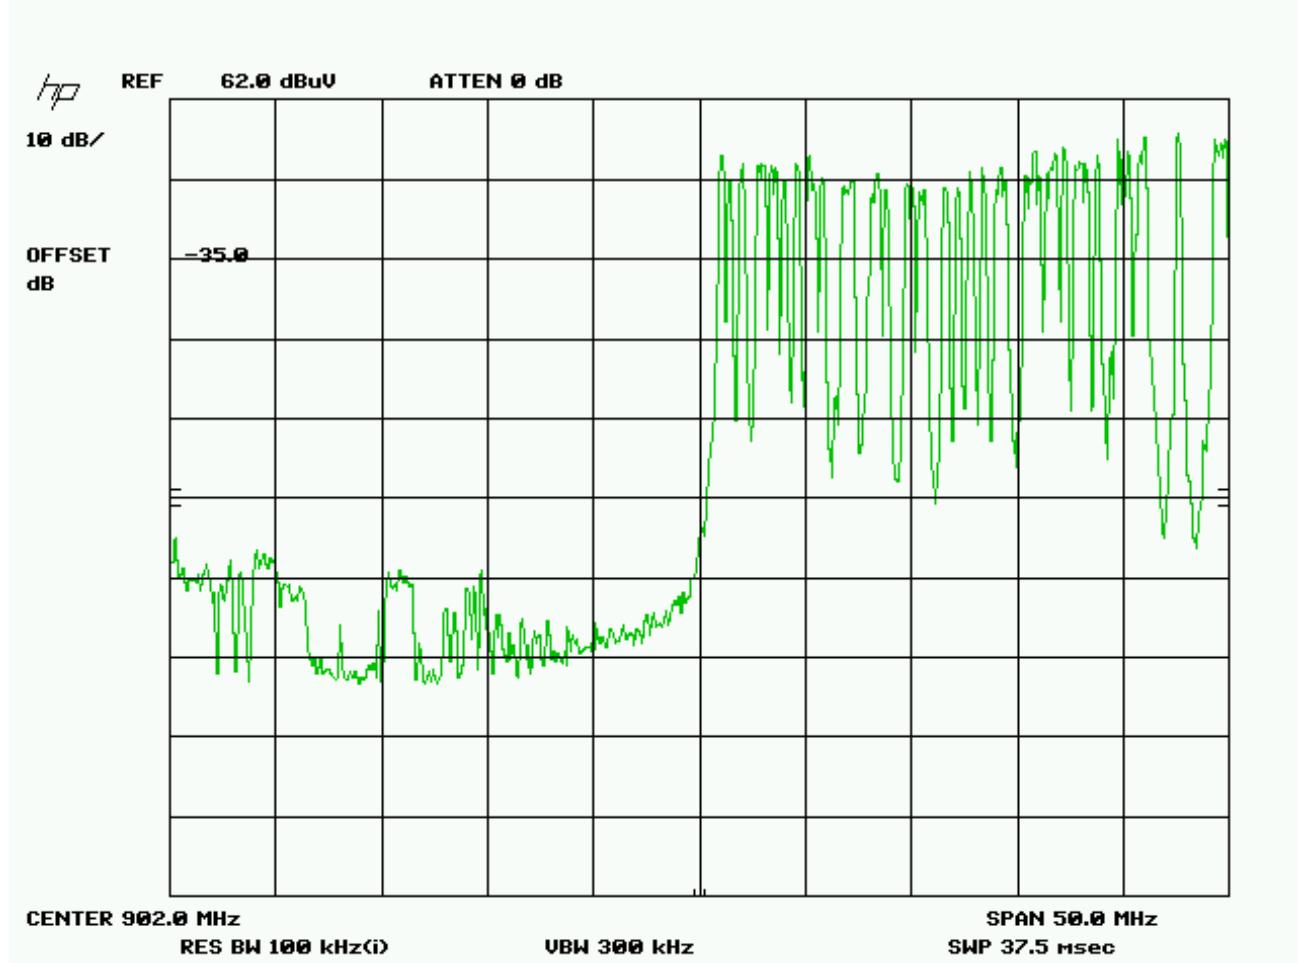

Upper bandedge (peak value)

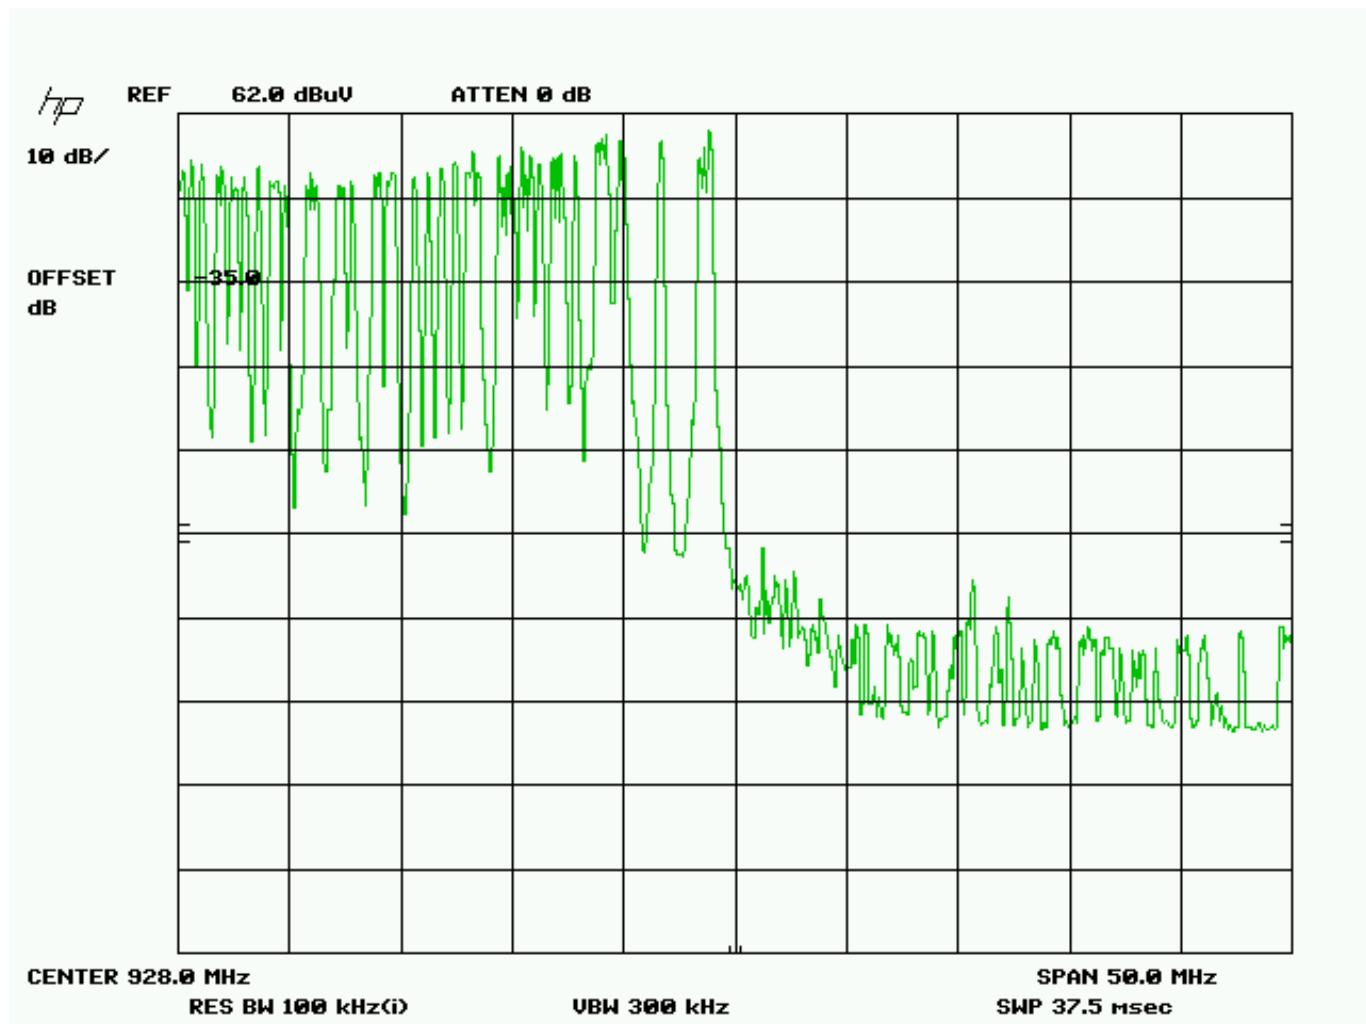

Peak

Applicant: ZTX Wireless, Inc.

FCC ID: V35ZTX965D

Report: X:\Z\ZTX Wireless\384YUT8\384YUT8TestReport

Page 22 of 22