

# SAR Evaluation Report for FCC OET Bulletin 65 Supplement C and Industry Standard RSS-102 Issue 2

Report No.: 08-03-MAS-080-04

	Client:	Ki	ngtel Corporation	
	Product:	US	S DECT Portable Unit	
	Model:	K7	Γ-611D6	
	Manufacturer/supplier:	Ηι	nizhou Kingtel Technology Con	rporation
	Date test item received:		2008/03/11	
	Date test campaign complete	d:	2008/04/30	
	Date of issue:		2008/11/14	
	Test Result:		Compliance	☐ Not Compliance
	of 1.6 W/kg averaged over an	ny 1	the test sample are below the mag tissue according to FCC OE hada RSS-102 (Issue 2, 2005).	
in par	t or in full, without the pern	nissi	·	mitted to copy this report,
Total 1	number of pages of this test re	por	t: 60 pages	

Test Engineer	Checked by	Approved by
Erie	Joe Hieh	Win-Po Zai
Eric Lin	Joe Hsieh	Winpo Tsai

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

### **Applicant Information**

**Client** : Kingtel Corporation

**Address**: 5F., No.58, Jhouzih St., Neihu District, Taipei City 11493,

Taiwan

**Contact** : Carole Pao

Manufacturer : Huizhou Kingtel Technology Corporation

Address : Ping Nan Industry District Hui Huan Town, Huizhou City

516006, China

**EUT** : US DECT Portable Unit

**Model No.** : KT-611D6

**Standard Applied**: FCC OET 65 Supplement C (Edition 01-01, June 2001)

Industry Standard RSS-102 Issue 2 (November 2005)

IEEE Standard 1528-2003

**Test Location**: Electronics Testing Center, Taiwan (www.etc.org.tw)

No.8, Lane 29, Wenming RD., LeShan Tsuen, GuiShan

Shiang, Taoyuan County 33383, Taiwan, R.O.C.

The US DECT handset of KT-611D6 is in compliance with the FCC Report and Order 93-326 and Health Canada Safety Code 6, and the tests were performed according to the FCC OET65c and RSS-102 Issue 2 for uncontrolled exposure.

# Table of Contents

EXEC	UTIVE SUMMARY	5
1 6	GENERAL INFORMATION	6
1.1	Description of Equipment Under Test	6
1.2	Photograph of EUT	
1.3	Environment Conditions	7
1.4	FCC Requirements for SAR Compliance Testing	7
1.4.	1 RF Exposure Limits	7
1.5	The SAR Measurement Procudure for Mobile	8
1.5.	1 General Requirements	8
1.5.2	2 Phantom Requirements	8
1.5.3	3 Test Positions	8
1.5.4	4 Test Procedures	10
2 D	DESCRIPTION OF THE TEST EQUIPMENT	11
2.1	Test Equipment List	11
2.2	DASY4 Measurement System Diagram:	12
2.3	DASY4 Measurement Server	13
2.4	DAE (Data Acquisition Electronics)	14
2.5	Phantom	15
2.6	Device Holder	15
2.7	Specifications of Probes	16
2.8	SAR Measurement Procedures in DASY4	16
2.9	Simulating Liquids	17
2.10	System Performance Check	17
2.10	.1 Purpose	17
2.10	.2 System Performance Check Procedure	17
2.10	.3 System Performance Check Setup	18
2.10	.4 Result of System Performance Check: Valid Result	18
3 R	RESULTS	19
3.1	Summary of Test Results	19
3.2	Head	19
3.3	Measurement Position (Including LC, LT, RC, RT)	20
3.3.		
3.3.2	2 Left-Tilt (LT)	20
3.3.3	Right-Cheek (RC)	21
3.3.4	4 Right-Tilt (RT)	21
4 T	THE DESCRIPTION OF TEST PROCEDURE FOR FCC	22

7 A	ANNEX: TEST RESULTS OF DASY4 (REFER TO ANNEX)	25
6	REFERENCES	28
5.2	Measurement Uncertainty II (According to IEC 62209)	27
5.1	Measurement Uncertainty I (According to IEEE 1528)	26
5	MEASUREMENT UNCERTAINTY	26
4.5	Spatial Peak SAR Evaluation	25
4.4	Data Evaluation	23
4.3	Data Storage	22
4.2	SAR Averaging Methods	22
4.1	Scan Procedure	22

# **Executive Summary**

The product KT-611D6 is a new DECT handset from Kingtel Corporation products operating in the 1920 ~ 1930 MHz frequency range. The measurements was conducted by ETC and carried out with the dosimetric assessment system – DASY4.

The measurements of handset were conducted according to FCC OET 65 Supplement C [Reference 5] for evaluating compliance with requirements of FCC Report and Order 96-326 [Reference 3] and also according to Industry Standard RSS-102 Issue 2 [Reference 8] for evaluating compliance with requirements of Health Canada Safety Code 6[Reference 9].

The handset under test was set to TBR6 mode and established a connection with FP emulator. The specific FP emulator can setup a TBR6 connection with handset on different combination of carrier and time-slot in loopback of handset with PSRBS data type.

Another important factor is the Crest Factor when applying SAR testing to DECT. It is usually declared by customer or we would use a spectrum to scan the duty cycle in time domain when transmitting in case laking such information. It was 1:24 for this sample.

# 1 General Information

# 1.1 Description of Equipment Under Test

EUT Type	US DECT Portable Unit			
Model Name	KT-611D6	KT-611D6		
Hardware version	N/A			
Software version	N/A			
Tx Frequency	1921.536 ~ 1928.448 MHz			
Rx Frequency	1921.536 ~ 1928.448 MHz			
Antenna Type	Internal Type			
Max. conducted output power	18.04 dBm (measured in CH04)			
Device Category	Portable Part			
RF Exposure Environment	General Population / Uncontrolled			
Power supply	Internal battery (Ni-MH AAA 600mAh 2.4V)			
Crest Factor	24			
Body-Worn Operation	Yes	⊠No		

# 1.2 Photograph of EUT



Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

### 1.3 Environment Conditions

Item	Target	Measured
Ambient Temperature (°C)	15 ~ 30	22 ± 1
Temperature of Simulant (°C)	20 ~ 24	22 ± 1
Relative Humidity(% RH)	30 ~ 70	60 ~ 70

# 1.4 FCC Requirements for SAR Compliance Testing

According to the FCC order "Guidelines for Evaluating the Environmental Effects of RF Radiation", for consumer products, the SAR limit is **1.6W/kg** for an uncontrolled environment and **8.0W/kg** for an occupational/controlled environment. Pursuant to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on June 29, 2001 by FCC, the equipment under test should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for intended or normal operation, incorporating normal antenna operating positions, equipment undet test peak performance frequencies and positions for maximum RF power coupling.

### 1.4.1 RF Exposure Limits

	Whole-Body	Partial-Body	Arms and Legs
Population/Uncontrolled Environments (W/kg)	0.08	1.6	4.0
Occupational/Controlled Environments (W/kg)	0.4	8.0	20.0

### **Notes:**

- 1. Population/Uncontrolled Environments: Locations where there is the exposure of individuals who have no sense or control of their exposure.
- 2. Occupational/Controlled Environments: Locations where there is exposure that may be incurred by people who have knowledge of the potential for exposure.
- 3. Whole-Body: SAR is averaged over the entire body.
- 4. Partial-Body: SAR is averaged over any 1g of tissue volume as defined in specification.
- 5. Arms and Legs: SAR is averaged over 10g of tissue volume as defined in specification.

### 1.5 The SAR Measurement Procudure for Mobile

### 1.5.1 General Requirements

The test should be performance in a laboratory without influence on SAR measurements by ambient RF sources and any reflection from the environment inside. The ambient temperature should be kept in the range of  $15^{\circ}$ C to  $30^{\circ}$ C with a maximum variation within  $\pm 2^{\circ}$ C during the test.

### 1.5.2 Phantom Requirements

The phantoms used in test are simplified representations of the human head and body as a specific shaped container for the head or body simulating liquids. The physical characteristics of the phantom models should resemble the head and the body of a mobile user sice the shape is a dominant parameter for exposure. The shell of the phantom should be made of low loss and low permittivity material and the thickness tolerance should be less than 0.2 mm. In addition, the phantoms should provide simulations of both right and left hand operations.

### 1.5.3 Test Positions

Due to a fact of that it cannot be expected that all mobile user will hold the moble exactly in one well-defined position, different operational conditions should be conducted. IEEE 1528-2003 [Reference 7] requires two test positions: the cheek and tilted positions. In each test position the acoustic output should be placed directly at the entrance of the auditory canal in phantom.

The acoustic output is defined in Fig. 1. There are two imaginary lines defined on the handset: the vertical center line and the horizontal line and the cross of these two lines is the acoustic output. The human head position is given by means of a reference plane defined by the following three reference points: RE (Right-Ear), LE (Left-Ear) and M (Mouth) and shown in Fig. 2 and 3.

The Cheek Position: the vertical center line should lie in the reference plane and the acoustic output meets the reference points RE or LE. The vertical center line should align to the line connecting the point M to points RE or LE and the angle between these two lines should be reduced to minimum by touching the cheek of the phantom with handset.

The Tilted Position: same as Cheek Potion but only change the angle by 15° between vertical center line and the line connecting the point M to points RE or LE.

Report No.: 08-03-MAS-080-04 FCC ID: V42611D6

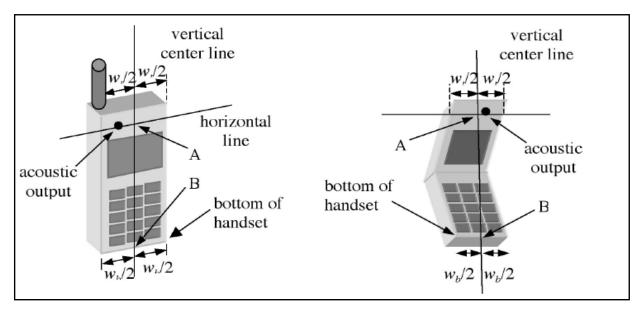


Fig.1 Test reference points on handset

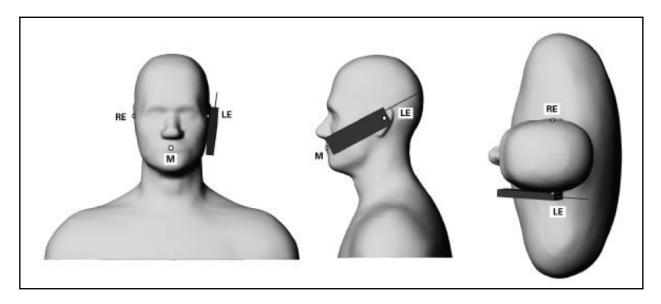


Fig. 2 Cheek Position


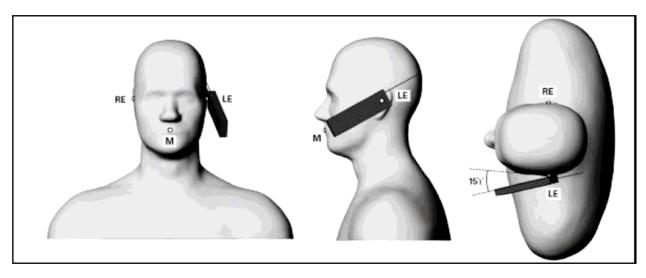


Fig. 3 Tilted Position

### 1.5.4 Test Procedures

The SAR test should be performed with both Cheek Position and Tilted Position mentioned above. The detailed procedure is referenced to the following flow chart to apply SAR test on US DECT Handset for HEAD.

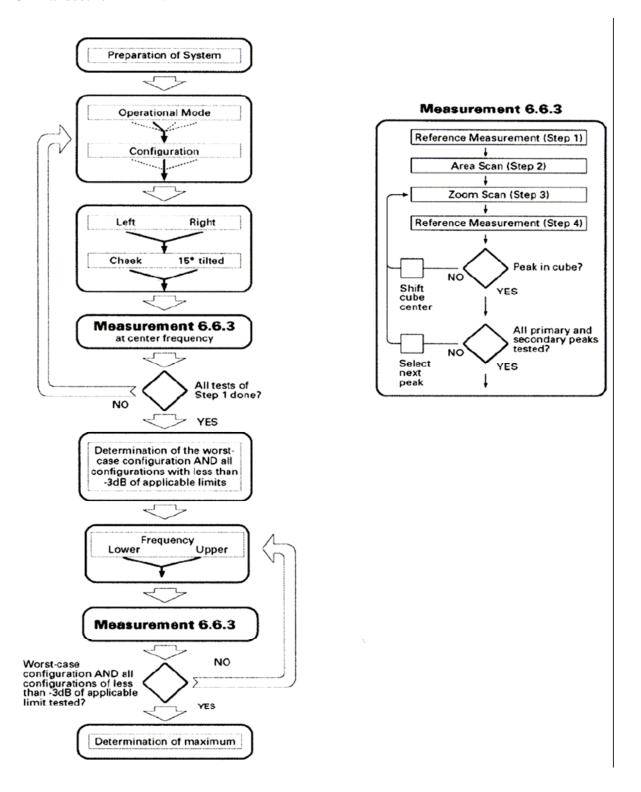

# 2 Description of the Test Equipment

The measurements were performed using an automated near-field scanning system, DASY4 software, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the test device was the 'worstcase extrapolation' algorithm.

# 2.1 Test Equipment List

Equipment	Manufacturer	Туре	S/N	Calibration Expiry
Robot	Staubli	RX90B L	F03/5W16A1/A/01	(not necessary)
Robot Controller	Staubli	CS7MB	F03/5W16A1/C/01	(not necessary)
Teach Pendant	Staubli		D221340061	(not necessary)
DAE4	Schmid & Partner Engineering AG		629	2008-09-25
E-field Probe	Schmid & Partner Engineering AG	EX3DV4	3555	2008-09-25
Dipole Validation Kit	Schmid & Partner Engineering AG	D1900V2	5d054	2008-10-16
DIGITAL RADIO TESTER	Rohde & Schwarz	CTS 60	1094.0006.60 Sr.100584	2008-03-04
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	101006	2009-01-06
Digital Thermometer	DER EE	K-TYPE	DE-3003	2009-01-14
Directional Coupler	Amplifier Research	DC7420	310569	2008-08-08
DASY4 Software	Schmid & Partner Engineering AG		Version 4.6B23	To automatically control the robot and perform the SAR measurement
SEMCAD Software	Schmid & Partner Engineering AG		Version 1.8B160	Post-processing and report management
Signal Generator	Agilent	83640B	3844A01143	2008-09-20
Amplifier	Mini-Circuits	ZHL-42W	D111704-01-02	2009-01-29
Power Meter	BOONTON	4532-0102	136601	2008-05-08
Power Sensor	BOONTON	51011- EMC	32861	2008-05-08
Power Sensor	BOONTON	56518	3233	2008-05-08
S-Parameter Network Analyzer	Agilent	8753ES	MY40001340	2008-12-02
Calibration Kit	Agilent	85033C	2920A03287	(not necessary)
Dielectric Probe Kit	Agilent	85070E	MY44300101	(not necessary)

# 2.2 DASY4 Measurement System Diagram:

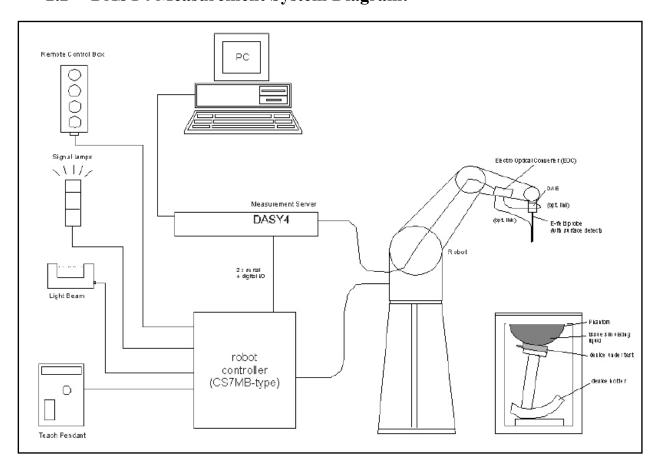


Fig. 5 The DASY4 Measurement System



Fig. 6 The DASY4 System used in ETC set-up with two phantoms

The DASY4 system consists of the following items:

- A fixed-on-ground high precision 6-axis robot with controller and software and an arm extension for moving the Data Acquisition Electronics (DAE) and Probe.
- A dosimetric probe, an isotropic E-field probe optimized and calibrated for usage in head or body tissue simulating liquids. Some of the probes are equipped with an optical surface detector system.
- A Data Acquisition Electronic (DAE) performing the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. DAE is powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to Electro-Optical Coupler (EOC).
- The EOC performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server performing all real-time data evaluation for field measurements and surface detection, controlling robot movements and handling safety operation. A computer with operating Windows 2000 is used for server.
- DASY4 software and SEMCAD data evaluation software are installed in PC.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed well according to the given recipes.
- System validation dipoles is used to validate the proper functioning of the system

### 2.3 DASY4 Measurement Server



Fig. 7 DASY4 Measurement Server

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server.

## 2.4 DAE (Data Acquisition Electronics)



Fig. 8 DAE used in ETC

Some probes are equipped with an optical multifiber line, ending at the front of the probe tip. This line is connected to the EOC box on the robot arm and provides automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. If the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases during the approach, reaches a maximum and then decreases. If the probe perpendicularly touches the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2<sup>nd</sup> order fitting. The approach is stopped upon reaching the maximum.

The optical surface detection works in transparent liquids and on di\_use reflecting surfaces with a repeatability of better than  $\pm 0.1$ mm. The distance of the maximum depends on the fiber and the surrounding media. It is typically 1.0mm to 2.0mm in tissue simulating mixtures. The distance can be measured with the surface check job (described in the reference guide).

### 2.5 Phantom

The phantom used for all tests i.e. for both system performance checking and device testing, was the twinheaded "SAM Twin Phantom V4.0", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

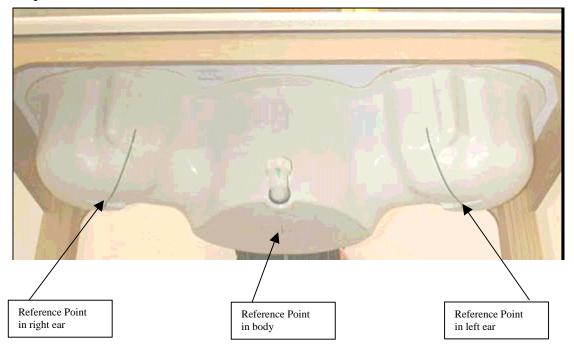


Fig. 9 SAM Twin Phantom and the definition points

### 2.6 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integrated part of the Dasy system.



Fig. 10 Device holder supplied by SPEAG

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

### 2.7 Specifications of Probes

The E-Field Probes ET3DV6 or EX3DV4, manufactured and calibrated annually by Schmid & Partner Engineering AG with following specification are used for the dosimetric measurements.

### ET3DV6:

- Dynamic range:  $5 \mu \text{ W/g} \sim 100 \text{ mW/g}$
- Tip diameter: 6.8 mm
- Probe linearity:  $\pm 0.2 \text{ dB}$  (30MHz to 3 GHz)
- Axial isotropy:  $\pm 0.2 \text{ dB}$
- Spherical isotropy:  $\pm 0.4 \text{ dB}$
- Distance from probe tip to dipole centers: 2.7 mm
- Calibration range: 900MHz/1750MHz/1900MHz//2450MHz for head and body simulating liquids.

#### EX3DV4:

- Dynamic range:  $10 \mu \text{ W/g} \sim 100 \text{ mW/g}$
- Tip diameter: 2.5 mm
- Probe linearity:  $\pm 0.2 \text{ dB}$  (30MHz to 3 GHz)
- Axial isotropy:  $\pm 0.2 \text{ dB}$
- Spherical isotropy:  $\pm 0.4 \text{ dB}$
- Distance from probe tip to dipole centers: 1.0 mm
- Calibration range: 900MHz/1810MHz for head simulating liquid and

### 2.8 SAR Measurement Procedures in DASY4

### Step 1 Setup a Call Connection

Establish a call in handset at the maximum power level with a base station simulator via air interface.

### **Step 2 Power Reference Measurement**

To measure the local E-field value at a fixed location which value will be taken as a reference value for calculating a possible power drift.

### Step 3 Area Scan

To measure the SAR distribution with a grid with spacing of 15 mm x 15 mm and kept with a constant distance to the inner surface of the phantom. Additional all peaks within 3 dB of the maximum SAR are searched.

### Step 4 Zoom Scan

At these points (maximum number of SAR peaks is two), a cube of 32 mm x 32 mm x 30 mm is applied to and measured with 5 x 5 x 7 points. With these measured data, a peak spatial-average SAR value can be calculated by SEMCAD software.

### **Step 5 Power Drift Measurement**

Repetition of the E-field measurement at the fixed location mentioned in Step 1 to make sure the two results differ by less than  $\pm$  0.2 dB.

Page 17 of 60

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

# 2.9 Simulating Liquids

Liquid Recipes for this test report are as following:

#### 1900MHz band

Ingredient	% by weight
Water	55.85
Diethylene Glycol Butyl Ether(DGBE)	44.00
Salt	0.15

### 2.10 System Performance Check

### **2.10.1 Purpose**

- 1. To verify the simulating liquids are valid for testing.
- 2. To verify the performance of testing system is valid for testing.


### 2.10.2 System Performance Check Procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and the system performance check. They are read-only document files and destined as fully defined but unmeasured masks, so the finished system performance check must be saved under a different name. The system performance check document requires the SAM Twin Phantom, so this phantom must be properly installed in your system. (User defined measurement procedures can be created by opening a new document or editing an existing document file). Before you start the system performance check, you need only to tell the system with which components (probe, medium, and device) you are performing the system performance check; the system will take care of all parameters.

- The Power Reference Measurement and Power Drift Measurement jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above  $\pm 0.1$  dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below  $\pm 0.02$  dB.
- The Surface Check job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1 \text{mm}$ ). In that case it is better to abort the system performance check and stir the liquid.
- The Area Scan job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. Schmid & Partner Engineering AG, DASY4 Manual, February 2005 16-2 System Performance Check Application Notes If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
- The Zoom Scan job measures the field in a volume around the peak SAR value assessed in the previous Area Scan job (for more information see the application note on SAR

evaluation). If the system performance check gives reasonable results, the SAR peak, 1 g and 10 g spatial average SAR values normalized to 1W dipole input power give reference data for comparisons. The next sections analyze the expected uncertainties of these values, as well as additional checks for further information or troubleshooting.

### 2.10.3 System Performance Check Setup

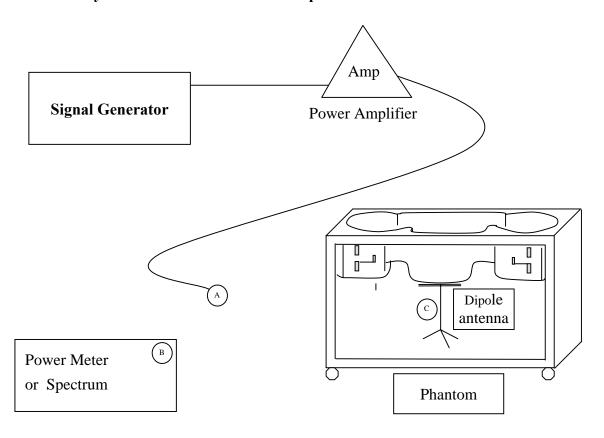

### Note:

- 1. A connected to B is used to make sure whether the input power is 250mW for target frequency...
- 2. A connected to C is used to input the measured power to dipole antenna

# 2.10.4 Result of System Performance Check: Valid Result

Diepole Antenna: D1900V2 (S/N: 5d054)

Date of Measurement	SAR@1g	Dielectric I	Temperature	
And Reference Value	[W/kg]	<b>E</b> r	<b>σ</b> [S/m]	[°C]
Head 1900MHz Recommended Value	9.56 ±10% [8.604 ~ 10.516]	$40 \pm 5\%$ [38 ~ 42]	$1.4 \pm 5\%$ [1.33 ~ 1.47]	$22.0 \pm 2$ [20 ~ 24]
2008-04-30	10.2	38.7	1.41	21.8

Report No.: 08-03-MAS-080-04 Page 19 of 60

### FCC ID: V42611D6

**Results** 

3

# 3.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	
The deviations as specified in this chapter were ascertained in the course of the tests Performed.	

# 3.2 Head

Frequency		Mode	Conducted Power (dBm)		SAR@1g [W/kg]	Power Drift (dB)	Note	
CH	MHz		Before	After	Drift	[W/Kg]	Difft (db)	
2	1924.992	LC-Mid	17.9	17.8	-0.1	0.0097	0.134	
2	1924.992	LT-Mid	18.0	17.9	-0.1	0.0128	0.125	Worst
2	1924.992	RC-Mid	18.0	17.9	-0.1	0.0062	0.165	
2	1924.992	RT-Mid	17.9	17.7	-0.2	0.0086	0.027	


0	1928.448	LT-High	17.9	17.7	-0.2	0.0120	0.117	
4	1921.536	LT-Low	18.0	17.9	-0.1	0.0117	0.025	

The Max Head SAR@1900MHz@1g was 0.0128 W/kg, less than limitation of 1.6 W/kg.

Report No.: 08-03-MAS-080-04 FCC ID: V42611D6


#### 3.3 Measurement Position (Including LC, LT, RC, RT)

#### Left-Cheek (LC) 3.3.1

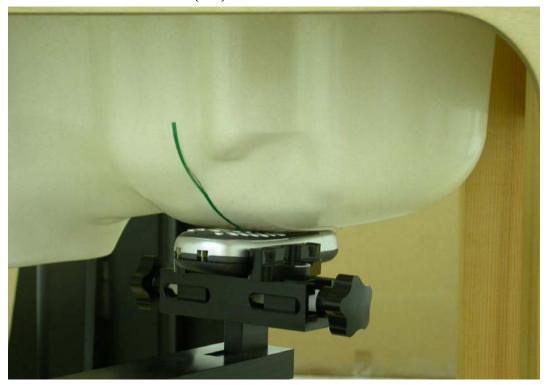

Measurement Position of Left-Cheek (LC) with Handset

# **3.3.2** Left-Tilt (LT)

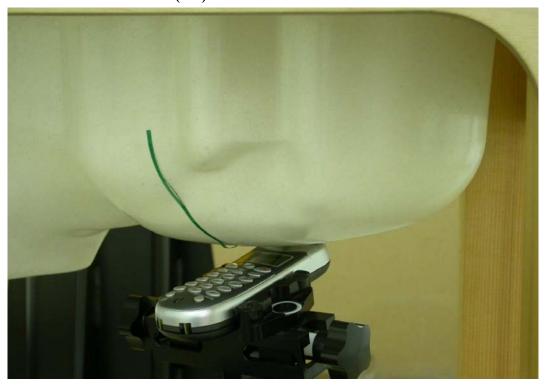

Measurement Position of Left-Tilt (LT) with Handset

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

# 3.3.3 Right-Cheek (RC)



Measurement Position of Right-Cheek (RC) with Handset

# 3.3.4 Right-Tilt (RT)



Measurement Position of Right-Tilt (RT) with Handset

# 4 The Description of Test Procedure for FCC

### 4.1 Scan Procedure

First coarse scans were used for determination of the field distribution. Next a cube scan, 5x5x7 points covering a volume of 32x32x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

# 4.2 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation. The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Lagre Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics. In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

# 4.3 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m] or [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

### 4.4 Data Evaluation

The DASY4 postprocessing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$		
	- Conversion factor	$ConvF_i$		
	- Diode compression point	$dcp_i$		
Device parameters:	- Frequency	f		
	- Crest factor	cf		
Media parameters:	- Conductivity	$\sigma$		
	- Density	$\rho$		

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	$V_i$	= compensated signal of channel i	(i = x, y, z)
	$U_i$	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	$dcp_i$	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E – field  
probes : 
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$
 H – field  
probes : 
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

```
with V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)

\mu V/(V/m)^2 for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m
```

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

 $\begin{array}{ll} \text{with} & SAR & = \text{local specific absorption rate in mW/g} \\ & E_{tot} & = \text{total field strength in V/m} \\ & \sigma & = \text{conductivity in [mho/m] or [Siemens/m]} \\ & \rho & = \text{equivalent tissue density in g/cm}^3 \end{array}$ 

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

# 4.5 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

· maximum search

extrapolation

• boundary correction

• peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

### Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor o\_set. Several measurements at di\_erent distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

### **Boundary effect**

For measurements in the immediate vicinity of a phantom surface, the field coupling e\_ects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosimetric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_o + S_b exp(-\frac{z}{a})cos(\pi \frac{z}{\lambda})$$

Since the decay of the boundary e\_ect dominates for small probes (a <<\_), the cos-term can be omitted. Factors Sb (parameter Alpha in the DASY4 software) and a (parameter Delta in the DASY4 software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- the boundary curvature is small
- the probe axis is angled less than 30\_ to the boundary normal
- the distance between probe and boundary is larger than 25% of the probe diameter
- the probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY4 system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the measurement data extraction during postprocessing.

Report No.: 08-03-MAS-080-04 Page 26 of 60 FCC ID: V42611D6

# 5 Measurement Uncertainty

# 5.1 Measurement Uncertainty I (According to IEEE 1528)

DASY4 Uncertainty Budget According to IEEE 1528 [2]								
	Uncertainty	Prob.	Div.	$(c_i)$	$(c_i)$	Std. Unc.	Std. Unc.	$(v_i)$
Error Description	value	Dist.		1g	10g	(1g)	(10g)	$v_{eff}$
Measurement System								
Probe Calibration	±5.9 %	N	1	1	1	±5.9 %	±5.9%	$\infty$
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9%	$\infty$
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	$\infty$
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6%	$\infty$
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7%	$\infty$
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	$\infty$
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3%	$\infty$
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5%	$\infty$
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5%	$\infty$
RF Ambient Conditions	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7%	$\infty$
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2%	$\infty$
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7%	$\infty$
Max. SAR Eval.	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6%	$\infty$
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	$\infty$
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	$\infty$
Liquid Conductivity (target)	±5.0 %	R	$\sqrt{3}$	0.64	0.43	±1.8 %	±1.2%	$\infty$
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1%	$\infty$
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.49	±1.7 %	±1.4 %	$\infty$
Liquid Permittivity (meas.) ±2.5 %		N	1	0.6	0.49	$\pm 1.5 \%$	±1.2%	$\infty$
Combined Std. Uncertainty					±10.8 %	±10.6 %	330	
Expanded STD Uncertain					$\pm 21.6\%$	$\pm 21.1 \%$		

Report No.: 08-03-MAS-080-04 Page 27 of 60 FCC ID: V42611D6

# 5.2 Measurement Uncertainty II (According to IEC 62209)

DASY4 Uncertainty Budget According to IEC 62209 [3]								
	Uncertainty	Prob.	Div.	$(c_i)$	$(c_i)$	Std. Unc.	Std. Unc.	$(v_i)$
Error Description	value	Dist.		1g	10g	(1g)	(10g)	$v_{eff}$
Measurement System								
Probe Calibration	$\pm 5.9 \%$	N	1	1	1	$\pm 5.9 \%$	±5.9 %	$\infty$
Axial Isotropy	$\pm 4.7\%$	R	$\sqrt{3}$	0.7	0.7	$\pm 1.9 \%$	$\pm 1.9 \%$	$\infty$
Spherical Isotropy	$\pm 9.6 \%$	R	$\sqrt{3}$	0.7	0.7	$\pm 3.9 \%$	±3.9 %	$\infty$
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	$\infty$
Linearity	±4.7%	R	$\sqrt{3}$	1	1	$\pm 2.7 \%$	$\pm 2.7 \%$	$\infty$
Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	$\infty$
Readout Electronics	$\pm 0.3 \%$	N	1	1	1	±0.3 %	±0.3 %	$\infty$
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	$\pm 0.5 \%$	$\infty$
Integration Time	$\pm 2.6 \%$	R	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	$\infty$
Perturbation of the Environment	±3.0 %	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	$\infty$
Probe Positioner Mech. Restr.	$\pm 0.4 \%$	R	$\sqrt{3}$	1	1	$\pm 0.2 \%$	±0.2 %	$\infty$
Probe Positioning	$\pm 2.9 \%$	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	$\infty$
Post-Processing	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	$\infty$
Test Sample Related								
Test Sample Positioning	$\pm 2.9 \%$	N	1	1	1	$\pm 2.9 \%$	$\pm 2.9,\%$	145
Device Holder Uncertainty	±3.6 %	N	1	1	1	$\pm 3.6 \%$	±3.6 %	5
Drift of Output Power	±5.0 %	R	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9 \%$	$\infty$
Phantom and Setup								
Phantom Uncertainty	$\pm 4.0 \%$	R	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	$\infty$
Liquid Conductivity (target)	±5.0 %	R	$\sqrt{3}$	0.7	0.5	±2.0 %	$\pm 1.4 \%$	$\infty$
Liquid Conductivity (meas.)	$\pm 4.3\%$	R	$\sqrt{3}$	0.7	0.5	±1.7,%	$\pm 1.2 \%$	$\infty$
Liquid Permittivity (target)	±5.0 %	R	$\sqrt{3}$	0.6	0.5	±1.7 %	$\pm 1.4 \%$	$\infty$
Liquid Permittivity (meas.)	$\pm 4.3\%$	R	$\sqrt{3}$	0.6	0.5	$\pm 1.5 \%$	$\pm 1.2 \%$	$\infty$
Combined Std. Uncertainty					±10.5 %	$\pm 10.2 \%$	330	
Expanded Uncertainty						$\pm 21.0\%$	$\pm 20.5\%$	

Report No.: 08-03-MAS-080-04

FCC ID: V42611D6

### 6 References

### 1. [IEEE Std C95.1-2005]

Safety Levels with Respect to Human Exposure to Radio Frrequency Electromagnetic Fields, 3 kHz to 300 GHz. The Institute of Electrical and Electronics Engineers, Inc. (IEEE), 2005.

### 2. [IEEE Std C95.3-1992]

Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave". The Institute of Electrical and Electronics Engineers, Inc. (IEEE), 1992.

### 3. [FCC Report and Order 96-326]

Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, 1996.

### 4. [FCC OET Bulletin 65]

Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. OET Bulletin 65 Edition 97-01, August 1997. Federal Communications Commission (FCC), Office of Engineering & Technology. (OET)

### 5. [FCC OET Bulletin 65 Supplement C]

Additional Information for Evaluating Compliance of Mobile and Portable Device with FCC Limits for Human Exposure to Radiofrequency Emissions. Supplement C (Edition 01-01) to OET Bulletin 65, June 2001. Federal Communications Commission (FCC), Office of Engineering & Technology. (OET)

### 6. [DASY 4]

Schmid & Partner Engineering AG: DASY 4 Manual, September 2005.

### 7. **[IEEE 1528-2003]**

IEEE Std 1528-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wirless Communications Devices: Measurement Techniques. 1528-2003, 19<sup>th</sup> December, 2003, The Institute of Electrical and Electronics Engineers, Inc. (IEEE).

### 8. [RSS-102, Issue 2]

Radio Standards Specification 102, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) sets out the requirements and measurement techniques used to evaluate radio frequency (RF) exposure compliance of radiocommunication apparatus designed to be used within the vicinity of the human body. November, 2005. Industry Canada.

### 9. [Health Canada Safety Code 6]

Canada's Safety Code 6: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz (99-EHD-237)

# 7 Annex: Test Results of DASY4 (Refer to ANNEX)

# ANNEX Index of Annex

ANNEX A: EXTERNAL CONSTRUCTION PHOTOS OF EUT	. 30
ANNEX B: SAR RESULTS	31
ANNEX C: DIPOLE CERTIFICATE	43
ANNEX D. PRORE CERTIFICATE	52.

# ANNEX A: EXTERNAL CONSTRUCTION PHOTOS OF EUT



# **ANNEX B: SAR RESULTS**

# System Performance Check

# Head



Date/Time: 4/30/2008 9:13:23 AM

Test Laboratory: Electronics Testing Center, Taiwan

### DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:xxx

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.41 \text{ mho/m}$ ;  $\varepsilon_r = 38.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Flat Section

#### DASY4 Configuration:

- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

# SPC/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 12.3 mW/g


#### SPC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.2 V/m; Power Drift = 0.012 dB


Peak SAR (extrapolated) = 19.4 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.19 mW/gMaximum value of SAR (measured) = 11.4 mW/g

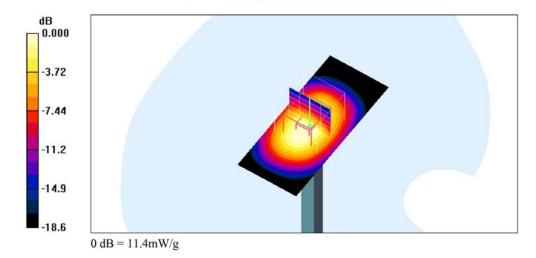

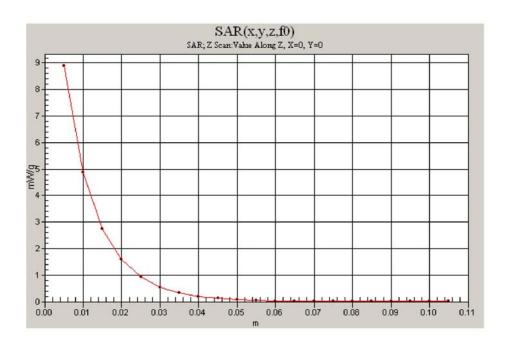

# Left Head

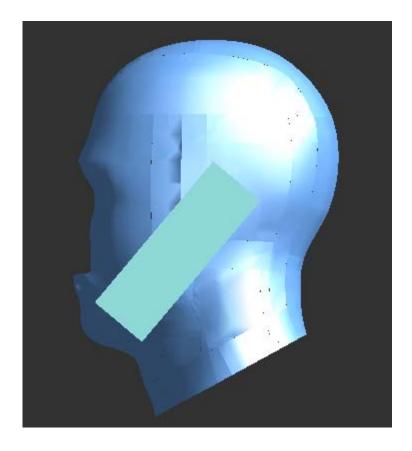

### Left Cheek

Date/Time: 4/30/2008 4:01:12 PM

Test Laboratory: Electronics Testing Center, Taiwan

### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1925 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Left Section

#### DASY4 Configuration:

- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

**LC-MID/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.24 V/m; Power Drift = 0.134 dB


Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.0097 mW/g; SAR(10 g) = 0.00587 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.010 mW/g

# **LC-MID/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.012 mW/g

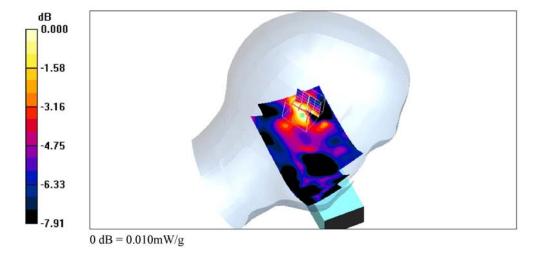

### **Left Tilted**

Date/Time: 4/30/2008 4:11:41 PM

Test Laboratory: Electronics Testing Center, Taiwan

### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1925 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Left Section


#### DASY4 Configuration:


- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

# LT-MID/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.014 mW/g


LT-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.41 V/m; Power Drift = 0.125 dB
Peak SAR (extrapolated) = 0.028 W/kg

SAR(1 g) = 0.0128 mW/g; SAR(10 g) = 0.00699 mW/gMaximum value of SAR (measured) = 0.014 mW/g

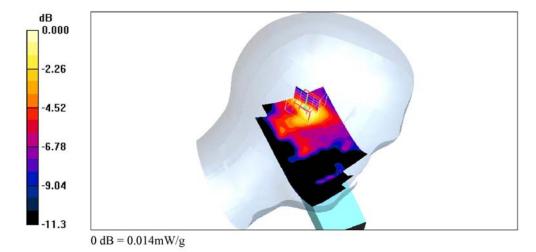

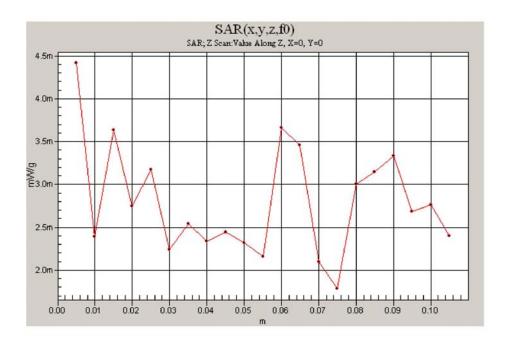

Right Head

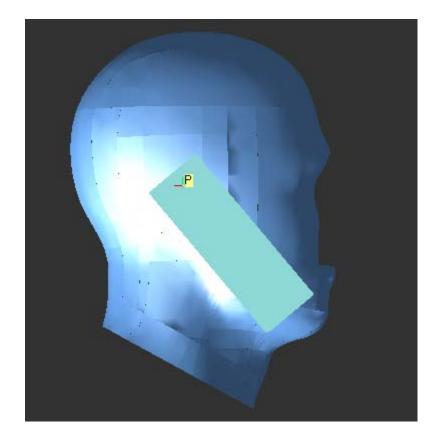

### **Right Cheek**

Date/Time: 4/30/2008 4:39:32 PM

Test Laboratory: Electronics Testing Center, Taiwan

#### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1925 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Right Section

#### DASY4 Configuration:

- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RC-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.86 V/m; Power Drift = 0.165 dB Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.0062 mW/g; SAR(10 g) = 0.00388 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.007 mW/g

# RC-MID/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.007 mW/g

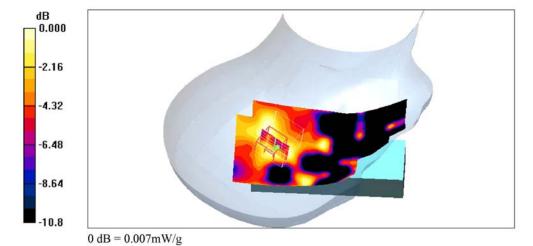

# **Right Tilted**

Date/Time: 4/30/2008 4:48:05 PM

Test Laboratory: Electronics Testing Center, Taiwan

#### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1925 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Right Section

#### DASY4 Configuration:

- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160


RT-MID/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.011 mW/g

RT-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.81 V/m; Power Drift = 0.027 dB Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.0086 mW/g; SAR(10 g) = 0.0039 mW/g

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.011 mW/g

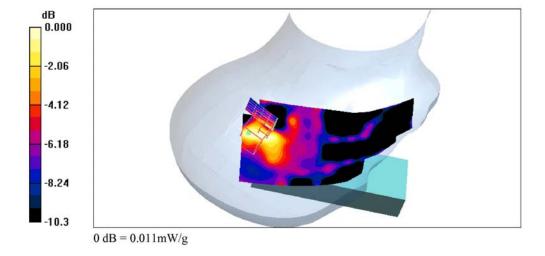

### **Left Tilted**

Date/Time: 4/30/2008 5:06:34 PM

Test Laboratory: Electronics Testing Center, Taiwan

### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1928.5 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1928.5 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Left Section

#### DASY4 Configuration:


- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347

Maximum value of SAR (measured) = 0.013 mW/g

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

# **LT-HIGH/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.013 mW/g

# LT-HIGH/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.51 V/m; Power Drift = 0.117 dB Peak SAR (extrapolated) = 0.024 W/kg SAR(1 g) = 0.0120 mW/g; SAR(10 g) = 0.00636 mW/g

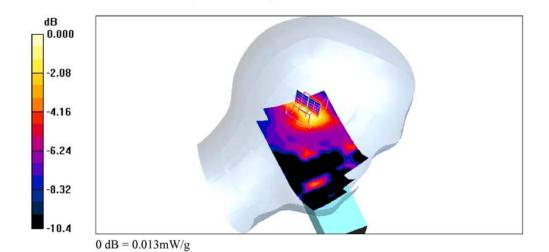

### **Left Tilted**

Date/Time: 4/30/2008 5:32:09 PM

Test Laboratory: Electronics Testing Center, Taiwan

### DUT: DECT Phone; Type: PP; Serial: 611D6

Communication System: US DECT-1900; Frequency: 1921.5 MHz; Duty Cycle: 1:24 Medium parameters used: f = 1921.5 MHz;  $\sigma = 1.44$  mho/m;  $\varepsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Air temperature: 23 degC; Liquid temperature: 21.8 degC;

Phantom section: Left Section

#### DASY4 Configuration:

- Probe: EX3DV4 SN3555; ConvF(6.61, 6.61, 6.61); Calibrated: 9/26/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

### LT-LOW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.57 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.0117 mW/g; SAR(10 g) = 0.00644 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

### LT-LOW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.015 mW/g

