

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.249

**Equipment** : Presenter  
**Model No.** : RFP 1000-XXX、GP-IVXX-XXX (X=0-9,A-Z)  
**Filing Type** : New Application  
**Applicant** : Shine Power Electronics Co., Ltd.  
: 1F, No.1, Alley 3, Lane 51, Gung Hua Street, Nei Hu District,  
114, Taipei, Taiwan  
**FCC ID** : V44-SPEC28041592  
**Manufacturer** : Shine Power Electronics Co., Ltd.  
: 1F, No.1, Alley 3, Lane 51, Gung Hua Street, Nei Hu District,  
114, Taipei, Taiwan  
**Received Date** : Feb. 15, 2008  
**Final Test Date** : Feb. 21, 2008

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International Inc.***

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1. Product Details .....	3
2.2. Table for Filed Antenna .....	3
2.3. Table for Carrier Frequencies .....	3
2.4. Table for Test Modes .....	4
2.5. Table for Testing Locations .....	4
2.6. Table for Supporting Units.....	4
2.7. Test Configurations .....	5
<b>3. TEST RESULT .....</b>	<b>6</b>
3.1. AC Power Line Conducted Emissions Measurement.....	6
3.2. Field Strength of Fundamental Emissions Measurement.....	9
3.3. 20dB Spectrum Bandwidth Measurement.....	12
3.4. Radiated Emissions Measurement.....	15
3.5. Band Edge Emissions Measurement .....	27
3.6. Antenna Requirements.....	30
<b>4. LIST OF MEASURING EQUIPMENTS.....</b>	<b>31</b>
<b>5. TEST LOCATION.....</b>	<b>32</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>33</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A4</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT .....</b>	<b>B1 ~ B9</b>

## History of This Test Report

Original Issue Date: Mar. 17, 2008

Report No.: FR820108

No additional attachment.

Additional attachment were issued as following record:

**CERTIFICATE OF COMPLIANCE**

according to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : Presenter

Model No. : RFP 1000-XXX、GP-IVXX-XXX (X=0-9,A-Z)

Applicant : Shine Power Electronics Co., Ltd.  
1F, No.1, Alley 3, Lane 51, Gung Hua Street, Nei Hu District,  
114, Taipei, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 15, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	-	-
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	24.46 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	2.74 dB
3.5	15.249(d)	Band Edge Emissions	Complies	9.20 dB
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1. Product Details

Items	Description
Power Type	N Type Battery
Modulation	GFSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	16
Channel Band Width (99%)	1.200 MHz
Max. Field Strength	66.97 dBuV/m at 3m (Average)

The EUT has two Laser modules, only Laser light is different. For others as RF module and control board are the same. The difference list:

Model	Difference	Verify Test
RFP 1000-XXX	Laser light is red.	Yes
	Laser light is green.	Yes (worst case in the report)
GP-IVXX-XXX	Same as Model No. RFP 1000-XXX, only difference for marketing need.	No

### 2.2. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	Dipole Antenna	Fixed (On Board)	-1.91

### 2.3. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	1	2405 MHz
	2	2410MHz
	:	:
	7	2435MHz
	8	2440 MHz
	9	2445MHz
	:	:
	15	2475 MHz
	16	2480 MHz

**2.4. Table for Test Modes**

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

<b>Test Items</b>	<b>Mode</b>	<b>Channel</b>	<b>Antenna</b>
AC Power Line Conducted Emissions	-	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1/8/16	1
Radiated Emissions 9kHz~1GHz	CTX	8	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	1/8/16	1
Band Edge Emissions	CTX	1/16	1

Note: CTX=continuously transmitting

**2.5. Table for Testing Locations**

<b>Test Site No.</b>	<b>Site Category</b>	<b>Location</b>	<b>FCC Reg. No.</b>	<b>IC File No.</b>	<b>VCCI Reg. No</b>
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.


**2.6. Table for Supporting Units**

<b>Support Unit</b>	<b>Brand</b>	<b>Model</b>	<b>FCC ID</b>
DC power supply	G.W.	GPC-6030D	DoC


## 2.7. Test Configurations

### 2.7.1. Radiation Emissions Test Configuration

#### For radiated emissions below 30MHz

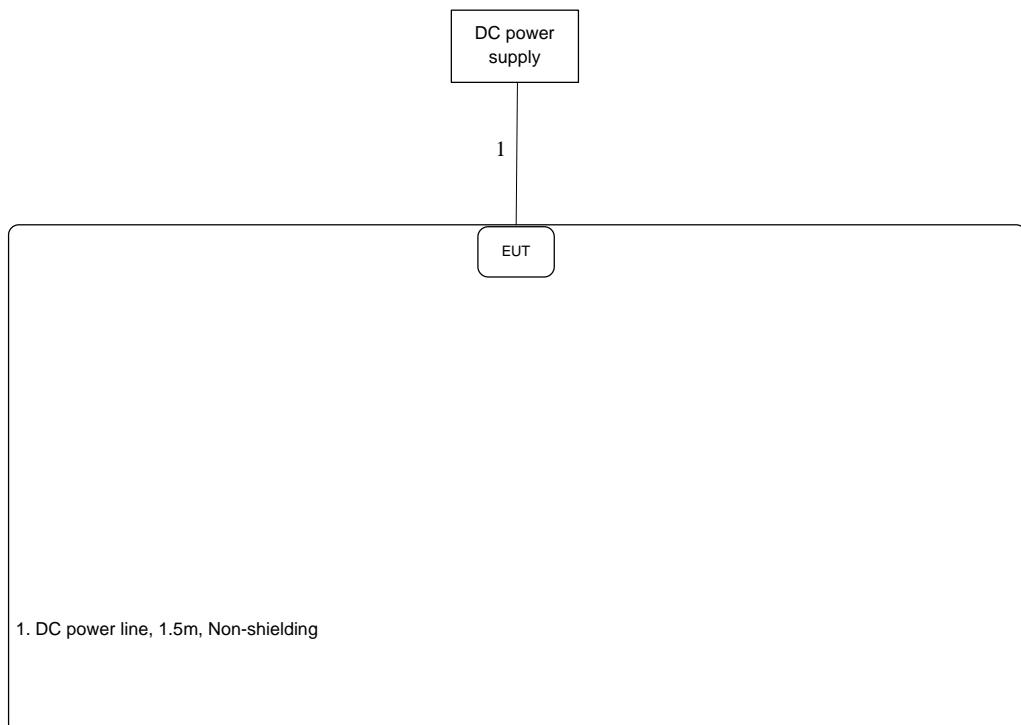

#### For radiated emissions above 30MHz

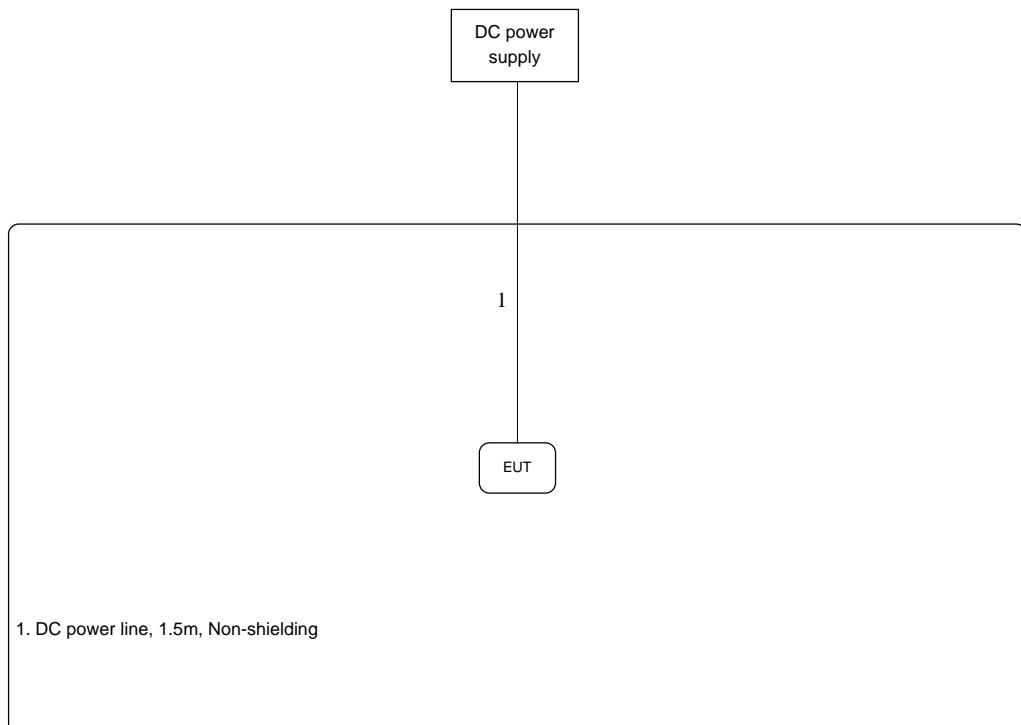

### **3. TEST RESULT**

#### **3.1. AC Power Line Conducted Emissions Measurement**

##### **3.1.1. Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

<b>Frequency (MHz)</b>	<b>QP Limit (dBuV)</b>	<b>AV Limit (dBuV)</b>
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### **3.1.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

<b>Receiver Parameters</b>	<b>Setting</b>
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### **3.1.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

## 3.1.4. Test Setup Layout

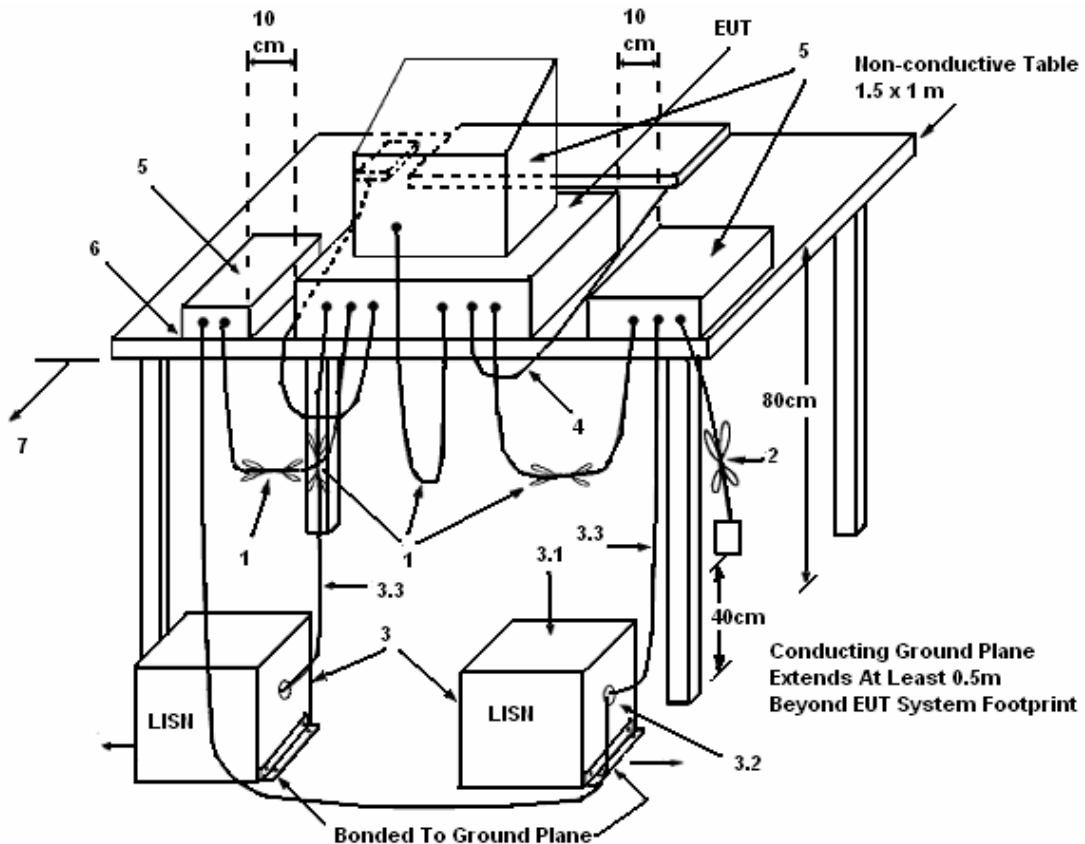

## LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

**3.1.5. Test Deviation**

There is no deviation with the original standard.

**3.1.6. EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.

**3.1.7. Results of AC Power Line Conducted Emissions Measurement**

The transmitter is battery powered; there is no need to do this testing.

### **3.2. Field Strength of Fundamental Emissions Measurement**

#### **3.2.1. Limit**

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

<b>Frequency Band (MHz)</b>	<b>Fundamental Emissions Limit (dBuV/m) at 3m</b>
2400-2483.5	94
5725-5875	94

#### **3.2.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### **3.2.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

### 3.2.4. Test Setup Layout

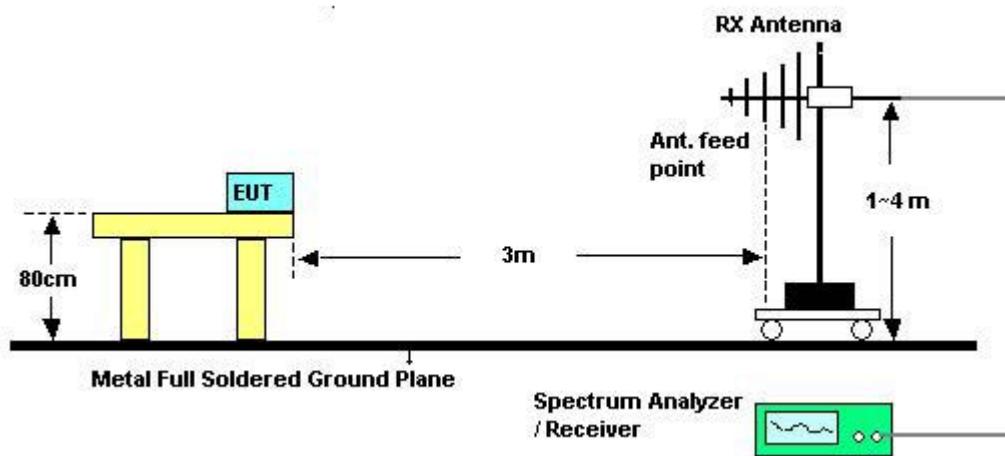

### 3.2.5. Test Deviation

There is no deviation with the original standard.

### 3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.2.7. Test Result of Field Strength of Fundamental Emissions

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 1, 8, 16

## Channel 1

Freq	Level	Over Limit		Read		Antenna Level Factor	Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m		dB	dB	
3	<b>2404.810</b>	89.54	-24.46	114.00	58.98	28.33	2.23	0.00	Peak
3	<b>2404.620</b>	66.97	-27.03	94.00	36.41	28.33	2.23	0.00	Average

## Channel 8

Freq	Level	Over Limit		Read		Antenna Level Factor	Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m		dB	dB	
1	<b>2440.340</b>	87.36	-26.64	114.00	56.71	28.40	2.25	0.00	Peak
1	<b>2440.340</b>	66.35	-27.65	94.00	35.70	28.40	2.25	0.00	Average

## Channel 16

Freq	Level	Over Limit		Read		Antenna Level Factor	Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m		dB	dB	
1	<b>2479.860</b>	86.74	-27.26	114.00	56.00	28.47	2.27	0.00	Peak
1	<b>2479.860</b>	66.54	-27.46	94.00	35.80	28.47	2.27	0.00	Average

## Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### **3.3. 20dB Spectrum Bandwidth Measurement**

#### **3.3.1. Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

#### **3.3.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameters</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### **3.3.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### **3.3.4. Test Setup Layout**

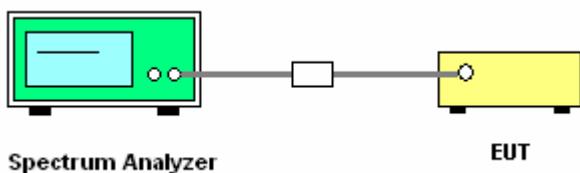

#### **3.3.5. Test Deviation**

There is no deviation with the original standard.

#### **3.3.6. EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

## 3.3.7. Test Result of 20dB Spectrum Bandwidth

Test Date	Feb. 21, 2008	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Nan	Configurations	Channel 1/8/16


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2405 MHz	0.996	1.050	2404.4360	-	Complies
2440 MHz	1.434	1.200	-	-	Complies
2480 MHz	1.212	1.182	-	2480.5520	Complies

## 20 dB/99% Bandwidth Plot on 2405 MHz

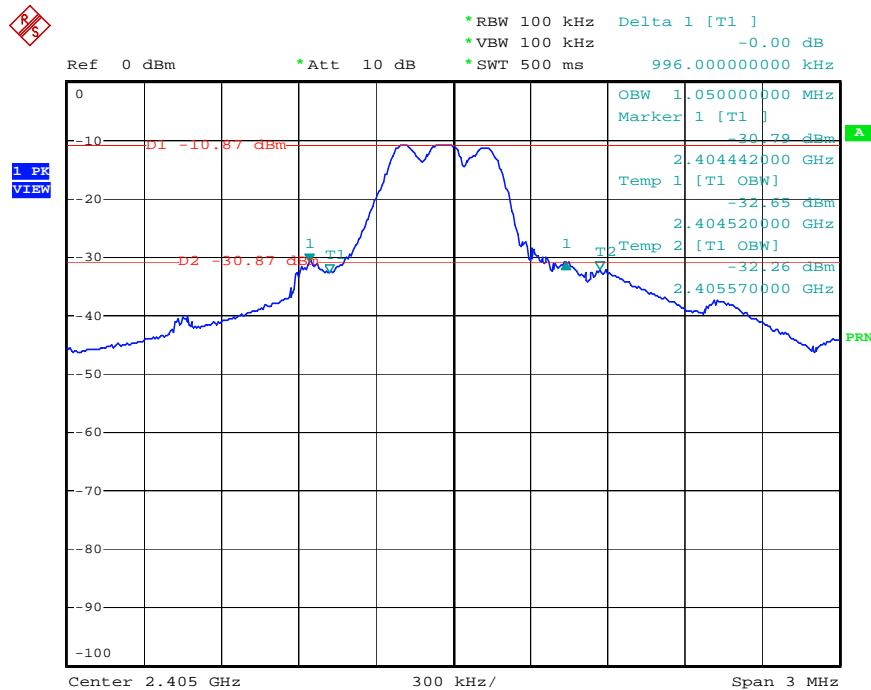


Date: 21.FEB.2008 09:11:07

## 20 dB/99% Bandwidth Plot on 2440 MHz

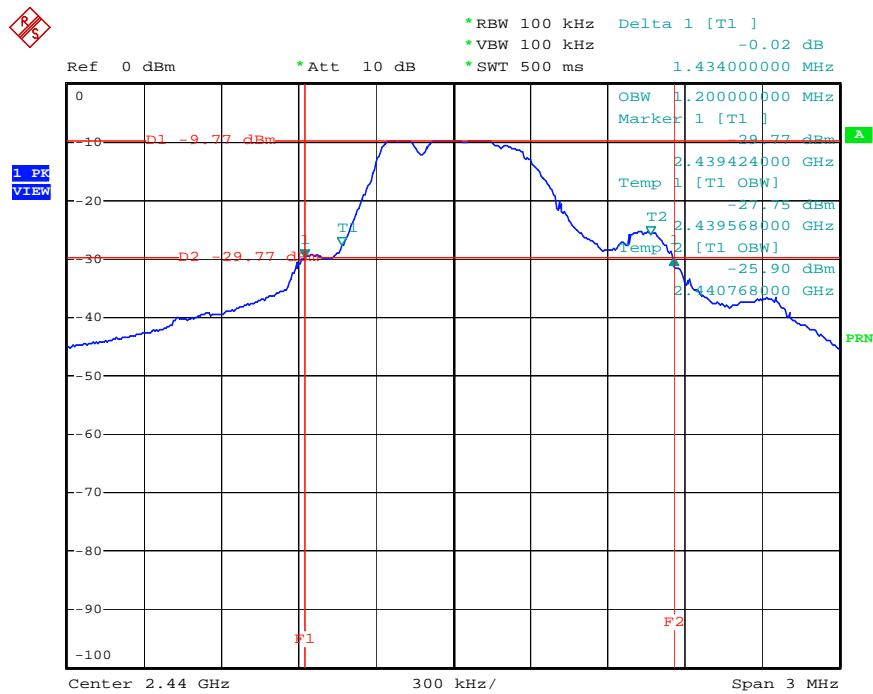

Date: 21.FEB.2008 09:00:35

## 20 dB/99% Bandwidth Plot on 2480 MHz

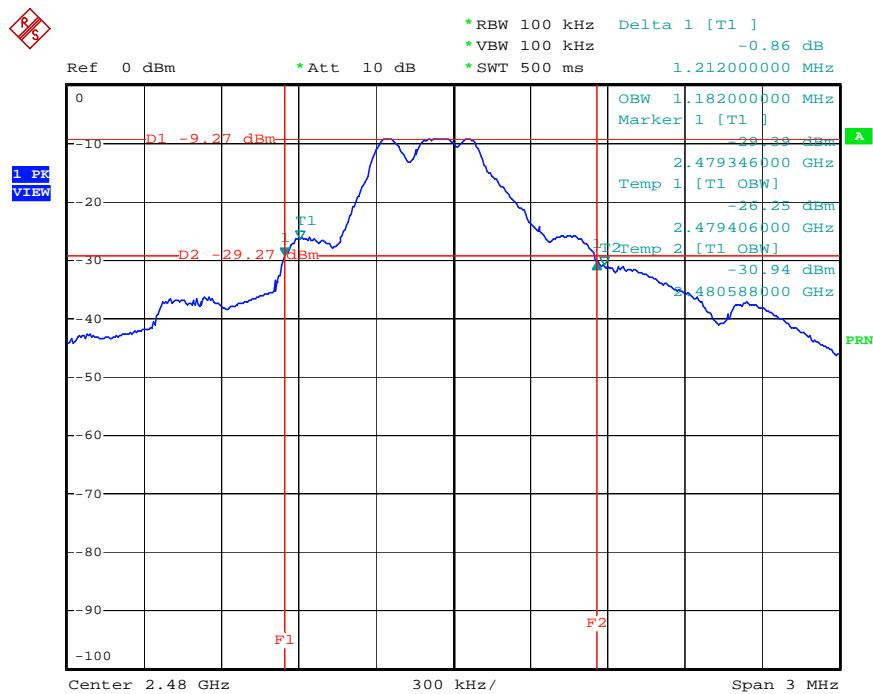

Date: 21.FEB.2008 08:52:46

### 3.4. Radiated Emissions Measurement

#### 3.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3. Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.4.4. Test Setup Layout

For radiated emissions below 30MHz

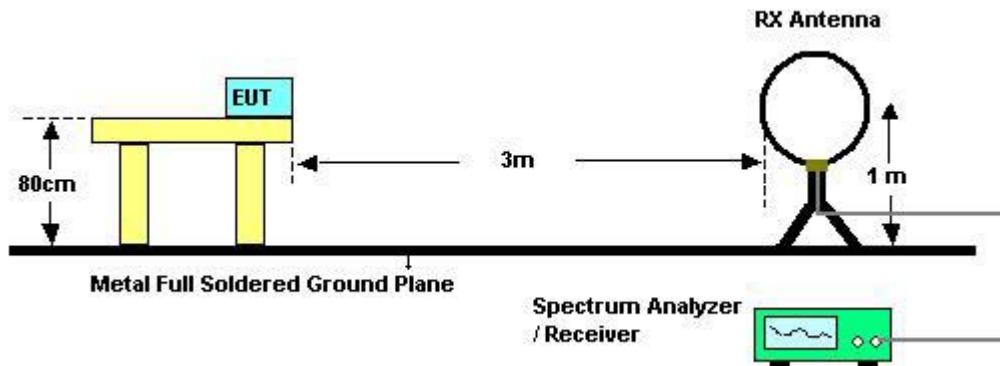

For radiated emissions above 30MHz

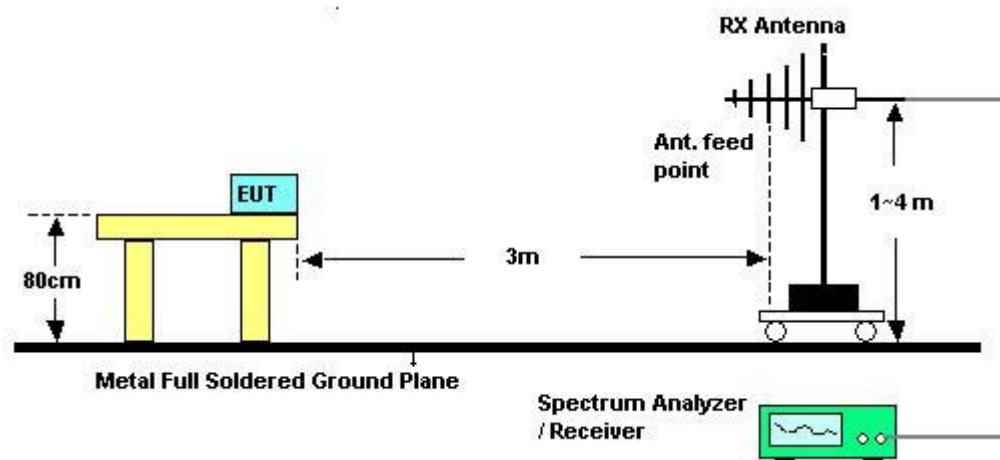

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.4.5. Test Deviation

There is no deviation with the original standard.

### 3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.4.7. Results of Radiated Emissions (9kHz~30MHz)**

<b>Test Date</b>	Feb. 21, 2008	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	22.3	<b>Humidity</b>	52%
<b>Test Engineer</b>	Eddie		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


## 3.4.8. Results of Radiated Emissions (30MHz~1GHz)

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 8

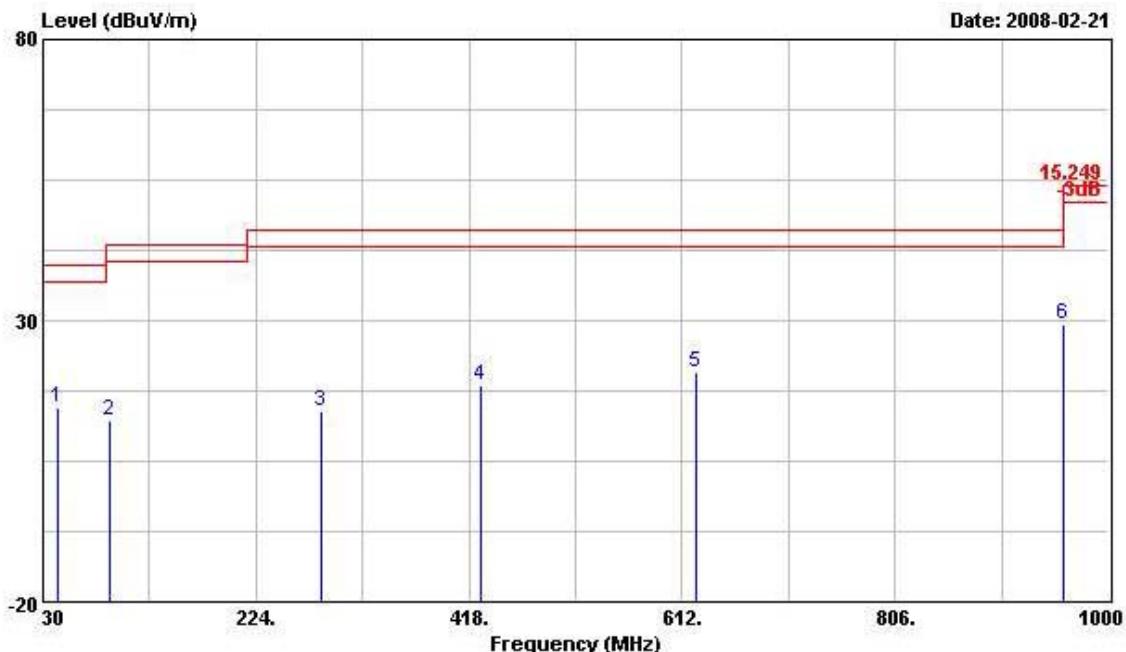*Horizontal*

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Table	Ant
		Line	Line	Level	Factor	Cable	Preamp		Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	43.580	14.41	-25.59	40.00	28.08	10.93	3.16	27.75 Peak	0	100
2	90.140	12.11	-31.39	43.50	27.82	9.50	2.41	27.62 Peak	0	100
3	284.140	13.99	-32.01	46.00	25.46	13.30	3.67	28.44 Peak	0	100
4	428.670	18.51	-27.49	46.00	25.85	17.14	4.42	28.90 Peak	0	100
5	625.580	20.63	-25.37	46.00	25.87	19.47	4.99	29.70 Peak	0	100
6	959.260	29.19	-16.81	46.00	31.10	21.25	6.42	29.58 Peak	0	100

## Vertical

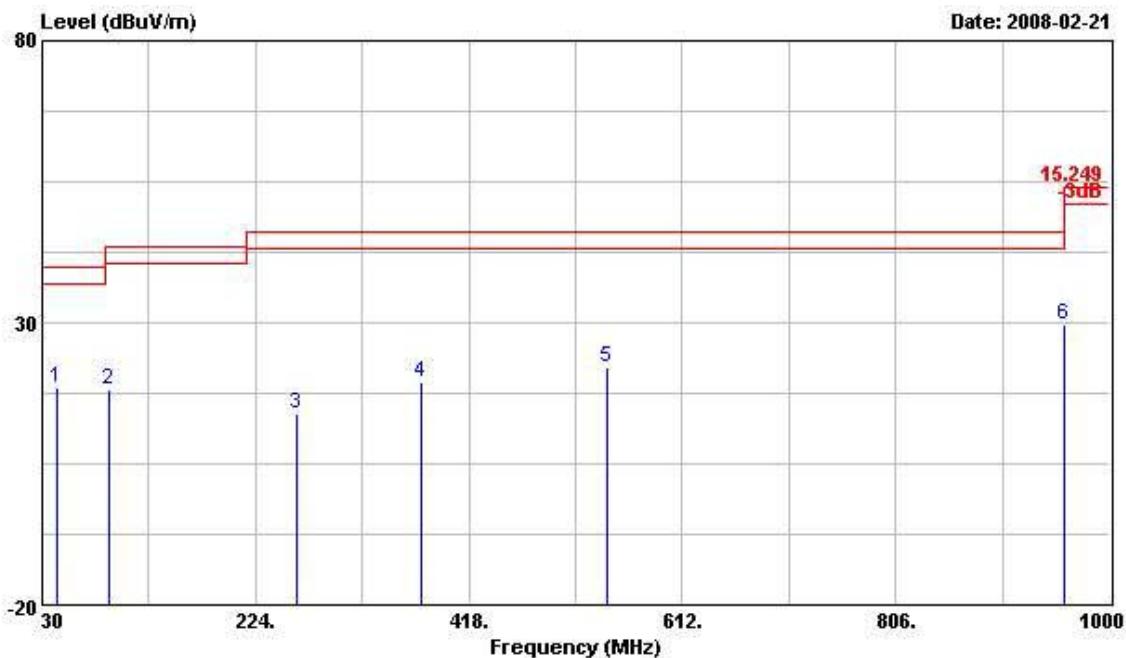

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark	Table Pos	Ant Pos
				dBuV/m	dB	dBuV	dB/m			
1	43.580	18.38	-21.62	40.00	32.05	10.93	3.16	27.75 Peak	360	100
2	90.140	18.12	-25.38	43.50	33.83	9.50	2.41	27.62 Peak	360	100
3	260.860	13.78	-32.22	46.00	24.69	13.66	3.61	28.18 Peak	360	100
4	374.350	19.55	-26.45	46.00	28.48	15.62	4.29	28.84 Peak	360	100
5	544.100	21.95	-24.05	46.00	27.64	19.16	4.67	29.52 Peak	360	100
6	959.260	29.62	-16.38	46.00	31.53	21.25	6.42	29.58 Peak	360	100

## Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.4.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 1

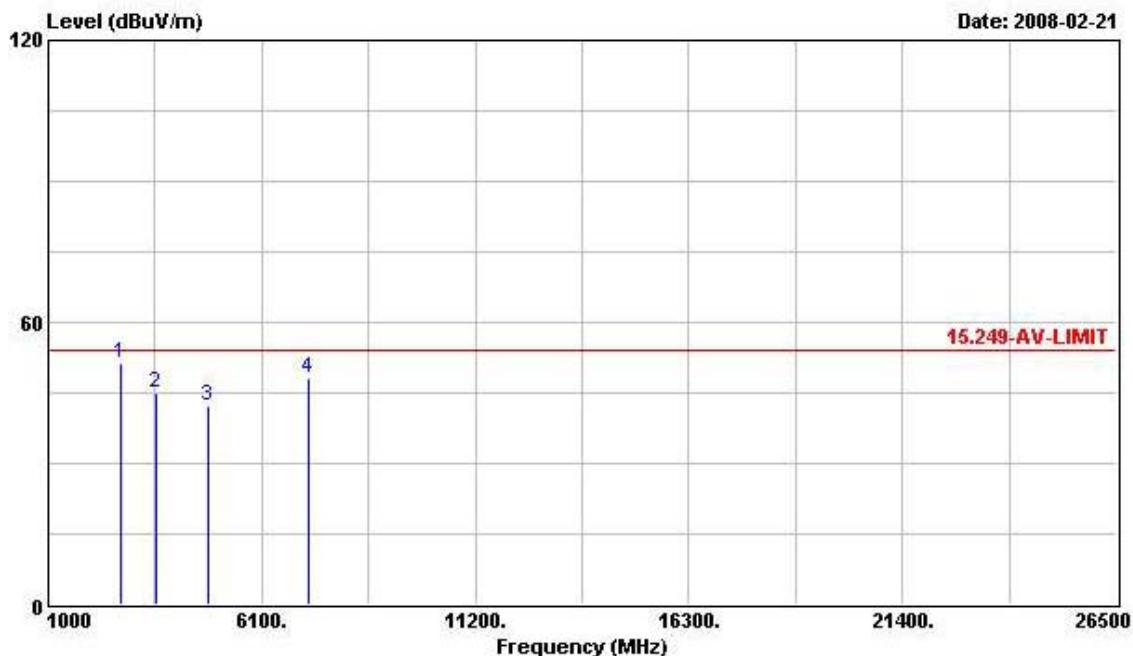**Horizontal**


Freq	Level	Over Limit	Limit Line	Read	Antenna	Cable Preamp			Table Pos	Ant Pos
						Level Factor	Loss Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm
1 @	2720.000	51.26	-2.74	54.00	52.60	29.19	2.31	32.84 Peak	0	100
2 @	3584.000	44.82	-9.18	54.00	43.76	31.34	2.52	32.80 Peak	0	200
3 @	4814.000	42.21	-11.79	54.00	40.55	33.02	1.38	32.74 Peak	0	200
4 @	7211.000	48.15	-5.85	54.00	41.31	35.70	4.08	32.95 Peak	0	100

## Vertical

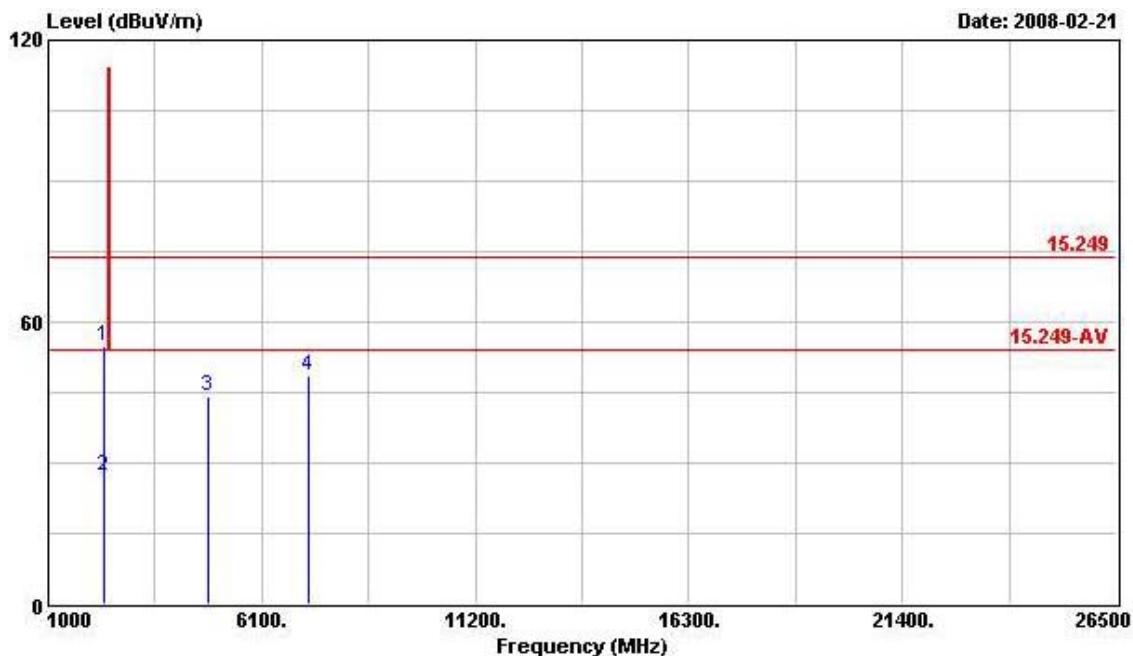


	Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark	Table Pos	Ant Pos
					dB	dBuV/m	dBuV	dB/m			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	
1	2336.000	54.79	-19.21	74.00	57.21	28.19	2.19	32.80	Peak	360	100
2	2336.000	27.14	-26.86	54.00	29.56	28.19	2.19	32.80	Average	360	100
3 ③	4810.000	44.06	-9.94	54.00	42.40	33.02	1.38	32.74	Average	0	200
4 ③	7215.000	48.61	-5.39	54.00	41.73	35.74	4.08	32.95	Average	0	100

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 8

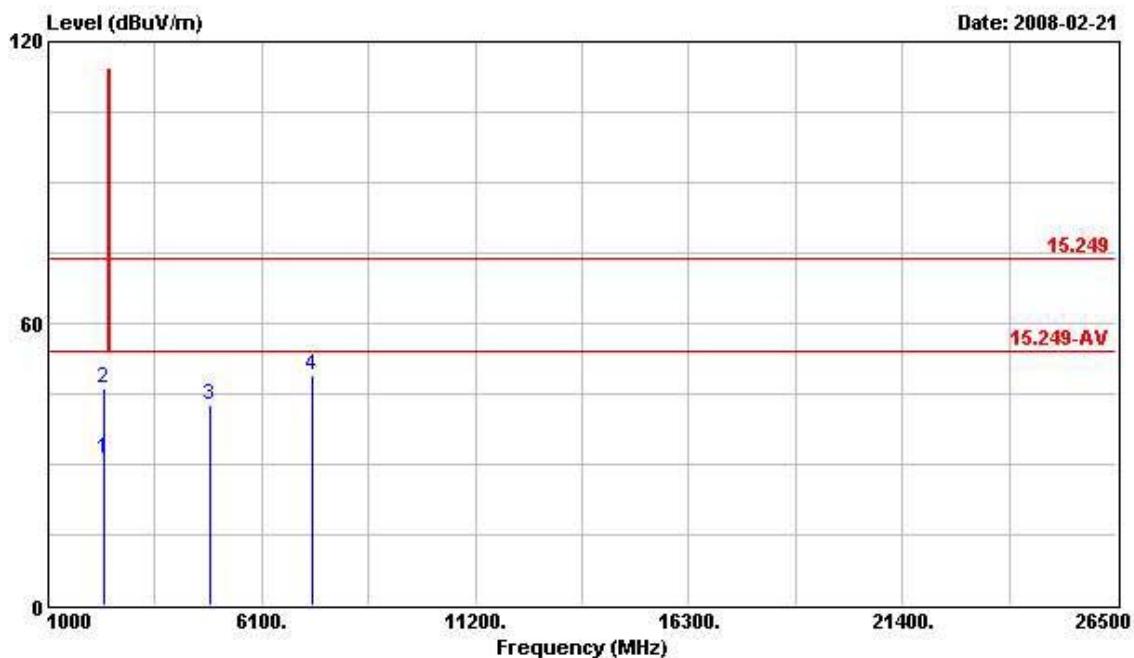**Horizontal**


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Table Pos	Ant Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm
1	2335.160	31.08	-22.92	54.00	33.50	28.19	2.19	32.80	Average
2	2335.160	46.05	-27.95	74.00	48.47	28.19	2.19	32.80	Peak
3	4880.000	42.78	-11.22	54.00	41.07	33.16	1.28	32.73	Average
4	7320.000	48.87	-5.13	54.00	41.59	35.99	4.26	32.97	Average

## Vertical

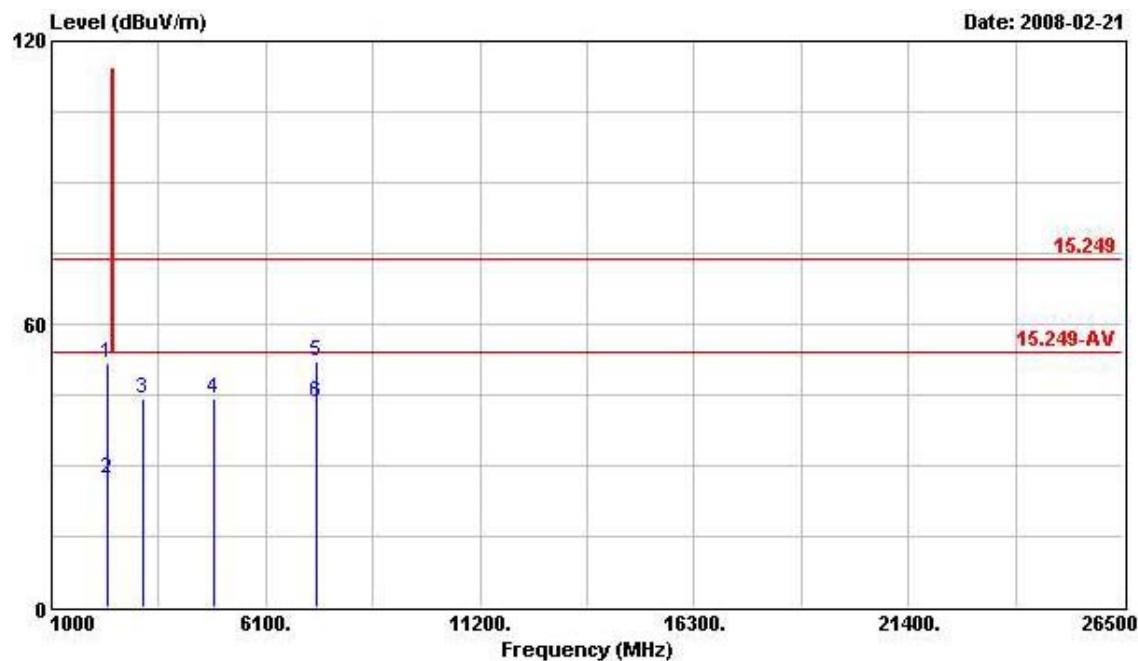


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Table Pos	Ant Pos	
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	deg	cm
1	2336.000	51.78	-22.22	74.00	54.20	28.19	2.19	32.80	Peak	360	100
2	2336.000	27.33	-26.67	54.00	29.75	28.19	2.19	32.80	Average	360	100
3 @	3188.000	44.09	-9.91	54.00	44.09	30.48	2.39	32.86	Average	0	200
4 @	4884.000	44.21	-9.79	54.00	42.60	33.16	1.17	32.73	Average	0	200
5	7320.000	52.26	-21.74	74.00	44.98	35.99	4.26	32.97	Peak	360	100
6 @	7320.000	43.44	-10.56	54.00	36.16	35.99	4.26	32.97	Average	360	100

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 16

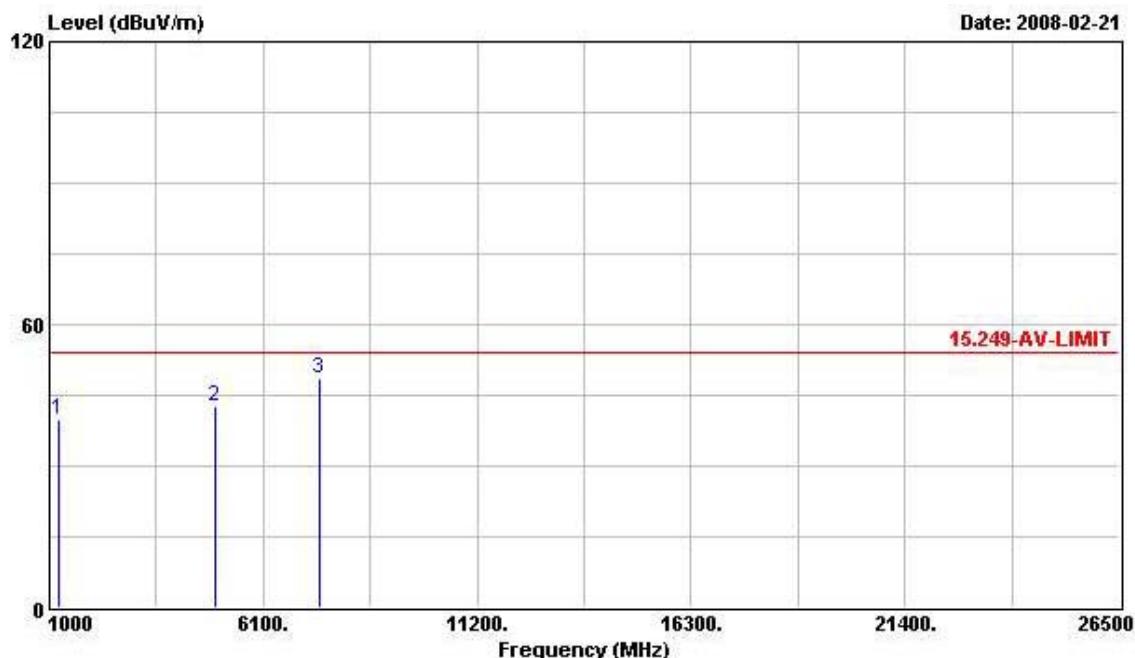**Horizontal**

Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Table Pos	Ant Pos
				dBuV/m	dB						
1 @	1240.000	39.98	-14.02	54.00	47.63	24.73	1.41	33.80	Peak	229	200
2 @	4960.000	42.46	-11.54	54.00	40.88	33.33	0.96	32.71	Peak	360	100
3 @	7440.000	48.62	-5.38	54.00	40.89	36.28	4.44	32.99	Peak	360	100

## Vertical

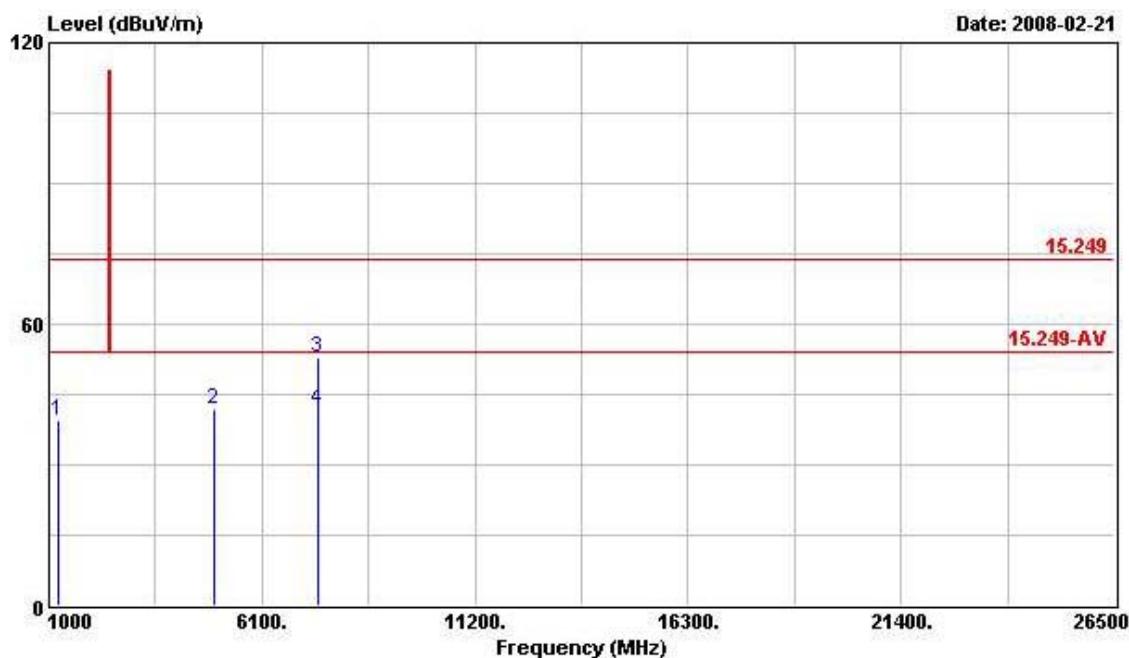

Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Table Pos	Ant Pos
				MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	deg
1 0	1240.000	39.65	-14.35	54.00	47.31	24.73	1.41	33.80	Average	316	100
2 0	4960.000	42.02	-11.98	54.00	40.44	33.33	0.96	32.71	Average	21	100
3 0	7440.000	53.04	-20.96	74.00	45.31	36.28	4.44	32.99	Peak	360	100
4 0	7440.000	41.74	-12.26	54.00	34.02	36.28	4.44	32.99	Average	360	100

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.5. Band Edge Emissions Measurement

#### 3.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

#### 3.5.3. Test Procedures

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.2.4.

#### 3.5.5. Test Deviation

There is no deviation with the original standard.

#### 3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.5.7. Test Result of Band Edge Emissions

Test Date	Feb. 21, 2008	Test Site No.	03CH03-HY
Temperature	22.3	Humidity	52%
Test Engineer	Eddie	Configurations	Channel 1, 16

## Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2389.420	62.25	-11.75	74.00	31.73	28.29	2.23	0.00	Peak
2	2400.000	62.58	-11.42	74.00	32.06	28.29	2.23	0.00	Peak
1	2389.610	43.14	-10.86	54.00	12.62	28.29	2.23	0.00	Average
2	2400.000	43.06	-10.94	54.00	12.54	28.29	2.23	0.00	Average

## Channel 16


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
2	2483.500	62.90	-11.10	74.00	32.16	28.47	2.27	0.00	Peak
2 @	2483.500	44.80	-9.20	54.00	14.06	28.47	2.27	0.00	Average

## Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## Low Band Edge Plot on 2405 MHz

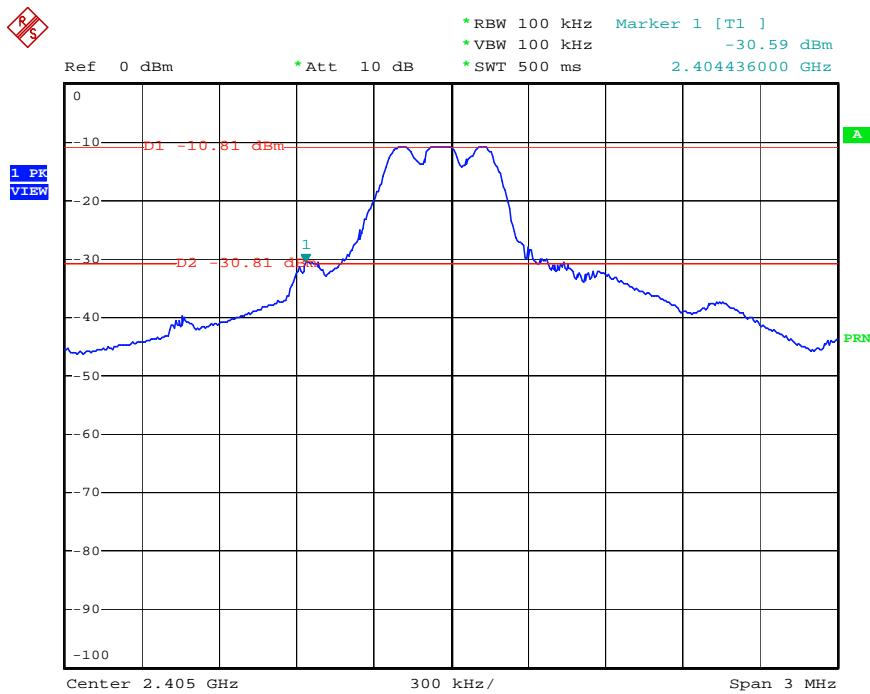

## High Band Edge Plot on 2480 MHz

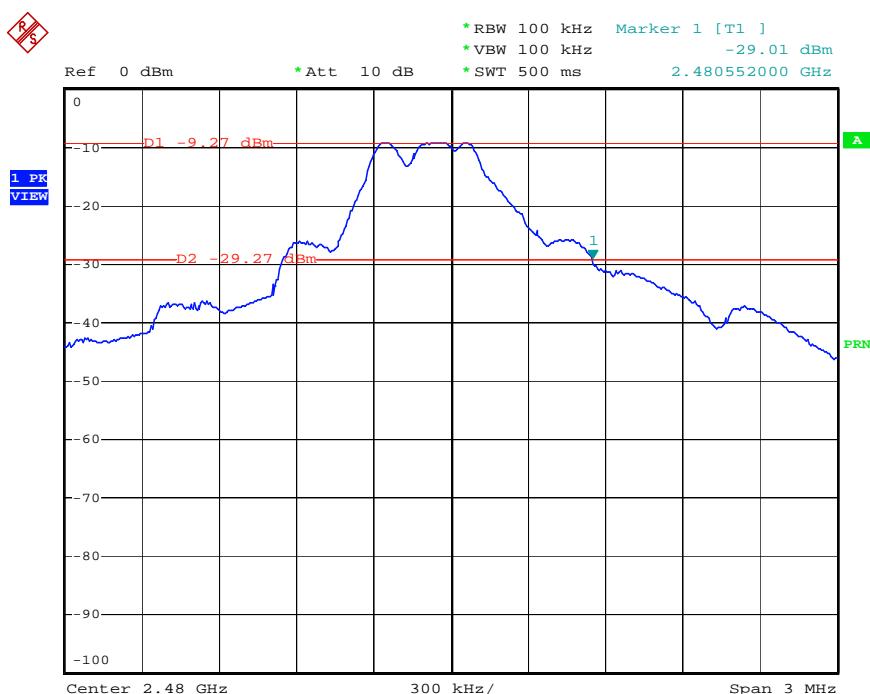

### **3.6. Antenna Requirements**

#### **3.6.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **3.6.2. Antenna Connector Construction**

Please refer to section 2.1 in this test report, antenna connector complied with the requirements.

## 4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 18, 2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Jan. 14, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 04, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 04, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

**5. TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No.: L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005  
Accreditation Number : 1190  
Originally Accredited : December 15, 2003  
Effective Period : January 10, 2007 to January 09, 2010  
Accredited Scope : Testing Field, see described in the Appendix  
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
: Accreditation Program for Telecommunication Equipment  
Testing Laboratory

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.