


1	2	3	4
	REV	DESCRIPTION	DATE
A	1	ECO#7959	6/27/2008 T.O

NOTES:

- 1) MATERIAL: POLYCARBONATE 0.254mm THICK.
- 2) BACKGROUND COLOR: PANTONE 427C SATIN FINISH (LIGHT TEXTURE), PRINT FROM BACK.
- 3) LETTERS COLOR: 432C PRINT FROM BACK SIDE.
- 4) BACK ADHESIVE 3M 476MP.
- 5) REFER TO ARTWORK DRAWING FOR PRINTING.

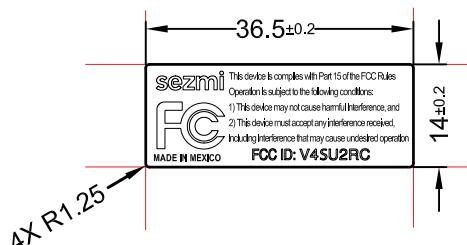

ENVIRONMENTAL NOTICE:

1. FINAL APPROVAL WILL BE GIVEN WITH A SUBMISSION OF MSDS OF RAW MATERIALS' MANIFESTO OR EQUIVALENT DOCUMENTS SUBJECT TO SMK APPROVAL.
2. FINAL PRODUCT MUST BE FREE FROM THE FOLLOWING HARMFUL MATERIALS:
  - 2.1. CADMIUM AND CADMIUM COMPOUNDS.
  - 2.2. PBB (POLYBROMINATED BIPHENYL) CATEGORY AND PBDE (POLYBROMINATED DIPHENYL ETHER) CATEGORY.
  - 2.3. CHLORINATED PARAFFINS (CHLORINATED FLAME RETARDANT MATERIALS / PLASTICIZERS).
  - 2.4. PCBs (POLYCHLORINATED BIPHENYLS) CATEGORY.
  - 2.5. POLYCHLORINATED NAPHTHALENE CATEGORY.
  - 2.6. ORGANIC TIN COMPOUNDS (TRIBUTYL TIN & TRIPHENYL TIN CATEGORIES).
  - 2.7. ASBESTOS.
  - 2.8. MIREX.
  - 2.9. TETRABROMOBISPHENOL (TBBP-A-BIS).
  - 2.10. DIOXIN
  - 2.11. CHLORO FLOURO CARBON (CFC)
  - 2.12. LEAD & LEAD COMPOUNDS.
  - 2.13. MERCURY AND MERCURY COMPOUNDS.
  - 2.14. HEXAVALENT CHROMIUM COMPOUNDS.



RoHS  
Compliant

UNIT: mm	APPROVED	SCALE: 1:1	DESCRIPTION	ISSUED
	CHECKED	DESIGNED	FCC LABEL SEZMI	
		T.O 5/28/2008	DRAWING NO.	
			2 0 4 R X T - 0 2 5 - 0 1 E	

SMK Manufacturing, Inc.

SIZE: A SHEET: 1 OF 1

REV. 1