



Nemko

Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810

Test Report: 2008 10113670 SMK FCC

Project number: 11231-1

Applicant: Sezmi Corporation
1301 Shoreway Road Suite 310
Belmont, CA 94002-4155

Equipment Under Test (EUT): RF Module

Model: Sezmi Remote

FCC ID: V4SU2RV

In Accordance With: FCC Part 15 Subpart C, 15.249

Tested By: Nemko USA Inc.
11696 Sorrento Valley Road, Suite F
San Diego, CA 92121

Alan Laudani, RF/EMC Test Engineer

Date: June 2, 2008

Total Number of Pages: 29

Section 1. Summary of Test Results

General

All measurements are traceable to national standards

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15; Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed: Sezmi Remote

Specification: FCC Part 15 Subpart C, 15.249

Compliance Status: Complies

Exclusions: None

Non-compliances: None

Report Release History:

REVISION	DATE	COMMENTS	
-	10-22-2008	Prepared By:	Alan Laudani
-	10-22-2008	Initial Release:	Alan Laudani

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Section 1. Summary of Test Results.....	2
Section 2: Equipment Under Test.....	5
2.1 Product Identification.....	5
2.2 Samples Submitted for Assessment.....	5
2.3 Theory of Operation	6
2.4 Technical Specifications of the EUT	6
Section 3: Test Conditions	7
3.1 Specifications.....	7
3.2 Deviations From Laboratory Test Procedures	7
3.3 Test Environment	7
3.4 Test Equipment	8
Section 4: Observations	9
4.1 Modifications Performed During Assessment.....	9
4.2 Record Of Technical Judgements.....	9
4.3 EUT Parameters Affecting Compliance	9
4.4 Test Deleted.....	9
4.5 Additional Observations	9
Section 5: Results Summary.....	10
5.1 FCC Part 15 Subpart C Test Results.....	10
Appendix A: Test Results.....	11
Clause 15.205(a) Restricted Bands of Operation	11
Clause 15.215(c) Occupied Bandwidth.....	14
Clause 15.209(a) Radiated Emissions not in Restricted Bands	18

Section 2: Equipment Under Test

2.1 Product Identification

The Equipment Under Test was identified as follows:

SEZMI Remote

Engineering sample; serial number not available during assessment

2.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
001	SEZMI Remote RF Module	NA

2.3 Theory of Operation

The purpose for the unit is to be introduced into models that control a television set up box. This set up box is similar to a cable box. The unit can operate in RF mode. The remote controls the volume, channel, record, fast forwards, etc. The only type of data sent is control data. The unit does not send audio or video signals.

The remote communicates with a unit outside of the set up box. This unit is separate of the remote. The communication is done in one and only one frequency. If the unit sees an interferer both set up box and transmitter will switch to a different channel. Never are two frequencies transmitted at the same time.

The antenna used is a circuit trace antenna with a gain of -2dBi.

The power input will be from the set up box. Sezmi controls the installation of the RF module into the set up box and provide the required voltage and current.

2.4 Technical Specifications of the EUT

Applicant:	Sezmi Corporation
Manufacturer:	SMK Electronics Corp. USA
Operating Frequency:	2.402 GHz to 2.481 GHz in the 2.400 to 2.4835 GHz Band
Emission Designator	2M57G1D
Measured Field Strength:	85.7 dB μ V/m Peak 65.7 dB μ V/m Average
Modulation:	GFSK
Type of Receiver:	None
Antenna Data:	Integral (-2dBi gain)
Power Source:	For test, test set up rig – battery powered.

Section 3: Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHZ, and 24.0–24.25 GHz

3.2 Deviations From Laboratory Test Procedures

No deviations from Laboratory Test Procedure

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	19.8 – 25.0 °C
Humidity range	:	28 % - 70%
Pressure range	:	86 - 106 kPa
Voltage	:	(2X) AA Battery: 3.0VDC

3.4 Test Equipment

Nemko ID	Device	Manufacturer	Model	Serial Number	Cal Date	Cal Due Date
114	Antenna, Bicon	EMCO	3104	2997	10-Jan-08	10-Jan-09
110	Antenna, LPA	Electrometrics	LPA-25	1217	10-Jan-08	10-Jan-09
674	Spectrum Analyzer	HP	8568B	2007A00910	11-Apr-08	11-Apr-09
675	Spectrum Analyzer Display	HP	85662A	2005A01282	11-Apr-08	11-Apr-09
676	Quasi-Peak Adapter	HP	85650A	2430A00576	11-Apr-08	11-Apr-09
317	Preamplifier	HP	8449A	2749A00167	31-Mar-08	31-Mar-09
752	Antenna, DRWG	EMCO	3115	4943	31-Oct-07	31-Oct-08
835	Spectrum Analyzer	Rohde & Schwarz	RHDFSEK	829058/005	27-Jun-08	27-Jun-09
625	Antenna, Dbl Ridge Horn	EMCO	3116	2325	01-Apr-08	01-Apr-09
DC	Spectrum Analyzer	HP	8594E	3523A02076	11/09/07	11/09/08

Section 4: Observations

4.1 Modifications Performed During Assessment

No modifications performed during the assessment.

4.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

4.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

4.4 Test Deleted

No Tests were deleted from this assessment.

4.5 Additional Observations

There were no additional observations made during this assessment.

Section 5: Results Summary

This section contains the following:

FCC Part 15 Subpart C: Test Results.

The column headed "Required" indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No: not applicable / not relevant

Y Yes: Mandatory i.e. the apparatus shall conform to these test.

N/T Not Tested, mandatory but not assessed. (See section 4.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

5.1 FCC Part 15 Subpart C Test Results


Part 15	Test Description	Required	Result
15.207 (a)	Powerline Conducted Emissions	N ¹	
15.205 (a)	Radiated Emissions within Restricted Bands	Y	Pass
15.215 (c)	Occupied Bandwidth	Y	Pass
15.249 (a)	Radiated Emissions not in Restricted Bands	Y	Pass

Notes:

¹EUT is a device tested in stand alone fashion.

Appendix A: Test Results

Duty Cycle

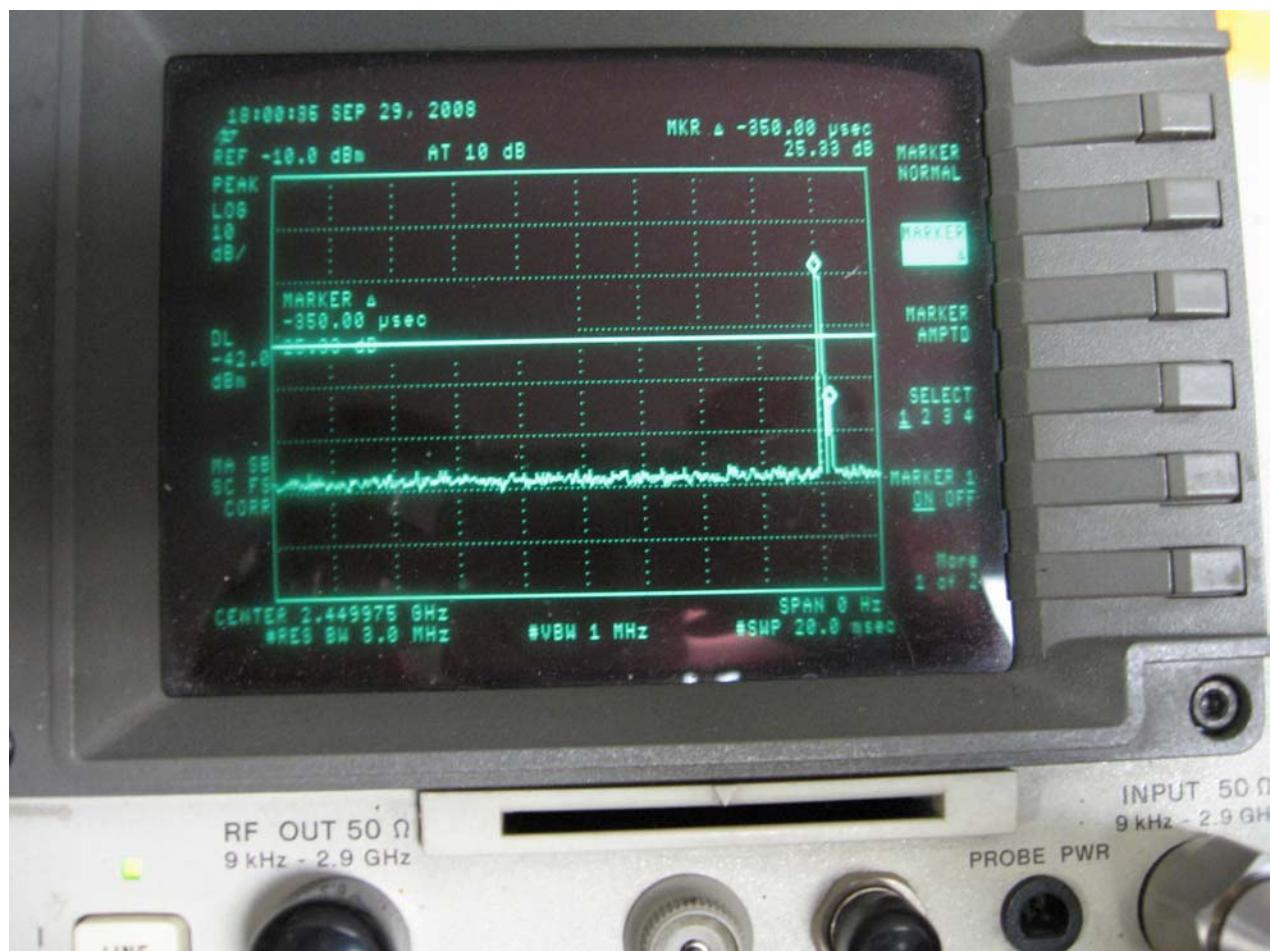

Span is 20ms

1 transmission

Delta is 359 micro seconds

Nemko USA, Inc.


FCC ID# V4SU2Rv

11696 Sorrento Valley Road, Suite F, San Diego, CA 92121

Phone (858) 755-5525 Fax (858) 452-1810

Report Number: 2008 10113670 SMK FCC

Specification: FCC Part 15 Subpart C, 15.249

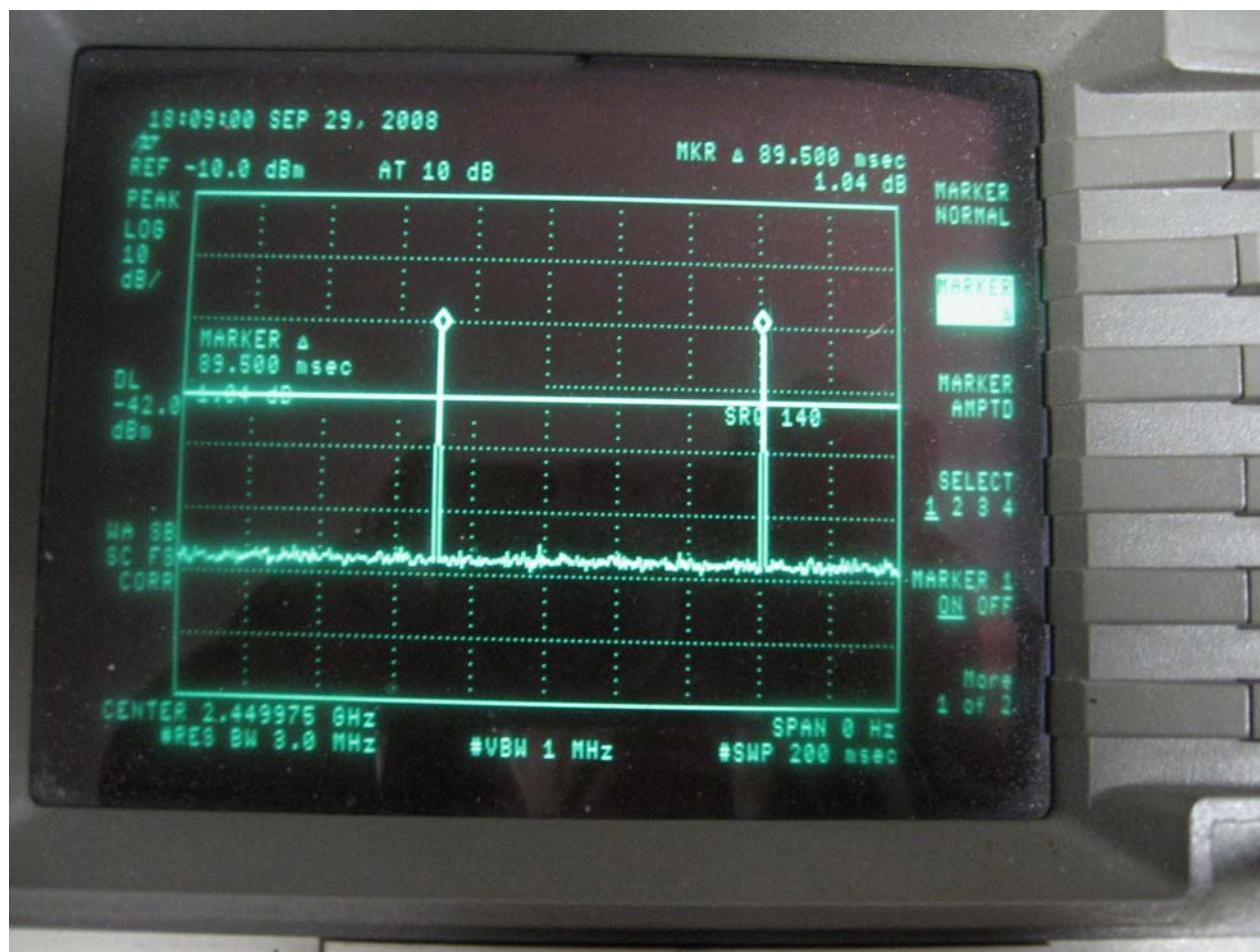

Span is 200ms
2 transmissions 89.5 ms apart.

Duty Cycle Calculations:

$$\text{Duty Cycle} = 2 \times 0.359 \text{ ms} \\ = 0.718 \text{ ms}$$

Duty Cycle Factor as a percentage

$$= 0.718 / 100$$

$$= 0.00718$$

$$= 0.7 \%$$

Correction Factor = -20 dB (minimum allowed by FCC)

Clause 15.205(a) Restricted Bands of Operation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41			

Test Conditions:

Sample Number:	001	Temperature:	19.8
Date:	09/12/2008	Humidity:	73
Modification State:	Transmit	Tester:	Alan Laudani
		Laboratory:	Shield Room 1/SOATS

Test Results:

No emissions observed - See Attached Plots.

Additional Observations:

- The Spectrum was searched from 30MHz up to 26.5 GHz.
- The EUT was measured on three orthogonal axes.
- The EUT was tested with freshly charged batteries.
- There were no emissions observed other than the fundamental as evident from the prescans performed inside a shield room at 1 meter. 100 kHz RBW, 100 kHz VBW from 30 MHz to 26.5 GHz, Peak hold. No emissions were evident as verified on the Outside Area Test Site.

Clause 15.215(c) Occupied Bandwidth

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Sec. Sec. 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Conditions:

Sample Number:	001	Temperature:	22.1
Date:	10/12/2008	Humidity:	68
Modification State:	Transmit	Tester:	A. Laudani
		Laboratory:	Shield Room #1


Test Results:

See Attached Plots.


Additional Observations:

Frequency span set to capture all products of the modulation process including the emission skirts. Max Peak hold.


Video bandwidth set to 3 times the resolution bandwidth.

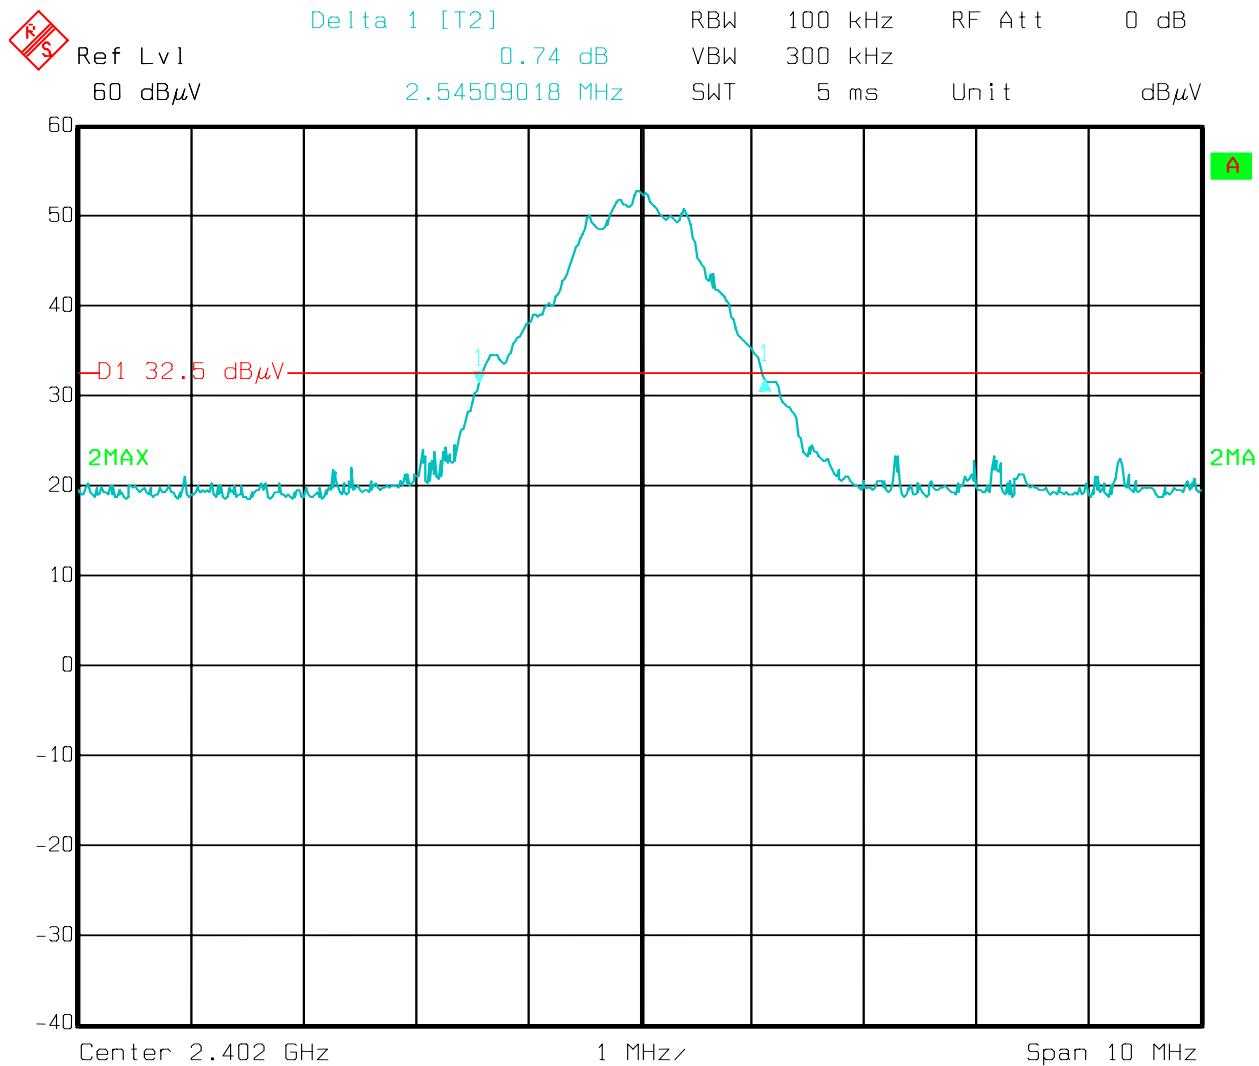

LOW Channel - Measured Occupied Bandwidth is 2.54MHz.

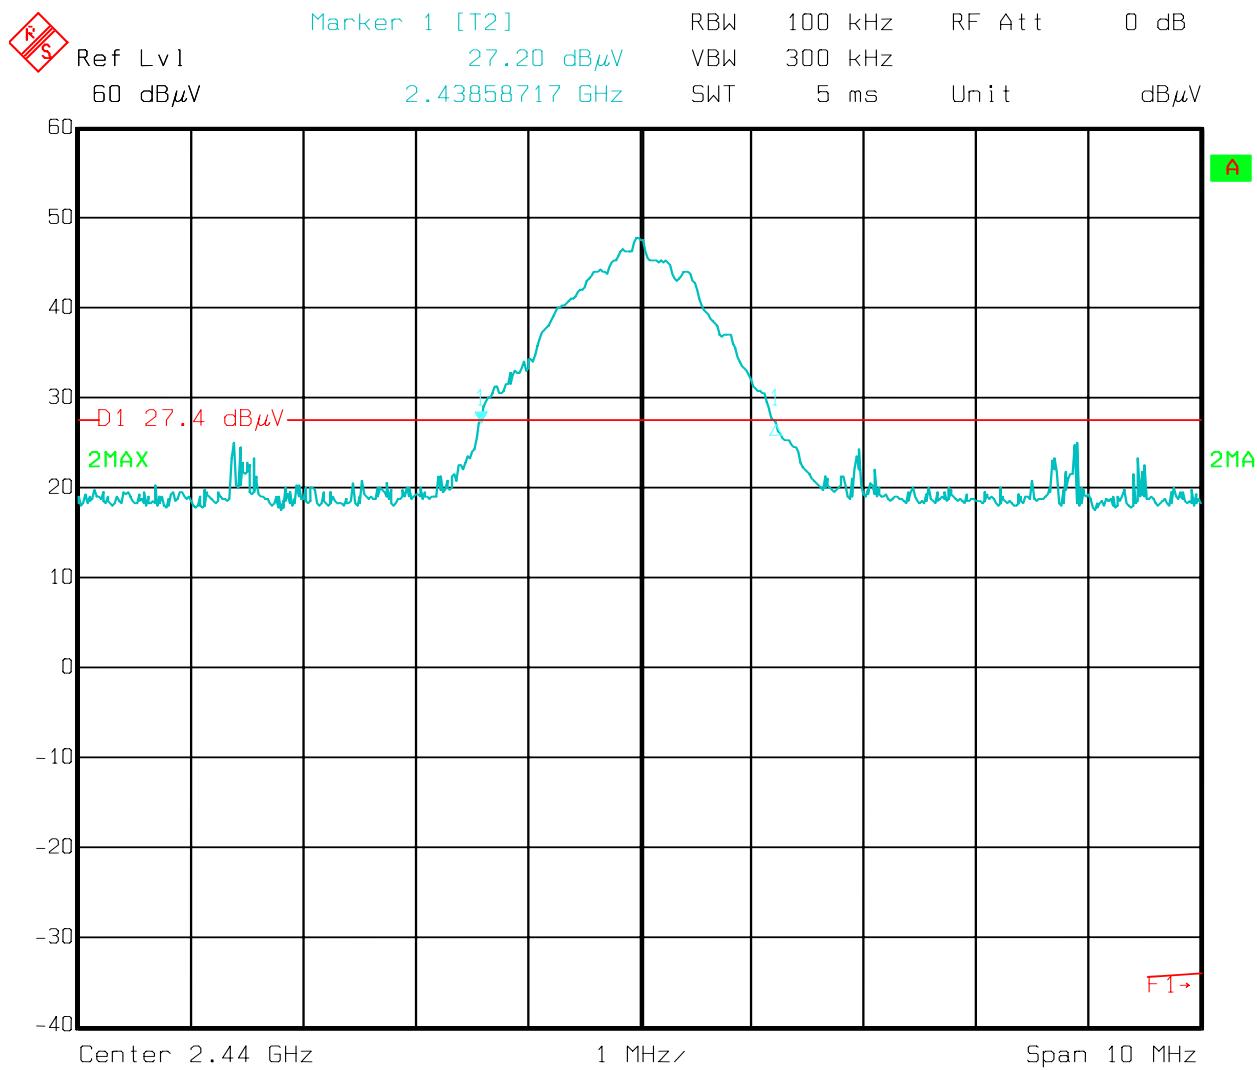

MID Channel - Measured Occupied Bandwidth is 2.44 MHz.

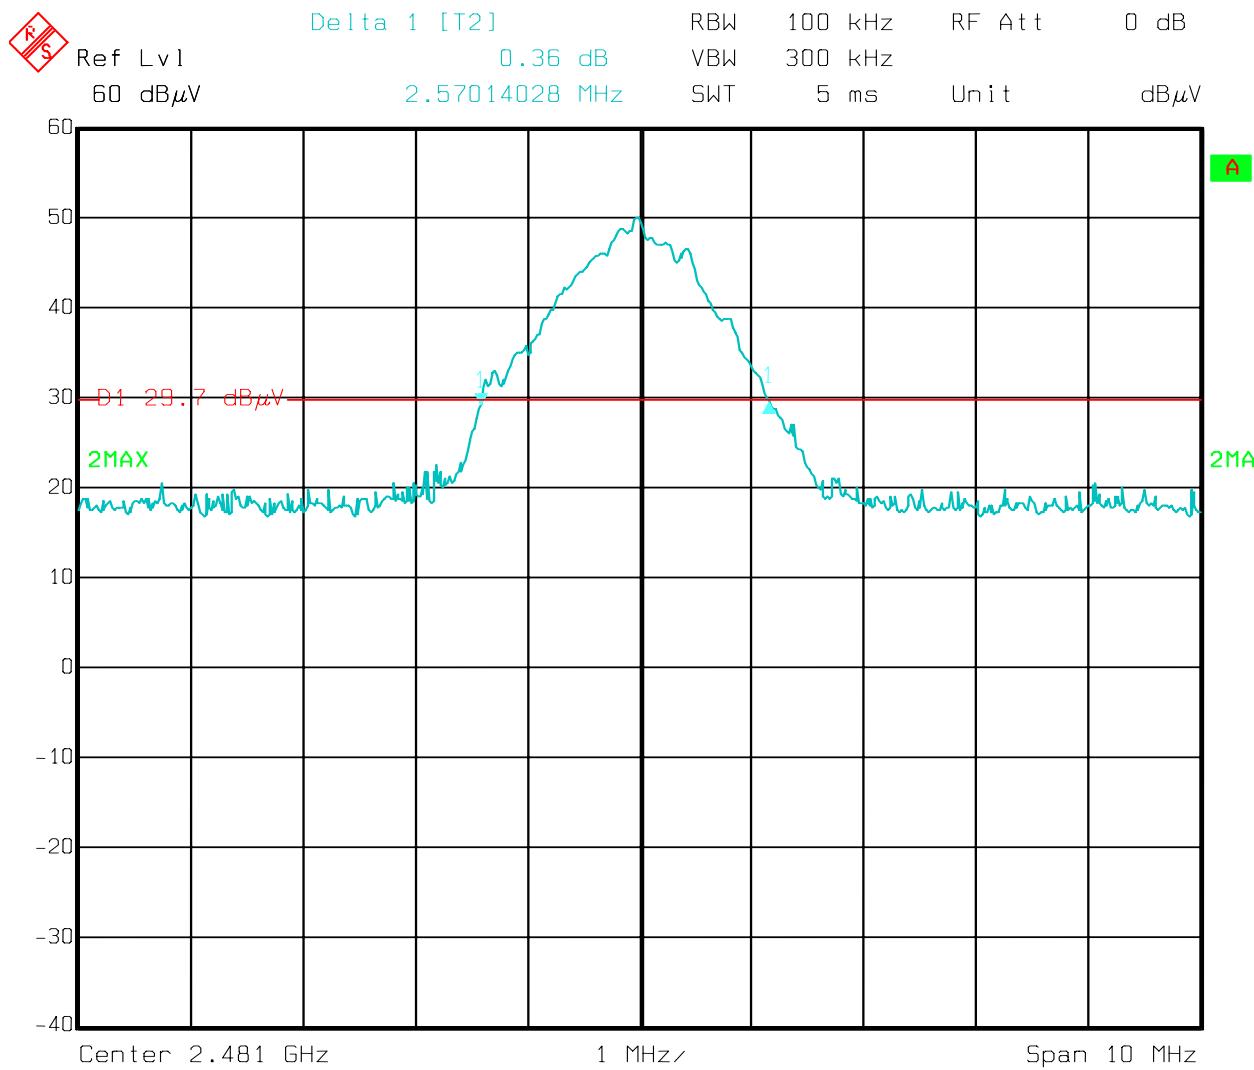

Date: 12.SEP.2008 10:39:55

HIGH Channel - Measured Occupied Bandwidth is 2.57 MHz.

Clause 15.209(a) Radiated Emissions not in Restricted Bands

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Conditions:**Test Results:**

See Attached Table and Plots.

Additional Observations:

- The Spectrum was searched from 30 MHz up to 26.5 GHz. No other emissions within 20 dB of the limit were detected.
- The EUT was measured on three orthogonal axis.
- The EUT was tested with new battery.
- All measurements were measured at 3m using peak detector.
- Average values were computed using the formula:
Average = Peak -20 log (Duty Cycle)
- Resolution bandwidth & Video Bandwidth used for fundamental measurements is 3MHz which is greater than measured occupied bandwidth of 2.38MHz.

limits

Average = $20 \times \log(50000 \mu\text{V}) = 93.98$ or 94.0 dB $\mu\text{V}/\text{m}$

$$\text{Peak} = \text{Average} + 20 \text{ dB} = 20 + 94 = 114.0 \text{ dBuV/m}$$

Radiated Emissions Data

Complete	YES	Job # :	15253-1	Test # :	1
Preliminary		Page	1	of	1
Client Name :	SMK Electronics Corp. USA				
EUT Name :	RF Module				
EUT Model # :	Sezmi Remote				
EUT ANTENNA Part # :	NA				
EUT Serial # :	NA				
EUT Config. :	Transmit				
Specification :	FCC Part 15.249				
Rod. Ant. #:	FCC Part 15.209 (a)				
Bicon Ant.#:	NA	Temp. (deg. C) :	19.8	Date :	10/22/2008
Log Ant. #:	114	Humidity (%) :	73	Time :	13:00:00 AM
DRG Ant. #	110	EUT Voltage :	4.5 VDC	Staff :	AAL
Dipole Ant.#:	752	EUT Frequency :		Photo ID:	
Cable#:	NA	Phase:		Bandedge	Peak Res Bandwidth: 1 MHz
Preamp#:	40ft	Location:	SOATS		Peak Video Bandwidth 3 MHz
Spec An.#:	317	Distance:	3 m	Output Power	Peak Res Bandwidth: 3 MHz
QP #:	835	Duty Cycle Factor	0.72%		Peak Video Bandwidth 3 MHz
	NA				

Meas. Freq. (MHz)	Vertical (dBuV)		Horizontal (dBuV)		CF (db)	Max Level (dBuV/m)		Spec. Limit (dBuV/m)		Margin dB		EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
	pk	av	pk	av		pk	av	pk	av	pk	av				
2400.00	40.7	20.7	35.5	15.5	33.0	73.7	53.7	74.0	54.0	-0.3	-0.3	-	1.1	Pass	Upright Config
2400.00	38.9	18.9	37.5	17.5	33.0	71.9	51.9	74.0	54.0	-2.1	-2.1	-	1.1	Pass	Horizontal Config
2400.00	38.7	18.7	36.8	16.8	33.0	71.7	51.7	74.0	54.0	-2.3	-2.3	-	1.1	Pass	Flat Config
2402.00	52.6	32.6	44.6	24.6	33.1	85.7	65.7	114.0	94.0	-28.3	-28.3	-	1.1	Pass	Upright Config
2402.00	49.0	29.0	48.4	28.4	33.1	82.1	62.1	114.0	94.0	-31.9	-31.9	-	1.1	Pass	Horizontal Config
2402.00	50.7	30.7	48.7	28.7	33.1	83.8	63.8	114.0	94.0	-30.2	-30.2	-	1.1	Pass	Flat Config
2450.00	51.9	31.9	37.7	17.7	33.2	85.1	65.1	114.0	94.0	-28.9	-28.9	-	1.1	Pass	Upright Config
2450.00	46.9	26.9	46.3	26.3	33.2	80.1	60.1	114.0	94.0	-33.9	-33.9	-	1.1	Pass	Horizontal Config
2450.00	48.3	28.3	47.9	27.9	33.2	81.5	61.5	114.0	94.0	-32.5	-32.5	-	1.1	Pass	Flat Config
2481.00	50.4	30.4	40.1	20.1	33.2	83.6	63.6	114.0	94.0	-30.4	-30.4	-	1.1	Pass	Upright Config
2481.00	44.6	24.6	42.1	22.1	33.2	77.8	57.8	114.0	94.0	-36.2	-36.2	-	1.1	Pass	Horizontal Config
2481.00	45.9	25.9	47.5	27.5	33.2	80.7	60.7	114.0	94.0	-33.3	-33.3	-	1.1	Pass	Flat Config
2483.50	30.4	10.4	25.5	5.5	33.2	63.6	43.6	74.0	54.0	-10.4	-10.4	-	1.1	Pass	Upright Config
2483.50	25.6	5.6	26.5	6.5	33.2	59.7	39.7	74.0	54.0	-14.3	-14.3	-	1.1	Pass	Horizontal Config
2483.50	26.8	6.8	28.5	8.5	33.2	61.7	41.7	74.0	54.0	-12.3	-12.3	-	1.1	Pass	Flat Config

Band Edge Measurements:

Plot shows maximized low channel, peak hold.

Peak @ 2400.0 MHz = 40.7 + 33.0 dB Correction factor = 73.7 dB μ V


Peak Limit = 74 dB μ V

Average @ 2400.0 MHz = Peak – Duty Cycle Correction Factor


= 73.7 – 20 dB

= 53.7 dB μ V

Average Limit = 54 dB μ V

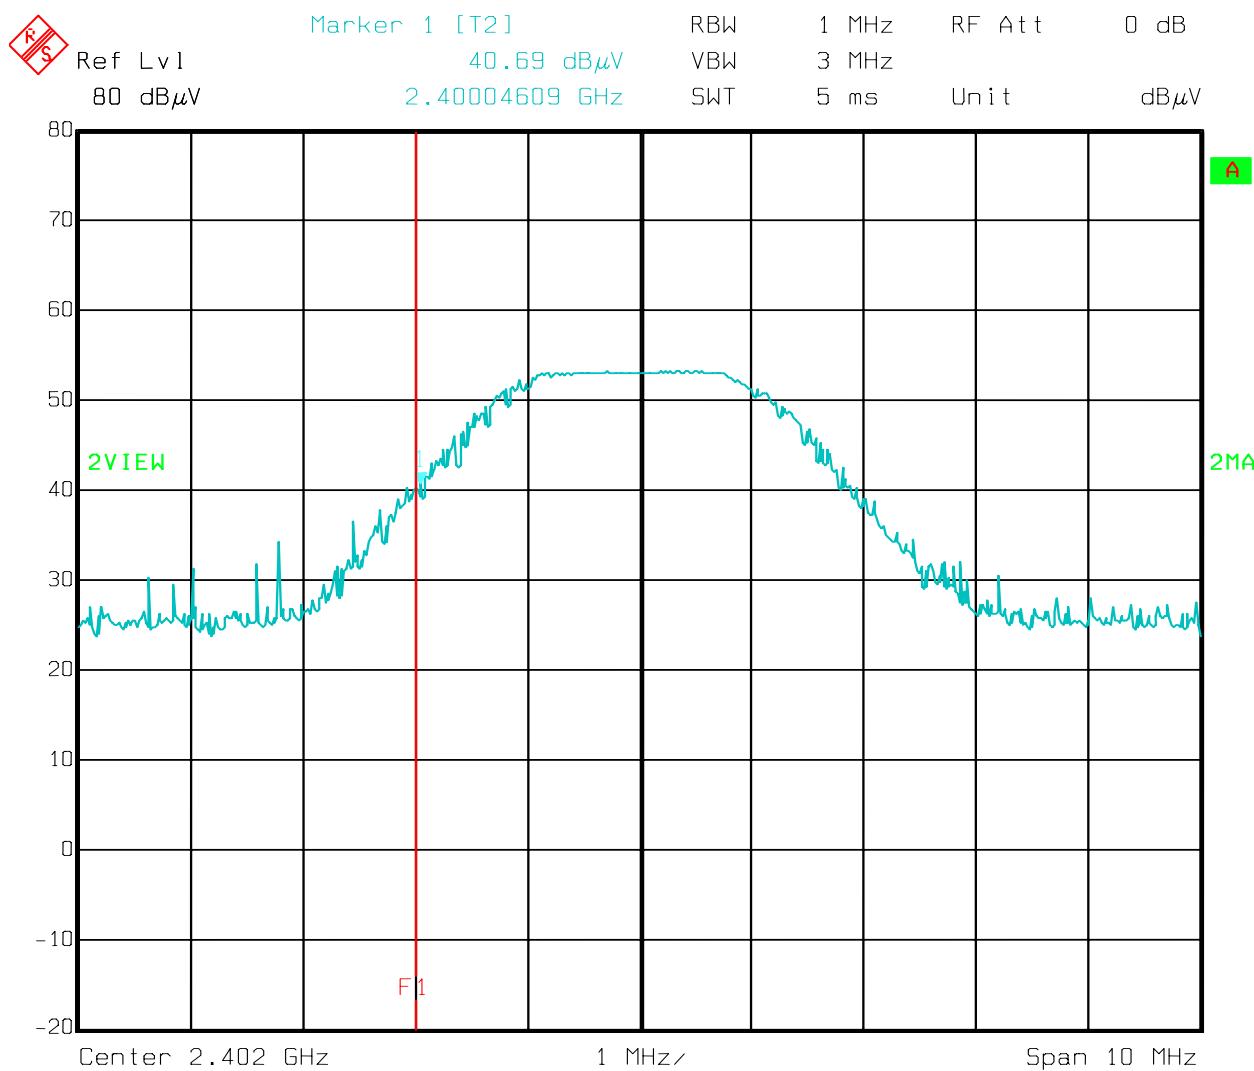

Date: 22.OCT.2008 16:45:23

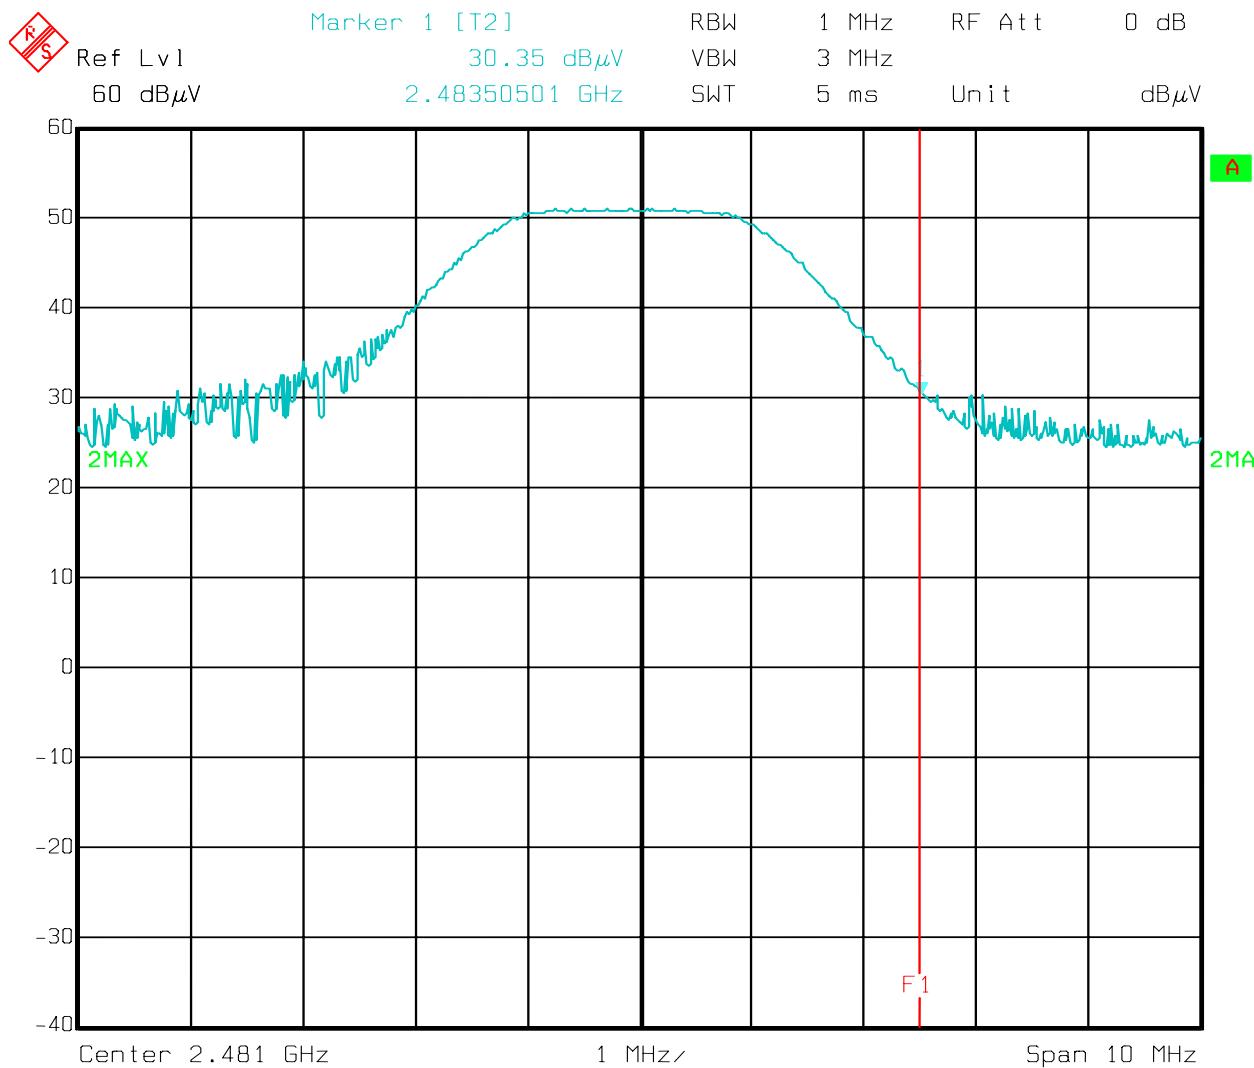

Peak @ 2483.5MHz

= 30.4 + 33.2 dB Correction factor = 63.6 dB μ V

Peak Limit

= 74 dB μ V

Average @ 2483.5MHz

= Peak – Duty Cycle Correction Factor

= 63.6 – 20 dB

= 43.6 dB μ V

Average Limit

= 54 dB μ V