

# RADIO TEST REPORT

No. 1707651STO-003 Ed. 2

## RF performance

### EQUIPMENT UNDER TEST

Equipment : DAS Remote  
Type / model : DDH-2600  
Manufacturer : Deltanode AB  
Tested by request of : Deltanode AB

### SUMMARY

Referring to the emission limits and the operating mode during the tests specified in this report the equipment complies with the requirements according to

47 CFR part 2 subpart J, 47 CFR part 27 Subparts C and M  
RSS-131 Issue 3, RSS-199 Issue 3

Date of issue: 2017-04-20

Tested by:  Matti Virkki

Approved by:  Stefan Andersson

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2005). This report may not be reproduced other than in full, except with the prior written approval by Intertek Semko.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30

www.intertek.se

Registered in Sweden: No: SE556024059901, Registered office: As address

**Revision History**

| <b>Edition</b> | <b>Date</b>       | <b>Description</b>          |
|----------------|-------------------|-----------------------------|
| <b>1</b>       | <b>2017-04-20</b> | <b>First release</b>        |
| <b>2</b>       | <b>2017-07-03</b> | <b>Change of model name</b> |
|                |                   |                             |

**CONTENTS**

|   | <b>Page</b> |
|---|-------------|
| <b>1 CLIENT INFORMATION.....</b>  | <b>5</b>    |
| <b>2 EQUIPMENT UNDER TEST (EUT).....</b>  | <b>5</b>    |
| 2.1 IDENTIFICATION OF THE EUT ACCORDING TO THE MANUFACTURER/CLIENT DECLARATION..... | 5           |
| 2.2 ADDITIONAL HARDWARE INFORMATION ABOUT THE EUT.....                              | 6           |
| 2.3 PERIPHERAL EQUIPMENT .....  | 6           |
| 2.4 TEST SIGNALS .....  | 6           |
| 2.5 MODIFICATION DURING THE TESTS.....  | 6           |
| <b>3 TEST SPECIFICATIONS.....</b>   | <b>7</b>    |
| 3.1 STANDARDS .....   | 7           |
| 3.2 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS AND ACCREDITATION .....     | 7           |
| 3.3 TEST SITE.....  | 7           |
| 3.4 TEST CONDITIONS .....   | 7           |
| <b>4 TEST SUMMARY.....</b>  | <b>8</b>    |
| <b>5 AGC TRESHOLD, RF OUTPUT POWER AND LINEARITY.....</b>                           | <b>9</b>    |
| 5.1 REQUIREMENT .....   | 9           |
| 5.2 TEST SET-UP .....   | 9           |
| 5.3 TEST DATA.....  | 10          |
| <b>6 OCCUPIED BANDWIDTH INPUT VS OUTPUT COMPARISON.....</b>                         | <b>15</b>   |
| 6.1 REQUIREMENT .....   | 15          |
| 6.2 TEST SET-UP .....   | 15          |
| 6.3 TEST DATA.....  | 15          |
| 6.4 TEST EQUIPMENT .....  | 19          |
| <b>7 PASSBAND GAIN AND BANDWIDTH.....</b>   | <b>20</b>   |
| 7.1 REQUIREMENT .....   | 20          |
| 7.2 TEST SET-UP .....   | 20          |
| 7.3 TEST DATA.....  | 20          |
| <b>8 BAND EDGE EMISSION AND INTERMODULATION.....</b>                                | <b>22</b>   |
| 8.1 REQUIREMENT .....   | 22          |
| 8.2 TEST SET-UP .....   | 22          |
| 8.3 TEST DATA.....  | 22          |
| 8.4 TEST EQUIPMENT .....  | 30          |
| <b>9 CONDUCTED SPURIOUS EMISSION FROM ANTENNA PORT .....</b>                        | <b>31</b>   |
| 9.1 REQUIREMENT .....   | 31          |
| 9.2 TEST SET-UP .....   | 31          |
| 9.3 TEST DATA.....  | 31          |
| <b>10 RADIATED SPURIOUS EMISSION.....</b>   | <b>45</b>   |
| 10.1 TEST SET-UP .....  | 45          |
| 10.2 TEST CONDITIONS .....  | 45          |
| 10.3 REQUIREMENT .....  | 46          |
| 10.4 TEST RESULTS .....   | 47          |
| 10.5 TEST EQUIPMENT .....   | 51          |

|           |                                      |           |
|-----------|--------------------------------------|-----------|
| <b>11</b> | <b>FREQUENCY STABILITY .....</b>     | <b>52</b> |
| 11.1      | REQUIREMENT .....                    | 52        |
| 11.2      | TEST SET-UP AND TEST PROCEDURE ..... | 52        |
| 11.3      | TEST RESULTS .....                   | 52        |
| 11.4      | TEST EQUIPMENT .....                 | 52        |
| <b>12</b> | <b>MEASUREMENT UNCERTAINTY .....</b> | <b>53</b> |

## 1 CLIENT INFORMATION

The EUT has been tested by request of

Company: Deltanode AB  
Hammarby fabriksväg 61 6tr  
120 33 Stockholm  
Sweden

Name of contact: Daniel Kerek

## 2 EQUIPMENT UNDER TEST (EUT)

### 2.1 Identification of the EUT according to the manufacturer/client declaration

Equipment: DAS Remote

Tested Model: DDH-2600

Brand name: Deltanode

Serial number: 99996

Manufacturer: Deltanode AB

Transmitter frequency range: 2620 – 2690 MHz

Receiver frequency range: 2500 – 2570 MHz

Frequency agile or hopping:  Yes  No

Antenna:  Internal antenna  External antenna

Antenna connector:  None, internal antenna  Yes, type N

Rating RF output power: +43 dBm rms

Rated gain: +60dB

Type of modulation: Tested with GMSK, QPSK

Temperature range:  Category I (General): -20°C to +55°C  
 Category II (Portable equipment): -10°C to +55°C  
 Category III (Equipment for normal indoor use): +5°C to +35°C  
 Other: -30°C to +55°C

Power rating: 120 V 60 Hz

Transmitter standby mode supported:  Yes  No

## 2.2 Additional hardware information about the EUT

The EUT consists of the following units:

| Parameter         | Value   | Unit |
|-------------------|---|------|
| Unit type         | Remote Unit (FOR)                               |      |
| RU/FOR Artno      | DDH 196/1-C:w ver 0.0.1 Ser:99996 Week:2017W08  |      |
| FOR Unit          | FOR 101 Rev:1.2.1 Week:2014w31 Ser:3139         |      |
| SW System version | R3.11-r.3.8.18.3 (cbuid 36) System type:2600x1M |      |
| FOR Board         | KS22.1 R1D 2014w31 BH03139                      |      |
| FOR MAC addr      | 00:1A:26:00:3A:69                               | hex  |
| FOR UL Wavelength | 1310  | nm   |
| VGA 1             | KS55.21 P1C 2016W33 LH00113                     |      |
| MPI 1             | KS45.8 R1A 2017W03 DH00525                      |      |
| HPA 1             | HPT2600 Rev:0.0.1 2016W6                        |      |
| LPA 1             | ADL1-2600-030-070 SN:SMD087-0002                |      |

## 2.3 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

| Equipment               | Manufacturer / Type                                     |
|-------------------------|---|
| Fiber optical interface | Deltanode AB / DOI 302 Rev:1.3.1 Week:2017w09 Ser:10471 |
| Laptop PC               | Dell  |
| Ethernet hub            | Deltanode AB  |

## 2.4 Test signals

Continuous transmission on full power  
As requested in KDB 935210 D05 V01r01

Narrow band signal: GSM with GMSK modulation  
Wide band signal: AWGN 4.11 MHz 99% OBW

## 2.5 Modification during the tests

No modifications were made during the testing.

### 3 TEST SPECIFICATIONS

#### 3.1 Standards

CFR 47 Part 2 Subpart J, 47 DFR Part 27 Subpart C and M  
RSS-131 Issue 3, RSS-199 Issue 3

Test methods in:

KDB 935210 D05 Industrial booster Basic measurement

ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in License Radio Services

#### 3.2 Additions, deviations and exclusions from standards and accreditation

RSS-199 is not within Intertek Semko AB's scope of accreditation.  
No other additions, deviations or exclusions from standards or accreditation were made

#### 3.3 Test site

Measurements were performed at:

Intertek Semko AB.  
Torshamnsgatan 43,  
P.O. Box 1103  
SE-164 22 Kista

Intertek Semko AB is a FCC listed test site with site registration number 90913  
Intertek Semko AB is a Industry Canada listed test facility with IC assigned code 2042G

#### 3.4 Test conditions

If not additionally specified, the tests were performed under the following environmental conditions:

| Parameter            | Normal | Extreme   |
|----------------------|--------|-----------|
| Supplying voltage, V | 120    | 85 - 273  |
| Air temperature, °C  | 20 24  | -30 - +50 |

#### 4 TEST SUMMARY

The results in this report apply only to the tested sample:

| Requirement   | Description   | Result | Section in report | Note |
|---|---|--------|-------------------|------|
| §2.1046<br>§27.50<br><br>RSS-GEN 6.12<br>RSS-131 5.2.3<br>RSS-199 4.4 | RF output power, AGC threshold, linearity and amplifier gain                        | Pass   | 5                 |      |
| §2.1047<br><br>RSS-131 5.2.2<br>RSS-199 4.1                           | Modulation characteristics input versus output signal comparison                    | Pass   | 6                 |      |
| §2.1049<br><br>RSS-GEN 6.6<br>RSS-131 5.2.1<br>RSS-199 4.2            | Occupied bandwidth  | Pass   | 7                 |      |
| §2.1051<br><br>RSS-GEN 6.13<br>RSS-199 4.5                            | Spurious emissions, Intermodulation and band edge measurements at antenna terminals | Pass   | 8 - 9             |      |
| §2.1053<br><br>RSS-GEN 6.13<br>RSS-199 4.5                            | Field strength of spurious radiation  | Pass   | 10                |      |
| §2.1055<br><br>RSS-GEN 6.11<br>RSS-131 5.2.4<br>RSS-199 6.4           | Frequency stability   | Pass   | 11                |      |

NT = Not Tested, by request of the Client

NA = Not Applicable



## 5 AGC TRESHOLD, RF OUTPUT POWER AND LINEARITY

|               |            |                     |            |
|---------------|------------|---------------------|------------|
| Date of test: | 2017-04-03 | Test location:      | EMC Center |
| EUT Serial:   | 99996      | Ambient temp. °C    | 21         |
| Tested by:    | MTV        | Relative humidity % | 36         |
| Test result:  | Pass       | Margin:             | 20.0 dB    |

### 5.1 Requirement

CFR 47 §2.1049, §27.50(h), KDB 935210 D05 clauses 3.2 and 3.5  
 RSS-131 Clauses 5.2.3 and 6.2, RSS-199 clause 4.4 SRSP-517 clause 5.1

Fixed and base stations (except fixed subscriber stations) are limited to a maximum permissible equivalent isotropically radiated power (e.i.r.p.) of 1640 W/MHz (i.e. no more than 1640 W e.i.r.p. in any 1 MHz band segment) with an antenna height above average terrain (HAAT) up to 300 metres.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

### 5.2 Test set-up

Signal generator was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.  
 The EUT's output port was connected to signal analyser via rf cables and 30 dB attenuator.  
 A PC was connected to FOI via Ethernet hub. The PC was then used to control the EUT.

The output power was measured with EUT amplification set to 60 dB and input signal was increased until Automatic Gain Control threshold was reached but did not affect the gain. The EUT output response was monitored when input signal level was increased and the response is linear until AGC threshold is reached.

The test was then repeated with 3 dB higher input signal level so that AGC limited the gain.

The peak power was measured using signal analyser's CCDF measurement function. The value that is exceeded less than 0.1% time is reported


### 5.3 Test data

#### GSM

| Frequency<br>MHz | Average<br>power<br>dBm | Automatic level<br>control | Limit<br>EIRP<br>dBm | Peak to avg<br>ratio<br>dB | Peak to avg<br>ratio limit<br>dB |
|------------------|-------------------------|----------------------------|----------------------|----------------------------|----------------------------------|
| 2635.45          | 41.95                   | Off                        | 62.15                | 0.04                       | 13                               |
| 2635.45          | 42.15                   | On                         | 62.15                | 0.27                       | 13                               |


#### WCDMA

| Frequency<br>MHz | Average<br>power<br>dBm | Automatic level<br>control | Limit<br>EIRP<br>dBm | Peak to avg<br>ratio | Peak to avg<br>ratio limit |
|------------------|-------------------------|----------------------------|----------------------|----------------------|----------------------------|
| 2635.45          | 41.97                   | Off                        | 62.15                | 8.9                  | 13                         |
| 2635.45          | 41.85                   | On                         | 62.15                | 8.9                  | 13                         |

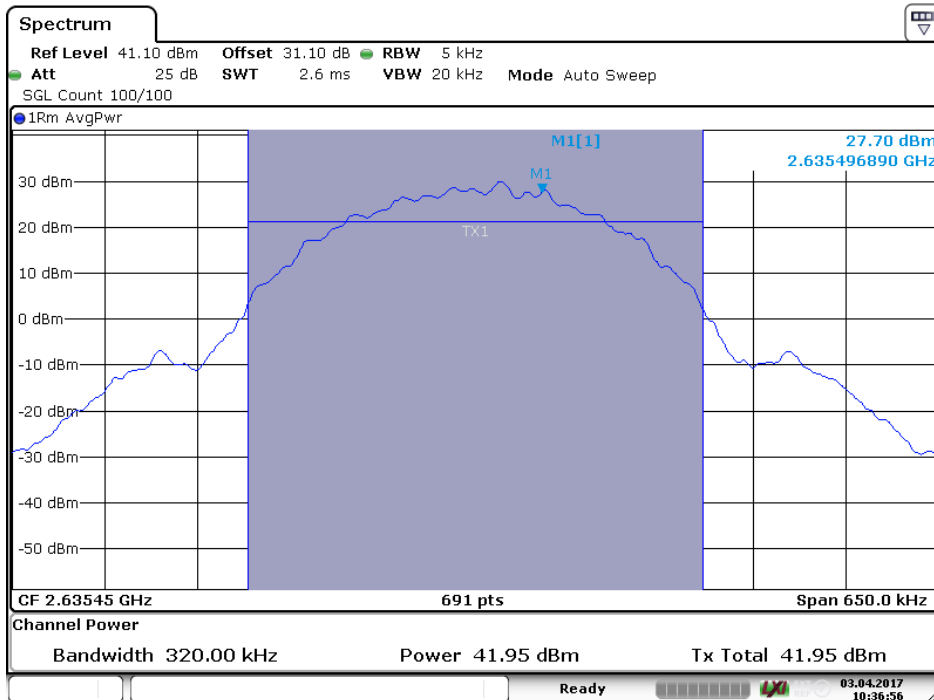


Date: 3 APR 2017 10:36:56

**GSM AGC off**

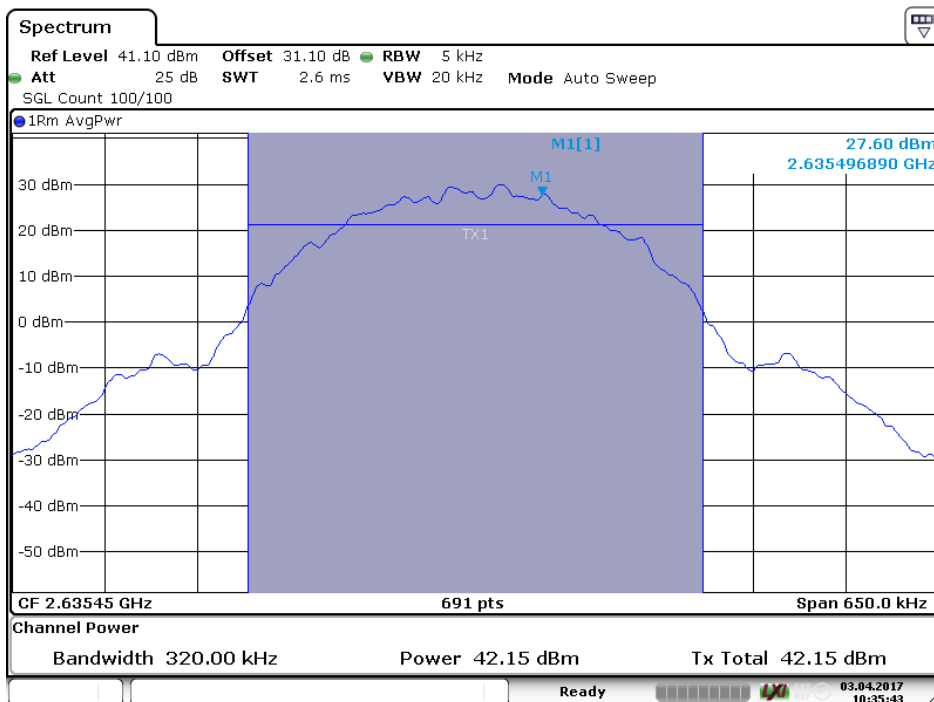


Date: 3 APR 2017 10:35:44

**GSM AGC on**

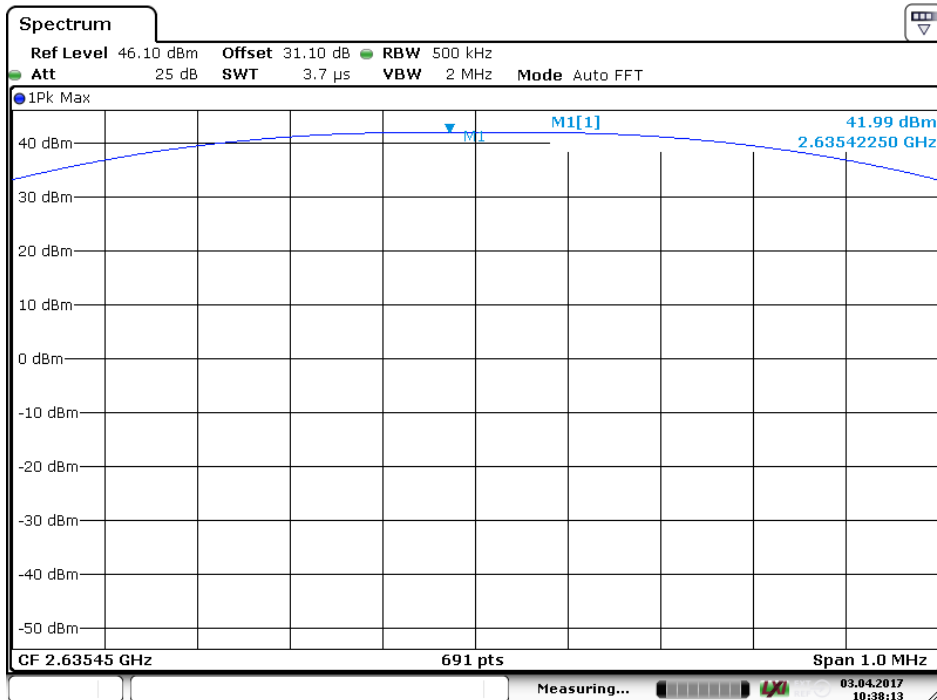


Date: 3 APR 2017 10:38:13

**GSM AGC off**

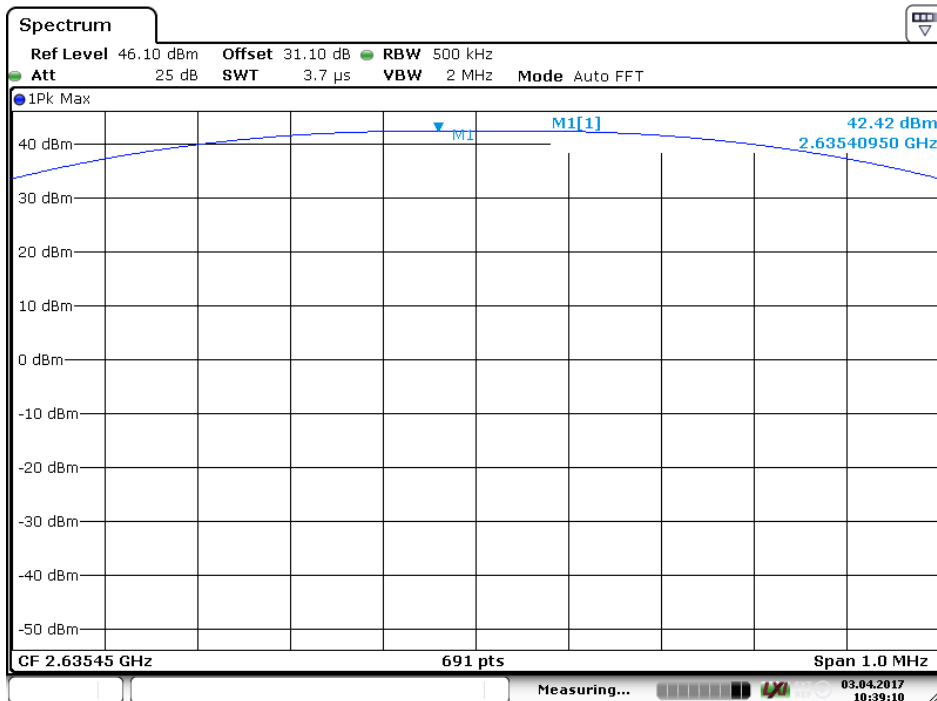


Date: 3 APR 2017 10:39:10

**GSM AGC on**

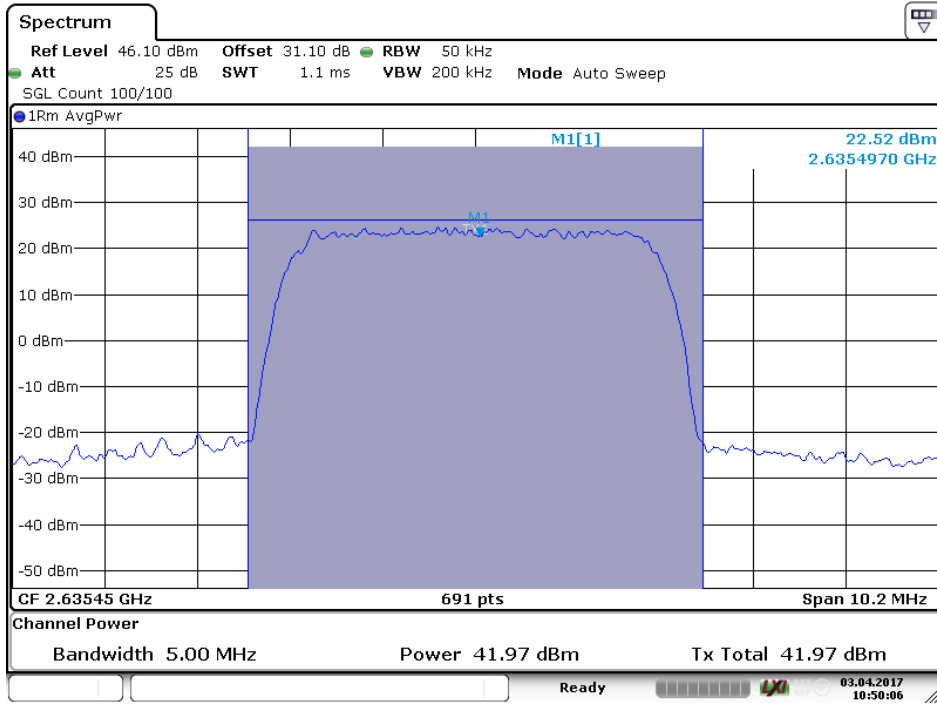

Date: 3 APR 2017 10:50:07

AWGN AGC off

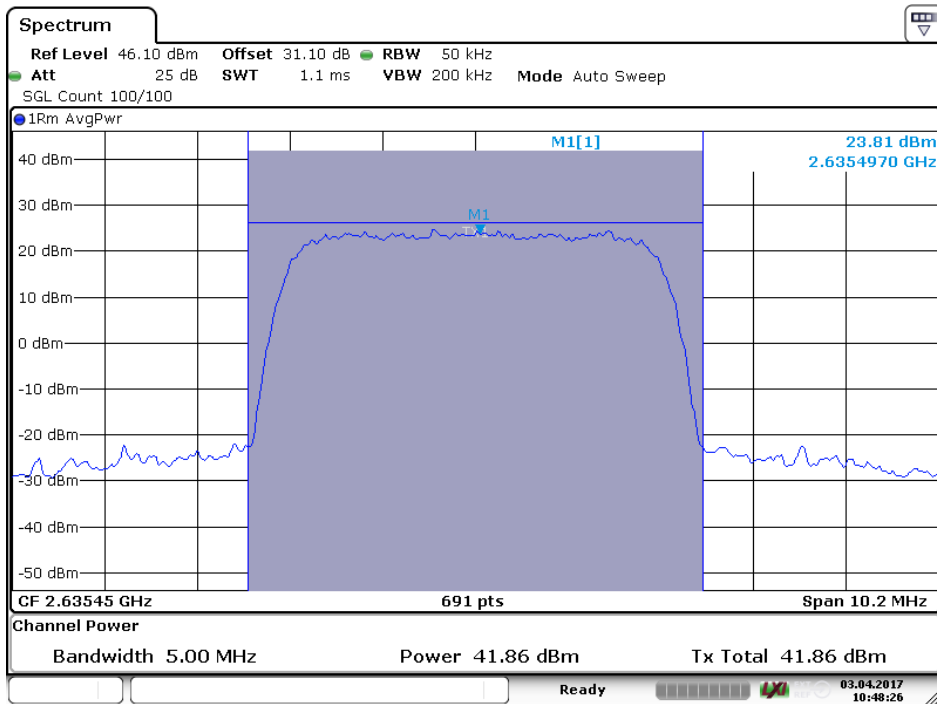

Date: 3 APR 2017 10:48:26

AWGN AGC on

## Test equipment

| Equipment type    | Manufacturer    | Model               | Inv. No. | Cal. due date |
|-------------------|-----------------|---------------------|----------|---------------|
| Spectrum analyser | Rohde & Schwarz | FSV                 | 32594    | 7/2017        |
| Rf-attenuator     | Narda           | 776B-10             | 8337     | 7/2017        |
| Rf-attenuator     | Huber Suhner    | 5920_N-50-010/199_N | 32697    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39076    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39077    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39079    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMIQ03B             | 12792    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMBV100             | 32593    | 7/2017        |

## 6 OCCUPIED BANDWIDTH INPUT VS OUTPUT COMPARISON

|               |               |                   |                 |
|---------------|---------------|-------------------|-----------------|
| Date of test: | 2017-04-03/17 | Test location:    | Wireless centre |
| EUT Serial:   | 99992         | Ambient temp.     | 21°C            |
| Tested by:    | MTV           | Relative humidity | 30%             |
| Test result:  | Pass          | Margin:           | --              |

### 6.1 Requirement

KDB 935219 D05

The spectral shape of rf-output shall look similar to input in all modulations.

RSS-131 5.2.2

The spectral growth of the 26 dB bandwidth of the output signal shall be less than 5% of the input signal spectrum.

### 6.2 Test set-up

Signal generator was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.

The EUT's output port was connected to spectrum analyser via rf cables and 30 dB attenuator. A PC was connected to FOI via Ethernet hub. The PC was then used to control the EUT.


The 26 dB occupied bandwidth was measured using spectrum analyser's occupied bandwidth function.

The EUT was set to use 60 dB gain and input signal was adjusted so that Automatic Gain Control did not yet limit the output power.

The test was then repeated with higher input signal level so that AGC limited the output power. Finally occupied bandwidth of signal generator was measured and input signal output was compared to EUT output.


### 6.3 Test data

| Frequency MHz | Signal type | 26 dB Occupied band width Input (kHz) | 26 dB Occupied band width output (kHz) | 26 dB Occupied band width output with AGC (kHz) | Difference % |
|---------------|-------------|---------------------------------------|--|---|--------------|
| 2635.45       | GSM         | 314.69                                | 312.89                                 | 313.49  | -0.05%       |
| 2635.45       | AWGN        | 4835                                  | 4865                                   | 4825  | +0.07%       |

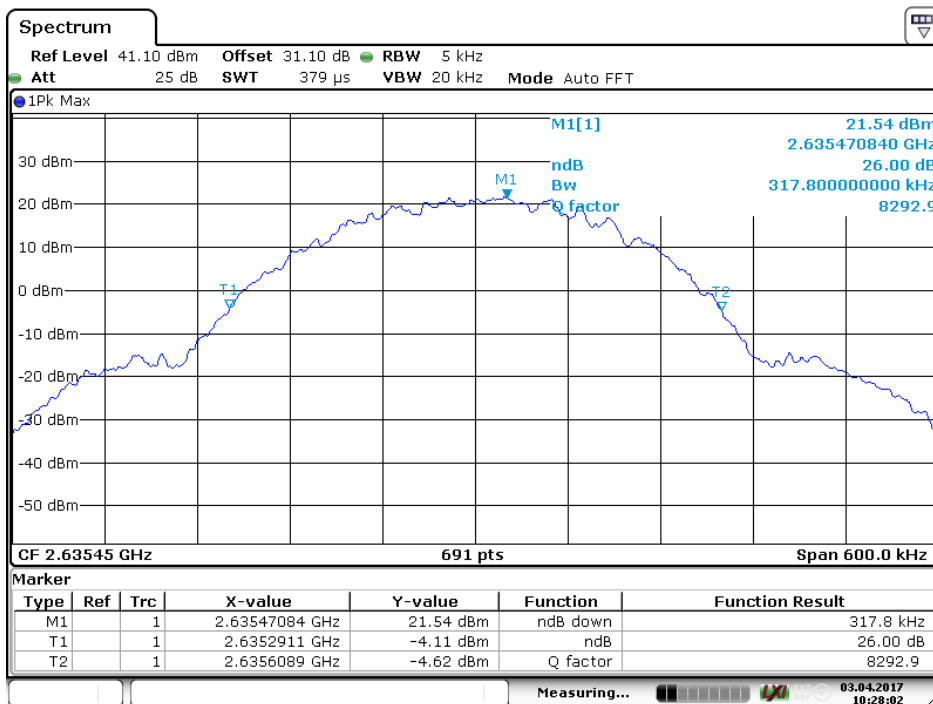

Date: 3 APR 2017 10:28:02


**Occupied bandwidth GSM input**

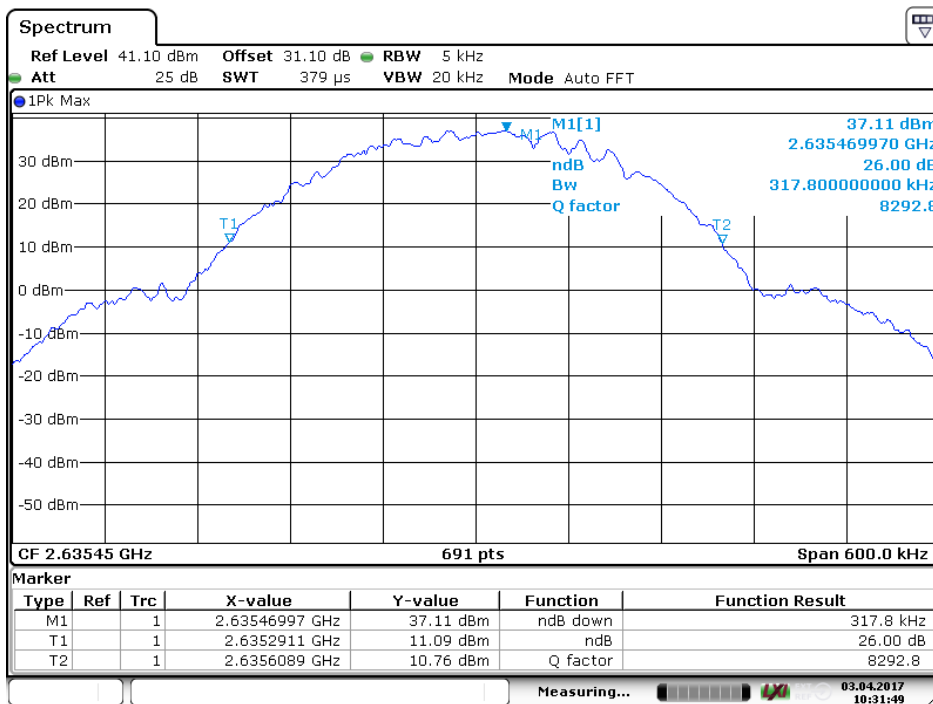

Date: 3 APR 2017 10:31:50


**Occupied bandwidth GSM agc off**



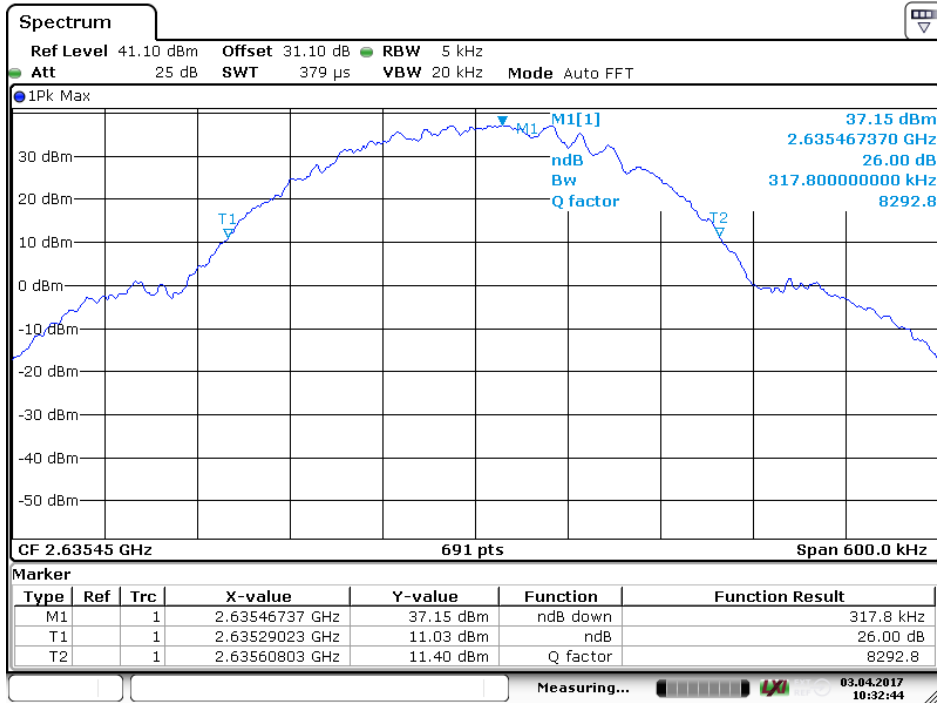


Date: 3 APR 2017 10:32:44

Occupied bandwidth GSM agc on

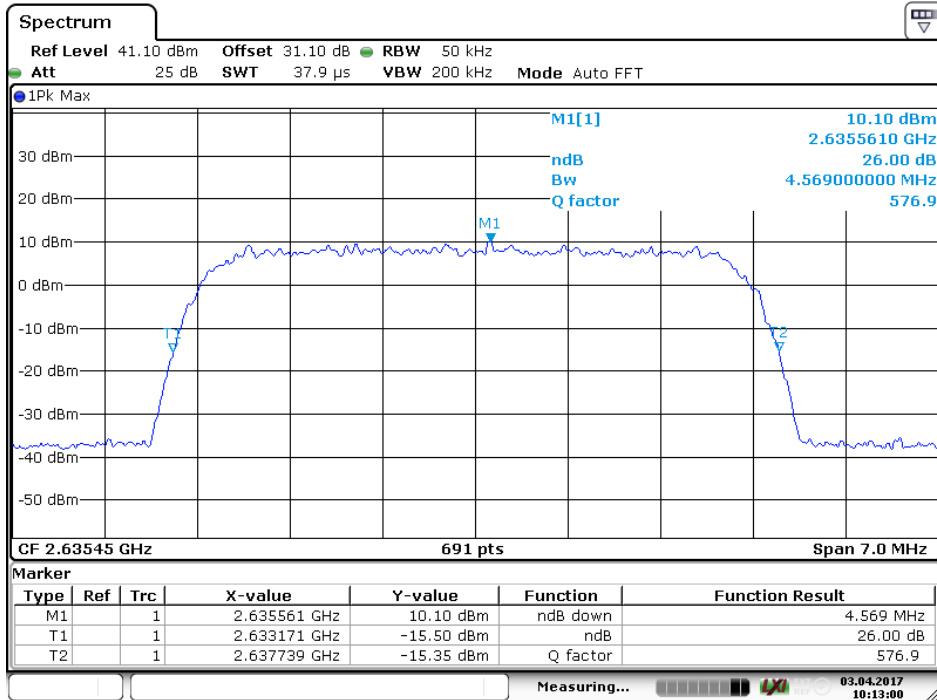


Date: 3 APR 2017 10:13:00

**AWS Occupied bandwidth WCDMA input**

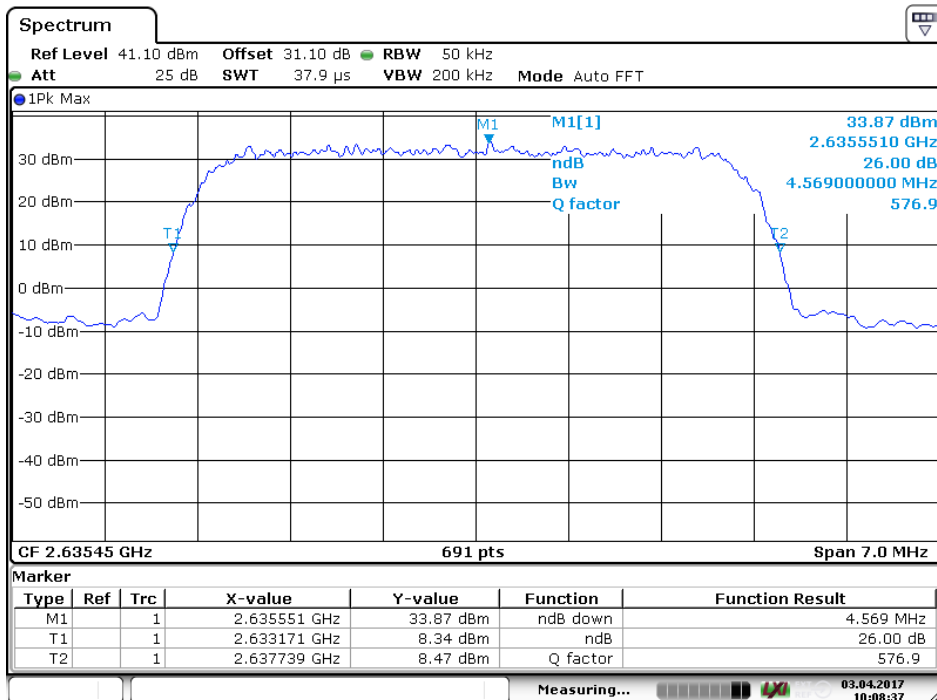

Date: 3 APR 2017 10:08:37

**AWS Occupied bandwidth WCDMA agc off**

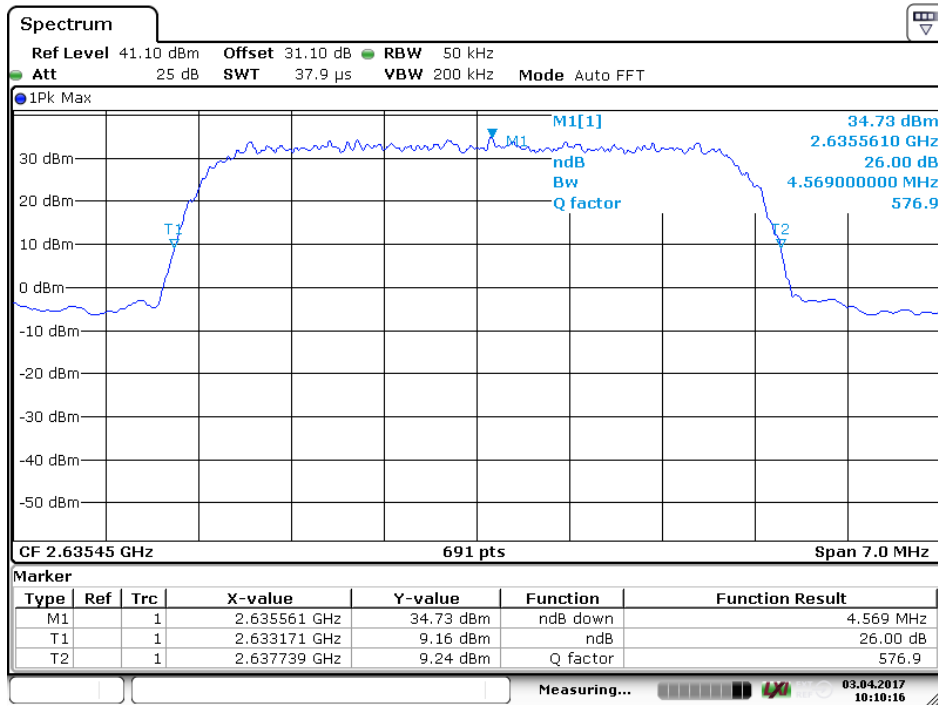

Date: 3 APR 2017 10:10:16

AWS Occupied bandwidth WCDMA agc on

### 6.4 Test equipment

| Equipment type    | Manufacturer    | Model               | Inv. No. | Cal. due date |
|-------------------|-----------------|---------------------|----------|---------------|
| Spectrum analyser | Rohde & Schwarz | FSV                 | 32594    | 7/2017        |
| Rf-attenuator     | Narda           | 776B-10             | 8337     | 7/2017        |
| Rf-attenuator     | Huber Suhner    | 5920_N-50-010/199_N | 32697    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39076    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39077    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39079    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMIQ03B             | 12792    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMBV100             | 32593    | 7/2017        |

## 7 PASSBAND GAIN, OCCUPIED BANDWIDTH AND OUT OF BAND REJECTION

|               |            |                   |                 |
|---------------|------------|-------------------|-----------------|
| Date of test: | 2017-04-03 | Test location:    | Wireless centre |
| EUT Serial:   | 99995      | Ambient temp.     | 24°C            |
| Tested by:    | MTV        | Relative humidity | 46%             |
| Test result:  | Pass       | Margin:           | -               |

### 7.1 Requirement

RSS-131 clause 5.2.1

The passband gain shall not exceed the nominal gain by more than 1.0 dB. The 20 dB bandwidth shall not exceed the nominal bandwidth that is stated by the manufacturer. Outside of the 20 dB bandwidth, the gain shall not exceed the gain at the 20 dB point.

### 7.2 Test set-up

Signal generator was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.


The EUT's output port was connected to spectrum analyser via rf cables and 30 dB attenuator. A PC was connected to FOI via Ethernet hub. The PC was then used to control the EUT.

### 7.3 Test data

| Frequency MHz | Signal type | Occupied 20 dB band width (MHz) |
|---------------|-------------|---------------------------------|
| 2600          | CW          | 96.48                           |

The pass band maximum gain is measured from FOI unit's rf input to EUT output. This is not same as EUT's amplifier gain.

| Frequency MHz | Gen. out (dBm) | Pathloss (dB) | Measured output (dBm) | Gain dB |
|---------------|----------------|---------------|-----------------------|---------|
| 2635.45       | -26.5          | 1.1           | 42.0                  | 69.6 dB |

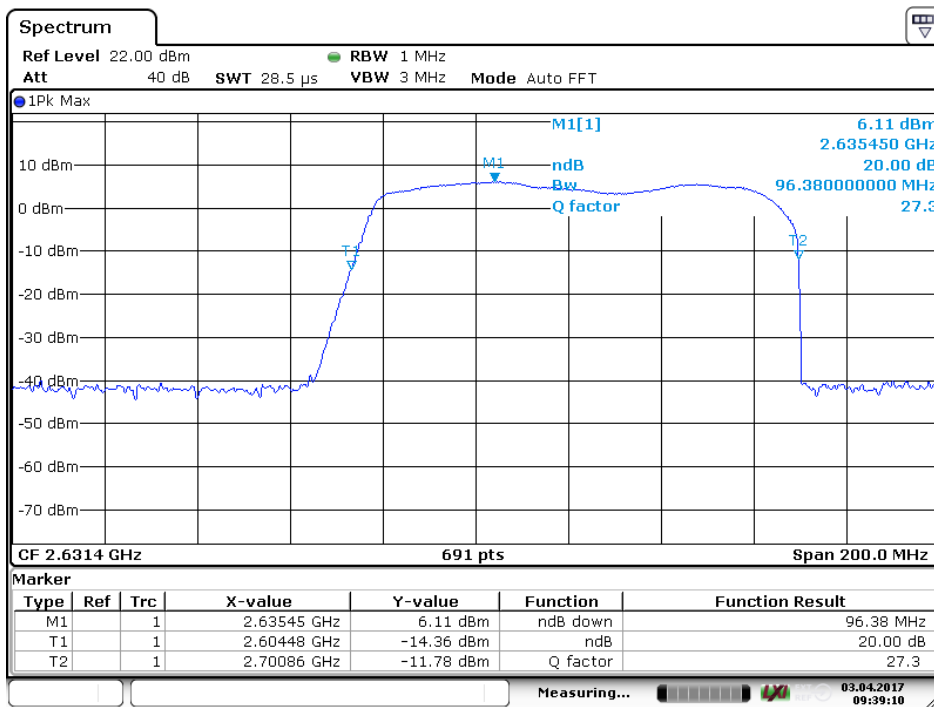

Date: 3 APR 2017 09:39:11

Passband bandwidth

**8 BAND EDGE EMISSION AND INTERMODULATION**

|               |            |                   |                 |
|---------------|------------|-------------------|-----------------|
| Date of test: | 2017-04-05 | Test location:    | Wireless centre |
| EUT Serial:   | 99996      | Ambient temp.     | 21°C            |
| Tested by:    | MTV        | Relative humidity | 30%             |
| Test result:  | Pass       | Margin:           | 2.3 dB          |

**8.1 Requirement**

§27.53 (m) (2)

For digital base stations, the attenuation shall be not less than  $43 + 10 \log (P)$  dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area.


RSS-199 section 4.5 a

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

**8.2 Test set-up**


2 Signal generators were connected to power combiner who was then connected to the FOI unit. Signals were placed on two lowest adjacent channels of the band. The test was repeated on 2 highest channels.

**8.3 Test data**

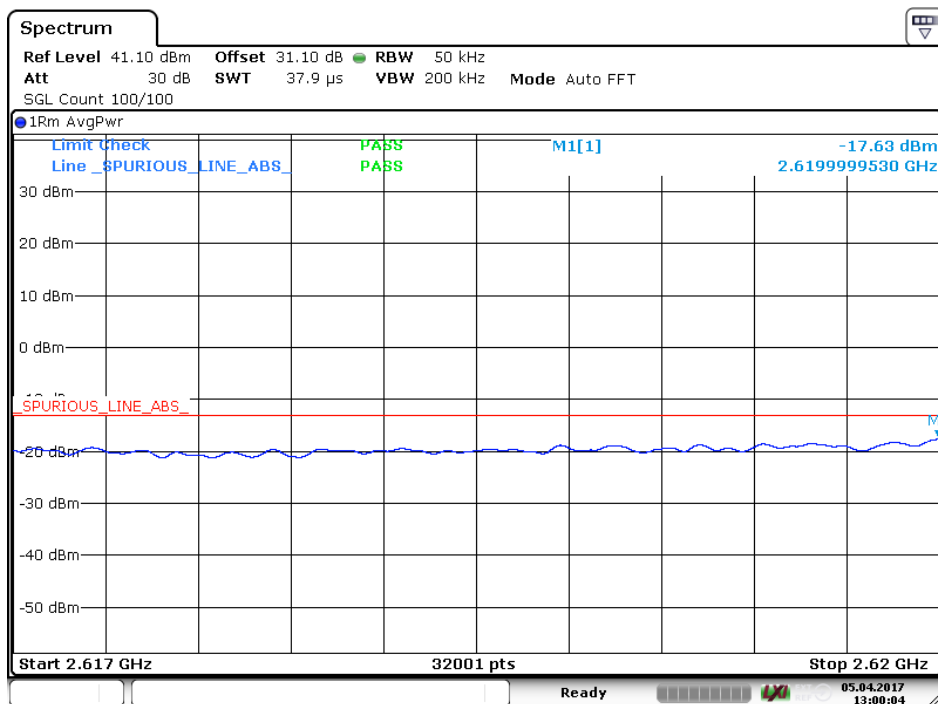


Date: 5 APR 2017 13:00:04

2 AWGN signals lower band edge AGC off

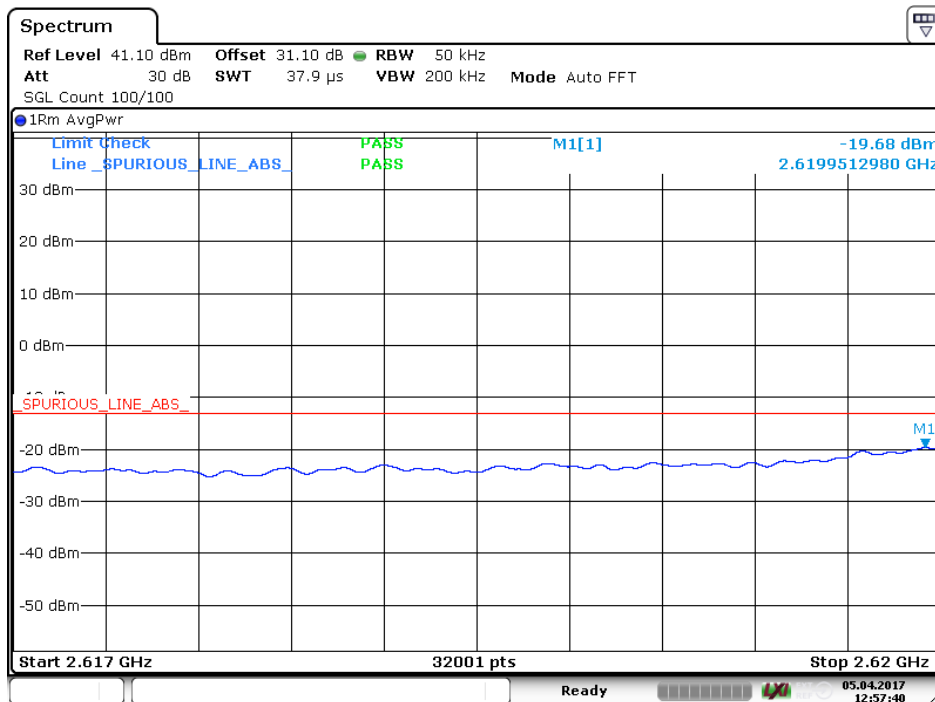


Date: 5 APR 2017 12:57:40

2 AWGN signals lower band edge AGC on

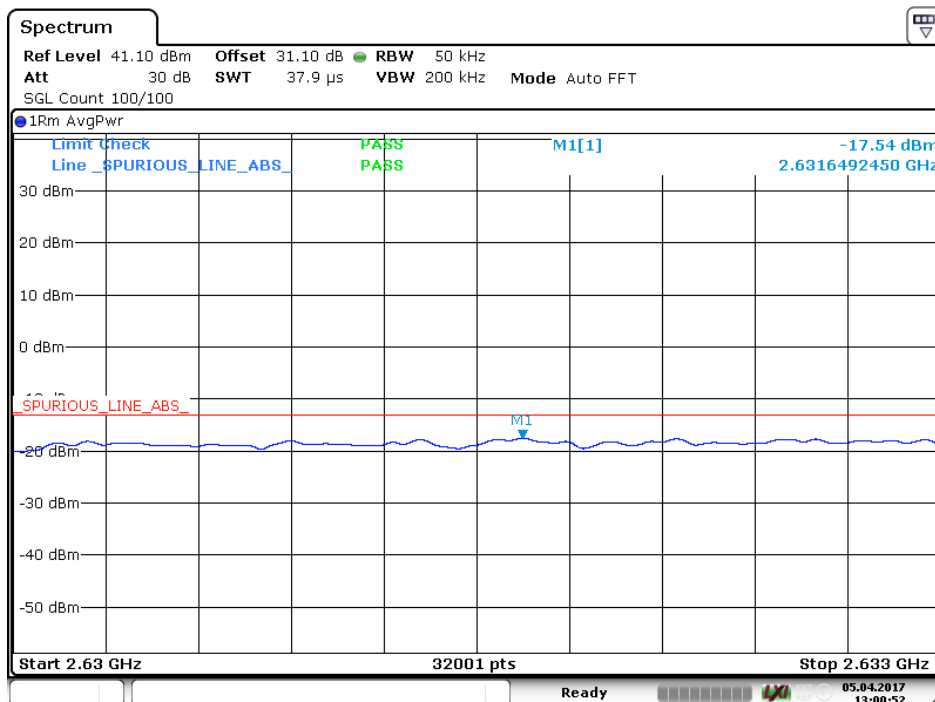


Date: 5 APR 2017 13:00:53

2 AWGN signals lower band edge AGC off in band

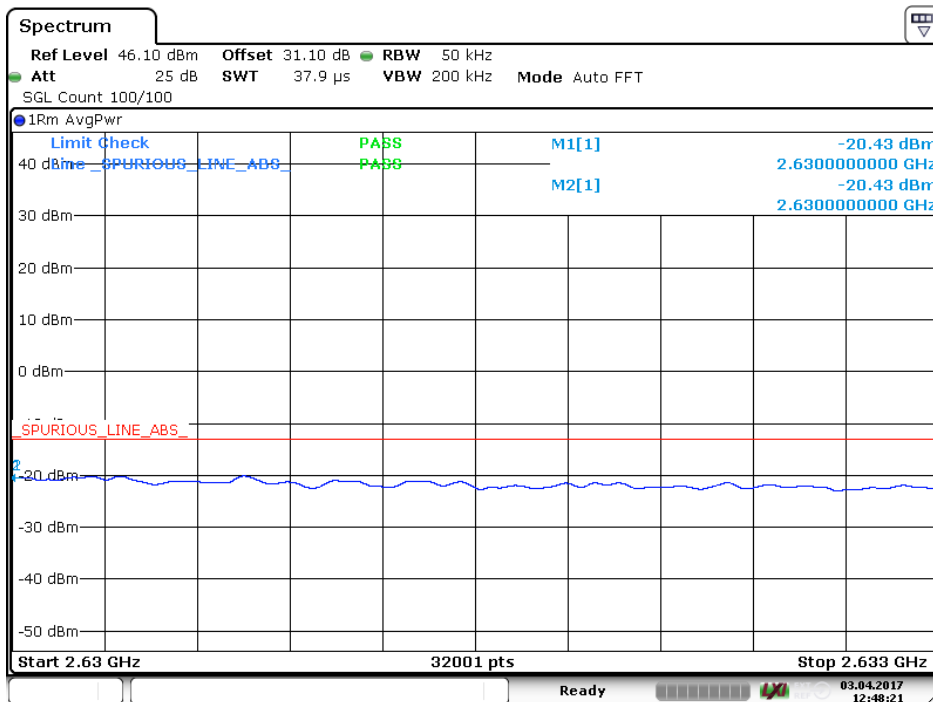

Date: 3 APR 2017 12:48:21


2 AWGN signals lower band edge AGC on in band

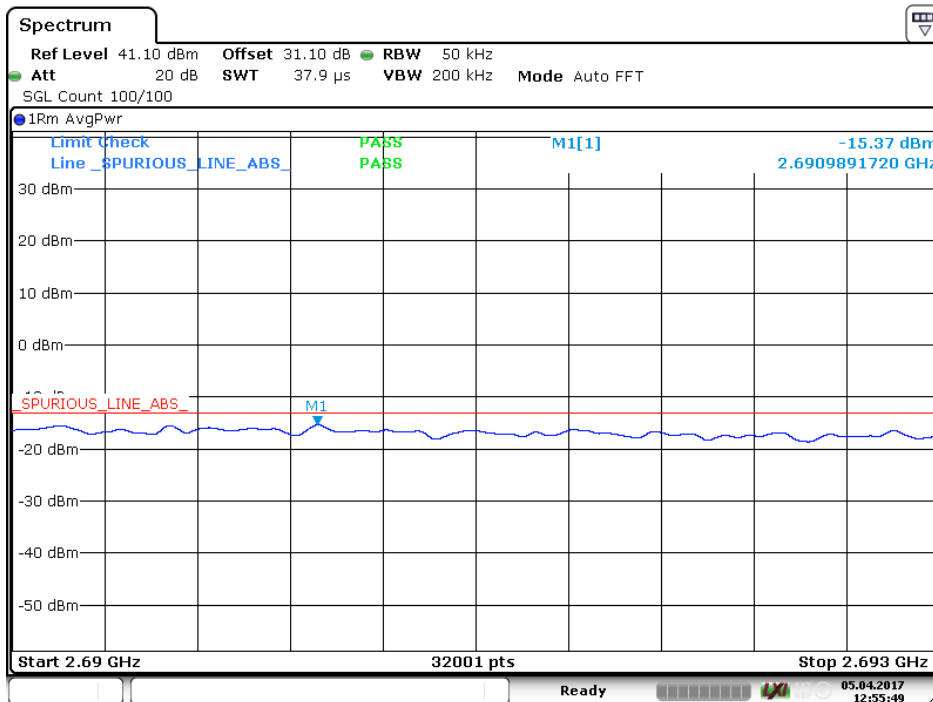

Date: 5 APR 2017 12:55:49


2 AWGN signals upper band edge AGC off



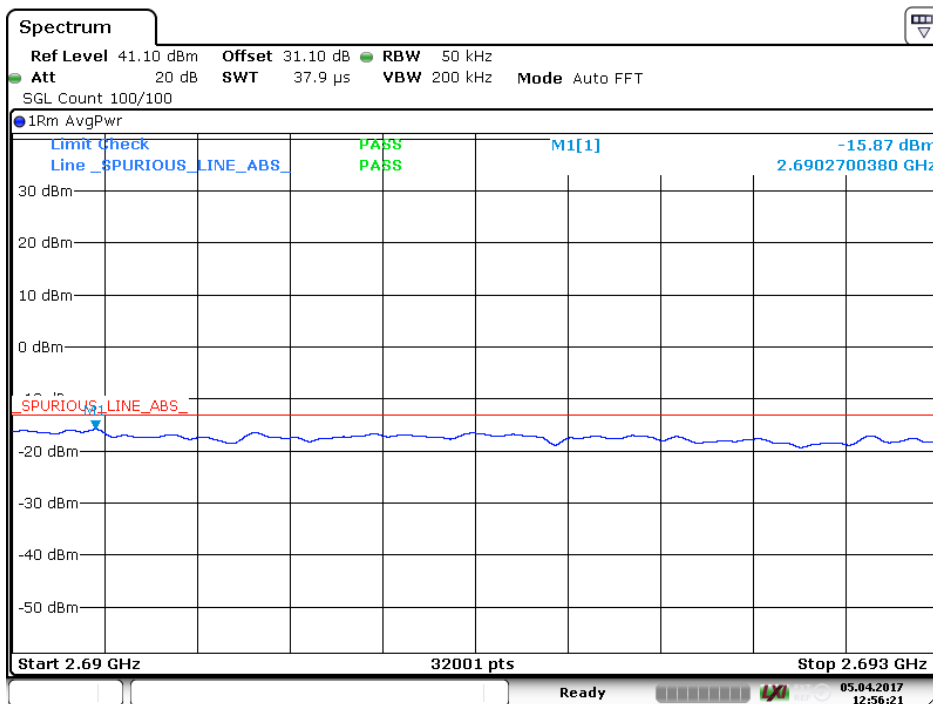


Date: 5 APR 2017 12:56:21

2 AWGN signals upper band edge AGC on

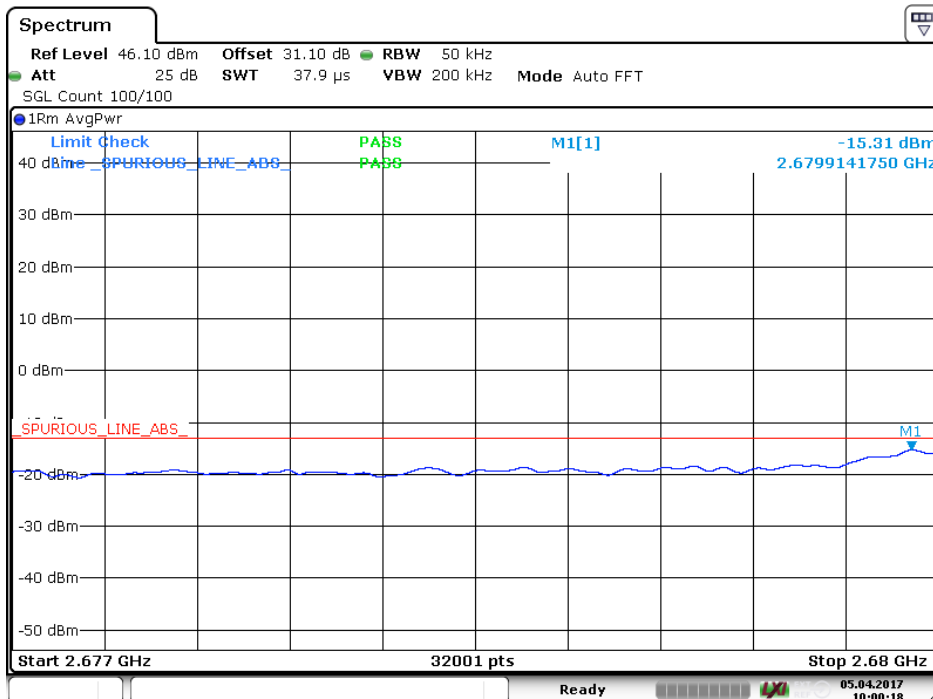


Date: 5 APR 2017 10:00:18

2 AWGN signals upper band edge AGC off in band

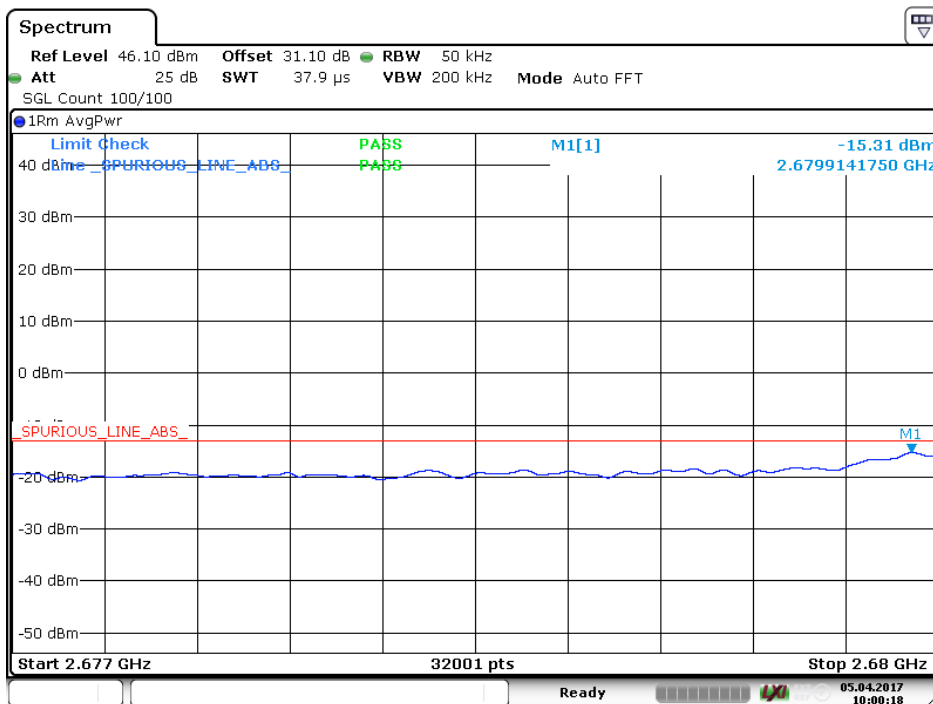


Date: 5 APR 2017 10:00:18

2 AWGN signals upper band edge AGC on in band

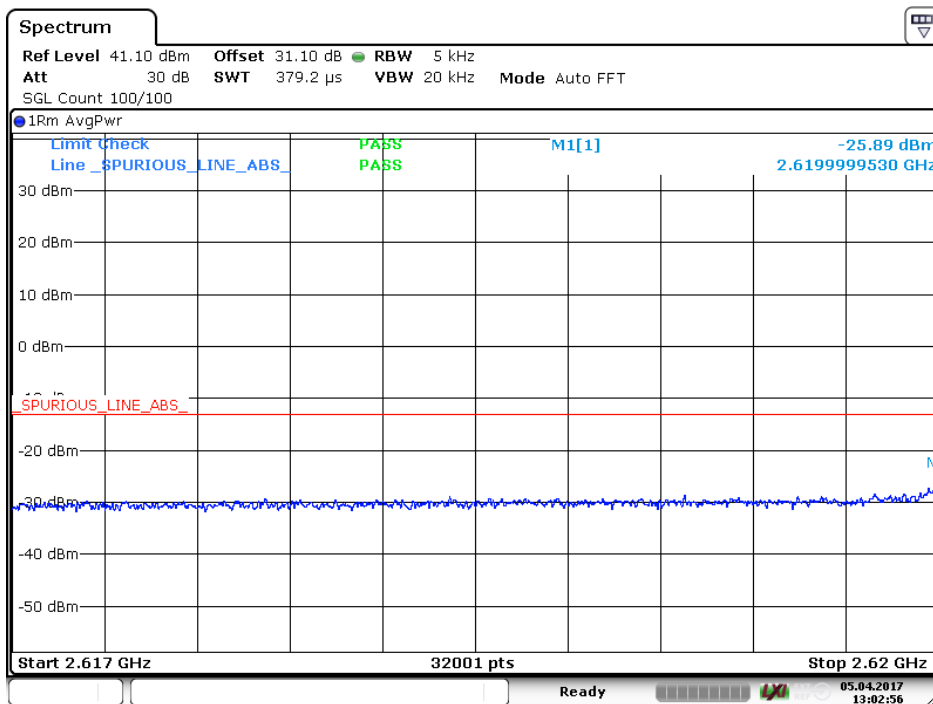


Date: 5 APR 2017 13:02:56

2 GSM signal on lower band edge AGC off

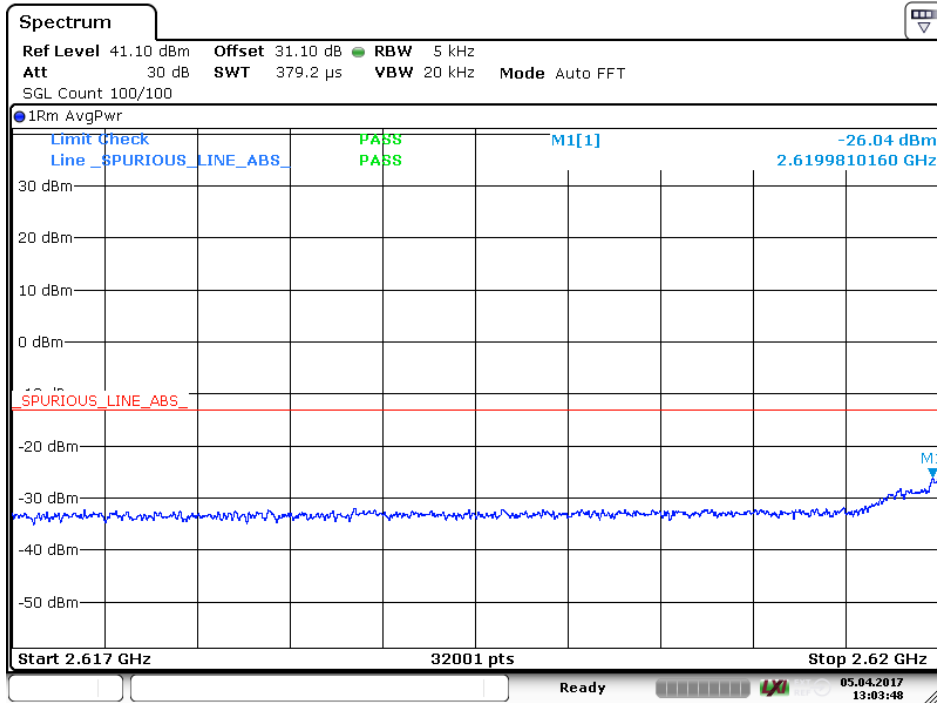


Date: 5 APR 2017 13:03:47

2 GSM signal on lower band edge AGC on

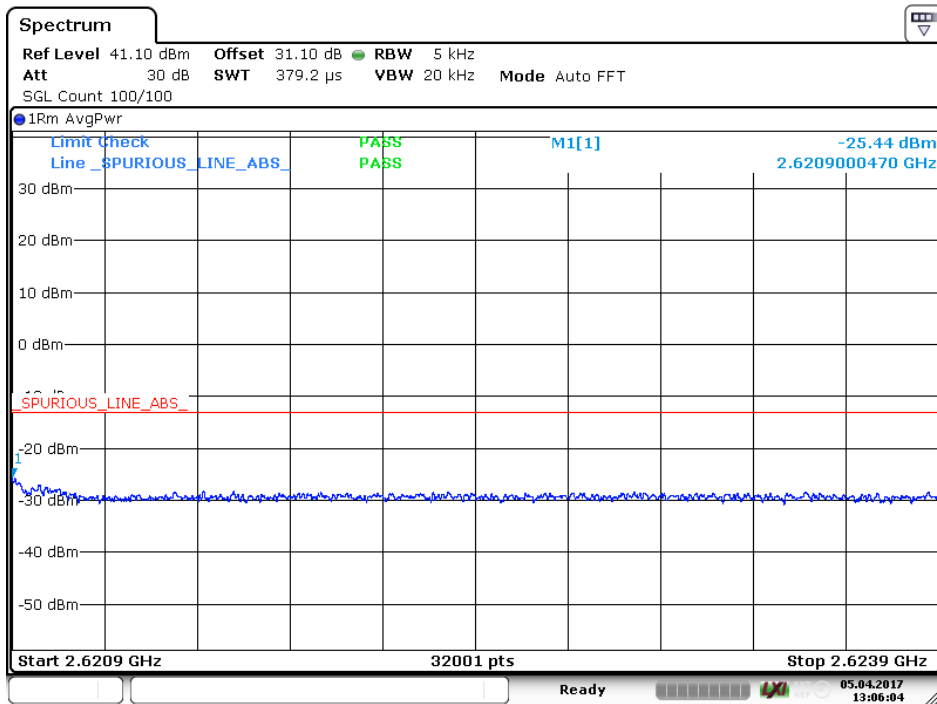


Date: 5 APR 2017 13:06:03

2 GSM signal on lower band edge AGC off in band

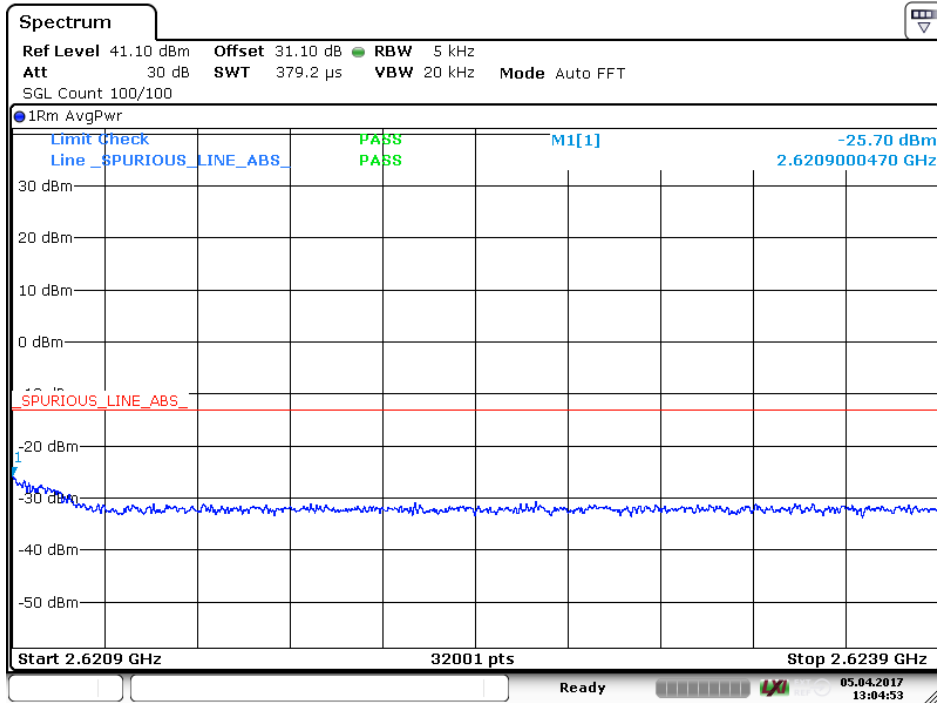


Date: 5 APR 2017 13:04:52

2 GSM signal on lower band edge AGC on in band

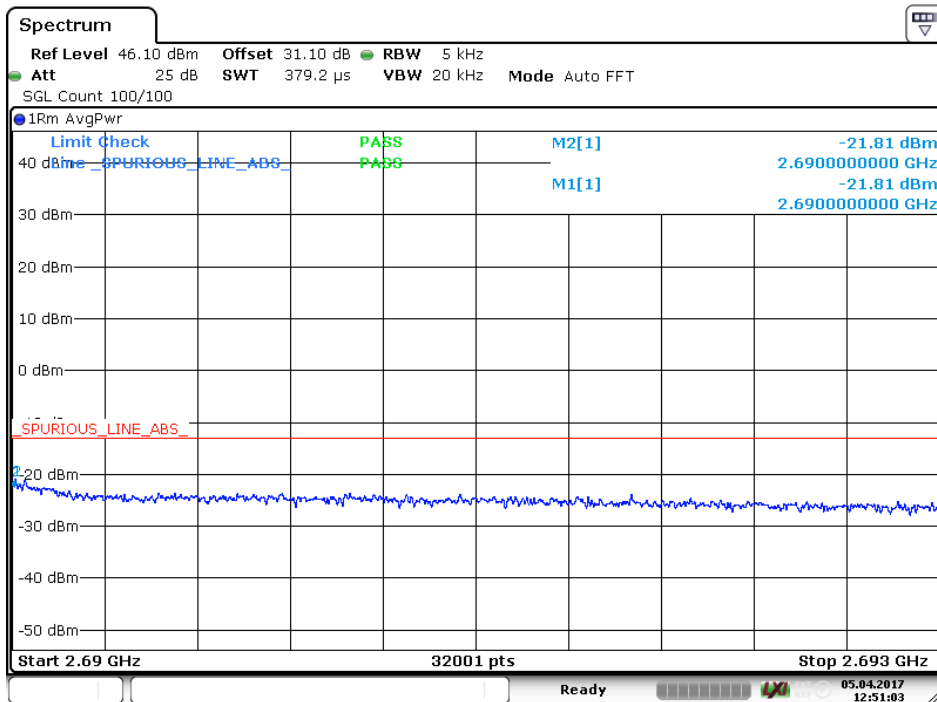


Date: 5 APR 2017 12:51:03

2 GSM signal on upper band edge AGC off

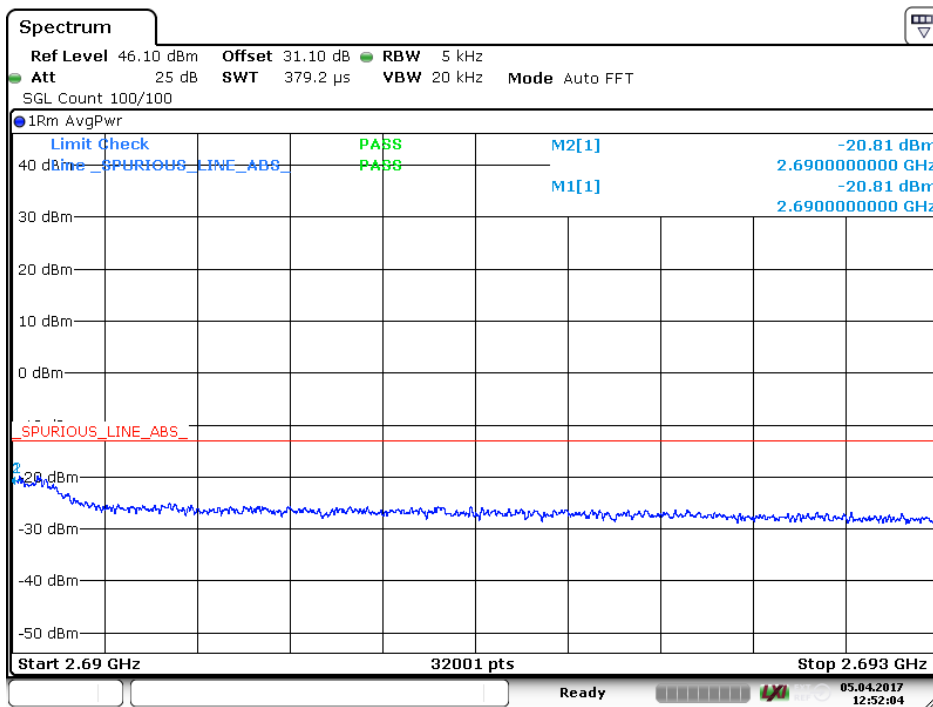


Date: 5 APR 2017 12:52:04

2 GSM signal on upper band edge AGC on

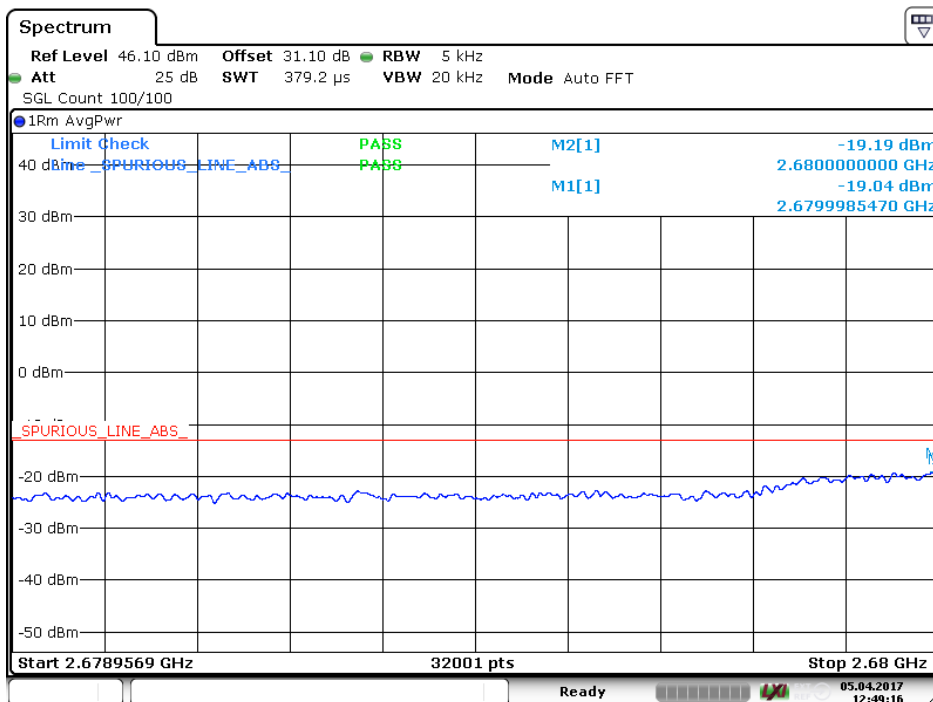

Date: 5 APR 2017 12:49:16

2 GSM signal on upper band edge AGC off in band

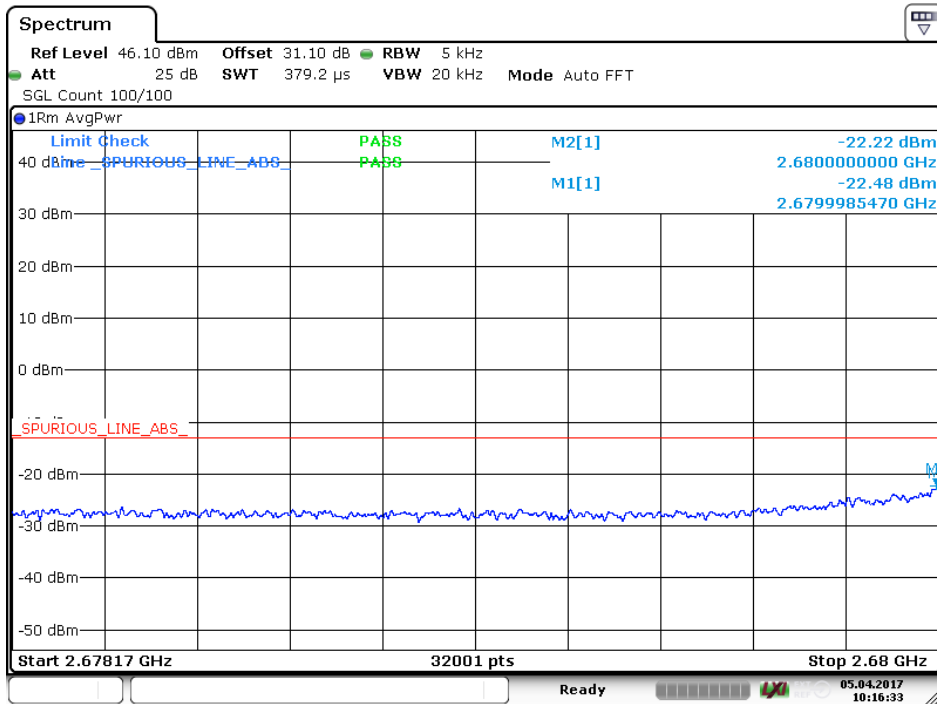

Date: 5 APR 2017 10:16:33

2 GSM signal on upper band edge AGC on in band

**8.4 Test equipment**

| Equipment type    | Manufacturer    | Model               | Inv. No. | Cal. due date |
|-------------------|-----------------|---------------------|----------|---------------|
| Spectrum analyser | Rohde & Schwarz | FSV                 | 32594    | 7/2017        |
| Rf-attenuator     | Narda           | 776B-10             | 8337     | 7/2017        |
| Rf-attenuator     | Huber Suhner    | 5920_N-50-010/199_N | 32697    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39076    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39077    | 7/2017        |
| Rf cable          | Huber Suhner    | Sucoflex 104PE      | 39079    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMIQ03B             | 12792    | 7/2017        |
| Signal generator  | Rohde & Schwarz | SMBV100             | 32593    | 7/2017        |

**9 CONDUCTED SPURIOUS EMISSION FROM ANTENNA PORT**

|               |            |                   |                 |
|---------------|------------|-------------------|-----------------|
| Date of test: | 2017-04-03 | Test location:    | Wireless centre |
| EUT Serial:   | 99995      | Ambient temp.     | 24              |
| Tested by:    | MTV        | Relative humidity | 36              |
| Test result:  | Pass       | Margin:           | 0.3 dB          |

**9.1 Requirement**

§27.53 (m) (2)

For digital base stations, the attenuation shall be not less than  $43 + 10 \log (P)$  dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area.

RSS-199 clause 4.5

Equipment shall comply with the following unwanted emission limits:


- a) for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$

**9.2 Test set-up**

Signal generator was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.

The EUT's output port was connected to spectrum analyser via rf cables and 30 dB attenuator. A PC was connected to FOI via Ethernet hub. The PC was then used to control the EUT.


**9.3 Test data**

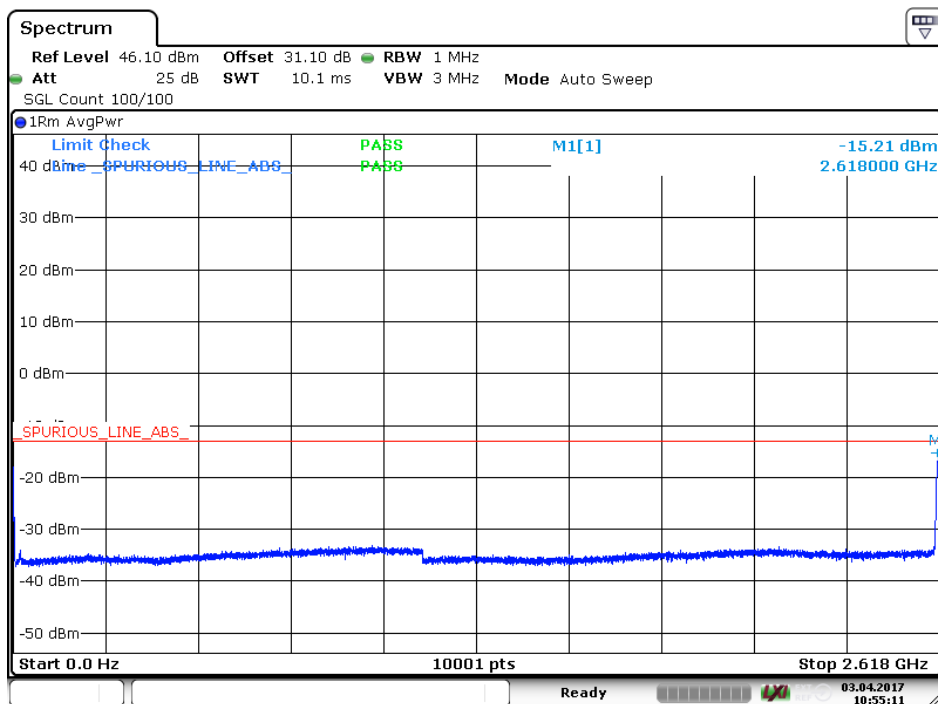

Date: 3 APR 2017 10:55:11


S 114 10-06 Strömberg 164234

AWGN low ch

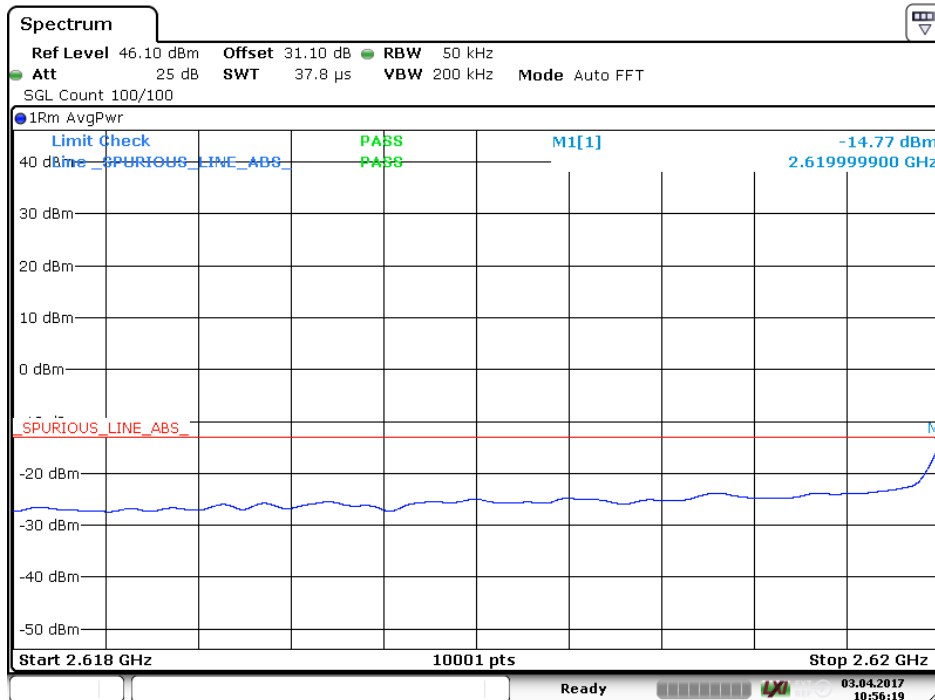

Date: 3 APR 2017 10:56:19


AWGN low ch

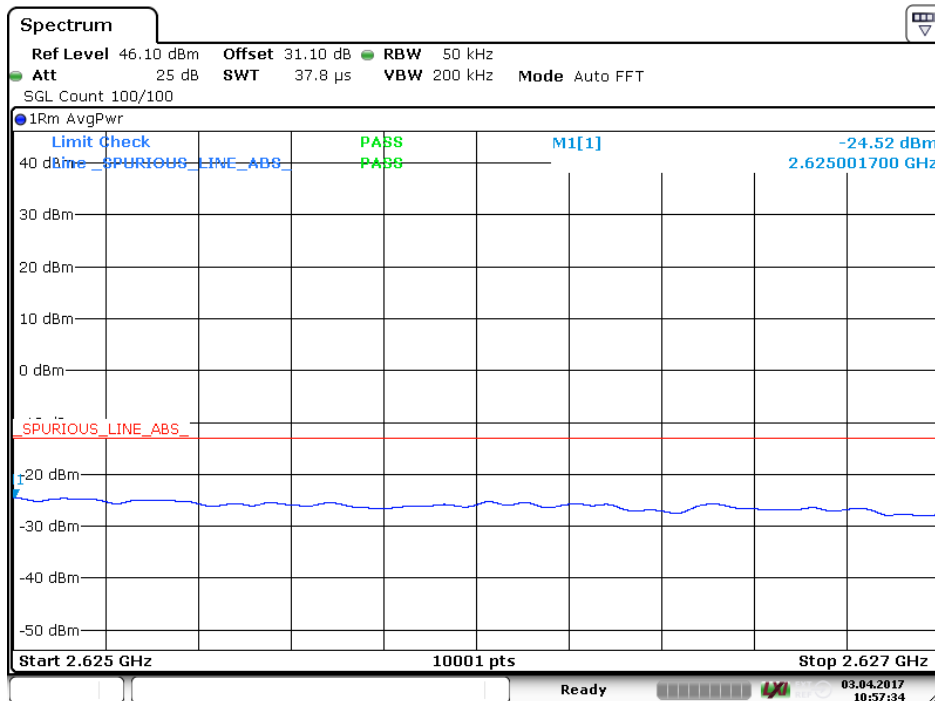

Date: 3 APR 2017 10:57:34


AWGN low ch



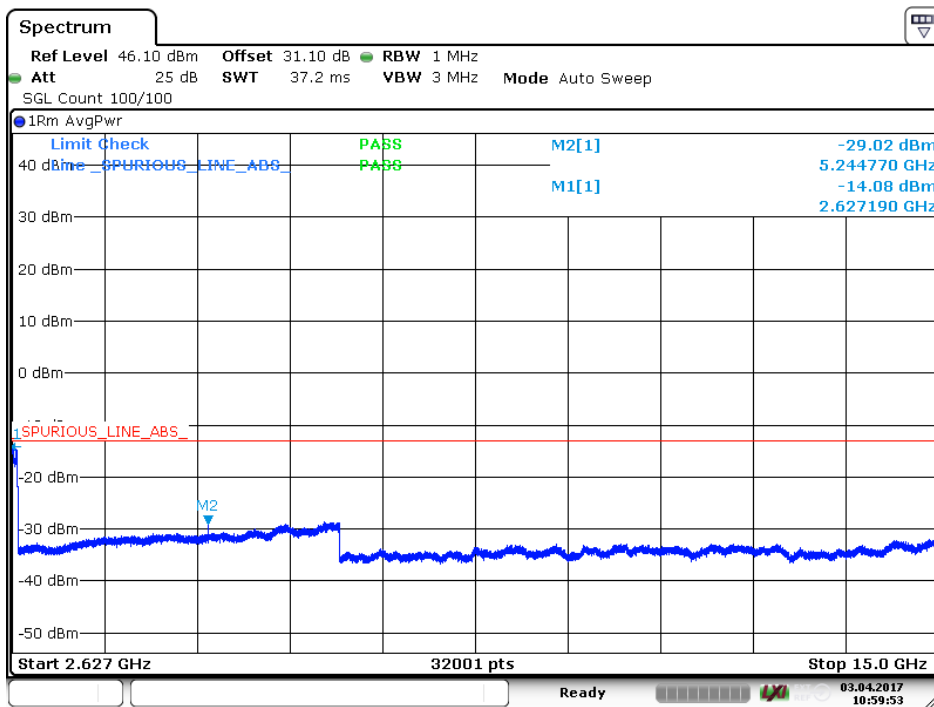


Date: 3 APR 2017 10:59:53

AWGN low ch

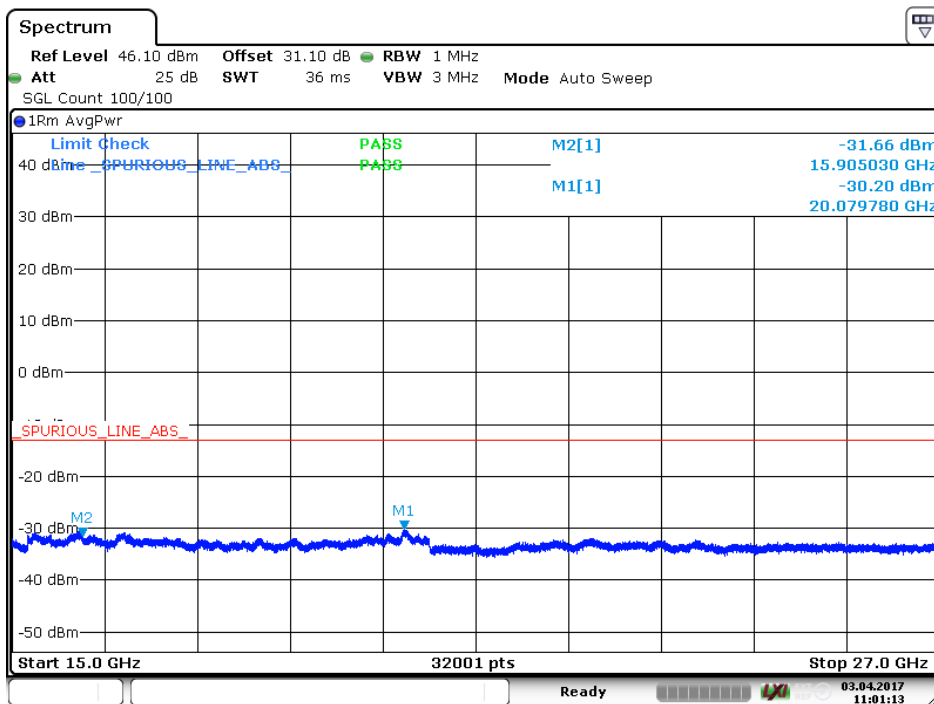


Date: 3 APR 2017 11:01:14

AWGN low ch

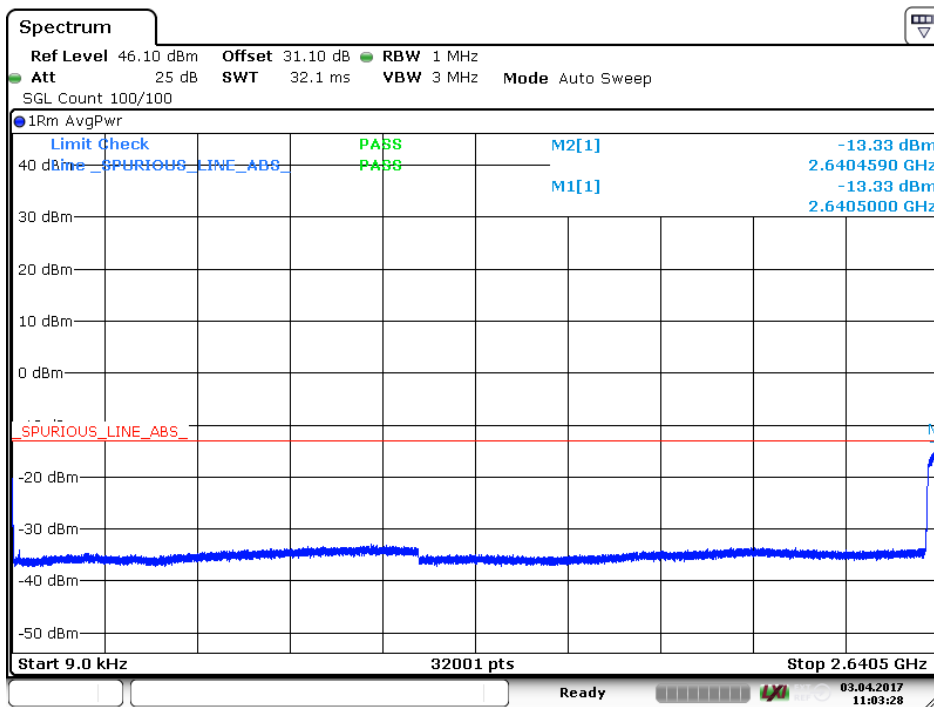


Date: 3 APR 2017 11:03:27

AWGN mid ch

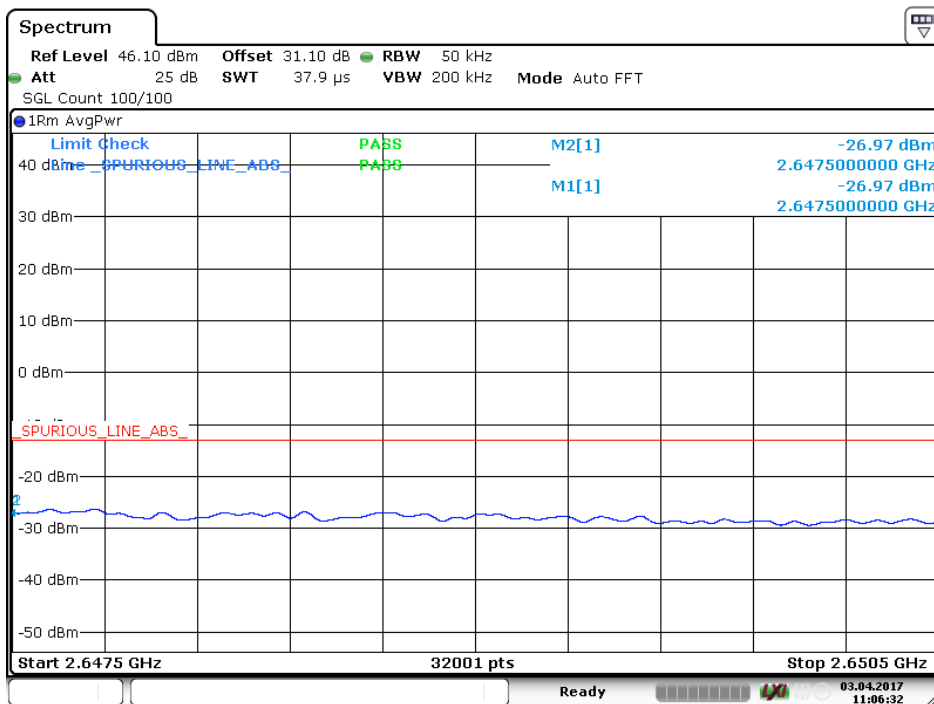


Date: 3 APR 2017 11:06:31

AWGN mid ch

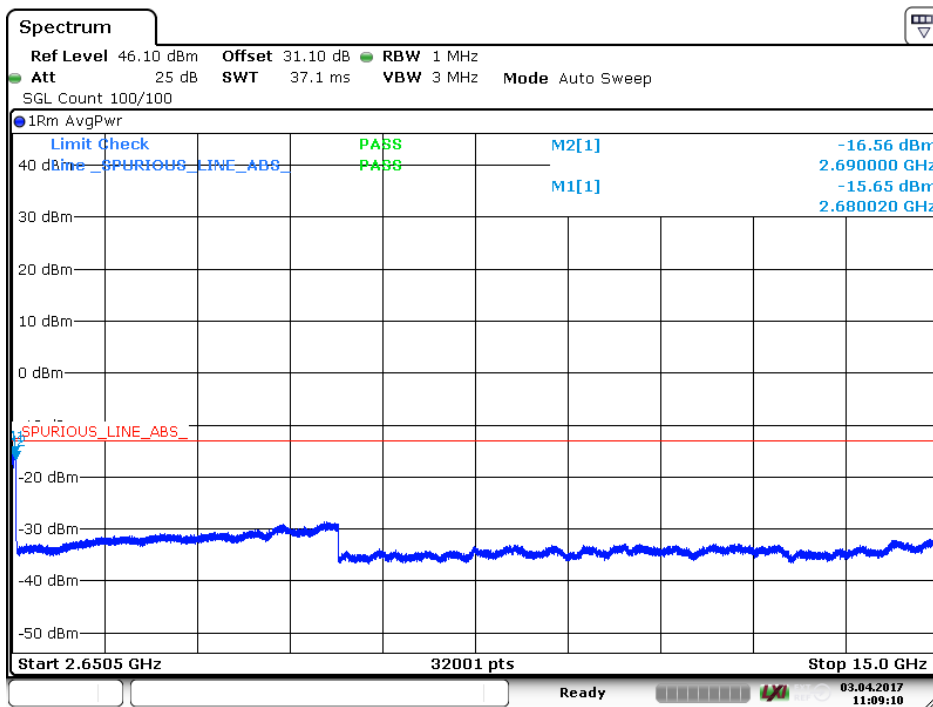


Date: 3 APR 2017 11:09:10

AWGN mid ch

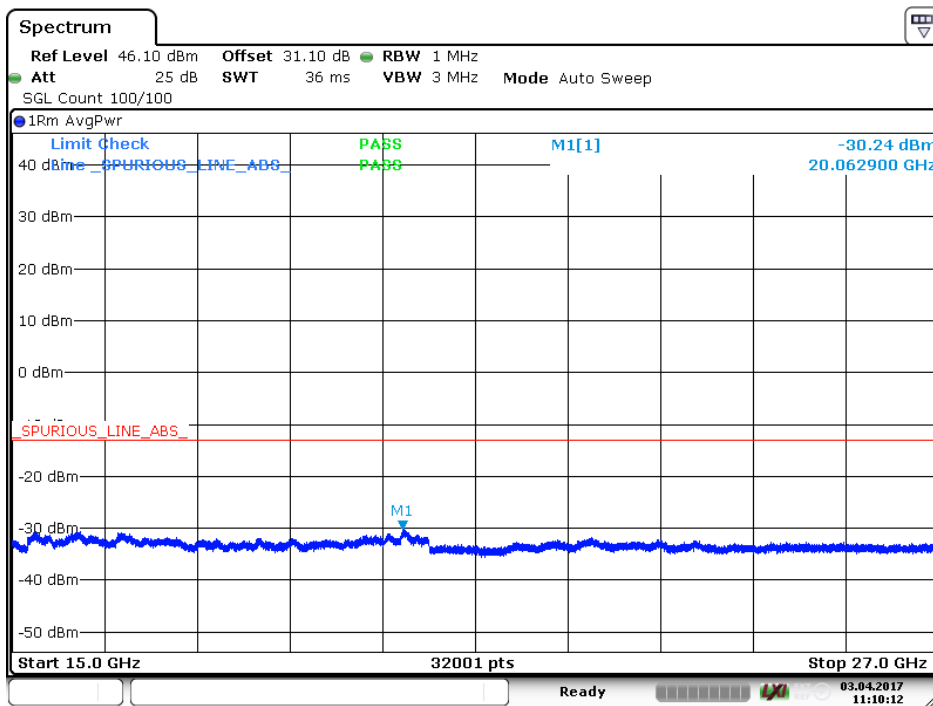


Date: 3 APR 2017 11:10:12

AWGN mid ch

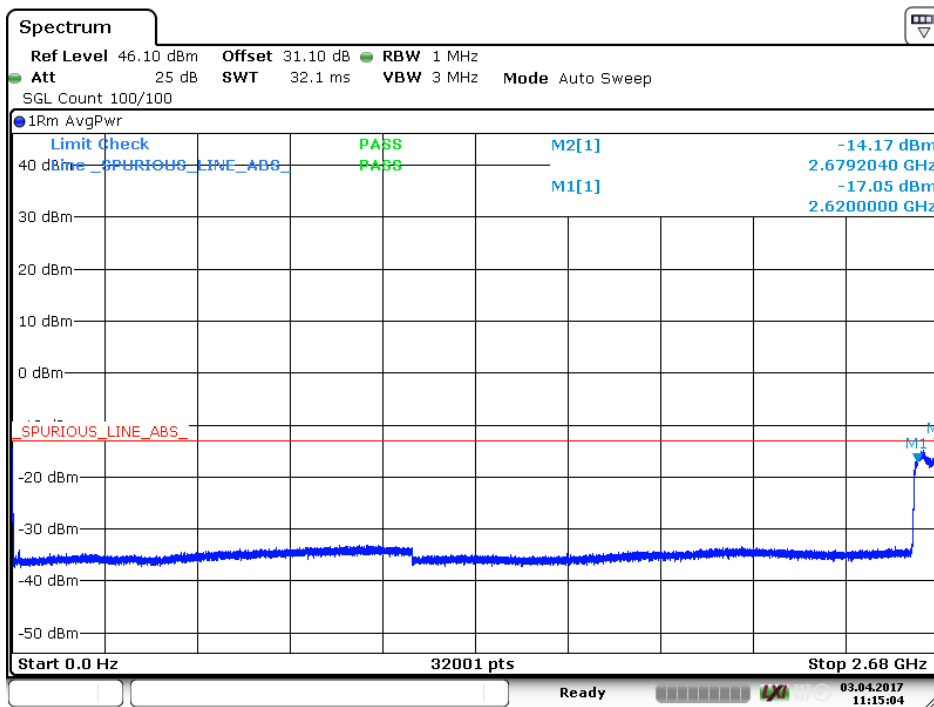


Date: 3 APR 2017 11:15:04

AWGN high ch

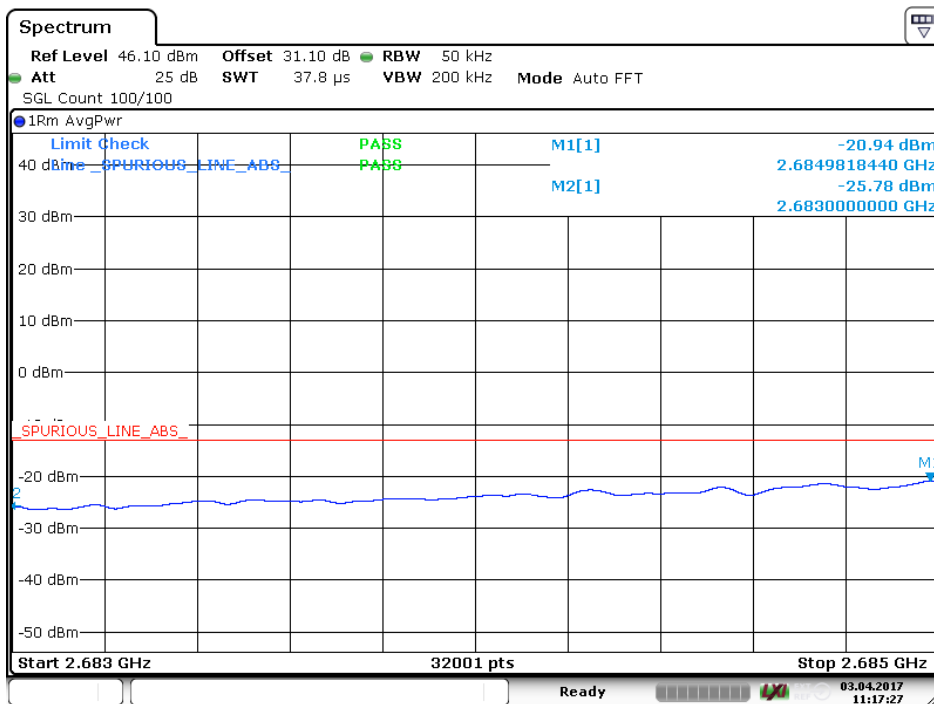


Date: 3 APR 2017 11:17:27

AWGN high ch

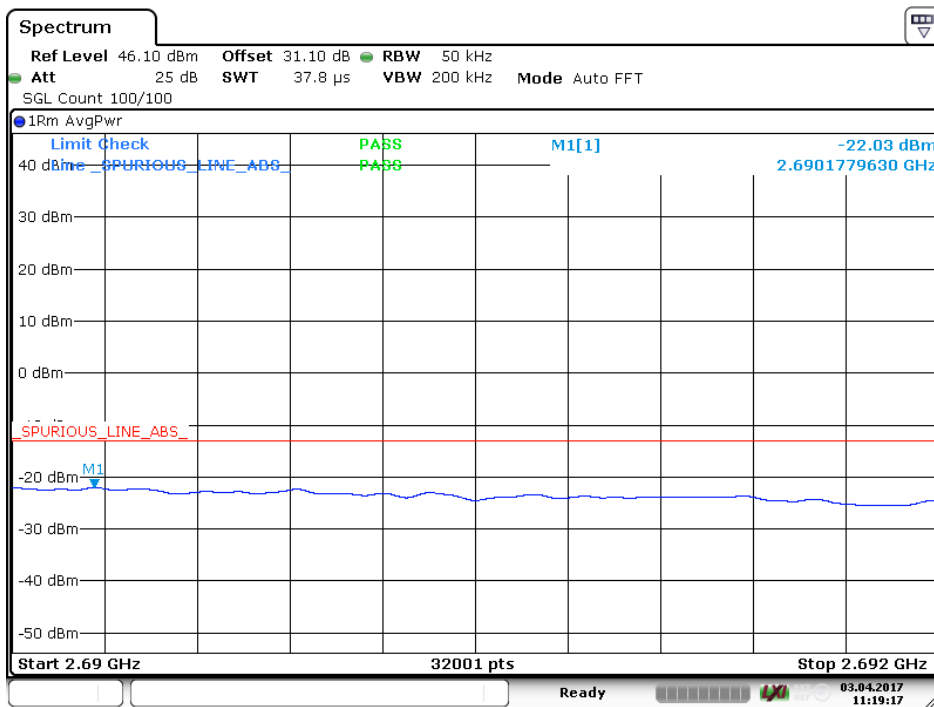


Date: 3 APR 2017 11:19:18

AWGN high ch

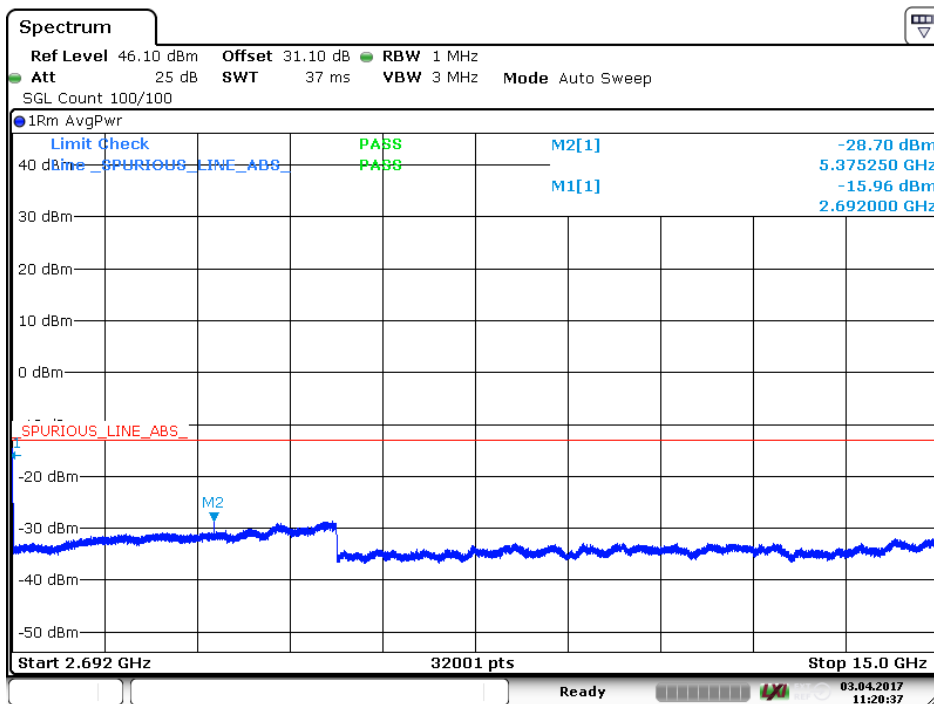


Date: 3 APR 2017 11:20:38

AWGN high ch

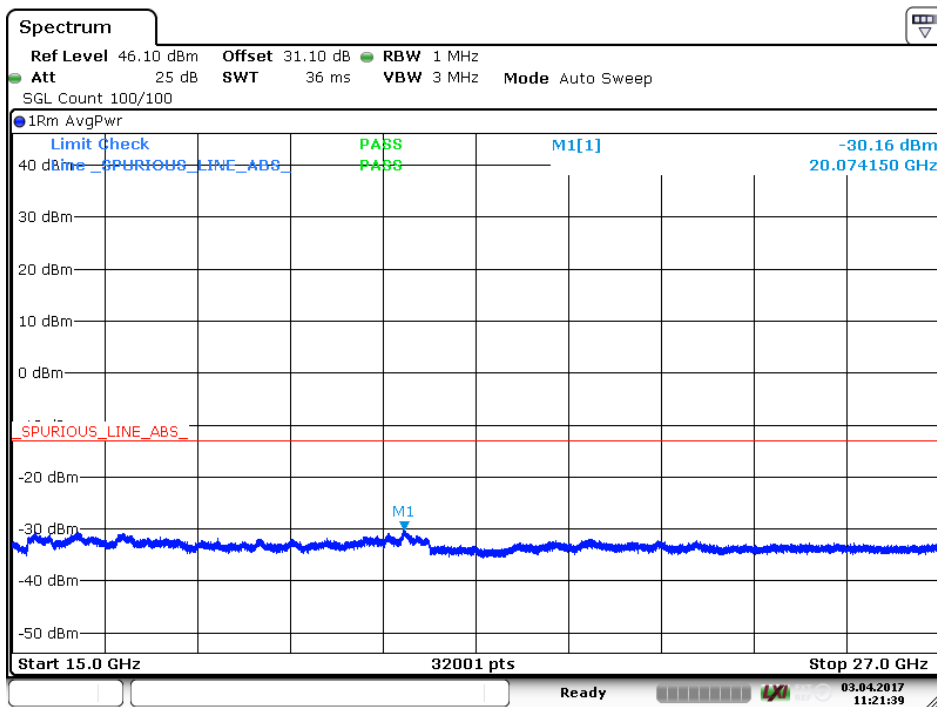


Date: 3 APR 2017 11:21:40

AWGN high ch

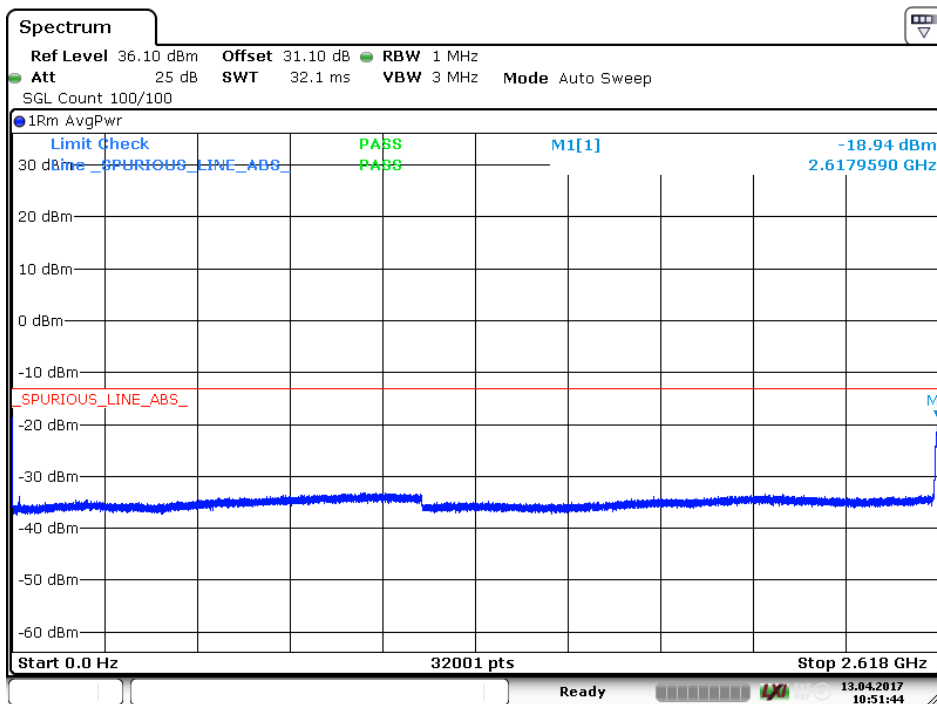


Date: 13 APR 2017 10:51:44

GSM low channel

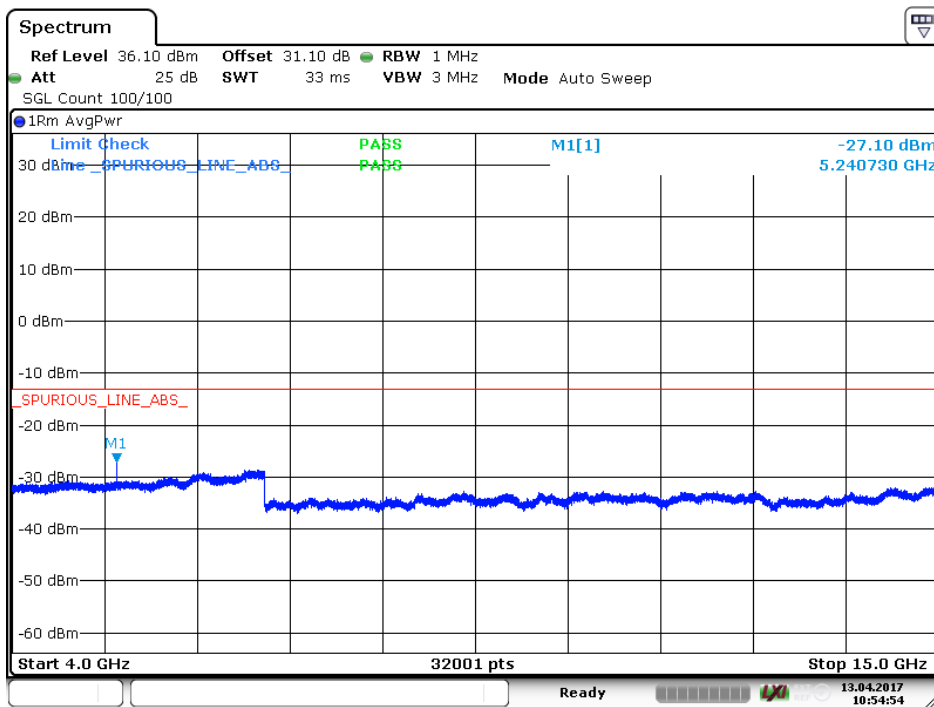


Date: 13 APR 2017 10:54:55

**GSM low channel**

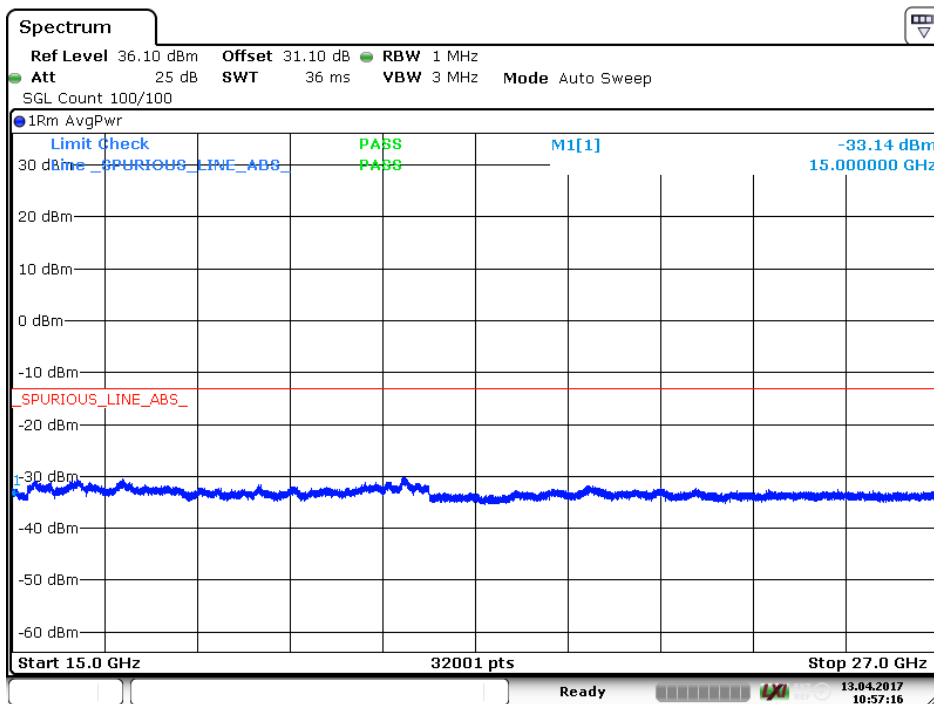

Date: 13 APR 2017 10:57:16


**GSM low channel**

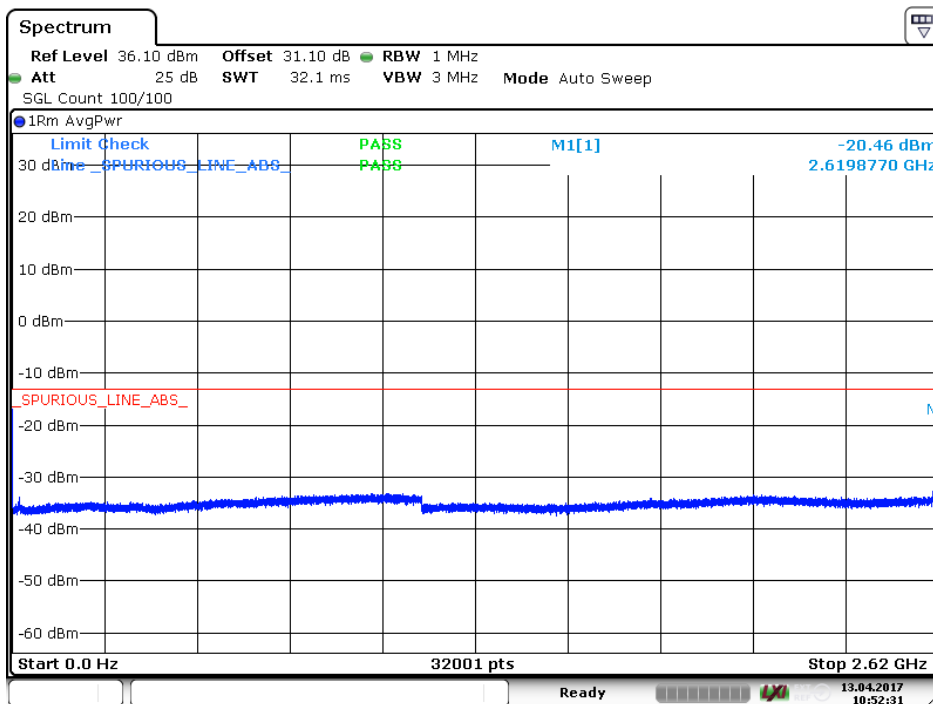

Date: 13 APR 2017 10:52:30

GSM mid channel


GSM mid channel

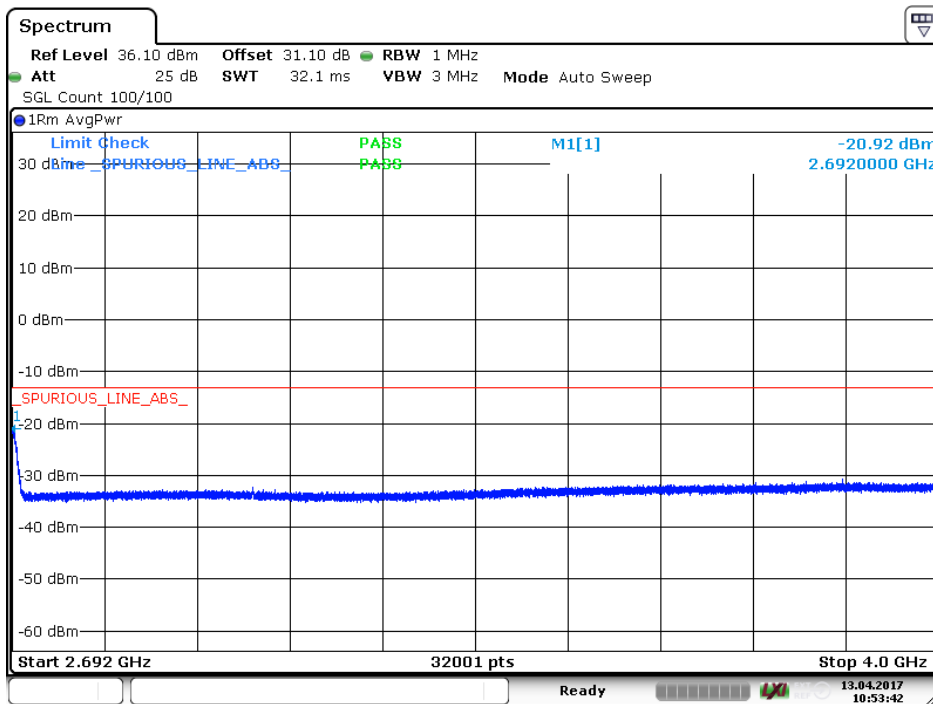

Date: 13 APR 2017 10:53:43


GSM mid channel



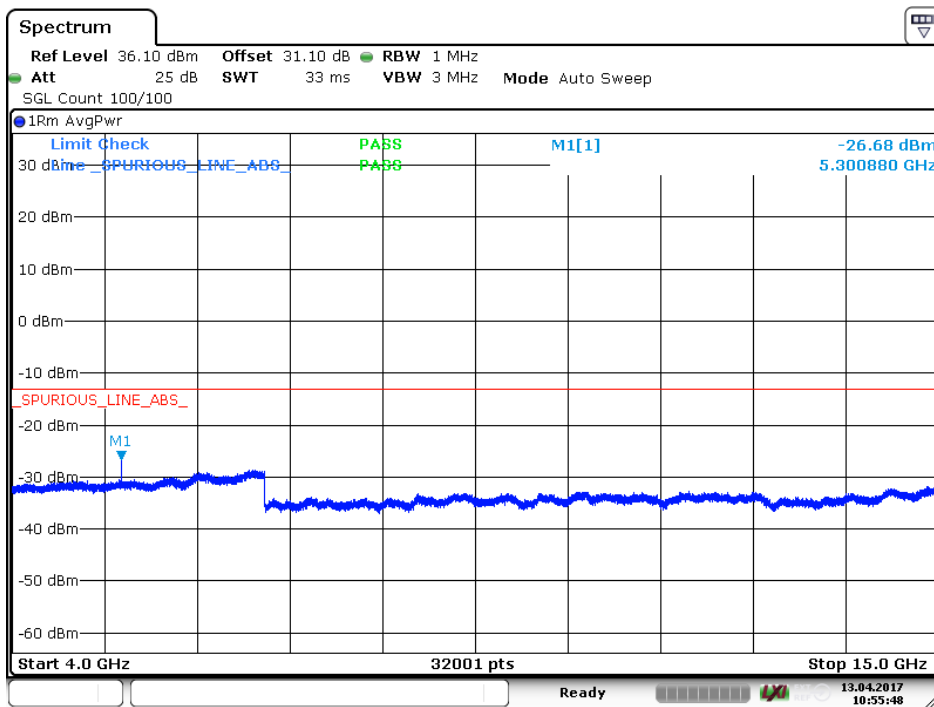


Date: 13 APR 2017 10:55:49

**GSM mid channel**

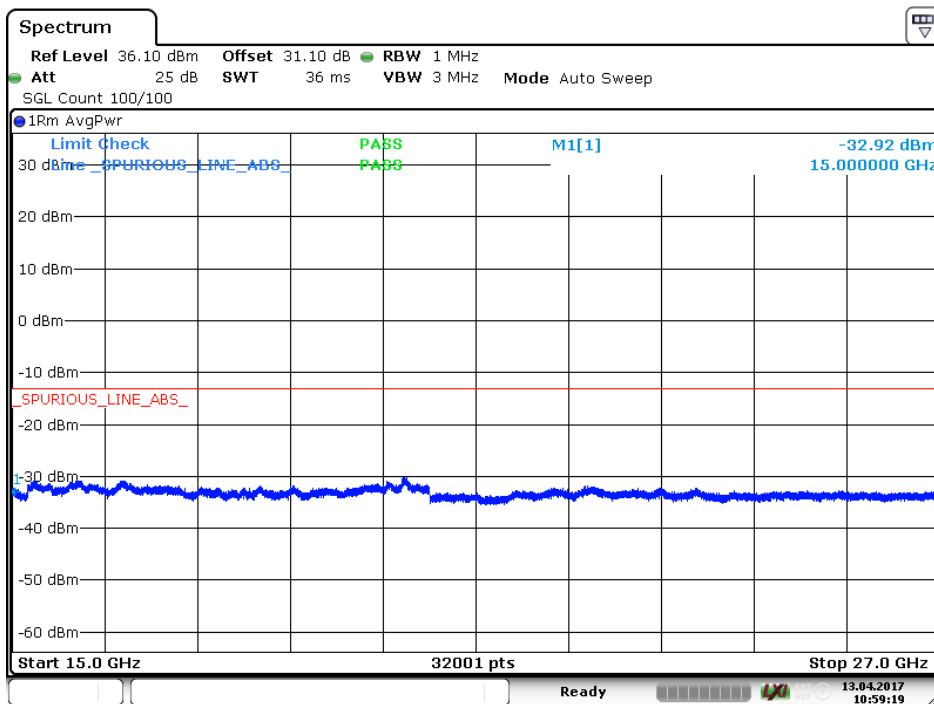


Date: 13 APR 2017 10:59:19

**GSM mid channel**

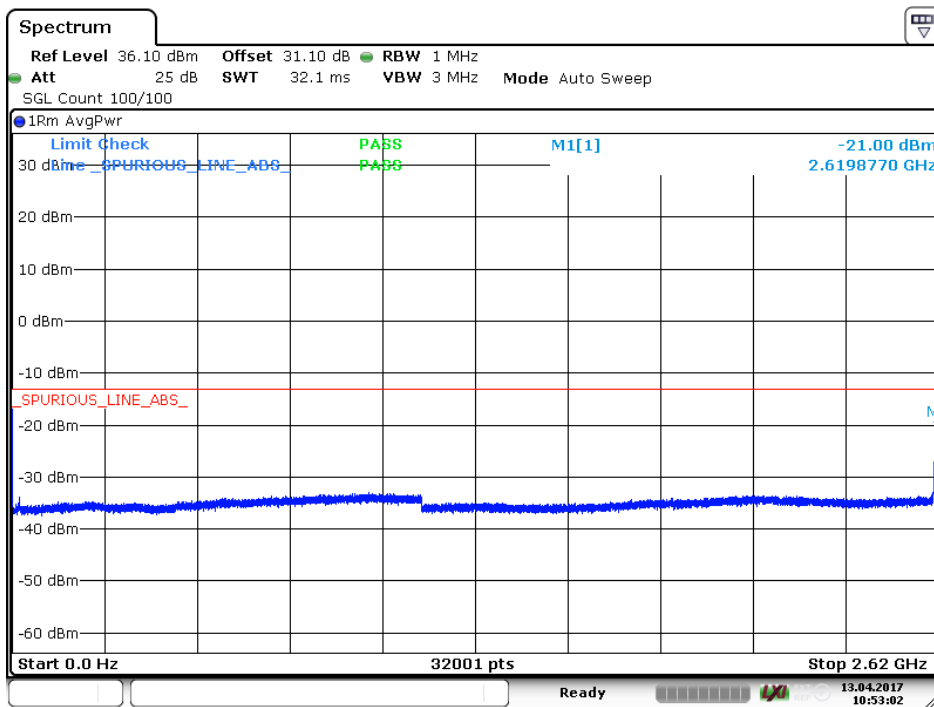


Date: 13 APR 2017 10:53:02

GSM high channel

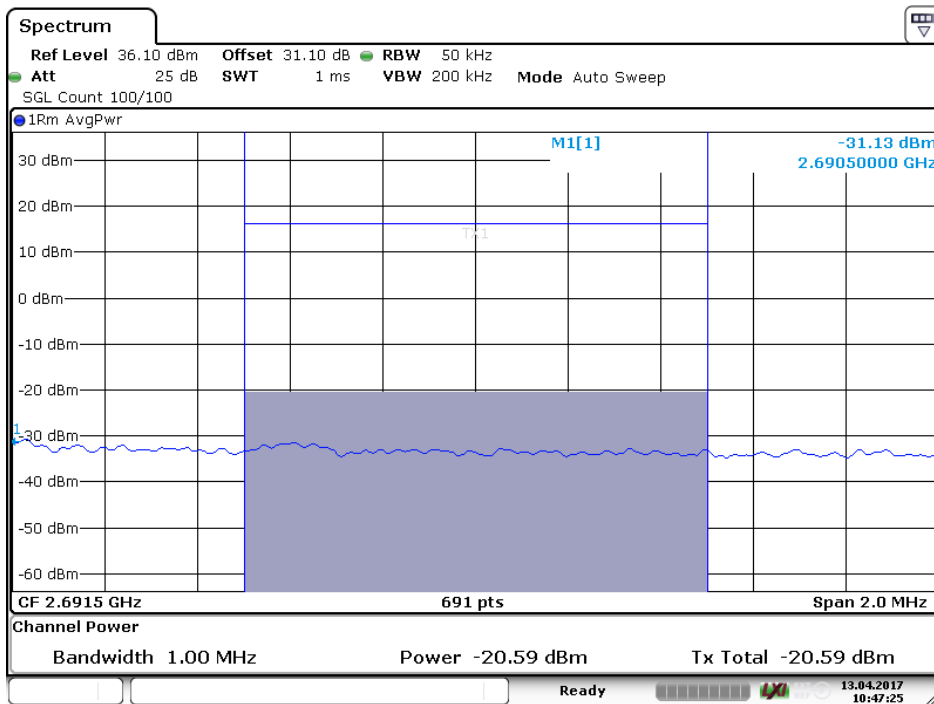


Date: 13 APR 2017 10:47:25

GSM high channel

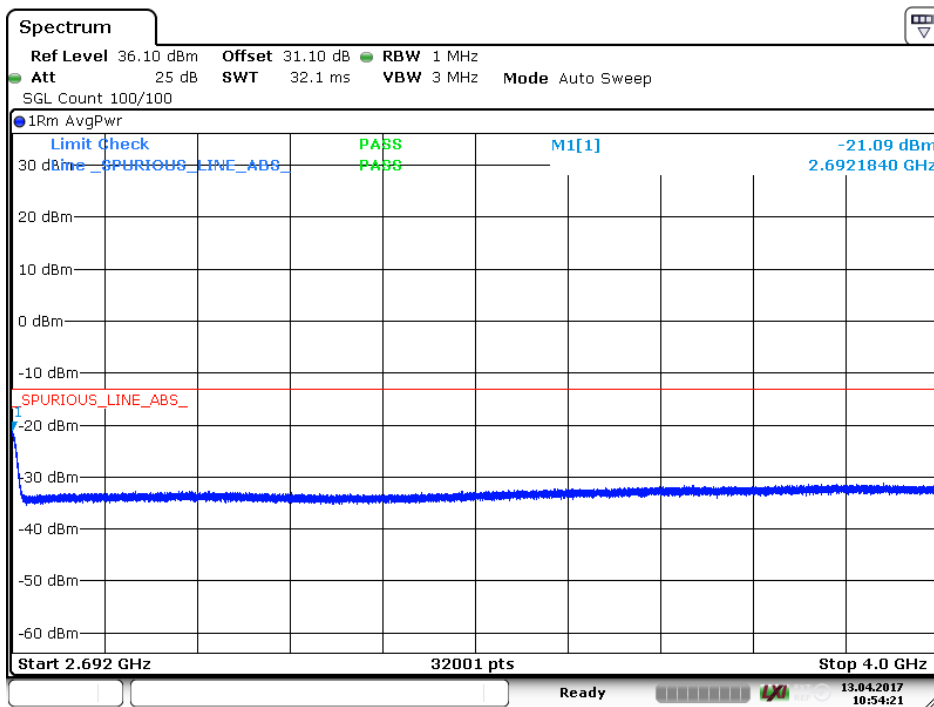


Date: 13 APR 2017 10:54:21

**GSM high channel**

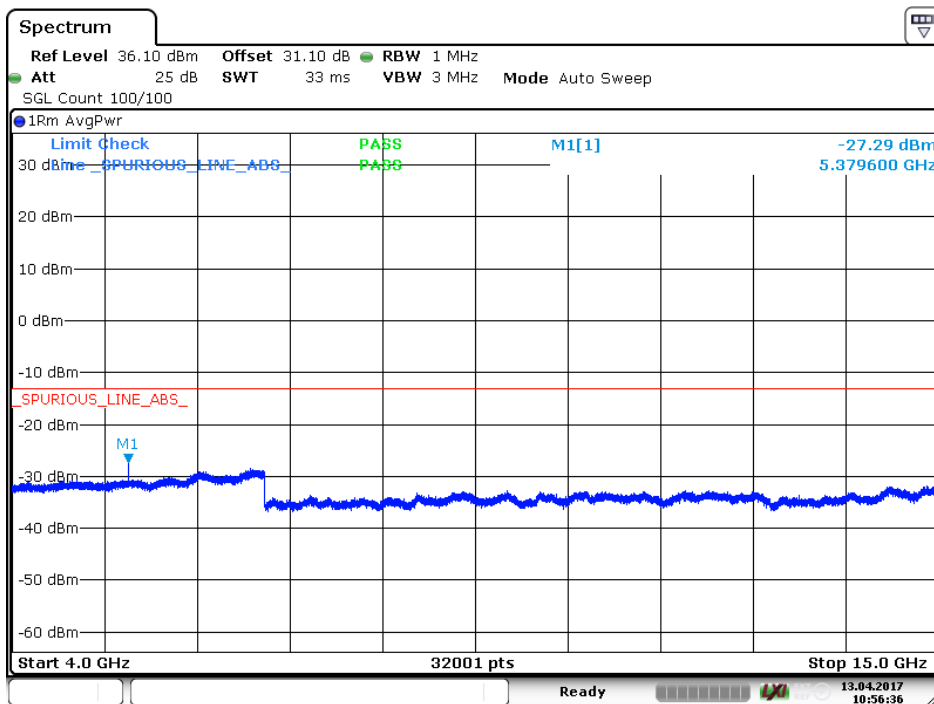

Date: 13 APR 2017 10:56:36

**GSM high channel**

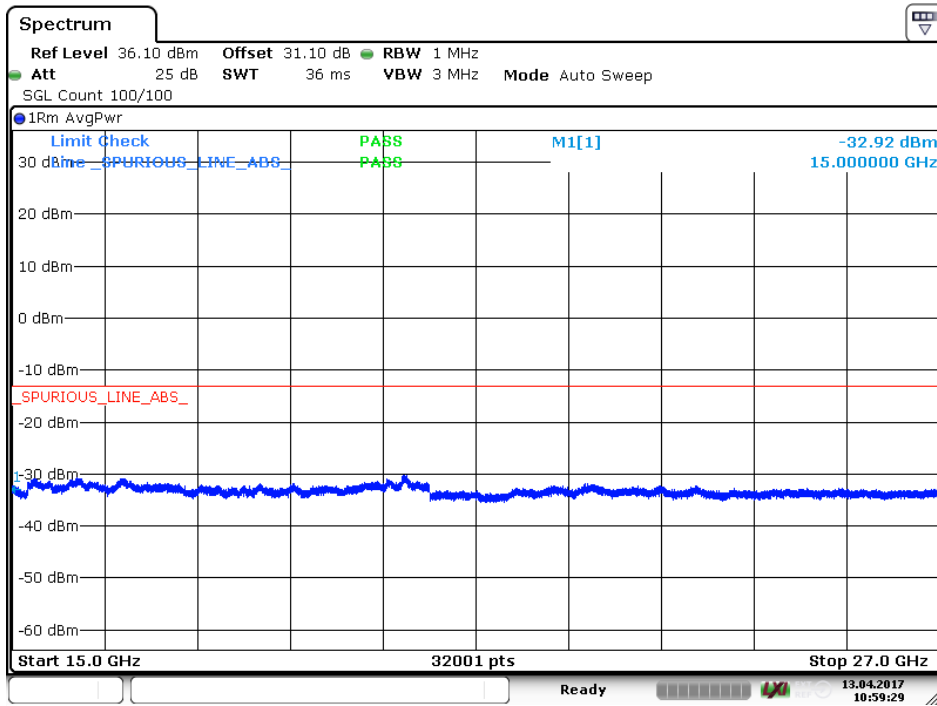

Date: 13 APR 2017 10:59:30

GSM high channel

## 10 RADIATED SPURIOUS EMISSION

|               |            |                   |             |
|---------------|------------|-------------------|-------------|
| Date of test: | 2017-03-07 | Test location:    | Björkhallen |
| EUT Serial:   | 99992      | Ambient temp.     | 21°C        |
| Tested by:    | MTV        | Relative humidity | 32 %        |
| Test result:  | Pass       | Margin:           | > 20 dB     |

### 10.1 Test set-up

The test method is in accordance with ANSI C63.26 and ANSI-TIA-603-D-2010.

Both receiver and transmitter are active during the tests.

The EUT was placed on an insulating support above the turntable which is part of the reference ground plane.

Overview sweeps were performed with the measurement receiver in max-hold mode and the peak detector activated. Above 1 GHz both peak and average detector is activated.

Signal generator was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.

The EUT's output port was terminated to the 50  $\Omega$  terminator.

A PC was connected to FOI via Ethernet hub. The PC was then used to control the EUT.

### 10.2 Test conditions

#### Test set-up:

#### 30 MHz to 1000 MHz

Test receiver set-up:

Preview test:

Peak, RBW 120 kHz, VBW 1 MHz

Final test:

Quasi-Peak, RBW 120 kHz, VBW 1 MHz

Measuring distance: 3 m

EUT height above ground plane: 0.8 m

Measuring angle: 0 – 359°

Antenna

Height above ground plane: 1 – 4 m

Polarisation: Vertical and Horizontal

Type: Bilog

#### Test set-up:

#### 1 GHz – 22 GHz

Test receiver set-up:

Preview test:

Peak, RBW 1 MHz, VBW 3 MHz

Average, RBW 1 MHz, VBW 3 MHz

Final test:

Average, RBW 1 MHz, VBW 3 MHz

Peak, RBW 1 MHz, VBW 3 MHz

Measuring distance: 3 m

EUT height above ground plane: 1.5 m

Measuring angle: 0 – 359°

Antenna

Height above ground plane: 1 – 4 m

Polarisation: Vertical and Horizontal

Type: Horn

Antenna tilt: Activated

### 10.3 Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated

below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

This gives a limit -13 dBm.

The frequency range to be inspected is up to the tenth harmonics of the highest fundamental frequency according to 47 CFR 2.1057 and RSS-Gen Section 6.13.

The field strength limit is calculated using the plane wave relation.

$$GP/4\pi R^2 = E^2 / 120\pi$$

G: antenna gain

P: power (W)


R: measurement distance (m)

-13 dBm EIRP gives a field strength limit of 82.2 dB $\mu$ V/m at a 3 m measurement distance in an anechoic chamber.


Because all measured field strength results had more than 20 dB margins to the limit substitution measurements were not performed.

**10.4 Test results**

Full Spectrum

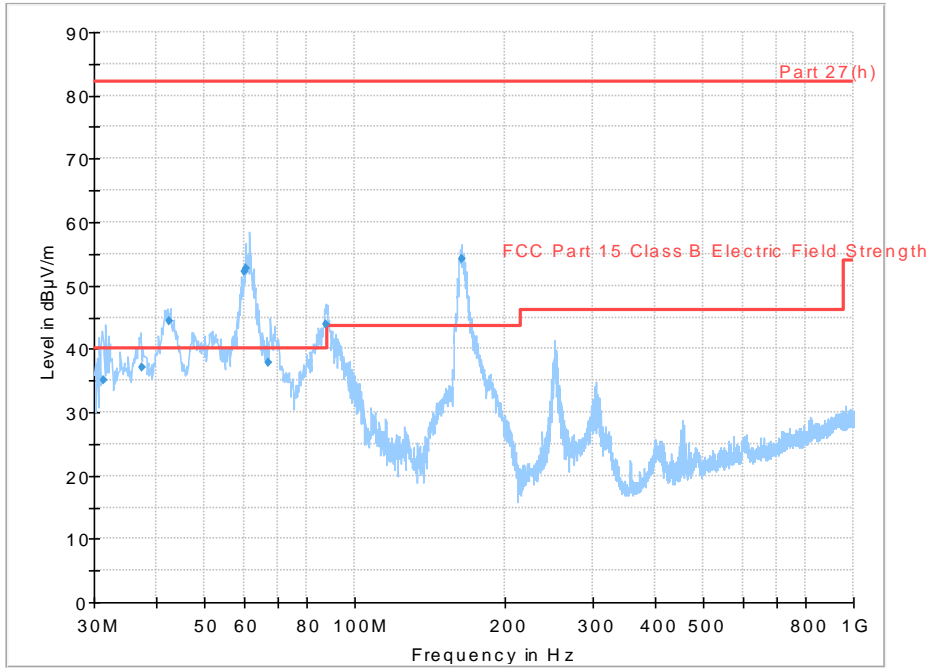


**30 MHz – 1000 MHz**

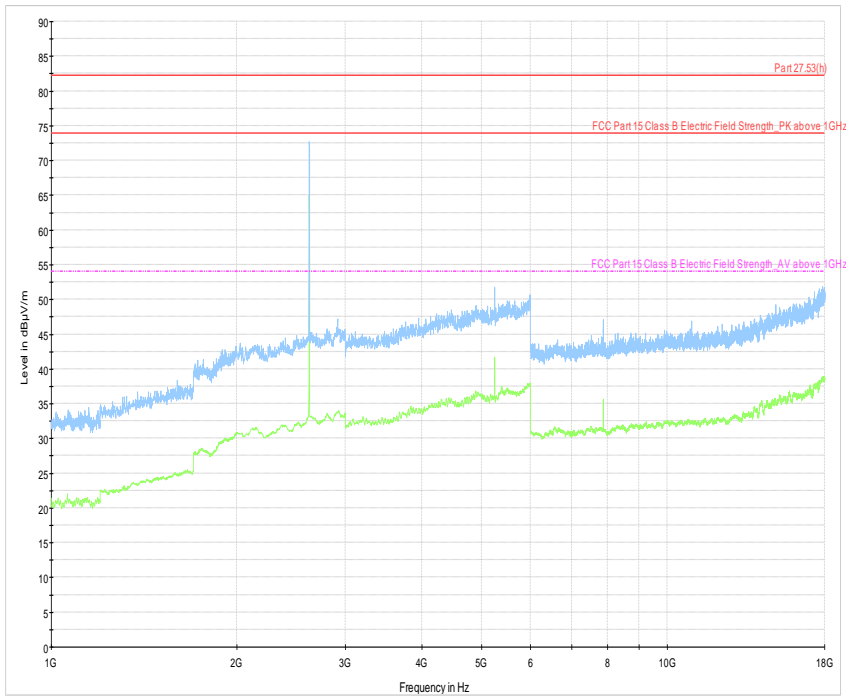


**1-18 GHz low channel**

Full Spectrum

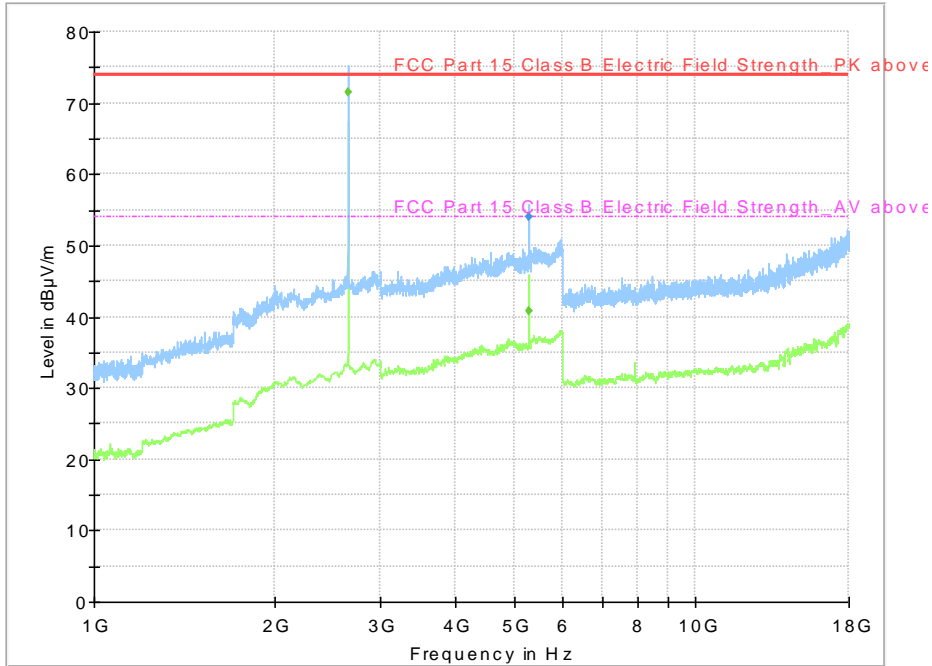

1-18 GHz middle channel


Full Spectrum

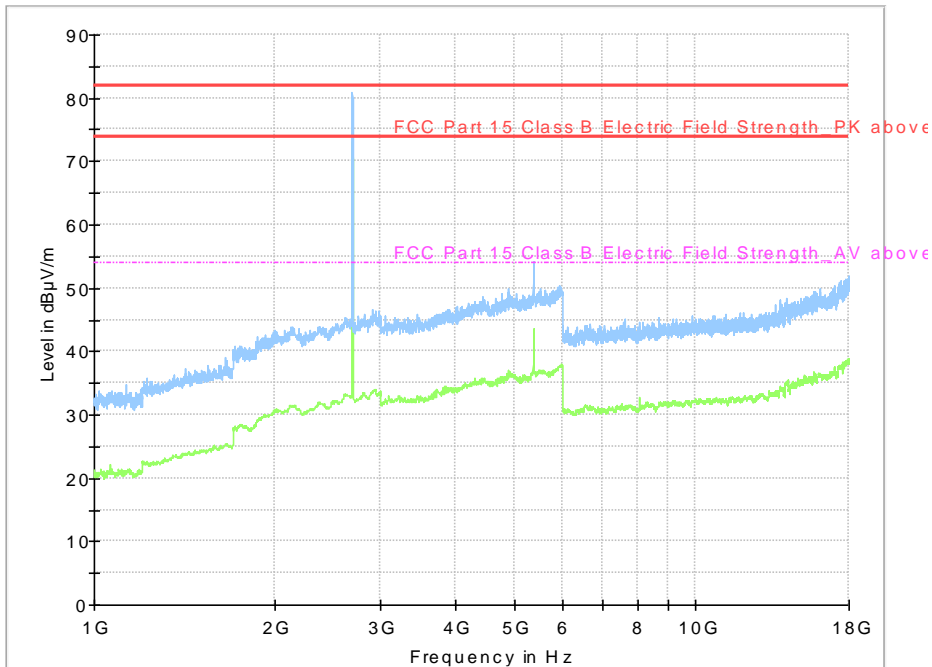

1-18 GHz high channel




Full Spectrum

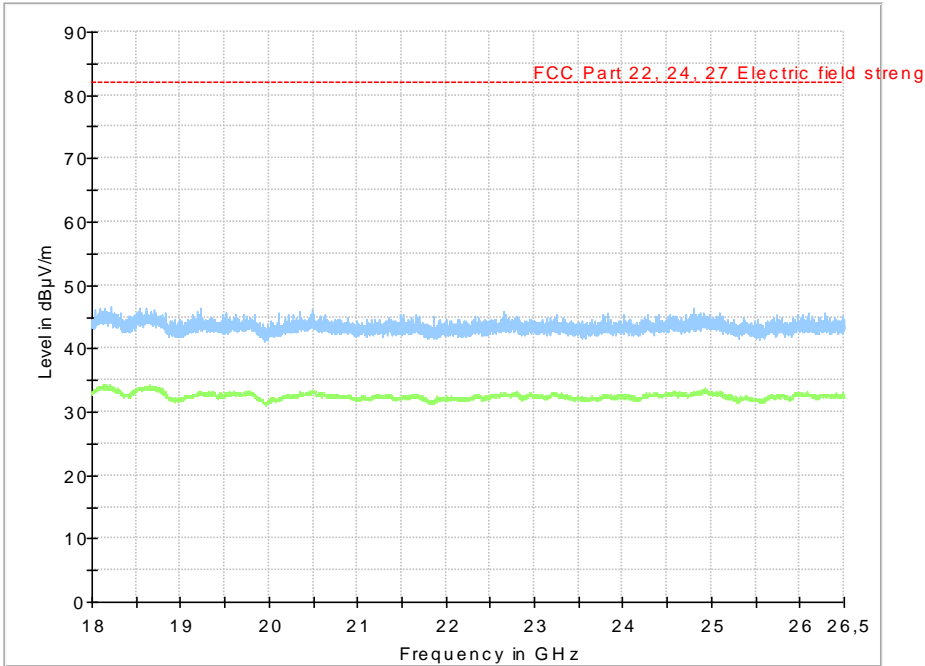


18-26,5 GHz low channel

Full Spectrum

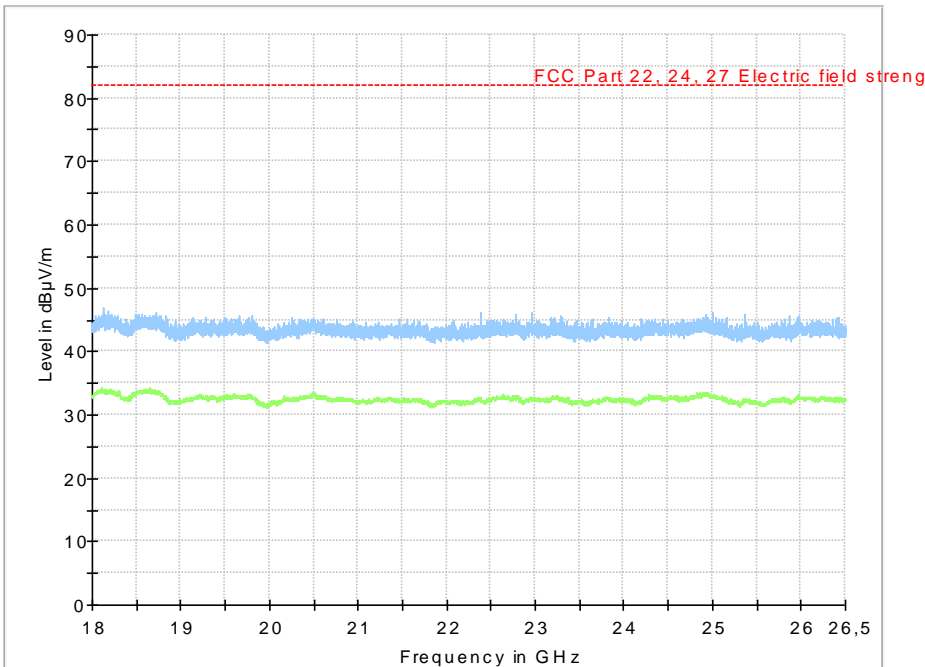


18-26,5 GHz mid channel

Full Spectrum

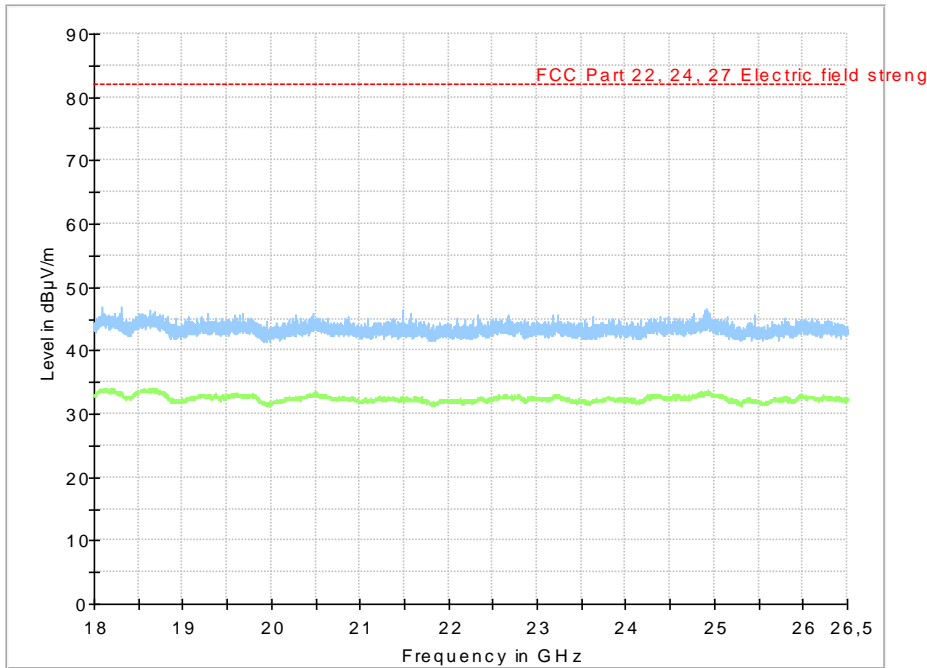

18-26,5 GHz high channel

Full Spectrum

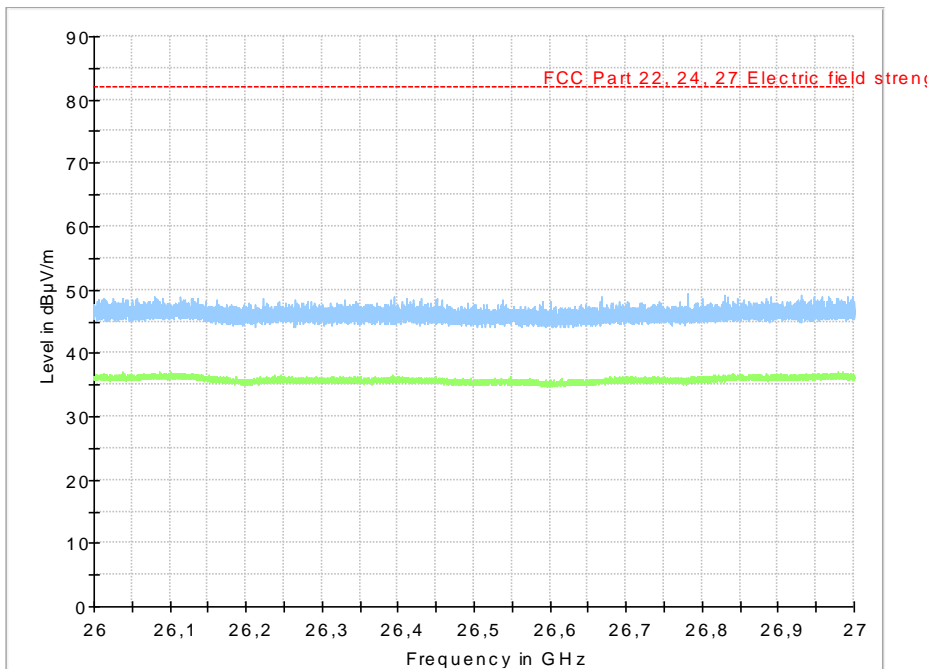

26,5 - 27 GHz high channel

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol |
|-----------------|--------------------------|------------------------|----------------------|-------------|-----|
| 31.723          | 40.0                     | -                      | 82.2                 | 42.2        | V   |
| 42.365          | 48.4                     | -                      | 82.2                 | 33.8        | V   |
| 47.376          | 46.6                     | -                      | 82.2                 | 35.6        | V   |
| 56.674          | 52.4                     | -                      | 82.2                 | 29.8        | V   |
| 60.922          | 41.3                     | -                      | 82.2                 | 40.9        | V   |
| 69.039          | 37.2                     | -                      | 82.2                 | 45.0        | V   |

### 10.5 Test equipment

| Equipment type        | Manufacturer    | Model         | Inv. No. | Cal. due date |
|-----------------------|-----------------|---------------|----------|---------------|
| Measurement receiver  | Rohde & Schwarz | ESI 26        | 32291    | 7/2017        |
| Measurement receiver  | Rohde & Schwarz | ESU 40        | 13178    | 7/2017        |
| UltraLog antenna      | Rohde & Schwarz | HL562         | 30711    | 12/2017       |
| Horn antenna          | Rohde & Schwarz | HF907         | 32307    | 7/2018        |
| Pre amplifier         | Rohde & Schwarz | TS-pre1       | 32306    | 7/2017        |
| Horn antenna + preamp | Bonn            | BLMA 1826-5A  | 31247    | 1/2020        |
| Rf cable              | Megaphase       | GC12-K1K1-315 | 39127    | 7/2017        |

## 11 FREQUENCY STABILITY

|               |            |                   |            |
|---------------|------------|-------------------|------------|
| Date of test: | 2017-03-29 | Test location:    | EMC center |
| EUT Serial:   | 99992      | Ambient temp.     | 20 °C      |
| Tested by:    | MTV        | Relative humidity | 33 %       |
| Test result:  | Pass       | Margin:           | NA         |

### 11.1 Requirement

§2.1055, §27.54, RSS-139 clause 6.4

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 11.2 Test set-up and test procedure

The frequency stability shall be measured with variation of ambient temperature as follows:(1)  
From -30° to + 50° centigrade at intervals of not more than 10° centigrade through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:  
Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment

Signal generator generating a CW signal was connected to the FOI unit which converted rf signal to optical signal. The optical signal was then fed via fibre to the EUT.  
The EUT's output port was connected to frequency counter via rf cables and 30 dB attenuator.

### 11.3 Test results

| Temperature (°C) | Voltage      | Test signal frequency (Hz) | Output signal frequency (Hz) | Deviation (Hz) | Result |
|------------------|--------------|----------------------------|------------------------------|----------------|--------|
| +50              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| +40              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| +30              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| +10              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| 0                | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| -10              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| -20              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| -30              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |

| Temperature (°C) | Voltage      | Test signal frequency (Hz) | Output signal frequency (Hz) | Deviation (Hz) | Result |
|------------------|--------------|----------------------------|------------------------------|----------------|--------|
| +20              | 120V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              |        |
| +20              | 85V / 60 Hz  | 2650 000 000               | 2650 000 001                 | 1              | Pass   |
| +20              | 276V / 60 Hz | 2650 000 000               | 2650 000 001                 | 1              | Pass   |

### 11.4 Test equipment

| Equipment type    | Manufacturer    | Model      | Inv. No. | Cal. due date |
|-------------------|-----------------|------------|----------|---------------|
| Signal generator  | Rohde & Schwarz | SMIQ 03    | 12792    | 7/2017        |
| Frequency counter | Phillips        | PM6685R/07 | 5616     | 4/2017        |
| Climate chamber   | Vötsch          | VC4100     | 8848     | 4/2017        |

## 12 MEASUREMENT UNCERTAINTY

### Uncertainties summary

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT.

Measurement uncertainty is calculated in accordance with EA-4/02-1997.

The measurement uncertainty is given with a confidence of 95% (k=2).

### Radiated disturbance, field strength, 30 MHz - 1000 MHz

30 to 300 MHz at 3 m

± 4,7 dB

200 to 1000 MHz at 3 m

± 4,8 dB

### Radiated disturbance, field strength, 1 to 40 GHz in Semi Anechoic Chambers "Stora Hallen" and "Björkhallen"

1 to 18 GHz with filter or attenuator

± 5,4 dB

1 to 18 GHz without filter or attenuator

± 5,2 dB

18 to 26 GHz without filter or attenuator

± 5,5 dB

### Conducted disturbances at the antenna port on radio equipment

Frequency range 9 kHz – 1 GHz

± 0,9 dB

Frequency range 1 GHz – 7 GHz

± 1,4 dB

Frequency range 7 GHz -18GHz

± 2,4 dB

Frequency range 18 GHz -26,5GHz

± 3,0 dB

### Output power

Digital signals, conducted

± 0,6 dB

### Peak power density

Conducted:

Spectrum analyser

± 2,5 dB