


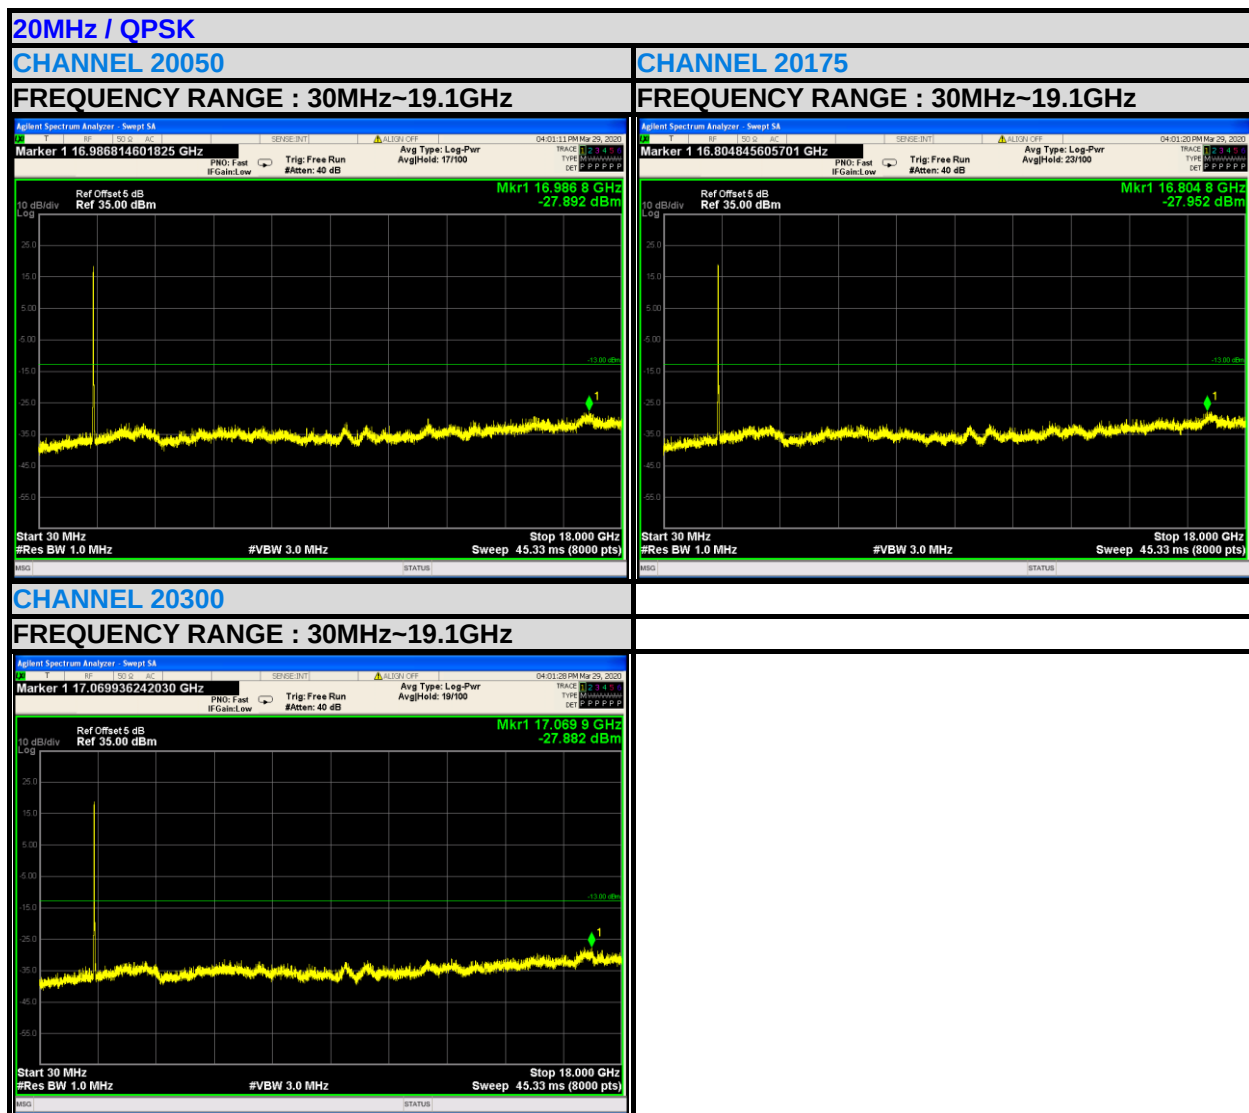


LTE BAND 12

1.4MHz / QPSK


CHANNEL 23017

FREQUENCY RANGE : 30MHz~9GHz

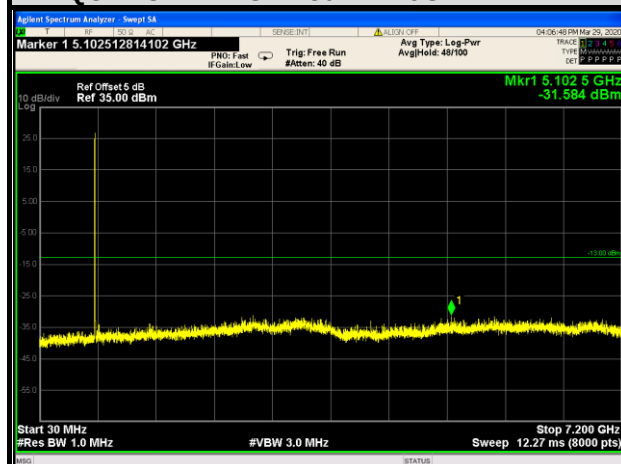


CHANNEL 23095


FREQUENCY RANGE : 30MHz~9GHz

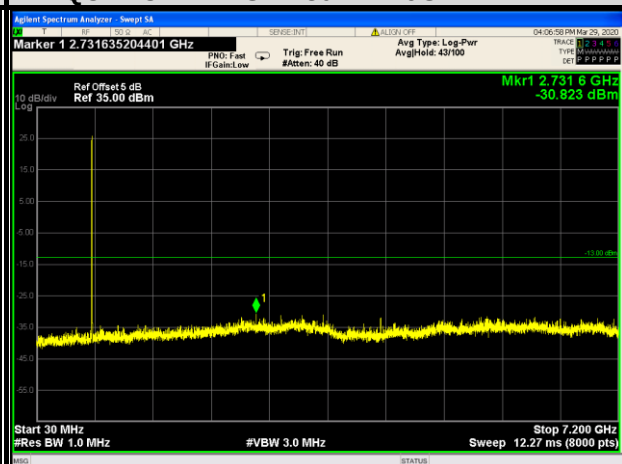



CHANNEL 23173

FREQUENCY RANGE : 30MHz~9GHz

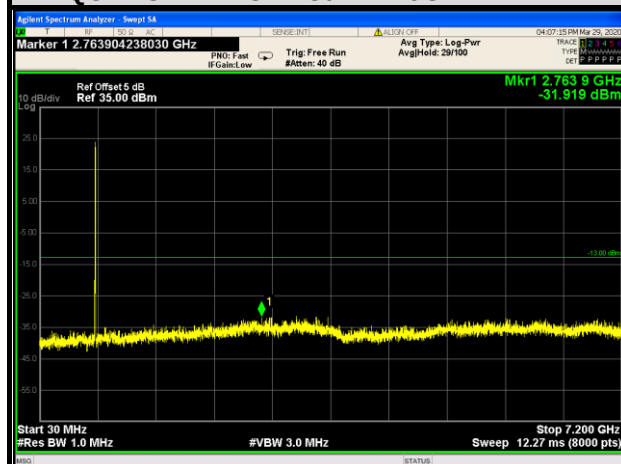

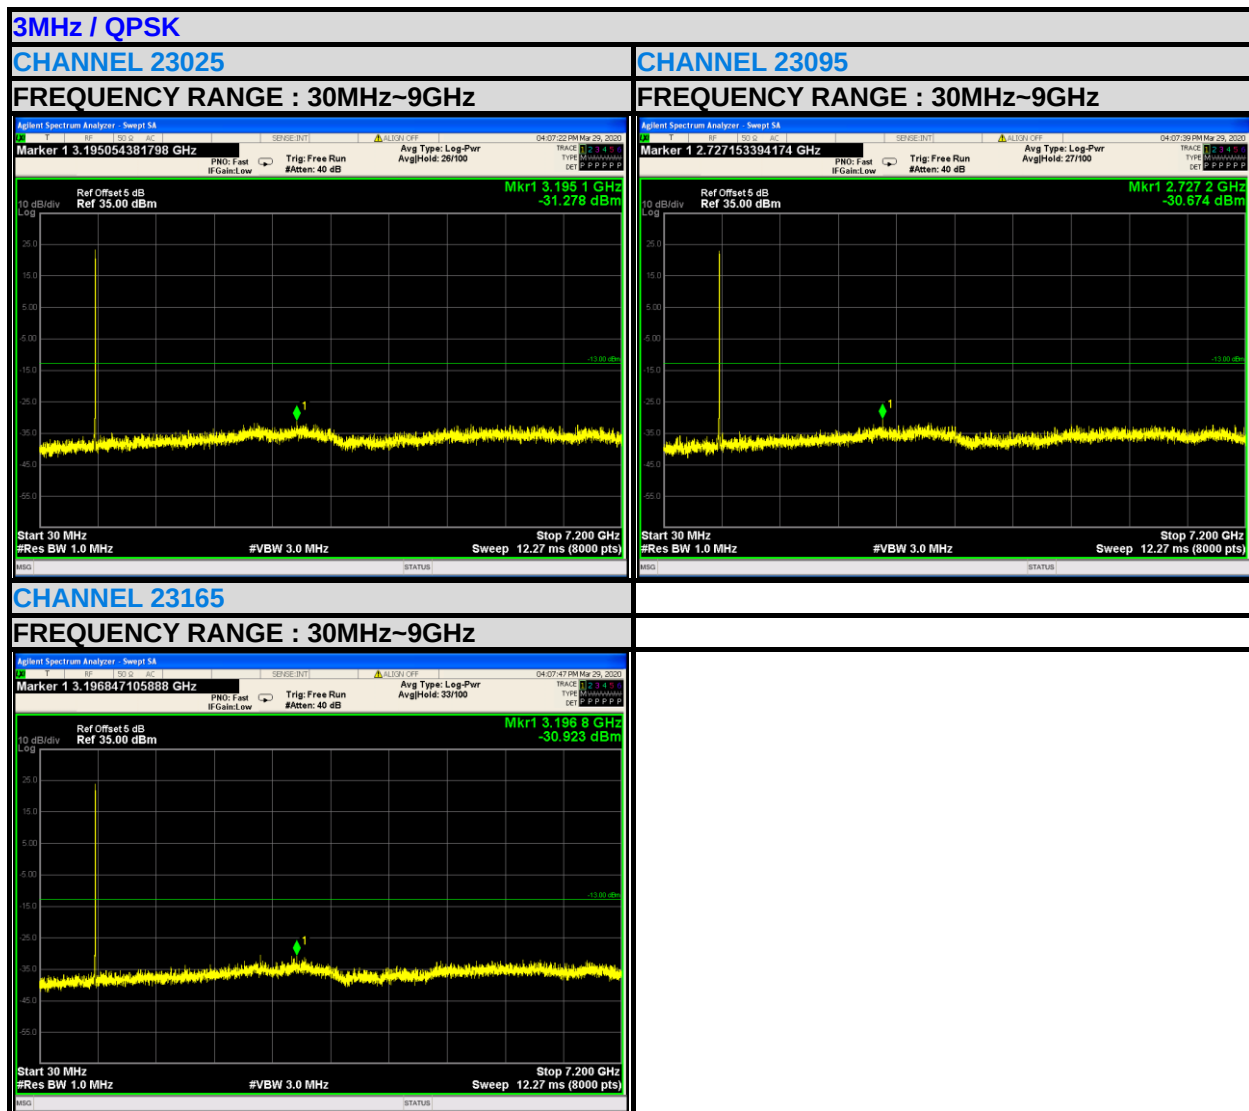

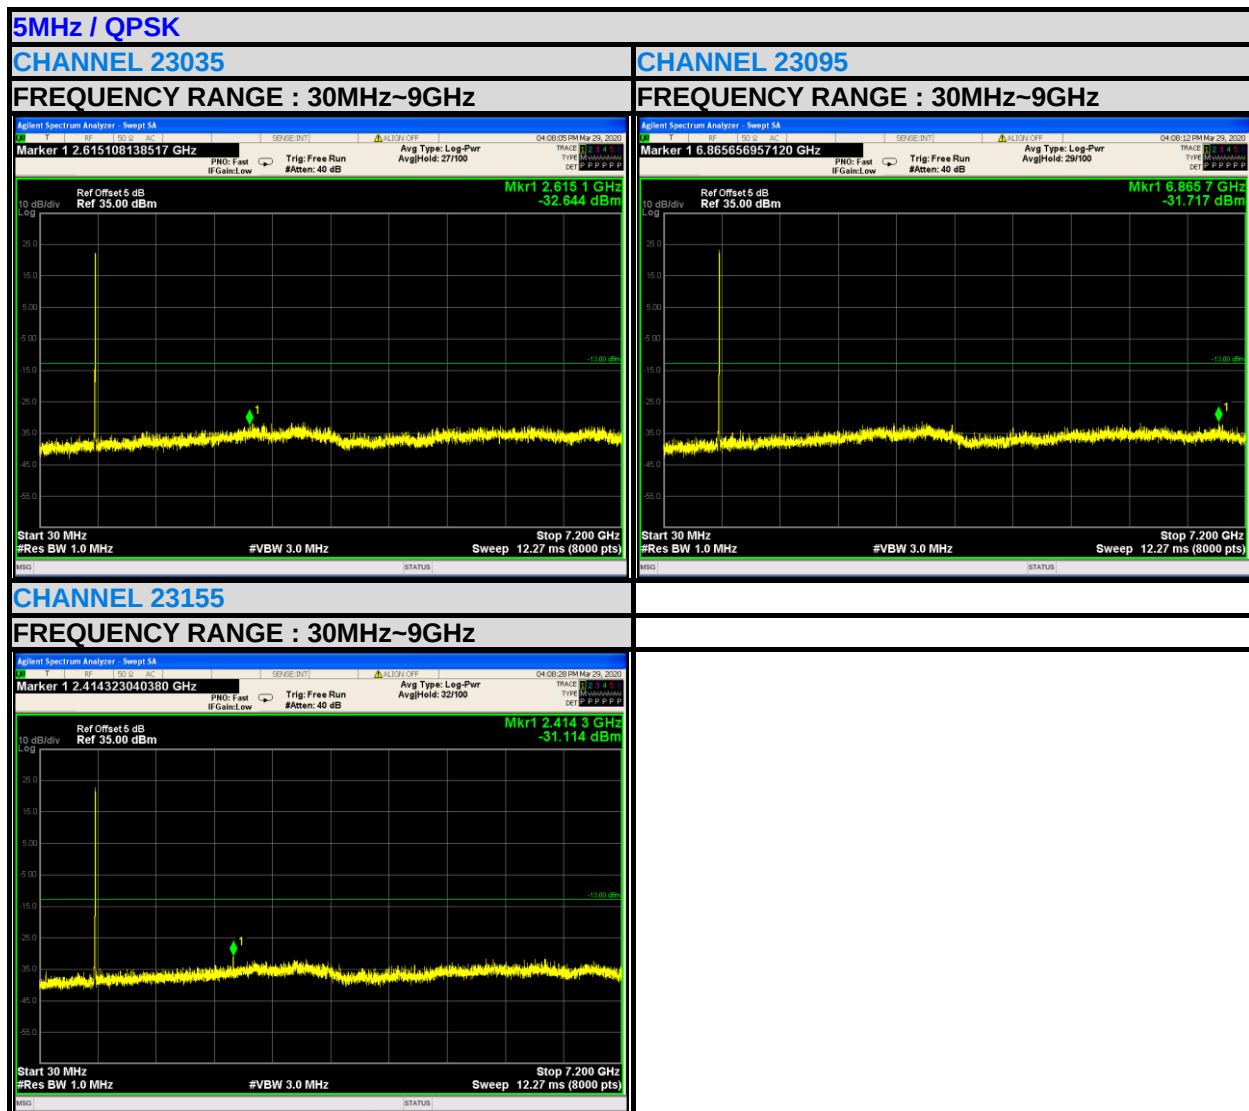

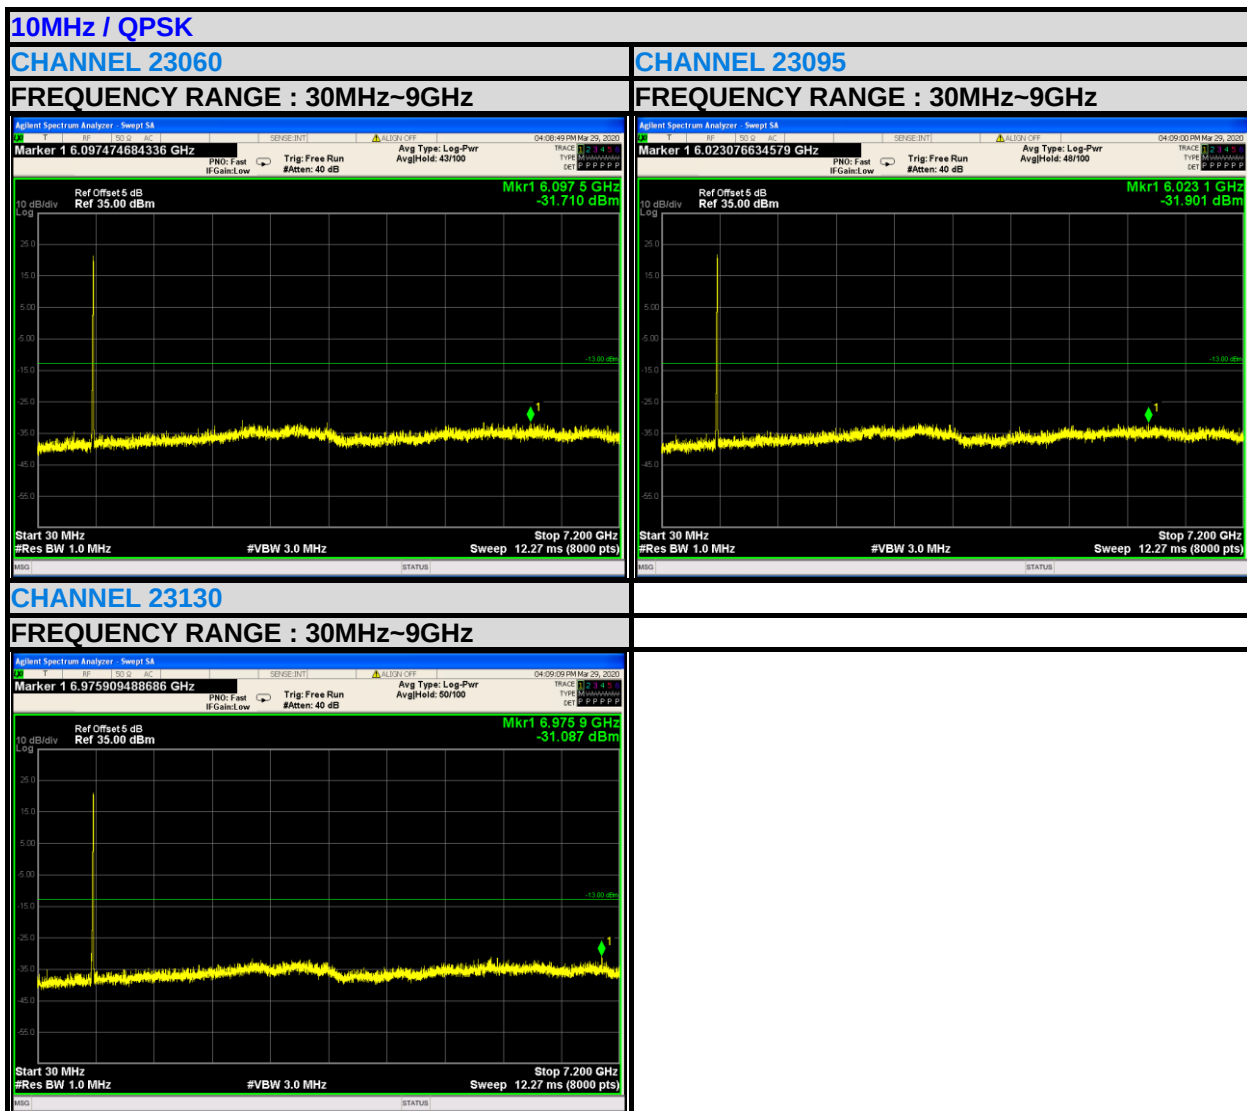


LTE BAND 13

5MHz / QPSK


CHANNEL 23205

FREQUENCY RANGE : 30MHz~9GHz

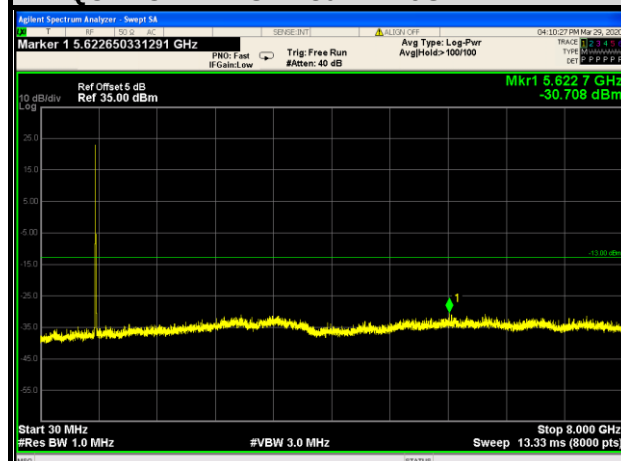


CHANNEL 23230

FREQUENCY RANGE : 30MHz~9GHz

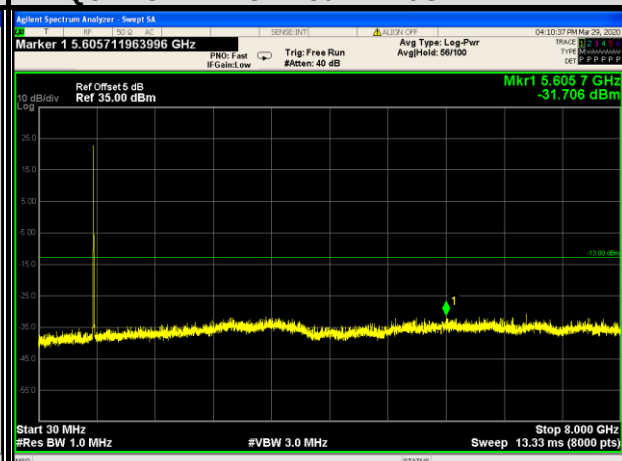

CHANNEL 23255


FREQUENCY RANGE : 30MHz~9GHz

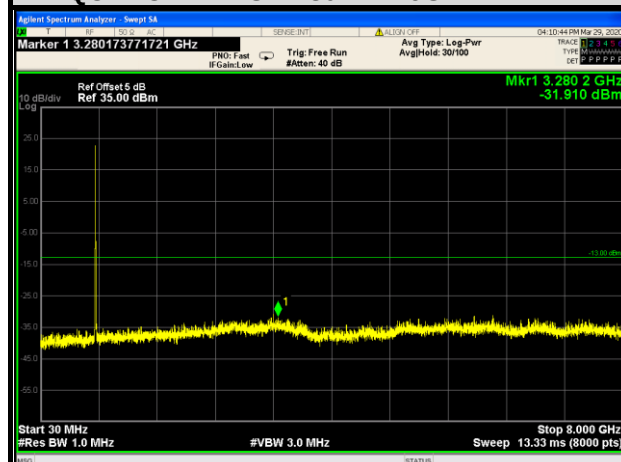



BUREAU
VERITAS

Test Report No.: RF200327S003-3

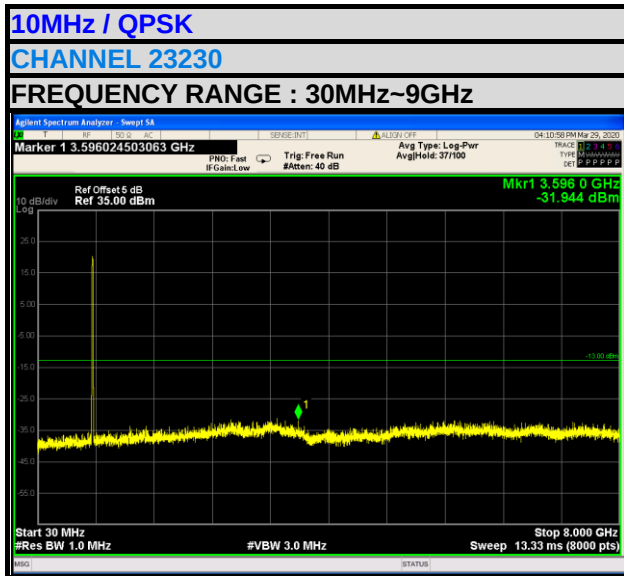

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.dg@cn.bureauveritas.com

3.7 RADIATED EMISSION MEASUREMENT

3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

3.7.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.7.3 DEVIATION FROM TEST STANDARD


No deviation

3.7.4 TEST SETUP


<Below 30MHz>

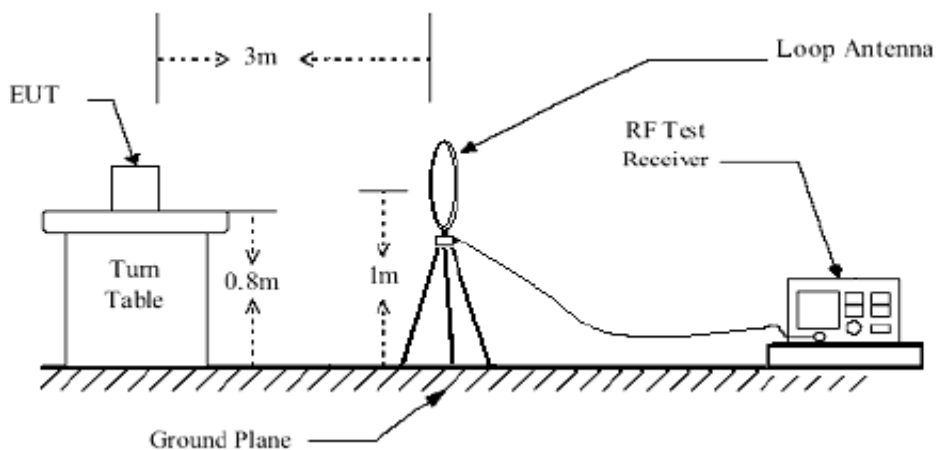

< Frequency Range 30MHz~1GHz >

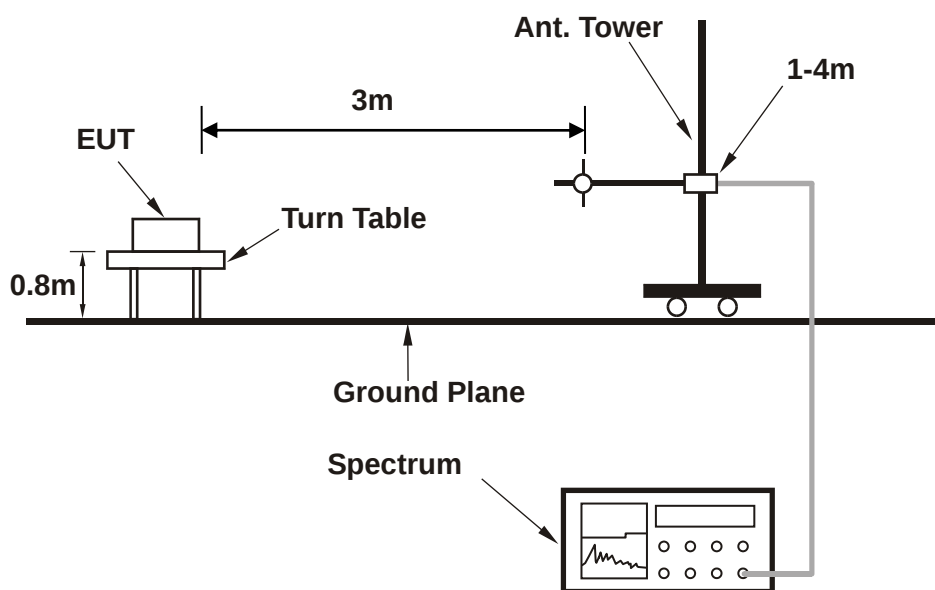

< Frequency Range above 1GHz >

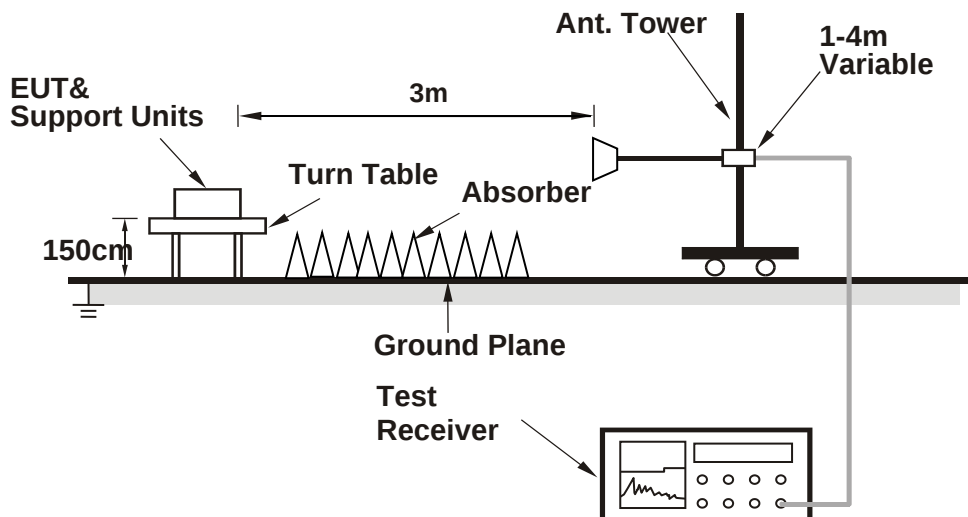

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.7.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE Band 4

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	36.2541	H	-63.92	peak	-13	-50.92	-72.34	-8.42
2	67.2022	H	-71.49	peak	-13	-58.49	-68.71	2.78
3	135.9822	H	-71.09	peak	-13	-58.09	-70.97	0.12
4	178.1327	H	-64.17	peak	-13	-51.17	-64.56	-0.39
5	235.8164	H	-64.58	peak	-13	-51.58	-65.31	-0.73
6	616.3718	H	-63.67	peak	-13	-50.67	-71.59	-7.92



MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	43.2017	V	-62.89	peak	-13	-49.89	-61.01	1.88
2	67.2022	V	-63.26	peak	-13	-50.26	-61.38	1.88
3	141.8262	V	-65.5	peak	-13	-52.5	-70.49	-4.99
4	179.3864	V	-64.31	peak	-13	-51.31	-68.29	-3.98
5	506.4791	V	-63.48	peak	-13	-50.48	-73.22	-9.74
6	972.3374	V	-57.06	peak	-13	-44.06	-71.79	-14.73





BUREAU
VERITAS

Test Report No.: RF200327S003-3

LTE Band 12


MODE	TX channel 23060	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	30.8535	H	-55.32	peak	-13	-42.32	-68.66	-13.34
2	65.8031	H	-74.64	peak	-13	-61.64	-71.66	2.98
3	190.405	H	-68.63	peak	-13	-55.63	-68.91	-0.28
4	357.9287	H	-68.94	peak	-13	-55.94	-71.41	-2.47
5	742.2587	H	-61.83	peak	-13	-48.83	-70.51	-8.68
6	848.0563	H	-60.8	peak	-13	-47.8	-71.58	-10.78



MODE	TX channel 23060	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	32.8637	V	-61.92	peak	-13	-48.92	-66.64	-4.72
2	43.0505	V	-64.11	peak	-13	-51.11	-62.3	1.81
3	65.8031	V	-68.97	peak	-13	-55.97	-66.81	2.16
4	236.6447	V	-69.64	peak	-13	-56.64	-71.82	-2.18
5	519.0649	V	-63.33	peak	-13	-50.33	-72.84	-9.51
6	955.4381	V	-55.49	peak	-13	-42.49	-70.2	-14.71

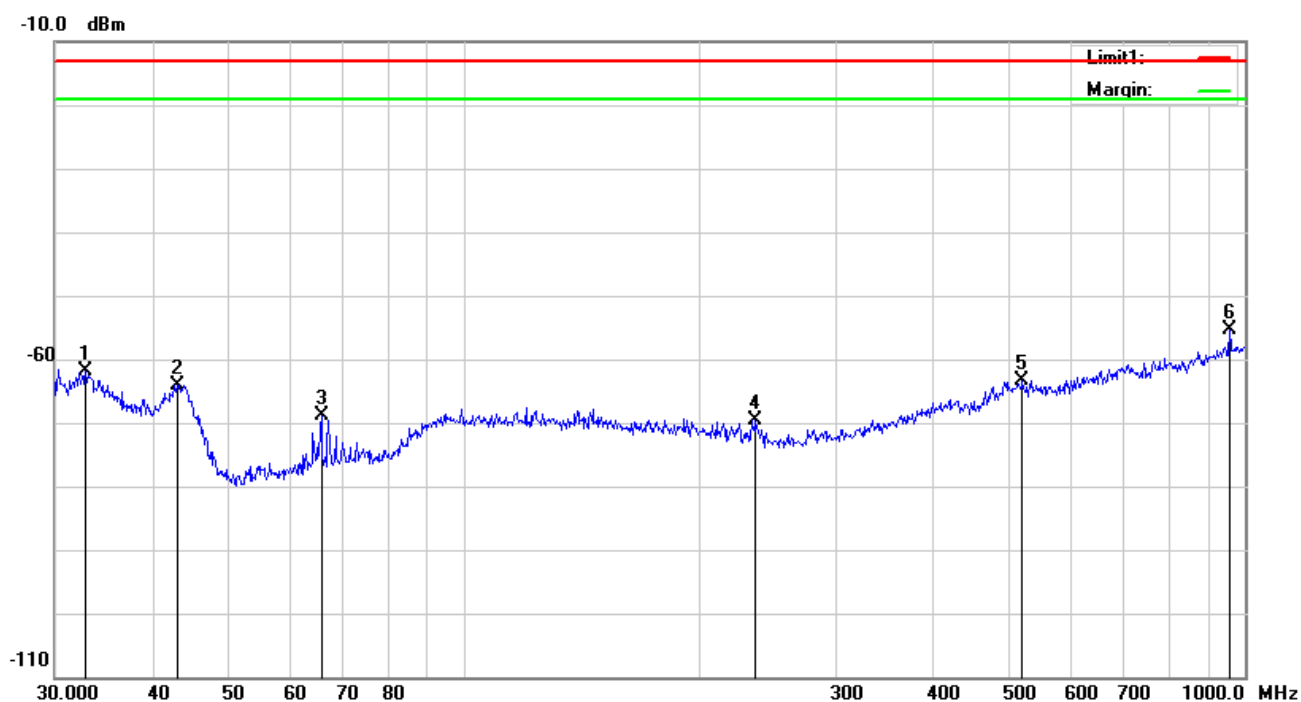




**BUREAU
VERITAS**

Test Report No.: RF200327S003-3

LTE Band 13

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	31.1798	H	-53.21	peak	-13	-40.21	-66.25	-13.04
2	170.1948	H	-67.14	peak	-13	-54.14	-67.6	-0.46
3	236.6447	H	-66.2	peak	-13	-53.2	-66.94	-0.74
4	359.186	H	-66.49	peak	-13	-53.49	-68.97	-2.48
5	394.8545	H	-65.66	peak	-13	-52.66	-68.66	-3
6	752.7432	H	-61.2	peak	-13	-48.2	-70.01	-8.81

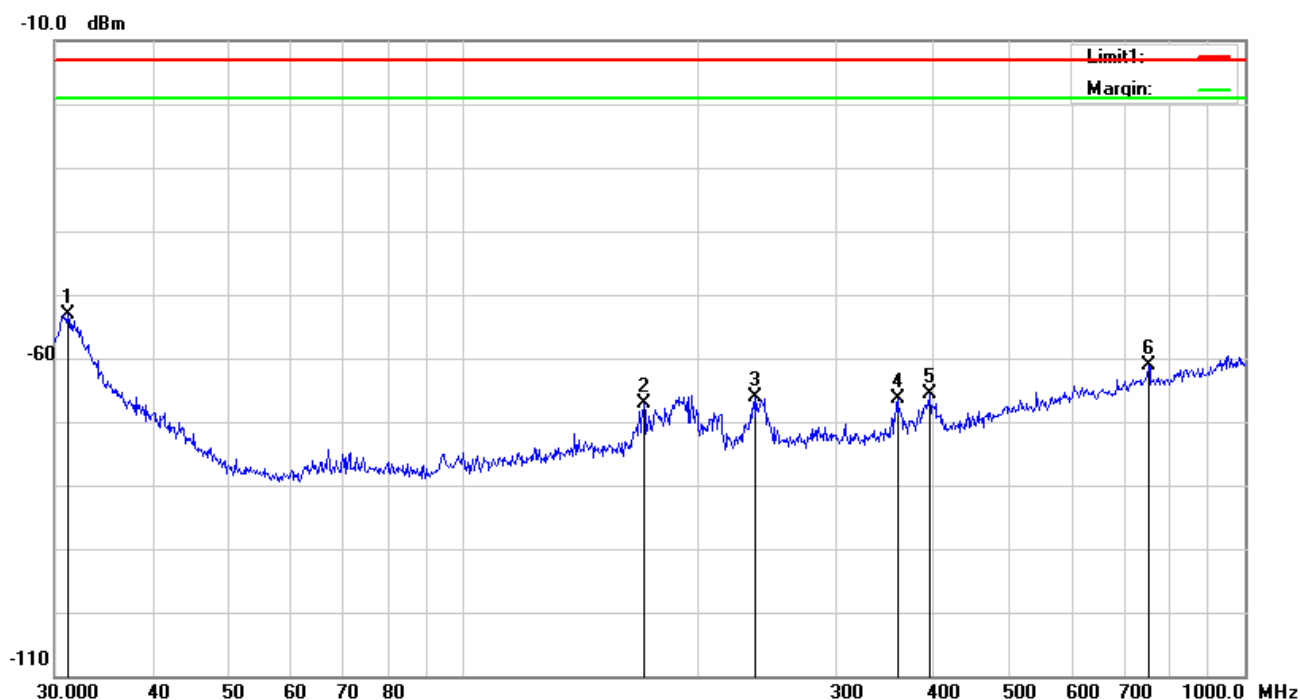

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Aaron Liang		

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	32.5198	V	-61.06	peak	-13	-48.06	-66.03	-4.97
2	42.7496	V	-63.05	peak	-13	-50.05	-61.36	1.69
3	67.2022	V	-67.09	peak	-13	-54.09	-65.21	1.88
4	176.8878	V	-66.3	peak	-13	-53.3	-70.36	-4.06
5	400.4319	V	-62.31	peak	-13	-49.31	-68.99	-6.68
6	942.1305	V	-56.7	peak	-13	-43.7	-71.25	-14.55





**BUREAU
VERITAS**

Test Report No.: RF200327S003-3

ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3421.4	V	-44.25	PK	-13	-31.25	-62.21	17.96
2	3421.4	H	-42.99	PK	-13	-29.99	-60.95	17.96
3	5132.1	V	-41.76	PK	-13	-28.76	-62.96	21.2
4	5132.1	H	-41.75	PK	-13	-28.75	-62.95	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-33.25	PK	-13	-20.25	-51.21	17.96
2	3465	H	-47.83	PK	-13	-34.83	-65.79	17.96
3	5197.5	V	-36.84	PK	-13	-23.84	-58.04	21.2
4	5197.5	H	-40.67	PK	-13	-27.67	-61.87	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3508.6	V	-45.33	PK	-13	-32.33	-63.29	17.96
2	3508.6	H	-44.68	PK	-13	-31.68	-62.64	17.96
3	5262.9	V	-41.02	PK	-13	-28.02	-62.22	21.2
4	5262.9	H	-40.25	PK	-13	-27.25	-61.45	21.2

Note:

- 1, The testing has been conformed to $10 \times 1754.3 \text{ MHz} = 17,543 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 4

CHANNEL BANDWIDTH: 3MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3423	V	-44.25	PK	-13	-31.25	-62.21	17.96
2	3423	H	-43.69	PK	-13	-30.69	-61.65	17.96
3	5134.5	V	-40.2	PK	-13	-27.2	-61.4	21.2
4	5134.5	H	-43.12	PK	-13	-30.12	-64.32	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-46.19	PK	-13	-33.19	-64.15	17.96
2	3465	H	-46.33	PK	-13	-33.33	-64.29	17.96
3	5197.5	V	-42.23	PK	-13	-29.23	-63.43	21.2
4	5197.5	H	-41.87	PK	-13	-28.87	-63.07	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3507	V	-46.58	PK	-13	-33.58	-64.54	17.96
2	3507	H	-45.32	PK	-13	-32.32	-63.28	17.96
3	5260.5	V	-40.69	PK	-13	-27.69	-61.89	21.2
4	5260.5	H	-41.75	PK	-13	-28.75	-62.95	21.2

Note:

- 1, The testing has been conformed to $10 \times 1753.5 \text{ MHz} = 17,535 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3425	V	-46.36	PK	-13	-33.36	-64.32	17.96
2	3425	H	-43.72	PK	-13	-30.72	-61.68	17.96
3	5137.5	V	-41.95	PK	-13	-28.95	-63.15	21.2
4	5137.5	H	-40.97	PK	-13	-27.97	-62.17	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-46.16	PK	-13	-33.16	-64.12	17.96
2	3465	H	-47.18	PK	-13	-34.18	-65.14	17.96
3	5197.5	V	-40.53	PK	-13	-27.53	-61.73	21.2
4	5197.5	H	-42.8	PK	-13	-29.8	-64	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3505	V	-46.45	PK	-13	-33.45	-64.41	17.96
2	3505	H	-45.86	PK	-13	-32.86	-63.82	17.96
3	5257.5	V	-43.43	PK	-13	-30.43	-64.63	21.2
4	5257.5	H	-41.4	PK	-13	-28.4	-62.6	21.2

Note:

- 1, The testing has been conformed to $10 \times 1752.5 \text{ MHz} = 17,525 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 4

CHANNEL BANDWIDTH: 10MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3430	V	-46.21	PK	-13	-33.21	-64.17	17.96
2	3430	H	-41.94	PK	-13	-28.94	-59.9	17.96
3	5145	V	-42.25	PK	-13	-29.25	-63.45	21.2
4	5145	H	-42.16	PK	-13	-29.16	-63.36	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-44.05	PK	-13	-31.05	-62.01	17.96
2	3465	H	-49.99	PK	-13	-36.99	-67.95	17.96
3	5197.5	V	-41.03	PK	-13	-28.03	-62.23	21.2
4	5197.5	H	-42.75	PK	-13	-29.75	-63.95	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3500	V	-45.62	PK	-13	-32.62	-63.58	17.96
2	3500	H	-45.2	PK	-13	-32.2	-63.16	17.96
3	5250	V	-40.86	PK	-13	-27.86	-62.06	21.2
4	5250	H	-41.49	PK	-13	-28.49	-62.69	21.2

Note:

- 1, The testing has been conformed to $10 \times 1750 \text{ MHz} = 17,500 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 4

CHANNEL BANDWIDTH: 15MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3435	V	-42.64	PK	-13	-29.64	-60.6	17.96
2	3435	H	-40.86	PK	-13	-27.86	-58.82	17.96
3	5152.5	V	-40.36	PK	-13	-27.36	-61.56	21.2
4	5152.5	H	-40.04	PK	-13	-27.04	-61.24	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-42.06	PK	-13	-29.06	-60.02	17.96
2	3465	H	-44.53	PK	-13	-31.53	-62.49	17.96
3	5197.5	V	-39	PK	-13	-26	-60.2	21.2
4	5197.5	H	-41.29	PK	-13	-28.29	-62.49	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3495	V	-45.45	PK	-13	-32.45	-63.41	17.96
2	3495	H	-44.76	PK	-13	-31.76	-62.72	17.96
3	5242.5	V	-40.84	PK	-13	-27.84	-62.04	21.2
4	5242.5	H	-41.83	PK	-13	-28.83	-63.03	21.2

Note:

- 1, The testing has been conformed to $10 \times 1747.5 \text{ MHz} = 17,475 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 4

CHANNEL BANDWIDTH: 20MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3440	V	-46.39	PK	-13	-33.39	-64.35	17.96
2	3440	H	-46.02	PK	-13	-33.02	-63.98	17.96
3	5160	V	-42.11	PK	-13	-29.11	-63.31	21.2
4	5160	H	-42.62	PK	-13	-29.62	-63.82	21.2

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3465	V	-45.11	PK	-13	-32.11	-63.07	17.96
2	3465	H	-46.18	PK	-13	-33.18	-64.14	17.96
3	5197.5	V	-40	PK	-13	-27	-61.2	21.2
4	5197.5	H	-41.3	PK	-13	-28.3	-62.5	21.2

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	3490	V	-45.31	PK	-13	-32.31	-63.27	17.96
2	3490	H	-44.86	PK	-13	-31.86	-62.82	17.96
3	5235	V	-40.95	PK	-13	-27.95	-62.15	21.2
4	5235	H	-40.22	PK	-13	-27.22	-61.42	21.2

Note:

- 1, The testing has been conformed to $10 \times 1745 \text{ MHz} = 17,450 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1399.4	V	-34.46	PK	-13	-21.46	-44.64	10.18
2	1399.4	H	-37.23	PK	-13	-24.23	-47.41	10.18
3	2798.8	V	-42.26	PK	-13	-29.26	-58.98	16.72
4	2798.8	H	-39.53	PK	-13	-26.53	-56.25	16.72

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1415	V	-32.12	PK	-13	-19.12	-42.3	10.18
2	1415	H	-39.3	PK	-13	-26.3	-49.48	10.18
3	2830	V	-37.72	PK	-13	-24.72	-54.44	16.72
4	2830	H	-32.63	PK	-13	-19.63	-49.35	16.72

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1430.6	V	-32.5	PK	-13	-19.5	-42.68	10.18
2	1430.6	H	-39.02	PK	-13	-26.02	-49.2	10.18
3	2861.2	V	-36.95	PK	-13	-23.95	-53.67	16.72
4	2861.2	H	-34.73	PK	-13	-21.73	-51.45	16.72

Note:

- 1, The testing has been conformed to $10 \times 715.3 \text{ MHz} = 7,153 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 12

CHANNEL BANDWIDTH: 3MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1401	V	-35.02	PK	-13	-22.02	-45.2	10.18
2	1401	H	-39.95	PK	-13	-26.95	-50.13	10.18
3	2802	V	-41.2	PK	-13	-28.2	-57.92	16.72
4	2802	H	-40.07	PK	-13	-27.07	-56.79	16.72

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1415	V	-34.03	PK	-13	-21.03	-44.21	10.18
2	1415	H	-40.17	PK	-13	-27.17	-50.35	10.18
3	2830	V	-35.04	PK	-13	-22.04	-51.76	16.72
4	2830	H	-32.52	PK	-13	-19.52	-49.24	16.72

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTION FACTOR (dB/m)
1	1429	V	-33.49	PK	-13	-20.49	-43.67	10.18
2	1429	H	-39.3	PK	-13	-26.3	-49.48	10.18
3	2858	V	-42.01	PK	-13	-29.01	-58.73	16.72
4	2858	H	-38.28	PK	-13	-25.28	-55	16.72

Note:

- 1, The testing has been conformed to $10 \times 714.5 \text{ MHz} = 7,145 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 12

CHANNEL BANDWIDTH: 5MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1403	V	-40.63	PK	-13	-27.63	-50.81	10.18
2	1403	H	-40.8	PK	-13	-27.8	-50.98	10.18
3	2806	V	-39.75	PK	-13	-26.75	-56.47	16.72
4	2806	H	-40.65	PK	-13	-27.65	-57.37	16.72

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1415	V	-31.31	PK	-13	-18.31	-41.49	10.18
2	1415	H	-39.04	PK	-13	-26.04	-49.22	10.18
3	2830	V	-36.77	PK	-13	-23.77	-53.49	16.72
4	2830	H	-32.78	PK	-13	-19.78	-49.5	16.72

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1427	V	-31.1	PK	-13	-18.1	-41.28	10.18
2	1427	H	-36.79	PK	-13	-23.79	-46.97	10.18
3	2854	V	-45.44	PK	-13	-32.44	-62.16	16.72
4	2854	H	-40.27	PK	-13	-27.27	-56.99	16.72

Note:

- 1, The testing has been conformed to $10 \times 713.5 \text{ MHz} = 7,135 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE BAND 12

CHANNEL BANDWIDTH: 10MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1408	V	-34.01	PK	-13	-21.01	-44.19	10.18
2	1408	H	-39.52	PK	-13	-26.52	-49.7	10.18
3	2816	V	-33.4	PK	-13	-20.4	-50.12	16.72
4	2816	H	-40.34	PK	-13	-27.34	-57.06	16.72

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1415	V	-33.42	PK	-13	-20.42	-43.6	10.18
2	1415	H	-38.33	PK	-13	-25.33	-48.51	10.18
3	2830	V	-38.75	PK	-13	-25.75	-55.47	16.72
4	2830	H	-34.2	PK	-13	-21.2	-50.92	16.72

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1422	V	-33.81	PK	-13	-20.81	-43.99	10.18
2	1422	H	-39.21	PK	-13	-26.21	-49.39	10.18
3	2844	V	-36.56	PK	-13	-23.56	-53.28	16.72
4	2844	H	-32.33	PK	-13	-19.33	-49.05	16.72

Note:

- 1, The testing has been conformed to $10 \times 711 \text{ MHz} = 7,110 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Test Report No.: RF200327S003-3

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz / QPSK

Low channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1559	V	-30.9	PK	-13	-17.9	-41.08	10.18
2	1559	H	-40.63	PK	-13	-27.63	-50.81	10.18
3	2338.5	V	-50.28	PK	-13	-37.28	-64.51	14.23
4	2338.5	H	-50.12	PK	-13	-37.12	-64.35	14.23

Middle channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1564	V	-34.26	PK	-13	-21.26	-44.44	10.18
2	1564	H	-39.76	PK	-13	-26.76	-49.94	10.18
3	2346	V	-50.55	PK	-13	-37.55	-64.78	14.23
4	2346	H	-50.2	PK	-13	-37.2	-64.43	14.23

High channel

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1569	V	-32.7	PK	-13	-19.7	-42.88	10.18
2	1569	H	-39.81	PK	-13	-26.81	-49.99	10.18
3	2353.5	V	-51.34	PK	-13	-38.34	-65.57	14.23
4	2353.5	H	-50.52	PK	-13	-37.52	-64.75	14.23

Note:

- 1, The testing has been conformed to $10 \times 784.5 \text{ MHz} = 7,845 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Test Report No.: RF200327S003-3

LTE BAND 13

CHANNEL BANDWIDTH: 10MHz / QPSK

NO.	FREQ. (MHz)	Antenna Polarization (H/V)	EMISSION LEVEL (dBm/m)	DETECTOR (PK/AV)	LIMIT (dBm/m)	MARGIN (dB)	RAW VALUE (dBm)	CORRECTIO N FACTOR (dB/m)
1	1564	V	-33.63	PK	-13	-20.63	-43.81	10.18
2	1564	H	-41.69	PK	-13	-28.69	-51.87	10.18
3	2346	V	-52.27	PK	-13	-39.27	-66.5	14.23
4	2346	H	-51.48	PK	-13	-38.48	-65.71	14.23

Note:

- 1, The testing has been conformed to $10 \times 782 \text{ MHz} = 7,820 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Test Report No.: RF200327S003-3

4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---