


Test Mode: 08; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: Low



Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.66	24.77	2.32	38.37	36.38	74.00	-37.62	VERTICAL	Peak
2	1390.276	47.49	25.38	2.60	38.22	37.25	74.00	-36.75	VERTICAL	Peak
3	3386.297	47.49	28.83	4.10	36.99	43.43	68.20	-24.77	VERTICAL	Peak
4	4430.628	46.62	30.72	4.78	36.81	45.31	68.20	-22.89	VERTICAL	Peak
5	10520.000	43.30	39.50	7.42	37.35	52.87	68.20	-15.33	VERTICAL	Peak
6	15780.000	40.32	38.70	9.86	35.39	53.49	74.00	-20.51	VERTICAL	Peak

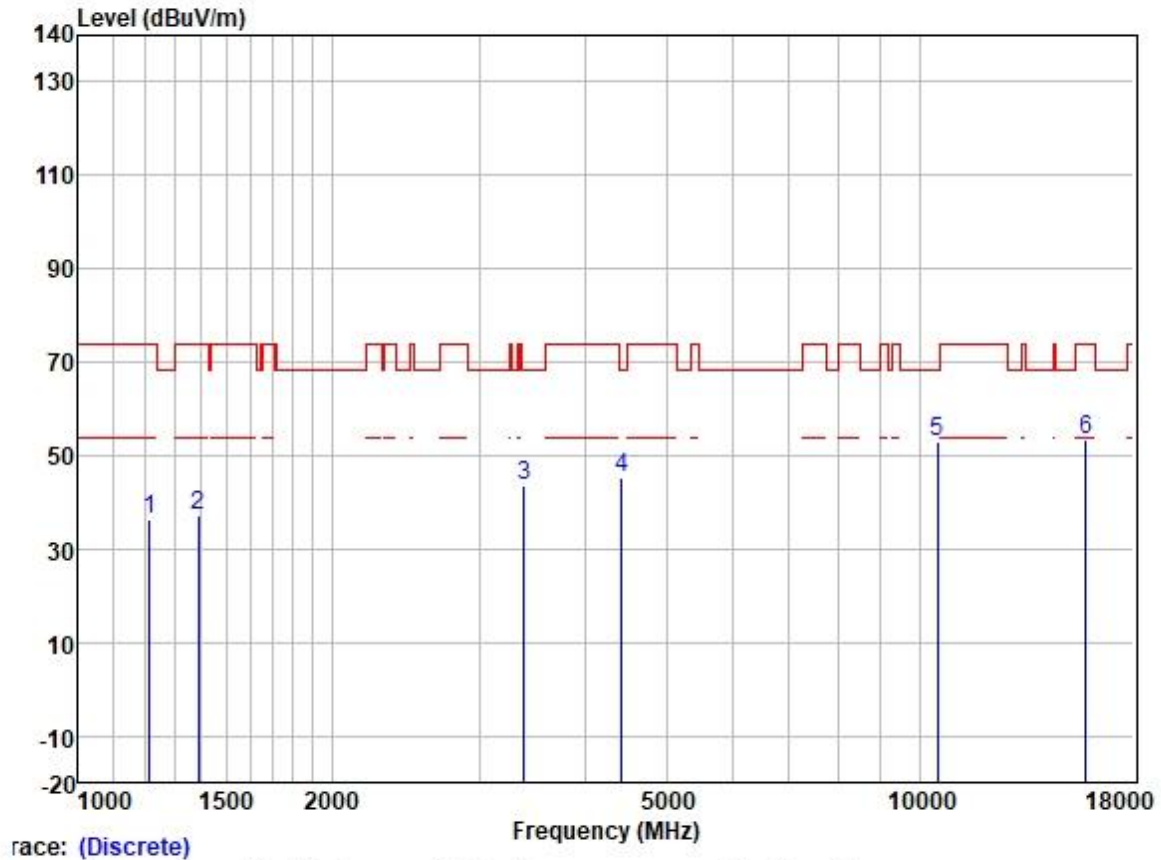

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

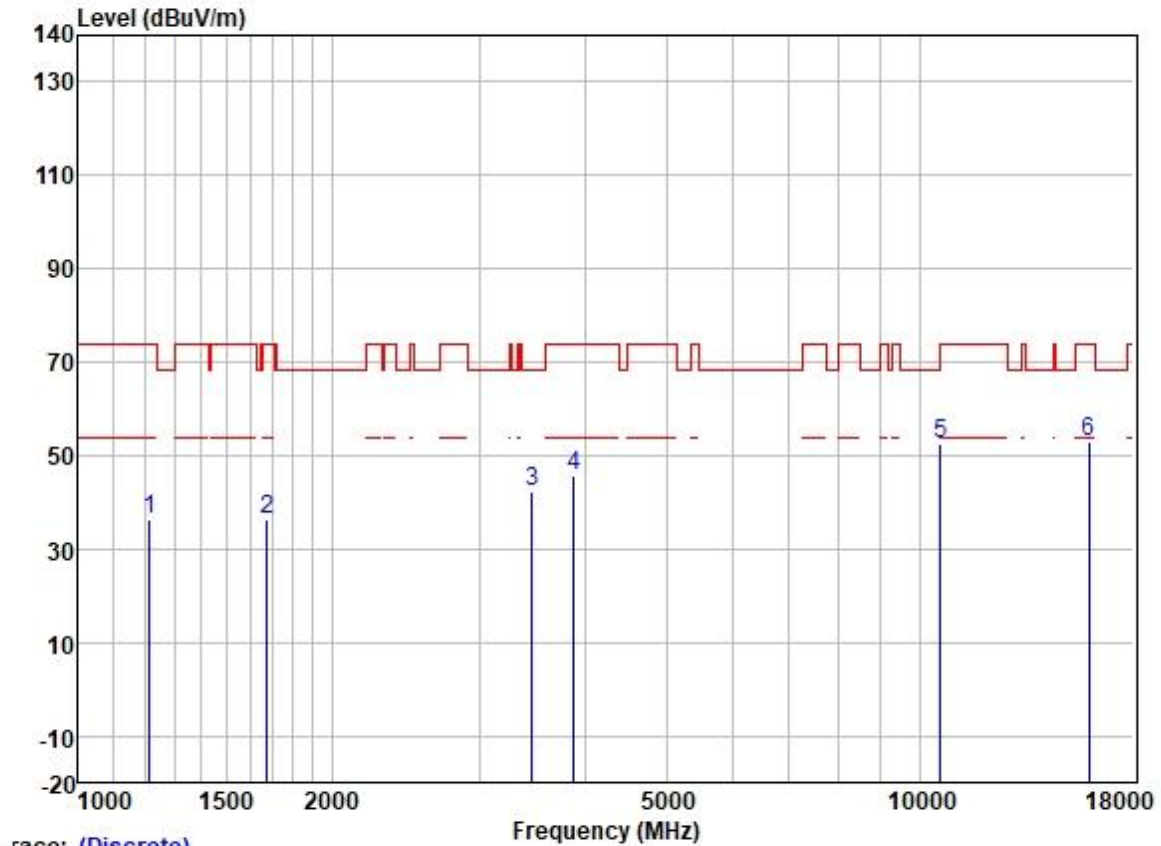


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.65	24.77	2.32	38.37	36.37	74.00	-37.63	HORIZONTAL	Peak
2	1677.621	45.72	25.68	2.80	37.91	36.29	74.00	-37.71	HORIZONTAL	Peak
3	3465.510	46.21	28.88	4.22	36.95	42.36	68.20	-25.84	HORIZONTAL	Peak
4	3879.027	48.23	29.66	4.60	36.83	45.66	74.00	-28.34	HORIZONTAL	Peak
5	10600.000	42.69	39.59	7.46	37.34	52.40	68.20	-15.80	HORIZONTAL	Peak
6	15900.000	40.16	38.44	9.86	35.40	53.06	74.00	-20.94	HORIZONTAL	Peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

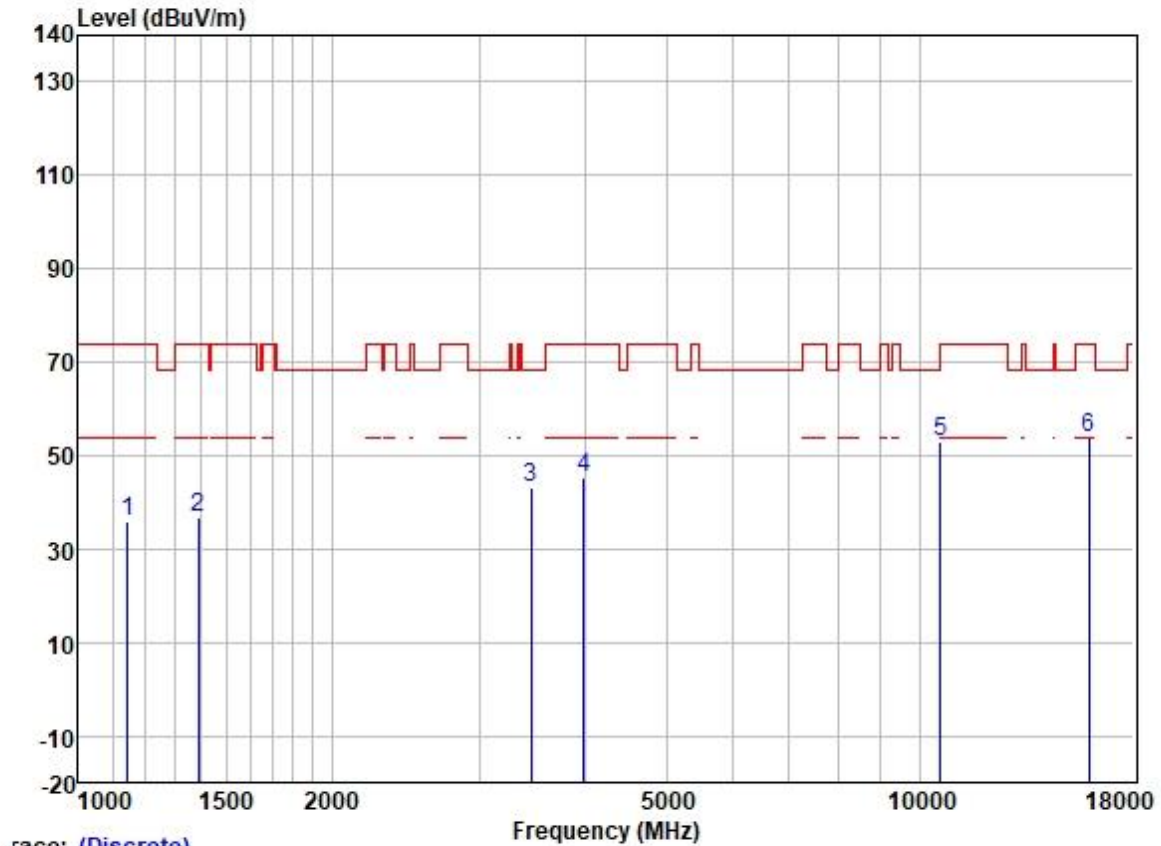

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	47.31	24.48	2.32	38.42	35.69	74.00	-38.31	VERTICAL	Peak
2	1390.276	47.15	25.38	2.60	38.22	36.91	74.00	-37.09	VERTICAL	Peak
3	3455.508	46.98	28.88	4.20	36.96	43.10	68.20	-25.10	VERTICAL	Peak
4	3992.781	47.63	29.79	4.60	36.80	45.22	74.00	-28.78	VERTICAL	Peak
5	10600.000	43.05	39.59	7.46	37.34	52.76	68.20	-15.44	VERTICAL	Peak
6	15900.000	41.01	38.44	9.86	35.40	53.91	74.00	-20.09	VERTICAL	Peak

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

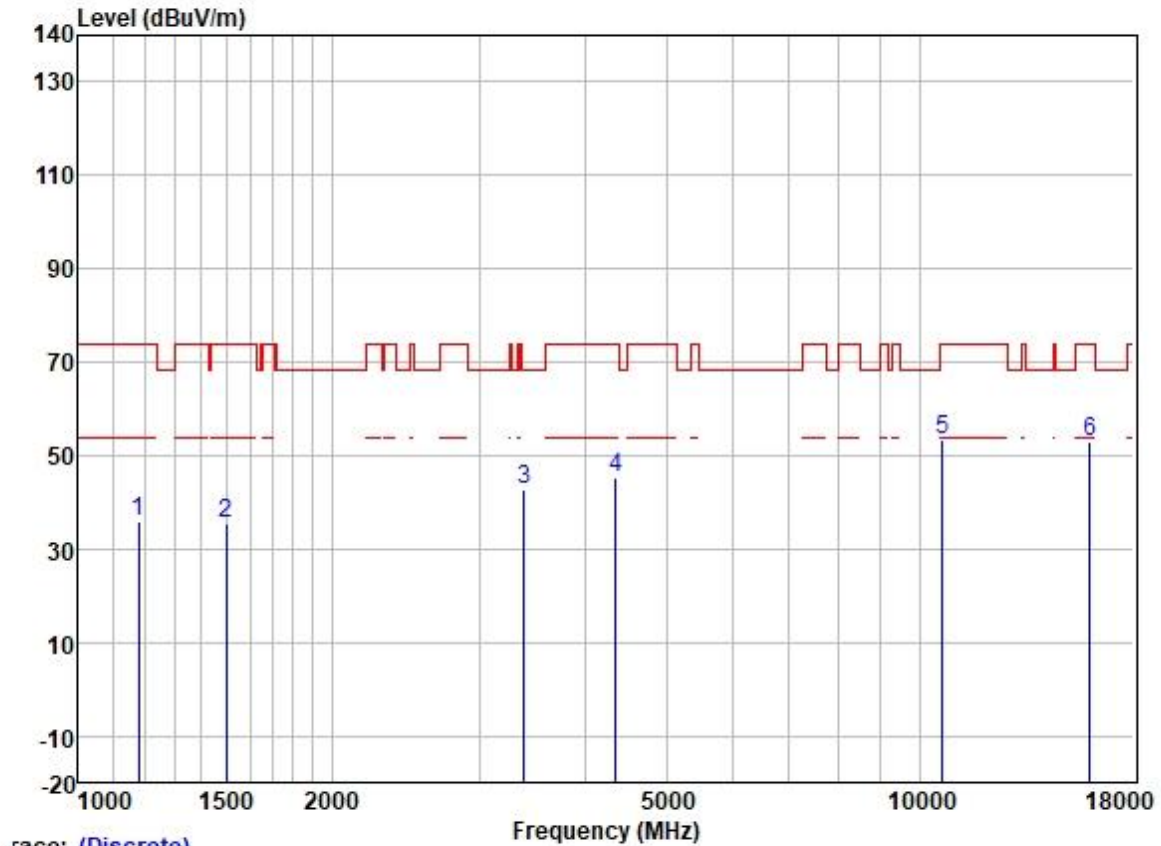

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	47.53	24.59	2.38	38.40	36.10	74.00	-37.90	HORIZONTAL	Peak
2	1498.781	45.28	25.50	2.80	38.10	35.48	74.00	-38.52	HORIZONTAL	Peak
3	3386.297	46.64	28.83	4.10	36.99	42.58	68.20	-25.62	HORIZONTAL	Peak
4	4354.454	46.96	30.59	4.68	36.81	45.42	74.00	-28.58	HORIZONTAL	Peak
5	10640.000	43.73	39.63	7.48	37.33	53.51	74.00	-20.49	HORIZONTAL	Peak
6	15960.000	40.31	38.37	9.85	35.40	53.13	74.00	-20.87	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

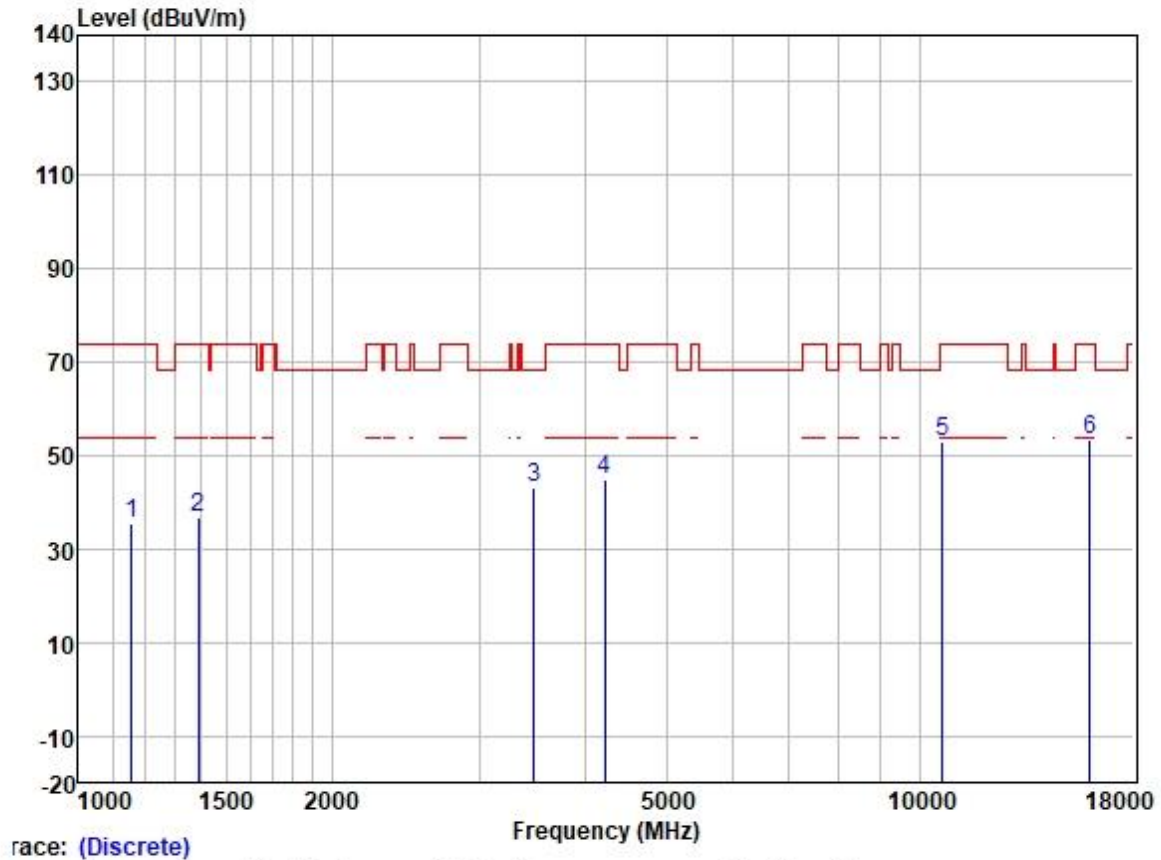

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	47.06	24.51	2.38	38.42	35.53	74.00	-38.47	VERTICAL	Peak
2	1390.276	47.00	25.38	2.60	38.22	36.76	74.00	-37.24	VERTICAL	Peak
3	3485.601	46.75	28.89	4.27	36.95	42.96	68.20	-25.24	VERTICAL	Peak
4	4230.396	46.82	30.26	4.61	36.81	44.88	74.00	-29.12	VERTICAL	Peak
5	10640.000	43.19	39.63	7.48	37.33	52.97	74.00	-21.03	VERTICAL	Peak
6	15960.000	40.66	38.37	9.85	35.40	53.48	74.00	-20.52	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

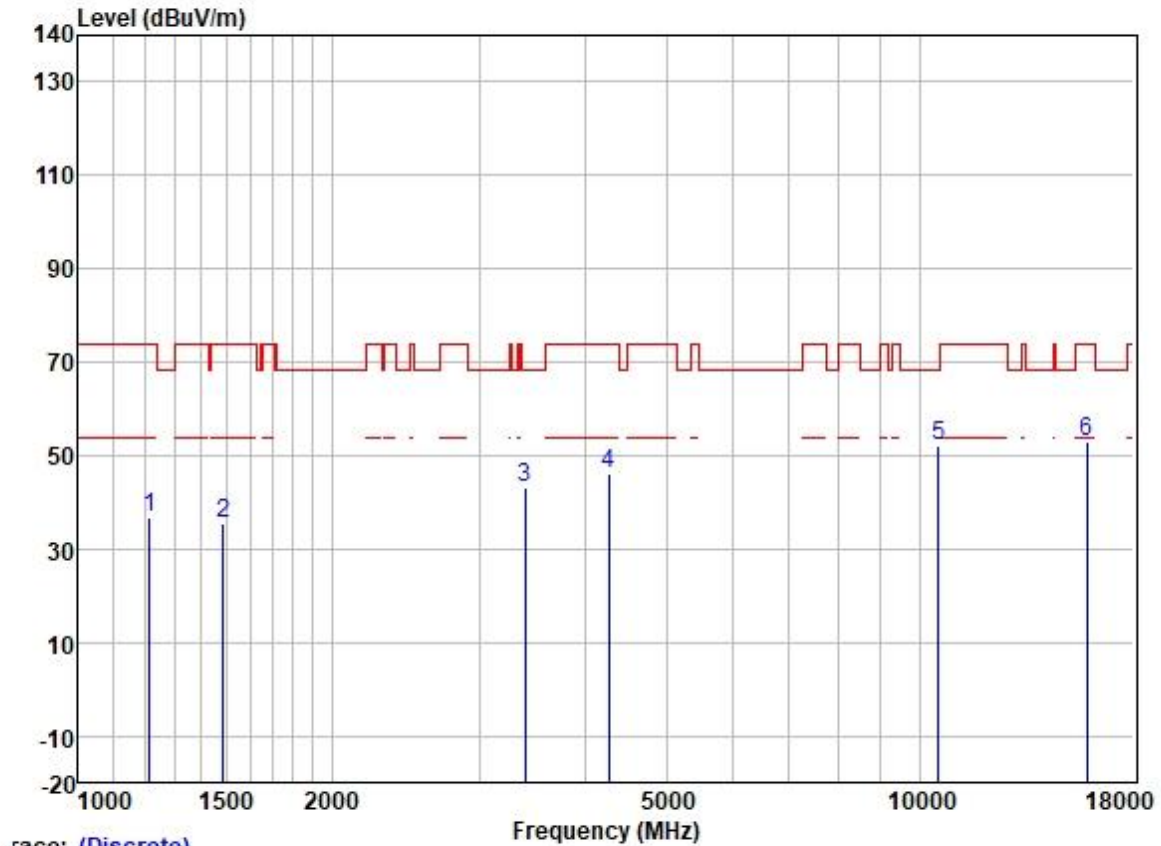


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.99	24.77	2.32	38.37	36.71	74.00	-37.29	HORIZONTAL	Peak
2	1485.841	45.32	25.49	2.78	38.13	35.46	74.00	-38.54	HORIZONTAL	Peak
3	3396.098	47.01	28.84	4.10	36.98	42.97	68.20	-25.23	HORIZONTAL	Peak
4	4267.237	47.89	30.38	4.63	36.81	46.09	74.00	-27.91	HORIZONTAL	Peak
5	10540.000	42.56	39.53	7.43	37.35	52.17	68.20	-16.03	HORIZONTAL	Peak
6	15810.000	40.06	38.61	9.86	35.39	53.14	74.00	-20.86	HORIZONTAL	Peak



Test Mode: 08; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

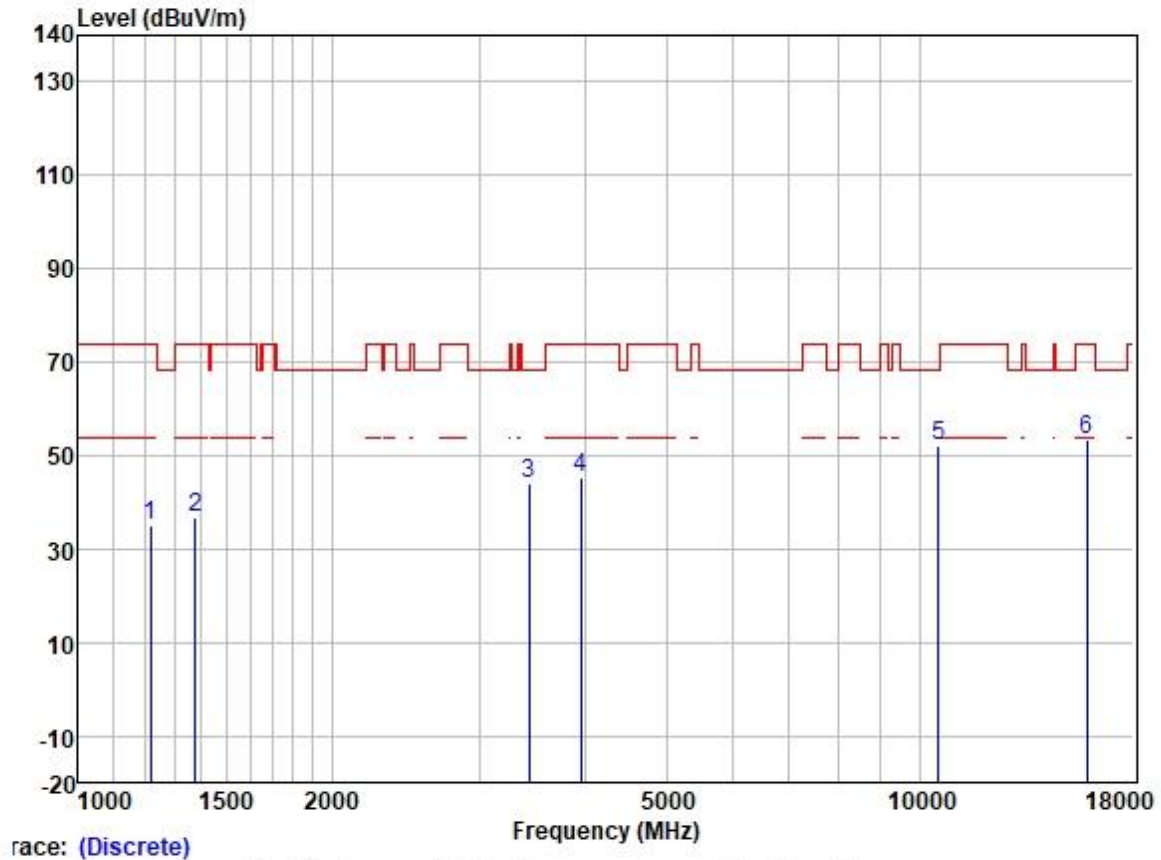


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.36	24.79	2.32	38.37	35.10	74.00	-38.90	VERTICAL	Peak
2	1378.273	47.01	25.36	2.60	38.25	36.72	74.00	-37.28	VERTICAL	Peak
3	3435.590	47.77	28.87	4.16	36.97	43.83	68.20	-24.37	VERTICAL	Peak
4	3958.309	47.74	29.75	4.60	36.81	45.28	74.00	-28.72	VERTICAL	Peak
5	10540.000	42.47	39.53	7.43	37.35	52.08	68.20	-16.12	VERTICAL	Peak
6	15810.000	40.38	38.61	9.86	35.39	53.46	74.00	-20.54	VERTICAL	Peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

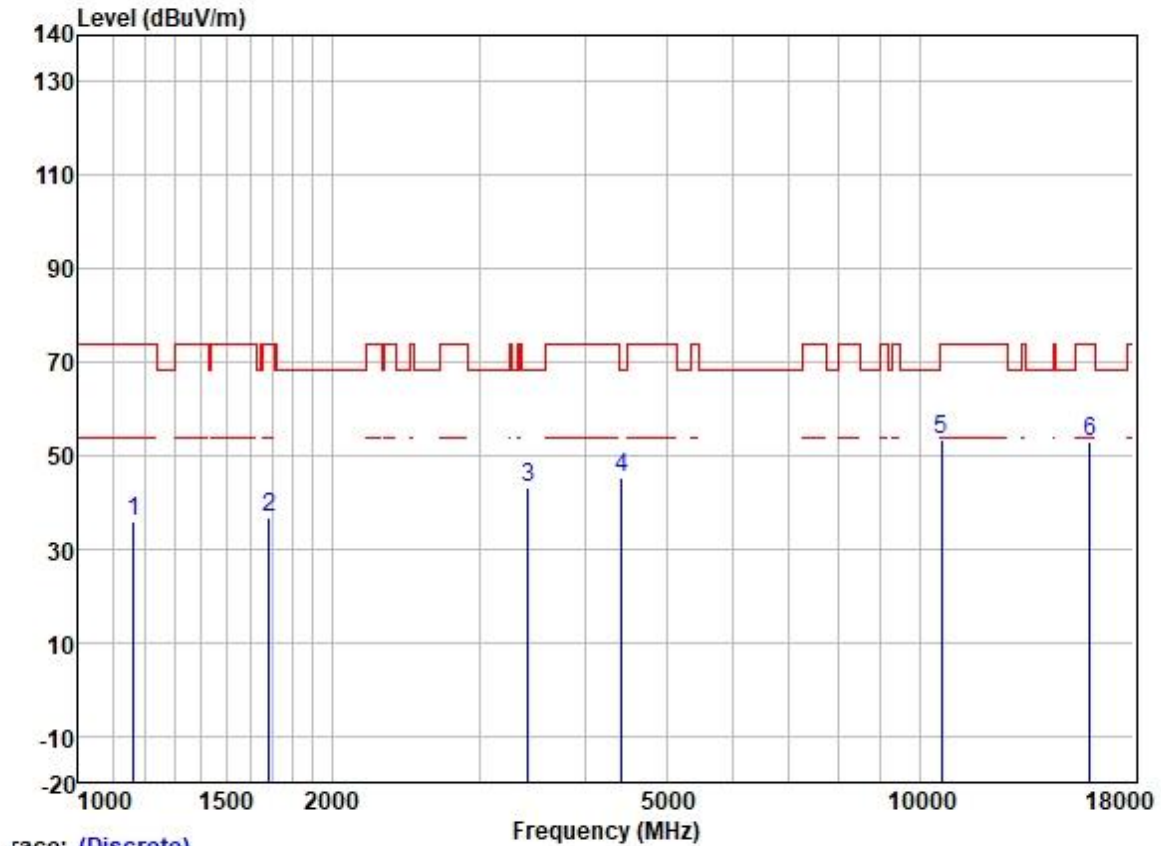

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.21	24.53	2.40	38.42	35.72	74.00	-38.28	HORIZONTAL	Peak
2	1687.347	45.97	25.69	2.80	37.91	36.55	74.00	-37.45	HORIZONTAL	Peak
3	3425.675	47.31	28.86	4.15	36.97	43.35	68.20	-24.85	HORIZONTAL	Peak
4	4430.628	46.74	30.72	4.78	36.81	45.43	68.20	-22.77	HORIZONTAL	Peak
5	10620.000	43.79	39.59	7.46	37.34	53.50	74.00	-20.50	HORIZONTAL	Peak
6	15930.000	40.24	38.37	9.85	35.40	53.06	74.00	-20.94	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

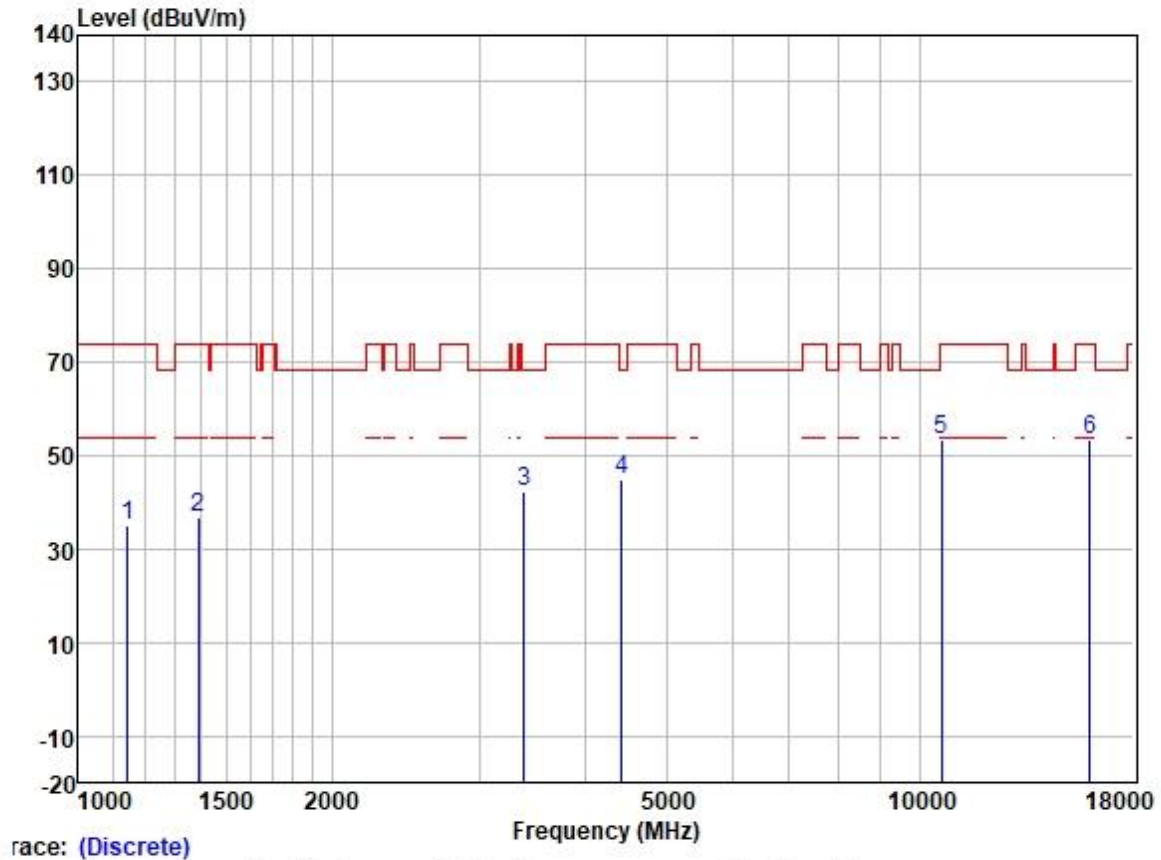

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	46.50	24.48	2.32	38.42	34.88	74.00	-39.12	VERTICAL	Peak
2	1390.276	47.04	25.38	2.60	38.22	36.80	74.00	-37.20	VERTICAL	Peak
3	3386.297	46.50	28.83	4.10	36.99	42.44	68.20	-25.76	VERTICAL	Peak
4	4430.628	46.36	30.72	4.78	36.81	45.05	68.20	-23.15	VERTICAL	Peak
5	10620.000	43.57	39.59	7.46	37.34	53.28	74.00	-20.72	VERTICAL	Peak
6	15930.000	40.68	38.37	9.85	35.40	53.50	74.00	-20.50	VERTICAL	Peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

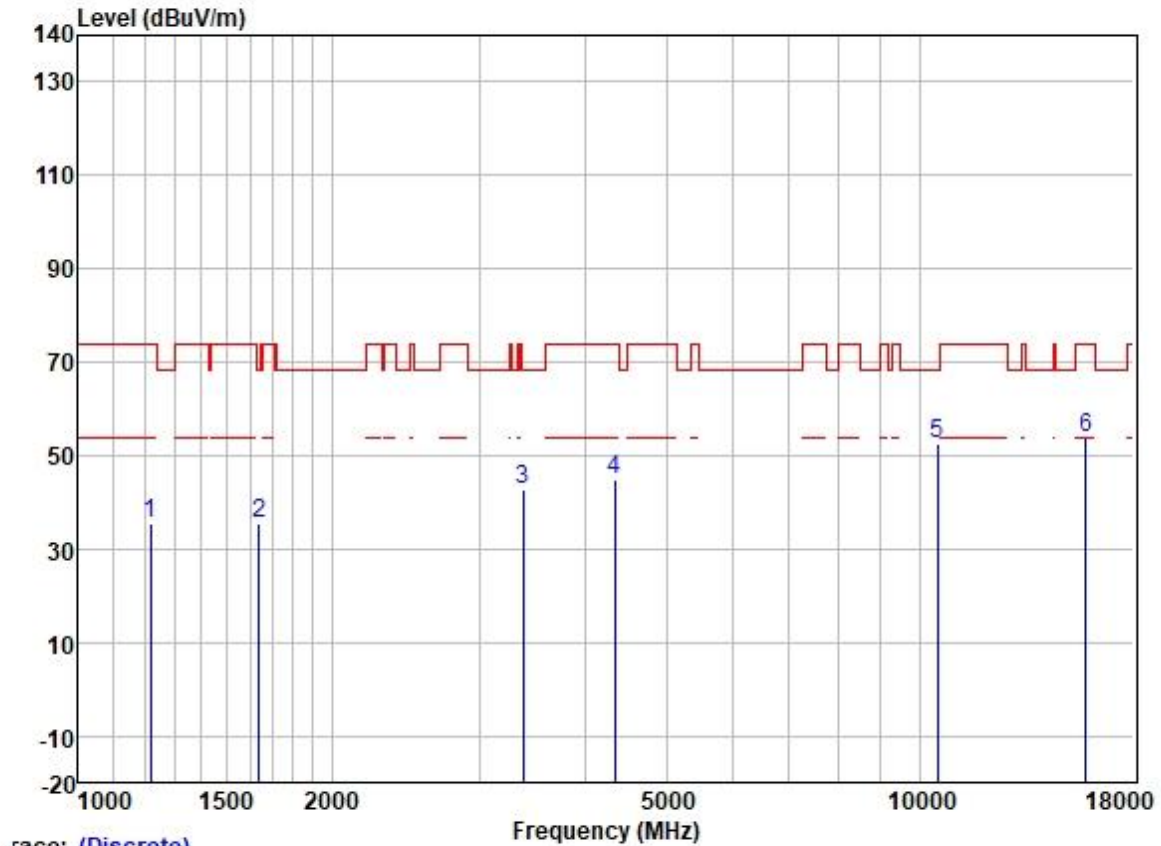

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.60	24.79	2.32	38.37	35.34	74.00	-38.66	HORIZONTAL	Peak
2	1639.274	45.18	25.62	2.80	37.93	35.67	68.20	-32.53	HORIZONTAL	Peak
3	3376.523	46.77	28.83	4.09	36.99	42.70	68.20	-25.50	HORIZONTAL	Peak
4	4341.886	46.53	30.57	4.67	36.81	44.96	74.00	-29.04	HORIZONTAL	Peak
5	10520.000	42.99	39.50	7.42	37.35	52.56	68.20	-15.64	HORIZONTAL	Peak
6	15780.000	40.50	38.70	9.86	35.39	53.67	74.00	-20.33	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

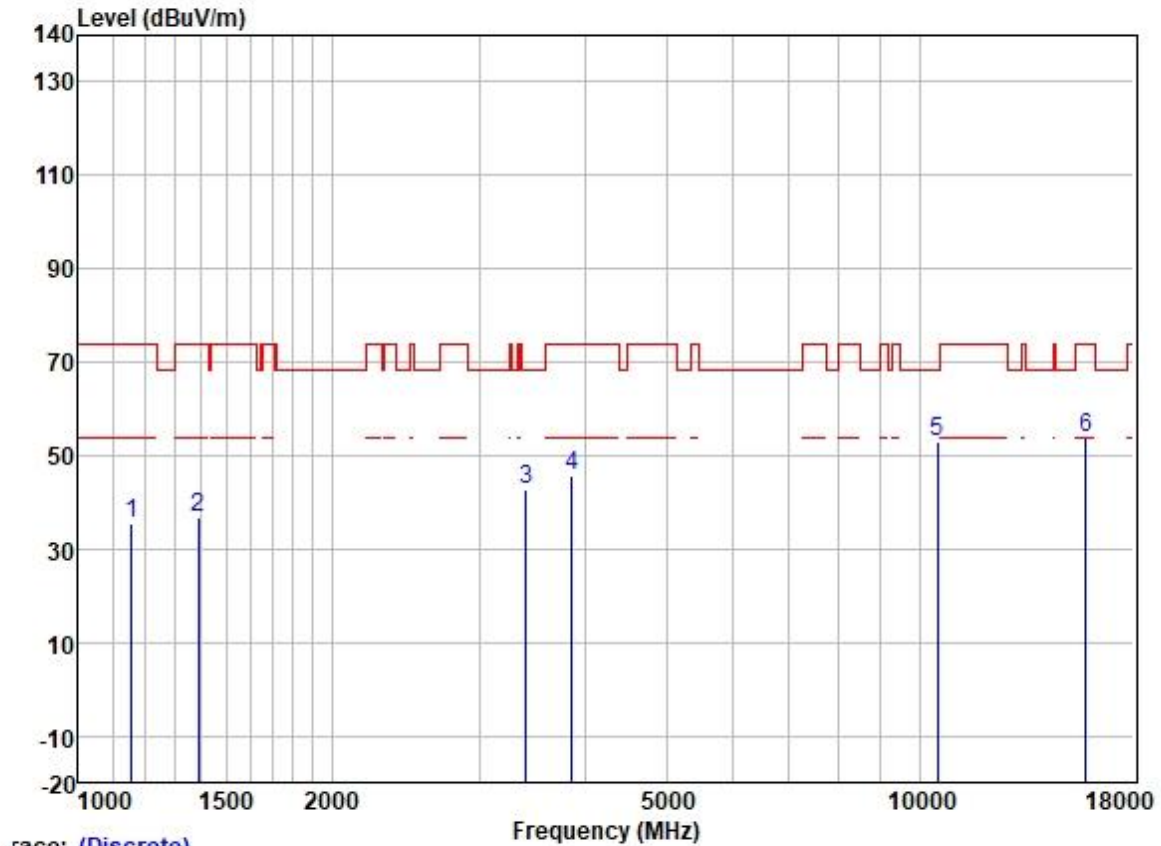

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	46.87	24.51	2.38	38.42	35.34	74.00	-38.66	VERTICAL	Peak
2	1390.276	46.97	25.38	2.60	38.22	36.73	74.00	-37.27	VERTICAL	Peak
3	3405.929	46.76	28.85	4.11	36.98	42.74	68.20	-25.46	VERTICAL	Peak
4	3856.668	48.20	29.62	4.60	36.84	45.58	74.00	-28.42	VERTICAL	Peak
5	10520.000	43.37	39.50	7.42	37.35	52.94	68.20	-15.26	VERTICAL	Peak
6	15780.000	40.65	38.70	9.86	35.39	53.82	74.00	-20.18	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

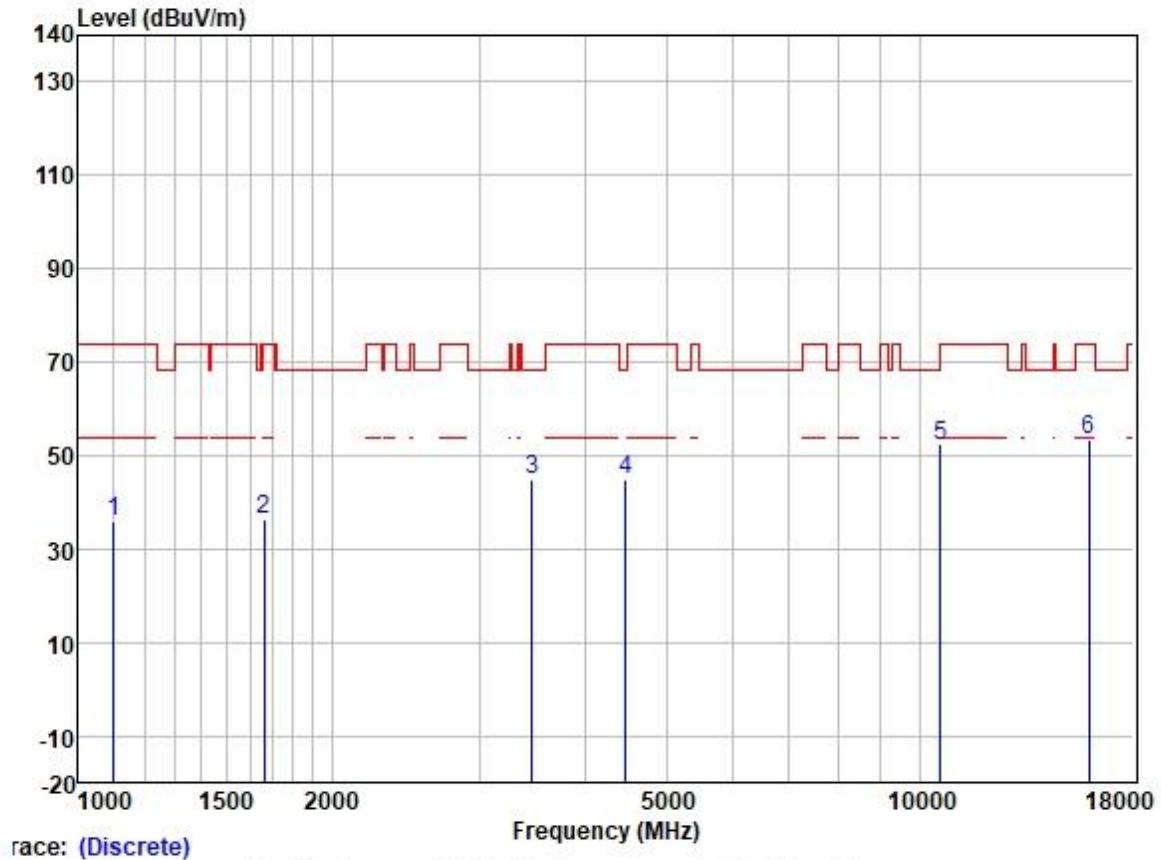


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1100.079	47.68	24.37	2.30	38.45	35.90	74.00	-38.10	HORIZONTAL	Peak
2	1663.137	45.94	25.65	2.80	37.91	36.48	74.00	-37.52	HORIZONTAL	Peak
3	3465.510	48.57	28.88	4.22	36.95	44.72	68.20	-23.48	HORIZONTAL	Peak
4	4469.214	45.80	30.77	4.93	36.81	44.69	68.20	-23.51	HORIZONTAL	Peak
5	10600.000	42.61	39.59	7.46	37.34	52.32	68.20	-15.88	HORIZONTAL	Peak
6	15900.000	40.61	38.44	9.86	35.40	53.51	74.00	-20.49	HORIZONTAL	Peak



Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

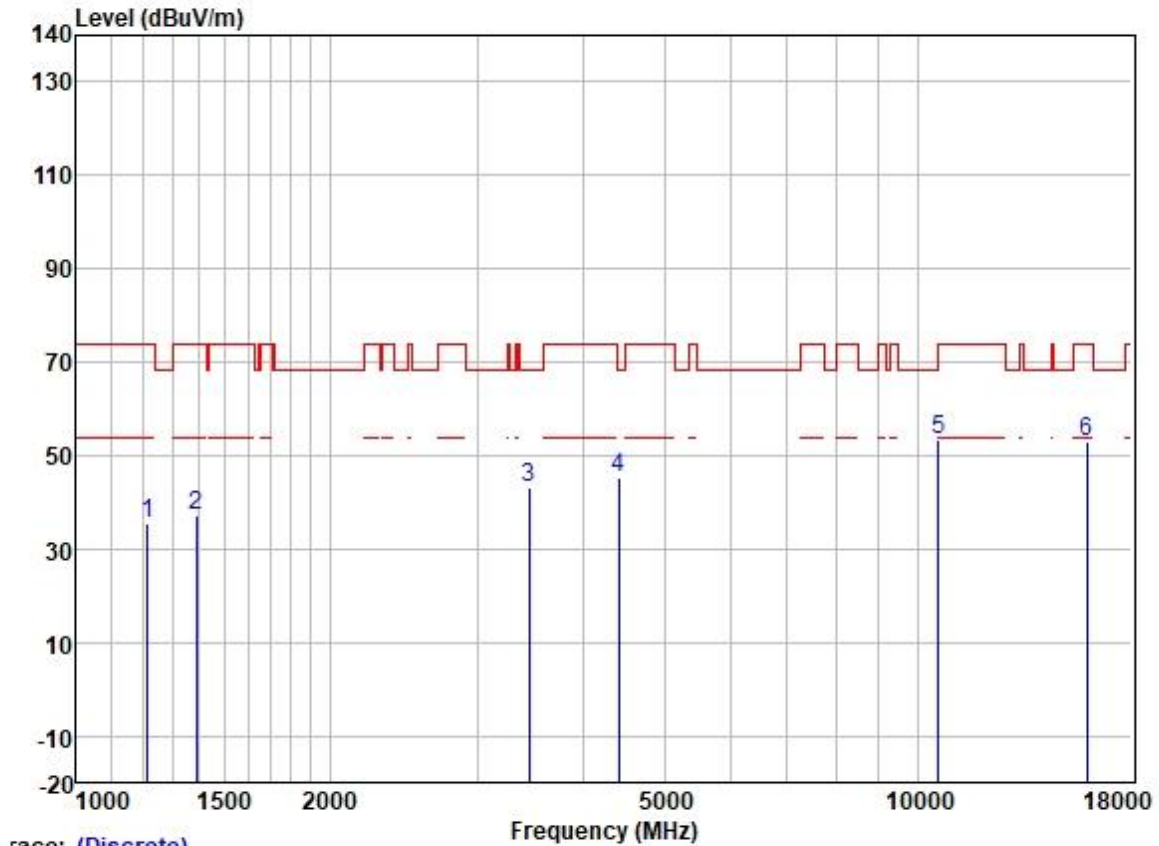

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	46.64	24.77	2.32	38.37	35.36	74.00	-38.64	VERTICAL	Peak
2	1390.276	47.52	25.38	2.60	38.22	37.28	74.00	-36.72	VERTICAL	Peak
3	3455.508	47.16	28.88	4.20	36.96	43.28	68.20	-24.92	VERTICAL	Peak
4	4417.841	46.70	30.70	4.74	36.81	45.33	68.20	-22.87	VERTICAL	Peak
5	10600.000	43.50	39.59	7.46	37.34	53.21	68.20	-14.99	VERTICAL	Peak
6	15900.000	40.18	38.44	9.86	35.40	53.08	74.00	-20.92	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

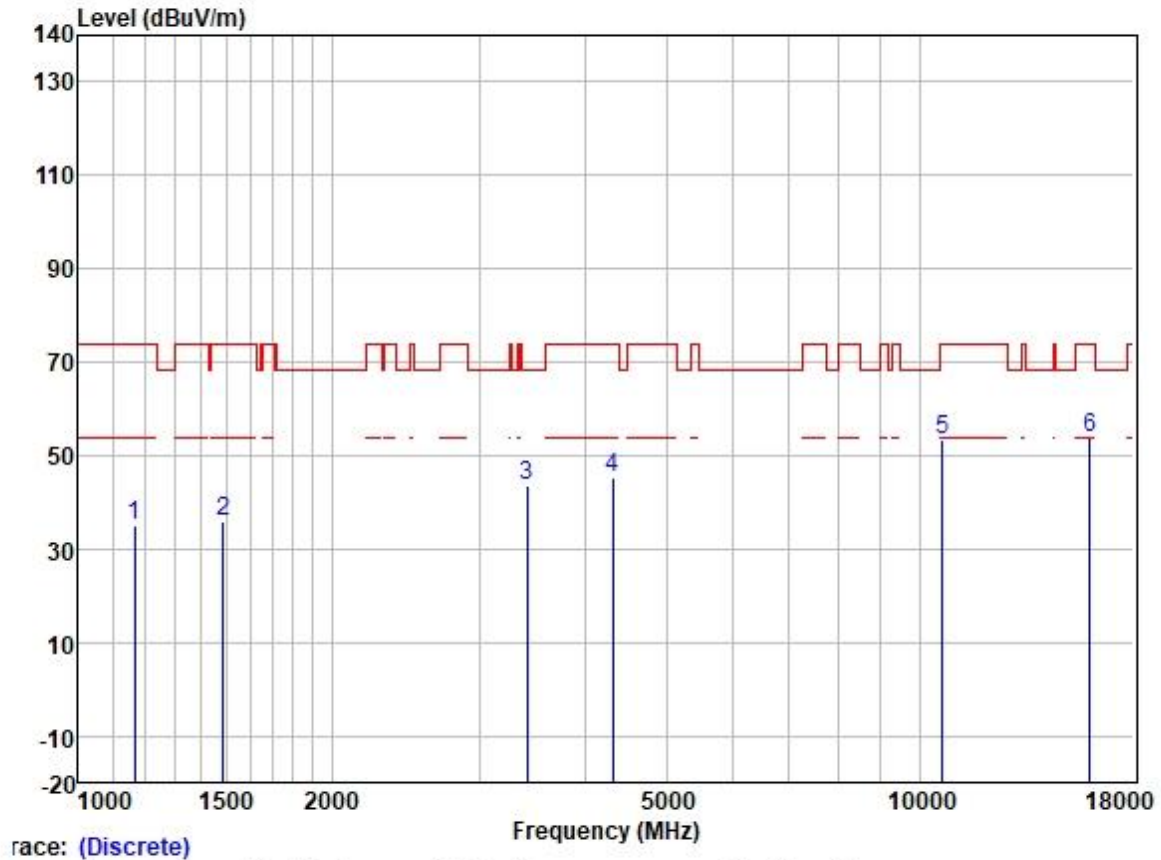


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1165.546	46.69	24.54	2.39	38.40	35.22	74.00	-38.78	HORIZONTAL	Peak
2	1485.841	45.81	25.49	2.78	38.13	35.95	74.00	-38.05	HORIZONTAL	Peak
3	3415.787	47.38	28.85	4.13	36.97	43.39	68.20	-24.81	HORIZONTAL	Peak
4	4316.859	47.13	30.51	4.66	36.81	45.49	74.00	-28.51	HORIZONTAL	Peak
5	10640.000	43.70	39.63	7.48	37.33	53.48	74.00	-20.52	HORIZONTAL	Peak
6	15960.000	40.85	38.37	9.85	35.40	53.67	74.00	-20.33	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

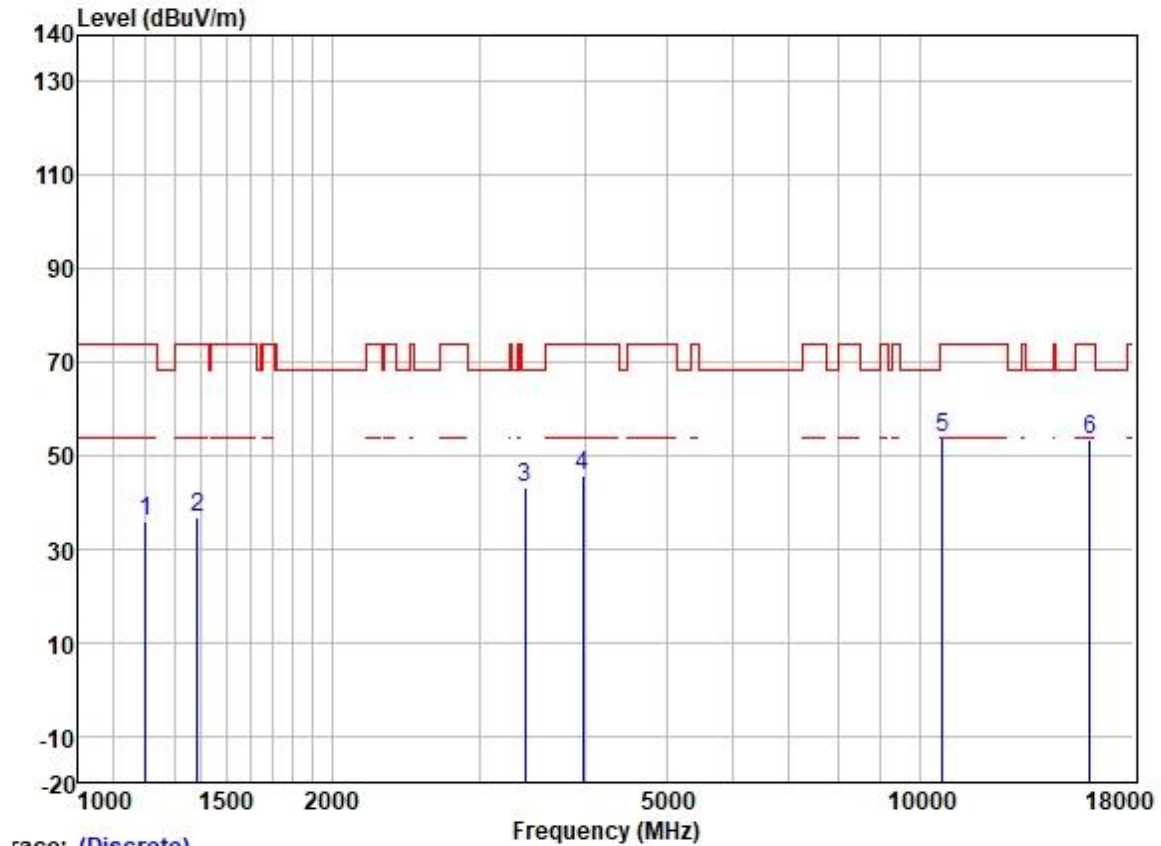

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	47.31	24.70	2.34	38.39	35.96	74.00	-38.04	VERTICAL	Peak
2	1386.264	46.98	25.37	2.60	38.25	36.70	74.00	-37.30	VERTICAL	Peak
3	3396.098	47.09	28.84	4.10	36.98	43.05	68.20	-25.15	VERTICAL	Peak
4	3981.257	48.06	29.78	4.60	36.81	45.63	74.00	-28.37	VERTICAL	Peak
5	10640.000	44.11	39.63	7.48	37.33	53.89	74.00	-20.11	VERTICAL	Peak
6	15960.000	40.70	38.37	9.85	35.40	53.52	74.00	-20.48	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

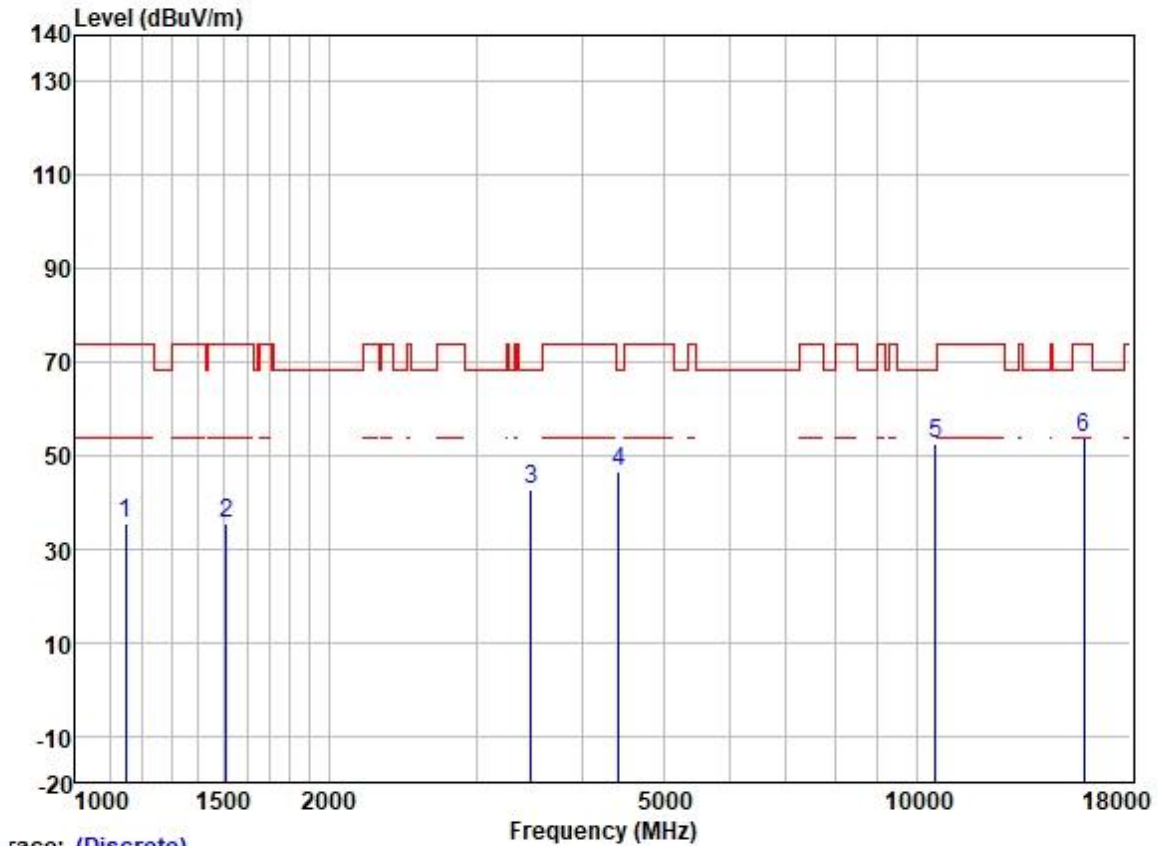


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	47.15	24.49	2.34	38.42	35.56	74.00	-38.44	HORIZONTAL	Peak
2	1511.833	45.17	25.51	2.80	38.10	35.38	74.00	-38.62	HORIZONTAL	Peak
3	3485.601	46.67	28.89	4.27	36.95	42.88	68.20	-25.32	HORIZONTAL	Peak
4	4430.628	47.66	30.72	4.78	36.81	46.35	68.20	-21.85	HORIZONTAL	Peak
5	10540.000	42.97	39.53	7.43	37.35	52.58	68.20	-15.62	HORIZONTAL	Peak
6	15810.000	40.71	38.61	9.86	35.39	53.79	74.00	-20.21	HORIZONTAL	Peak




Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

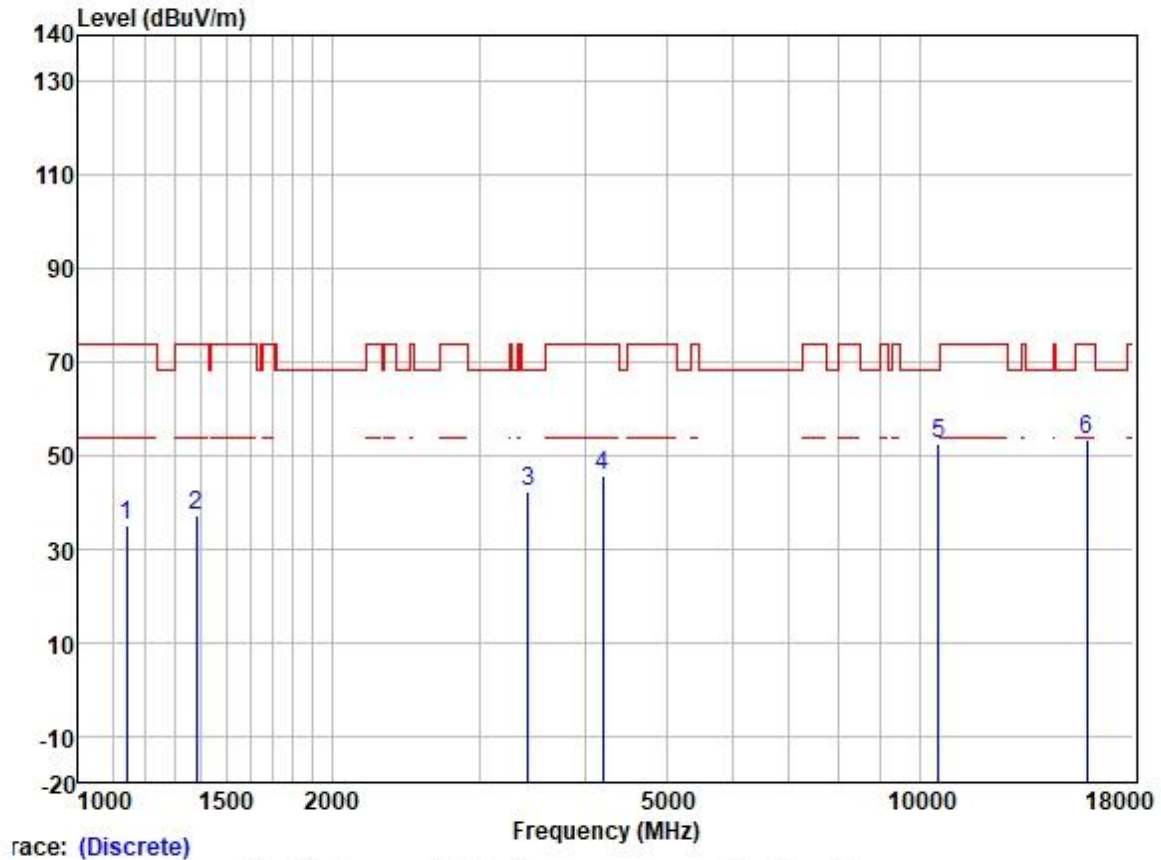

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	46.73	24.47	2.30	38.42	35.08	74.00	-38.92	VERTICAL	Peak
2	1382.262	47.61	25.37	2.60	38.25	37.33	74.00	-36.67	VERTICAL	Peak
3	3425.675	46.37	28.86	4.15	36.97	42.41	68.20	-25.79	VERTICAL	Peak
4	4206.011	47.77	30.18	4.60	36.81	45.74	74.00	-28.26	VERTICAL	Peak
5	10540.000	42.94	39.53	7.43	37.35	52.55	68.20	-15.65	VERTICAL	Peak
6	15810.000	40.16	38.61	9.86	35.39	53.24	74.00	-20.76	VERTICAL	Peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

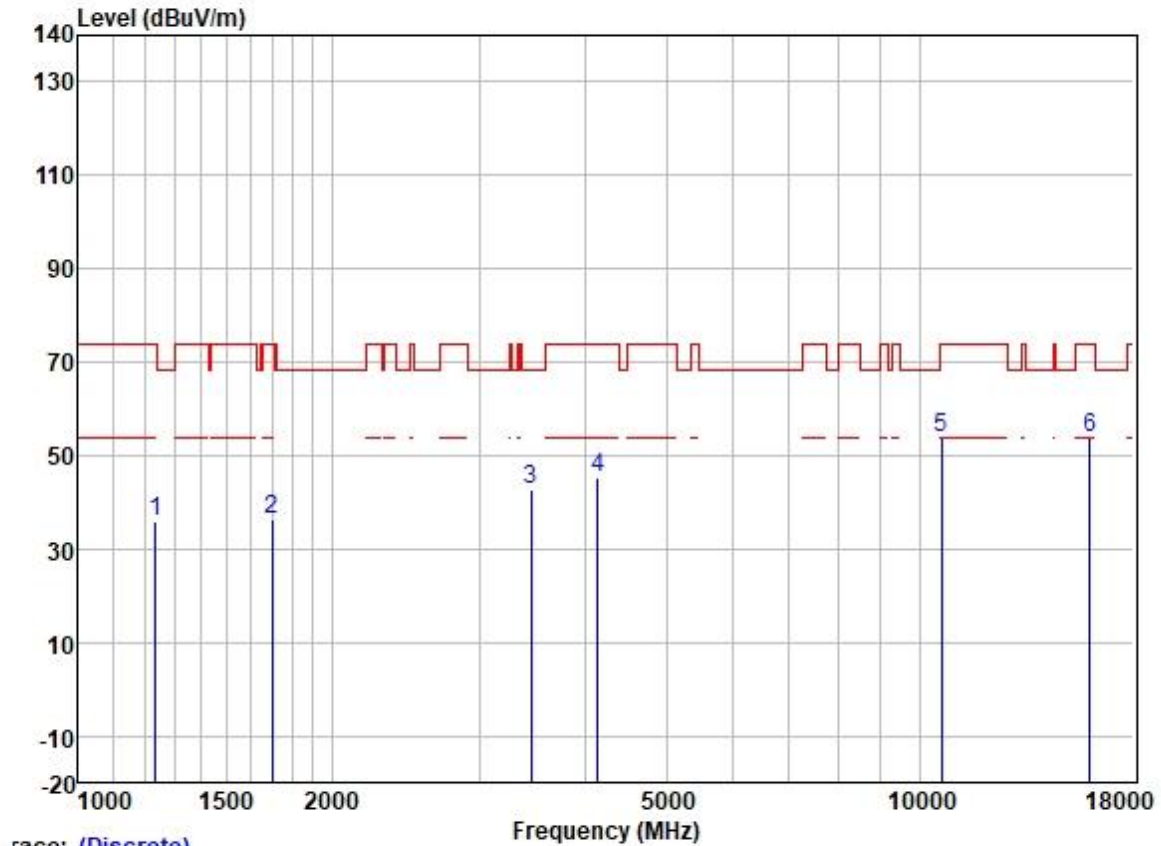


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	46.89	24.93	2.30	38.37	35.75	74.00	-38.25	HORIZONTAL	Peak
2	1697.129	45.60	25.71	2.80	37.89	36.22	74.00	-37.78	HORIZONTAL	Peak
3	3455.508	46.70	28.88	4.20	36.96	42.82	68.20	-25.38	HORIZONTAL	Peak
4	4145.664	47.66	30.03	4.60	36.80	45.49	74.00	-28.51	HORIZONTAL	Peak
5	10620.000	43.93	39.59	7.46	37.34	53.64	74.00	-20.36	HORIZONTAL	Peak
6	15930.000	41.13	38.37	9.85	35.40	53.95	74.00	-20.05	HORIZONTAL	Peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

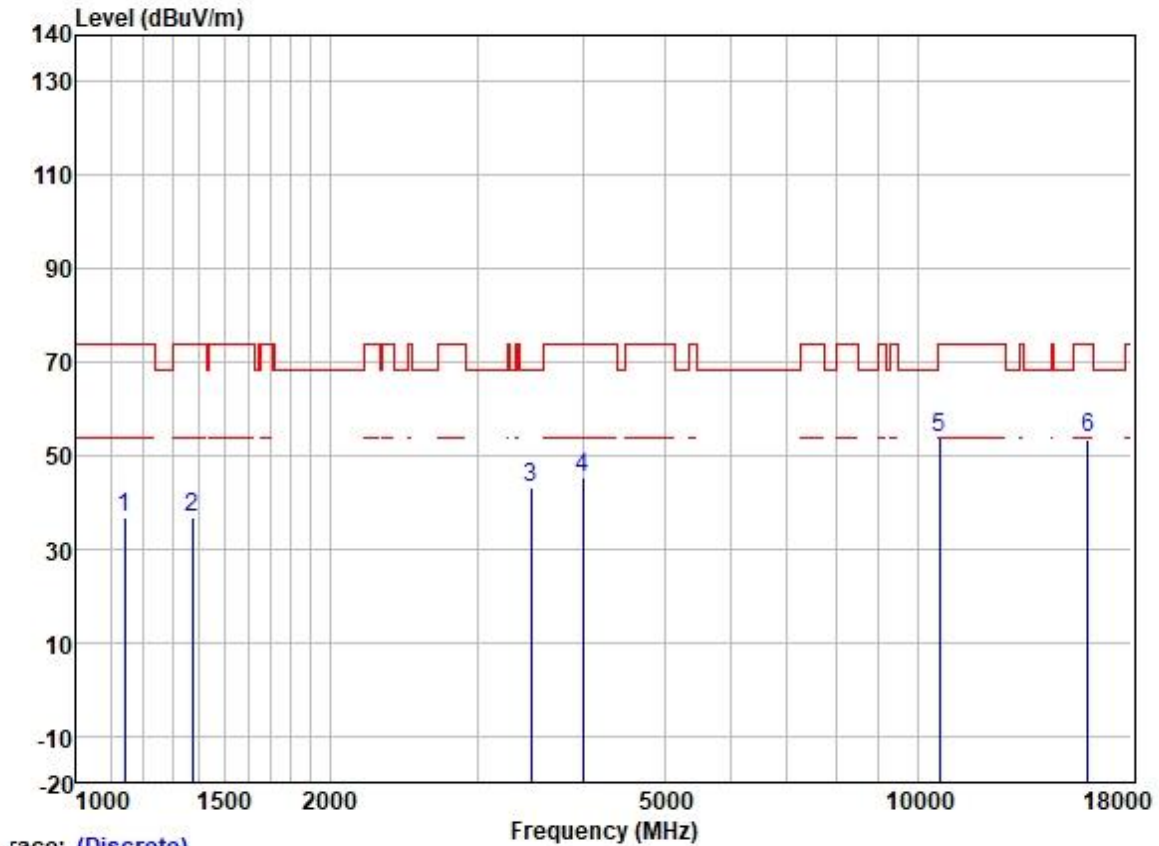

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	48.33	24.47	2.30	38.42	36.68	74.00	-37.32	VERTICAL	Peak
2	1374.295	46.89	25.35	2.60	38.25	36.59	74.00	-37.41	VERTICAL	Peak
3	3475.541	47.05	28.89	4.25	36.95	43.24	68.20	-24.96	VERTICAL	Peak
4	4004.339	47.79	29.80	4.60	36.80	45.39	74.00	-28.61	VERTICAL	Peak
5	10620.000	44.11	39.59	7.46	37.34	53.82	74.00	-20.18	VERTICAL	Peak
6	15930.000	40.78	38.37	9.85	35.40	53.60	74.00	-20.40	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

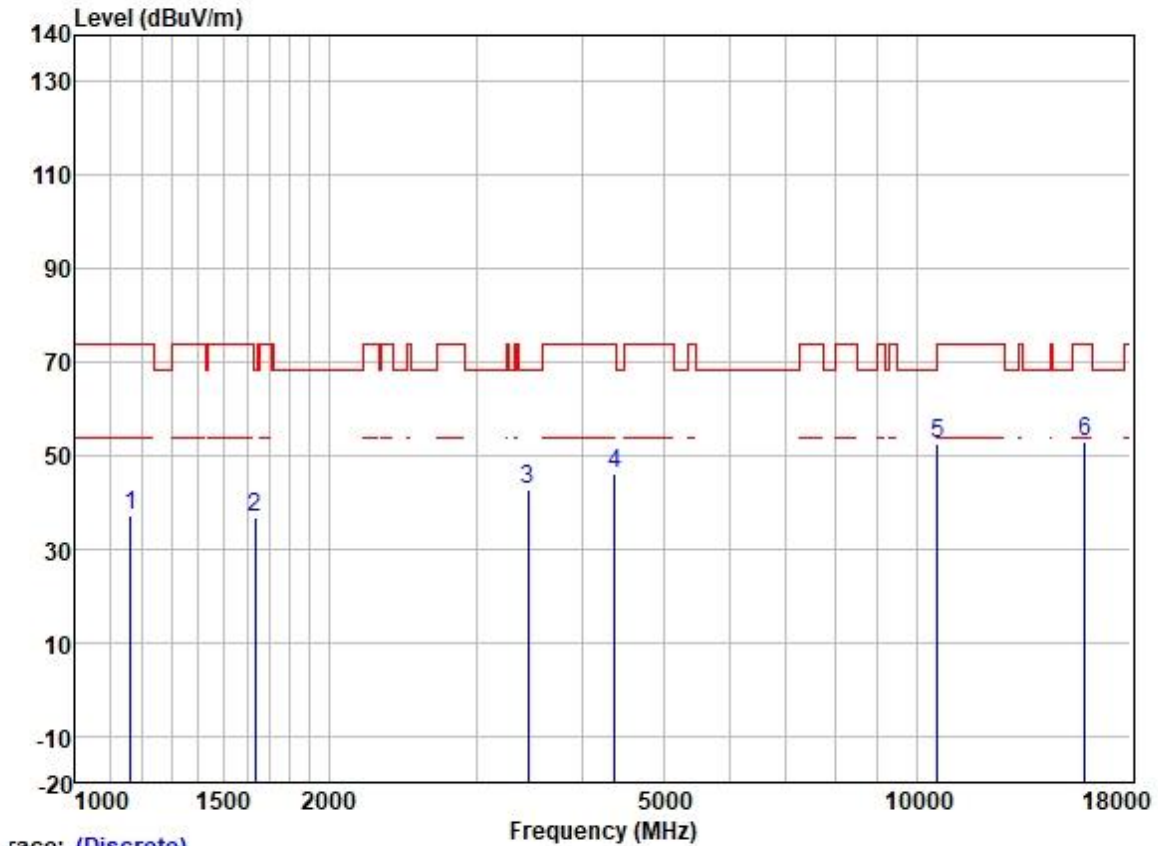

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	48.66	24.53	2.40	38.42	37.17	74.00	-36.83	HORIZONTAL	Peak
2	1634.543	46.21	25.62	2.80	37.95	36.68	68.20	-31.52	HORIZONTAL	Peak
3	3455.508	46.67	28.88	4.20	36.96	42.79	68.20	-25.41	HORIZONTAL	Peak
4	4379.699	47.66	30.64	4.69	36.81	46.18	74.00	-27.82	HORIZONTAL	Peak
5	10580.000	42.90	39.56	7.45	37.34	52.57	68.20	-15.63	HORIZONTAL	Peak
6	15870.000	39.79	38.52	9.86	35.40	52.77	74.00	-21.23	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

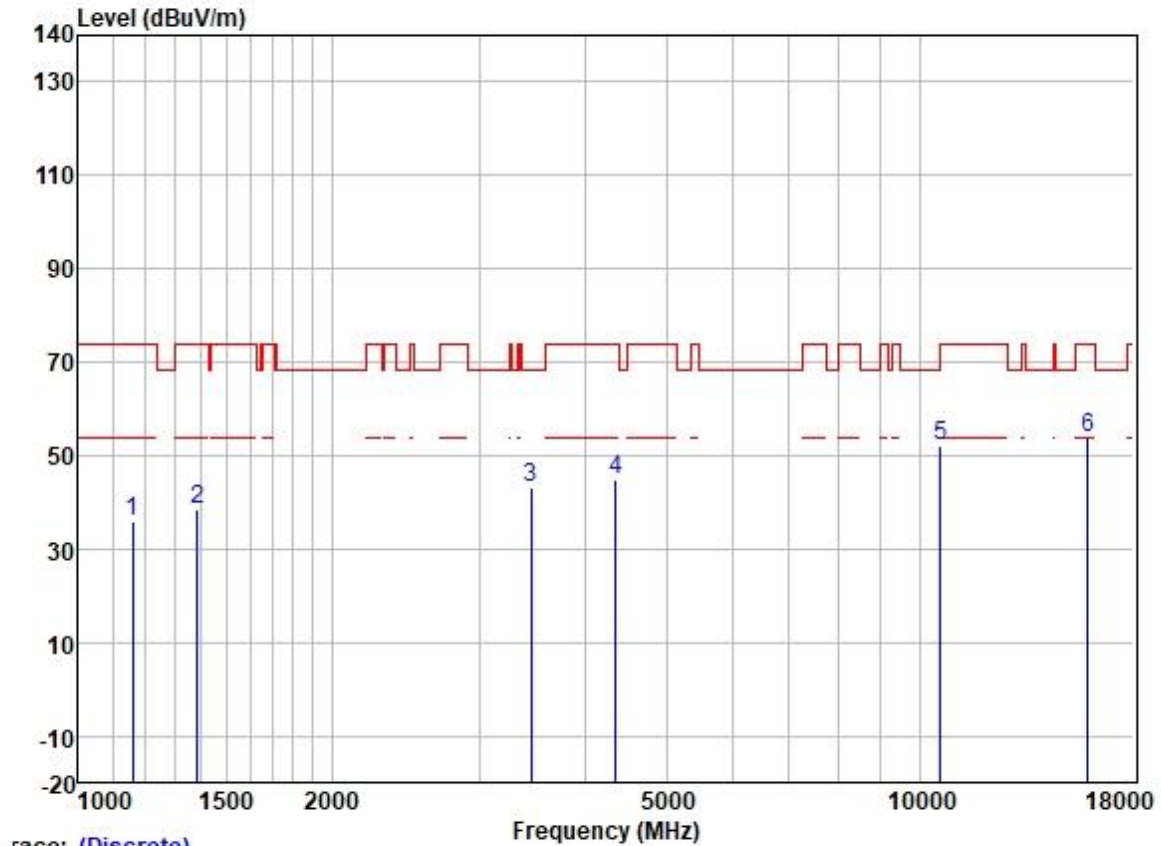

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	47.44	24.52	2.40	38.42	35.94	74.00	-38.06	VERTICAL	Peak
2	1386.264	48.58	25.37	2.60	38.25	38.30	74.00	-35.70	VERTICAL	Peak
3	3455.508	46.94	28.88	4.20	36.96	43.06	68.20	-25.14	VERTICAL	Peak
4	4354.454	46.54	30.59	4.68	36.81	45.00	74.00	-29.00	VERTICAL	Peak
5	10580.000	42.29	39.56	7.45	37.34	51.96	68.20	-16.24	VERTICAL	Peak
6	15870.000	40.79	38.52	9.86	35.40	53.77	74.00	-20.23	VERTICAL	Peak



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: Low

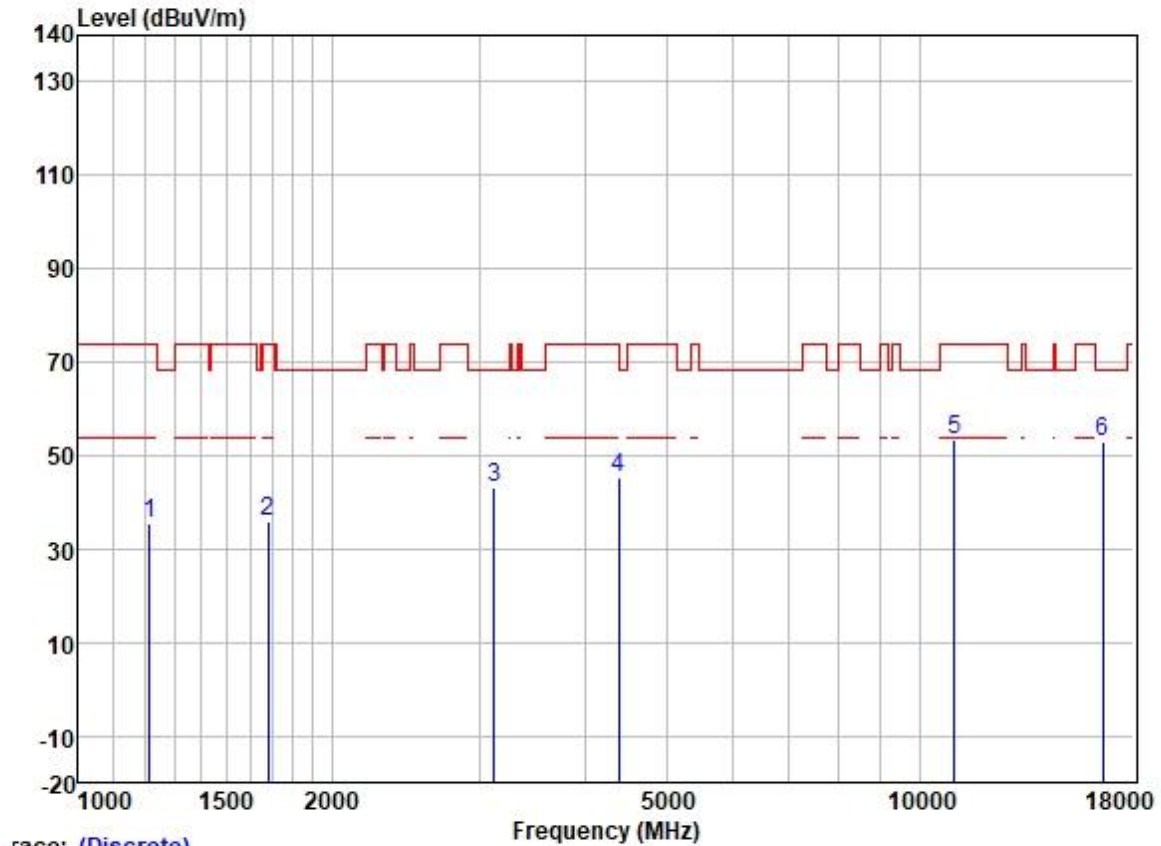


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	46.85	24.77	2.32	38.37	35.57	74.00	-38.43	HORIZONTAL	Peak
2	1682.477	45.33	25.68	2.80	37.91	35.90	74.00	-38.10	HORIZONTAL	Peak
3	3123.039	47.70	28.50	3.94	37.14	43.00	68.20	-25.20	HORIZONTAL	Peak
4	4392.376	46.55	30.66	4.70	36.81	45.10	74.00	-28.90	HORIZONTAL	Peak
5	11000.000	42.73	40.10	7.71	37.25	53.29	74.00	-20.71	HORIZONTAL	Peak
6	16500.000	39.17	39.60	9.44	35.38	52.83	68.20	-15.37	HORIZONTAL	Peak



Test Mode: 09; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: Low

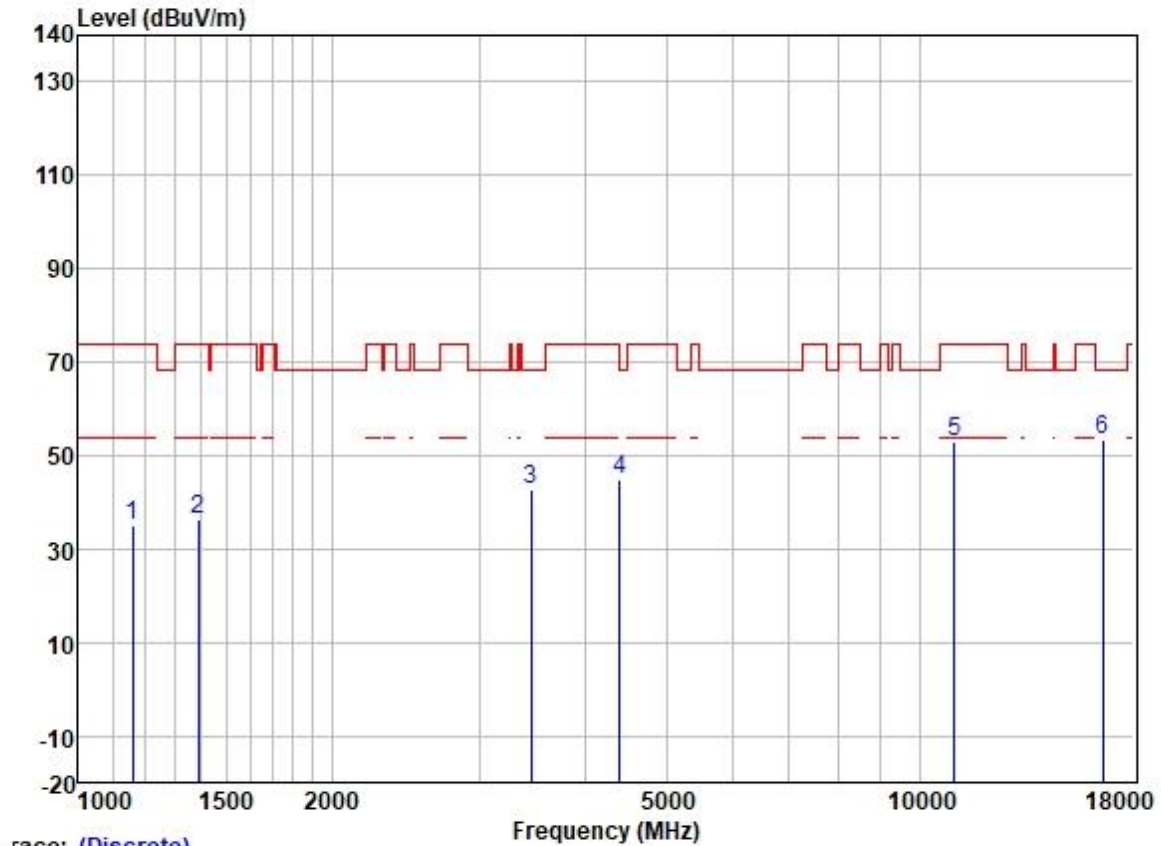

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	46.57	24.52	2.40	38.42	35.07	74.00	-38.93	VERTICAL	Peak
2	1390.276	46.47	25.38	2.60	38.22	36.23	74.00	-37.77	VERTICAL	Peak
3	3455.508	46.68	28.88	4.20	36.96	42.80	68.20	-25.40	VERTICAL	Peak
4	4405.090	46.37	30.68	4.70	36.81	44.94	68.20	-23.26	VERTICAL	Peak
5	11000.000	42.46	40.10	7.71	37.25	53.02	74.00	-20.98	VERTICAL	Peak
6	16500.000	39.80	39.60	9.44	35.38	53.46	68.20	-14.74	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: middle

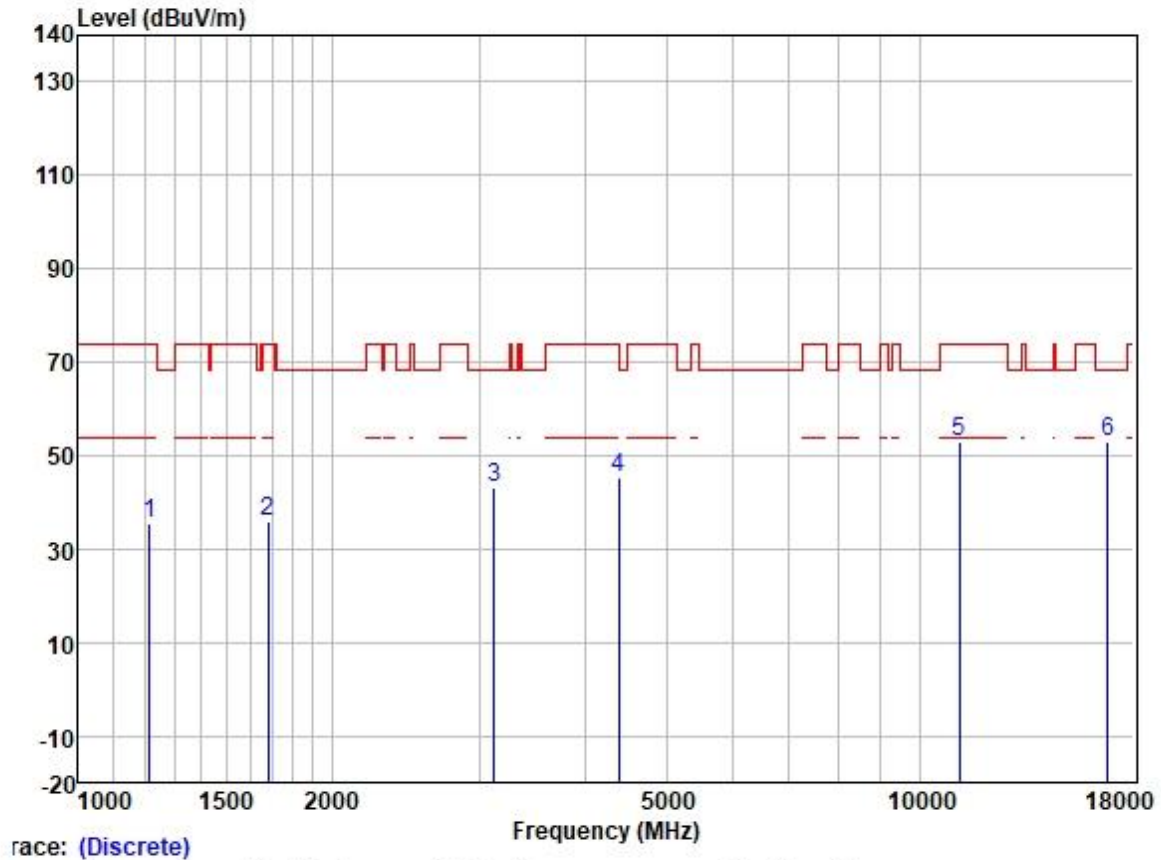


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	46.85	24.77	2.32	38.37	35.57	74.00	-38.43	HORIZONTAL	Peak
2	1682.477	45.33	25.68	2.80	37.91	35.90	74.00	-38.10	HORIZONTAL	Peak
3	3123.039	47.70	28.50	3.94	37.14	43.00	68.20	-25.20	HORIZONTAL	Peak
4	4392.376	46.55	30.66	4.70	36.81	45.10	74.00	-28.90	HORIZONTAL	Peak
5	11160.000	42.08	40.04	7.90	37.21	52.81	74.00	-21.19	HORIZONTAL	Peak
6	16740.000	38.60	40.49	9.41	35.37	53.13	68.20	-15.07	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

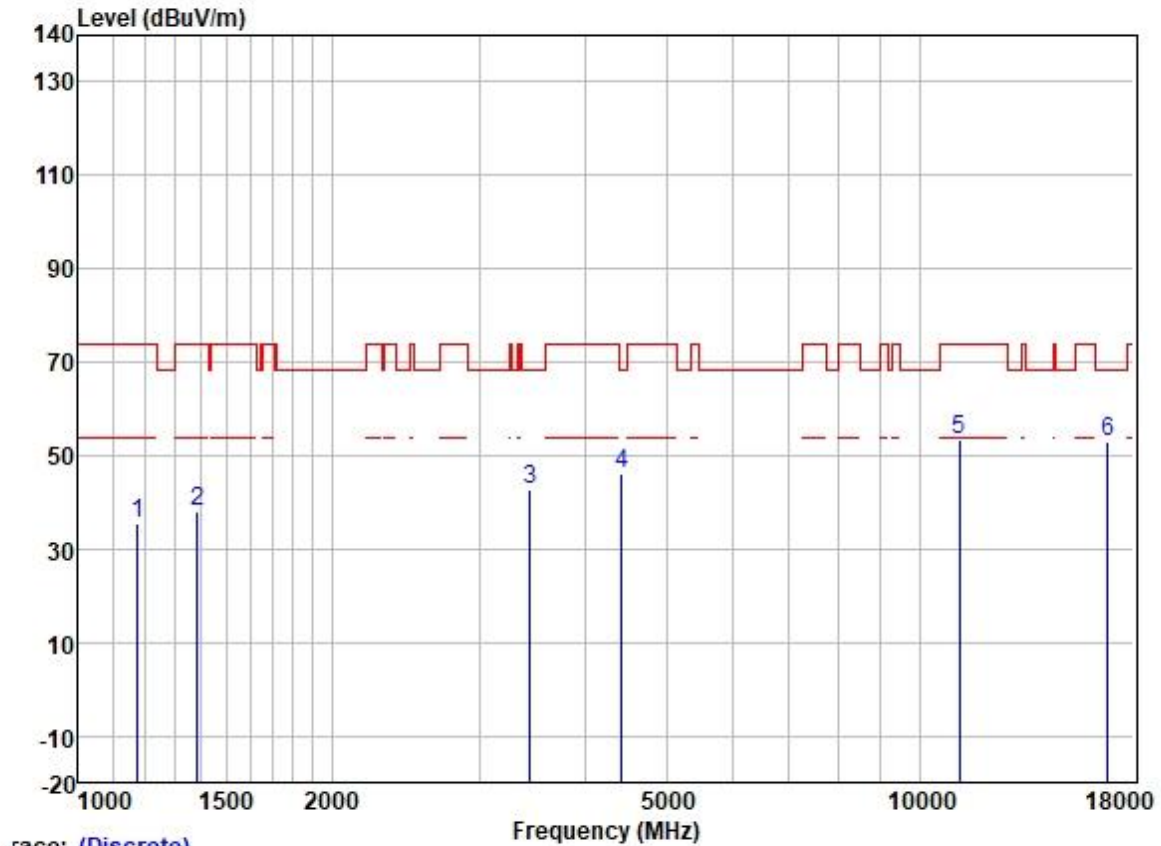

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1175.697	47.08	24.58	2.38	38.40	35.64	74.00	-38.36	VERTICAL	Peak
2	1386.264	48.39	25.37	2.60	38.25	38.11	74.00	-35.89	VERTICAL	Peak
3	3445.535	46.83	28.87	4.18	36.96	42.92	68.20	-25.28	VERTICAL	Peak
4	4430.628	47.33	30.72	4.78	36.81	46.02	68.20	-22.18	VERTICAL	Peak
5	11160.000	42.69	40.04	7.90	37.21	53.42	74.00	-20.58	VERTICAL	Peak
6	16740.000	38.63	40.49	9.41	35.37	53.16	68.20	-15.04	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

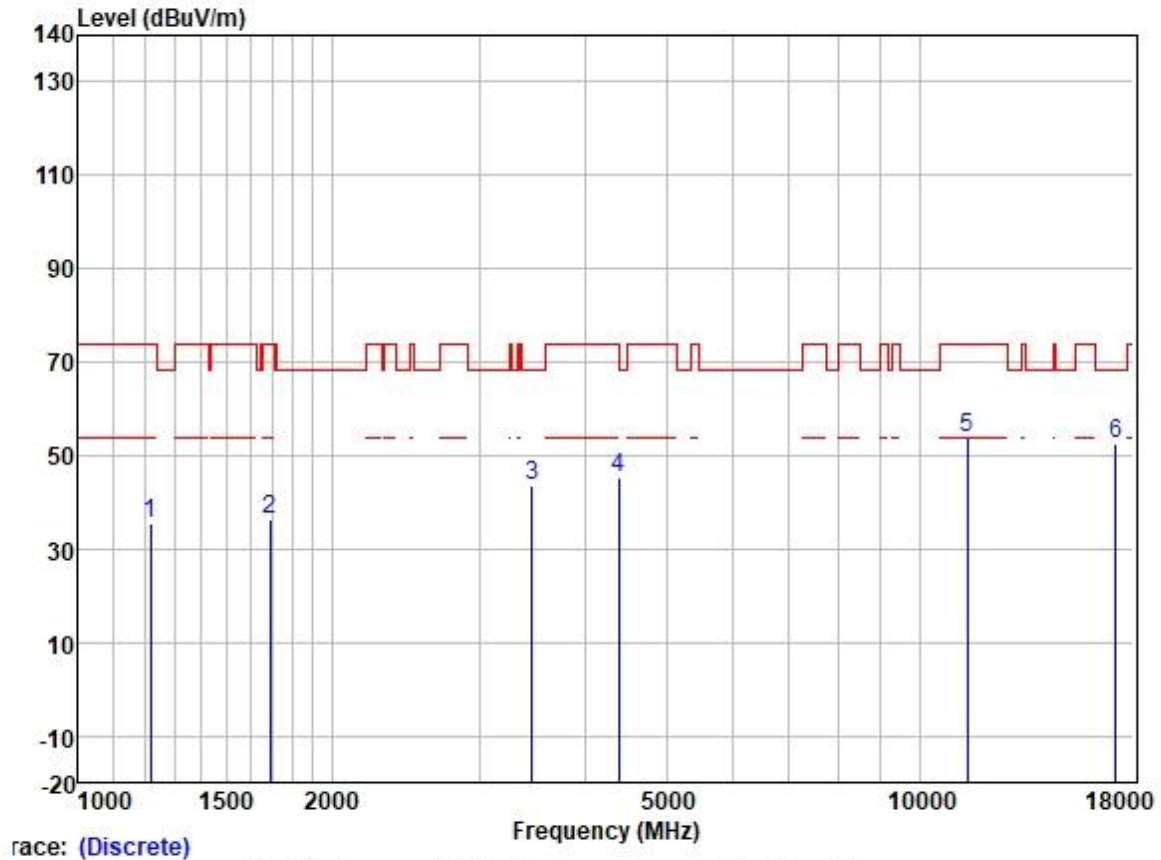


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.83	24.79	2.32	38.37	35.57	74.00	-38.43	HORIZONTAL	Peak
2	1692.231	45.76	25.70	2.80	37.89	36.37	74.00	-37.63	HORIZONTAL	Peak
3	3465.510	47.32	28.88	4.22	36.95	43.47	68.20	-24.73	HORIZONTAL	Peak
4	4392.376	46.91	30.66	4.70	36.81	45.46	74.00	-28.54	HORIZONTAL	Peak
5	11400.000	42.86	39.94	8.28	37.16	53.92	74.00	-20.08	HORIZONTAL	Peak
6	17100.000	35.97	42.32	9.63	35.34	52.58	68.20	-15.62	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

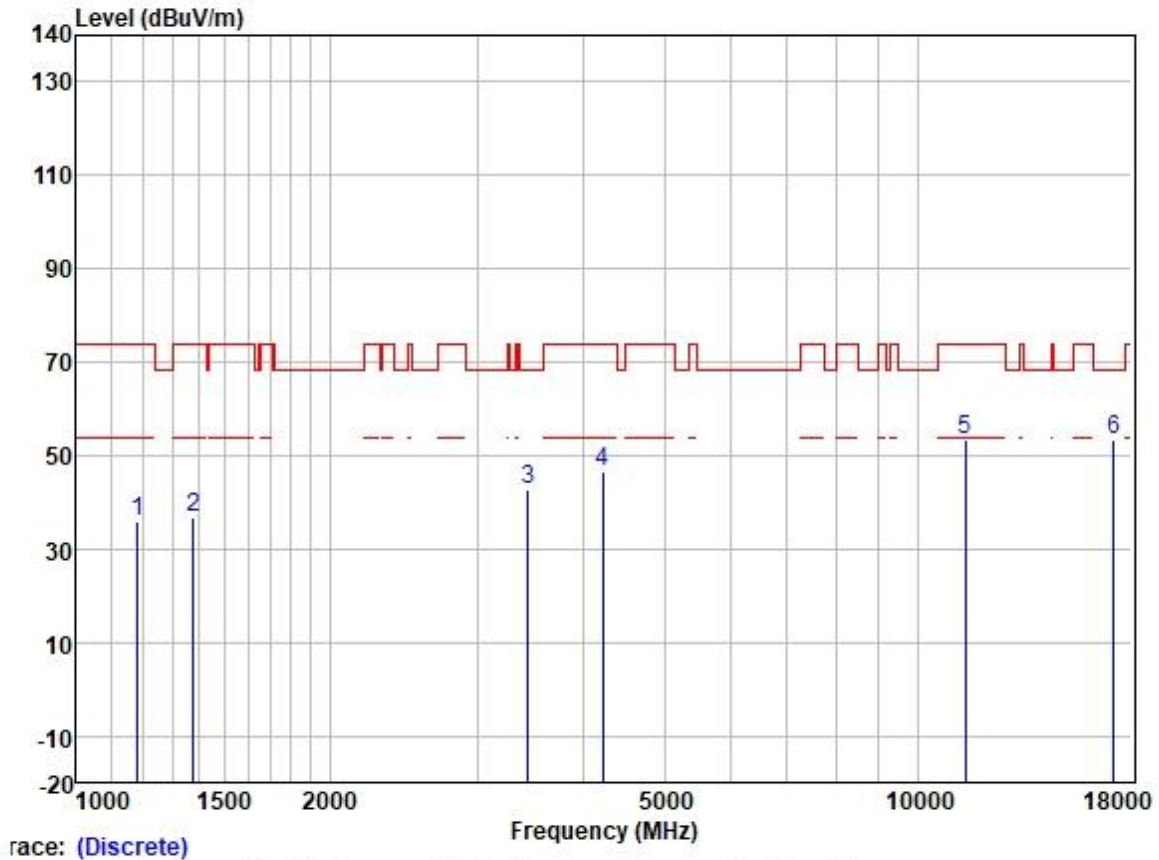

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1182.513	47.14	24.60	2.37	38.40	35.71	74.00	-38.29	VERTICAL	Peak
2	1378.273	47.14	25.36	2.60	38.25	36.85	74.00	-37.15	VERTICAL	Peak
3	3445.535	46.49	28.87	4.18	36.96	42.58	68.20	-25.62	VERTICAL	Peak
4	4230.396	48.53	30.26	4.61	36.81	46.59	74.00	-27.41	VERTICAL	Peak
5	11400.000	42.22	39.94	8.28	37.16	53.28	74.00	-20.72	VERTICAL	Peak
6	17100.000	36.86	42.32	9.63	35.34	53.47	68.20	-14.73	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

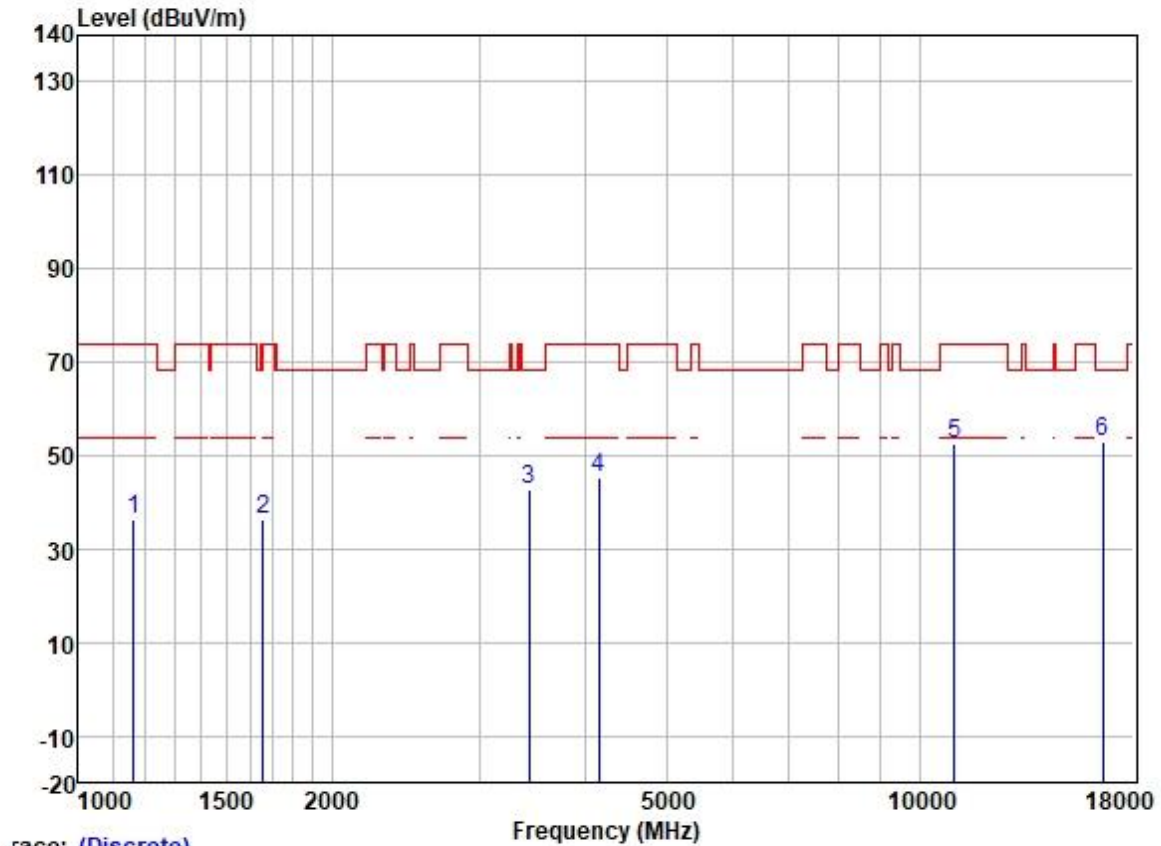


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.77	24.53	2.40	38.42	36.28	74.00	-37.72	HORIZONTAL	Peak
2	1658.337	46.00	25.65	2.80	37.93	36.52	68.20	-31.68	HORIZONTAL	Peak
3	3435.590	46.78	28.87	4.16	36.97	42.84	68.20	-25.36	HORIZONTAL	Peak
4	4157.664	47.35	30.06	4.60	36.80	45.21	74.00	-28.79	HORIZONTAL	Peak
5	11000.000	42.12	40.10	7.71	37.25	52.68	74.00	-21.32	HORIZONTAL	Peak
6	16500.000	39.16	39.60	9.44	35.38	52.82	68.20	-15.38	HORIZONTAL	Peak




Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

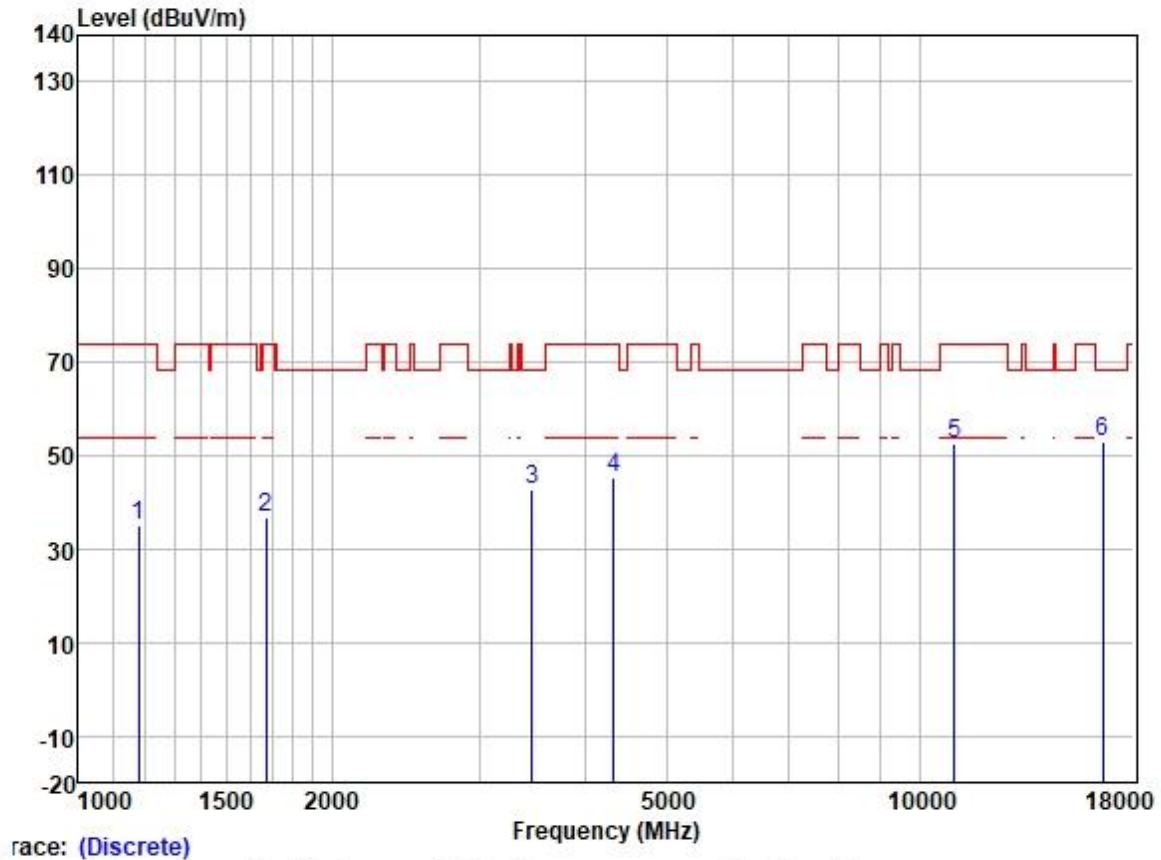

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	46.61	24.59	2.38	38.40	35.18	74.00	-38.82	VERTICAL	Peak
2	1672.779	46.11	25.67	2.80	37.91	36.67	74.00	-37.33	VERTICAL	Peak
3	3465.510	46.40	28.88	4.22	36.95	42.55	68.20	-25.65	VERTICAL	Peak
4	4329.354	46.81	30.54	4.67	36.81	45.21	74.00	-28.79	VERTICAL	Peak
5	11000.000	41.90	40.10	7.71	37.25	52.46	74.00	-21.54	VERTICAL	Peak
6	16500.000	39.20	39.60	9.44	35.38	52.86	68.20	-15.34	VERTICAL	Peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

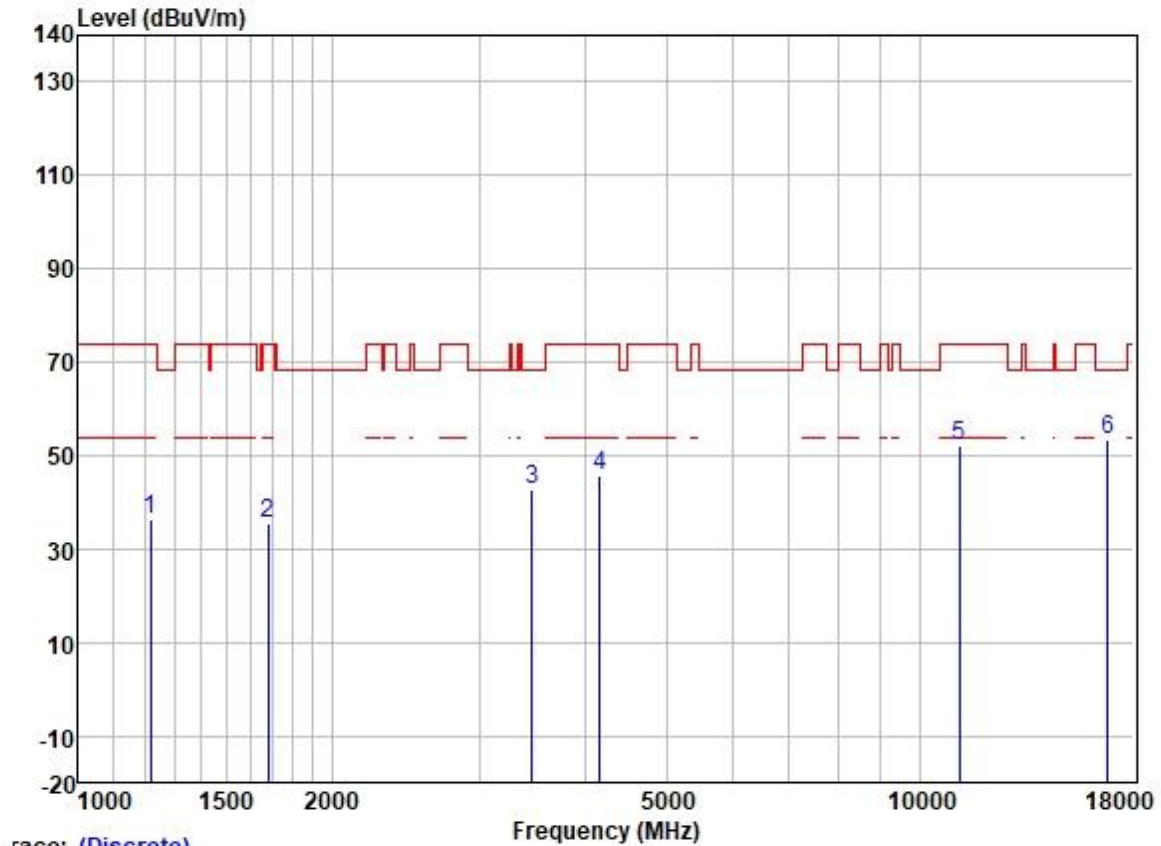

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	47.55	24.79	2.32	38.37	36.29	74.00	-37.71	HORIZONTAL	Peak
2	1682.477	44.96	25.68	2.80	37.91	35.53	74.00	-38.47	HORIZONTAL	Peak
3	3465.510	46.58	28.88	4.22	36.95	42.73	68.20	-25.47	HORIZONTAL	Peak
4	4169.698	47.72	30.09	4.60	36.80	45.61	74.00	-28.39	HORIZONTAL	Peak
5	11160.000	41.58	40.04	7.90	37.21	52.31	74.00	-21.69	HORIZONTAL	Peak
6	16740.000	38.81	40.49	9.41	35.37	53.34	68.20	-14.86	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

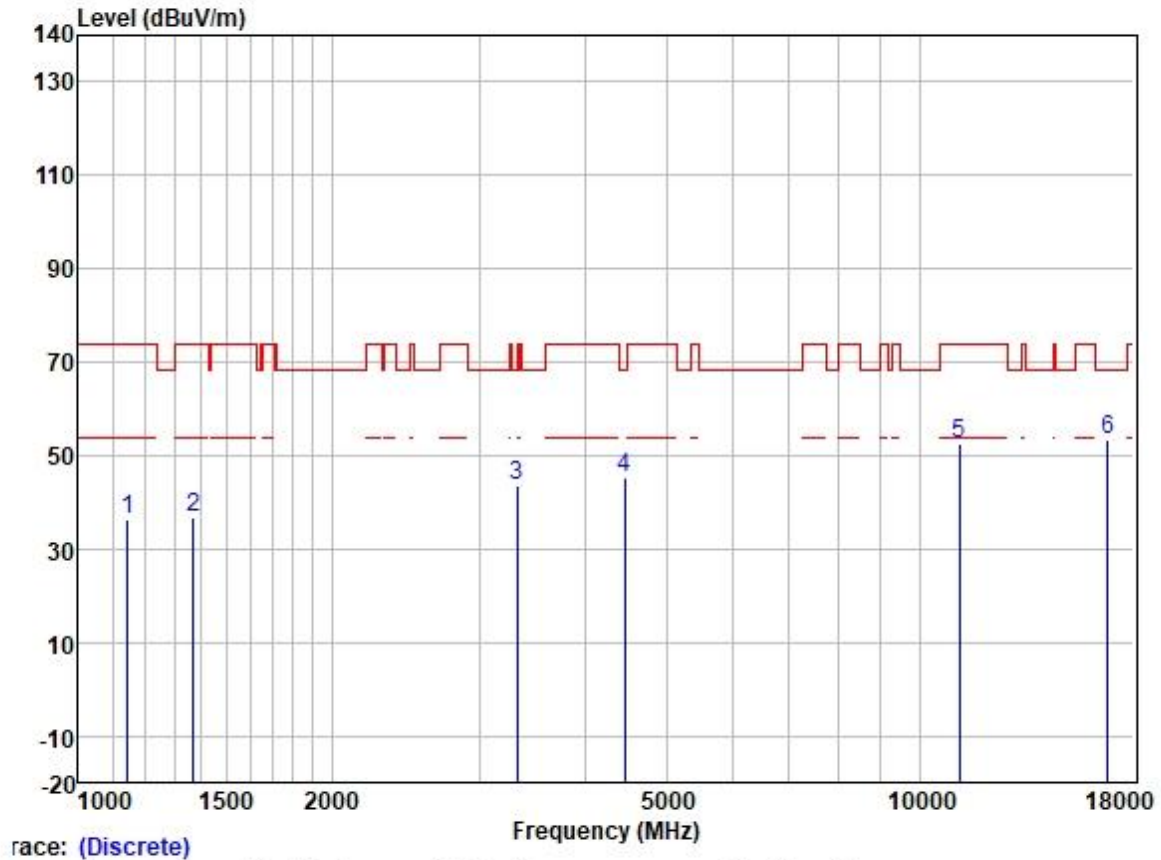

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	47.79	24.48	2.32	38.42	36.17	74.00	-37.83	VERTICAL	Peak
2	1370.328	46.96	25.35	2.60	38.25	36.66	74.00	-37.34	VERTICAL	Peak
3	3328.077	47.57	28.78	4.07	37.02	43.40	68.20	-24.80	VERTICAL	Peak
4	4456.315	46.41	30.75	4.88	36.81	45.23	68.20	-22.97	VERTICAL	Peak
5	11160.000	42.00	40.04	7.90	37.21	52.73	74.00	-21.27	VERTICAL	Peak
6	16740.000	38.98	40.49	9.41	35.37	53.51	68.20	-14.69	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

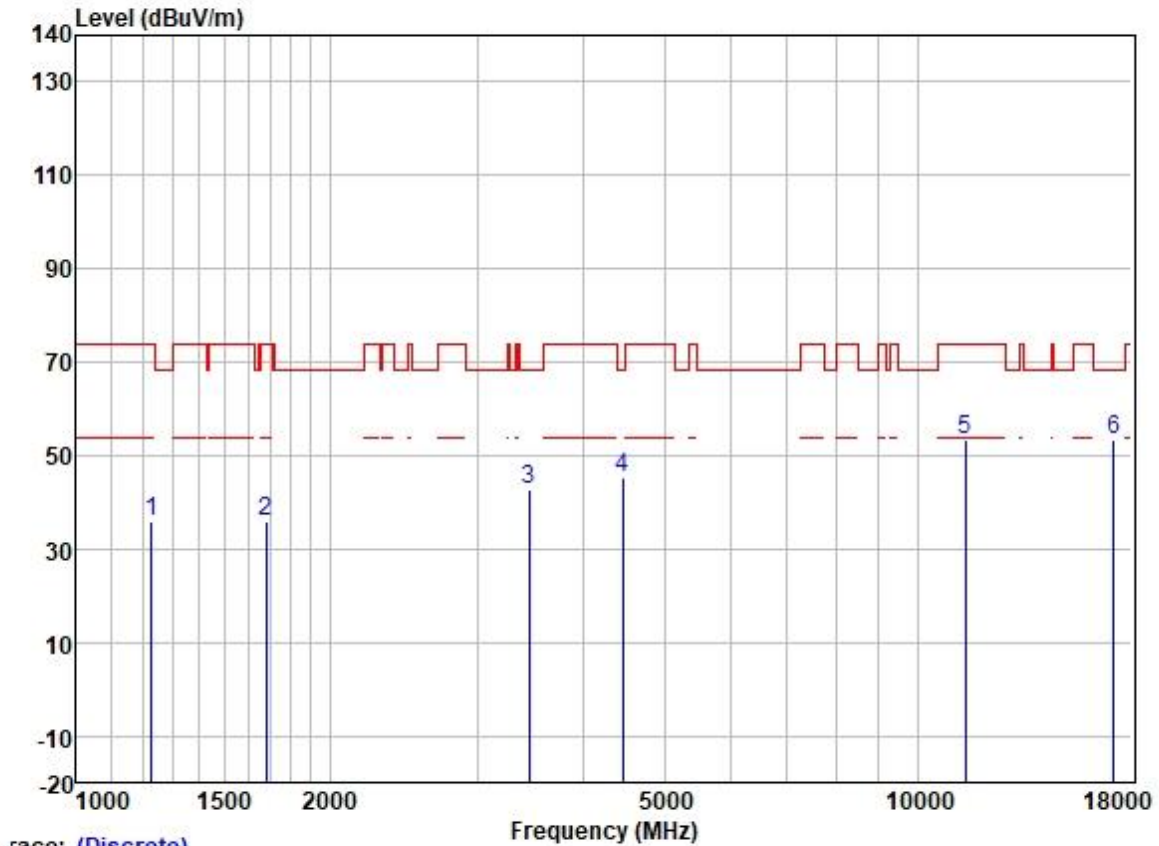

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1227.791	46.97	24.88	2.31	38.37	35.79	74.00	-38.21	HORIZONTAL Peak
2	1682.477	45.22	25.68	2.80	37.91	35.79	74.00	-38.21	HORIZONTAL Peak
3	3455.508	46.51	28.88	4.20	36.96	42.63	68.20	-25.57	HORIZONTAL Peak
4	4456.315	46.38	30.75	4.88	36.81	45.20	68.20	-23.00	HORIZONTAL Peak
5	11400.000	42.17	39.94	8.28	37.16	53.23	74.00	-20.77	HORIZONTAL Peak
6	17100.000	36.79	42.32	9.63	35.34	53.40	68.20	-14.80	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

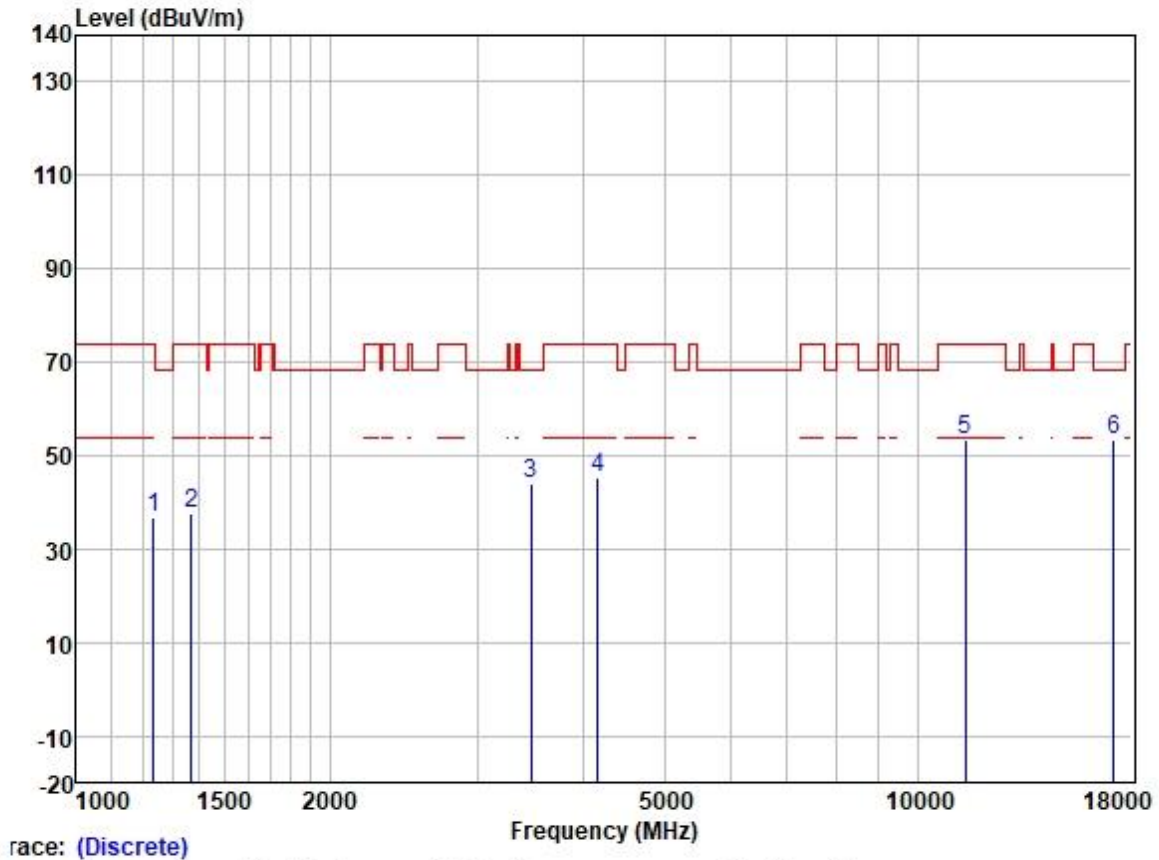


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	47.91	24.93	2.30	38.37	36.77	74.00	-37.23	VERTICAL	Peak
2	1370.328	47.99	25.35	2.60	38.25	37.69	74.00	-36.31	VERTICAL	Peak
3	3475.541	47.95	28.89	4.25	36.95	44.14	68.20	-24.06	VERTICAL	Peak
4	4169.698	47.23	30.09	4.60	36.80	45.12	74.00	-28.88	VERTICAL	Peak
5	11400.000	42.17	39.94	8.28	37.16	53.23	74.00	-20.77	VERTICAL	Peak
6	17100.000	36.84	42.32	9.63	35.34	53.45	68.20	-14.75	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

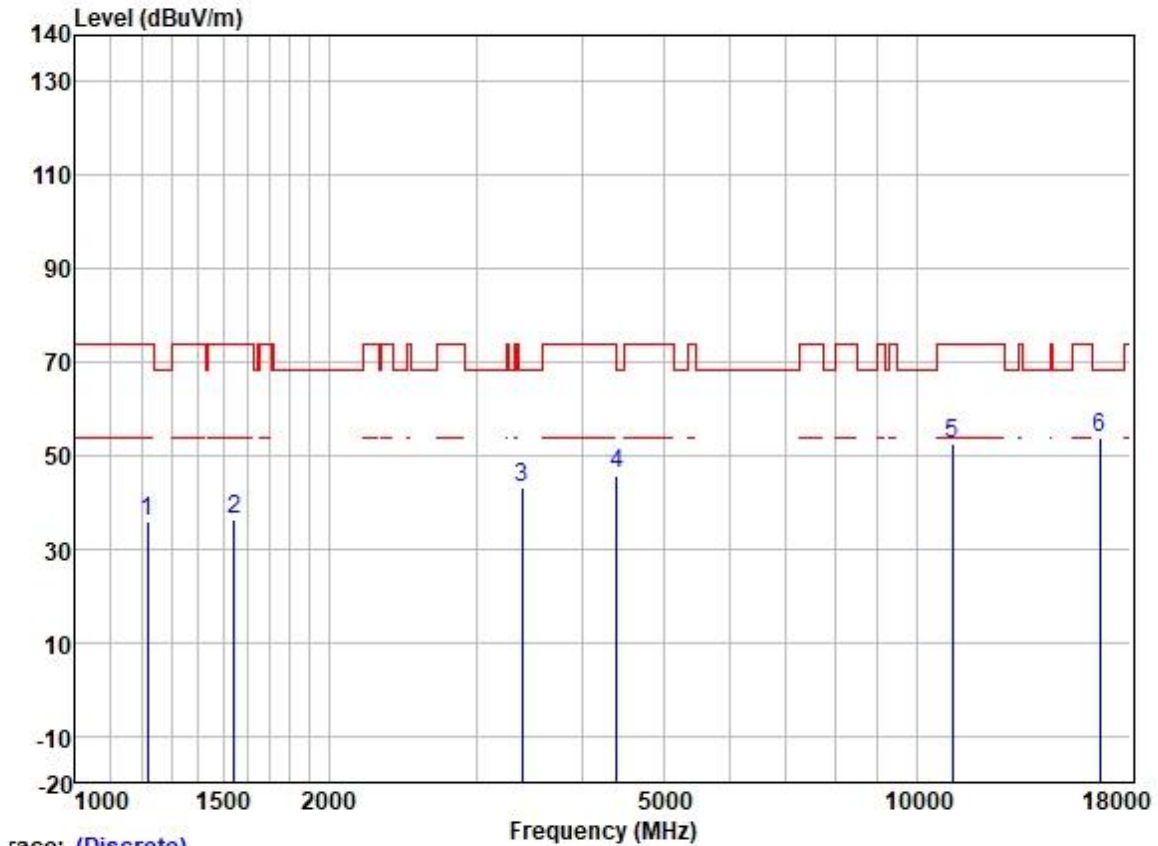

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	47.36	24.79	2.32	38.37	36.10	74.00	-37.90	HORIZONTAL	Peak
2	1542.733	45.82	25.53	2.80	38.03	36.12	74.00	-37.88	HORIZONTAL	Peak
3	3396.098	46.99	28.84	4.10	36.98	42.95	68.20	-25.25	HORIZONTAL	Peak
4	4405.090	47.35	30.68	4.70	36.81	45.92	68.20	-22.28	HORIZONTAL	Peak
5	11020.000	42.06	40.10	7.71	37.24	52.63	74.00	-21.37	HORIZONTAL	Peak
6	16530.000	39.79	39.76	9.44	35.38	53.61	68.20	-14.59	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

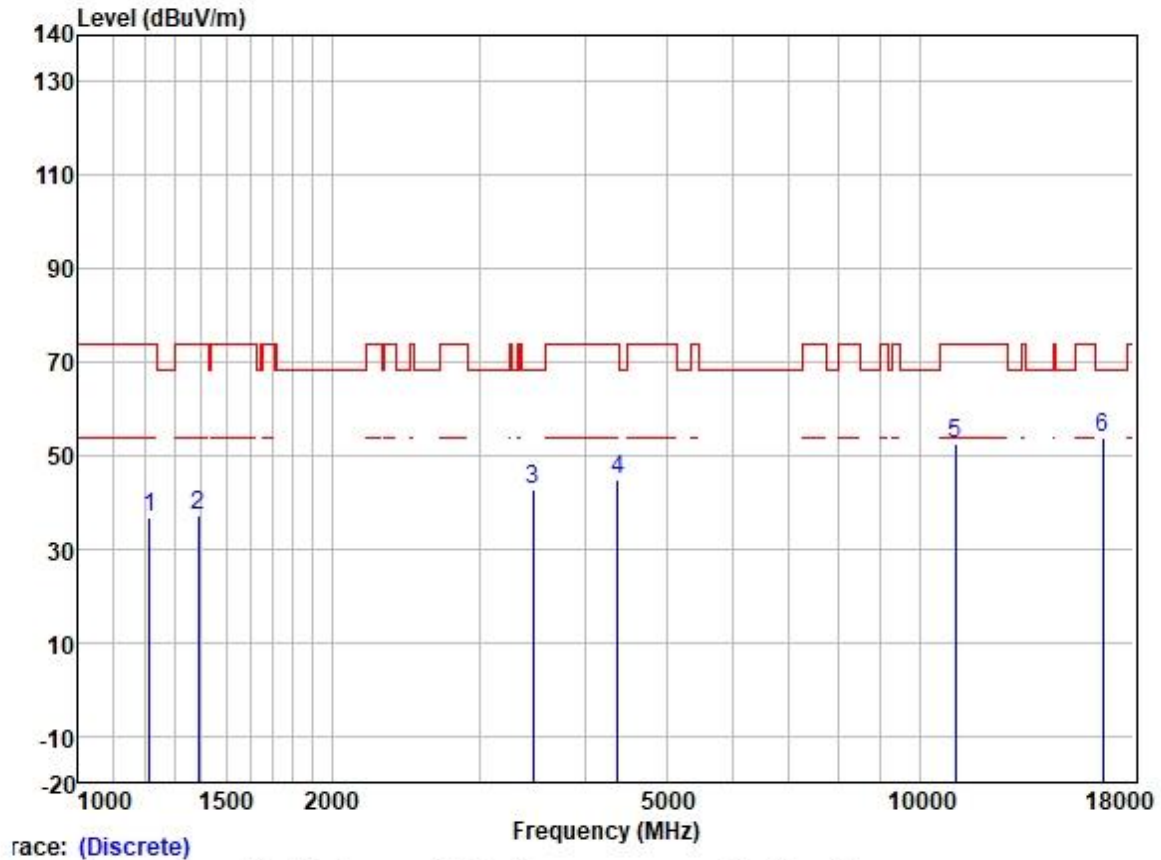

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	48.06	24.77	2.32	38.37	36.78	74.00	-37.22	VERTICAL	Peak
2	1390.276	47.46	25.38	2.60	38.22	37.22	74.00	-36.78	VERTICAL	Peak
3	3475.541	46.69	28.89	4.25	36.95	42.88	68.20	-25.32	VERTICAL	Peak
4	4379.699	46.36	30.64	4.69	36.81	44.88	74.00	-29.12	VERTICAL	Peak
5	11020.000	41.98	40.10	7.71	37.24	52.55	74.00	-21.45	VERTICAL	Peak
6	16530.000	39.80	39.76	9.44	35.38	53.62	68.20	-14.58	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

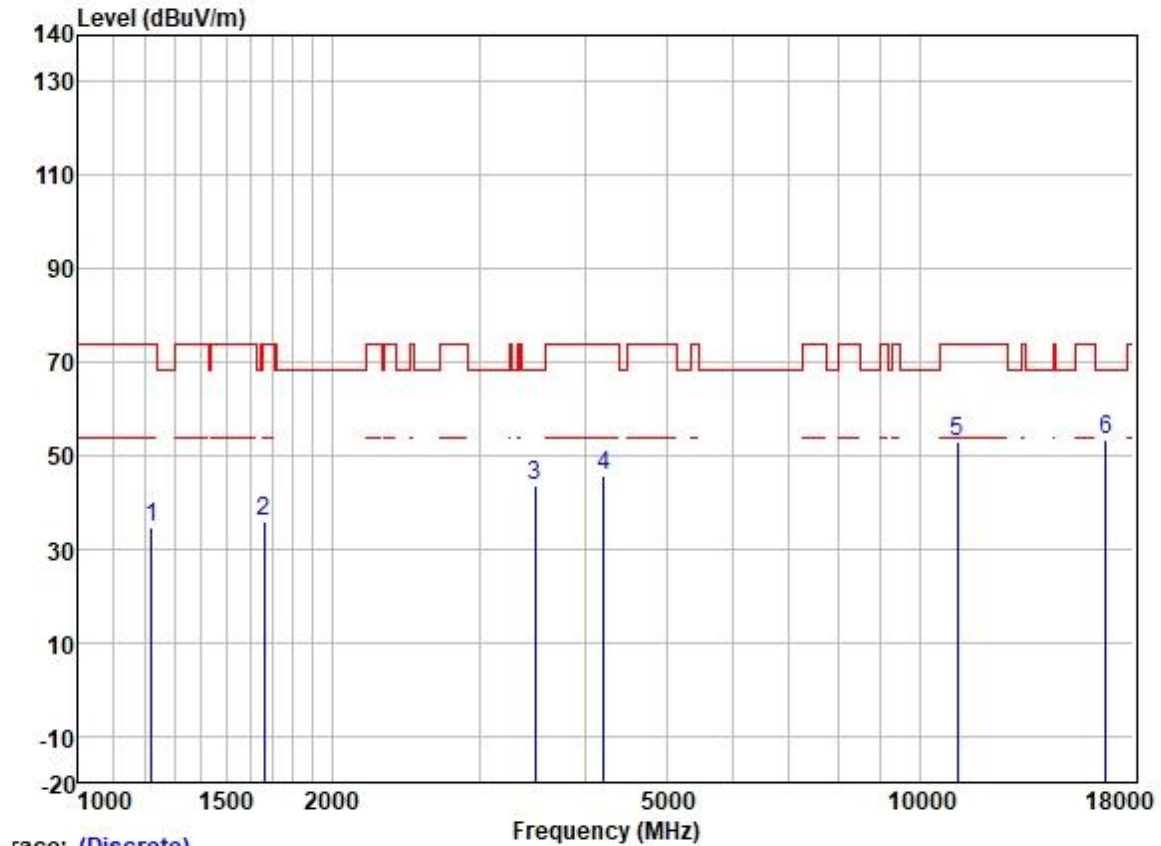

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1220.714	46.04	24.82	2.32	38.37	34.81	74.00	-39.19	HORIZONTAL	Peak
2	1663.137	45.38	25.65	2.80	37.91	35.92	74.00	-38.08	HORIZONTAL	Peak
3	3495.691	47.21	28.90	4.30	36.94	43.47	68.20	-24.73	HORIZONTAL	Peak
4	4218.186	47.90	30.22	4.60	36.81	45.91	74.00	-28.09	HORIZONTAL	Peak
5	11100.000	42.34	40.07	7.82	37.22	53.01	74.00	-20.99	HORIZONTAL	Peak
6	16650.000	39.03	40.10	9.43	35.38	53.18	68.20	-15.02	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

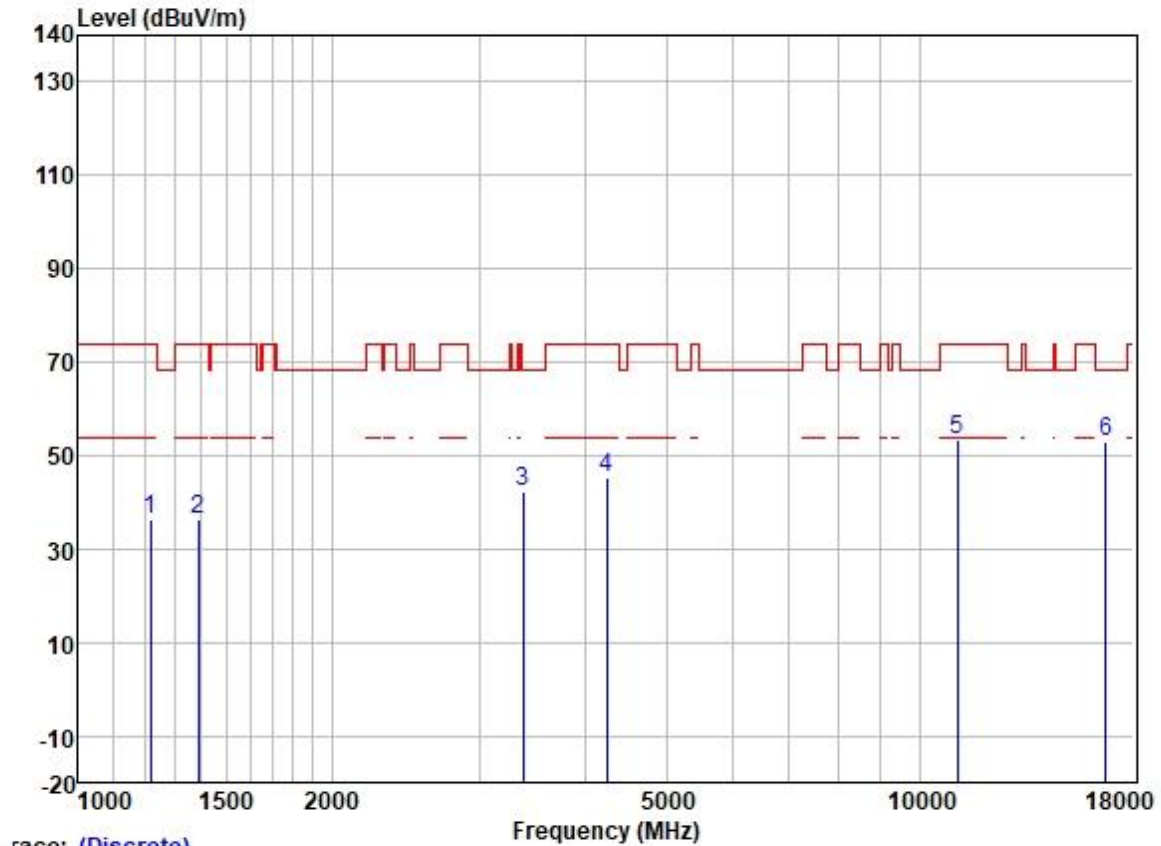

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	47.58	24.79	2.32	38.37	36.32	74.00	-37.68	VERTICAL	Peak
2	1390.276	46.69	25.38	2.60	38.22	36.45	74.00	-37.55	VERTICAL	Peak
3	3376.523	46.44	28.83	4.09	36.99	42.37	68.20	-25.83	VERTICAL	Peak
4	4242.641	47.02	30.30	4.62	36.81	45.13	74.00	-28.87	VERTICAL	Peak
5	11100.000	42.72	40.07	7.82	37.22	53.39	74.00	-20.61	VERTICAL	Peak
6	16650.000	38.67	40.10	9.43	35.38	52.82	68.20	-15.38	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

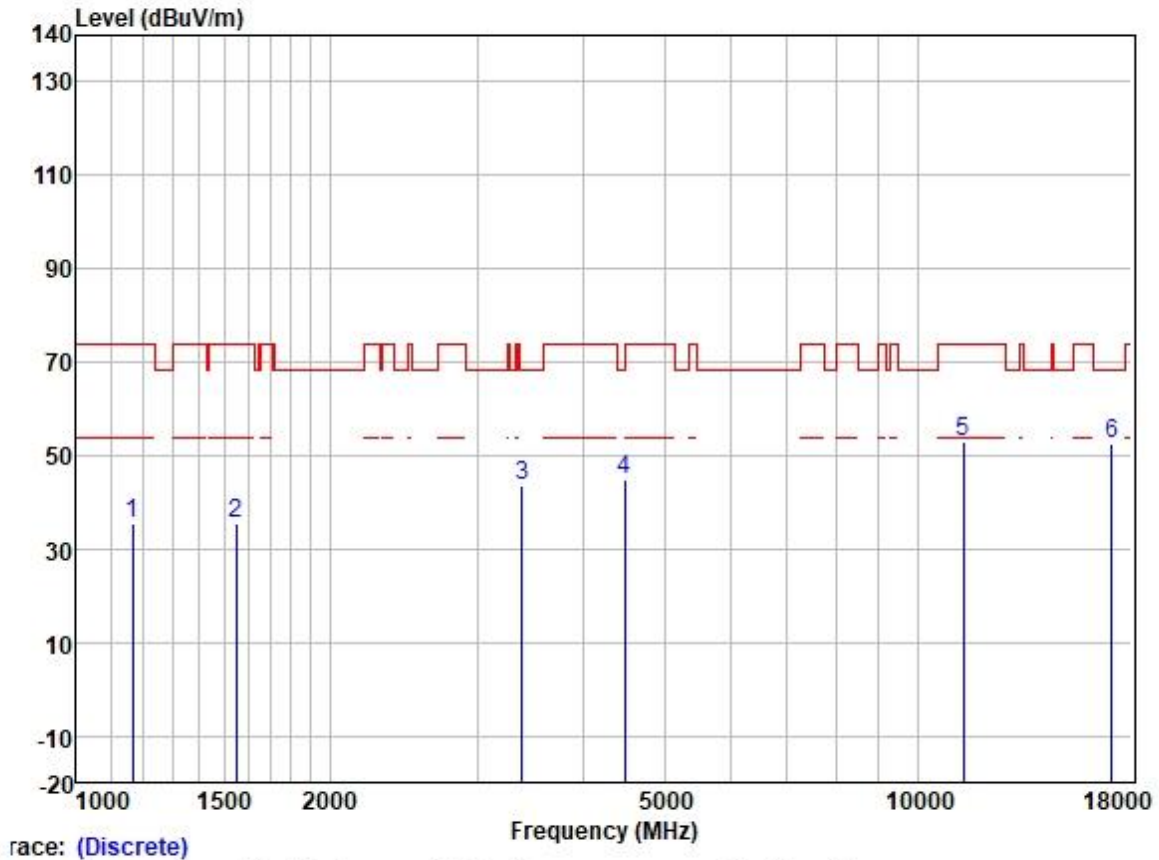

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1165.546	46.87	24.54	2.39	38.40	35.40	74.00	-38.60	HORIZONTAL	Peak
2	1547.199	45.17	25.53	2.80	38.03	35.47	74.00	-38.53	HORIZONTAL	Peak
3	3386.297	47.61	28.83	4.10	36.99	43.55	68.20	-24.65	HORIZONTAL	Peak
4	4482.150	46.03	30.78	4.99	36.81	44.99	68.20	-23.21	HORIZONTAL	Peak
5	11340.000	42.05	39.97	8.18	37.17	53.03	74.00	-20.97	HORIZONTAL	Peak
6	17010.000	36.82	41.75	9.39	35.35	52.61	68.20	-15.59	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

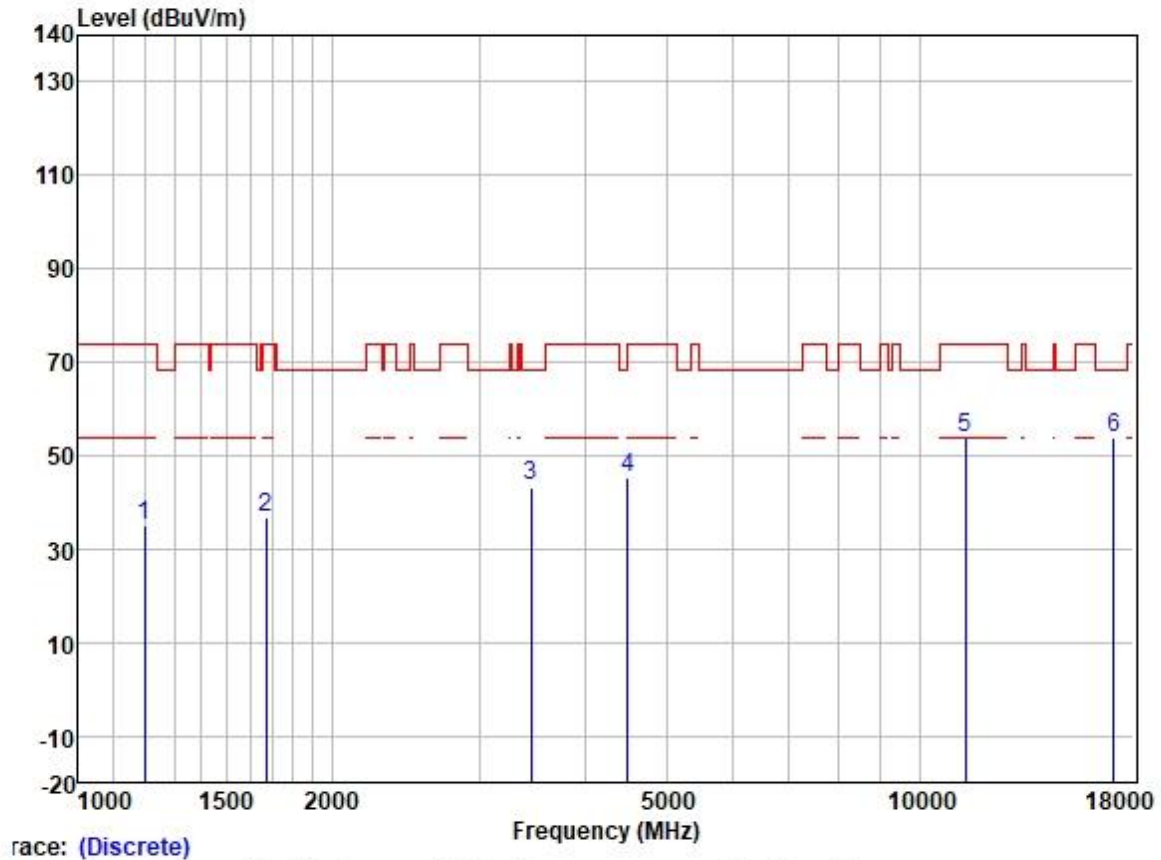

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	46.40	24.68	2.34	38.39	35.03	74.00	-38.97	VERTICAL	Peak
2	1672.779	46.30	25.67	2.80	37.91	36.86	74.00	-37.14	VERTICAL	Peak
3	3455.508	47.24	28.88	4.20	36.96	43.36	68.20	-24.84	VERTICAL	Peak
4	4495.125	46.37	30.80	5.05	36.82	45.40	68.20	-22.80	VERTICAL	Peak
5	11340.000	42.93	39.97	8.18	37.17	53.91	74.00	-20.09	VERTICAL	Peak
6	17010.000	37.89	41.75	9.39	35.35	53.68	68.20	-14.52	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

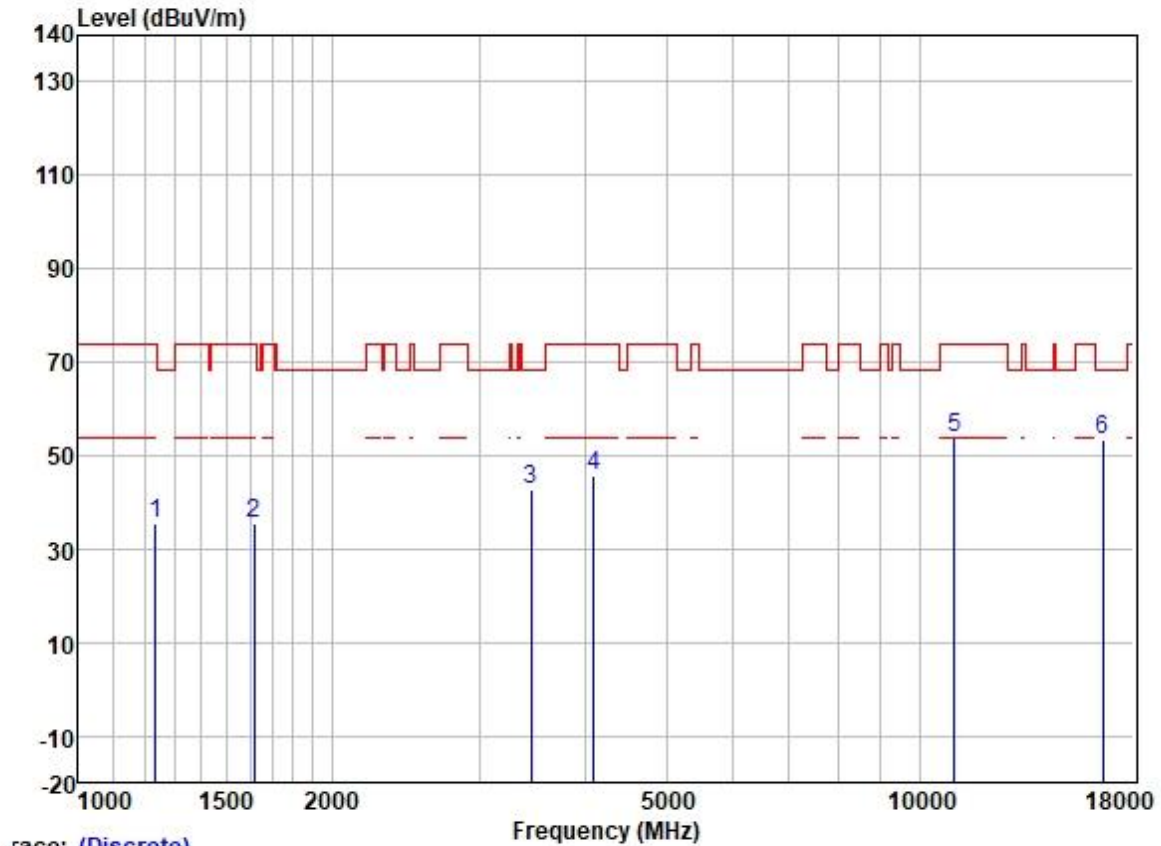

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1234.909	46.53	24.93	2.30	38.37	35.39	74.00	-38.61	HORIZONTAL	Peak
2	1615.754	45.13	25.60	2.80	37.95	35.58	74.00	-38.42	HORIZONTAL	Peak
3	3455.508	46.67	28.88	4.20	36.96	42.79	68.20	-25.41	HORIZONTAL	Peak
4	4098.010	47.83	29.94	4.60	36.80	45.57	74.00	-28.43	HORIZONTAL	Peak
5	11000.000	43.41	40.10	7.71	37.25	53.97	74.00	-20.03	HORIZONTAL	Peak
6	16500.000	39.72	39.60	9.44	35.38	53.38	68.20	-14.82	HORIZONTAL	Peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

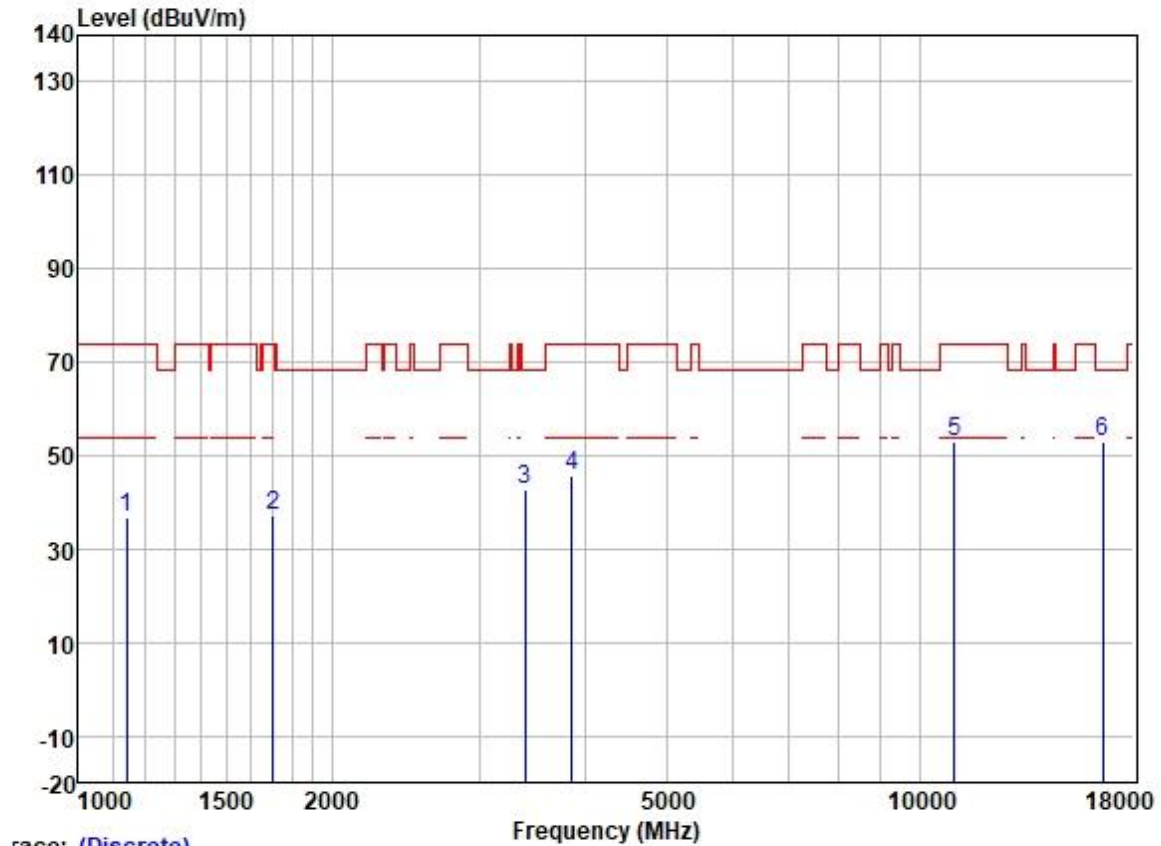


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	48.46	24.47	2.30	38.42	36.81	74.00	-37.19	VERTICAL	Peak
2	1702.042	46.64	25.72	2.80	37.89	37.27	74.00	-36.73	VERTICAL	Peak
3	3396.098	46.85	28.84	4.10	36.98	42.81	68.20	-25.39	VERTICAL	Peak
4	3856.668	48.37	29.62	4.60	36.84	45.75	74.00	-28.25	VERTICAL	Peak
5	11000.000	42.51	40.10	7.71	37.25	53.07	74.00	-20.93	VERTICAL	Peak
6	16500.000	39.32	39.60	9.44	35.38	52.98	68.20	-15.22	VERTICAL	Peak




Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

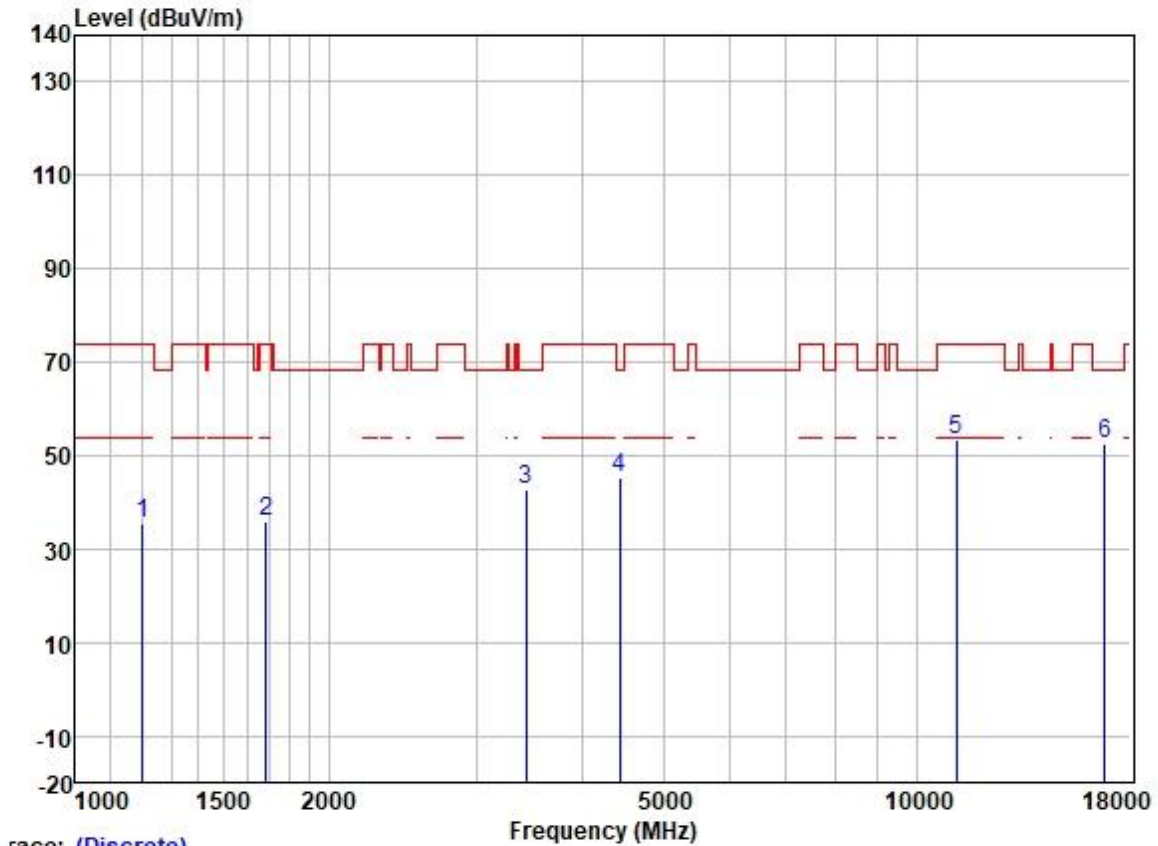

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	46.93	24.70	2.34	38.39	35.58	74.00	-38.42	HORIZONTAL	Peak
2	1687.347	45.39	25.69	2.80	37.91	35.97	74.00	-38.03	HORIZONTAL	Peak
3	3435.590	46.66	28.87	4.16	36.97	42.72	68.20	-25.48	HORIZONTAL	Peak
4	4443.453	46.37	30.73	4.83	36.81	45.12	68.20	-23.08	HORIZONTAL	Peak
5	11160.000	42.70	40.04	7.90	37.21	53.43	74.00	-20.57	HORIZONTAL	Peak
6	16740.000	38.07	40.49	9.41	35.37	52.60	68.20	-15.60	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

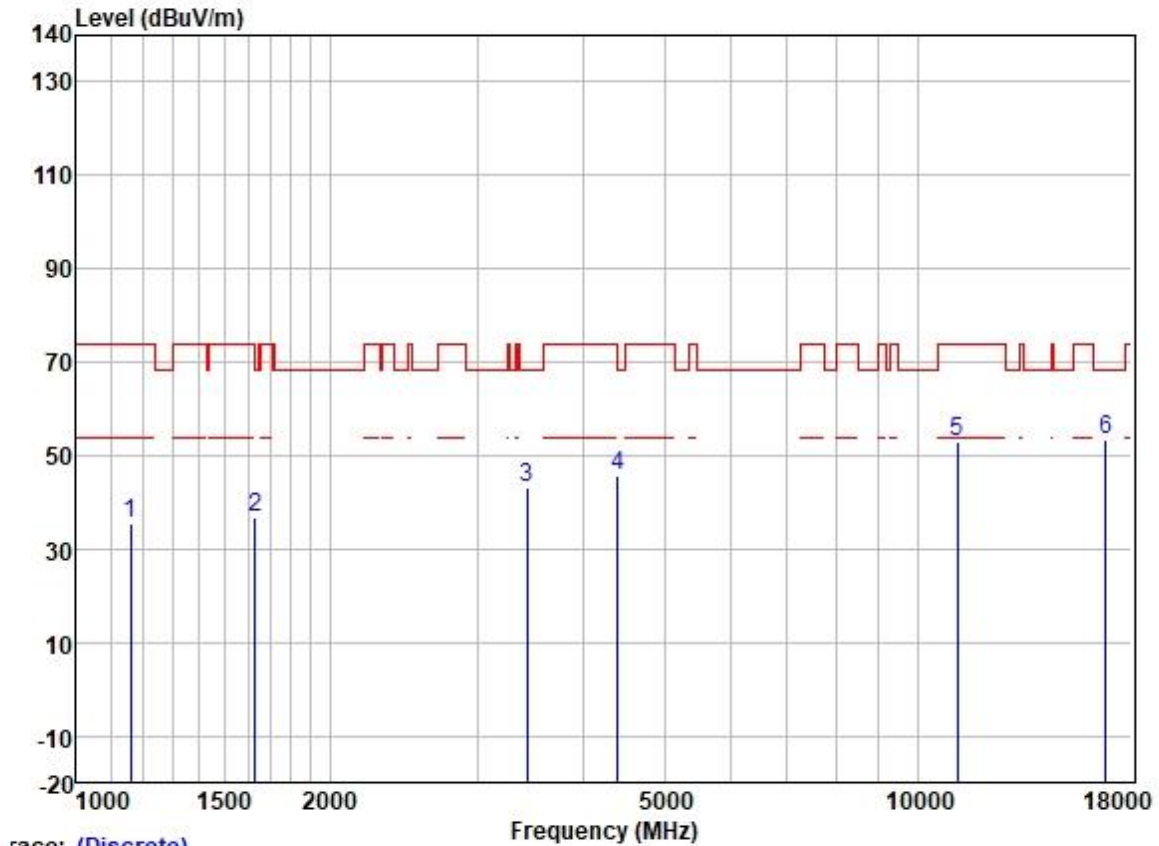

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	46.89	24.52	2.40	38.42	35.39	74.00	-38.61	VERTICAL	Peak
2	1629.825	46.31	25.61	2.80	37.95	36.77	68.20	-31.43	VERTICAL	Peak
3	3435.590	47.26	28.87	4.16	36.97	43.32	68.20	-24.88	VERTICAL	Peak
4	4405.090	46.95	30.68	4.70	36.81	45.52	68.20	-22.68	VERTICAL	Peak
5	11160.000	42.12	40.04	7.90	37.21	52.85	74.00	-21.15	VERTICAL	Peak
6	16740.000	38.91	40.49	9.41	35.37	53.44	68.20	-14.76	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

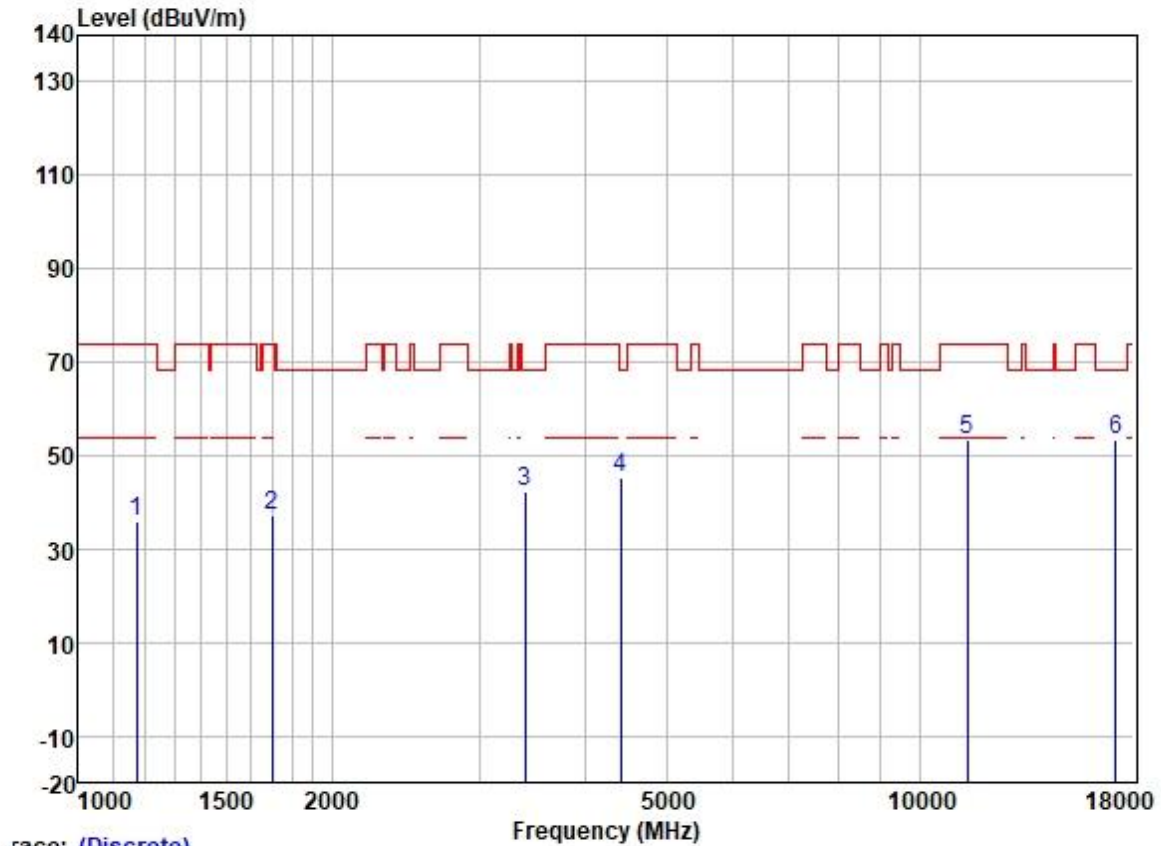

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1172.303	47.34	24.56	2.39	38.40	35.89	74.00	-38.11	HORIZONTAL	Peak
2	1697.129	46.70	25.71	2.80	37.89	37.32	74.00	-36.68	HORIZONTAL	Peak
3	3396.098	46.49	28.84	4.10	36.98	42.45	68.20	-25.75	HORIZONTAL	Peak
4	4417.841	46.67	30.70	4.74	36.81	45.30	68.20	-22.90	HORIZONTAL	Peak
5	11400.000	42.44	39.94	8.28	37.16	53.50	74.00	-20.50	HORIZONTAL	Peak
6	17100.000	36.95	42.32	9.63	35.34	53.56	68.20	-14.64	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

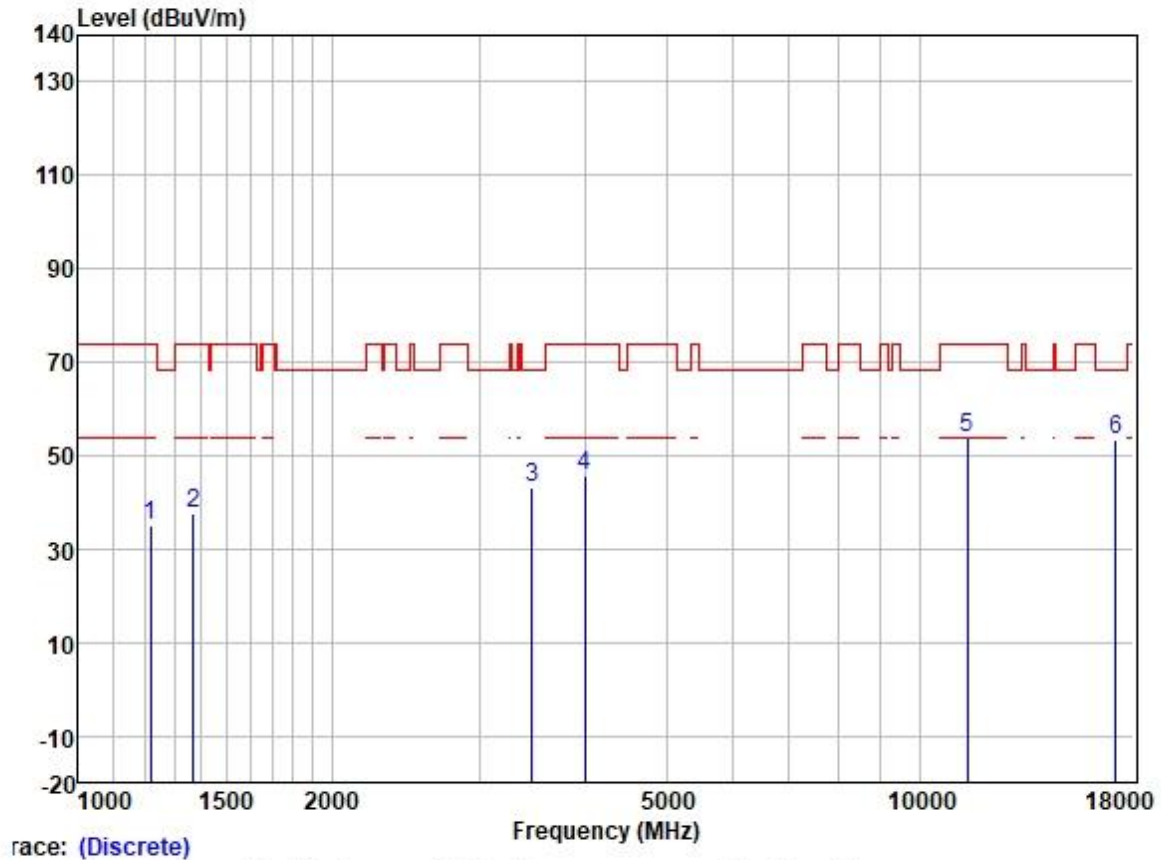

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.29	24.79	2.32	38.37	35.03	74.00	-38.97	VERTICAL	Peak
2	1370.328	48.07	25.35	2.60	38.25	37.77	74.00	-36.23	VERTICAL	Peak
3	3465.510	47.08	28.88	4.22	36.95	43.23	68.20	-24.97	VERTICAL	Peak
4	4004.339	47.92	29.80	4.60	36.80	45.52	74.00	-28.48	VERTICAL	Peak
5	11400.000	42.87	39.94	8.28	37.16	53.93	74.00	-20.07	VERTICAL	Peak
6	17100.000	36.69	42.32	9.63	35.34	53.30	68.20	-14.90	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

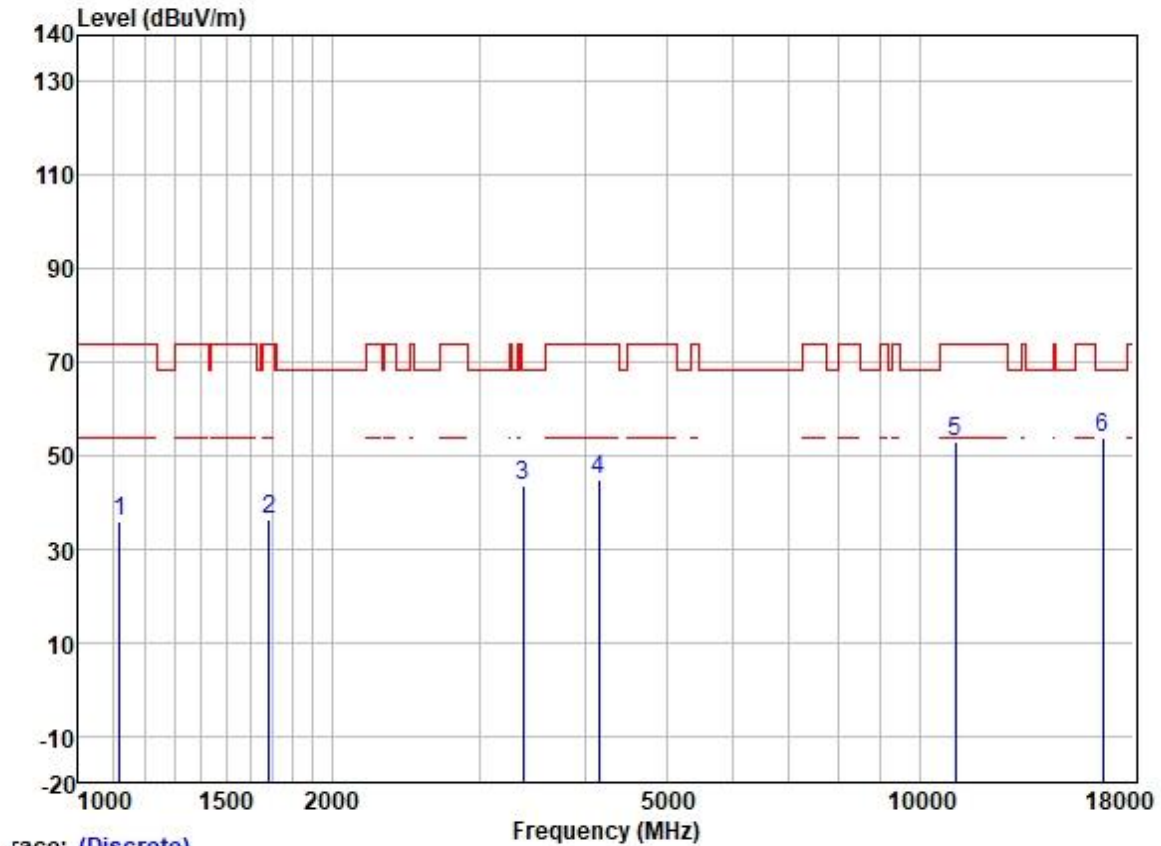

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1119.323	47.74	24.41	2.24	38.43	35.96	74.00	-38.04	HORIZONTAL	Peak
2	1687.347	45.89	25.69	2.80	37.91	36.47	74.00	-37.53	HORIZONTAL	Peak
3	3376.523	47.44	28.83	4.09	36.99	43.37	68.20	-24.83	HORIZONTAL	Peak
4	4157.664	47.04	30.06	4.60	36.80	44.90	74.00	-29.10	HORIZONTAL	Peak
5	11020.000	42.60	40.10	7.71	37.24	53.17	74.00	-20.83	HORIZONTAL	Peak
6	16530.000	39.82	39.76	9.44	35.38	53.64	68.20	-14.56	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

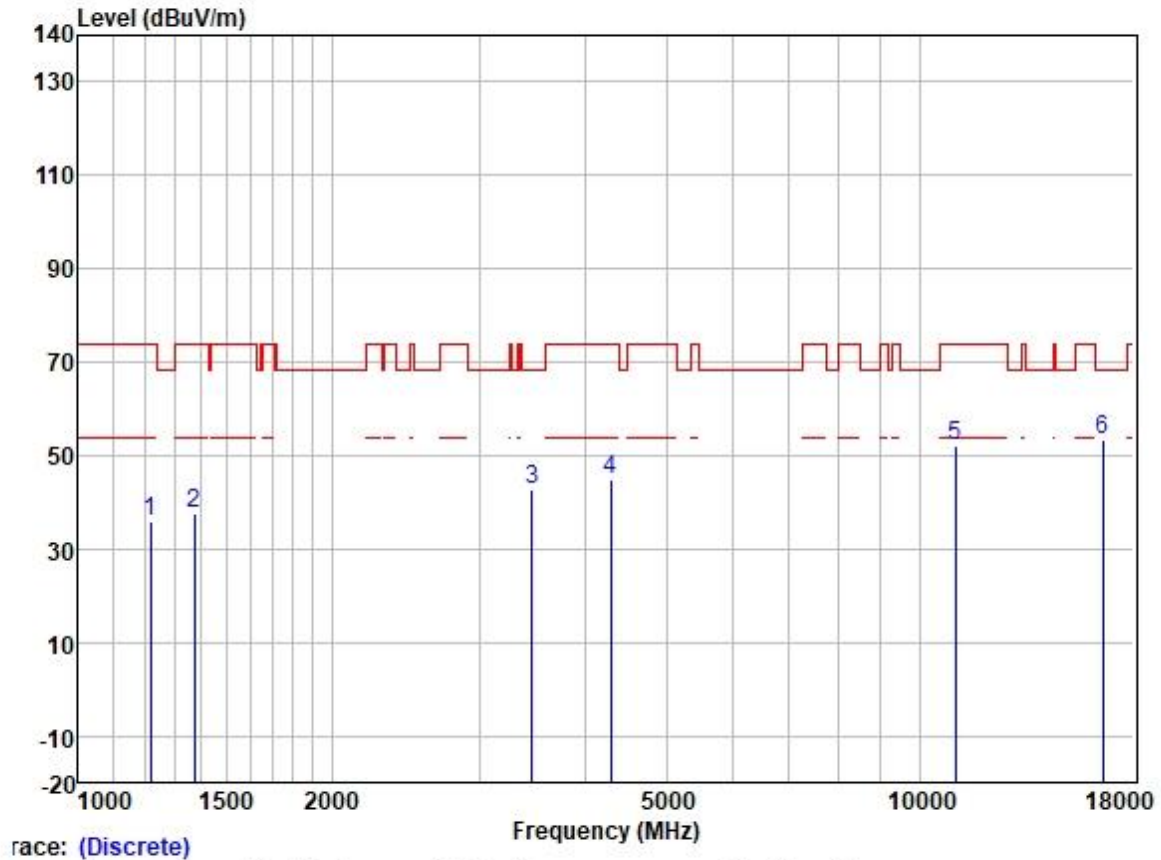

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	47.36	24.79	2.32	38.37	36.10	74.00	-37.90	VERTICAL	Peak
2	1374.295	47.70	25.35	2.60	38.25	37.40	74.00	-36.60	VERTICAL	Peak
3	3465.510	46.65	28.88	4.22	36.95	42.80	68.20	-25.40	VERTICAL	Peak
4	4291.977	46.54	30.45	4.64	36.81	44.82	74.00	-29.18	VERTICAL	Peak
5	11020.000	41.61	40.10	7.71	37.24	52.18	74.00	-21.82	VERTICAL	Peak
6	16530.000	39.47	39.76	9.44	35.38	53.29	68.20	-14.91	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: middle

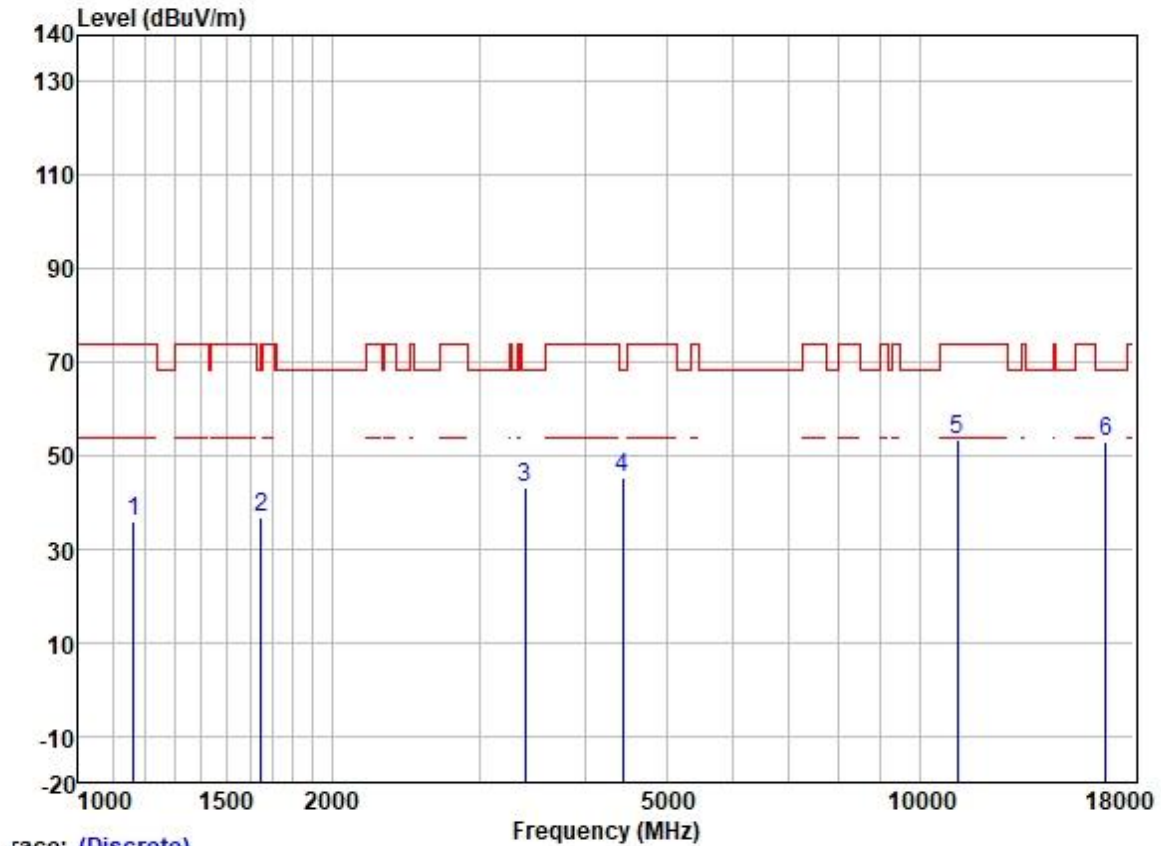


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.39	24.53	2.40	38.42	35.90	74.00	-38.10	HORIZONTAL	Peak
2	1648.778	46.35	25.63	2.80	37.93	36.85	68.20	-31.35	HORIZONTAL	Peak
3	3396.098	47.13	28.84	4.10	36.98	43.09	68.20	-25.11	HORIZONTAL	Peak
4	4443.453	46.46	30.73	4.83	36.81	45.21	68.20	-22.99	HORIZONTAL	Peak
5	11100.000	42.74	40.07	7.82	37.22	53.41	74.00	-20.59	HORIZONTAL	Peak
6	16650.000	38.95	40.10	9.43	35.38	53.10	68.20	-15.10	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: middle

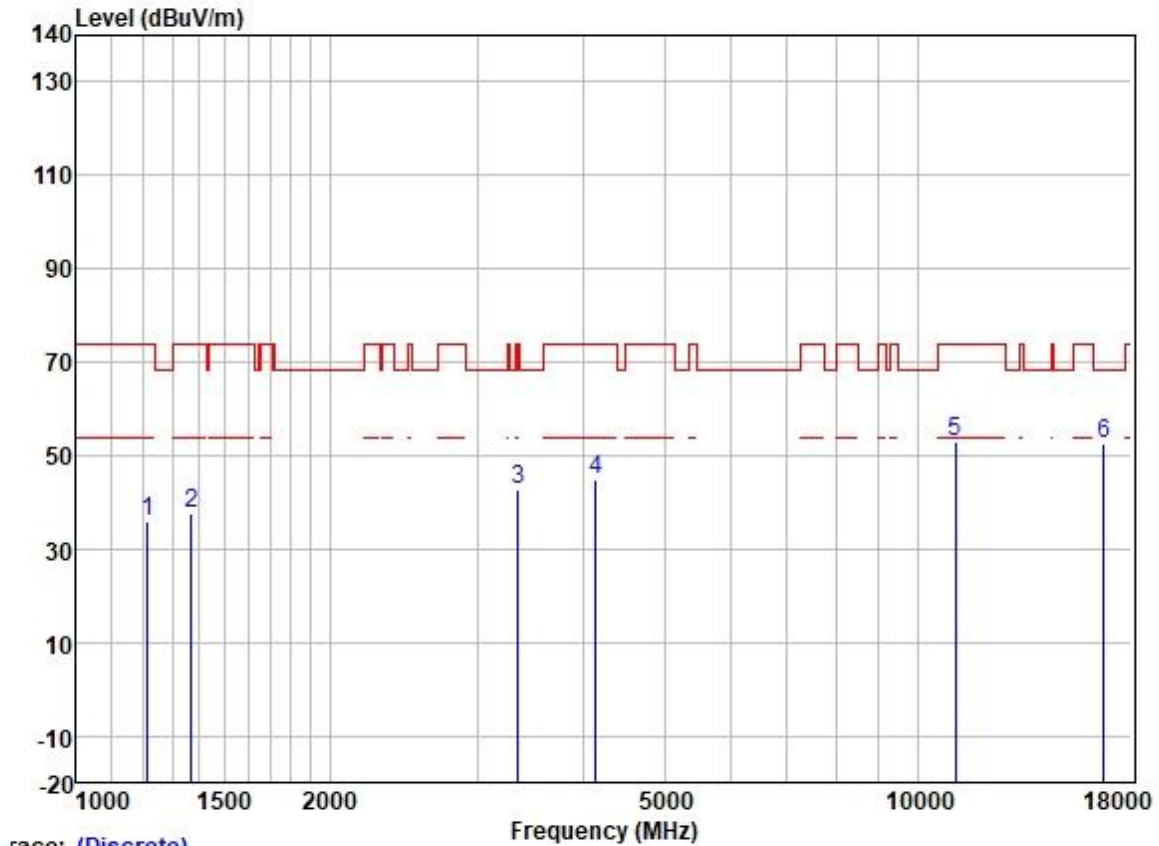


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.11	24.77	2.32	38.37	35.83	74.00	-38.17	VERTICAL	Peak
2	1370.328	47.76	25.35	2.60	38.25	37.46	74.00	-36.54	VERTICAL	Peak
3	3347.371	46.95	28.80	4.08	37.01	42.82	74.00	-31.18	VERTICAL	Peak
4	4145.664	47.02	30.03	4.60	36.80	44.85	74.00	-29.15	VERTICAL	Peak
5	11100.000	42.49	40.07	7.82	37.22	53.16	74.00	-20.84	VERTICAL	Peak
6	16650.000	38.42	40.10	9.43	35.38	52.57	68.20	-15.63	VERTICAL	Peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

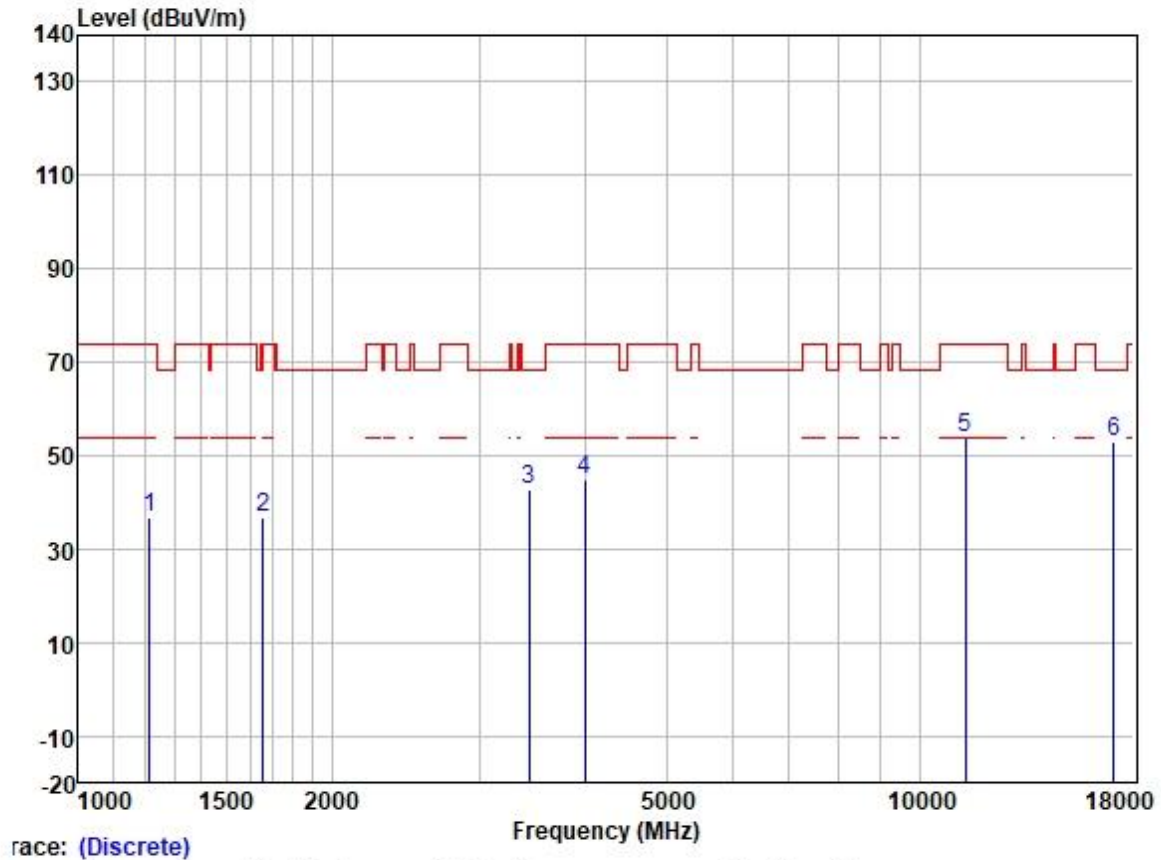


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.82	24.77	2.32	38.37	36.54	74.00	-37.46	HORIZONTAL	Peak
2	1658.337	46.34	25.65	2.80	37.93	36.86	68.20	-31.34	HORIZONTAL	Peak
3	3435.590	46.86	28.87	4.16	36.97	42.92	68.20	-25.28	HORIZONTAL	Peak
4	4004.339	47.24	29.80	4.60	36.80	44.84	74.00	-29.16	HORIZONTAL	Peak
5	11340.000	42.86	39.97	8.18	37.17	53.84	74.00	-20.16	HORIZONTAL	Peak
6	17010.000	37.11	41.75	9.39	35.35	52.90	68.20	-15.30	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

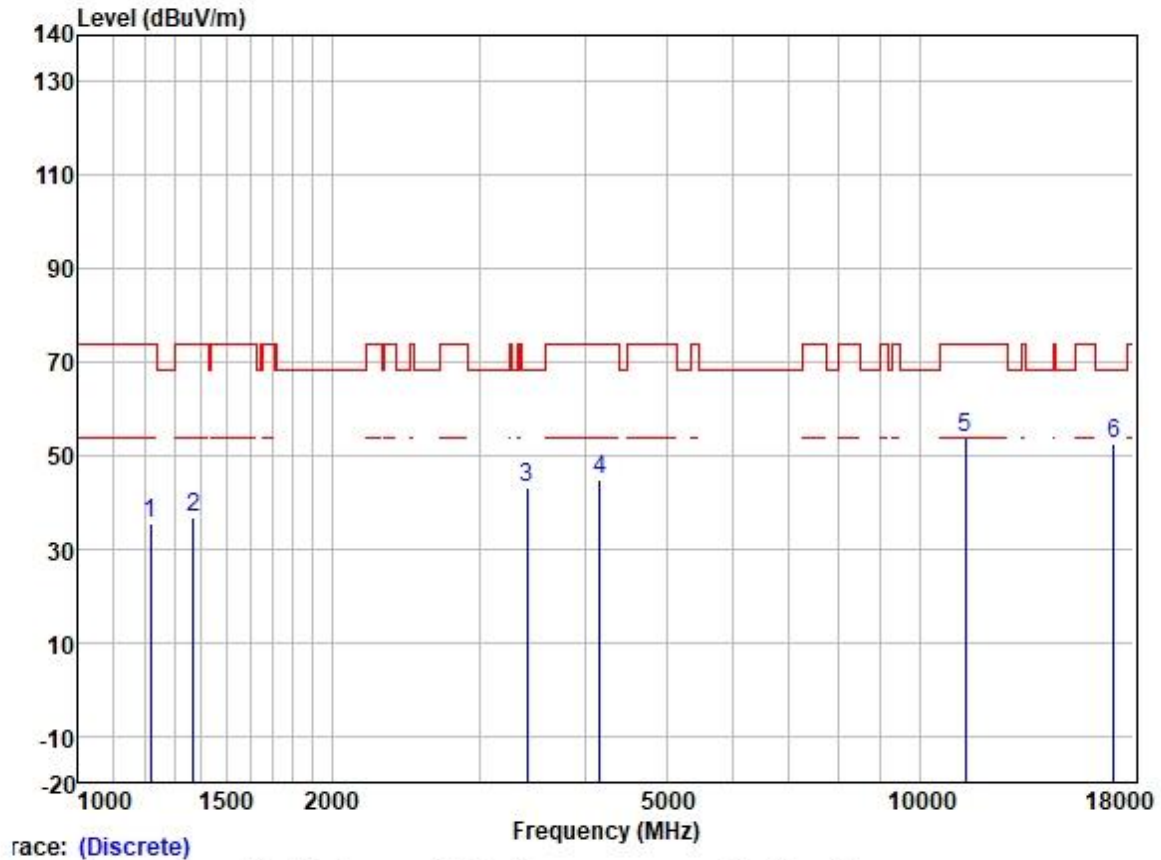

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1217.190	46.82	24.79	2.32	38.37	35.56	74.00	-38.44	VERTICAL Peak
2	1370.328	46.92	25.35	2.60	38.25	36.62	74.00	-37.38	VERTICAL Peak
3	3415.787	47.19	28.85	4.13	36.97	43.20	68.20	-25.00	VERTICAL Peak
4	4169.698	47.09	30.09	4.60	36.80	44.98	74.00	-29.02	VERTICAL Peak
5	11340.000	42.85	39.97	8.18	37.17	53.83	74.00	-20.17	VERTICAL Peak
6	17010.000	36.88	41.75	9.39	35.35	52.67	68.20	-15.53	VERTICAL Peak

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

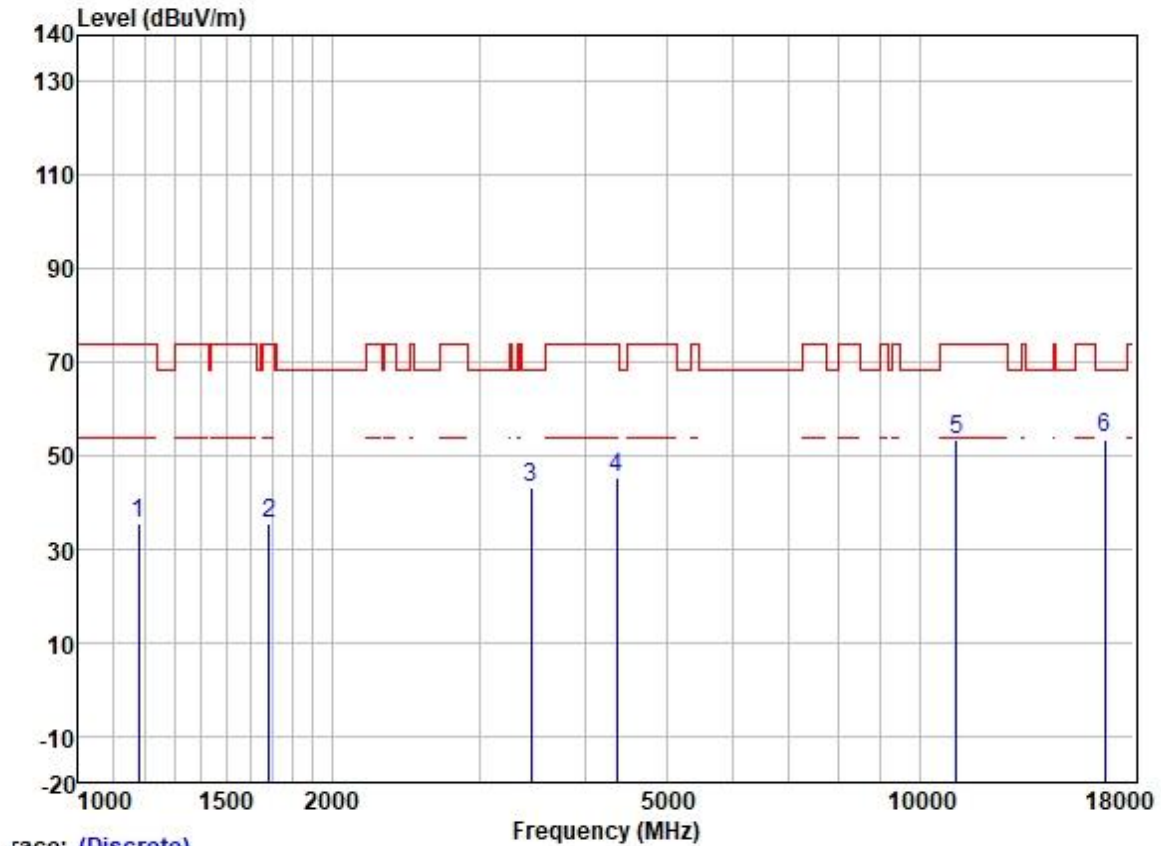

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1179.100	46.96	24.59	2.38	38.40	35.53	74.00	-38.47	HORIZONTAL	Peak
2	1687.347	44.89	25.69	2.80	37.91	35.47	74.00	-38.53	HORIZONTAL	Peak
3	3455.508	46.90	28.88	4.20	36.96	43.02	68.20	-25.18	HORIZONTAL	Peak
4	4367.058	46.80	30.62	4.68	36.81	45.29	74.00	-28.71	HORIZONTAL	Peak
5	11060.000	42.78	40.09	7.74	37.23	53.38	74.00	-20.62	HORIZONTAL	Peak
6	16590.000	39.62	39.93	9.43	35.38	53.60	68.20	-14.60	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

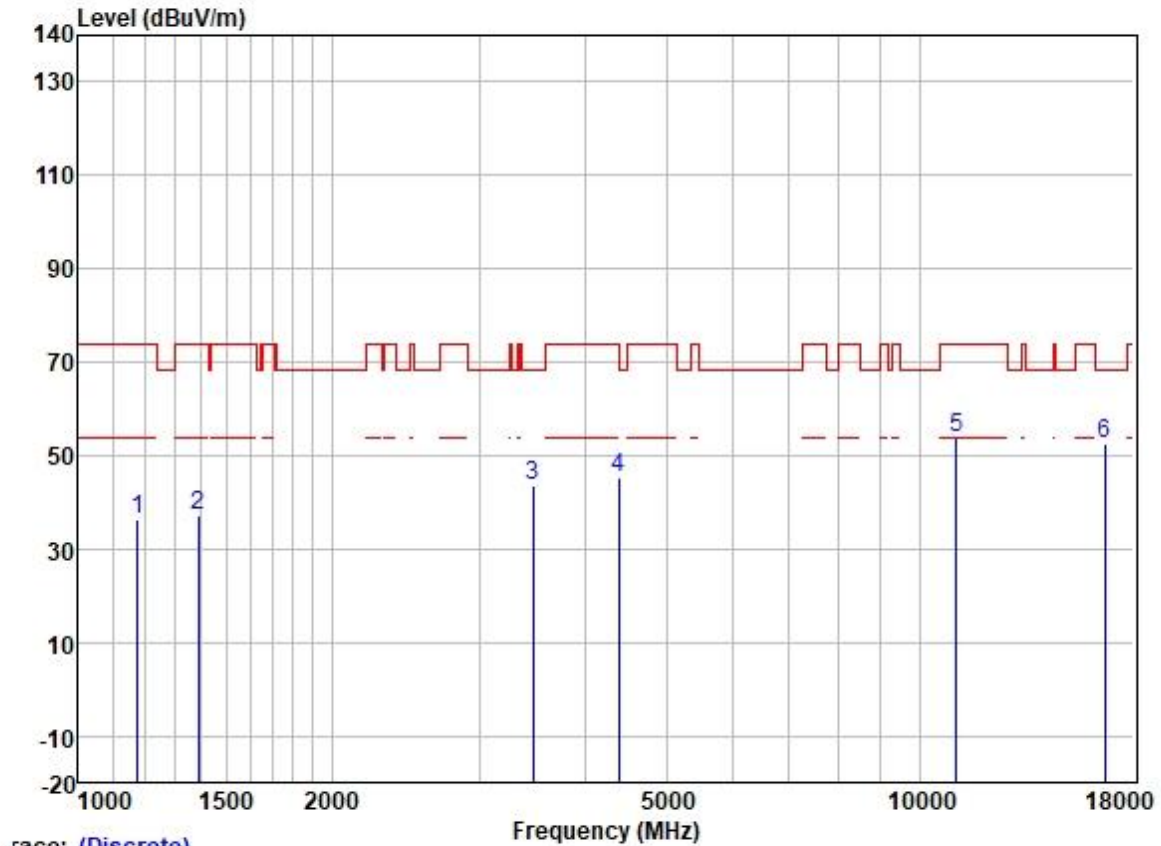

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1175.697	47.68	24.58	2.38	38.40	36.24	74.00	-37.76	VERTICAL	Peak
2	1390.276	47.41	25.38	2.60	38.22	37.17	74.00	-36.83	VERTICAL	Peak
3	3475.541	47.36	28.89	4.25	36.95	43.55	68.20	-24.65	VERTICAL	Peak
4	4392.376	46.92	30.66	4.70	36.81	45.47	74.00	-28.53	VERTICAL	Peak
5	11060.000	43.25	40.09	7.74	37.23	53.85	74.00	-20.15	VERTICAL	Peak
6	16590.000	38.62	39.93	9.43	35.38	52.60	68.20	-15.60	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

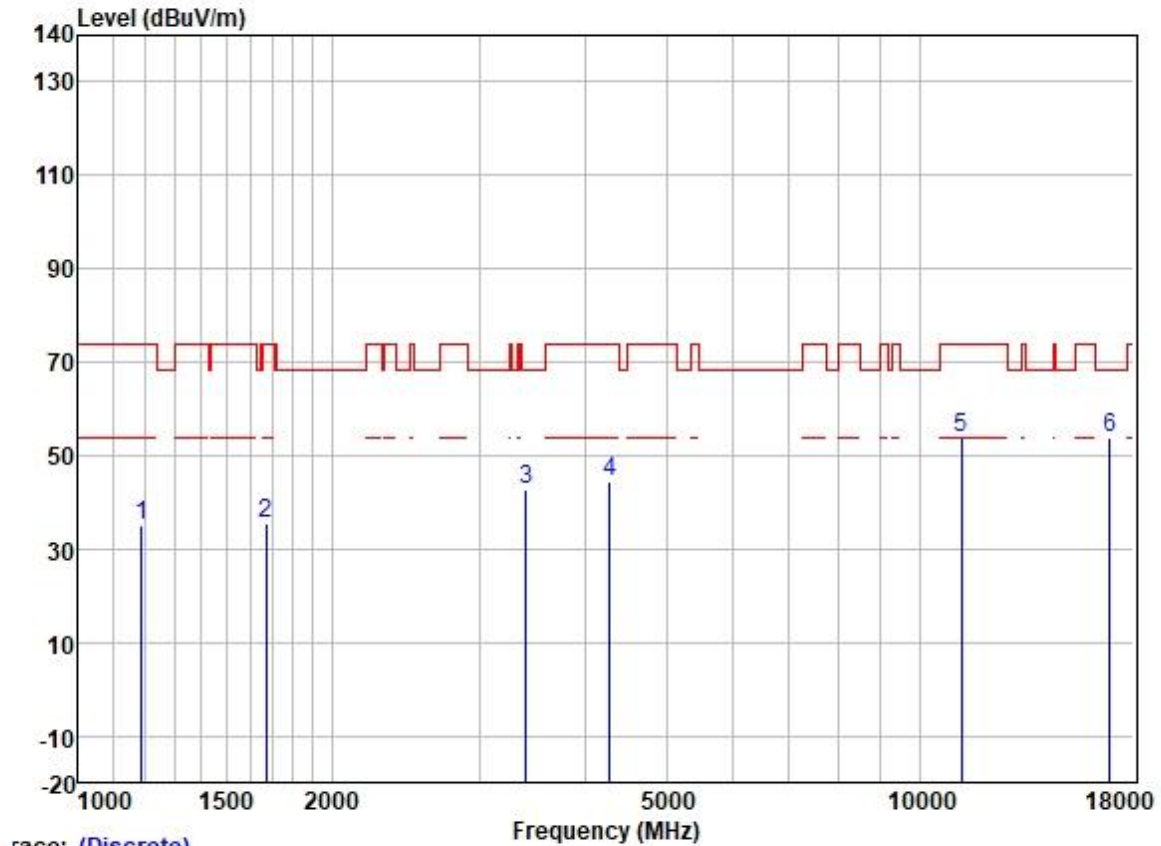

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1189.368	46.32	24.63	2.36	38.39	34.92	74.00	-39.08	HORIZONTAL	Peak
2	1672.779	44.82	25.67	2.80	37.91	35.38	74.00	-38.62	HORIZONTAL	Peak
3	3405.929	46.54	28.85	4.11	36.98	42.52	68.20	-25.68	HORIZONTAL	Peak
4	4279.589	46.21	30.42	4.63	36.81	44.45	74.00	-29.55	HORIZONTAL	Peak
5	11220.000	43.07	40.03	7.95	37.19	53.86	74.00	-20.14	HORIZONTAL	Peak
6	16830.000	38.75	40.94	9.40	35.37	53.72	68.20	-14.48	HORIZONTAL	Peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

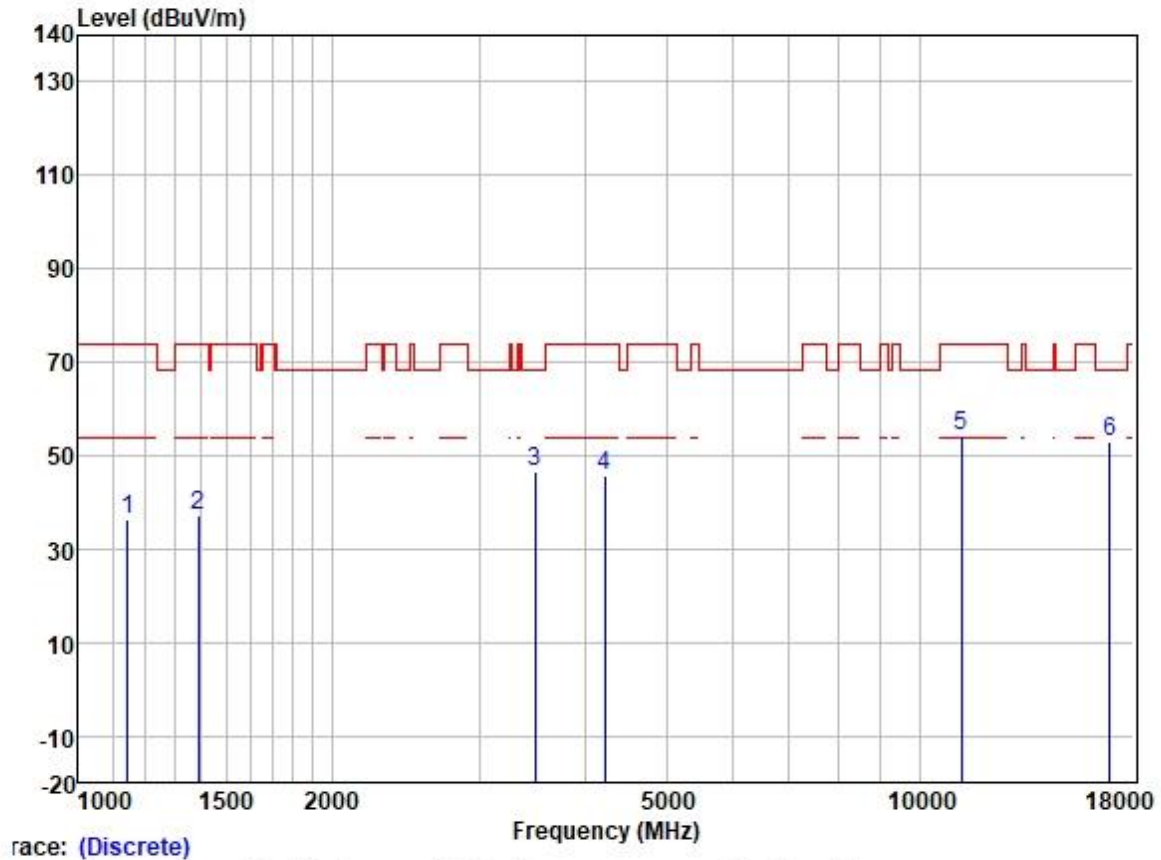

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	47.80	24.48	2.32	38.42	36.18	74.00	-37.82	VERTICAL	Peak
2	1390.276	47.48	25.38	2.60	38.22	37.24	74.00	-36.76	VERTICAL	Peak
3	3495.691	50.12	28.90	4.30	36.94	46.38	68.20	-21.82	VERTICAL	Peak
4	4230.396	47.61	30.26	4.61	36.81	45.67	74.00	-28.33	VERTICAL	Peak
5	11220.000	43.29	40.03	7.95	37.19	54.08	74.00	-19.92	VERTICAL	Peak
6	16830.000	38.10	40.94	9.40	35.37	53.07	68.20	-15.13	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

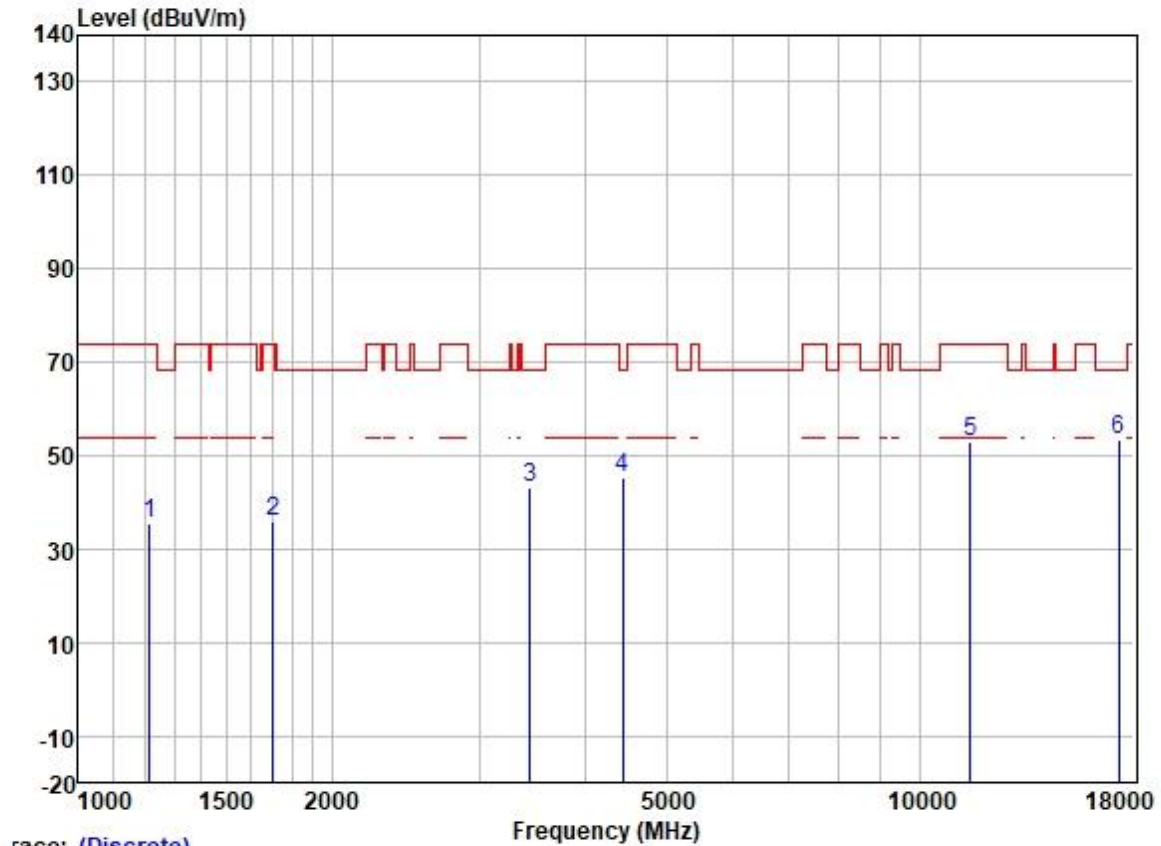


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	46.78	24.77	2.32	38.37	35.50	74.00	-38.50	HORIZONTAL	Peak
2	1702.042	45.47	25.72	2.80	37.89	36.10	74.00	-37.90	HORIZONTAL	Peak
3	3445.535	47.16	28.87	4.18	36.96	43.25	68.20	-24.95	HORIZONTAL	Peak
4	4443.453	46.40	30.73	4.83	36.81	45.15	68.20	-23.05	HORIZONTAL	Peak
5	11490.000	41.97	39.90	8.41	37.15	53.13	74.00	-20.87	HORIZONTAL	Peak
6	17235.000	35.46	43.01	10.08	35.33	53.22	68.20	-14.98	HORIZONTAL	Peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

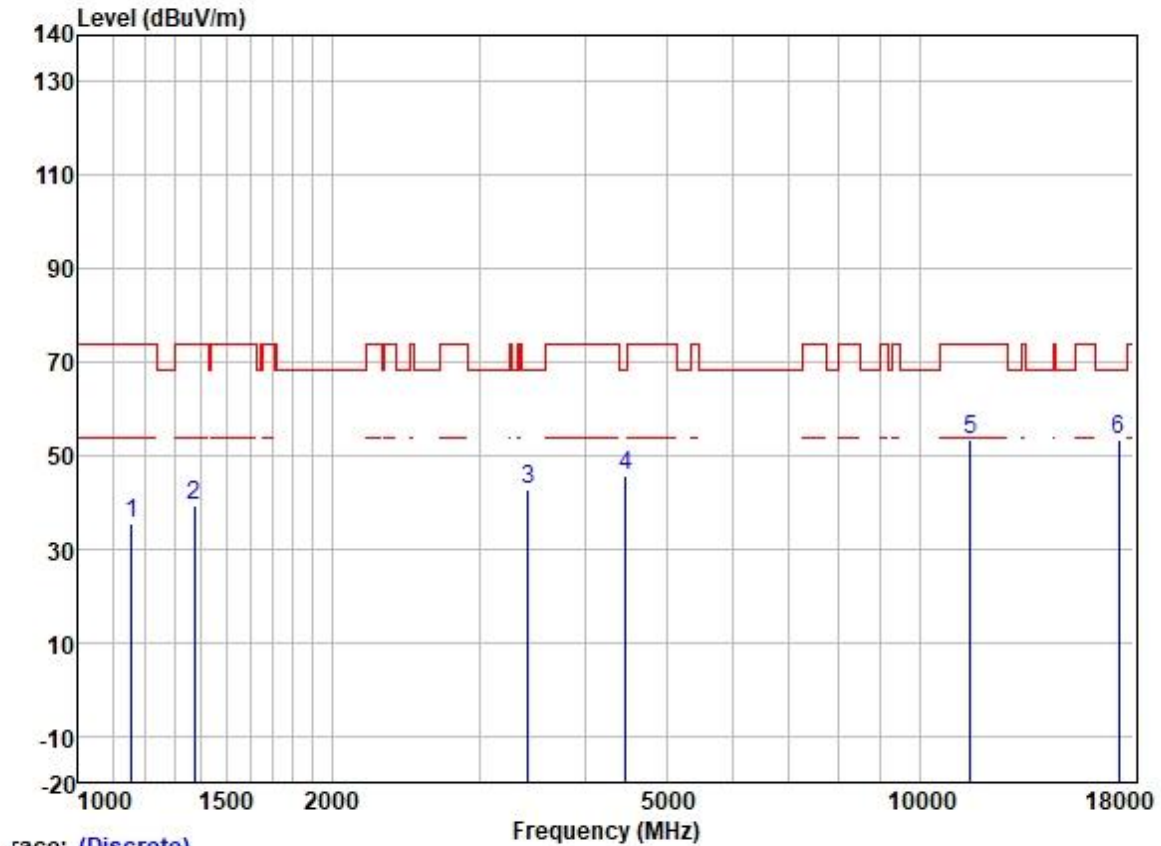


Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	47.08	24.51	2.38	38.42	35.55	74.00	-38.45	VERTICAL	Peak
2	1374.295	49.50	25.35	2.60	38.25	39.20	74.00	-34.80	VERTICAL	Peak
3	3425.675	46.59	28.86	4.15	36.97	42.63	68.20	-25.57	VERTICAL	Peak
4	4469.214	46.71	30.77	4.93	36.81	45.60	68.20	-22.60	VERTICAL	Peak
5	11490.000	42.21	39.90	8.41	37.15	53.37	74.00	-20.63	VERTICAL	Peak
6	17235.000	35.52	43.01	10.08	35.33	53.28	68.20	-14.92	VERTICAL	Peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

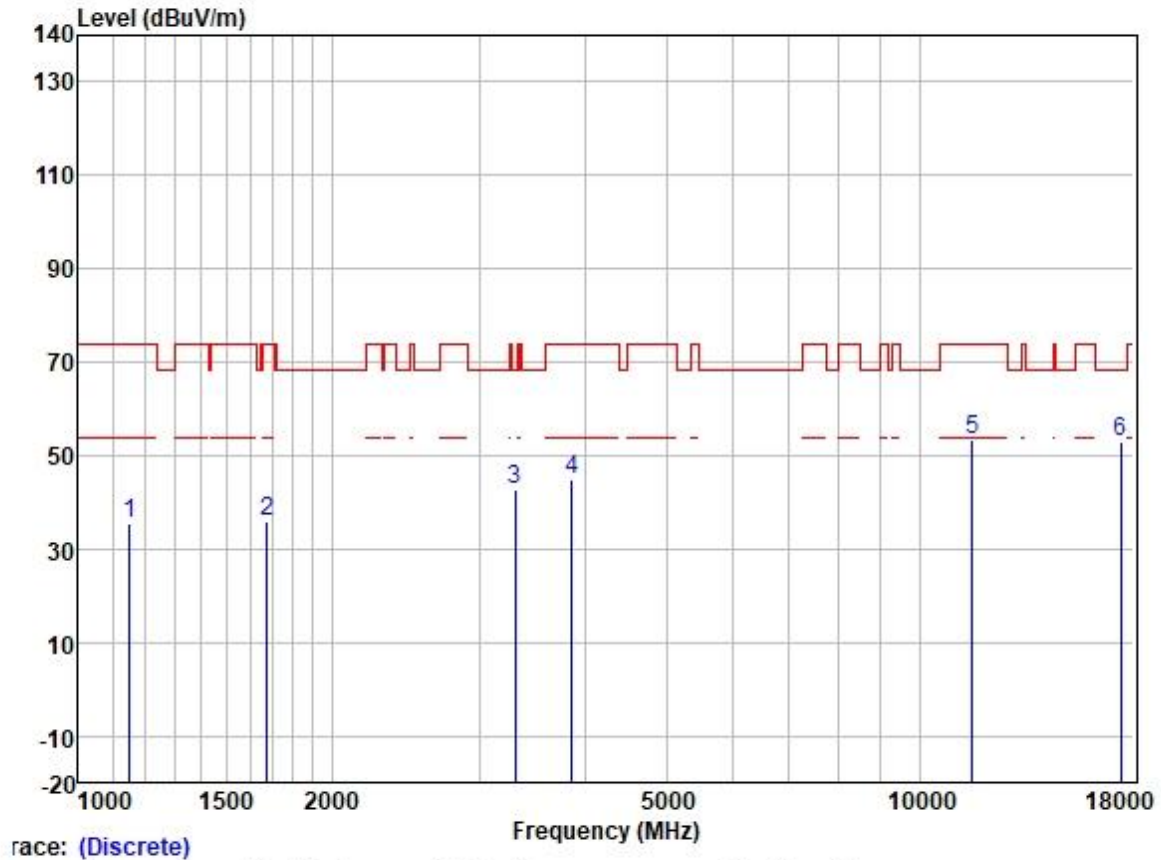

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	47.09	24.50	2.36	38.42	35.53	74.00	-38.47	HORIZONTAL	Peak
2	1677.621	45.22	25.68	2.80	37.91	35.79	74.00	-38.21	HORIZONTAL	Peak
3	3308.894	46.92	28.76	4.06	37.03	42.71	68.20	-25.49	HORIZONTAL	Peak
4	3856.668	47.41	29.62	4.60	36.84	44.79	74.00	-29.21	HORIZONTAL	Peak
5	11570.000	42.43	39.78	8.38	37.14	53.45	74.00	-20.55	HORIZONTAL	Peak
6	17355.000	34.60	43.40	10.39	35.32	53.07	68.20	-15.13	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

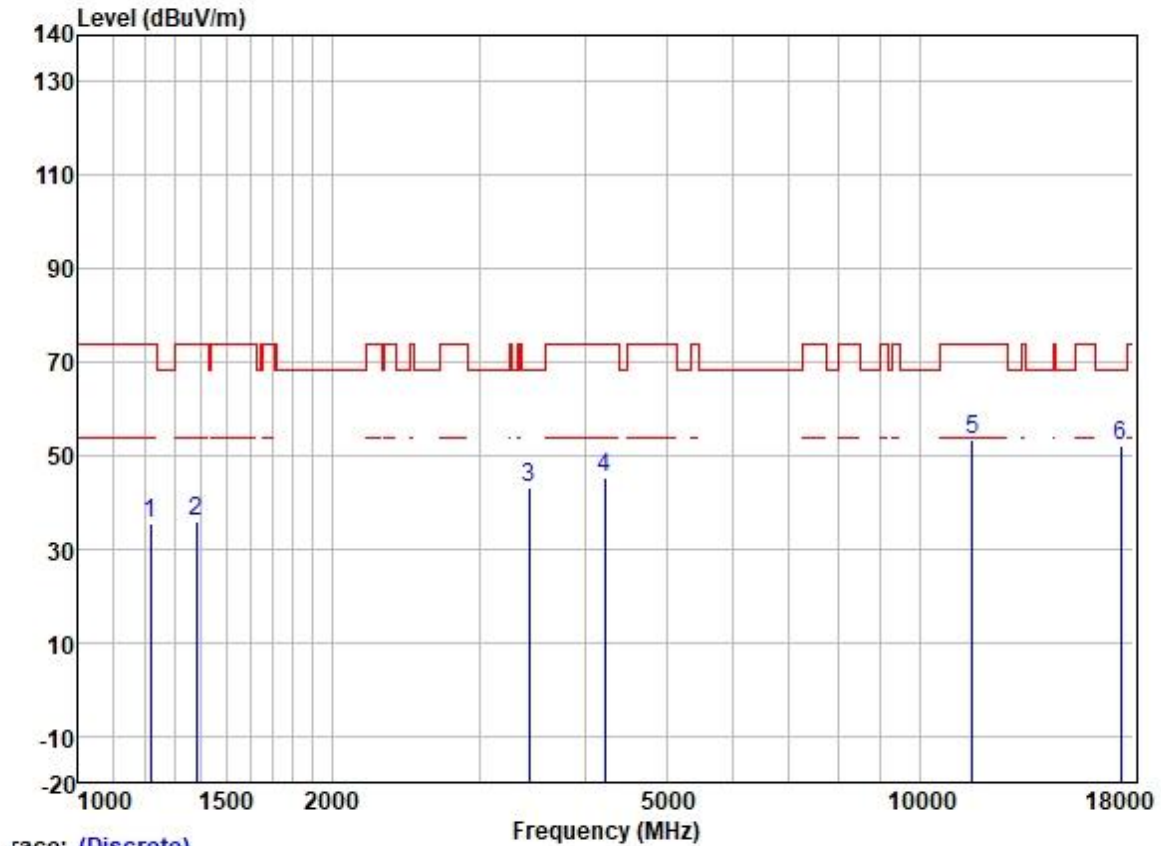

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.90	24.79	2.32	38.37	35.64	74.00	-38.36	VERTICAL	Peak
2	1382.262	46.18	25.37	2.60	38.25	35.90	74.00	-38.10	VERTICAL	Peak
3	3435.590	46.91	28.87	4.16	36.97	42.97	68.20	-25.23	VERTICAL	Peak
4	4230.396	47.42	30.26	4.61	36.81	45.48	74.00	-28.52	VERTICAL	Peak
5	11570.000	42.23	39.78	8.38	37.14	53.25	74.00	-20.75	VERTICAL	Peak
6	17355.000	33.74	43.40	10.39	35.32	52.21	68.20	-15.99	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

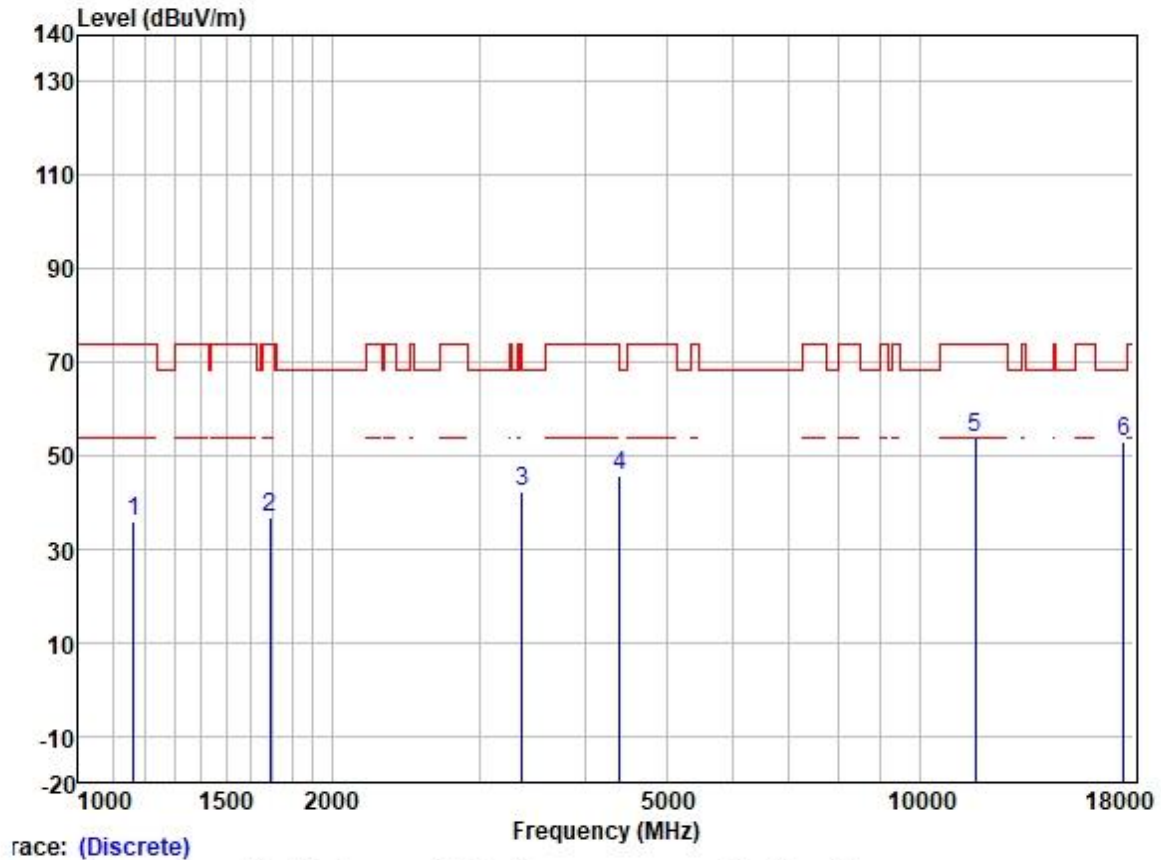

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.26	24.53	2.40	38.42	35.77	74.00	-38.23	HORIZONTAL	Peak
2	1692.231	46.23	25.70	2.80	37.89	36.84	74.00	-37.16	HORIZONTAL	Peak
3	3366.778	46.55	28.82	4.09	36.99	42.47	68.20	-25.73	HORIZONTAL	Peak
4	4405.090	47.20	30.68	4.70	36.81	45.77	68.20	-22.43	HORIZONTAL	Peak
5	11650.000	42.79	39.65	8.35	37.13	53.66	74.00	-20.34	HORIZONTAL	Peak
6	17475.000	33.54	43.90	10.77	35.32	52.89	68.20	-15.31	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

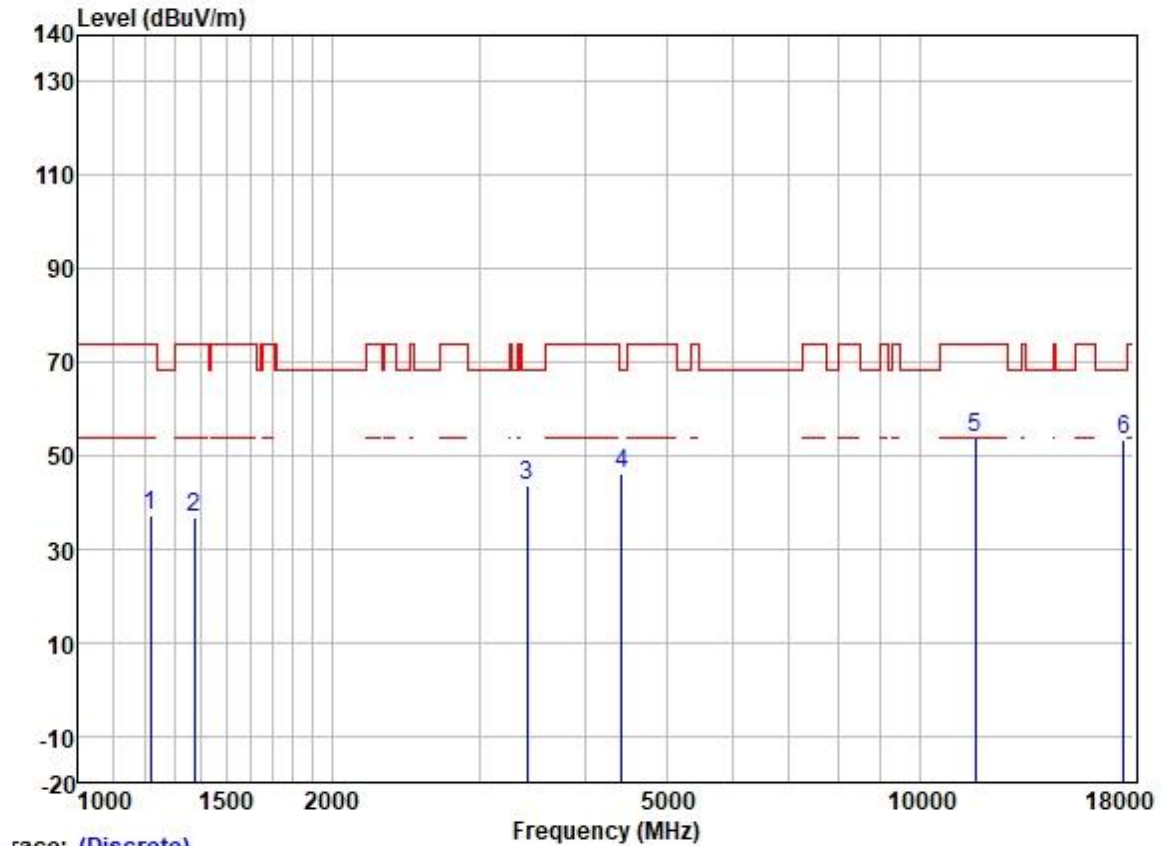

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	48.62	24.79	2.32	38.37	37.36	74.00	-36.64	VERTICAL	Peak
2	1374.295	46.85	25.35	2.60	38.25	36.55	74.00	-37.45	VERTICAL	Peak
3	3415.787	47.77	28.85	4.13	36.97	43.78	68.20	-24.42	VERTICAL	Peak
4	4430.628	47.39	30.72	4.78	36.81	46.08	68.20	-22.12	VERTICAL	Peak
5	11650.000	43.06	39.65	8.35	37.13	53.93	74.00	-20.07	VERTICAL	Peak
6	17475.000	33.96	43.90	10.77	35.32	53.31	68.20	-14.89	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

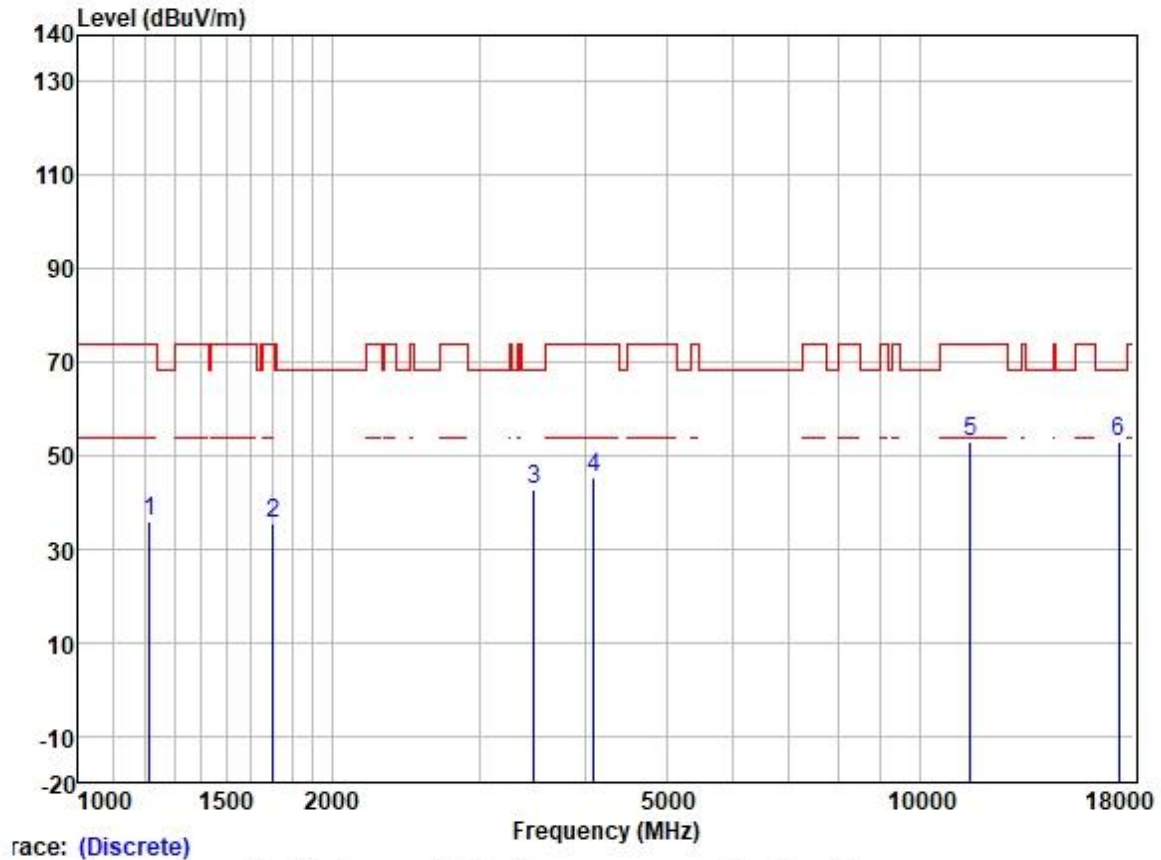

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	47.14	24.77	2.32	38.37	35.86	74.00	-38.14	HORIZONTAL	Peak
2	1702.042	44.97	25.72	2.80	37.89	35.60	74.00	-38.40	HORIZONTAL	Peak
3	3485.601	46.59	28.89	4.27	36.95	42.80	68.20	-25.40	HORIZONTAL	Peak
4	4098.010	47.61	29.94	4.60	36.80	45.35	74.00	-28.65	HORIZONTAL	Peak
5	11490.000	41.88	39.90	8.41	37.15	53.04	74.00	-20.96	HORIZONTAL	Peak
6	17235.000	35.08	43.01	10.08	35.33	52.84	68.20	-15.36	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 10; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

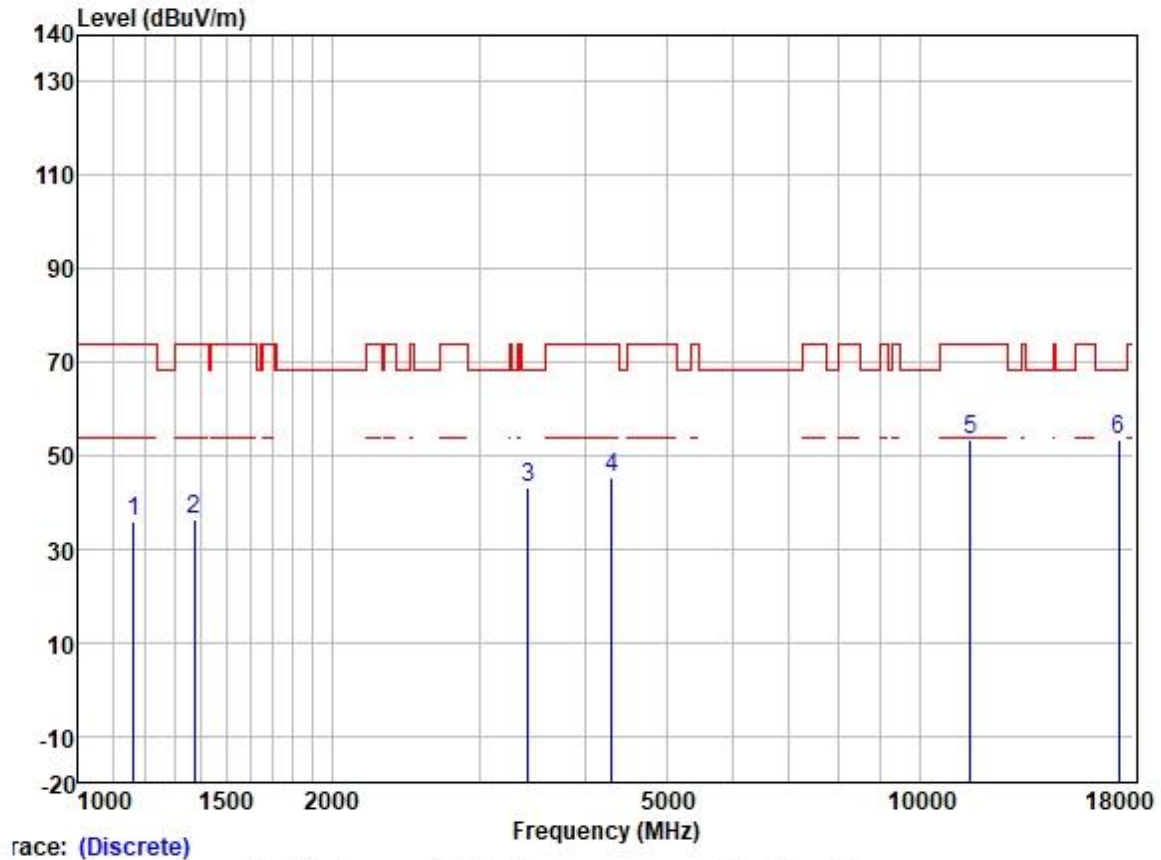

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.42	24.53	2.40	38.42	35.93	74.00	-38.07	VERTICAL	Peak
2	1374.295	46.70	25.35	2.60	38.25	36.40	74.00	-37.60	VERTICAL	Peak
3	3425.675	46.91	28.86	4.15	36.97	42.95	68.20	-25.25	VERTICAL	Peak
4	4304.400	47.05	30.48	4.65	36.81	45.37	74.00	-28.63	VERTICAL	Peak
5	11490.000	42.23	39.90	8.41	37.15	53.39	74.00	-20.61	VERTICAL	Peak
6	17235.000	35.56	43.01	10.08	35.33	53.32	68.20	-14.88	VERTICAL	Peak




Test Mode: 10; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

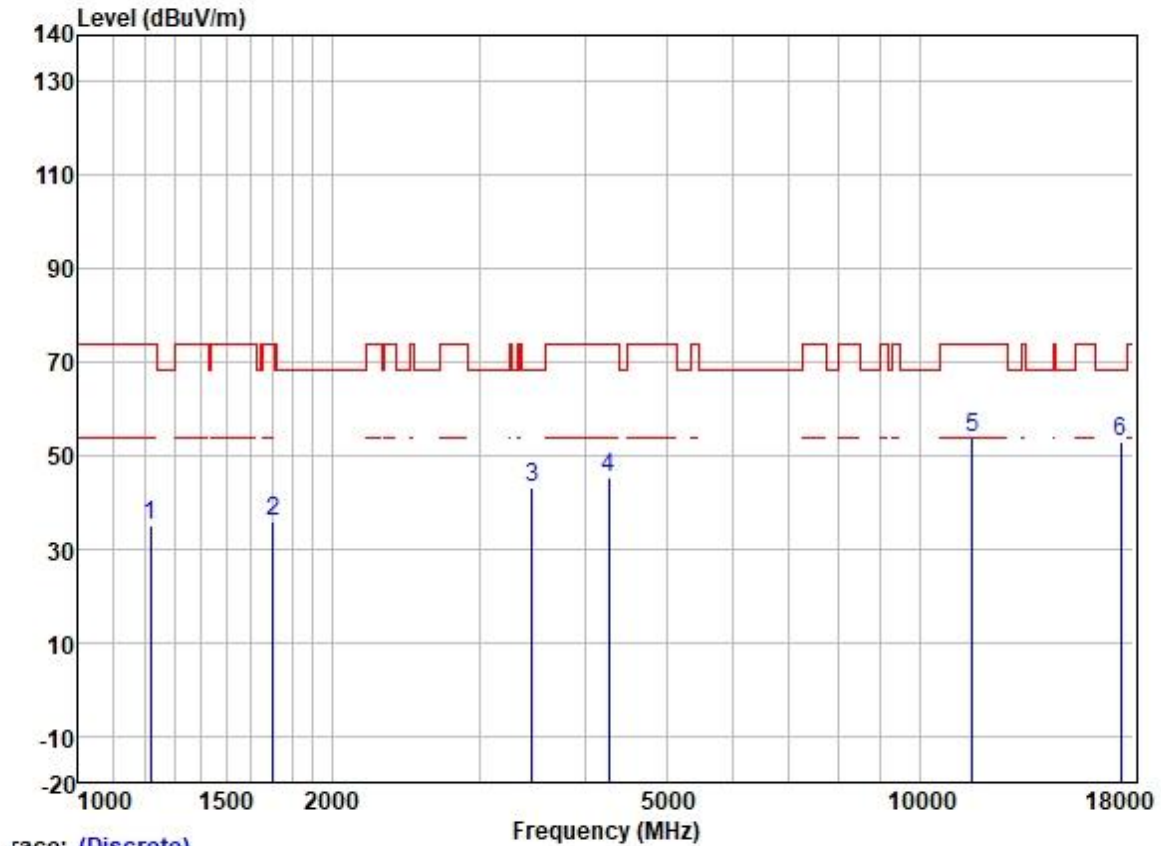

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.190	46.48	24.79	2.32	38.37	35.22	74.00	-38.78	HORIZONTAL	Peak
2	1702.042	45.39	25.72	2.80	37.89	36.02	74.00	-37.98	HORIZONTAL	Peak
3	3465.510	46.86	28.88	4.22	36.95	43.01	68.20	-25.19	HORIZONTAL	Peak
4	4267.237	47.00	30.38	4.63	36.81	45.20	74.00	-28.80	HORIZONTAL	Peak
5	11570.000	42.65	39.78	8.38	37.14	53.67	74.00	-20.33	HORIZONTAL	Peak
6	17355.000	34.55	43.40	10.39	35.32	53.02	68.20	-15.18	HORIZONTAL	Peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

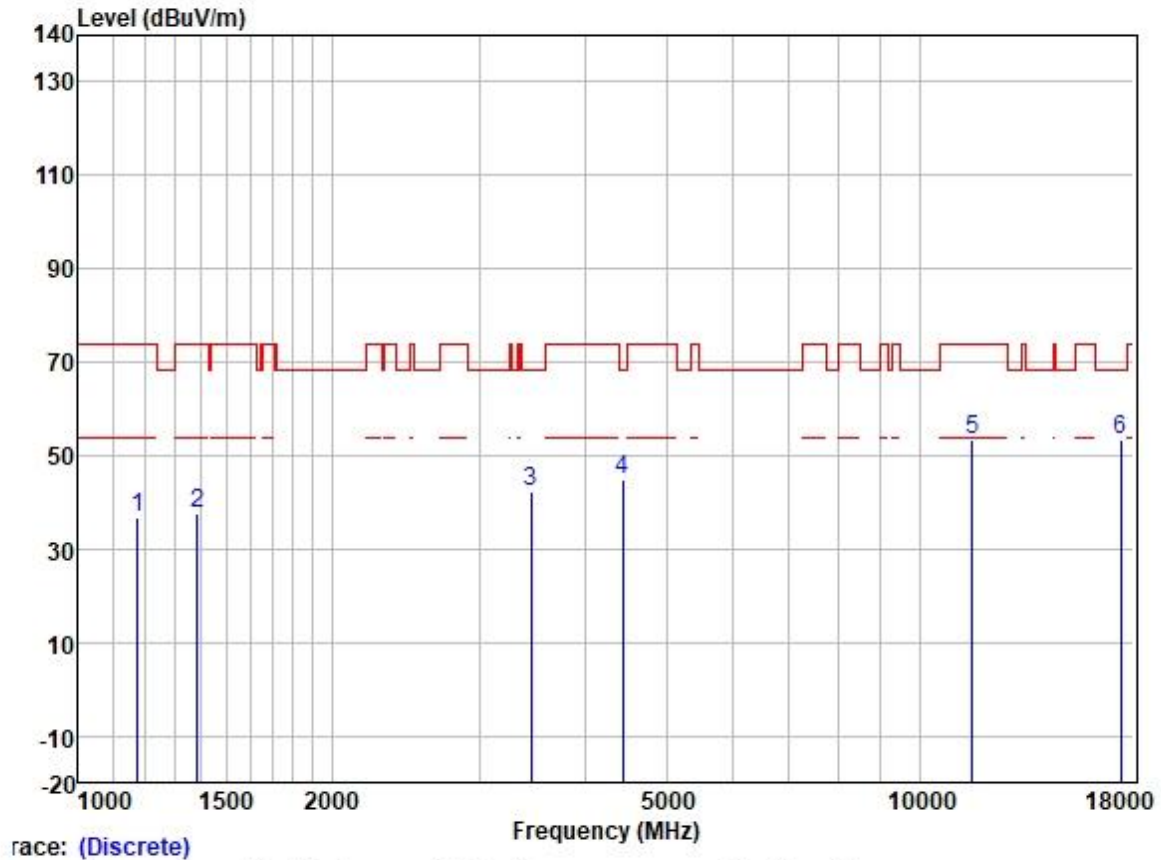

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1175.697	48.13	24.58	2.38	38.40	36.69	74.00	-37.31	VERTICAL	Peak
2	1386.264	47.69	25.37	2.60	38.25	37.41	74.00	-36.59	VERTICAL	Peak
3	3455.508	46.10	28.88	4.20	36.96	42.22	68.20	-25.98	VERTICAL	Peak
4	4443.453	46.08	30.73	4.83	36.81	44.83	68.20	-23.37	VERTICAL	Peak
5	11570.000	42.36	39.78	8.38	37.14	53.38	74.00	-20.62	VERTICAL	Peak
6	17355.000	34.89	43.40	10.39	35.32	53.36	68.20	-14.84	VERTICAL	Peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

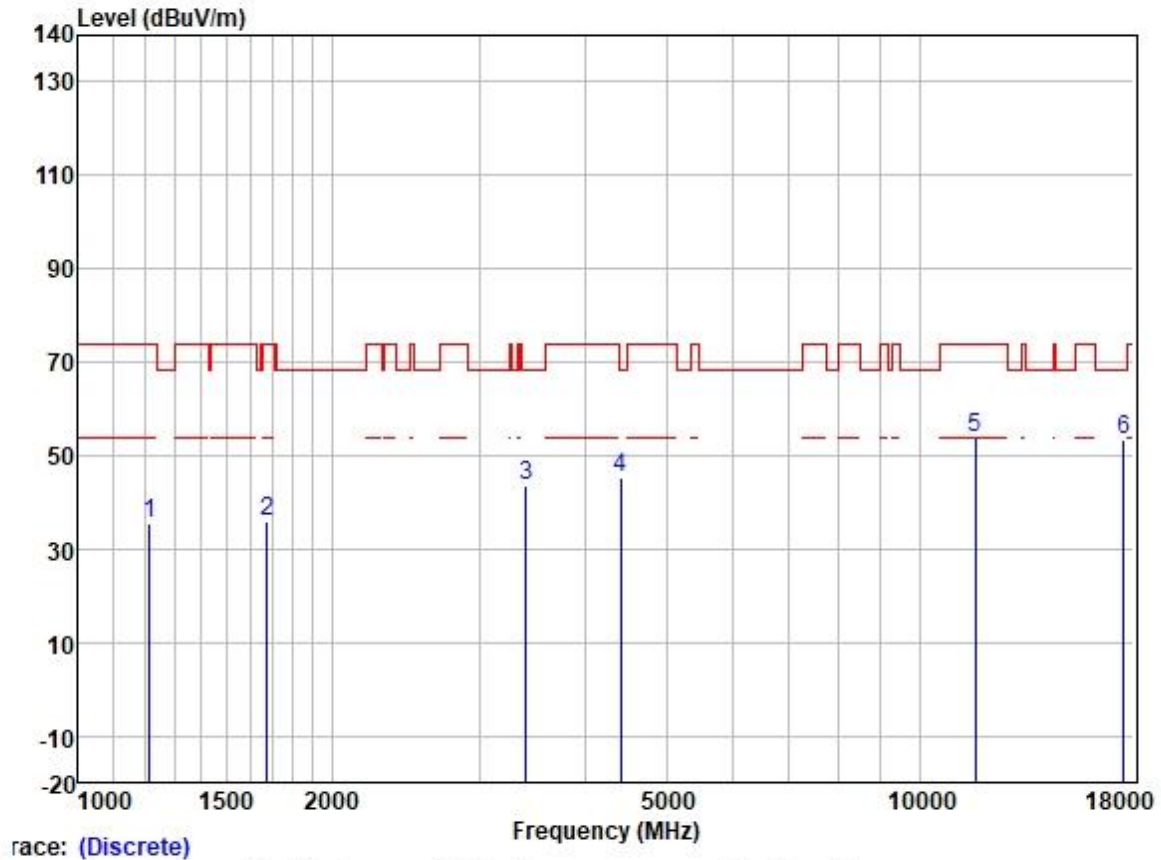

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	46.73	24.77	2.32	38.37	35.45	74.00	-38.55	HORIZONTAL	Peak
2	1677.621	45.22	25.68	2.80	37.91	35.79	74.00	-38.21	HORIZONTAL	Peak
3	3405.929	47.46	28.85	4.11	36.98	43.44	68.20	-24.76	HORIZONTAL	Peak
4	4417.841	46.51	30.70	4.74	36.81	45.14	68.20	-23.06	HORIZONTAL	Peak
5	11650.000	42.98	39.65	8.35	37.13	53.85	74.00	-20.15	HORIZONTAL	Peak
6	17475.000	33.85	43.90	10.77	35.32	53.20	68.20	-15.00	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 10; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

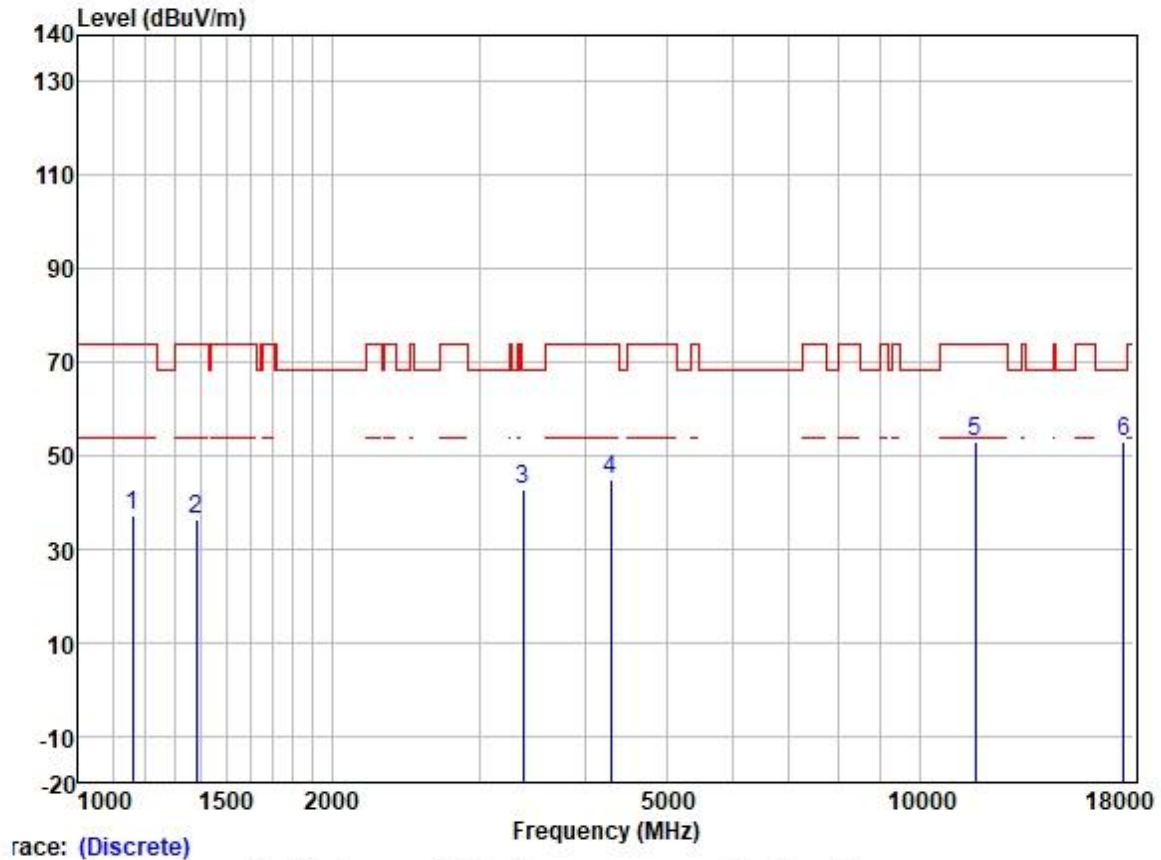


Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	48.81	24.52	2.40	38.42	37.31	74.00	-36.69	VERTICAL	Peak
2	1382.262	46.40	25.37	2.60	38.25	36.12	74.00	-37.88	VERTICAL	Peak
3	3376.523	46.83	28.83	4.09	36.99	42.76	68.20	-25.44	VERTICAL	Peak
4	4291.977	46.78	30.45	4.64	36.81	45.06	74.00	-28.94	VERTICAL	Peak
5	11650.000	42.29	39.65	8.35	37.13	53.16	74.00	-20.84	VERTICAL	Peak
6	17475.000	33.51	43.90	10.77	35.32	52.86	68.20	-15.34	VERTICAL	Peak




Test Mode: 10; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

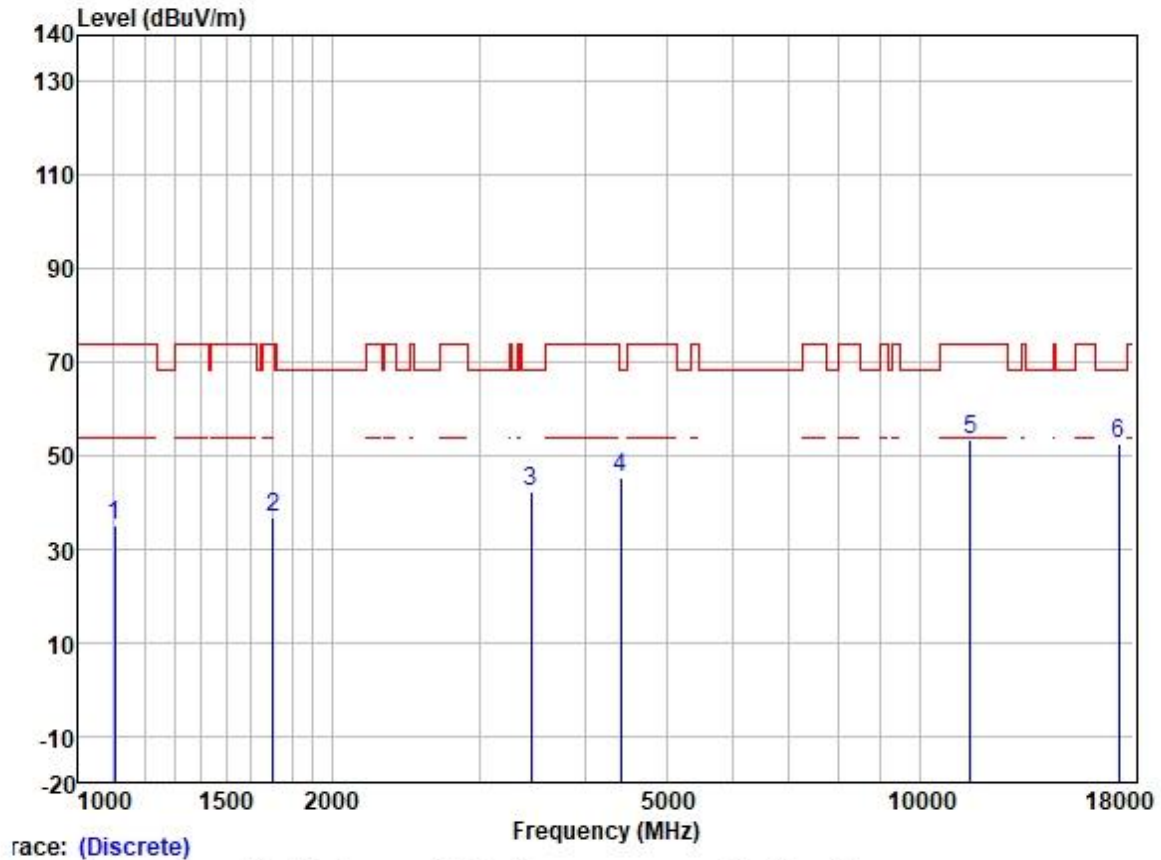

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1103.264	46.91	24.37	2.29	38.45	35.12	74.00	-38.88	HORIZONTAL	Peak
2	1702.042	46.00	25.72	2.80	37.89	36.63	74.00	-37.37	HORIZONTAL	Peak
3	3455.508	46.36	28.88	4.20	36.96	42.48	68.20	-25.72	HORIZONTAL	Peak
4	4417.841	46.46	30.70	4.74	36.81	45.09	68.20	-23.11	HORIZONTAL	Peak
5	11510.000	42.14	39.90	8.41	37.15	53.30	74.00	-20.70	HORIZONTAL	Peak
6	17265.000	34.54	43.21	10.24	35.33	52.66	68.20	-15.54	HORIZONTAL	Peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

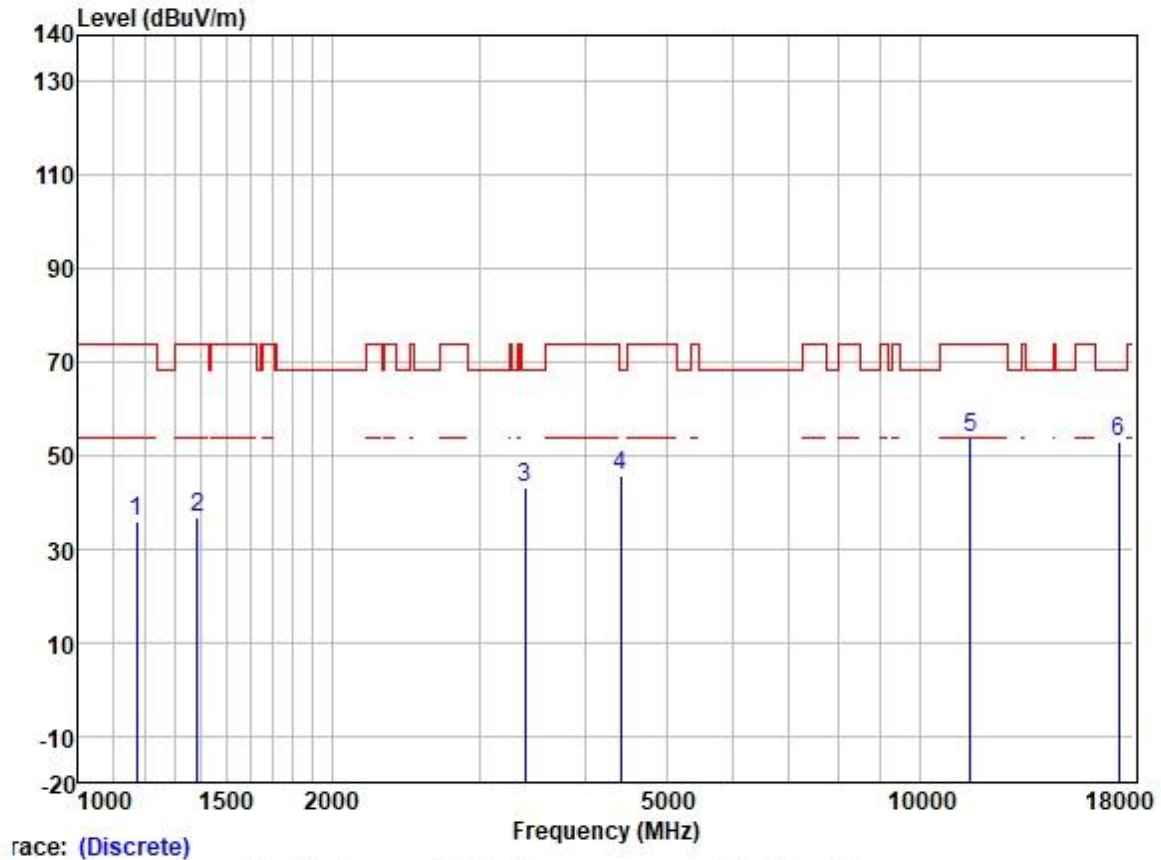

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1172.303	47.33	24.56	2.39	38.40	35.88	74.00	-38.12	VERTICAL	Peak
2	1386.264	47.17	25.37	2.60	38.25	36.89	74.00	-37.11	VERTICAL	Peak
3	3396.098	47.04	28.84	4.10	36.98	43.00	68.20	-25.20	VERTICAL	Peak
4	4417.841	47.19	30.70	4.74	36.81	45.82	68.20	-22.38	VERTICAL	Peak
5	11510.000	42.80	39.90	8.41	37.15	53.96	74.00	-20.04	VERTICAL	Peak
6	17265.000	34.81	43.21	10.24	35.33	52.93	68.20	-15.27	VERTICAL	Peak