

Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## RF Emissions Test Report

FCC Part 90

For

Kyocera Corporation  
c/o Kyocera Communication Inc.

Product:	CDMA Phone
Model:	C5120

Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## TABLE OF CONTENTS

1	SUMMARY OF TESTING .....	4
2	EQUIPMENT UNDER TEST INFORMATION.....	4
3	TEST FACILITIES.....	5
4	TEST SETUP .....	5
4.1	Test Configuration .....	5
5	Conducted RF OUTPUT POWER.....	6
5.1	Test Configuration .....	6
5.2	Test Results.....	6
6	RADIATED RF OUTPUT POWER.....	6
6.1	Test Configuration .....	6
7	OCCUPIED BANDWIDTH .....	7
7.1	Test Configuration .....	7
7.2	Test Result .....	7
8	EMISSION MASK .....	8
8.1	Test Configuration .....	8
8.2	Test Result .....	8
9	Spurious Emissions At Antenna Terminals .....	10
9.1	Test Configuration .....	10
9.2	Test Result .....	10
10	Transmitter Radiated Spurious Emissions .....	12
11	Transmitter RF Carrier Frequency Stability.....	12
11.1	Test Configuration .....	12
11.2	Test Result .....	13
12	Exposure of Humans to RF Fields (SAR) .....	14
12.1	Test Configuration and Result .....	14
13	TEST EQUIPMENT.....	14

Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

<b>Product:</b>	CDMA Phone with Bluetooth and WiFi
<b>Model #:</b>	C5120
<b>FCC ID:</b>	V65C5120
<b>Tested in accordance with:</b>	FCC Part 90
<b>Test performed by:</b>	CompTest Services LLC
<b>Test Requested by:</b>	Kyocera Corporation c/o Kyocera Communication Inc 8611 Balboa Ave., San Diego, CA 92123 United States
<b>Date of Test:</b>	June 30, 2010

**Responsible Engineer**

*Benjamin Nguyen*

---

Benjamin Nguyen  
Test Engineer

**Reviewed and approved by:**




---

Tammy To  
Quality Manager

## 1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
5	FCC § 2.1046	Conducted Power	Pass
6	FCC § 90.635 (b)	Radiated Power	Pass
7	FCC § 2.1049, 90.691	Occupied Bandwidth	Pass
8	FCC § 2.1051, 90.691	Emission Mask	Pass
9	FCC § 2.1051, 90.691	Spurious Emissions at Antenna Terminals	Pass
10	FCC § 2.1053, 90.691	Transmitter Radiated Spurious Emissions	Pass
11	FCC § 2.1055, 90.213	Transmitter RF Carrier Frequency Stability	Pass
12	FCC § 2.1093	Exposure of Humans to RF Fields	Pass

## 2 EQUIPMENT UNDER TEST INFORMATION


<b>EUT Serial Number:</b>	268435457816716264
<b>Type:</b>	[ ] Prototype, [X] Pre-Production, [ ] Production
<b>Equipment Category:</b>	Portable
<b>RF Exposure Environment:</b>	General Population / Uncontrolled
<b>Antenna:</b>	Internal Antenna
<b>Detachable Antenna:</b>	No
<b>External Input:</b>	Audio/Digital Data
<b>Quantity:</b>	Quantity production is planned
<b>Multiple Access Scheme:</b>	CDMA
<b>Emission Designators:</b>	1M25F9W
<b>FCC Rule Parts:</b>	§90.691
<b>Modes:</b>	800 CDMA BC-10
<b>TX Frequency (MHz):</b>	817.9 – 823.1
<b>Conducted Output Power (dBm):</b>	24.5

### 3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 8611 Balboa Ave., San Diego, CA 92123, USA

### 4 TEST SETUP

All CDMA measurements were conducted with a base station simulator to establish a CDMA link with the equipment under test (EUT). To investigate the response of the EUT the main antenna RF output port of the EUT was connected to the input of the spectrum analyzer with a RF cable. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as a power supply voltage, except for the Transmitter RF Carrier Frequency Stability test a dummy battery connected to a power supply was used.

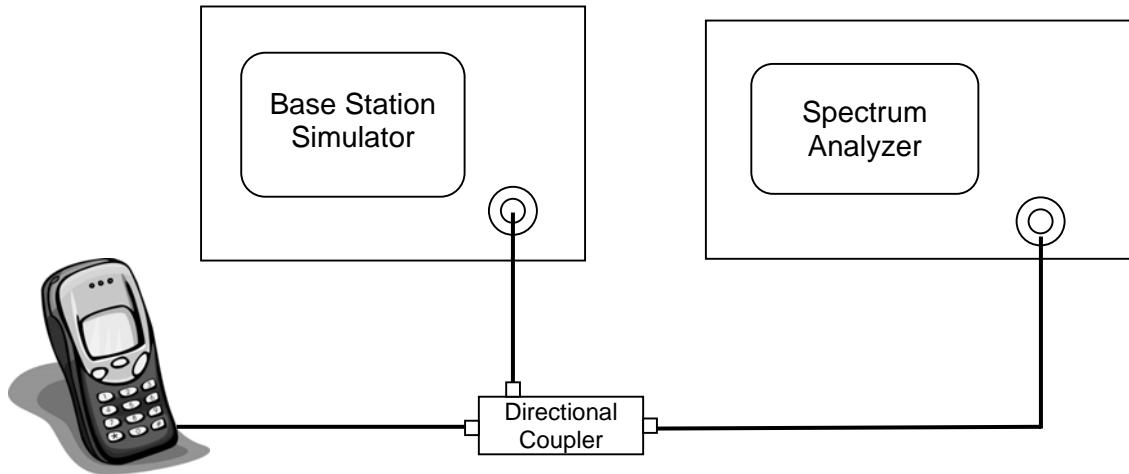

#### 4.1 Test Configuration

To justify on the selection of applicable configurations, the EUT was pre-tested under all Radio Configuration and Service Option operation modes to determine the worst-case scenario. The following configuration was determined and reported as worst-case for all measurements:

Radio Configuration:	RC1
Service Options:	SO55
Data Rate:	Full Rate
Reference:	RF Exposure Report

Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## 5 CONDUCTED RF OUTPUT POWER

### 5.1 Test Configuration

**FCC: § 2.1046, § 90.635**

**IC: --**

The EUT was connected to a Power Meter through a RF cable. The cable loss was taken into account for accurate power measurement. The EUT was set at low, mid, high channels and each frequency band to investigate the conducted power.

### 5.2 Test Results

Mode	Channel	Frequency (MHz)	Conducted Power (dBm)
CDMA 800 BC-10	476	817.9	24.57
	580	820.5	24.59
	684	823.1	24.60

## 6 RADIATED RF OUTPUT POWER

### 6.1 Test Configuration

**FCC: § 90.635**

**IC: --**

The test was performed in UL Compliance Certification Service using substitution method. See separated radiated emission report for details. The test report is attached in a separate attachment.

ERP Limit: <100 Watts



Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## 7 OCCUPIED BANDWIDTH

### 7.1 Test Configuration

FCC: § 2.1049, § 90.691

IC: --

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW	Span	Measurement ch
Bandwidth Measurement	30KHz	300kHz	3 MHz	Highest Conducted Power

**Limits:** N/A

### 7.2 Test Result

Figure	Description	Mode	Result
7-1	Occupied Bandwidth @ Ch476	CDMA 800 BC-10	Pass

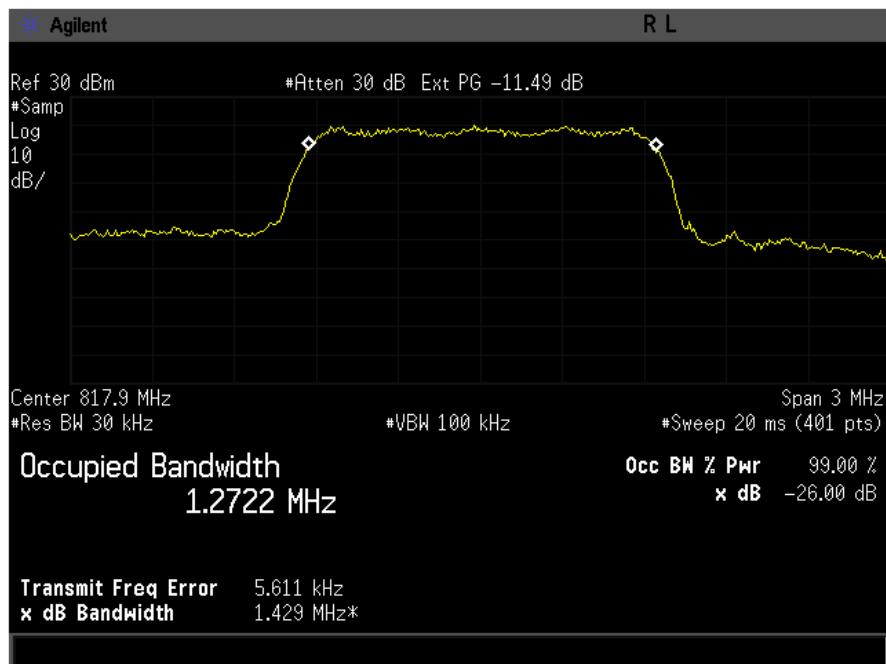


Figure 7-1 CDMA 800 BC-10 @ CH 476

## 8 EMISSION MASK

### 8.1 Test Configuration

**FCC: § 2.1051, § 90.691**

**IC:** --

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW	Span	Measurement ch
Emission Mask	30KHz	30KHz	3 MHz	476 and 684

**Limits:**

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log10}(f/6.1) \text{ dB}$  or  $50 + 10 \text{ Log10}(P) \text{ dB}$ , whichever is the lesser attenuation, where  $f$  is the frequency removed from the center of the outer channel in the block in kHz and where  $f$  is greater than 12.5 kHz.

Limit Level: -20dBm

### 8.2 Test Result


Figure	Description	Mode	Result
8-1	Lower Band Edge @ Ch 476	CDMA 800 BC-10	Pass
8-2	Upper Band Edge @ Ch 684		Pass



Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0



**Figure 7-2 CDMA 800 BC-10 Lower Band Edge @ CH 476**

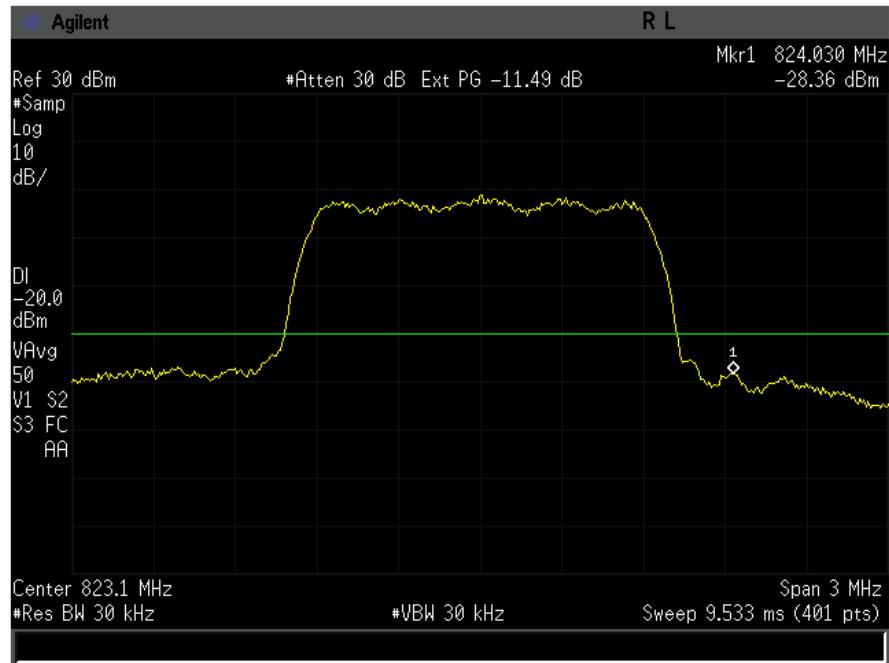

**Figure 7-3 CDMA 800 Upper Band Edge @ CH 684**

## 9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### 9.1 Test Configuration

**FCC: § 2.1051, § 90.691**

**IC:** --

#### Measurement Procedures:

Out of Band: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the 10<sup>th</sup> harmonic of the fundamental.

S.A. Setting	RBW	VBW	Measurement ch
Spurious Emissions Measurement	1MHz	1MHz	Highest Conducted Power

#### Limits:

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\log_{10}(P)$  dB or 80 dB, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kHz and where f is greater than 37.5 kHz.


Out of Band Limit: -13dBm

### 9.2 Test Result


Figure	Channel	Plot Description	Result
9-1	476	CDMA 800 BC-10 Conducted spurious emissions 30MHz to 10GHz	Pass



Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

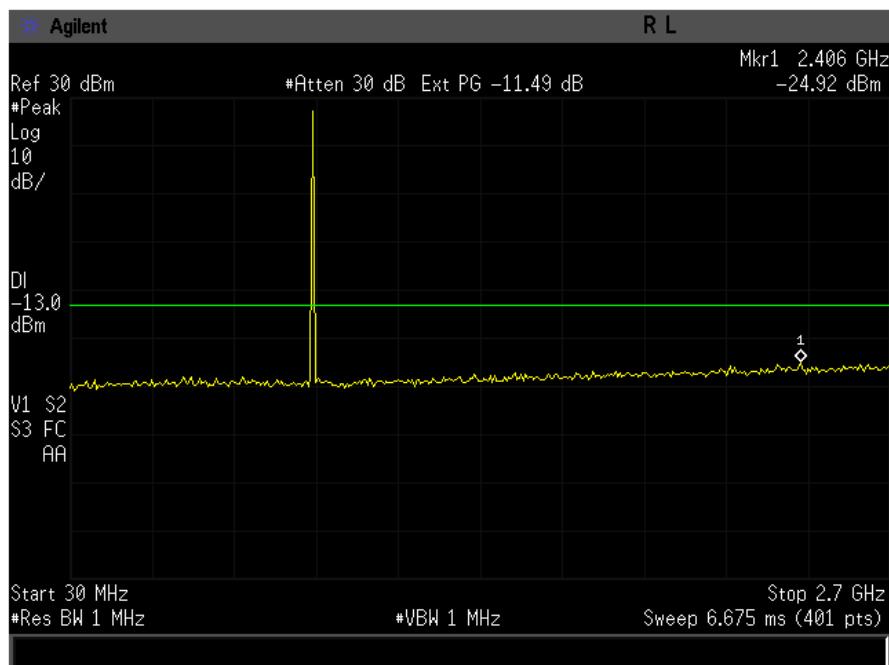

**Figure 9-1a CDMA 800 BC-10 – Conducted Spurious Emission (CH 476)**

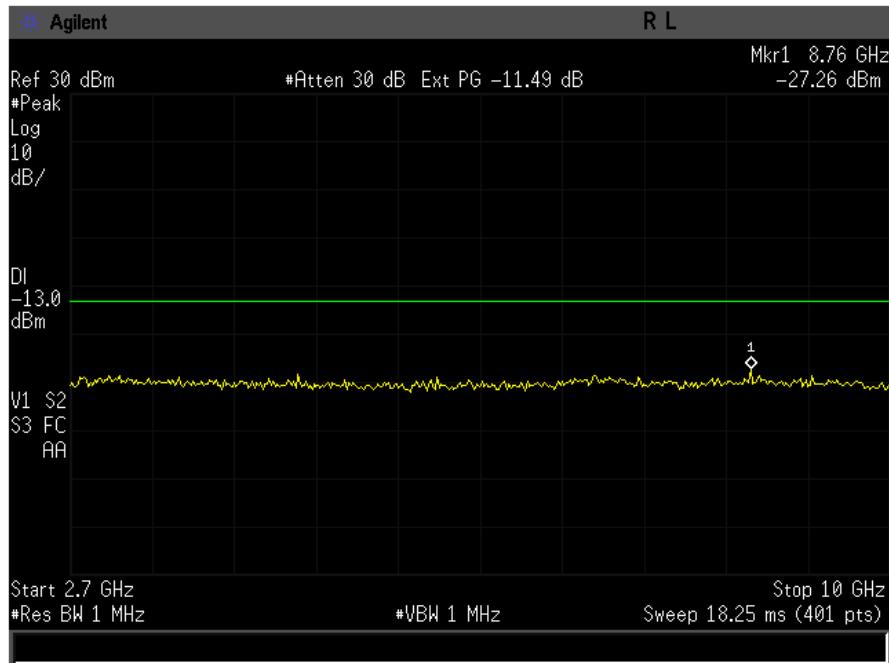

**Figure 9-1b CDMA 800 BC-10 – Conducted Spurious Emission (CH 476)**

## 10 TRANSMITTER RADIATED SPURIOUS EMISSIONS

<b>FCC:</b> § 2.1053, § 90.691
<b>IC:</b> --

The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

## 11 TRANSMITTER RF CARRIER FREQUENCY STABILITY

### 11.1 Test Configuration

<b>FCC:</b> § 2.1055, § 90.213
<b>IC:</b> --

The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply. Only the mid channel of each frequency band was investigated.

#### Limits:

Tx Frequency	Channel	Limit
820.5 MHz	476	+/- 2.5 ppm (+/- 2051 Hz)




Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## 11.2 Test Result

CDMA 800 - BC10						
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit	
-30	3.3V (Battery endpoint)	-11.98	4.2V (115%)	-2051	2051	Pass
-20		1.97		-2051	2051	
-10		-12.15		-2051	2051	
0		1.23		-2051	2051	
10		3.65		-2051	2051	
20		<b>-10.98</b>	<b>15.38</b>	<b>-14.27</b>	-2051	
30		13.88	-2051	2051		
40		-12.98	-2051	2051		
50		-1.05	-2051	2051		
60		2.41	-2051	2051		

### CDMA 800 MHz BC-10 Transmitter RF Carrier Stability Over Temperature and Voltage

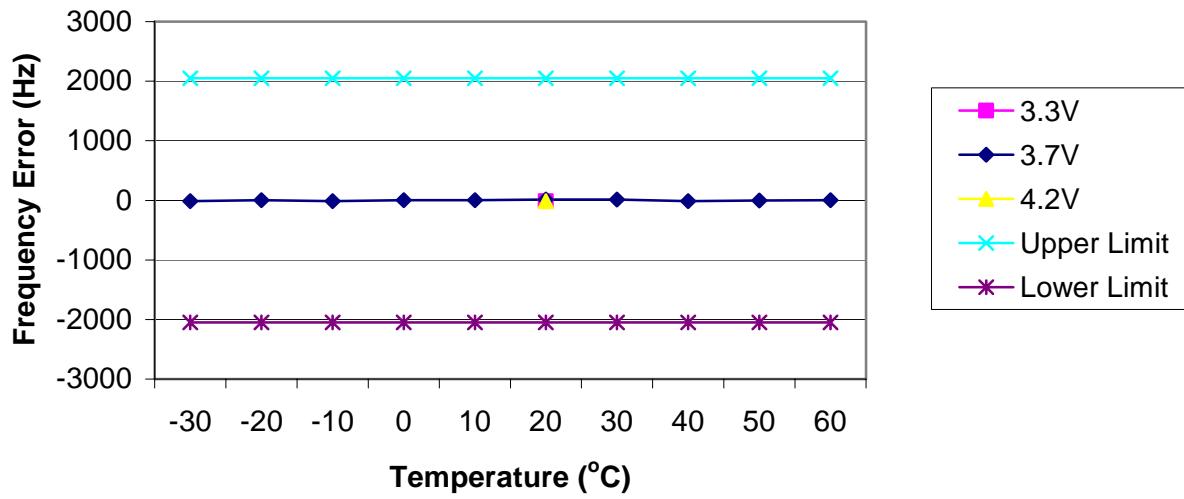

Applicant:	Kyocera
FCC ID:	V65C5120
Report #:	CT-C5120-90-0611-R0

## 12 EXPOSURE OF HUMANS TO RF FIELDS (SAR)

### 12.1 Test Configuration and Result

FCC: § 2.1093

IC: --

The SAR test report is attached in a separate attachment.

## 13 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Power Meter	Giga-tronics	8541C	1831306	09/08/11
Spectrum Analyzer	Agilent	E4405B	US41441217	05/26/12
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	06/09/12
Wireless Communications Test Set	Agilent	8960	GB44052789	08/17/11
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	06/24/12