



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

RF Emissions Test Report

FCC Part 22, 24, 27

For

Kyocera Corporation
c/o Kyocera Communication Inc.

Product:	CDMA Phone
Model:	C5171

Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

TABLE OF CONTENTS

1	SUMMARY OF TESTING	4
2	EQUIPMENT UNDER TEST INFORMATION.....	4
3	TEST FACILITIES.....	5
4	TEST SETUP	5
4.1	Test Configuration	6
5	tty compliance	7
6	Conducted RF OUTPUT POWER	7
6.1	Test Configuration	7
6.2	Test Results.....	7
7	RADIATED RF OUTPUT POWER	8
7.1	Test Configuration	8
8	PEAK-AVERAGE RATIO	9
8.1	Test Configuration	9
8.2	Test Result	9
9	OCCUPIED BANDWIDTH.....	11
9.1	Test Configuration	11
9.2	Test Result	11
10	Spurious Emissions At Antenna Terminals.....	18
10.1	Test Configuration	18
10.2	Test Result	18
11	Transmitter Radiated Spurious Emissions.....	28
12	Receiver Spurious Emissions.....	28
12.1	Receiver Spurious Emissions	28
13	Transmitter RF Carrier Frequency Stability	29
13.1	Test Configuration	29
13.2	Test Result	30
14	Exposure of Humans to RF Fields (SAR)	33
14.1	Test Configuration and Result.....	33
15	TEST EQUIPMENT.....	33



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Product:	CDMA Cellular Phone with Bluetooth and WLAN
Model #:	C5171
FCC ID:	V65C5171
Tested in accordance with:	FCC Part 22, 24, 27
Test performed by:	CompTest Services LLC
Test Requested by:	Kyocera Corporation c/o Kyocera Communication Inc 8611 Balboa Avenue San Diego, CA 92121 United States
Date of Test:	July 26 – August 2, 2012

Responsible Engineer

Benjamin Nguyen

Benjamin Nguyen
Test Engineer

Reviewed and approved by:

Tammy To
Quality Manager



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
6	FCC § 2.1046	Conducted Power	Pass
7	FCC § 22.913, 24.232	Radiated Power	Pass
8	FCC § 24.232(d)	Peak-to-Average Ratio	Pass
9	FCC § 2.1049, 22.917 (b)(d), 24.238	Occupied Bandwidth	Pass
10	FCC § 2.1051, 22.917(e)(f), 24.238	Spurious Emissions at Antenna Terminals	Pass
11	FCC § 2.1053, 22.91, 24.238	Transmitter Radiated Spurious Emissions	Pass
12	FCC § 15.109	Receiver Spurious Emissions	Pass
13	FCC § 2.1055, 22.355, 24.235	Transmitter RF Carrier Frequency Stability	Pass
14	FCC § 2.1093	Exposure of Humans to RF Fields	Pass

2 EQUIPMENT UNDER TEST INFORMATION

EUT Serial Number:	268435457816727685
Type:	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production
Equipment Category:	Portable
RF Exposure Environment:	General Population / Uncontrolled
Antenna:	Internal Antenna
Detachable Antenna:	No
External Input:	Audio/Digital Data
Quantity:	Quantity production is planned
Multiple Access Scheme:	CDMA
Emission Designators:	1M25F9W
FCC Rule Parts:	§24E
Modes:	1900 CDMA
TX Frequency (MHz):	1850 - 1910




3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 8611 Balboa Avenue, San Diego, CA 92123, USA

4 TEST SETUP

All CDMA measurements were conducted with a base station simulator to establish a CDMA link with the equipment under test (EUT). To investigate the response of the EUT the main antenna RF output port of the EUT was connected to the input of the spectrum analyzer with a RF cable. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as a power supply voltage, except for the Transmitter RF Carrier Frequency Stability test a dummy battery connected to a power supply was used.

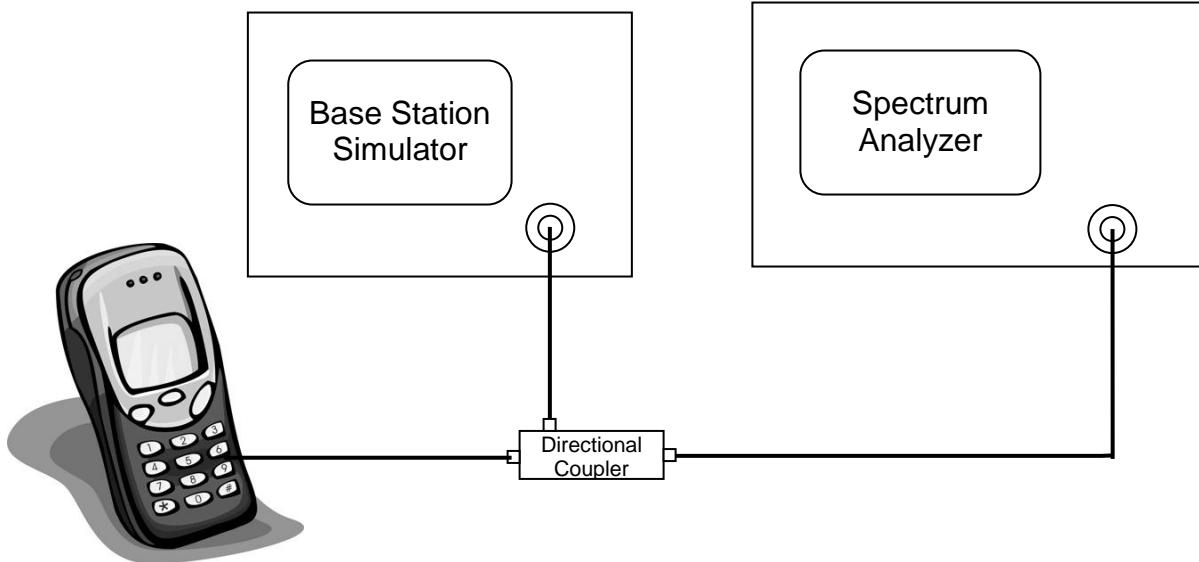

4.1 Test Configuration

To justify on the selection of applicable configurations, the EUT was pre-tested under all Radio Configuration and Service Option operation modes to determine the worst-case scenario.

The following configuration was determined and reported as worst-case for all measurements:

Radio Configuration:	RC1
Service Options:	SO55
Data Rate:	Full Rate

CONFIGURATION Peak Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 384	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	29.97	29.90	29.94	29.84	29.69	29.80	29.21	29.86	29.10
SO2, RC3 Full Rate	29.73	29.49	29.50	29.33	29.09	29.06	28.97	29.30	28.71
SO55, RC1 Full Rate	30.04	29.89	29.81	29.97	29.74	30.02	29.58	30.03	29.41
SO55, RC3 Full Rate	29.51	29.32	29.32	29.49	29.30	29.31	28.94	29.14	28.68
TDSO SO32, RC3 (+F-SCH) Full Rate	29.62	29.46	29.44	29.36	29.26	29.13	28.97	29.29	28.71
TDSO SO32, RC3 (+SCH) Full Rate	29.68	29.47	29.51	29.29	29.22	29.15	29.00	29.40	28.55

CONFIGURATION Average Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 384	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	25.38	25.21	25.08	24.66	24.72	24.61	24.72	24.69	24.30
SO2, RC3 Full Rate	25.40	25.19	25.03	24.65	24.74	24.58	24.72	24.68	24.34
SO55, RC1 Full Rate	25.37	25.22	25.06	24.67	24.71	24.62	24.73	24.75	24.50
SO55, RC3 Full Rate	25.38	25.24	25.06	24.78	24.79	24.63	24.74	24.75	24.52
TDSO SO32, RC3 (+F-SCH) Full Rate	25.40	25.20	25.04	24.64	24.74	24.58	24.74	24.70	24.40
TDSO SO32, RC3 (+SCH) Full Rate	25.41	25.22	25.05	24.63	24.74	24.60	24.74	24.71	24.33

Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

5 TTY COMPLIANCE

FCC: § 255 of the Telecom Act

The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

6 CONDUCTED RF OUTPUT POWER

6.1 Test Configuration

FCC: § 2.1046

IC: RSS132 §4.4; RSS133 §6.4

The EUT was connected to a Universal Power Meter through a RF cable. The cable loss was taken into account for accurate power measurement. The EUT was set at low, mid, high channels and each frequency band to investigate the conducted power.

6.2 Test Results

Mode	Frequency (MHz)	Channel	Conducted Power (dBm)
CDMA 800	824.70	1013	25.38
	836.52	384	25.24
	848.31	777	25.06
CDMA 1700	1711.25	25	24.78
	1732.5	450	24.79
	1753.75	875	24.63
CDMA 1900	1851.25	25	24.74
	1880	600	24.75
	1908.75	1175	24.52

7 RADIATED RF OUTPUT POWER

7.1 Test Configuration

FCC: § 22.913, § 24.232

IC: RSS132 §4.4; RSS133 §6.4

The test was performed in Compliance Certification Service using substitution method. See separated radiated emission report for details.



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

8 PEAK-AVERAGE RATIO

8.1 Test Configuration

FCC: § 24.232(d)

IC: RSS133 (6.4)

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum analyzer Complementary Cumulative Distribution Function (CCDF) function is utilized to determine the largest deviation between average and peak power of the EUT.

For Digital: Modulate with full rate and all up power control bit.

S.A. Setting	RBW	VBW
Power Stat CCDF	5MHz	auto

Limits: <13 dB

8.2 Test Result

Figure	Description	Mode	Result
8-1	CCDF @ Ch450	CDMA 1700	Pass
8-2	CCDF @ Ch600	CDMA 1900	Pass



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

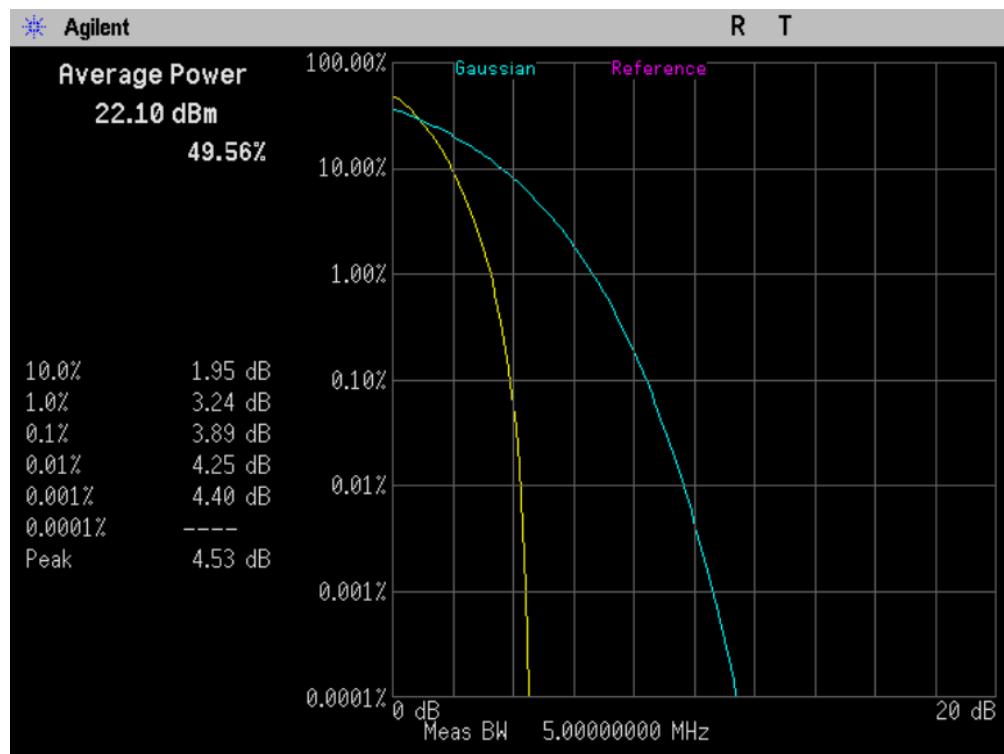


Figure 8-1 CCDF @ CH 450



Figure 8-2 CCDF @ CH 600



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

9 OCCUPIED BANDWIDTH

9.1 Test Configuration

FCC: § 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)

IC: RSS132 §4.5; RSS133 §6.5

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW
Bandwidth Measurement	30KHz	300kHz
Band Edge Measurement	30KHz	100KHz

Limits: Bandwidth: N/A

Bandedge: -13dBm

9.2 Test Result

Figure	Description	Mode	Result
9-1	CDMA @ CH384	CDMA 800	Pass
9-2	Lower Band Edge @ CH 1013		Pass
9-3	Upper Band Edge @ CH 777		Pass
9-4	AWS @ CH450	CDMA 1700	Pass
9-5	Lower Band Edge @ CH 25		Pass
9-6	Upper Band Edge @ CH 875		Pass
9-7	CDMA @ CH600	CDMA 1900	Pass
9-8	Lower Band Edge @ CH 25		Pass
9-9	Upper Band Edge @ CH 1175		Pass



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

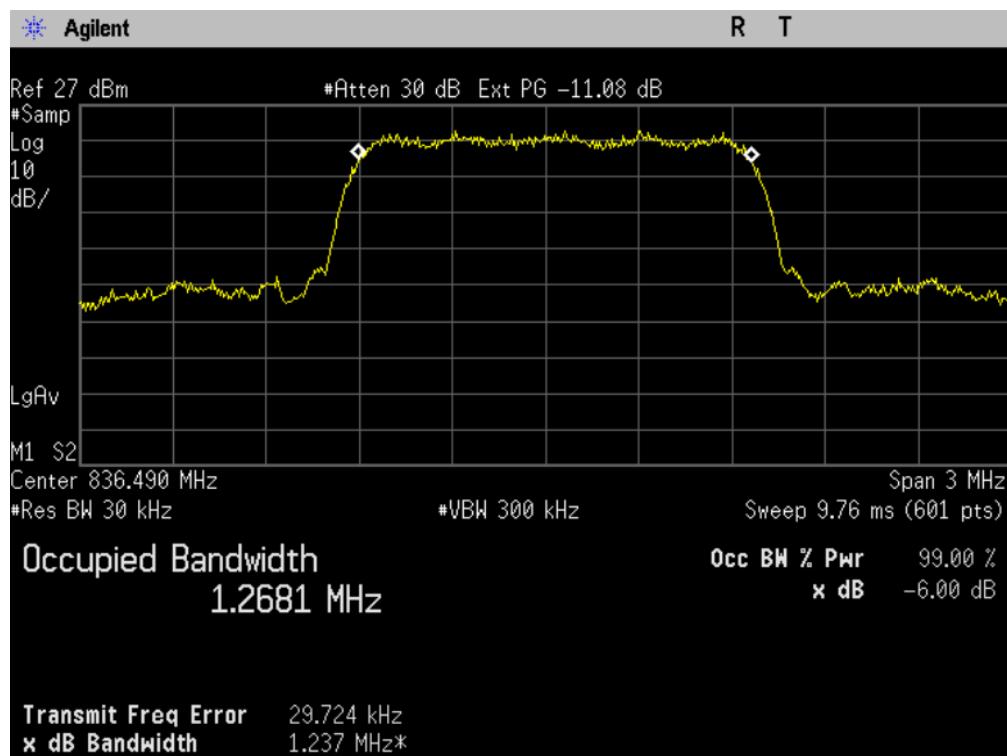


Figure 9-1 CDMA 800 @ CH 384



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

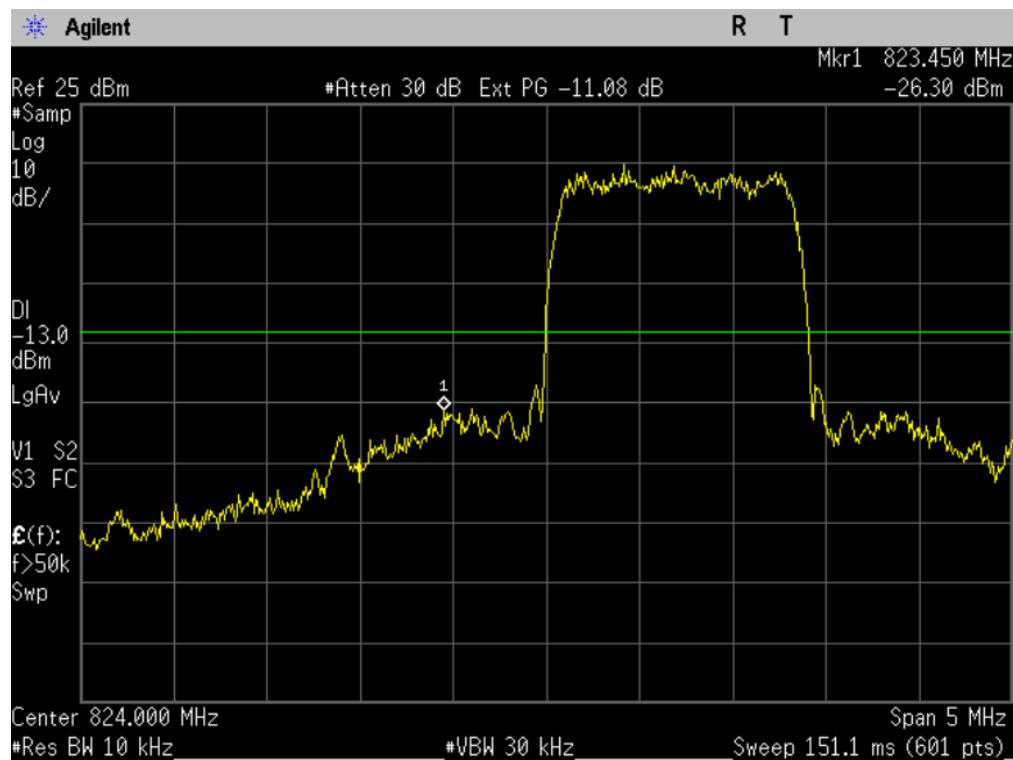


Figure 9-2 CDMA 800 Lower Band Edge @ CH 1013

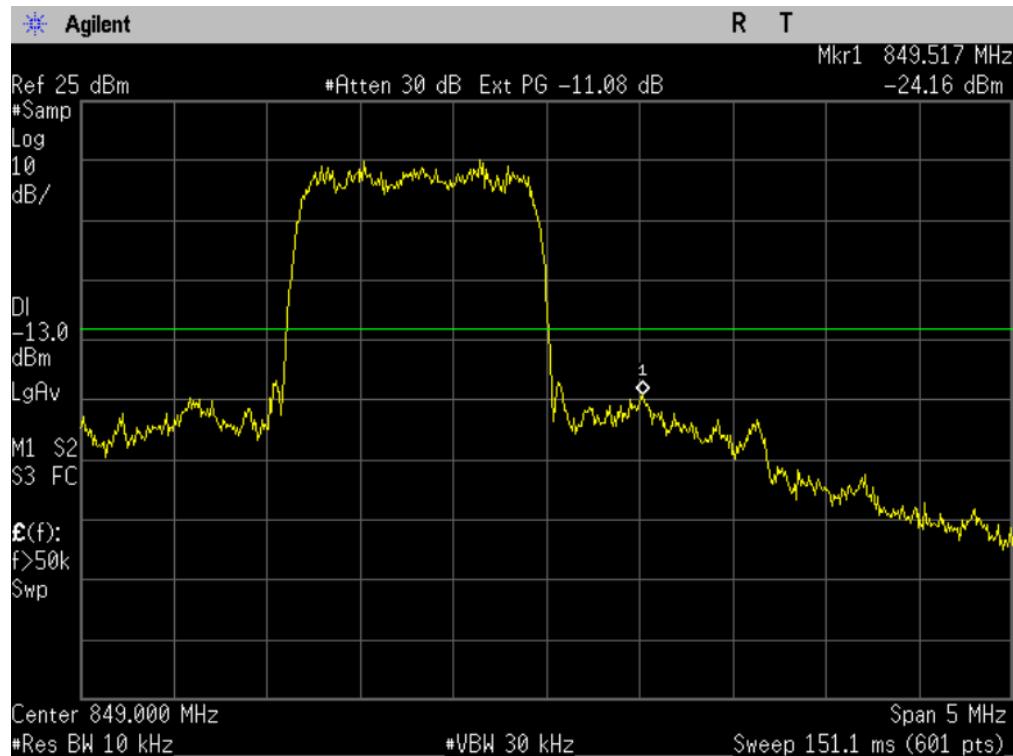


Figure 9-3 CDMA 800 Lower Band Edge @ CH 777



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

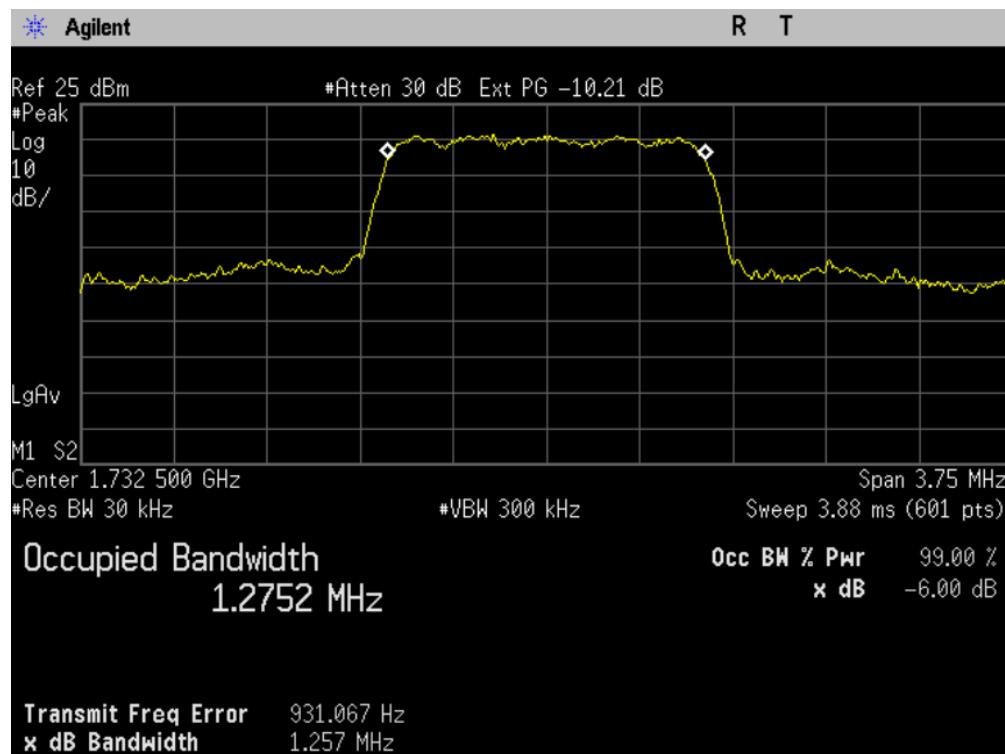


Figure 9-4 AWS 1700 @ CH 450



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0



Figure 9-5 AWS 1700 Lower Band Edge @ CH 25

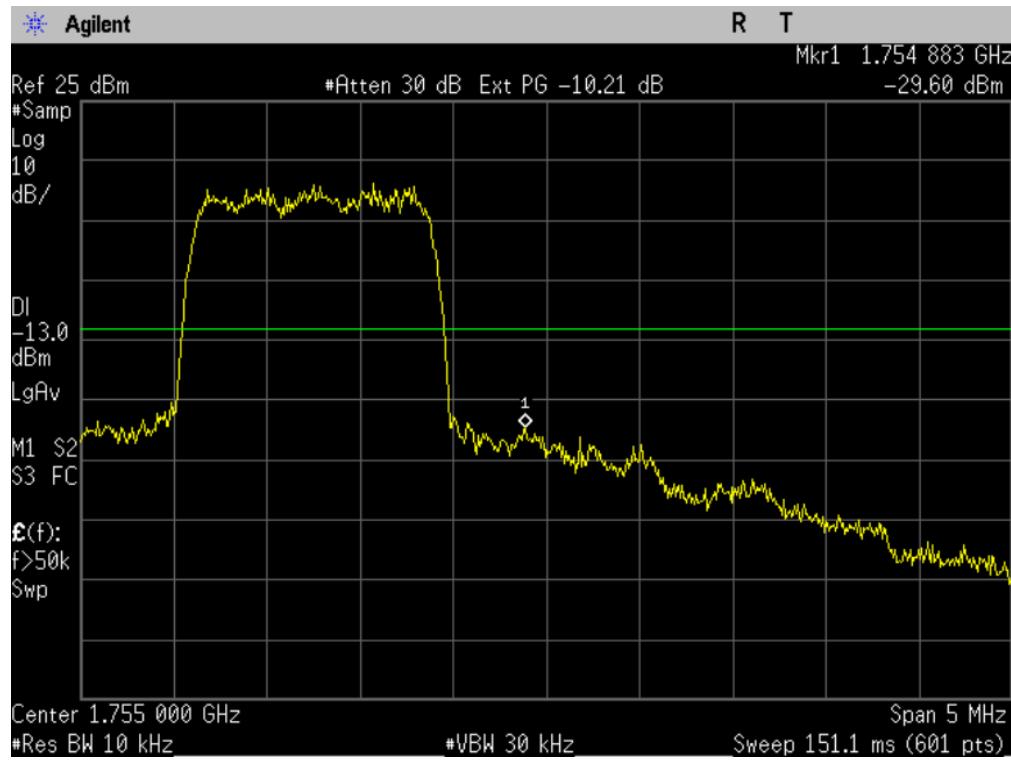


Figure 9-6 AWS 1700 Upper Band Edge @ CH 875



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0


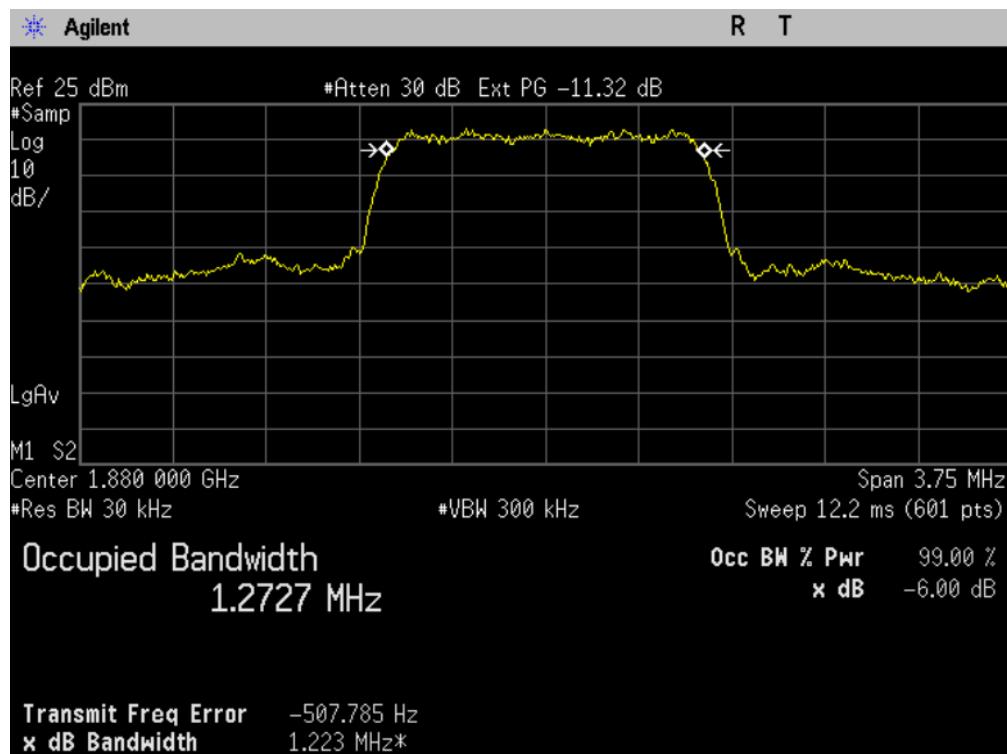


Figure 9-7 CDMA 1900 @ CH 600



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

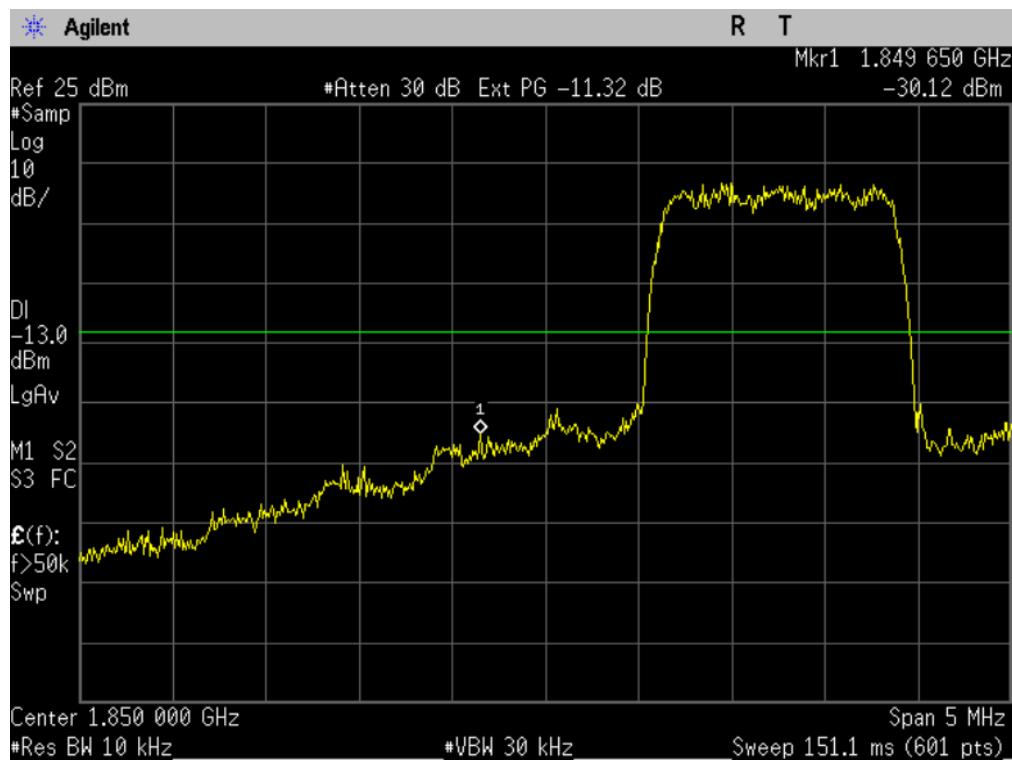

-Figure 9-8 CDMA 1900 Lower Band Edge @ CH 25

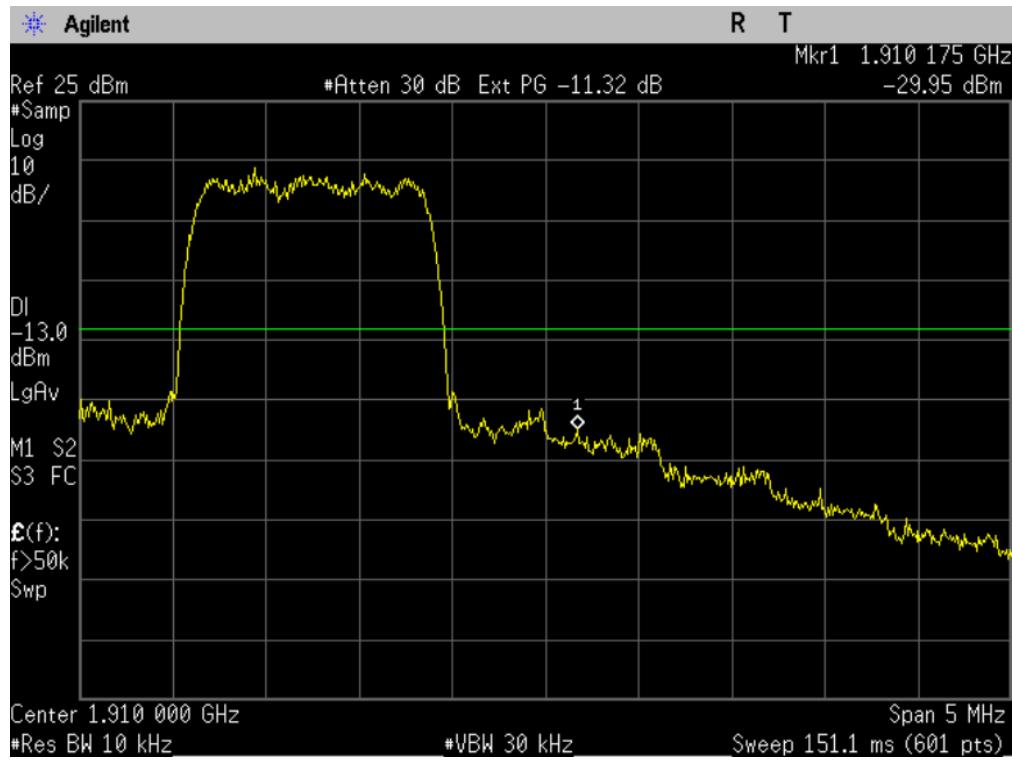


Figure 9-9 CDMA 1900 Upper Band Edge @ CH 1175



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

10 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

10.1 Test Configuration

FCC: § 2.1051, § 22.917(e)(f), § 24.238

IC: RSS132 §4.5; RSS133 §6.5

Measurement Procedures:

Out of Band: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.

S.A. Setting	RBW	VBW
Spurious Emissions Measurement	1MHz	1MHz

Limits: -13dBm

10.2 Test Result

Figure	Channel	Plot Description	Result
10-1	1013	CDMA 800 Conducted spurious emissions 30MHz to 20GHz	Pass
10-2	384		Pass
10-3	777		Pass
10-4	25	CDMA 1700 Conducted spurious emissions 30MHz to 20GHz	Pass
10-5	450		Pass
10-6	875		Pass
10-7	25	CDMA 1900 Conducted spurious emissions 30MHz to 20GHz	Pass
10-8	600		Pass
10-9	1175		Pass



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

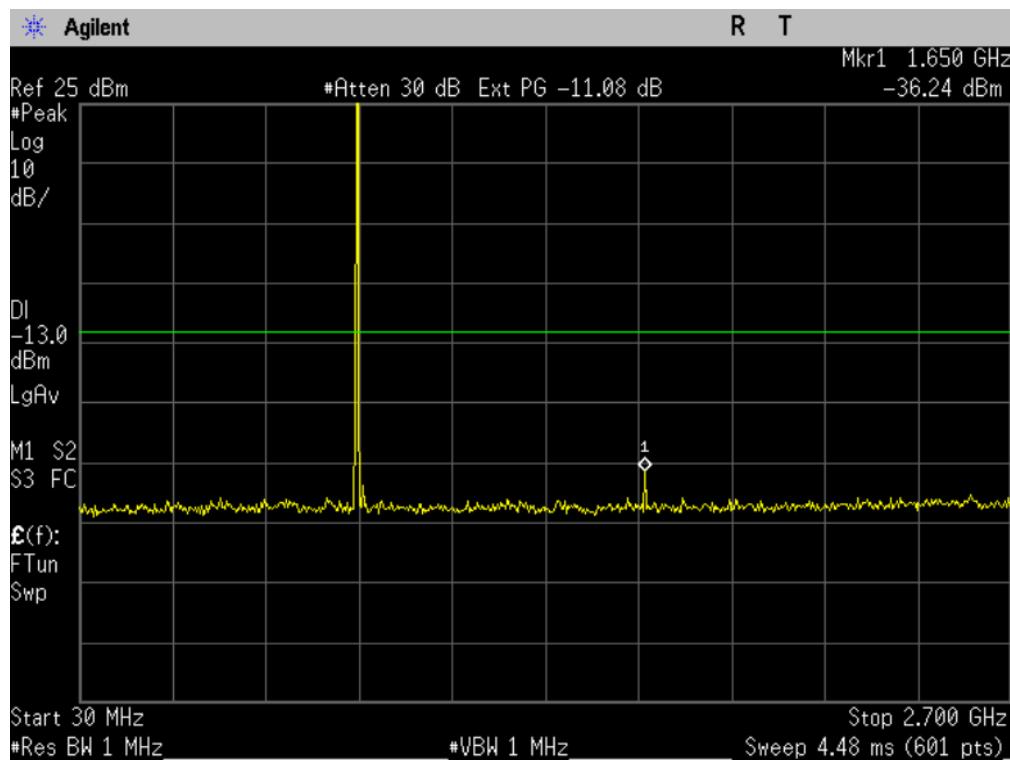


Figure 10-1a CDMA 800 – Conducted Spurious Emission (CH 1013)

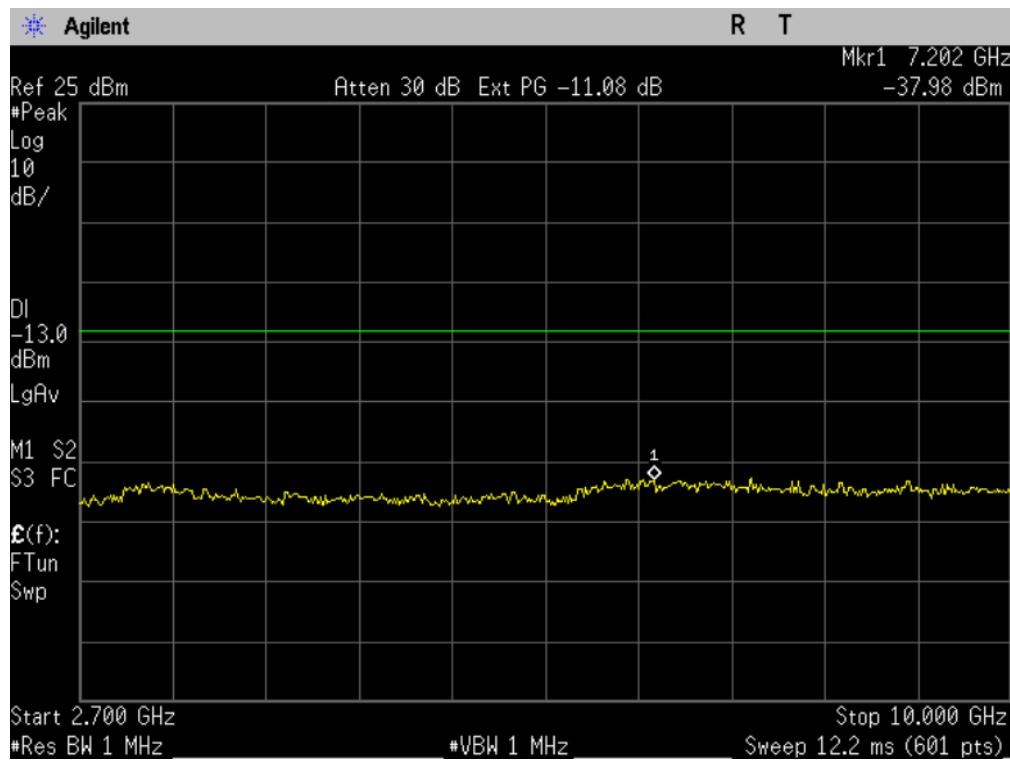


Figure 10-1b CDMA 800 – Conducted Spurious Emission (CH 1013)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

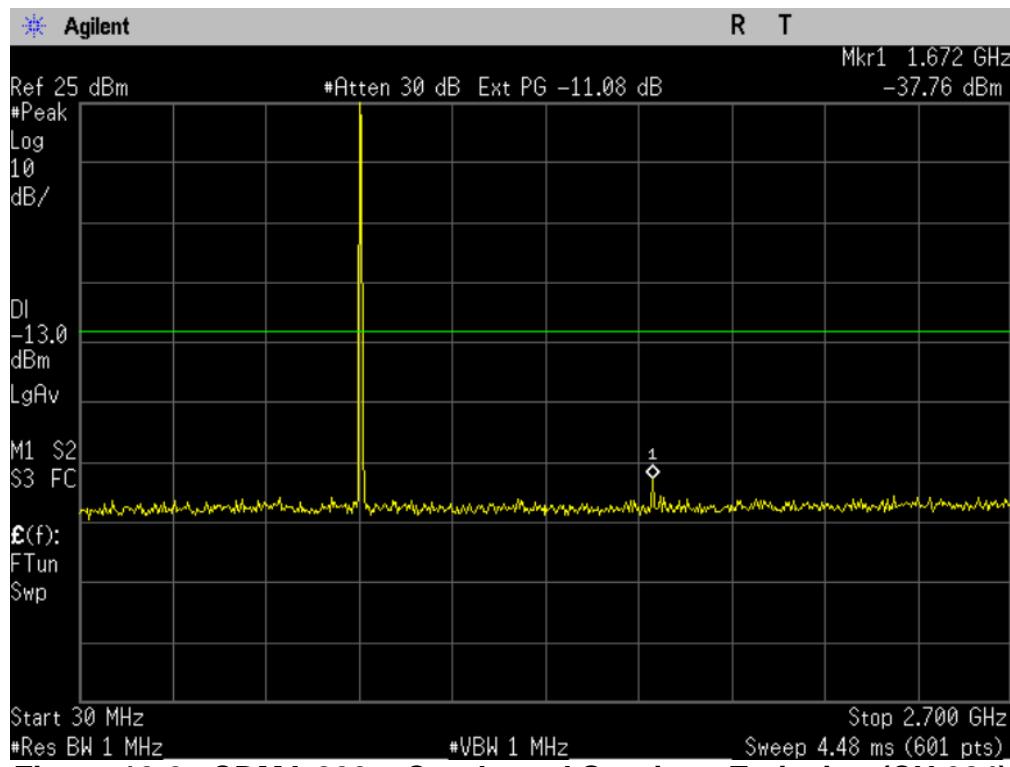


Figure 10-2a CDMA 800 – Conducted Spurious Emission (CH 384)

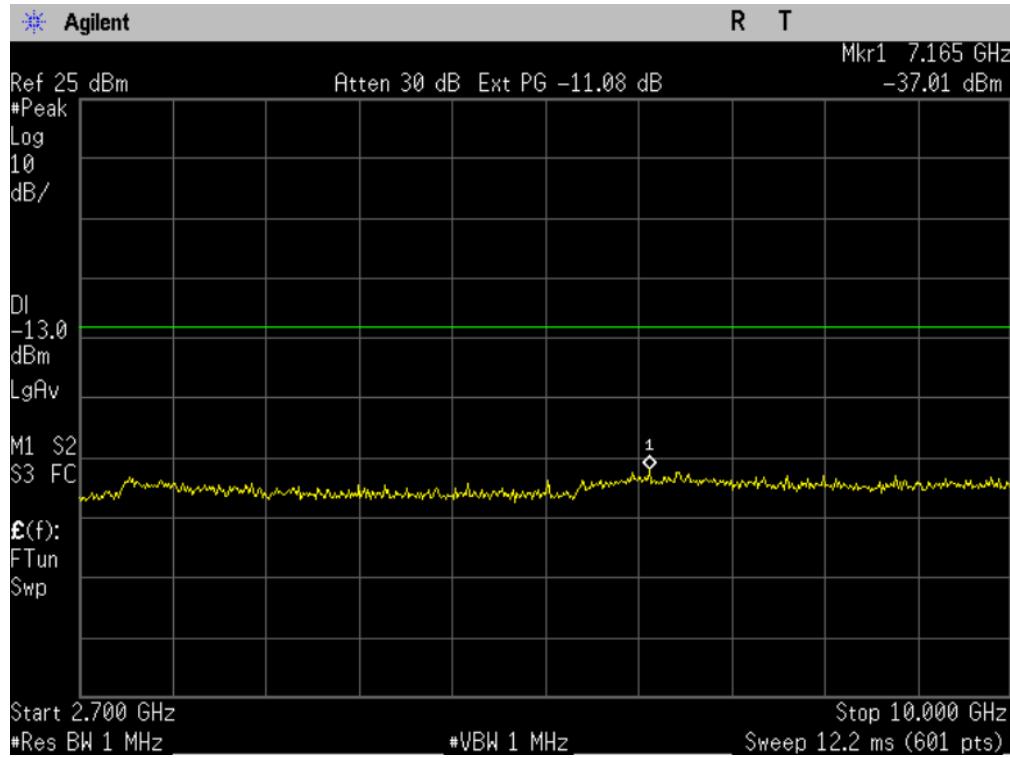


Figure 10-2b CDMA 800 – Conducted Spurious Emission (CH 384)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

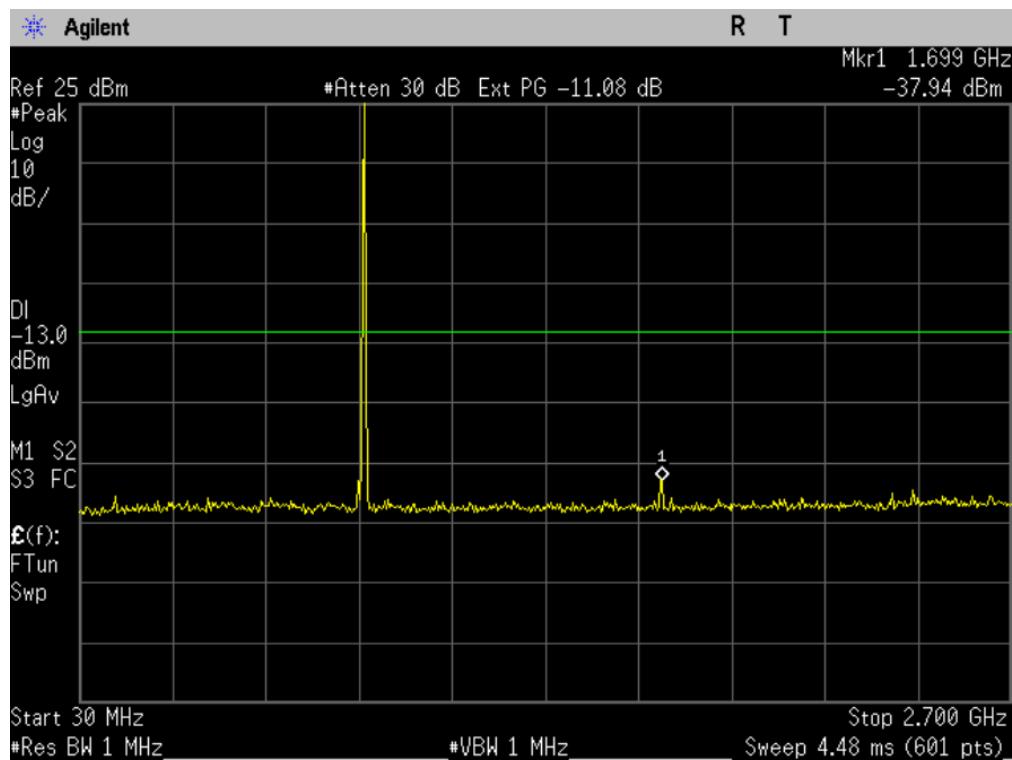


Figure 10-3a CDMA 800 – Conducted Spurious Emission (CH 777)

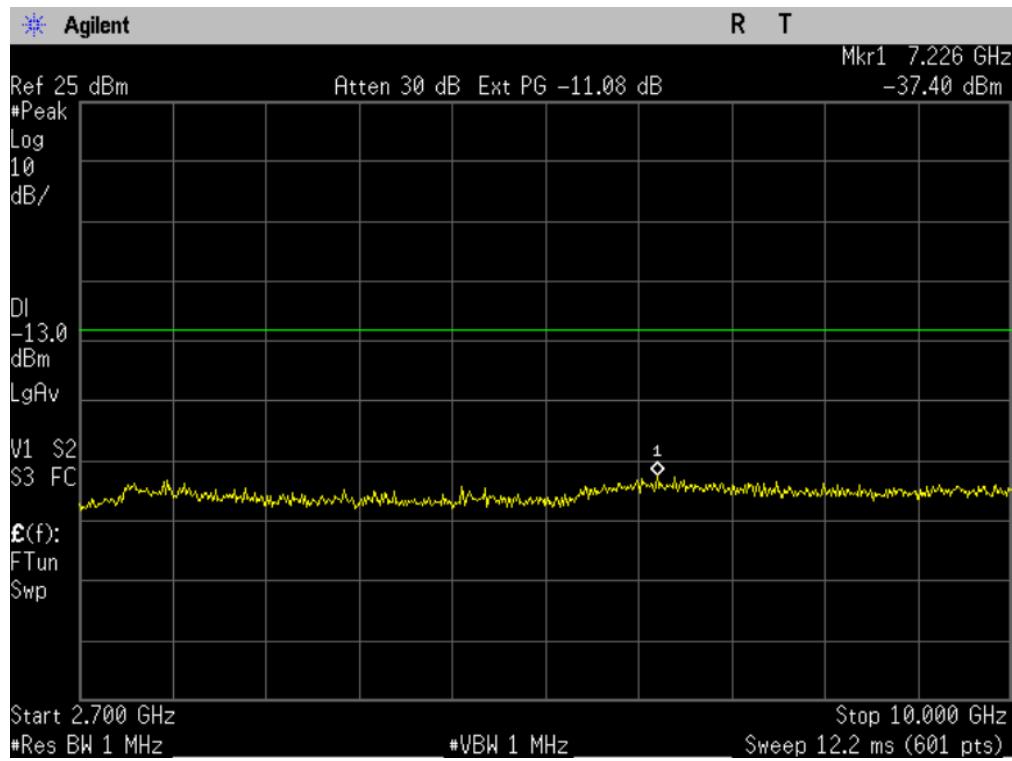


Figure 10-3b CDMA 800 – Conducted Spurious Emission (CH 777)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

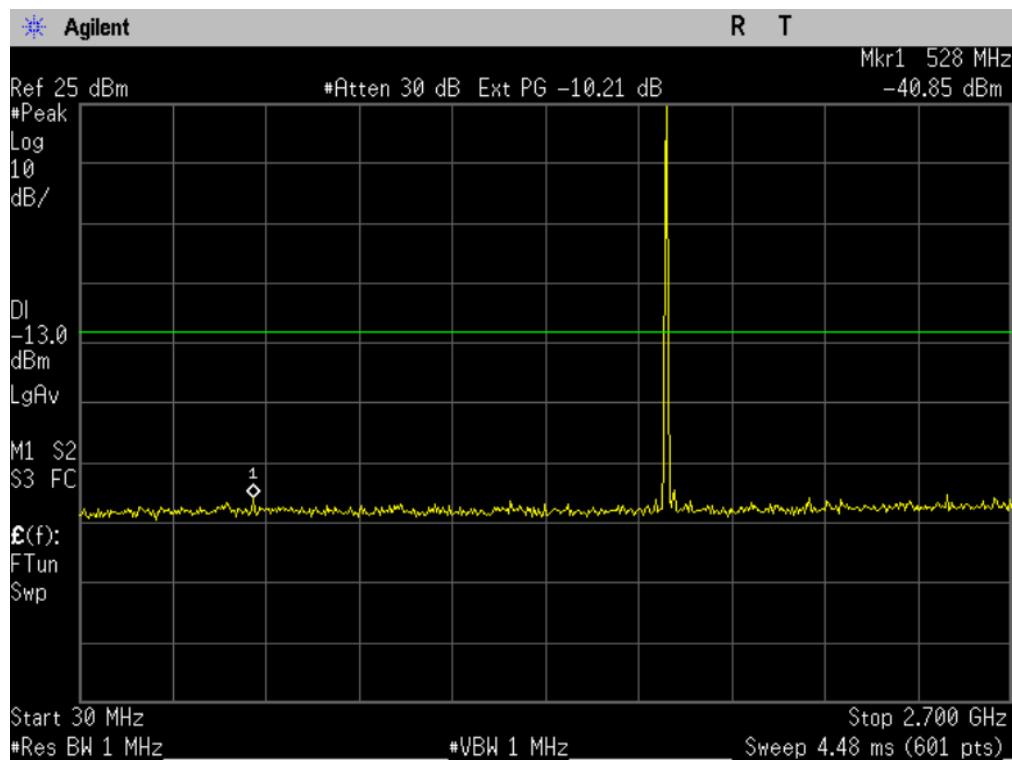


Figure 10-4a AWS 1700 - Conducted Spurious Emission (CH 25)

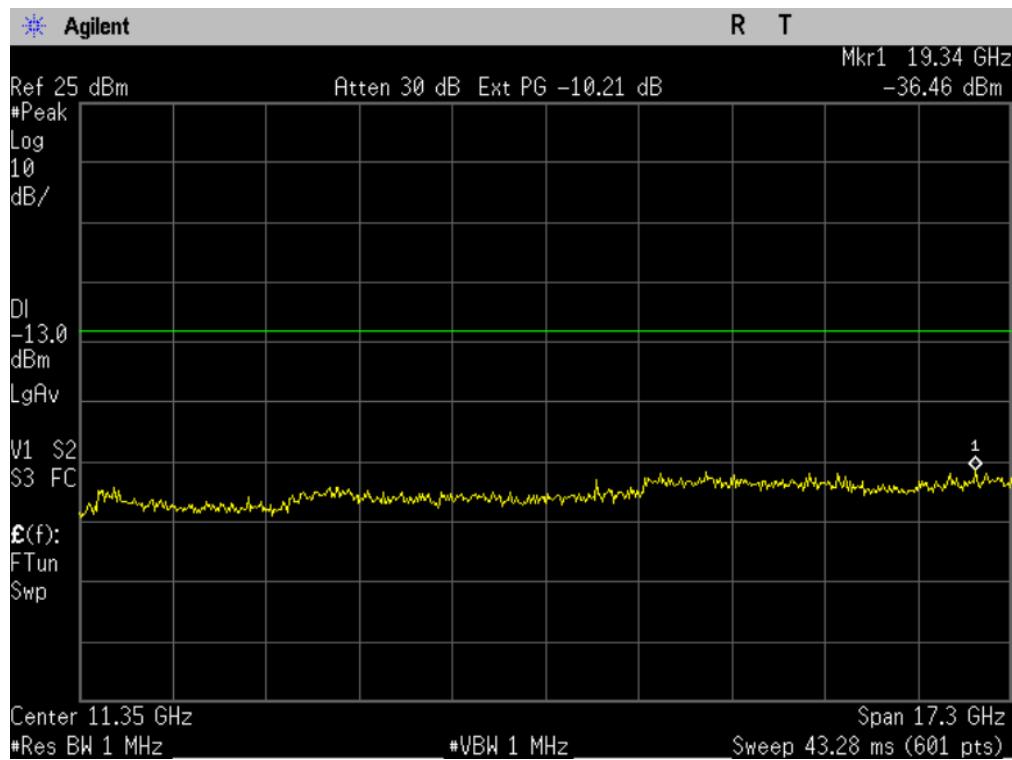


Figure 10-4b AWS 1700 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

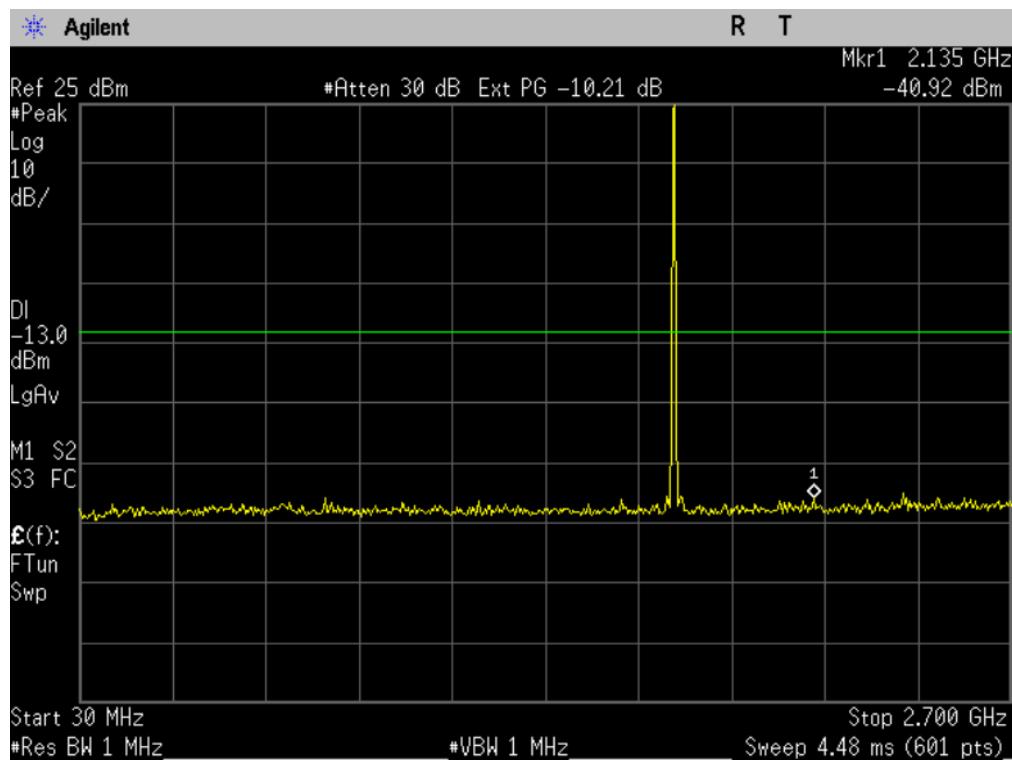


Figure 10-5a AWS 1700 - Conducted Spurious Emission (CH 450)

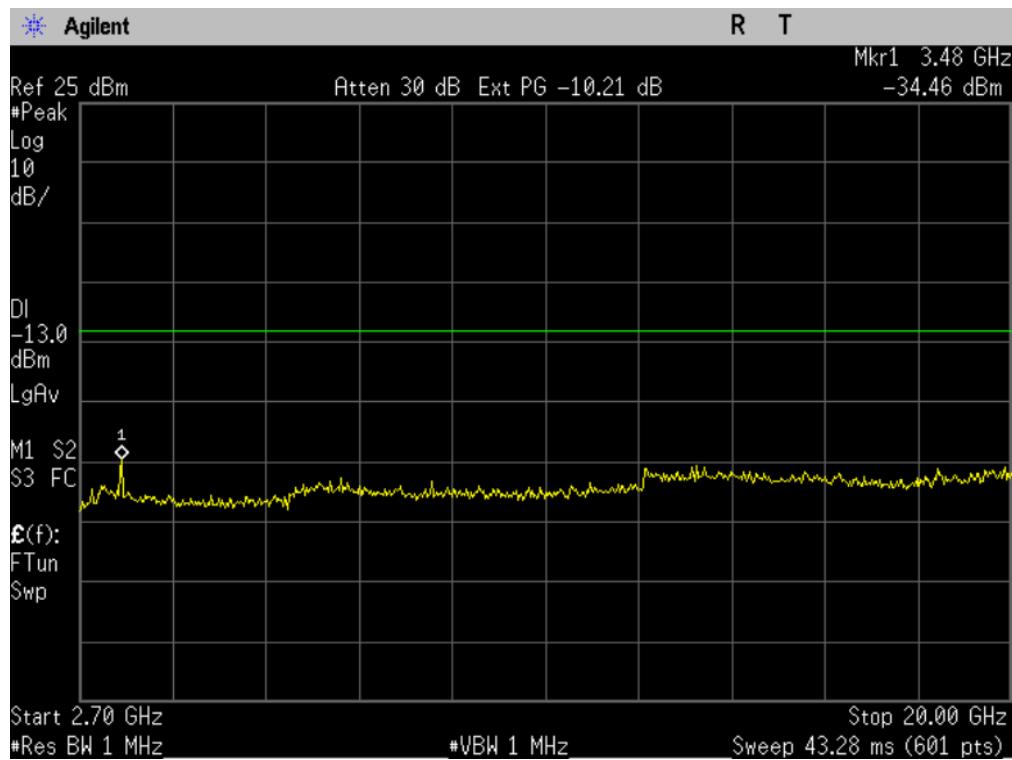


Figure 10-5b AWS 1700 - Conducted Spurious Emission (CH 450)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

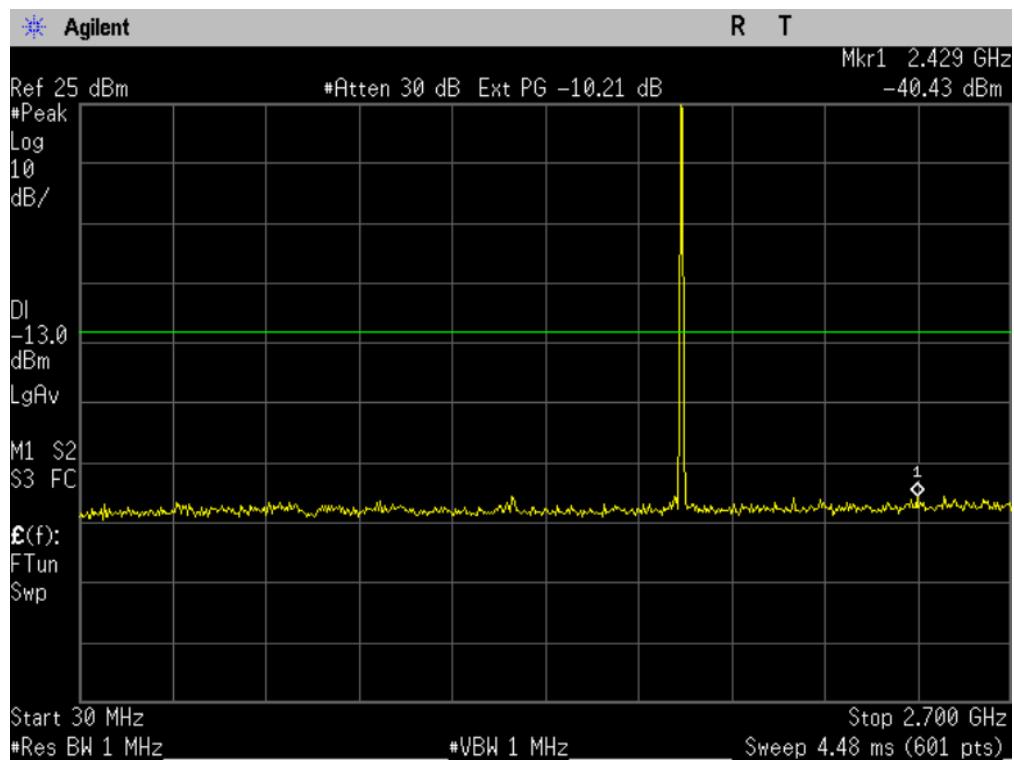


Figure 10-6a AWS 1700 - Conducted Spurious Emission (CH 875)

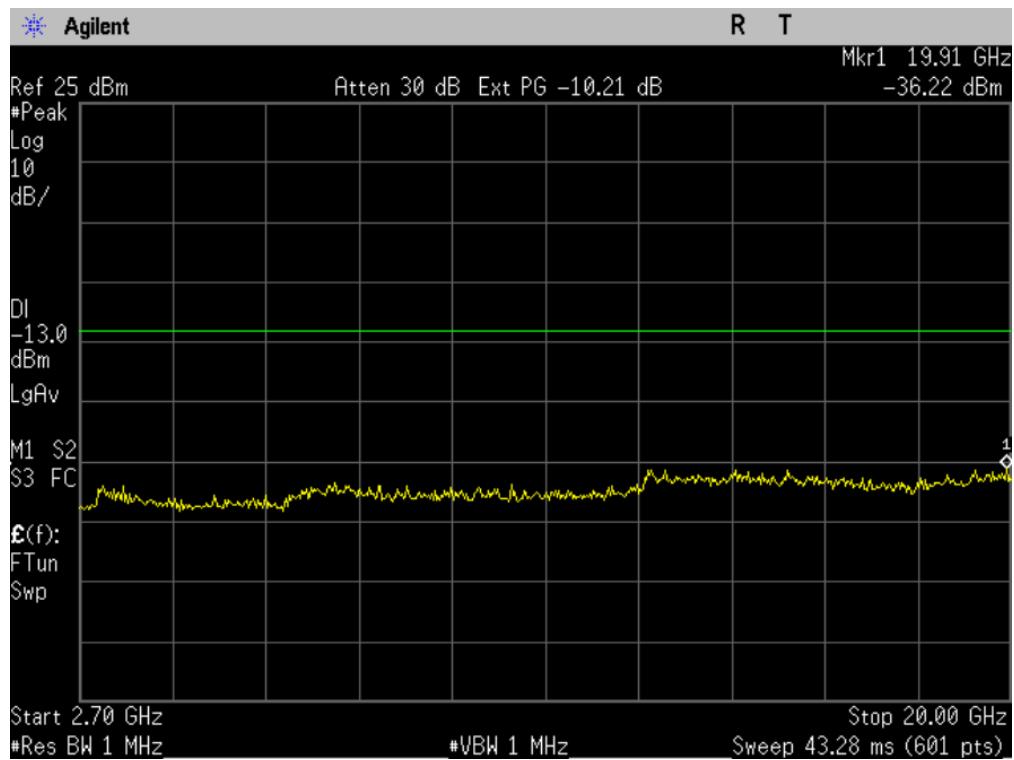


Figure 10-6b AWS 1700 - Conducted Spurious Emission (CH 875)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

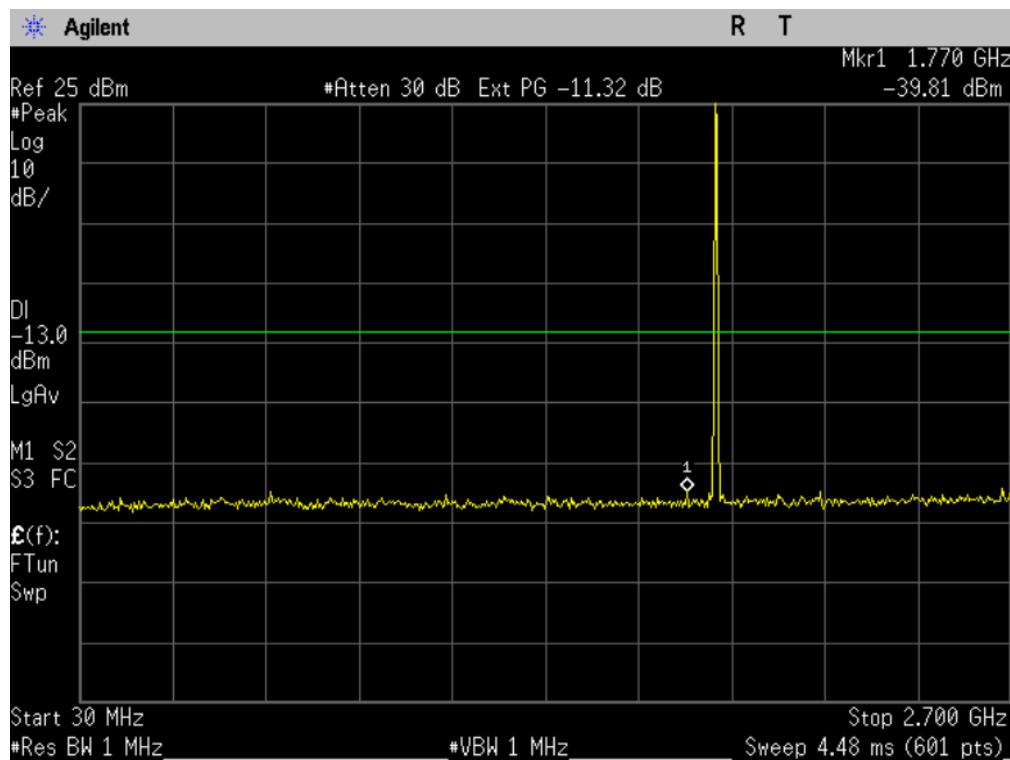


Figure 10-7a CDMA 1900 - Conducted Spurious Emission (CH 25)

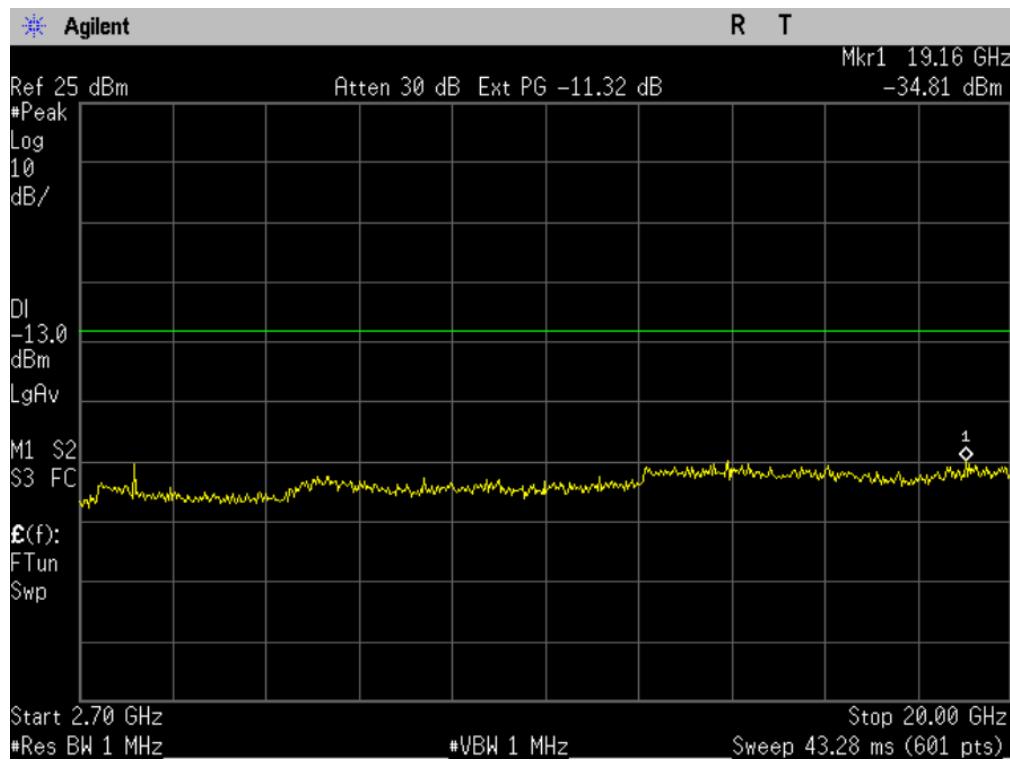


Figure 10-7b CDMA 1900 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

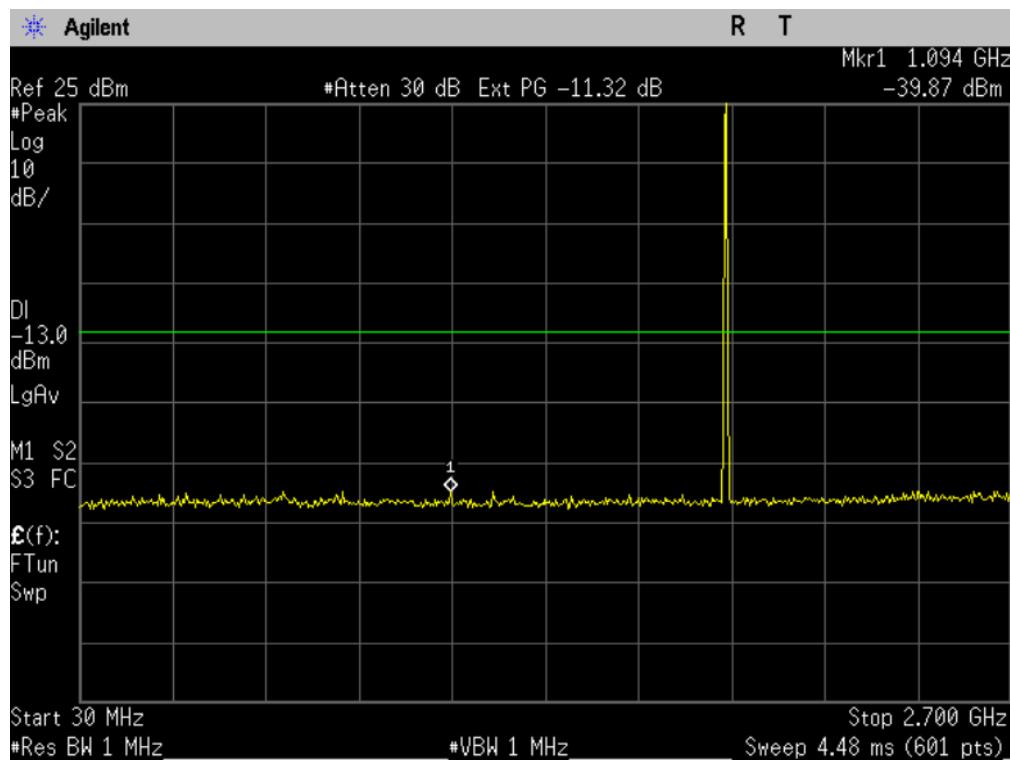


Figure 10-8a CDMA 1900 - Conducted Spurious Emission (CH 600)

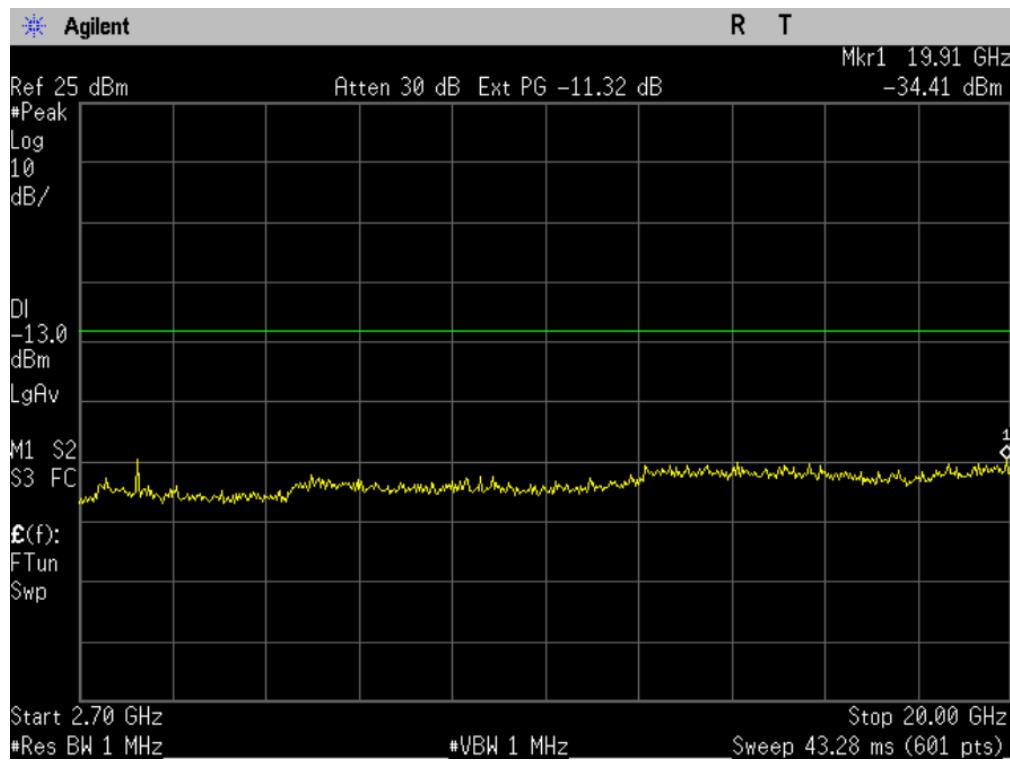


Figure 10-8b CDMA 1900 - Conducted Spurious Emission (CH 600)



Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

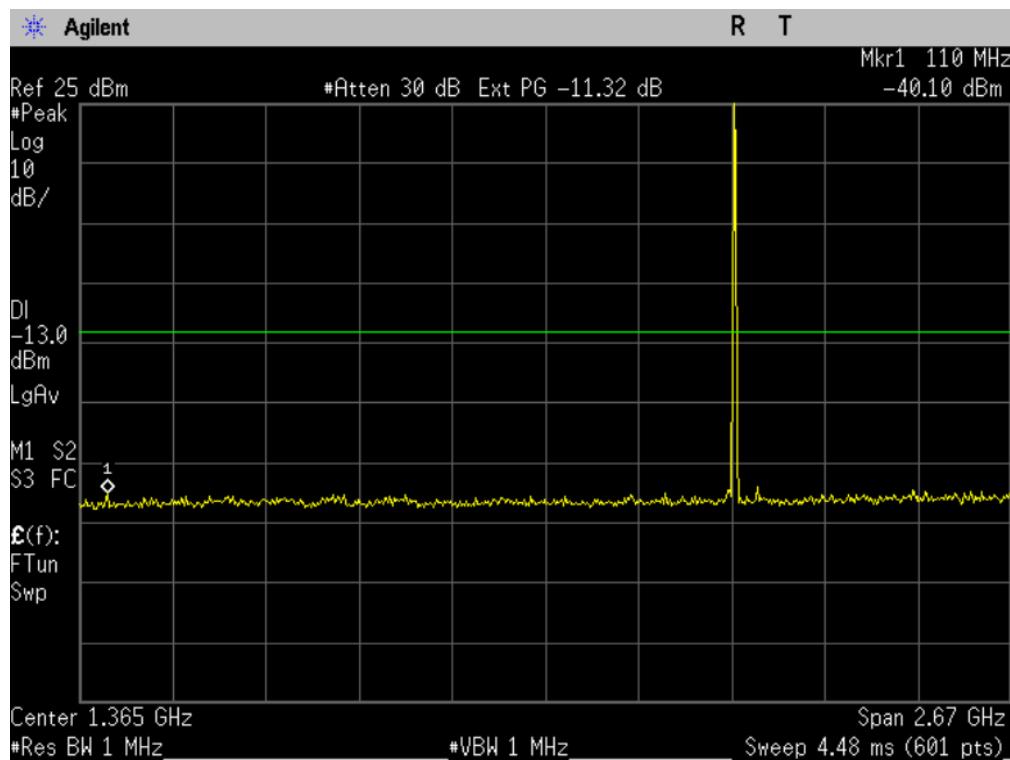


Figure 10-9a CDMA 1900 - Conducted Spurious Emission (CH 1175)

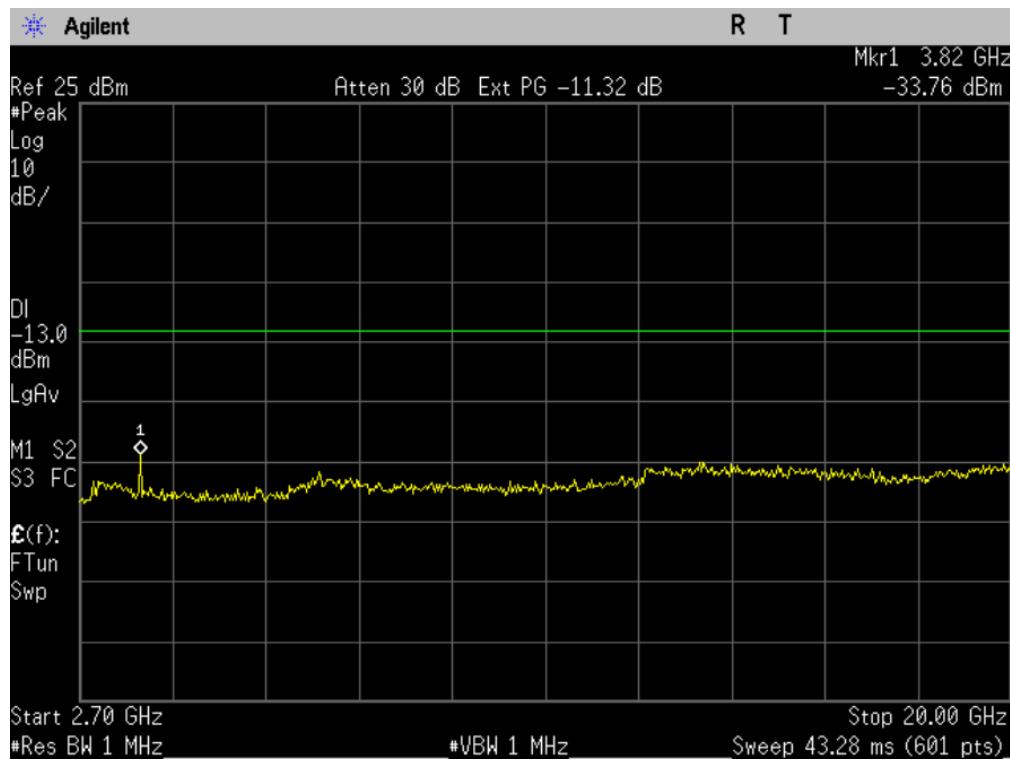


Figure 10-9b CDMA 1900 - Conducted Spurious Emission (CH 1175)

Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

11 TRANSMITTER RADIATED SPURIOUS EMISSIONS

FCC: § 2.1053, § 22.91, § 24.238, §27.53(g)
IC: RSS132 §4.5; RSS133 §6.5

The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

12 RECEIVER SPURIOUS EMISSIONS

12.1 Receiver Spurious Emissions

FCC: § 15.109
IC: RSS-GEN

The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

13 TRANSMITTER RF CARRIER FREQUENCY STABILITY

13.1 Test Configuration

FCC: § 2.1055, § 22.355, § 24.235, § 27.54

IC: RSS132 §4.3; RSS133 §6.3

The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply. Only the mid channel of each frequency band was investigated.

Limits:


Tx Frequency	Channel	Limit
836.49 MHz	384	+/- 2.5 ppm (+/-2091 Hz)
1732.5 MHz	450	+/- 2.5 ppm (+/-4331 Hz)
1880 MHz	600	+/- 2.5 ppm (+/-4700 Hz)



13.2 Test Result

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.3V (Battery endpoint)	3.7	4.20V (115%)	Lower limit	Upper limit
-30		-5.82		-2091	2091
-20		-6.4		-2091	2091
-10		-6.72		-2091	2091
0		-6.9		-2091	2091
10		6.43		-2091	2091
20	5.33	-4.04	-7.98	-2091	2091
30		7.12		-2091	2091
40		6.35		-2091	2091
50		7.85		-2091	2091
60		7.48		-2091	2091


CDMA 800 MHz Transmitter RF Carrier Stability Over Temperature and Voltage

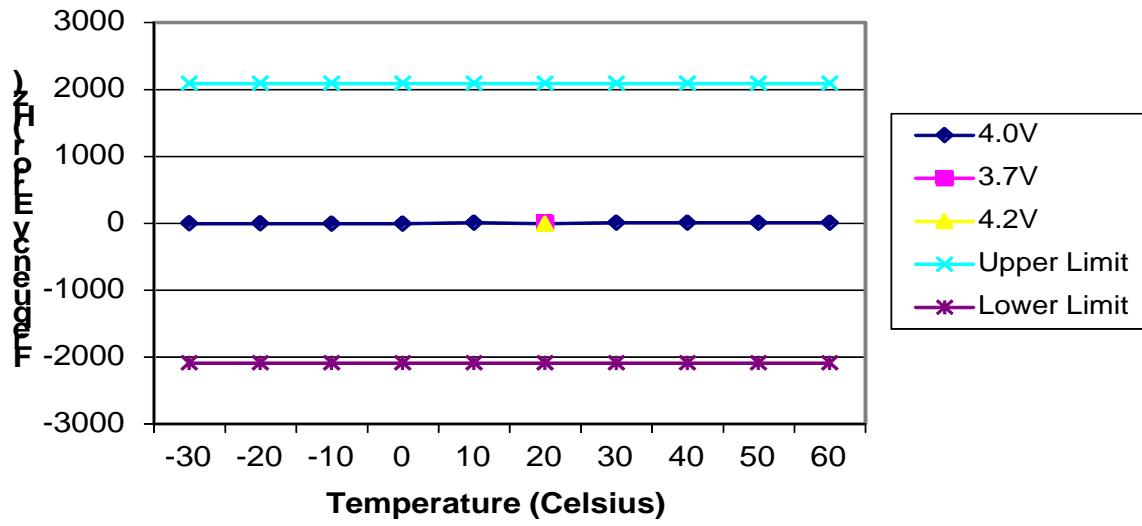



Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit
-30	8.09	7.63	-6.5	-4331	4331
-20		10.05		-4331	4331
-10		8.49		-4331	4331
0		7.75		-4331	4331
10		-7.05		-4331	4331
20		8.09	4.04	-4331	4331
30		-6.7	-6.5	-4331	4331
40		9.71		-4331	4331
50		7.03		-4331	4331
60		8.45		-4331	4331


CDMA1700 MHz Transmitter RF Carrier Stability Over Temperature and Voltage

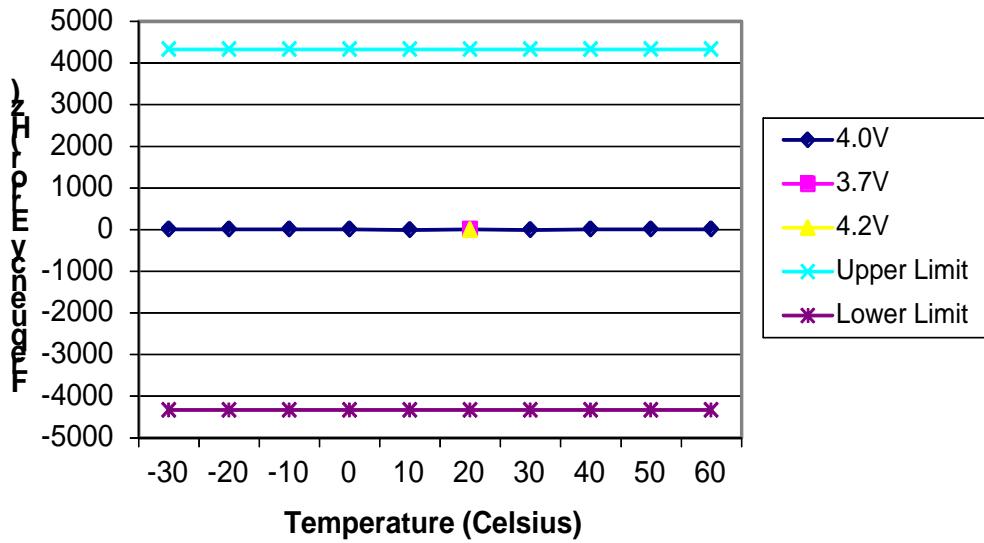



Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit
-30	6.55	9.03	5.6	-4700	4700
-20		10.15		-4700	4700
-10		10.19		-4700	4700
0		-7.74		-4700	4700
10		-7.58		-4700	4700
20		-7.6		-4700	4700
30		-8.42		-4700	4700
40		-7.96		-4700	4700
50		7.32		-4700	4700
60		8.48		-4700	4700

CDMA1900 MHz Transmitter RF Carrier Stability Over Temperature and Voltage

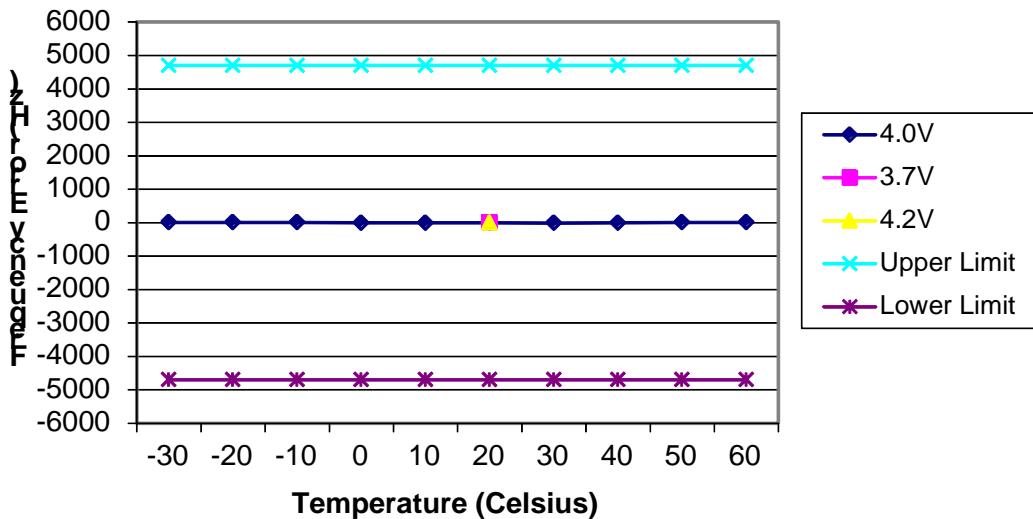

Applicant:	Kyocera
FCC ID:	V65C5171
Report #:	CT-C5171-24-0712-R0

14 EXPOSURE OF HUMANS TO RF FIELDS (SAR)

14.1 Test Configuration and Result

FCC: § 2.1093

IC: RSS102

The SAR test report is attached in a separate attachment.

15 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Power Meter	Giga-tronics	8541C	1831306	09/08/12
Spectrum Analyzer	Agilent	E4440A	MY44303130	12/14/12
Wireless Communications Test Set	Agilent	8960	GB44052789	12/02/13
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	07/24/13