

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Sentinel RX
MODEL/Serial No. : AMR-700W / NONE
FCC ID : V6J-AMR-700W
Multiple Model Name : -
BRAND NAME : -
APPLICANT : ASPPEC Co., Ltd.
4th Fl-405, Plaza 2nd, #1496, Dujeong-dong,
Cheonan-si, Chungcheonnam-do, Korea
Attn. : Do Hyung, Lee / Chief
MANUFACTURER : ASPPEC Co., Ltd.
4th Fl-405, Plaza 2nd, #1496, Dujeong-dong,
Cheonan-si, Chungcheonnam-do, Korea
FCC CLASSIFICATION : Class B Personal computers and peripherals
RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE091007.01
DATES OF TEST : November 16, 2009 to November 19, 2009
REPORT ISSUE DATE : December 28, 2009
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

This Sentinel RX, Model AMR-700W has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Yo Han, Park / Chief Engineer

ETL Inc.
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. User Manual

FCC MEASUREMENT REPORT

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name	: ASPPEC Co., Ltd.
Address	: 4th Fl-405, Plaza 2nd, #1496, Dujeong-dong, Cheonan-si, Chungcheonnam-do, Korea
Attention	: Do Hyung, Lee / Chief

- **EUT Type :** Sentinel RX
- **Model Number :** AMR-700W
- **S/N :** NONE
- **Frequency Range :** X-TAL → 12 MHz (2 EA); 24.2576 MHz; 48 MHz
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2003
- **FCC Classification :** Class B Personal computers and peripherals
- **Dates of Tests :** November 16, 2009 to November 19, 2009
- **Place of Tests :**
Radiated Emission test;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea
- **Conducted Emission test;**
ETL Inc. Testing Lab.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
- **Test Report No. :** ETLE091007.01

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the ASPPEC Co., Ltd. Model: AMR-700W

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is Sentinel RX (model: AMR-700W)

2.2 General Specification

Item		Specification
Panel	Screen Size	7" Screen with 15:9 aspect ration TFT LCD
	Display Format (pixels)	WVGA, 800 (H) x 480 (V), RGB pixels
	Brightness	400 cd/m ² , LED Back-light unit
	View Angle (H/U/D)	±35°/25°/20°
System	OS	Window CE 5.0 Core
	Memory	RAM: 512 MB, Flash ROM: 128 MB
	Memory Card	SD/SDHC Card
	Users Control	TOUCH SCREEN, POWER, SCREEN, HOLD
	Indicator	Four LEDs (POWER/CHARGE, SCREEN, WIRELESS-LAN, EMERGENCY)
	Ear Phone	Phone jack (Ø3.5)
WLAN	FCC ID	NCI-VNT6656G6A4X
	Frequency	IEEE802.11 b/g Wireless LAN (2.4 GHz – 2.4835 GHz)
	Bandwidth	5 MHz, 11 CH
	Receiver Sensitivity	-80 dBm for 11 Mbps @ 8 % PER
		-68 dBm for 54 Mbps @ 10 % FER
	Transmitter Sensitivity	16 dBm @ 11 Mbps
		15 dBm @ 54 Mbps
Application S/W	APP. S/W	CIRX Ver. 1.x
	Video CODEC.	MPEG4-SP
	Resolution	640 x 480 (D1), 320 x 240 (CIF)
Input Signal	Video	Video Format: 320 x 240, 640 x 480 (MPEG4-SP video stream)
	Audio	PCM Wave 18 bit, 48 kHz Sampling
Audio Output Signal		0.5 Watt Stereo.



FCC TEST REPORT

FCC ID: V6J-AMR-700W

Item	Specification
Power Supply	Input Voltage
	4.3 Watts, Max at 5 VDC (without Battery)
	9.0 Watts, Max at 5 VDC (with Battery charging)
	Battery
	LI-ION Polymer (6 000 mA/h)
Battery Operating Time	4 Hours/6 Hours (Max/Min LCD Brightness)
Recharging Time	4 Hours
Operating Temperature	-20 °C to +60 °C
Storage Temperature	-40 °C to +80 °C
Dimension	218 mm (W) x 157 mm (H) x 39 mm (D)
Weight	960 g (with Battery Pack)

Report no. ETLE091007.01, Page 6 of 17

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788

ETLQP-21-F22-0

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50Ω / $50 \mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

Operating Mode	The worst operating condition
Stand by mode	X
Normal operating mode	O


* O: Worst case investigated during the Test

4.3 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer
Notebook Computer	6730b	CNU8390GPZ	Hewlett-Packard Company
Adapter (for Notebook Computer)	Series PPP014H-S	F1-08070401760A	Hipro Electronics(Suzhou) Co., Ltd.
Ear-phone	NONE	NONE	NONE
DC Power Supply	E3616A	KR64301658	H.P.

4.4 Type of Cables Used

Device from	Device to	Type of I/O port	Length(m)	Type of shield
EUT	Notebook Computer	RS-232	1.0	Shielded
EUT	Ear-phone	Audio Out	1.2	Shielded
EUT	DC Power Supply	DC Input	1.0	Unshielded
Notebook Computer	Adapter	DC Input	1.2	Shielded
DC Power Supply	Power socket	AC Input	1.2	Unshielded

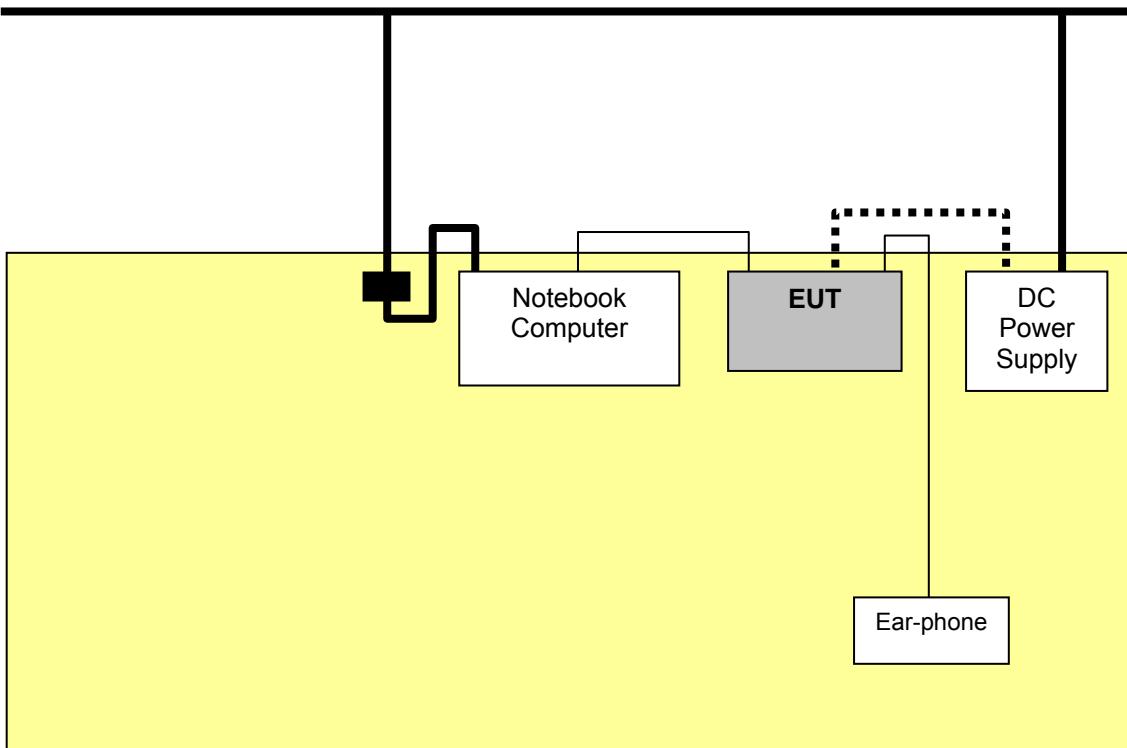4.5 The setup drawing(s)

- : Signal line
- : DC Power line
- : AC Power line
- : Adapter

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule	Measurement Required	Result
15.107(a)(d)	Conducted Emission Measurement	Passed by 9.30 dB
15.109(a)	Radiated Emission Measurement	Passed by 7.50 dB

The data collected shows that the **ASPPEC Co., Ltd. / Sentinel RX / AMR-700W** complied with technical requirements of above rules part 15.107(a) and 15.109(a) Class B Limits.

The equipment is modified anything, mechanical or circuits to improve EMI status during a measurement. EMI suppression device(s) was added and/or modified during testing.

5.2 Conducted Emissions Measurement

EUT	Sentinel RX / AMR-700W (S/N: N/A)		
Limit apply to	FCC Part 15.107(a)(d) Class B		
Test Date	November 19, 2009		
Operating Condition	Normal operating mode		
Result	Passed by 9.30 dB		

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

Frequency [MHz]	Result [dB μ V]		Phase (*L/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.662	40.60	33.80	H	56.00	46.00	15.40	12.20
0.723	43.60	36.70	H	56.00	46.00	12.40	9.30
0.795	43.70	35.50	H	56.00	46.00	12.30	10.50
0.858	39.90	32.90	N	56.00	46.00	16.10	13.10
0.987	41.10	33.70	H	56.00	46.00	14.90	12.30
17.291	43.90	34.30	N	60.00	50.00	16.10	15.70


NOTES:

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Result
3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B
4. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.




Test Engineer: Kug Kyoung. Yoon

Line: HOT Line

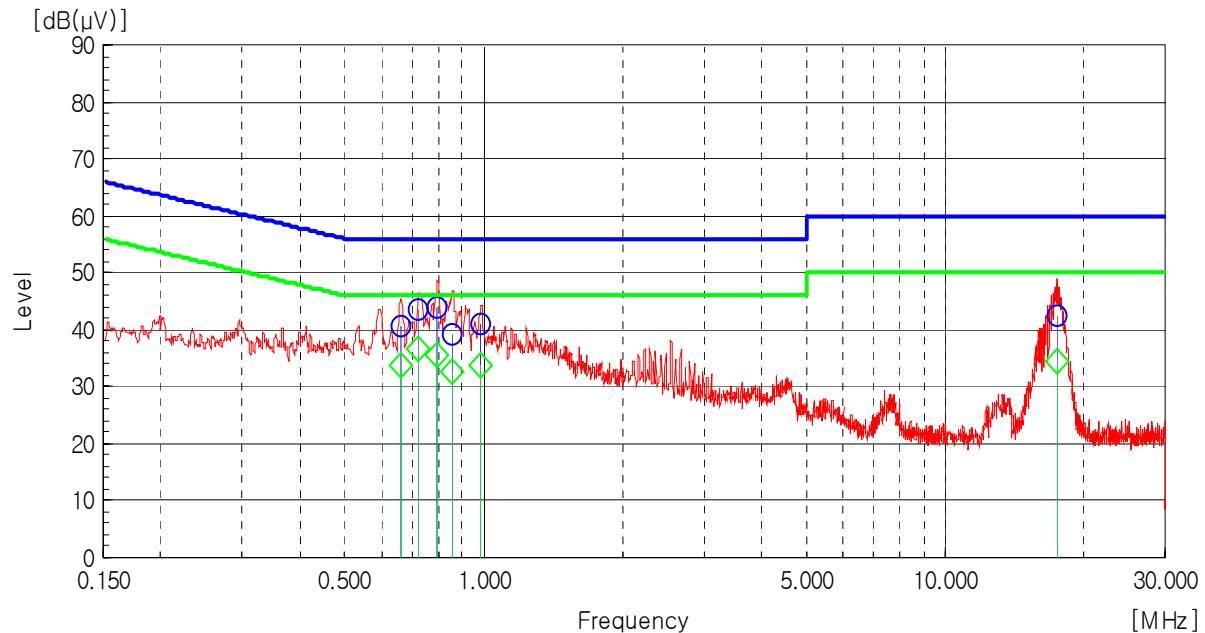Limit :
Quasi-Peak (Blue line)
Average (Green line)

Line: Neutral Line

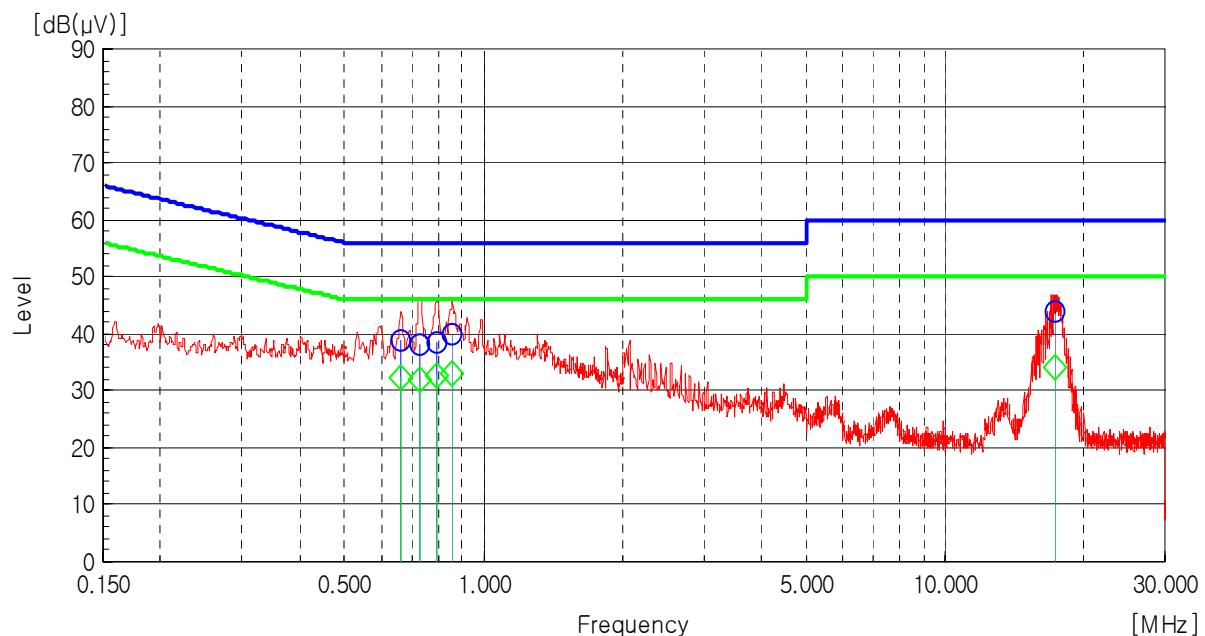

Quasi-peak

Average



5.3 Radiated Emissions Measurement

EUT	Sentinel RX / AMR-700W (S/N: N/A)		
Limit apply to	FCC Part 15.109(a) Class B		
Test Date	November 16, 2009		
Operating Condition	Normal operating mode		
Result	Passed by 7.50 dB		

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
38.86	15.31	V	11.51	1.48	28.30	40.00	11.70
45.68	18.86	V	12.10	1.54	32.50	40.00	7.50
53.86	17.15	V	11.84	1.71	30.70	40.00	9.30
68.17	19.35	V	9.97	1.88	31.20	40.00	8.80
216.12	18.99	V	9.63	3.88	32.50	46.00	13.50
312.37	15.98	H	12.75	4.57	33.30	46.00	12.70
319.44	18.29	H	12.91	4.60	35.80	46.00	10.20
368.93	12.78	H	13.97	4.95	31.70	46.00	14.30
393.68	14.16	H	14.42	5.22	33.80	46.00	12.20
480.28	9.73	H	16.44	5.93	32.10	46.00	13.90
600.47	12.22	H	18.73	6.75	37.70	46.00	8.30


NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz – 1 000 MHz according to FCC Part 15.109(a) Class B.



Test Engineer: Kug Kyoung. Yoon

— : Limit

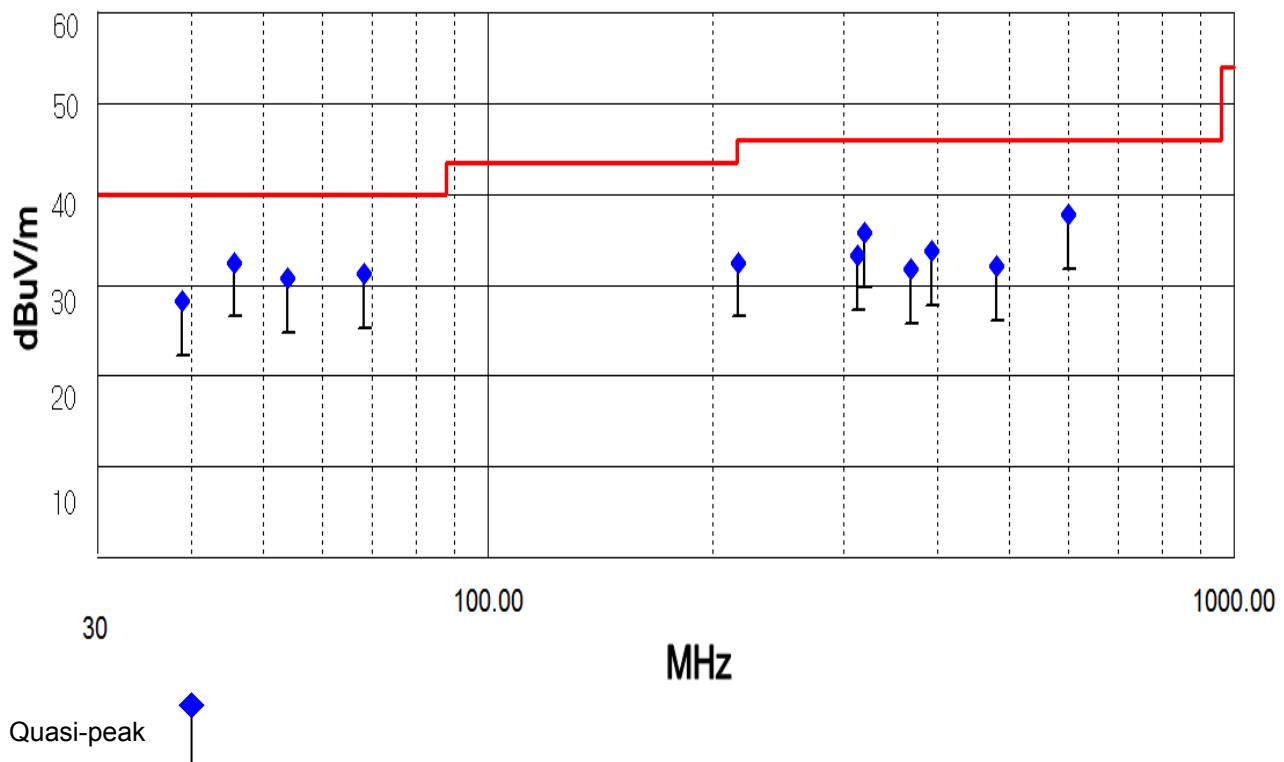

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (uV) : \text{Equation}$$

Example : @ 45.68 MHz

Class B Limit	=	40.00 dBuV/m
Reading	=	18.86 dBuV
Antenna Factor + Cable Loss	=	12.10 + 1.54 = 13.64 dBuV/m
Total	=	32.50 dBuV/m
Margin	=	40.00 – 32.50 = 7.50 dB
	=	7.50 dB below Limit

7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESVS10	R & S	835165/001	10.04.02
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESPI3	R & S	100478	10.09.18
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	10.09.17
<input checked="" type="checkbox"/>	LISN	3816-2	EMCO	1002	10.09.17
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	10.01.25
<input checked="" type="checkbox"/>	Turn-Table	MFT-120S	Max-Full Antenna Corp	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	MFA-440E	Max-Full Antenna Corp	-	N/A