







ISO/IEC17025Accredited Lab.

Report No: FCC 1111214
File reference No: 2012-03-03

Applicant: Guangzhou Chiyuan Electronic Co., Ltd.

Product: 6CH Radio Control

Model No: X-6H

Trademark: XINYI/HISKY

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: March 03, 2012

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1111214 Page 2 of 62

Date: 2012-03-03



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.



47

Report No: 1111214 Date: 2012-03-03



Test Report Conclusion

	Content	
1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	20dB Bandwidth Measurement	22
8.0	Maximum Peak Output Power	26
9.0	Carrier Frequency Separation.	27
10.0	Number of Hopping Channel.	29
11.0	Time of Occupancy (Dwell Time)	32
12.0	Out of Band Measurement	36
13.0	Antenna Requirement.	43
14.0	Maximum Permissible Exposure	44
15.0	FCC ID Label	46

16.0

Photo of Test Setup and EUT View.....

Date: 2012-03-03



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Guangzhou Chiyuan Electronic Co., Ltd.

Address: 2/F., No.1Bldg., Boyi Industrial Garden, 4th Gongye Rd.Zhicun Dashi Street, Panyu Dis.,

Guangzhou, China

Telephone: 020-34796226/34797226 Fax: 020-34796226/34797226

1.3 Description of EUT

Product: 6CH Radio Control

Manufacturer: Guangzhou Chiyuan Electronic Co., Ltd.

Address: 2/F., No.1Bldg., Boyi Industrial Garden, 4th Gongye Rd.Zhicun Dashi Street,

Panyu Dis., Guangzhou, China

Brand Name: XINYI/HISKY

Model Number: X-6H
Additional Model Name N/A
Additional Trade Name N/A

Rating: DC6.0V (4 pcs AA Batteries)

Power Supply: N/A
Type of Modulation GFSK

Frequency range 2402-2477MHz

Number of Channel 76

Air Data Rate 125kbps

Antenna type Dipole antenna

1.4 Submitted Sample: 5 Samples

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1111214 Page 5 of 62 Date: 2012-03-03



1.5	Test	Duration

2011-11-21 to 2012-03-02

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer &verify Engineer

Test Engineer	Drown Lu
The sample(s) tested by	
	Print Name: Brown Lu/Engineer
Verify Engineer The report verified by	Tang Tong
	Print Name: Terry Tang/ EMC Manager

Page 6 of 62

Report No: 1111214 Date: 2012-03-03



2.0		Test Equi	ipments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2011-04-26	2012-04-25
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2011-04-26	2012-04-25
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2011-04-26	2012-04-25
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2011-04-26	2012-04-25
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2011-04-26	2012-04-25
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2011-04-26	2012-04-25
System Controller	CT	SC100	-	2011-04-26	2012-04-25
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2011-04-26	2012-04-25
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-
Bilog Antenna	Chase	CBL6111C	2576	2011-04-26	2012-04-25
Loop Antenna	EMCO	6502	00042960	2011-04-26	2012-04-25
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2011-04-26	2012-04-25
3m OATS			N/A	2011-04-26	2012-04-25
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2011-04-26	2012-04-25
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2011-04-26	2012-04-25
Power meter	Anritsu	ML2487A	6K00003613	2011-04-26	2012-04-25
Power sensor	Anritsu	MA2491A	32263	2011-04-26	2012-04-25
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2011-04-26	2012-04-25
LISN	AFJ	LS16C	10010947251	2011-04-26	2012-04-25
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2011-04-26	2012-04-25
9*6*6 Anechoic			N/A	2011-04-26	2012-04-25
EMI Test Receiver	RS	ESCS30	100139	2011-04-26	2012-04-25
LISN	AFJ	LS16C	10010947251	2011-04-26	2012-04-25
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2011-04-26	2012-04-25

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 62

Report No: 1111214 Date: 2012-03-03



3.0 Technical Details

3.1 Summary of test results

The EUT has been	n tested accordin	g to the following	specifications:
		A	, 50000

Standard	Test Type	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge,	15.247(d),15.205(a),	PASS	Complies
and Restricted bands	15.209 (a),15.109		
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd


Page 8 of 62

Report No: 1111214 Date: 2012-03-03



5. Power Line Conducted Emission Test

5.1 Schematics of the test

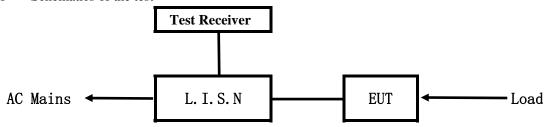


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2009.

Block diagram of Test setup

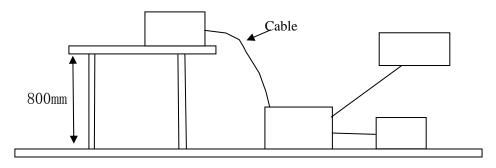

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
6CH Radio Control	Guangzhou Chiyuan Electronic Co., Ltd.	Х-6Н	V6KX-6H

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

Report No: 1111214 Page 9 of 62

time way

C. Peripherals

Date: 2012-03-03

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB \(\mu \) V)		
(MHz)	Quasi-peak Level Average Lev		Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1111214 Page 10 of 62

Date: 2012-03-03



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

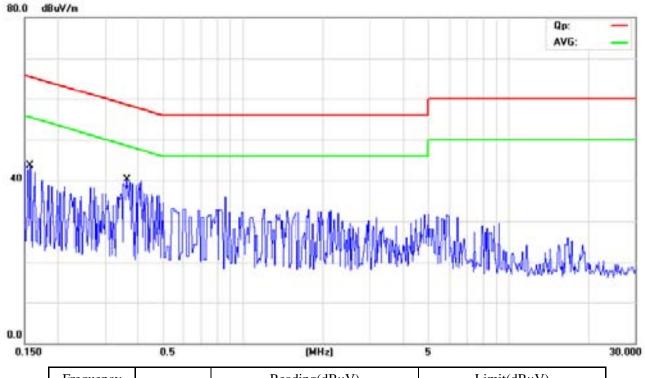

Frequency	y Line	Reading(dBμV)	Limit(dBμV)
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.1573	Live	36.31	5.81	65.61	55.61
0.3620	Live	23.32	1.98	58.68	48.68

Report No: 1111214 Page 11 of 62
Date: 2012-03-03



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

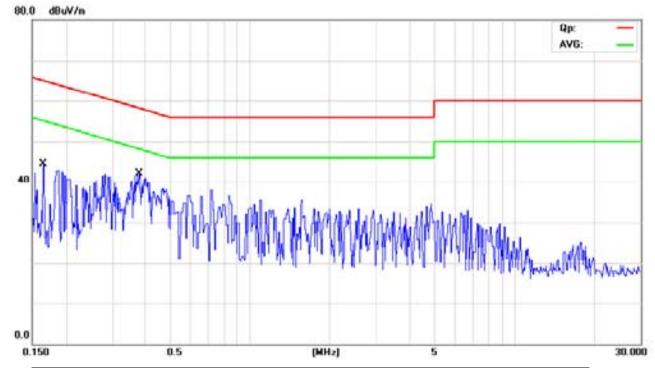

Frequency	Line	Reading(dBμV)	Limit(dBμV)
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.1652	Neutral	39.92	1.32	65.20	55.20
0.3772	Neutral	30.14	2.06	58.34	48.34

Report No: 1111214 Page 12 of 62


Date: 2012-03-03



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2009. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2009.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

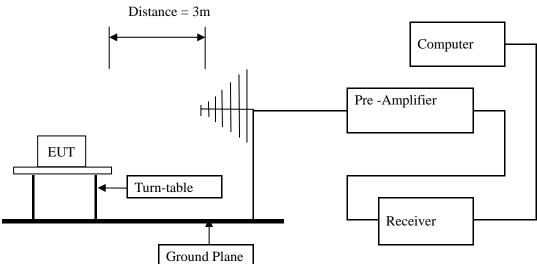


Page 13 of 62

Report No: 1111214 Date: 2012-03-03



Block diagram of Test setup for frequency below 30MHz

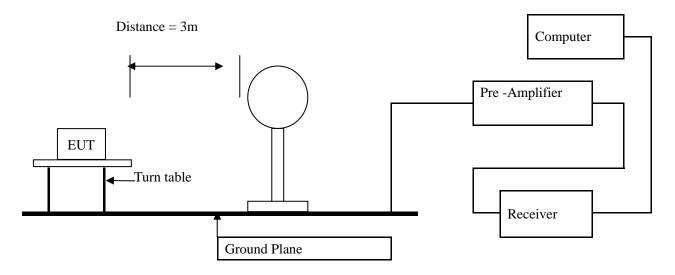

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

_	1	3 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: 1111214 Page 14 of 62

Date: 2012-03-03




General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (0.009MHz----30MHz)

EUT set Condition: Transmitting (Low CH)

Model: X-6H
Results: Pass

Please refer to following diagram for individual

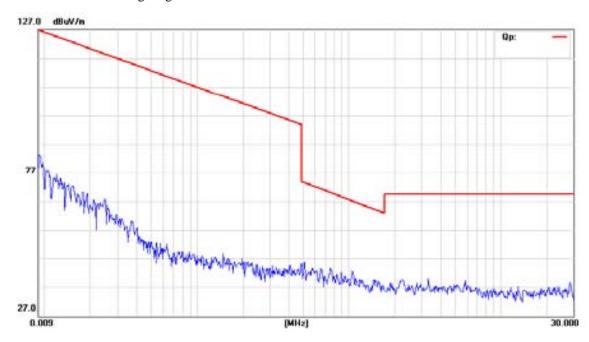

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB \mu V/m)
	-	

⁻The test data shows much less than the limit, no necessary take down the records.

Page 15 of 62

Report No: 1111214 Date: 2012-03-03



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Tx under transmitting mode

Results: Pass


Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
103.867	24.86	V	43.50
362.404	24.92	V	46.00
463.487	26.94	V	46.00
103.867	16.26	Н	43.50
362.404	21.72	Н	46.00

Report No: 1111214 Date: 2012-03-03




Test Figure: transmitting mode

Vertical

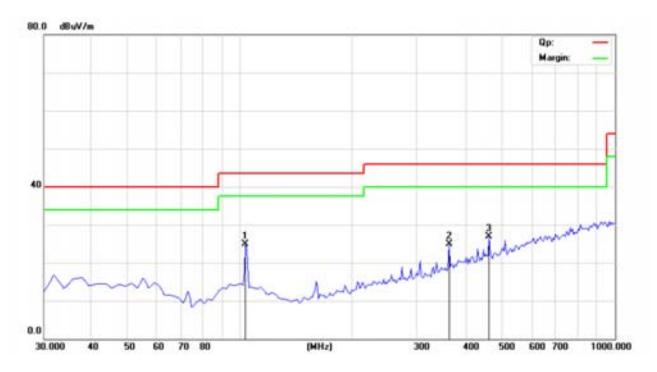

Horizontal

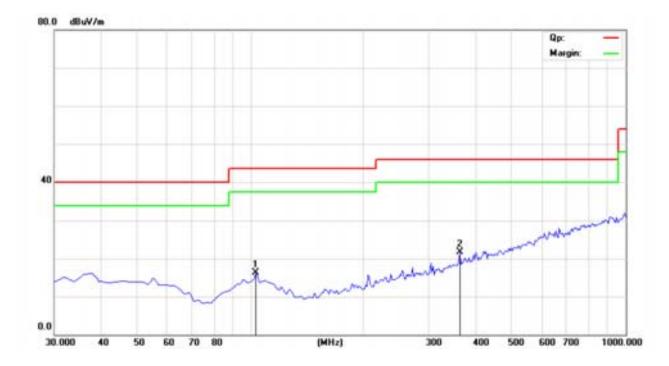

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1111214 Page 17 of 62

Date: 2012-03-03



Operation Mode: Transmitting under Low Channel

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2402	98.63 (PK)	Н	
2402	99.00 (PK)	V	
4804	51.34(PK)	V	74(Peak)/ 54(AV)
4804	1	Н	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608	1	H/V	74(Peak)/ 54(AV)
12010	1	H/V	74(Peak)/ 54(AV)
14412	1	H/V	74(Peak)/ 54(AV)
16814	1	H/V	74(Peak)/ 54(AV)
19216	1	H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Operation Mode: Transmitting under CH Mid

	U		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2440	98.85 (PK)	Н	
2440	98.96 (PK)	V	
4880	48.90 (PK)	V	74(Peak)/ 54(AV)
4880		Н	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Report No: 1111214 Page 18 of 62

Date: 2012-03-03



Operation Mode: Transmitting under CH High

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2477	99.19 (PK)	Н	
2477	98.69(PK)	V	
4954	51.34(PK)	V	74(Peak)/ 54(AV)
4954		Н	74(Peak)/ 54(AV)
7431		H/V	74(Peak)/ 54(AV)
9908		H/V	74(Peak)/ 54(AV)
12385		H/V	74(Peak)/ 54(AV)
14862		H/V	74(Peak)/ 54(AV)
17339		H/V	74(Peak)/ 54(AV)
19816	-	H/V	74(Peak)/ 54(AV)
22293		H/V	74(Peak)/ 54(AV)
24770		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. Margin=Emission-Limits
- 4.According to section 15.35(b), the peak limit is 20dB higher than the average limit


Please refer to the following test plots for details:

Page 19 of 62


Report No: 1111214 Date: 2012-03-03



Low Channel: Vertical

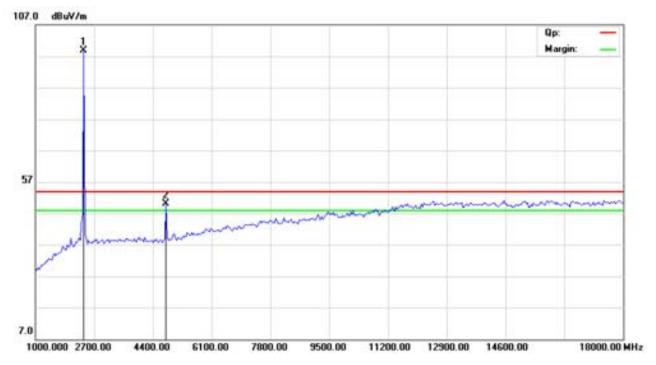

Low Channel: Horizontal

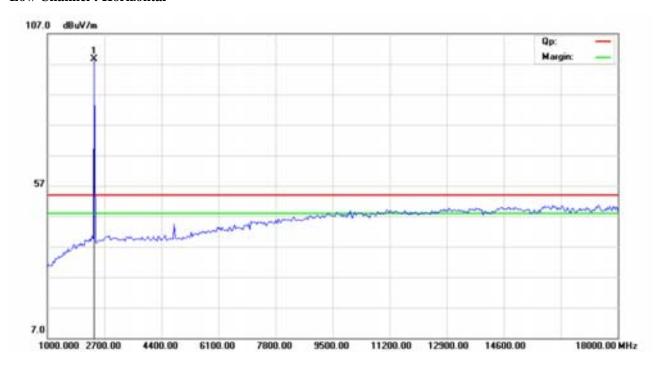

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 20 of 62


Report No: 1111214 Date: 2012-03-03



Middle Channel: Horizontal

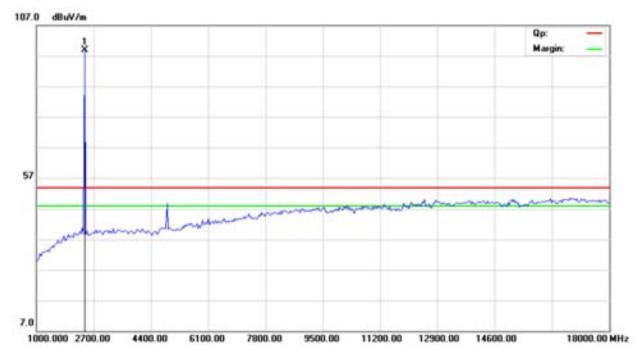

Middle Channel: Vertical

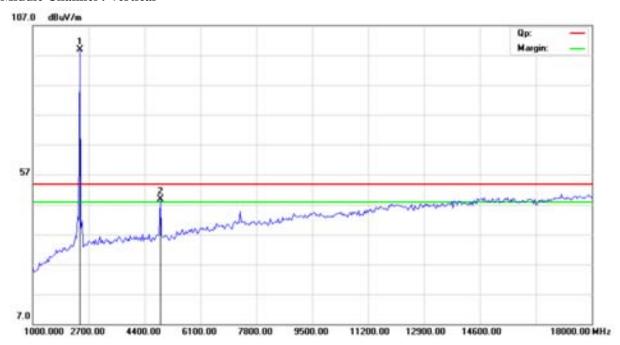


Page 21 of 62


Report No: 1111214 Date: 2012-03-03



High Channel: Horizontal

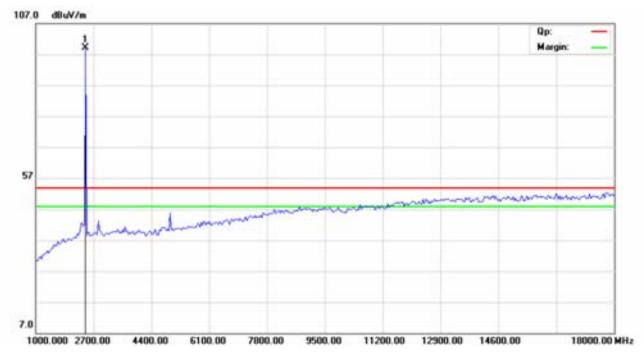

High Channel: Vertical

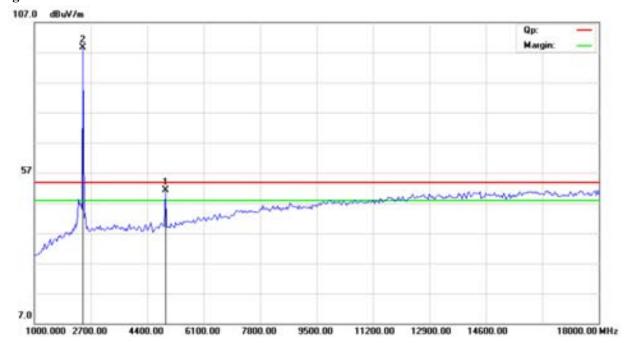

For Radiated Emission From 18-25GHz, it was the floor noises which meet the FCC rule.

Report No: 1111214 Page 22 of 62

Date: 2012-03-03



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =5MHz, VBW = RBW=100kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

EUT		6CH Radio Control		Model		Х-6Н	
Mode		Keep '	Transmitting	Input Voltage		DC6.0V	
Temperat	ure	24	4 deg. C, Humidity		ty 5		RH
Channel		el Frequency (MHz)	20 dB Bandw (MHz)	idth	1,11111	mum Limit MHz)	Pass/ Fail
Low		2402	0.284				Pass
Mid		2440	0.180				Pass
High		2477	0.288				Pass


Page 23 of 62

Report No: 1111214 Date: 2012-03-03



Test Plots:

1. CH Low

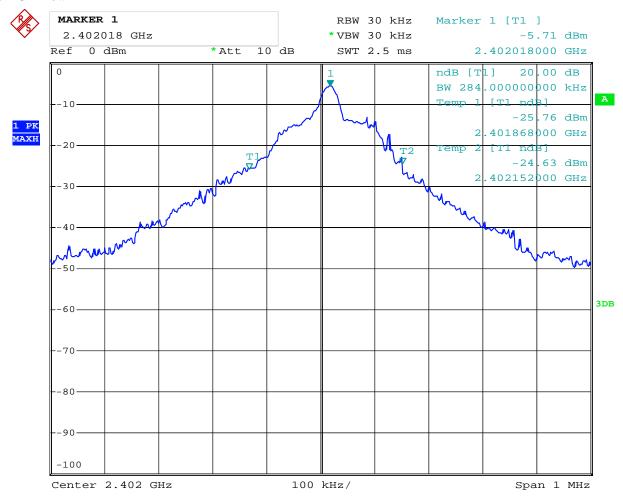


Date: 2.MAR.2012 08:40:26

Page 24 of 62

Report No: 1111214 Date: 2012-03-03



2. CH Mid

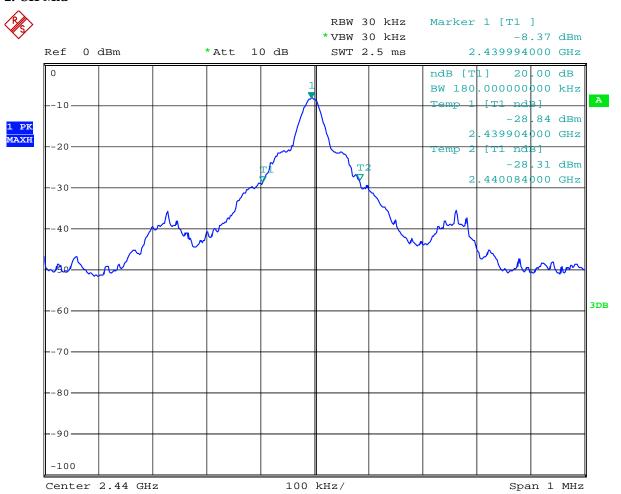


Date: 2.MAR.2012 09:11:17

Page 25 of 62

Report No: 1111214 Date: 2012-03-03



3. CH High

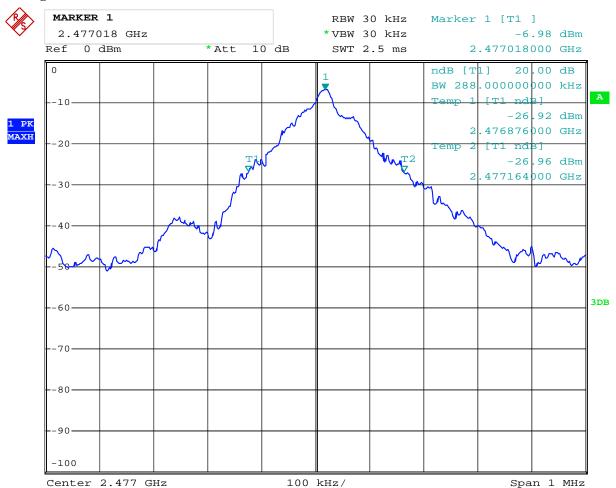

Date: 2.MAR.2012 08:49:25


Report No: 1111214 Page 26 of 62

Date: 2012-03-03



8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

8.4Test Results

EUT	JT 6CH Radio Control Model		Х-6Н					
Mode	ode Keep Transmitting Input Voltage		Input Voltage		Input Voltage		put Voltage D	
Temperature	mperature 24 deg. C Humidity		umidity		5% RH			
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail	
Low		2402	18.5	18.5)	Pass	
Mid		2440	17.5		30		Pass	
High		2477	17.8		30		Pass	

Note: 1. At finial test to get the worst-case emission for CH Low, CH Mid and CH High

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Report No: 1111214 Page 27 of 62

Date: 2012-03-03



9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

9.4Test Result


EUT		6CH Radio Control		Model		Х-6Н		
Mode		Keep Transmitting Ir		Input Voltage		DC 6.0V		
Temperature		24 deg	g. C Humidi		ty 5		56% RH	
Channel	Ch	annel Frequency	Carrier Frequ	lency Limit		nit	Pass/ Fail	
Chamiei		(MHz)	Separation		Lillit			
Middle		2440	1MHz		25kHz or		Pass	
					two-third	ls of the		
					20dB bar	ndwidth		
					of the he	opping		
					Channel	which		
					is gr	eat.		

Page 28 of 62

Report No: 1111214 Date: 2012-03-03



Test Plot:

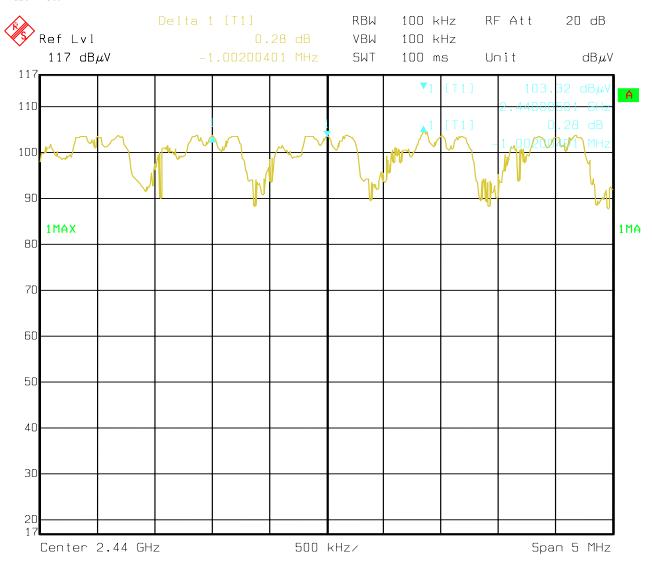

Date: 25.DEC.2011 17:28:54

Report No: 1111214 Page 29 of 62

Date: 2012-03-03



10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

10.4Test Result


EUT		6CH Radio Control	Model		Х-6Н	
Mode		Keep Transmitting	Input Voltage D		C 6.0V	
Temperature		24 deg. C,	Humidity		56% RH	
Operating Frequency		Number of hopping channels		Lin	nit	Pass/ Fail
2402-2477MHz		76		≥ 1	.5	Pass

Page 30 of 62

Report No: 1111214 Date: 2012-03-03



Test Plots

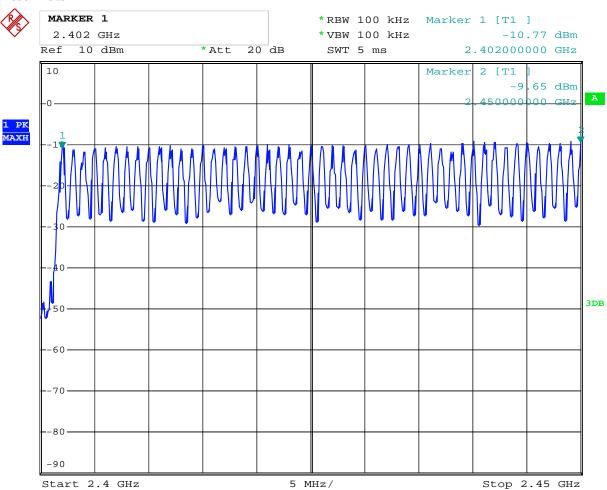


Date: 16.JAN.2012 09:29:08

Page 31 of 62

Report No: 1111214 Date: 2012-03-03



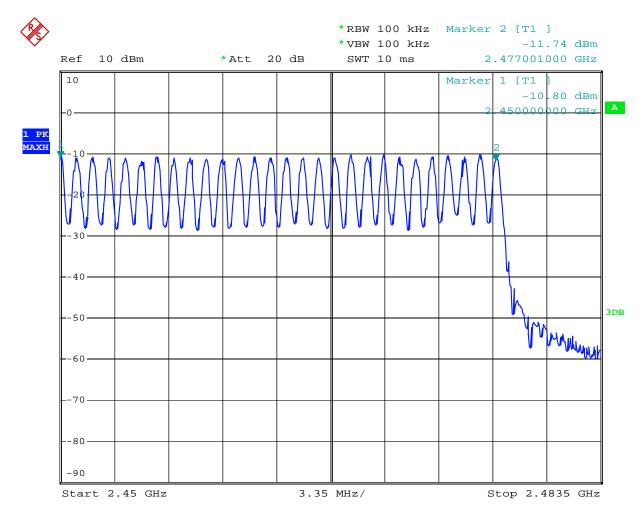

Date: 16.JAN.2012 09:27:26

Report No: 1111214 Page 32 of 62

Date: 2012-03-03



11. Time of Occupancy (Dewell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

EUT		6CH Radio Control	Model		Х-6Н		
Mode		Keep Transmitting	Input Voltage		Input Voltage		DC 6.0V
Temperature	perature 24 deg. C, Humidity		ty	56% RH			
Channel		Actual		Limit			
Middle		0.02644s		0.4s			


Actual = $(0.661+0.661) \times 20 = 26.44$ ms

Page 33 of 62

Report No: 1111214 Date: 2012-03-03



Test Plots

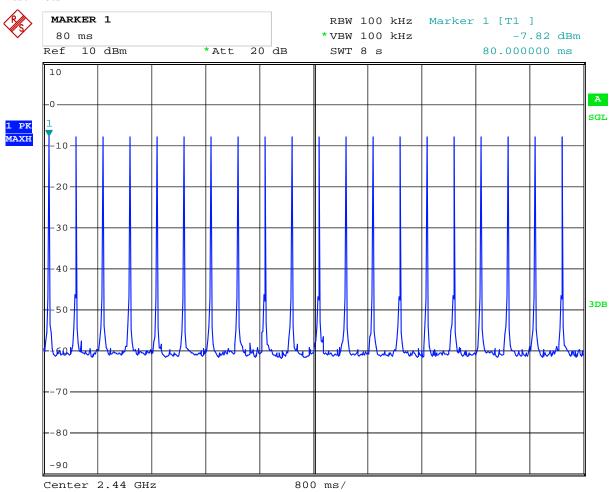


Date: 16.JAN.2012 10:15:18

Page 34 of 62

Report No: 1111214 Date: 2012-03-03



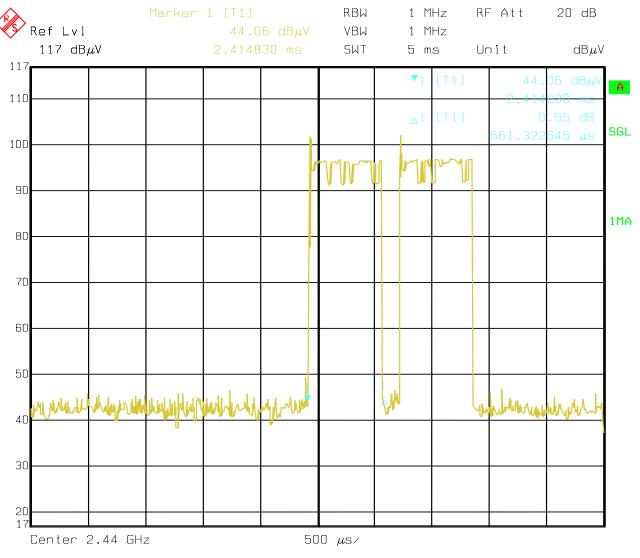


Date: 25.DEC.2011 17:06:59

Page 35 of 62

Report No: 1111214 Date: 2012-03-03



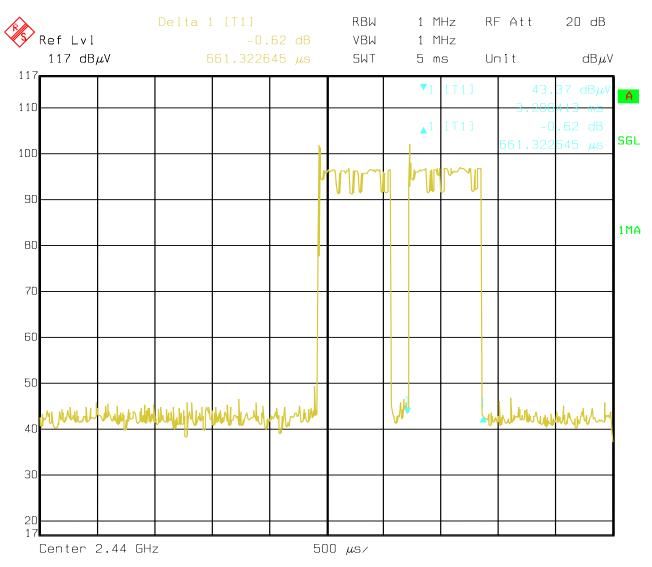

Date: 25.DEC.2011 17:07:38


Report No: 1111214 Page 36 of 62

Date: 2012-03-03



12 Out of Band Measurement

12.1 Test Setup



12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

Page 37 of 62

Report No: 1111214 Date: 2012-03-03




12.4Test Result

CH Low

12.4 Band Edge Test Result

Product:	6CH Radio Control	Test Mode:	Х-6Н
Mode	Keep Transmitting	Input Voltage	DC 6.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

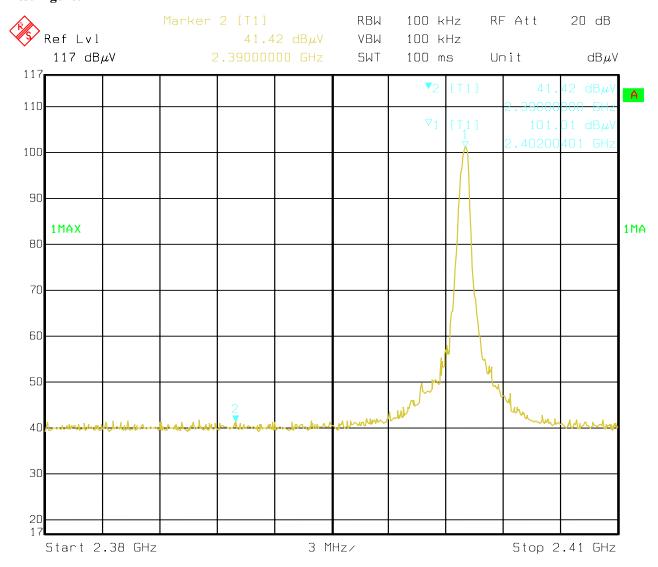

Date: 25.DEC.2011 17:48:30

Page 38 of 62

Report No: 1111214 Date: 2012-03-03




12.4Test Result

CH High

12.4 Band Edge Test Result

Product:	6CH Radio Control	Test Mode:	Х-6Н
Mode	Keep Transmitting	Input Voltage	DC 6.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

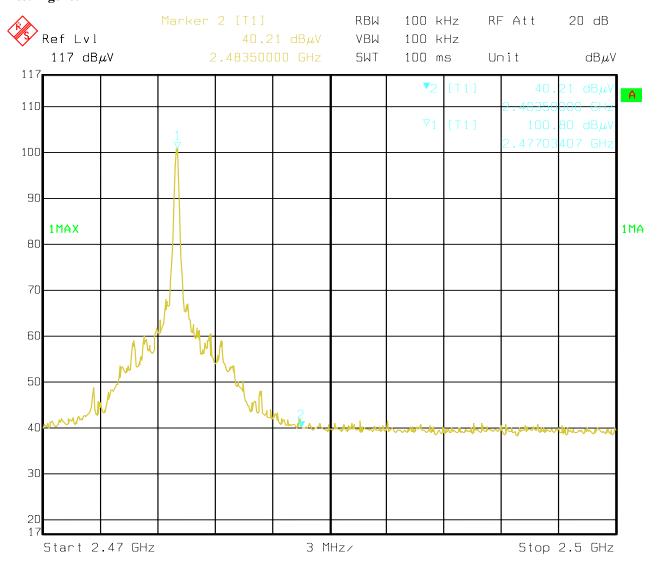

Date: 25.DEC.2011 17:39:17

Page 39 of 62

Report No: 1111214 Date: 2012-03-03



12.4Test Result


CH Low

12.4 Restrict Band Test Result

Product:	6CH Radio Control		Test Mode:	Х-6Н
Mode	Keep Transmitting		Input Voltage	DC 6.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2390	PK (dBμV/m)	40.94	Limit	$74(dB\mu V/m)$
	AV(dBμV/m)			54(dBμV/m)

Test Figure:

Horizontal:

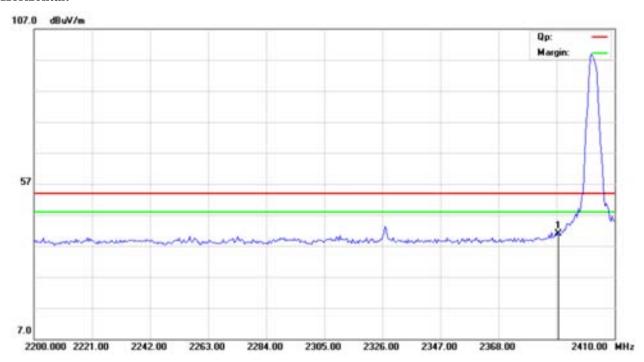

Page 40 of 62

Report No: 1111214 Date: 2012-03-03




12.4 Restrict Band Test Result

Product:	6CH Radio Control		Test Mode:	Х-6Н
Mode	Keep Transmitting		Input Voltage	DC6.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2390	PK (dBμV/m) 45.07		Limit	$74(dB\mu V/m)$
	AV(dBμV/m)			$54(dB\mu V/m)$
2327.094	PK (dBμV/m) 44.80		Limit	$74(dB\mu V/m)$
	AV(dBμV/m)			$54(dB\mu V/m)$

Test Figure:

Vertical:

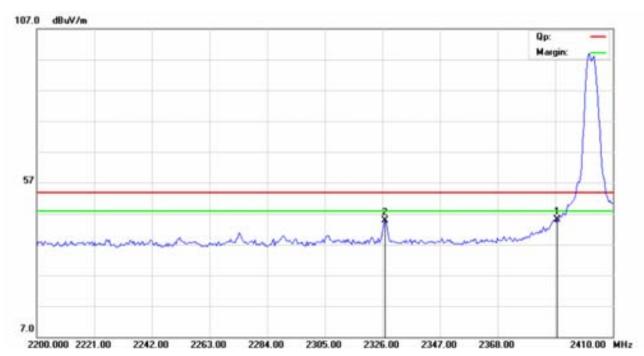

Note: 1. The Max. FS in Restrict Band are measured in conventional method.

- 2. Final Level = Reading + AF + Cable Preamp
- 3. RBW=VBW=1MHz

Page 41 of 62

Report No: 1111214 Date: 2012-03-03




CH High

12.4 Restrict Band Test Result

Product:	6CH Radio Control		Test Mode:	Х-6Н
Mode	Keep Transmitting		Input Voltage	DC 6.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBμV/m)	48.41	Limit	$74(dB\mu V/m)$
	$AV(dB\mu V/m)$			$54(dB\mu V/m)$

Test Figure:

Horizontal:

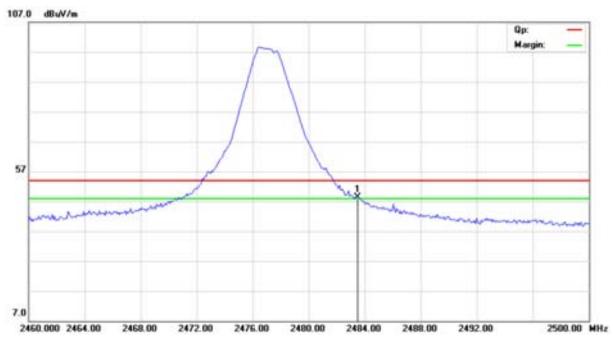

Page 42 of 62

Report No: 1111214 Date: 2012-03-03




12.4 Restrict Band Test Result

Product:	6CH Radio Control		Test Mode:	Х-6Н
Mode	Keep Transmitting		Input Voltage	DC6.0V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBµV/m)	54.55	Limit	$74(dB\mu V/m)$
	$AV(dB\mu V/m)$	38.69		$54(dB\mu V/m)$

Test Figure:

Vertical:

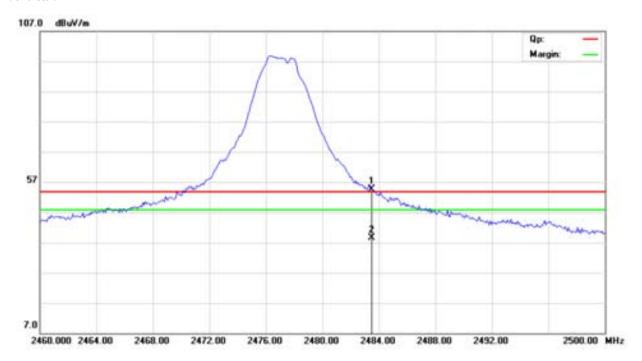

Note: 1. The Max. FS in Restrict Band are measured in conventional method.

- 2. Final Level = Reading + AF + Cable Preamp
- 3. RBW=VBW=1MHz

Report No: 1111214 Page 43 of 62

Date: 2012-03-03



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected construction

The antenna is Dipole antenna. The maximum Gain of this antenna is 2.5dBi

Page 44 of 62

Report No: 1111214 Date: 2012-03-03



14.0 Maximum Permissible Exposure

Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

(a) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100000			5	6

(b) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100000			1.0	30

Note: f=frequency in MHz; *Plane-wave equivalent power density

MPE Calculation Method

 $E(V/m) = (30*P*G)^{0.5}/d$ Power Density: $Pd(W/m^2) = E^2/377$

 $\mathbf{E} = \text{Electric Field (V/m)}$

P = Peak RF output Power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

 $Pd = (30*P*G) / (377*d^2)$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1111214 Page 45 of 62

Date: 2012-03-03



Calculated Result and Limit

Antenna Gain (Numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm²)	Limit of Power Density (S) (mW/cm²)	Test Result
1.778	18.5	70.795	0.025	1	Compiles

Report No: 1111214 Page 46 of 62

Date: 2012-03-03




15.0 FCC ID Label

FCC ID: V6KX-6H

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

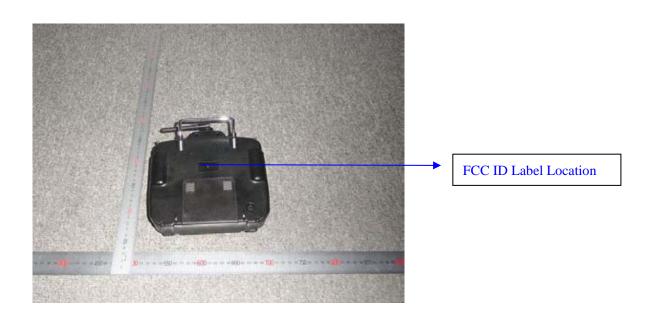

Page 47 of 62

Report No: 1111214 Date: 2012-03-03



16.0 **Photo of testing**

Emission Radiated test View--16.1



Emission Radiated test View--16.2



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 48 of 62

Report No: 1111214 Date: 2012-03-03



16.3 Emission Radiated test View--

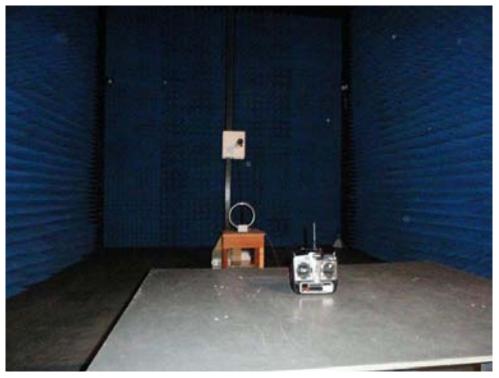

16.4 Conducted Emission test View--



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



Photo for the EUT







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



Outside View-TX for Model: X-6H





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 51 of 62 Report No: 1111214









Interior View -TX for Model: X-6H





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Interior View -TX for Model: X-6H

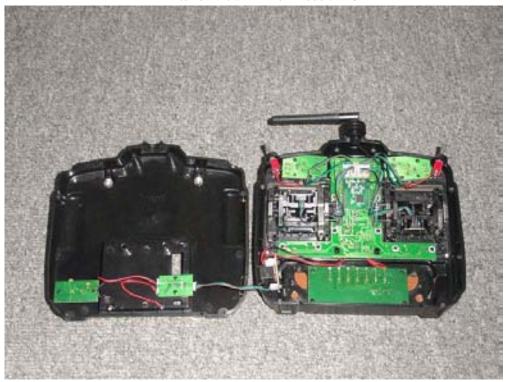



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Interior View -TX for Model: X-6H








Interior View -TX for Model: X-6H

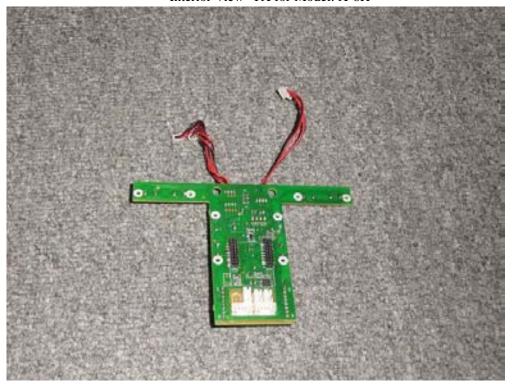





Interior View -TX for Model: X-6H

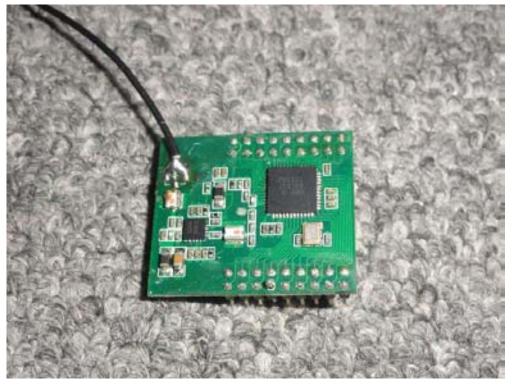





Interior View -TX for Model: X-6H








Interior View -TX for Model: X-6H








Interior View -TX for Model: X-6H

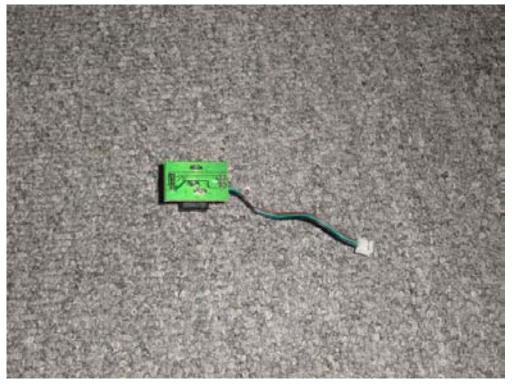

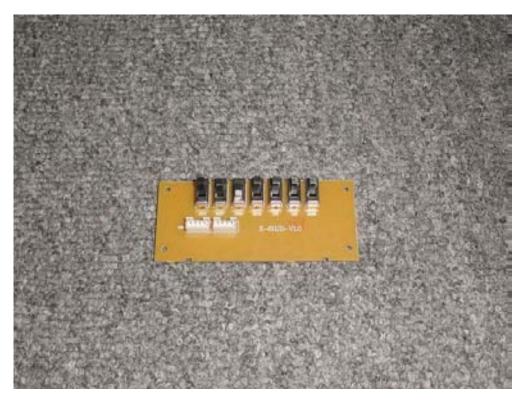




Interior View -TX for Model: X-6H







Interior View -TX for Model: X-6H

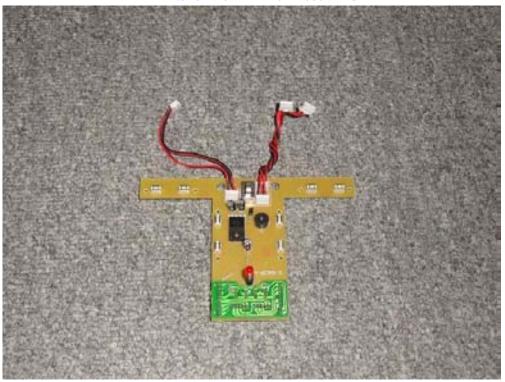



Report No: 1111214 Page 62 of 62 Date: 2012-03-03



Interior View -TX for Model: X-6H



End of the report