



KES Co., Ltd.
C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

TEST REPORT

Part 15 Subpart C 15.231

Equipment under test Transmitter

Model name LM-9000AT

FCC ID V6OLMT9000AT

Applicant QUFIELD CO.,LTD.

Manufacturer QUFIELD CO.,LTD.

Date of test(s) 2013.04.01 ~ 2013.04.16

Date of issue 2013.04.16

Issued to

QUFIELD CO., LTD.
1485-13,BF1, SONGRYONG BLDG. SEOCHO-DONG, SEOCHO-GU,
SEOUL, South Korea

Issued by

KES Co., Ltd.
C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si,
Gyeonggi-do, 431-716, Korea
477-6, Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
Kwang-Yeol Choo Test engineer	Jeff Do Technical manager



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Revision history

Revision	Date of issue	Test report No.	Description
-	2013.04.16	KES-RF-13T0006	Initial



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test frequency	4
1.3.	Information about variant model	4
1.4.	Device modifications	4
1.5.	Test facility	5
1.6.	Laboratory accreditations and listings	5
2.	Summary of tests	6
3.	Test results	7
3.1.	The field strength of fundamental and the field strength of spurious emission	7
3.2.	20 dB bandwidth	12
3.3.	Transmission time	13
Appendix A.	Measurement equipment	15
Appendix B.	Test setup photos	16



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

1. General information

1.1. EUT description

Equipment under test	Transmitter
Model name	LM-9000AT
Serial number	N/A
Frequency Range	433.92 MHz
Modulation technique	ASK
Number of channels	1
Antenna type	Fixed type(Wire antenna)
Power source	DC 12 V(Battery)

1.2. Test frequency

	Low channel	Middle channel	High channel
Frequency (MHz)	433.92	N/A	N/A

1.3. Information about variant model

N/A

1.4. Device modifications

N/A



1.5. Test facility

C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea 477-6,
Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea

The open area test site is constructed in conformance with the requirements ANSI C63.4-2003.

1.6. Laboratory accreditations and listings

Country	Agency	Scope of accreditation	Certificate No.
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	343818
KOREA	KC	EMI (10 meter Open Area Test Site and two conducted sites) Radio (3 & 10 meter Open Area Test Sites and one conducted site)	KR0100
CANADA	IC	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1



2. Summary of tests

Reference	Parameter	Status
15.209(a) 15.231(b)	The field strength of fundamental and the field strength of spurious emission	C
15.231(c)	20 dB bandwidth	C
15.231(a)(1)	Transmission time	C

Note: C=Complies NC=Not complies NT=Not tested NA=Not applicable

3. Test results

3.1. The field strength of fundamental and the field strength of spurious emission

Test location

Testing was performed at a test distance of 3 meter Open Area Test Site

Test procedures

[9 kHz to 30 MHz]

The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Quasi-peak function and specified bandwidth with maximum hold mode.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 200 Hz for Quasi-peak detection (QP) at frequency below 9 kHz~ 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 9 kHz for Quasi-peak detection (QP) at frequency below 150 kHz~ 30 MHz.

[30 MHz to 1 GHz and above 1 GHz]


The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.


The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1 GHz.


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

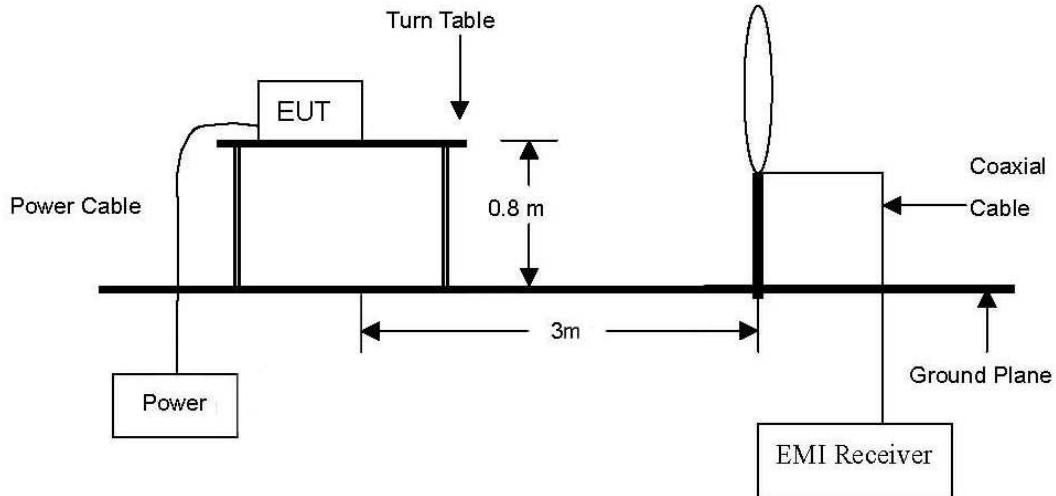

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

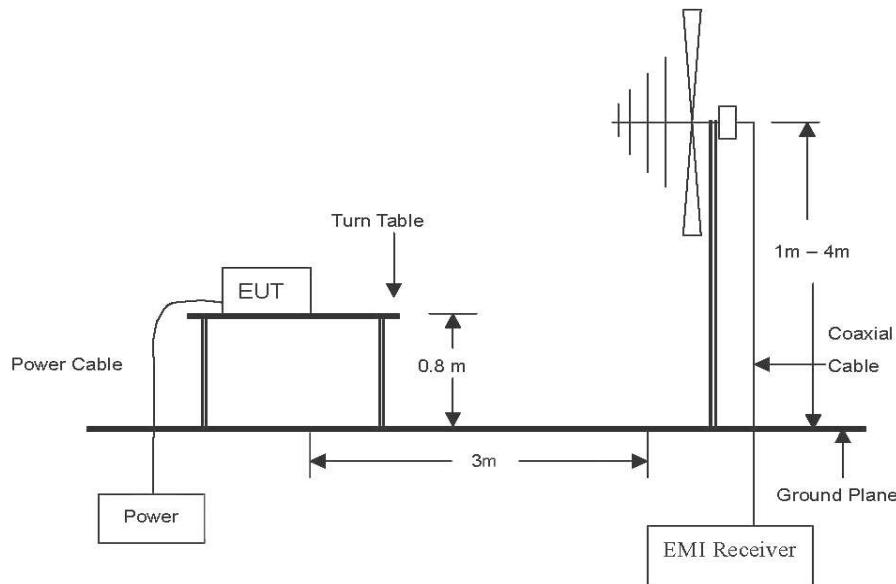

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 5 GHz emissions.

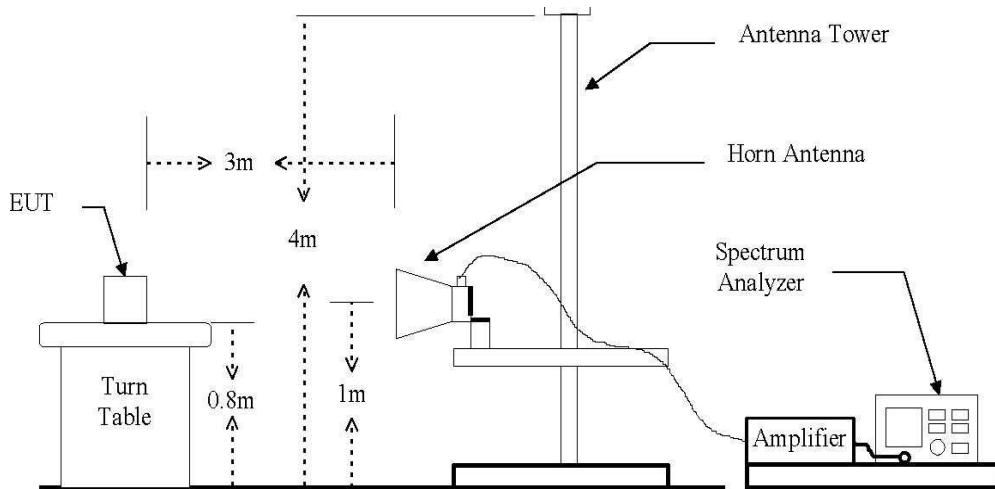

Limit

In the section 15.209:

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400 / F(kHz)
0.490 ~ 1.705	30	24000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

In the section 15.231(b):

In addition to the provisions of section 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts / meter)	Field strength of spurious emission (microvolts / meter)
40.66 ~ 40.70	2,250	225
70 ~ 130	1,250	125
130 ~ 174	1,250 to 3,750**	125 to 375**
174 ~ 260	3,750	375
260 ~ 470	3,750 to 12,500**	375 to 1,250**
Above 470	12,500	1,250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130 ~ 174 MHz, $\mu V/m$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260 ~ 470 MHz, $\mu V/m$ at 3 meters = $41.6667(F) - 7083.333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
 Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Test results

Below 30 MHz – Not applicable

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Fd (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)

* Remark

1. All spurious emission at channels are almost the same below 30 MHz, so that high channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss + Fd
3. $Fd = 40\log(Dm / Ds)$

Where:

Fd = Distance factor in dB
 Dm = Measurement distance in meters
 Ds = Specification distance in meters

Fundamental

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
433.92	55.53	H	15.76	4.43	75.72	100.82	25.1
433.92	45.40	V	15.76	4.43	65.59	100.82	35.23

Spurious emission


Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
867.84	25.54	H	21.82	6.64	54.00	80.82	26.82
867.84	26.18	V	21.82	6.64	54.64	80.82	26.18

* Remark

1. Actual = Reading + Ant. factor + Cable loss
2. Detector mode: Quasi peak
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes

3.2. 20 dB bandwidth

Test setup




Test procedure

1. Use the following spectrum analyzer setting
2. RBW = 10 kHz
3. VBW = 30 kHz (\geq RBW)
4. Span = 1 MHz
5. Detector function = peak
6. Trace = max hold

Limit


The bandwidth of the emissions shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test results

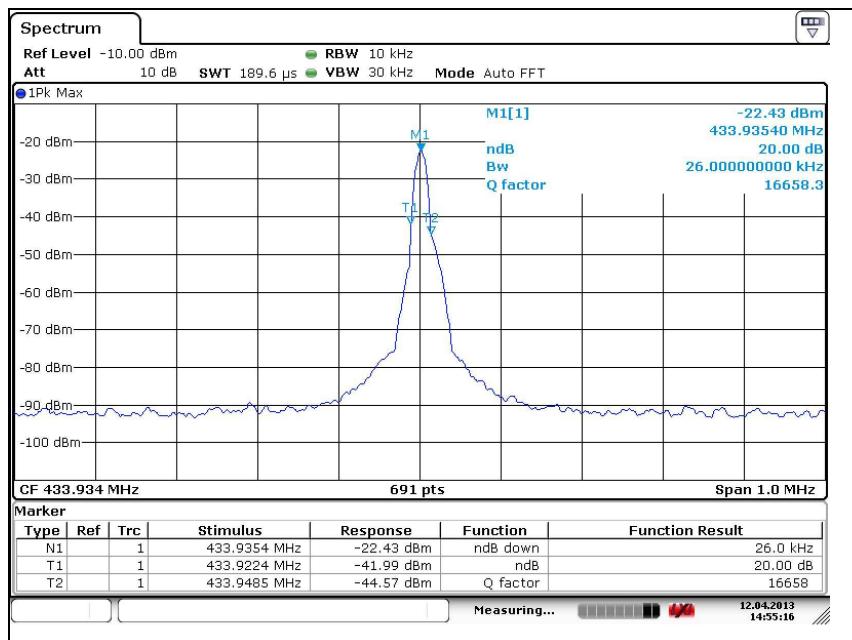

3.3. Transmission time

Test setup



Test procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=20 kHz, VBW=20 kHz, Span=0 Hz and Sweep time=10 sec.

Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test results

Transmission time

Frequency(MHz)	Transmission time (sec)	Limit (s)
433.92	0.4493	Same or less than 5



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Calibration due.
Spectrum Analyzer	R&S	FSV30	2014.01.09
Vector Signal Generator	R&S	SMBV2100A	2014.01.10
Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	2013.10.25
EMI Test Receiver	R&S	ESHS10	2013.05.04

Peripheral device

Device	Manufacturer	Model No.	Serial No.
N/A			

Appendix B. Test setup photos