

FCC Radio Test Report

FCC ID: V7TA18

This report concerns: Class II Change

Project No. : 1710C164C
Equipment : AC1200 Dual Band WiFi Repeater, AC750 Dual Band WiFi Repeater
Brand Name : Tenda
Test Model : A18
Series Model : A15
Applicant : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Manufacturer : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Date of Receipt : May 06, 2020
Date of Test : May 22, 2020 ~ May 27, 2020
Issued Date : Jun. 18, 2020
Report Version : R00
Test Sample : Engineering Sample No.: D171008586, DG20200520146
Standard(s) : FCC Part15, Subpart C (15.247)
 ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 EUT TEST CONDITIONS	12
3.1.7 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 EUT TEST CONDITIONS	16
3.2.7 TEST RESULTS (9KHZ TO 30MHZ)	16
3.2.8 TEST RESULTS (30MHZ TO 1000MHZ)	16
4 . MEASUREMENT INSTRUMENTS LIST	17
5 . EUT TEST PHOTO	18
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	21
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	26
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	31

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Compared with previous report (BTL-FCCP-1-1710C164), Changed the power board. So the test data of radiated emissions below 1GHz and AC Power Conducted Emissions have been re-evaluated and recorded in the test report, the original test results please refer to original report.	Jun. 18, 2020

Remark: For the original report (BTL-FCCP-1-1710C164), the test data, data evaluation and equipment configuration contained was accredited by the Authority of NVLAP according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(d) 15.205(a) 15.209(a)	Transmitter Radiated Emissions	PASS	--

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Dual Band WiFi Repeater	
Brand Name	Tenda	
Test Model	A18	
Series Model	A15	
Model Difference(s)	Only differ in product name and model name.	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 18.32dBm 802.11g: 27.23dBm 802.11n(20MHz): 29.38dBm 802.11n(40MHz): 29.12dBm
Power Source	AC Mains.	
Power Rating	AC100-240V 50/60Hz 0.3A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20MHz)							
CH03 - CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Dipole	N/A	3	N/A
2	N/A	N/A	Dipole	N/A	3	N/A

Note:

This EUT supports MIMO, and all antennas have the same gain.

Antenna Gain=3 dBi. This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $G_{ANT} + 10\log(N)$ dBi, that is Directional gain=3+10log(2)dBi=6.01

So, the output power limit is 30-(6.01-6)=29.99, the power spectra density limit is 8-(6.01-6)=7.99.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 06
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX N-20MHZ MODE CHANNEL 01/06/11

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX N-20MHZ MODE CHANNEL 06

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 06
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : BPSK (13Mbps)
802.11n HT40 mode : BPSK (27Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the TX N-20MHZ MODE CHANNEL 06 is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	MP_TEST		
Frequency (MHz)	2412	2437	2462
802.11b	41	43	46
802.11g	55	63	53
802.11n (20MHz)	55	62	53
Frequency (MHz)	2422	2437	2452
802.11n (40MHz)	53	63	52

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

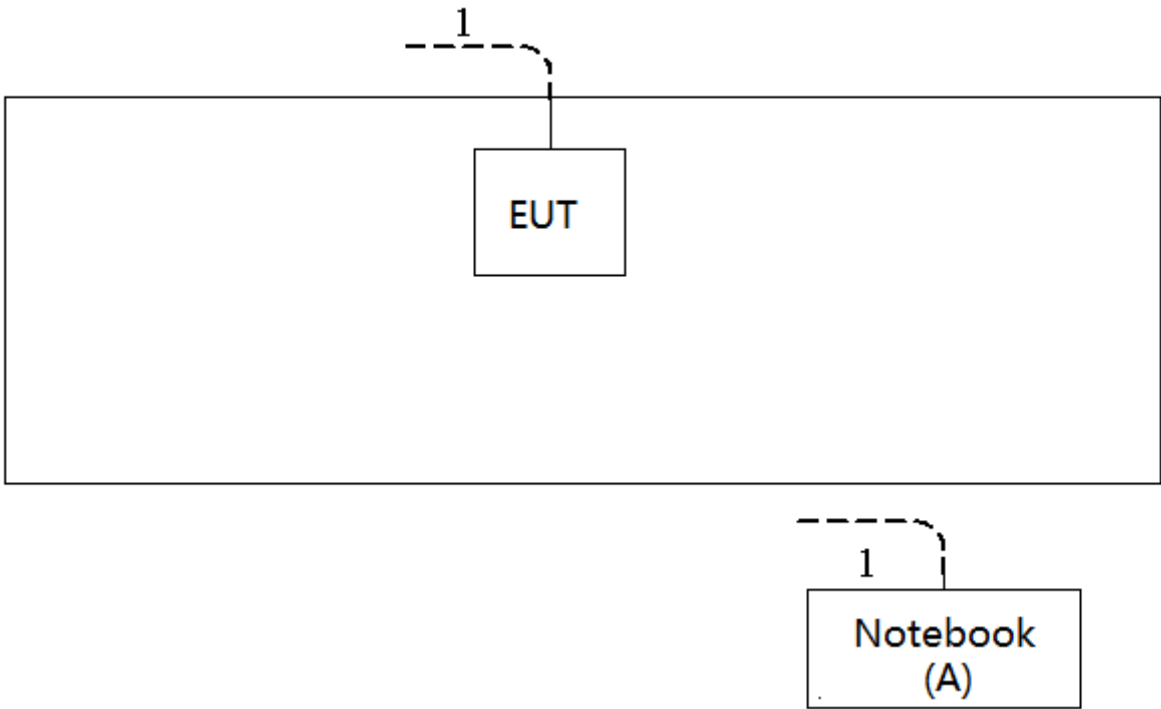

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Notebook	Dell	DCSM	G7K832X

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	10m	RJ45 Cable

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

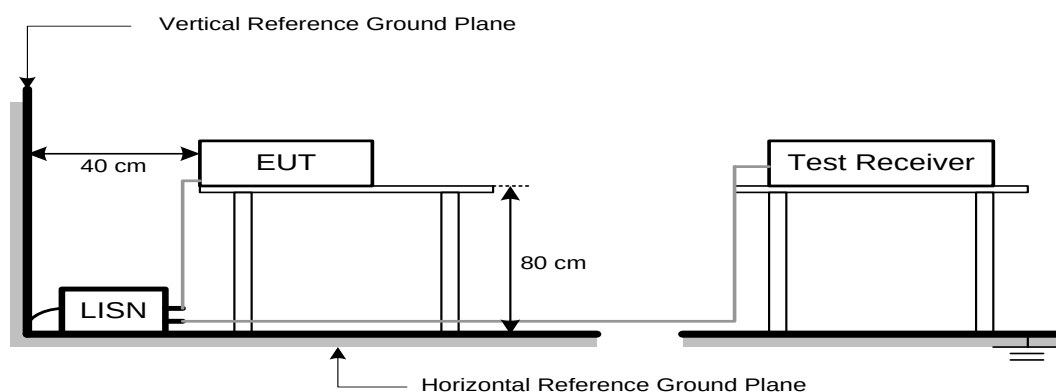

3.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

3.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

3.1.7 TEST RESULTS

Please refer to the Appendix A.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

3.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

9 kHz-30 MHz

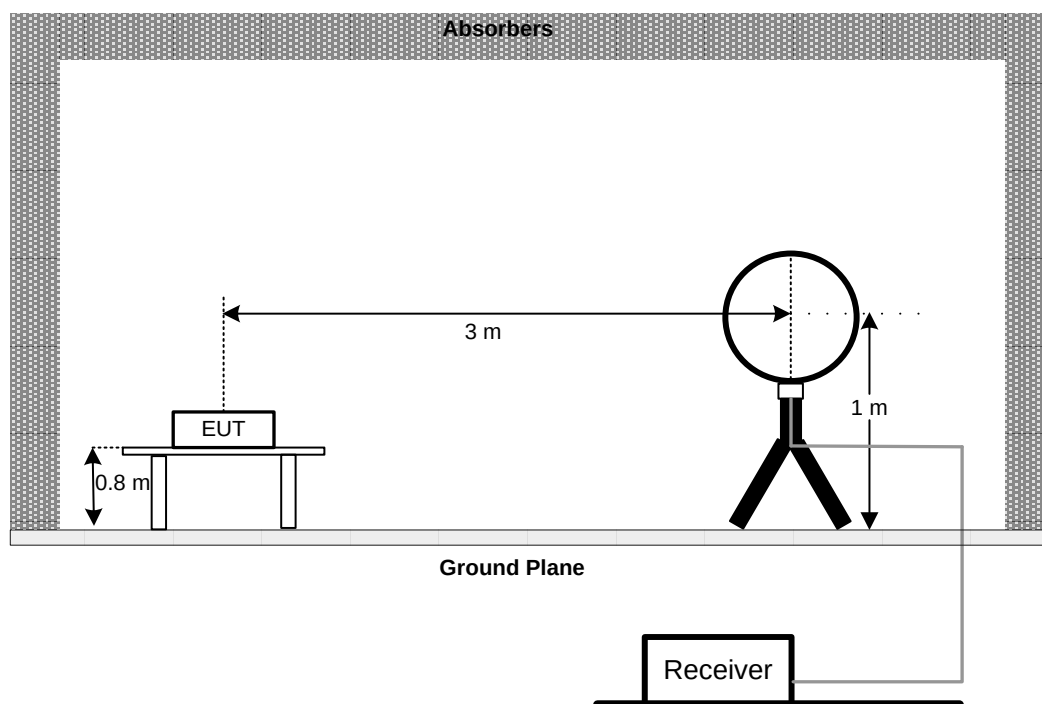

30 MHz to 1 GHz

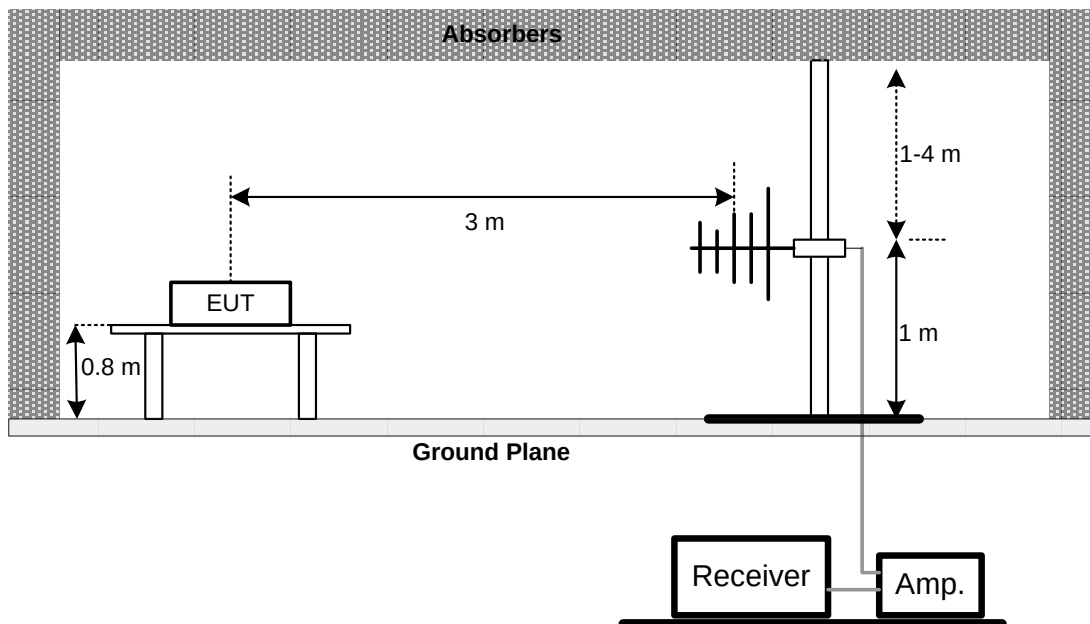

3.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

3.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

3.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

4. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	C-102	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A08742	Mar. 01, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May. 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

"*" calibration period of equipment list is three year.

All calibration period of equipment list is one year.

5. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos

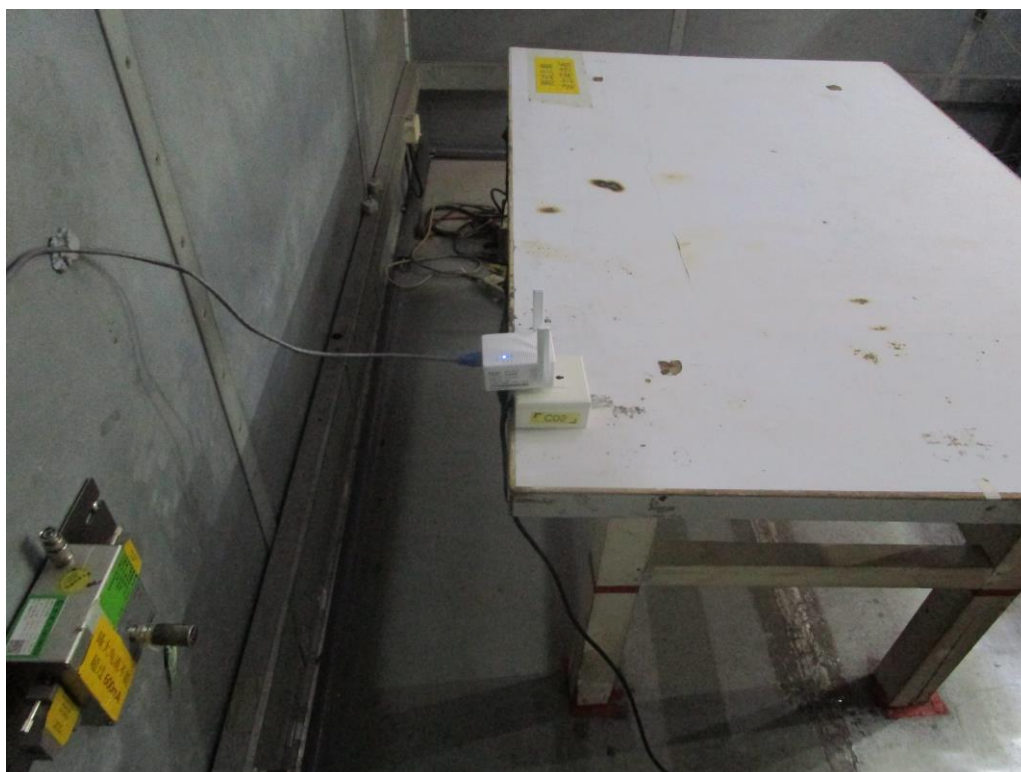

Radiated Emissions Test Photos

9KHz to 30MHz



Radiated Emissions Test Photos


30MHz to 1000MHz



APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode:	TX N-20MHZ MODE CHANNEL 06
Test Voltage:	AC 120V / 60Hz


Line

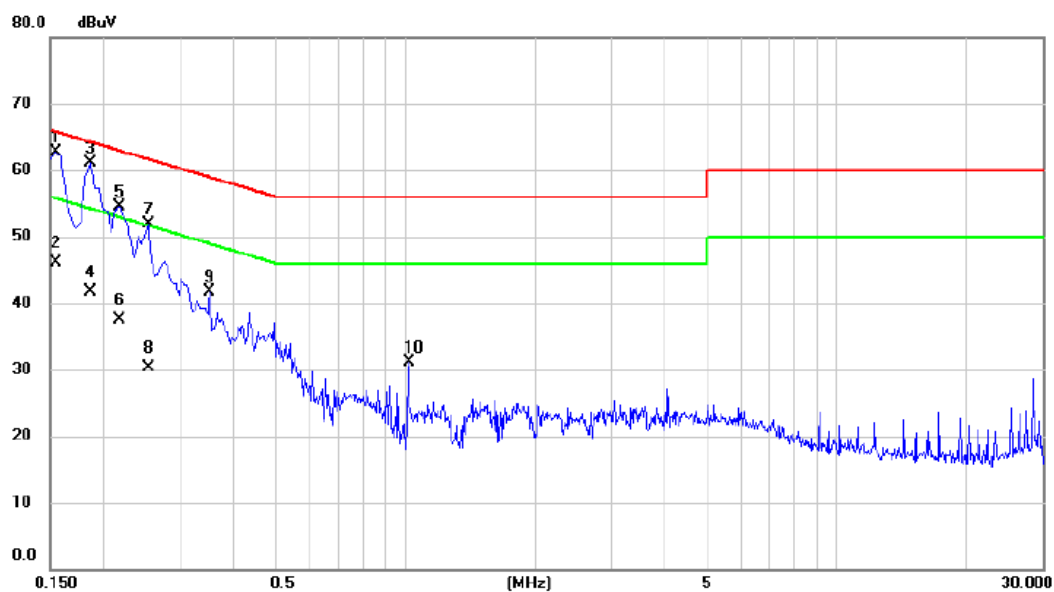

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1545	53.02	9.70	62.72	65.75	-3.03	peak	
2		0.1545	36.50	9.70	46.20	55.75	-9.55	AVG	
3		0.1860	51.16	9.86	61.02	64.21	-3.19	peak	
4		0.1860	31.80	9.86	41.66	54.21	-12.55	AVG	
5		0.2175	44.65	9.90	54.55	62.91	-8.36	peak	
6		0.2175	27.60	9.90	37.50	52.91	-15.41	AVG	
7		0.2535	42.08	9.88	51.96	61.64	-9.68	peak	
8		0.2535	20.40	9.88	30.28	51.64	-21.36	AVG	
9		0.3525	31.70	9.91	41.61	58.90	-17.29	peak	
10		1.0184	21.16	10.01	31.17	56.00	-24.83	peak	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
Test Voltage:	AC 120V / 60Hz


Neutral

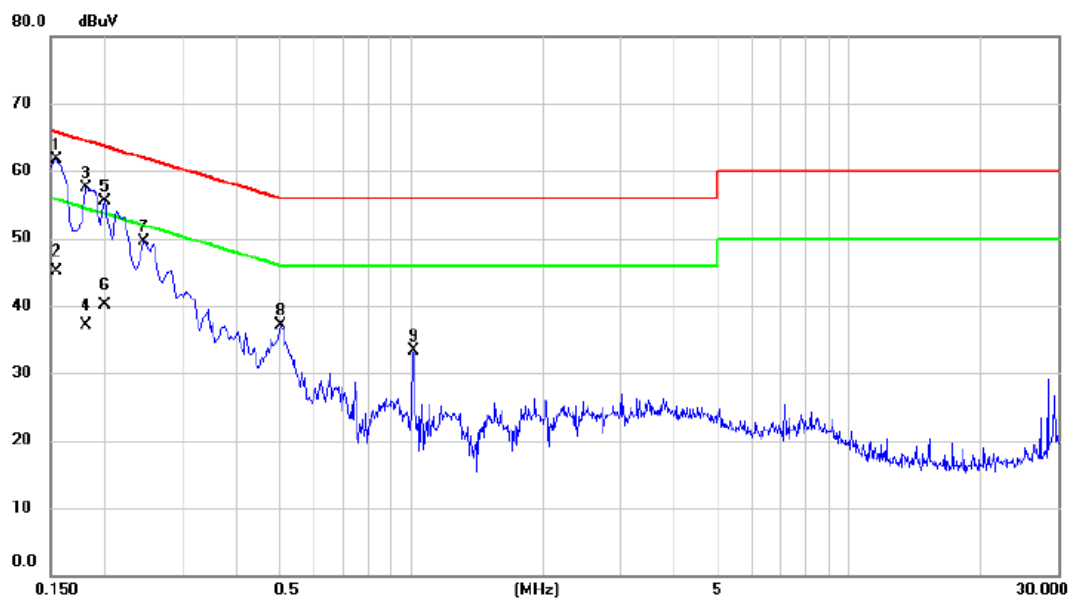

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1545	51.99	9.77	61.76	65.75	-3.99	peak	
2		0.1545	35.30	9.77	45.07	55.75	-10.68	AVG	
3		0.1815	47.55	9.94	57.49	64.42	-6.93	peak	
4		0.1815	27.10	9.94	37.04	54.42	-17.38	AVG	
5		0.1995	45.58	10.01	55.59	63.63	-8.04	peak	
6		0.1995	30.10	10.01	40.11	53.63	-13.52	AVG	
7		0.2445	39.46	9.97	49.43	61.94	-12.51	peak	
8		0.5055	26.93	10.14	37.07	56.00	-18.93	peak	
9		1.0140	23.09	10.30	33.39	56.00	-22.61	peak	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
Test Voltage:	AC 240V / 50Hz


Line

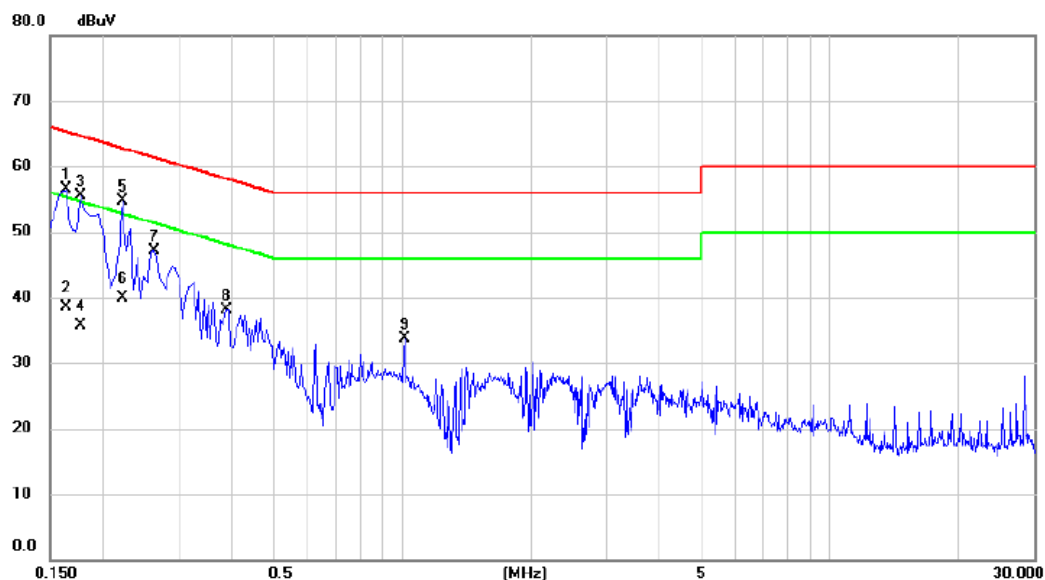

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1635	46.72	9.77	56.49	65.28	-8.79	peak	
2		0.1635	28.70	9.77	38.47	55.28	-16.81	AVG	
3		0.1770	45.57	9.84	55.41	64.63	-9.22	peak	
4		0.1770	25.90	9.84	35.74	54.63	-18.89	AVG	
5	*	0.2220	44.78	9.89	54.67	62.74	-8.07	peak	
6		0.2220	30.10	9.89	39.99	52.74	-12.75	AVG	
7		0.2625	37.23	9.88	47.11	61.35	-14.24	peak	
8		0.3885	28.21	9.92	38.13	58.10	-19.97	peak	
9		1.0140	23.71	10.01	33.72	56.00	-22.28	peak	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
Test Voltage:	AC 240V / 50Hz

Neutral

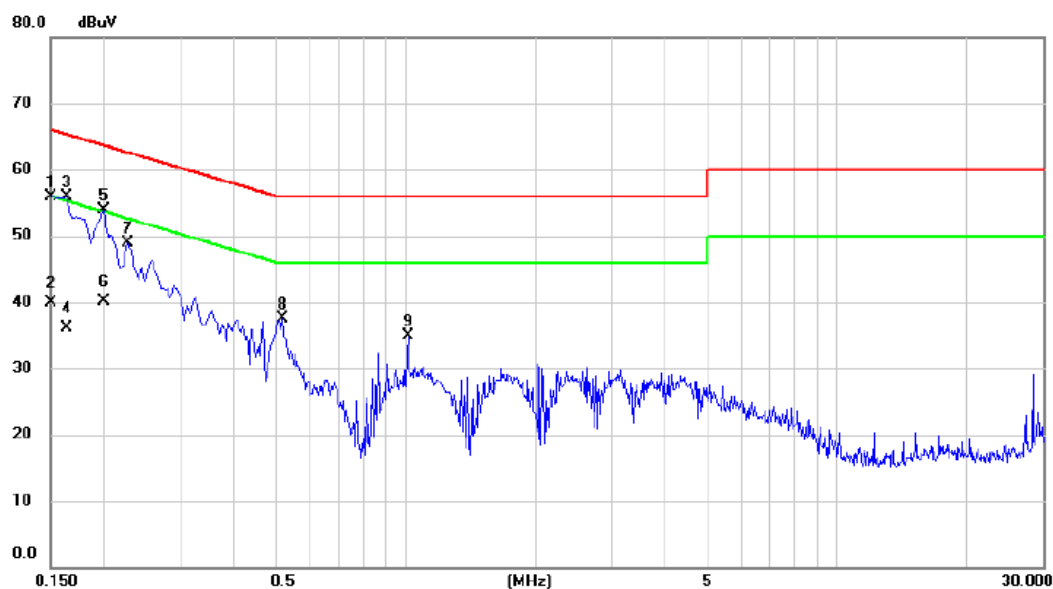


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	46.15	9.74	55.89	66.00	-10.11	peak	
2		0.1500	30.10	9.74	39.84	56.00	-16.16	AVG	
3	*	0.1635	46.02	9.85	55.87	65.28	-9.41	peak	
4		0.1635	26.30	9.85	36.15	55.28	-19.13	AVG	
5		0.1995	43.80	10.01	53.81	63.63	-9.82	peak	
6		0.1995	30.10	10.01	40.11	53.63	-13.52	AVG	
7		0.2265	38.95	9.99	48.94	62.58	-13.64	peak	
8		0.5190	27.34	10.15	37.49	56.00	-18.51	peak	
9		1.0140	24.61	10.30	34.91	56.00	-21.09	peak	

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------


Ant 0°

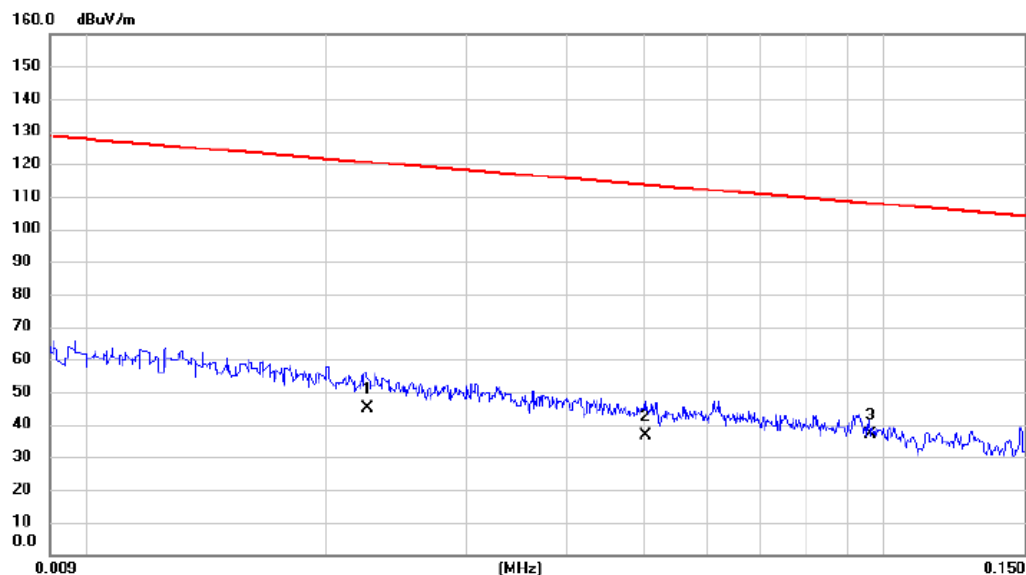

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0225	31.76	13.05	44.81	120.56	-75.75	AVG	
2		0.0502	24.28	12.33	36.61	113.59	-76.98	AVG	
3	*	0.0960	24.43	12.62	37.05	107.96	-70.91	QP	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------


Ant 0°

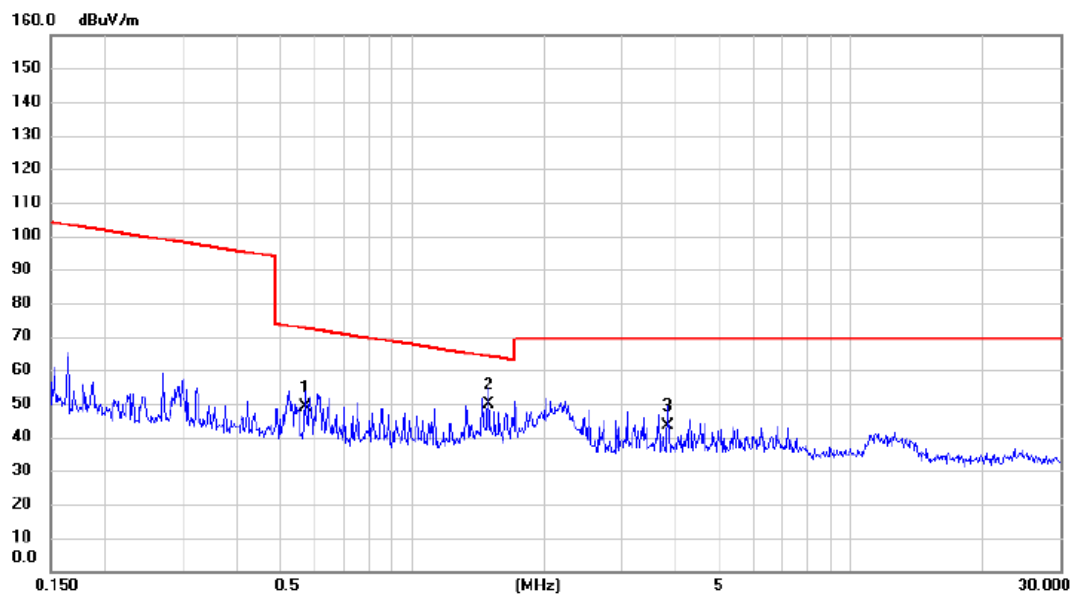

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.5701	37.46	11.74	49.20	72.48	-23.28	QP	
2	*	1.4953	38.36	11.31	49.67	64.11	-14.44	QP	
3		3.8196	32.95	10.48	43.43	69.54	-26.11	QP	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------


Ant 90°

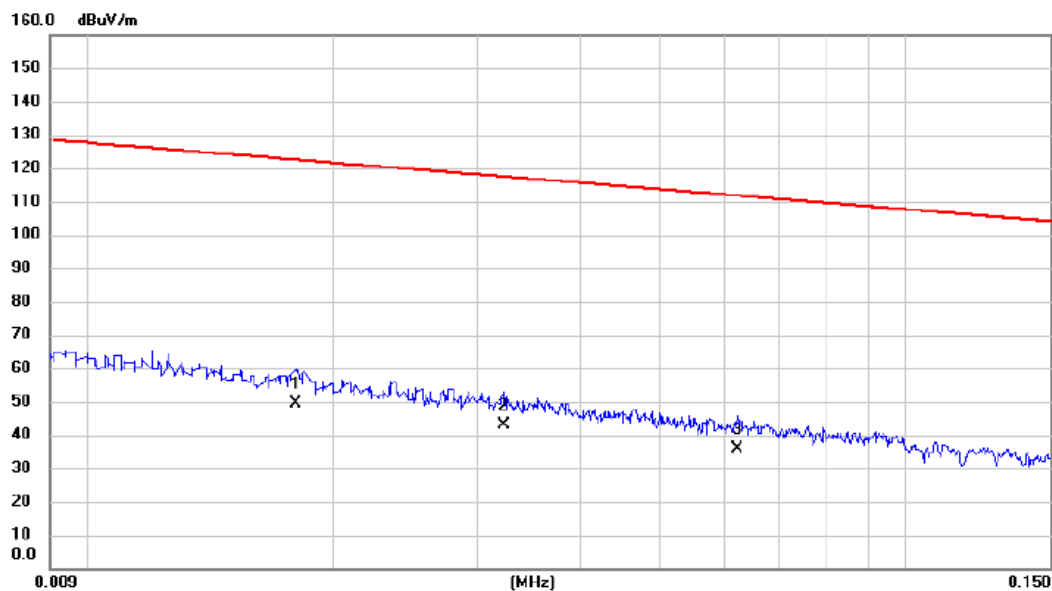

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0180	35.85	13.74	49.59	122.50	-72.91	AVG	
2		0.0323	30.29	12.80	43.09	117.42	-74.33	AVG	
3		0.0623	23.34	12.40	35.74	111.72	-75.98	AVG	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------

Ant 90°

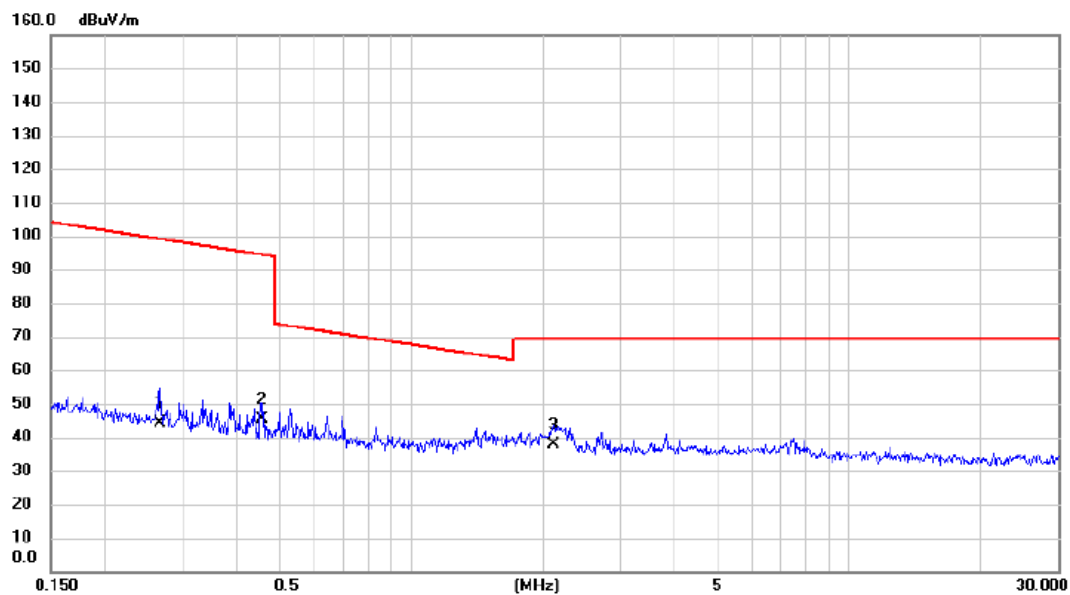


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2672	31.93	12.46	44.39	99.07	-54.68	AVG	
2		0.4564	33.34	11.89	45.23	94.42	-49.19	AVG	
3	*	2.1213	26.76	10.95	37.71	69.54	-31.83	QP	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------


Vertical

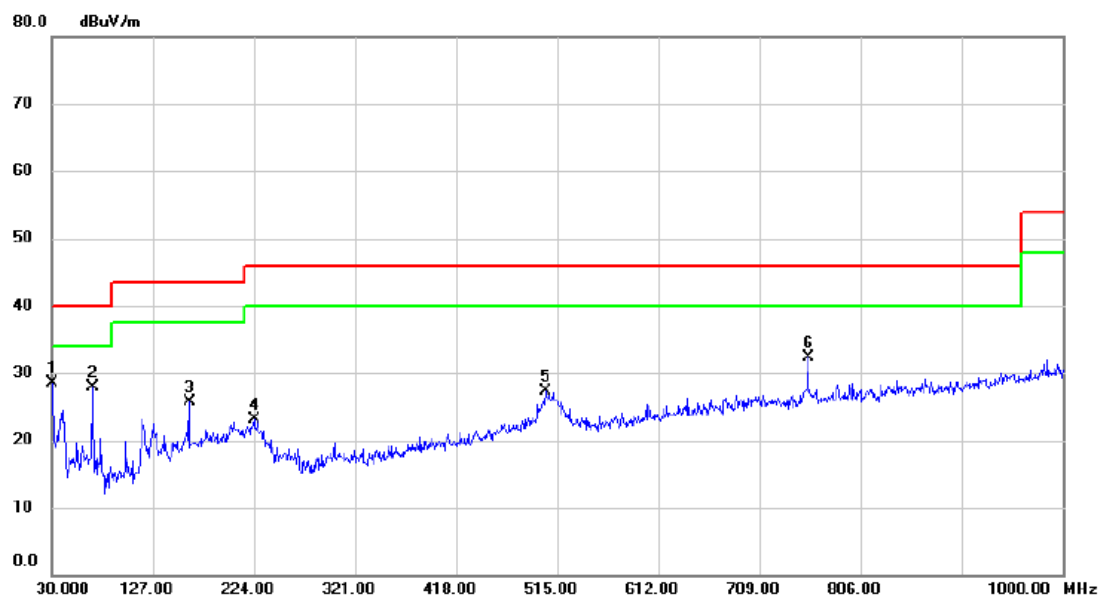

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.000	43.19	-14.60	28.59	40.00	-11.41	peak	
2		68.800	43.54	-15.54	28.00	40.00	-12.00	peak	
3		161.920	36.58	-10.79	25.79	43.50	-17.71	peak	
4		224.000	36.95	-13.90	23.05	46.00	-22.95	peak	
5		503.360	34.28	-6.94	27.34	46.00	-18.66	peak	
6		755.560	35.09	-2.69	32.40	46.00	-13.60	peak	

Test Mode:	TX N-20MHZ MODE CHANNEL 06
------------	----------------------------

Horizontal

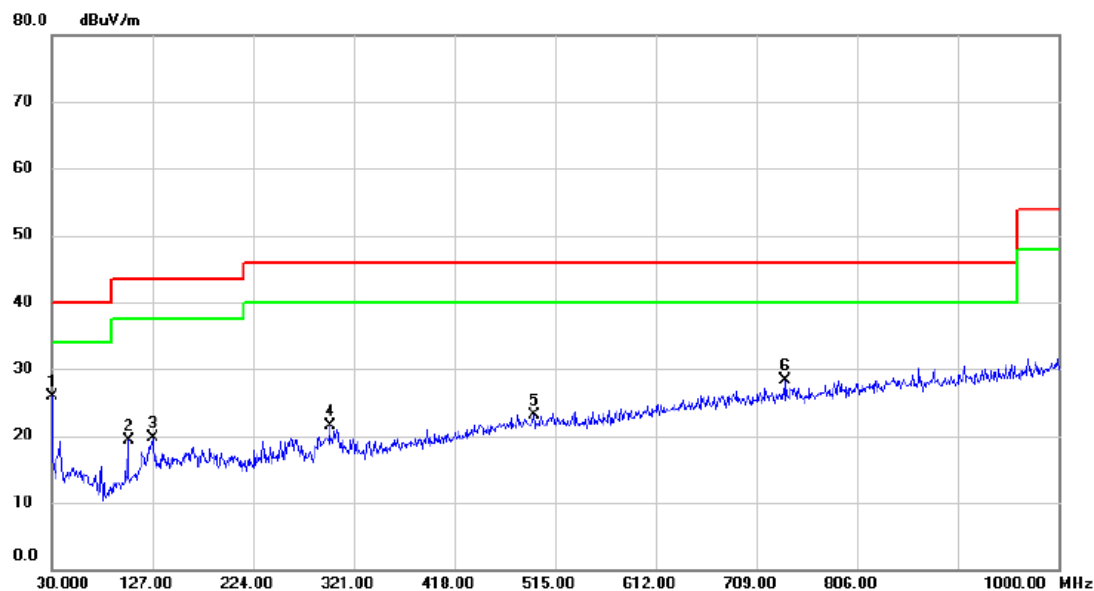

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	30.000	40.42	-14.60	25.82	40.00	-14.18	peak	
2		103.720	33.85	-14.55	19.30	43.50	-24.20	peak	
3		127.000	32.35	-12.61	19.74	43.50	-23.76	peak	
4		297.720	32.43	-10.89	21.54	46.00	-24.46	peak	
5		494.630	30.02	-7.00	23.02	46.00	-22.98	peak	
6		737.130	31.11	-2.88	28.23	46.00	-17.77	peak	

End of Test Report