



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Address: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

FCC ID: V7TRX12P

Product Name: AX3000 Dual Band Gigabit WiFi 6 Router

Model Number: RX12 Pro, TX12 Pro

**Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22080019-00B

Date Of Issue: 2022-11-15

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH:	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER:	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	21
3.5 MAXIMUM POWER SPECTRAL DENSITY:	22
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	22
3.5.3 Test Procedure	22
3.7 DUTY CYCLE:.....	23
3.7.1 EUT Setup.....	23
3.7.2 Test Procedure	23
3.8 ANTENNA REQUIREMENT.....	24
3.8.1 Applicable Standard.....	24
3.8.2 Judgment.....	24

4. Test DATA AND RESULTS	25
4.1 AC LINE CONDUCTED EMISSIONS	25
4.2 RADIATION SPURIOUS EMISSIONS	28
4.3 EMISSION BANDWIDTH:	62
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	110
4.5 MAXIMUM POWER SPECTRAL DENSITY:	114
4.6 DUTY CYCLE:	162
5. RF EXPOSURE EVALUATION	167
5.1 APPLICABLE STANDARD	167
5.2 MEASUREMENT RESULT	167

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	AX3000 Dual Band Gigabit WiFi 6 Router
EUT Model:	RX12 Pro
Multiple Model:	TX12 Pro
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz(802.11n ht40/ac vht40/ax hew40) 5210 MHz(802.11ac vht80/ax hew80) 5260-5320 MHz (802.11a/n ht20/ac vht20/ax hew20) 5270-5310 MHz(802.11n ht40/ac vht40/ax hew40) 5290 MHz(802.11ac vht80/ax hew80) 5250 MHz(802.11ac vht160/ax hew160) 5745-5825 MHz (802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz(802.11n ht40/ac vht40/ax hew40) 5775 MHz(802.11ac vht80/ax hew80)
Maximum Average Output Power (Conducted):	21.98 dBm (5150-5250 MHz) 16.01 dBm (5250-5350 MHz) 25.47 dBm (5725-5850 MHz)
Modulation Type:	802.11a/n/ac/ax:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 12V from adapter
Serial Number:	CR22080019-RF-S1
EUT Received Date:	2022.08.15
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20/ax hew20:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	149	5745
40	5200	56	5280	153	5765
44	5220	60	5300	157	5785
48	5240	64	5320	161	5805
/	/	/	/	165	5825
Per section 15.31(m), the above in bold frequencies were performed the test.					

For 802.11n ht40/ac vht40/ax hew40:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	151	5755
46	5230	62	5310	159	5795
Per section 15.31(m), the above in bold frequencies were performed the test.					

For 802.11ac vht80/ax hew80:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	155	5775

Per section 15.31(m), the above in bold frequencies were performed the test.

For 802.11ac vht160/ax hew160:

5150-5250MHz Band~5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
50	5250	/	/

Per section 15.31(m), the above in bold frequencies were performed the test.

1.1.3 Antenna Information Detail▲:

Antenna Chain/Usage	Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
5G Chain 0	Tenda	Dipole	50	5.15-5.85GHz	6.0 dBi
5G Chain 1	Tenda	Dipole	50	5.15-5.85GHz	6.0 dBi

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.
☐ Antenna must use a unique type of connector to attach to the EUT.
☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN HEWEISHUN NETWORK TECHNOLOGY CO.,LTD.	BN074-A18012U	Input:100-240V, 50~60Hz,0.6A Output:12V,1.5A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer.			
Equipment Modifications:			No			
EUT Exercise Software:			accessMTool_REL_3_2_1_3			
The software "accessMTool_REL_3_2_1_3"was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Power level	
					Chain 0	Chain 1
5150-5250 MHz	802.11a	Low	5180	6Mbps	90	80
		Middle	5200	6Mbps	90	80
		High	5240	6Mbps	90	80
	802.11n ht20	Low	5180	MCS0	90	90
		Middle	5200	MCS0	90	90
		High	5240	MCS0	90	90
	802.11n ht40	Low	5190	MCS0	90	90
		High	5230	MCS0	90	90
	802.11ac vht20	Low	5180	MCS0	85	85
		Middle	5200	MCS0	85	85
		High	5240	MCS0	83	83
	802.11ac vht40	Low	5190	MCS0	92	92
		High	5230	MCS0	90	90
	802.11ac vht80	Middle	5210	MCS0	80	80
	802.11ax hew20	Low	5180	MCS0	80	80
		Middle	5200	MCS0	80	80
		High	5240	MCS0	80	80
	802.11ax hew40	Low	5190	MCS0	80	80
		High	5230	MCS0	80	80
	802.11ax hew80	Middle	5210	MCS0	80	80

Band	Mode	Channel	Frequency (MHz)	Data Rate	Power level	
					Chain 0	Chain 1
5250-5350 MHz	802.11a	Low	5260	6Mbps	78	65
		Middle	5280	6Mbps	78	65
		High	5320	6Mbps	75	65
	802.11n ht20	Low	5260	MCS0	45	45
		Middle	5280	MCS0	45	45
		High	5320	MCS0	45	45
	802.11n ht40	Low	5270	MCS0	60	60
		High	5310	MCS0	55	55
	802.11ac vht20	Low	5260	MCS0	45	45
		Middle	5280	MCS0	45	45
		High	5320	MCS0	45	45
	802.11ac vht40	Low	5270	MCS0	60	60
		High	5310	MCS0	55	55
	802.11ac vht80	Middle	5290	MCS0	68	68
	802.11ax hew20	Low	5260	MCS0	40	40
		Middle	5280	MCS0	40	40
		High	5320	MCS0	40	40
	802.11ax hew40	Low	5270	MCS0	55	55
		High	5310	MCS0	68	68
	802.11ax hew80	Middle	5290	MCS0	68	68
Cross Band	802.11ac vht160	Middle	5250	MCS0	60	60
	802.11ax hew160	Middle	5250	MCS0	60	60
5725-5850 MHz	802.11a	Low	5745	6Mbps	90	90
		Middle	5785	6Mbps	90	90
		High	5825	6Mbps	90	90
	802.11n ht20	Low	5745	MCS0	90	90
		Middle	5785	MCS0	90	90
		High	5825	MCS0	90	90
	802.11n ht40	Low	5755	MCS0	90	90
		High	5795	MCS0	90	90
	802.11ac vht20	Low	5745	MCS0	90	90
		Middle	5785	MCS0	90	90
		High	5825	MCS0	90	90
	802.11ac vht40	Low	5755	MCS0	90	90
		High	5795	MCS0	90	90
	802.11ac vht80	Middle	5775	MCS0	90	90
	802.11ax hew20	Low	5745	MCS0	40	40
		Middle	5785	MCS0	40	40
		High	5825	MCS0	40	40
	802.11ax hew40	Low	5755	MCS0	55	55
		High	5795	MCS0	55	55
	802.11ax hew80	Middle	5775	MCS0	68	68

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac/ax modes.

The system supports Beamforming and Non-beamforming modes at 802.11n/ac/ax modes. The two modes have same output power, and the Beamforming mode has an additional 3dBi gain▲, which are declared by manufacturer. Therefore, the all RF conducted test were performed at Non-beamforming mode only.

1.2.2 Support Equipment List and Details

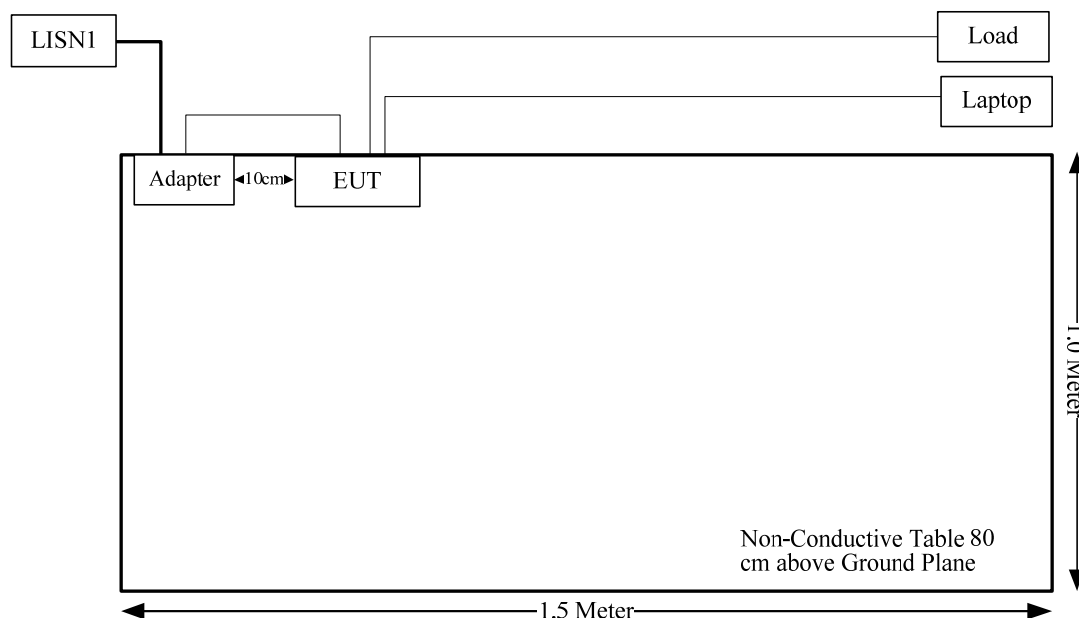
Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
Unknown	Load	Load-1	Load-1

1.2.3 Support Cable List and Details

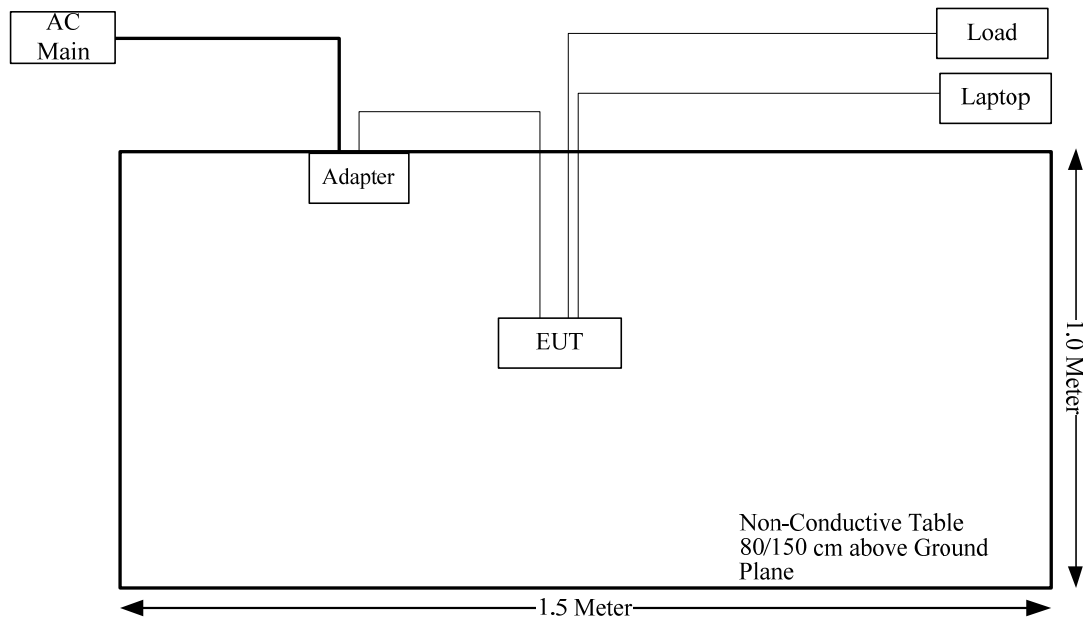
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	5	EUT	Laptop
RJ45 Cable*3	Yes	No	5	EUT	Load

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:



Spurious Emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Conducted Transmitter Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant ^{Note}
FCC§15.203	Antenna Requirement	Compliant
§1.1307 & §2.1091	RF Exposure Evaluation	Compliant
Note: Dynamic Frequency Selection (DFS) test please refer to the DFS report: CR22080019-DFS.		

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

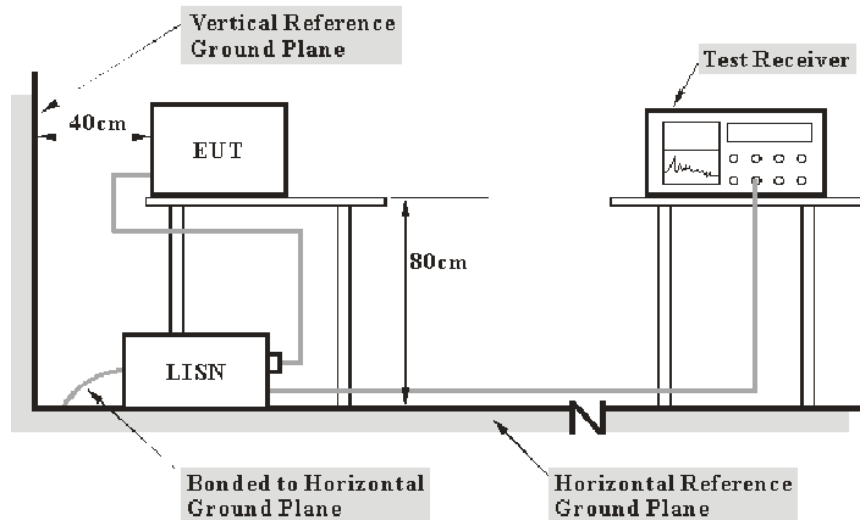
(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

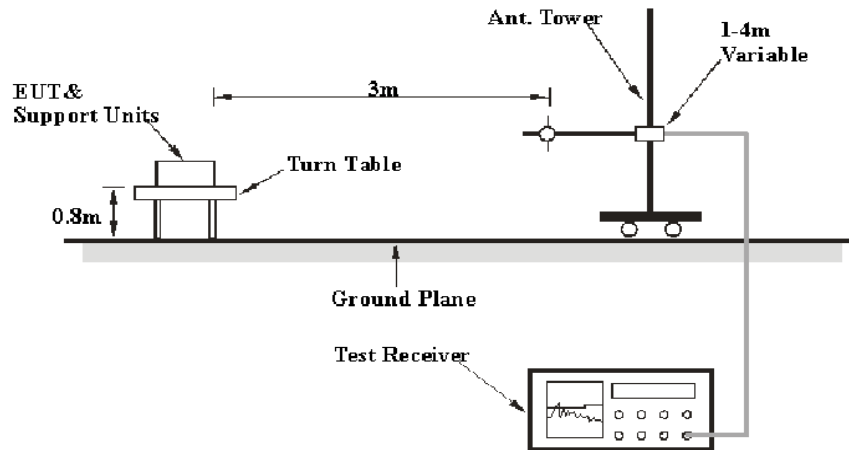
FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

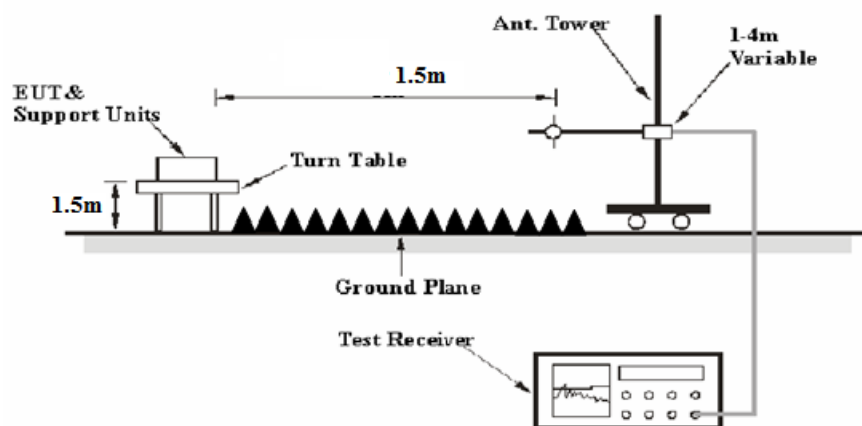
- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
 - (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
 - (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
 - (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
 - (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:



1-40 GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.407 (a)

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

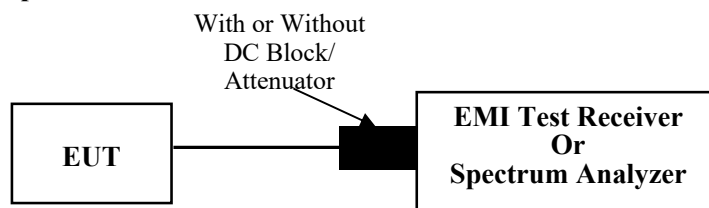
FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

FCC §15.407 (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

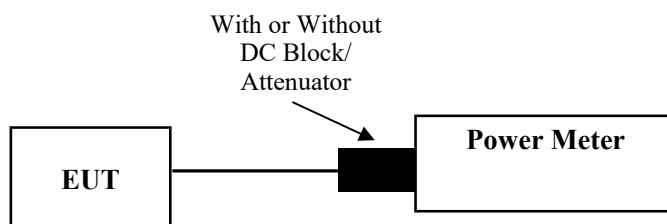
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

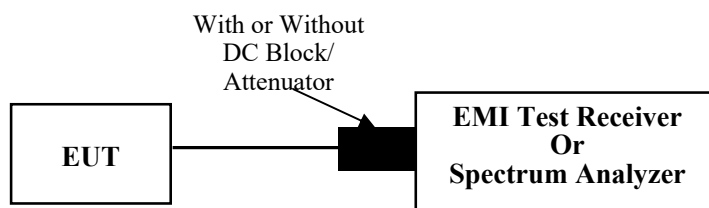
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Method SA-3 (power averaging (rms) detection with max hold):

(i) Set span to encompass the entire EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set sweep trigger to “free run.”

(iii) Set RBW = 1 MHz.

(iv) Set VBW ≥ 3 MHz

(v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time $\leq (\text{number of points in sweep}) \times T$, where T is defined in II.B.1.a).

Note: If this results in a sweep time less than the auto sweep time of the analyzer, Method SA-3 Alternative shall not be used. (The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.)

(vii) Detector = power averaging (rms).

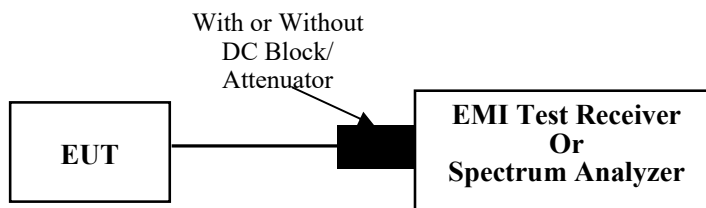
(viii) Trace mode = max hold.

(ix) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.
- 3) Set VBW $\geq$ RBW. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu\text{s}$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22080019-RF-S1	Test Date:	2022-09-01
Test Site:	CE	Test Mode:	Transmitting (802.11a chain 0 5785MHz was the worst)
Tester:	Vic Du	Test Result:	Pass

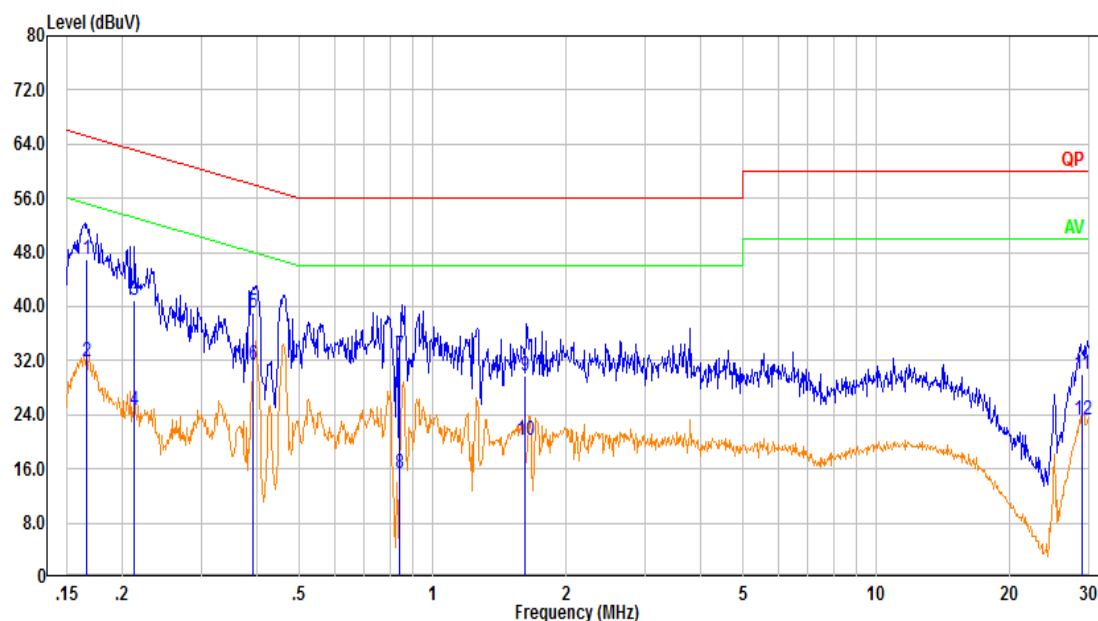
Environmental Conditions:

Temperature: (°C)	27.3	Relative Humidity: (%)	68	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

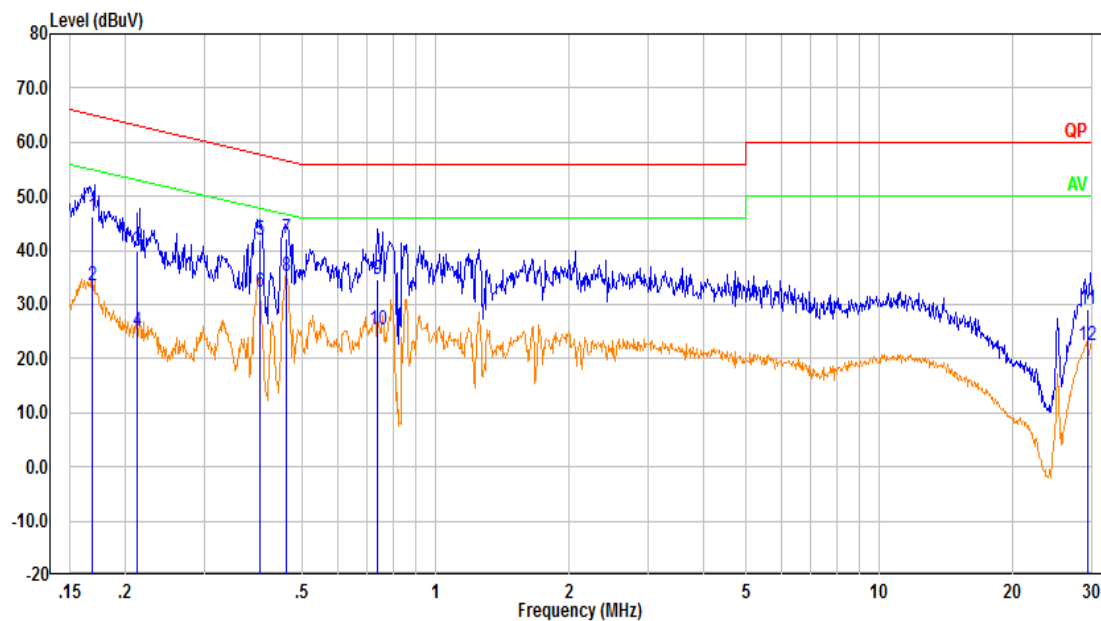
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022-04-01	2023-03-31
R&S	EMI Test Receiver	ESR3	102726	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022-08-07	2023-08-06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.166	37.26	9.61	46.87	65.18	18.31	QP
2	0.166	22.36	9.61	31.97	55.18	23.21	Average
3	0.212	31.27	9.61	40.88	63.12	22.24	QP
4	0.212	15.01	9.61	24.62	53.12	28.50	Average
5	0.392	29.45	9.61	39.06	58.02	18.96	QP
6	0.392	21.83	9.61	31.44	48.02	16.58	Average
7	0.839	23.26	9.62	32.88	56.00	23.12	QP
8	0.839	5.82	9.62	15.44	46.00	30.56	Average
9	1.612	20.09	9.63	29.72	56.00	26.28	QP
10	1.612	10.54	9.63	20.17	46.00	25.83	Average
11	29.078	20.11	9.82	29.93	60.00	30.07	QP
12	29.078	13.46	9.82	23.28	50.00	26.72	Average

Neutral:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.168	36.53	9.61	46.14	65.07	18.93	QP
2	0.168	23.74	9.61	33.35	55.07	21.72	Average
3	0.213	30.24	9.61	39.85	63.11	23.26	QP
4	0.213	15.55	9.61	25.16	53.11	27.95	Average
5	0.402	32.21	9.61	41.82	57.80	15.98	QP
6	0.402	22.82	9.61	32.43	47.80	15.37	Average
7	0.459	32.47	9.61	42.08	56.70	14.62	QP
8	0.459	25.76	9.61	35.37	46.70	11.33	Average
9	0.740	25.10	9.62	34.72	56.00	21.28	QP
10	0.740	15.86	9.62	25.48	46.00	20.52	Average
11	29.398	19.43	9.81	29.25	60.00	30.75	QP
12	29.398	12.69	9.81	22.51	50.00	27.49	Average

4.2 Radiation Spurious Emissions

Serial Number:	CR22080019-RF-S1	Test Date:	2022-09-01~2022-09-05
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Carl Xue	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.9~27.5	Relative Humidity: (%)	52~53	ATM Pressure: (kPa)	100.1~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

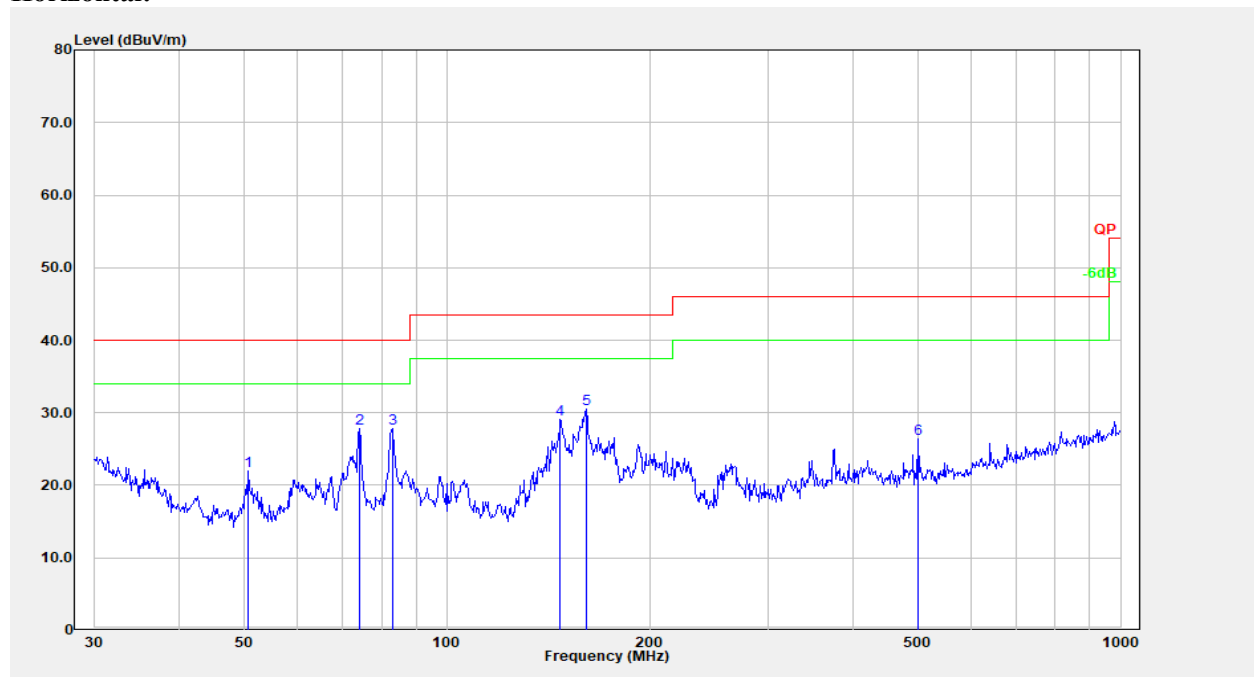
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022-08-07	2023-08-06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022-08-07	2023-08-06
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2022-08-07	2023-08-06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022-08-07	2023-08-06
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2024-02-04

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

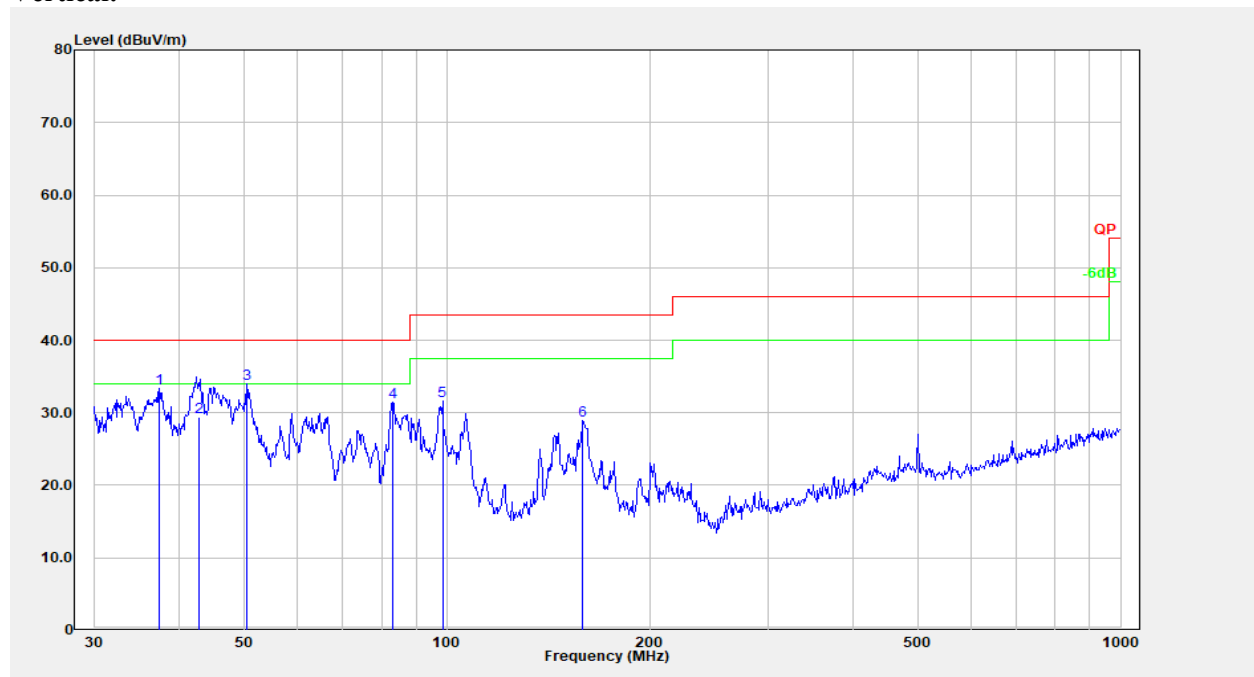
Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.

1) 30MHz-1GHz(802.11a Chain 0 5785MHz was the worst)**Horizontal:**

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	50.764	39.44	-17.42	22.02	40.00	17.98	Peak
2	74.135	45.04	-17.15	27.89	40.00	12.11	Peak
3	82.938	45.37	-17.50	27.87	40.00	12.13	Peak
4	147.404	41.28	-12.23	29.05	43.50	14.45	Peak
5	160.909	42.92	-12.38	30.54	43.50	12.96	Peak
6	501.179	32.66	-6.22	26.44	46.00	19.56	Peak

Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	37.416	42.86	-9.49	33.37	40.00	6.63	Peak
2	42.911	42.71	-13.24	29.46	40.00	10.54	QP
3	50.409	51.39	-17.40	33.99	40.00	6.01	Peak
4	82.938	48.95	-17.50	31.45	40.00	8.55	Peak
5	98.487	46.49	-14.93	31.56	43.50	11.94	Peak
6	159.225	41.25	-12.29	28.95	43.50	14.55	Peak

2) 1GHz-40GHz:

5150-5250MHz

802.11a, Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	73.23	PK	H	38.68	105.89	N/A	N/A
5180.00	63.45	AV	H	38.68	96.11	N/A	N/A
5180.00	81.00	PK	V	38.68	113.66	N/A	N/A
5180.00	71.08	AV	V	38.68	103.74	N/A	N/A
5150.00	40.11	PK	V	38.64	72.73	74.00	1.27
5150.00	19.02	AV	V	38.64	51.64	54.00	2.36
10360.00	33.98	PK	V	19.18	47.14	68.20	21.06
15540.00	34.74	PK	V	22.44	51.16	74.00	22.84
15540.00	22.34	AV	V	22.44	38.76	54.00	15.24
Middle Channel: 5200 MHz							
5200.00	72.45	PK	H	38.70	105.13	N/A	N/A
5200.00	62.18	AV	H	38.70	94.86	N/A	N/A
5200.00	81.57	PK	V	38.70	114.25	N/A	N/A
5200.00	71.23	AV	V	38.70	103.91	N/A	N/A
10400.00	34.23	PK	V	19.16	47.37	68.20	20.83
15600.00	37.17	PK	V	22.41	53.56	74.00	20.44
15600.00	25.64	AV	V	22.41	42.03	54.00	11.97
High Channel: 5240 MHz							
5240.00	72.68	PK	H	38.85	105.51	N/A	N/A
5240.00	62.36	AV	H	38.85	95.19	N/A	N/A
5240.00	81.78	PK	V	38.85	114.61	N/A	N/A
5240.00	71.63	AV	V	38.85	104.46	N/A	N/A
5350.00	30.02	PK	V	39.03	63.03	74.00	10.97
5350.00	16.91	AV	V	39.03	49.92	54.00	4.08
10480.00	34.61	PK	V	18.86	47.45	68.20	20.75
15720.00	37.93	PK	V	22.28	54.19	74.00	19.81
15720.00	25.47	AV	V	22.28	41.73	54.00	12.27

802.11a, Chain 1:

27.14; Chan 1

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	70.28	PK	H	38.68	102.94	N/A	N/A
5180.00	60.54	AV	H	38.68	93.20	N/A	N/A
5180.00	80.94	PK	V	38.68	113.60	N/A	N/A
5180.00	70.79	AV	V	38.68	103.45	N/A	N/A
5150.00	35.91	PK	V	38.64	68.53	74.00	5.47
5150.00	18.71	AV	V	38.64	51.33	54.00	2.67
10360.00	34.57	PK	V	19.18	47.73	68.20	20.47
15540.00	34.16	PK	V	22.44	50.58	74.00	23.42
15540.00	22.31	AV	V	22.44	38.73	54.00	15.27
Middle Channel: 5200 MHz							
5200.00	70.19	PK	H	38.70	102.87	N/A	N/A
5200.00	60.47	AV	H	38.70	93.15	N/A	N/A
5200.00	80.78	PK	V	38.70	113.46	N/A	N/A
5200.00	70.50	AV	V	38.70	103.18	N/A	N/A
10400.00	33.98	PK	V	19.16	47.12	68.20	21.08
15600.00	35.96	PK	V	22.41	52.35	74.00	21.65
15600.00	25.86	AV	V	22.41	42.25	54.00	11.75
High Channel: 5240 MHz							
5240.00	69.50	PK	H	38.85	102.33	N/A	N/A
5240.00	59.37	AV	H	38.85	92.20	N/A	N/A
5240.00	80.98	PK	V	38.85	113.81	N/A	N/A
5240.00	70.93	AV	V	38.85	103.76	N/A	N/A
5350.00	29.95	PK	V	39.03	62.96	74.00	11.04
5350.00	16.56	AV	V	39.03	49.57	54.00	4.43
10480.00	33.57	PK	V	18.86	46.41	68.20	21.79
15720.00	38.86	PK	V	22.28	55.12	74.00	18.88
15720.00	26.85	AV	V	22.28	43.11	54.00	10.89

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	73.46	PK	H	38.68	106.12	N/A	N/A
5180.00	62.57	AV	H	38.68	95.23	N/A	N/A
5180.00	85.96	PK	V	38.68	118.62	N/A	N/A
5180.00	74.54	AV	V	38.68	107.20	N/A	N/A
5150.00	36.48	PK	V	38.64	69.10	74.00	4.90
5150.00	20.24	AV	V	38.64	52.86	54.00	1.14
10360.00	36.70	PK	V	19.18	49.86	68.20	18.34
15540.00	37.04	PK	V	22.44	53.46	74.00	20.54
15540.00	25.63	AV	V	22.44	42.05	54.00	11.95
Middle Channel: 5200 MHz							
5200.00	72.69	PK	H	38.70	105.37	N/A	N/A
5200.00	61.28	AV	H	38.70	93.96	N/A	N/A
5200.00	84.97	PK	V	38.70	117.65	N/A	N/A
5200.00	73.30	AV	V	38.70	105.98	N/A	N/A
10400.00	34.55	PK	V	19.16	47.69	68.20	20.51
15600.00	39.93	PK	V	22.41	56.32	74.00	17.68
15600.00	27.92	AV	V	22.41	44.31	54.00	9.69
High Channel: 5240 MHz							
5240.00	73.19	PK	H	38.85	106.02	N/A	N/A
5240.00	62.58	AV	H	38.85	95.41	N/A	N/A
5240.00	85.36	PK	V	38.85	118.19	N/A	N/A
5240.00	74.03	AV	V	38.85	106.86	N/A	N/A
5350.00	30.47	PK	V	39.03	63.48	74.00	10.52
5350.00	17.04	AV	V	39.03	50.05	54.00	3.95
10480.00	33.30	PK	V	18.86	46.14	68.20	22.06
15720.00	42.10	PK	V	22.28	58.36	74.00	15.64
15720.00	30.05	AV	V	22.28	46.31	54.00	7.69

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190MHz							
5190.00	72.83	PK	H	38.69	105.50	N/A	N/A
5190.00	61.23	AV	H	38.69	93.90	N/A	N/A
5190.00	84.78	PK	V	38.69	117.45	N/A	N/A
5190.00	73.78	AV	V	38.69	106.45	N/A	N/A
5350.00	31.32	PK	V	39.03	64.33	74.00	9.67
5350.00	18.10	AV	V	39.03	51.11	54.00	2.89
10380.00	38.12	PK	V	19.17	51.27	68.20	16.93
15570.00	40.44	PK	V	22.43	56.85	74.00	17.15
15570.00	27.56	AV	V	22.43	43.97	54.00	10.03
High Channel: 5230 MHz							
5230.00	75.22	PK	H	38.81	108.01	N/A	N/A
5230.00	64.34	AV	H	38.81	97.13	N/A	N/A
5230.00	84.47	PK	V	38.81	117.26	N/A	N/A
5230.00	73.11	AV	V	38.81	105.90	N/A	N/A
5350.00	31.17	PK	V	39.03	64.18	74.00	9.82
5350.00	18.17	AV	V	39.03	51.18	54.00	2.82
10460.00	34.56	PK	V	18.94	47.48	68.20	20.72
15690.00	40.88	PK	V	22.29	57.15	74.00	16.85
15690.00	27.39	AV	V	22.29	43.66	54.00	10.34

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	73.46	PK	H	38.68	106.12	N/A	N/A
5180.00	61.57	AV	H	38.68	94.23	N/A	N/A
5180.00	84.05	PK	V	38.68	116.71	N/A	N/A
5180.00	72.87	AV	V	38.68	105.53	N/A	N/A
5150.00	37.56	PK	V	38.64	70.18	74.00	3.82
5150.00	20.22	AV	V	38.64	52.84	54.00	1.16
10360.00	34.01	PK	V	19.18	47.17	68.20	21.03
15540.00	37.71	PK	V	22.44	54.13	74.00	19.87
15540.00	25.36	AV	V	22.44	41.78	54.00	12.22
Middle Channel: 5200 MHz							
5200.00	73.87	PK	H	38.70	106.55	N/A	N/A
5200.00	62.17	AV	H	38.70	94.85	N/A	N/A
5200.00	86.46	PK	V	38.70	119.14	N/A	N/A
5200.00	74.34	AV	V	38.70	107.02	N/A	N/A
10400.00	32.48	PK	V	19.16	45.62	68.20	22.58
15600.00	40.10	PK	V	22.41	56.49	74.00	17.51
15600.00	27.55	AV	V	22.41	43.94	54.00	10.06
High Channel: 5240 MHz							
5240.00	72.66	PK	H	38.85	105.49	N/A	N/A
5240.00	59.53	AV	H	38.85	92.36	N/A	N/A
5240.00	85.66	PK	V	38.85	118.49	N/A	N/A
5240.00	75.92	AV	V	38.85	108.75	N/A	N/A
5350.00	30.66	PK	V	39.03	63.67	74.00	10.33
5350.00	17.07	AV	V	39.03	50.08	54.00	3.92
10480.00	33.89	PK	V	18.86	46.73	68.20	21.47
15720.00	40.35	PK	V	22.28	56.61	74.00	17.39
15720.00	27.31	AV	V	22.28	43.57	54.00	10.43

802.11ac vht40((2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.00	75.97	PK	H	38.69	108.64	N/A	N/A
5190.00	64.02	AV	H	38.69	96.69	N/A	N/A
5190.00	84.84	PK	V	38.69	117.51	N/A	N/A
5190.00	73.10	AV	V	38.69	105.77	N/A	N/A
5350.00	38.80	PK	V	39.03	71.81	74.00	2.19
5350.00	17.74	AV	V	39.03	50.75	54.00	3.25
10380.00	36.86	PK	V	19.17	50.01	68.20	18.19
15570.00	40.09	PK	V	22.43	56.50	74.00	17.50
15570.00	29.35	AV	V	22.43	45.76	54.00	8.24
High Channel: 5230 MHz							
5230.00	74.63	PK	H	38.81	107.42	N/A	N/A
5230.00	64.12	AV	H	38.81	96.91	N/A	N/A
5230.00	82.86	PK	V	38.81	115.65	N/A	N/A
5230.00	72.35	AV	V	38.81	105.14	N/A	N/A
5350.00	31.40	PK	V	39.03	64.41	74.00	9.59
5350.00	17.73	AV	V	39.03	50.74	54.00	3.26
10460.00	36.12	PK	V	18.94	49.04	68.20	19.16
15690.00	43.48	PK	V	22.29	59.75	74.00	14.25
15690.00	31.23	AV	V	22.29	47.50	54.00	6.50

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5210 MHz							
5210.00	69.27	PK	H	38.74	101.99	N/A	N/A
5210.00	59.36	AV	H	38.74	92.08	N/A	N/A
5210.00	78.76	PK	V	38.74	111.48	N/A	N/A
5210.00	68.04	AV	V	38.74	100.76	N/A	N/A
5150.00	35.14	PK	V	38.64	67.76	74.00	6.24
5150.00	20.37	AV	V	38.64	52.99	54.00	1.01
5350.00	32.16	PK	V	39.03	65.17	74.00	8.83
5350.00	18.07	AV	V	39.03	51.08	54.00	2.92
10420.00	34.65	PK	V	19.09	47.72	68.20	20.48
15630.00	38.31	PK	V	22.37	54.66	74.00	19.34
15630.00	26.16	AV	V	22.37	42.51	54.00	11.49

802.11ax hew20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	72.81	PK	H	38.68	105.47	N/A	N/A
5180.00	62.45	AV	H	38.68	95.11	N/A	N/A
5180.00	82.82	PK	V	38.68	115.48	N/A	N/A
5180.00	72.35	AV	V	38.68	105.01	N/A	N/A
5150.00	38.65	PK	V	38.64	71.27	74.00	2.73
5150.00	19.85	AV	V	38.64	52.47	54.00	1.53
10360.00	33.96	PK	V	19.18	47.12	68.20	21.08
15540.00	42.02	PK	V	22.44	58.44	74.00	15.56
15540.00	26.82	AV	V	22.44	43.24	54.00	10.76
Middle Channel: 5200 MHz							
5200.00	72.94	PK	H	38.70	105.62	N/A	N/A
5200.00	62.51	AV	H	38.70	95.19	N/A	N/A
5200.00	82.93	PK	V	38.70	115.61	N/A	N/A
5200.00	72.40	AV	V	38.70	105.08	N/A	N/A
10400.00	34.05	PK	V	19.16	47.19	68.20	21.01
15600.00	43.32	PK	V	22.41	59.71	74.00	14.29
15600.00	28.13	AV	V	22.41	44.52	54.00	9.48
High Channel: 5240 MHz							
5240.00	72.96	PK	H	38.85	105.79	N/A	N/A
5240.00	62.59	AV	H	38.85	95.42	N/A	N/A
5240.00	82.94	PK	V	38.85	115.77	N/A	N/A
5240.00	72.46	AV	V	38.85	105.29	N/A	N/A
5350.00	30.70	PK	V	39.03	63.71	74.00	10.29
5350.00	17.11	AV	V	39.03	50.12	54.00	3.88
10480.00	34.10	PK	V	18.86	46.94	68.20	21.26
15720.00	44.59	PK	V	22.28	60.85	74.00	13.15
15720.00	29.90	AV	V	22.28	46.16	54.00	7.84

802.11ax hew40((2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.00	77.07	PK	H	38.69	109.74	N/A	N/A
5190.00	66.41	AV	H	38.69	99.08	N/A	N/A
5190.00	86.60	PK	V	38.69	119.27	N/A	N/A
5190.00	75.30	AV	V	38.69	107.97	N/A	N/A
5350.00	35.79	PK	V	39.03	68.80	74.00	5.20
5350.00	19.80	AV	V	39.03	52.81	54.00	1.19
10380.00	34.75	PK	V	19.17	47.90	68.20	20.30
15570.00	46.92	PK	V	22.43	63.33	74.00	10.67
15570.00	32.89	AV	V	22.43	49.30	54.00	4.70
High Channel: 5230 MHz							
5230.00	76.75	PK	H	38.81	109.54	N/A	N/A
5230.00	65.85	AV	H	38.81	98.64	N/A	N/A
5230.00	81.68	PK	V	38.81	114.47	N/A	N/A
5230.00	70.18	AV	V	38.81	102.97	N/A	N/A
5350.00	35.42	PK	V	39.03	68.43	74.00	5.57
5350.00	19.84	AV	V	39.03	52.85	54.00	1.15
10460.00	34.12	PK	V	18.94	47.04	68.20	21.16
15690.00	47.25	PK	V	22.29	63.52	74.00	10.48
15690.00	33.05	AV	V	22.29	49.32	54.00	4.68

802.11ax hew80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5210 MHz							
5210.00	67.17	PK	H	38.74	99.89	N/A	N/A
5210.00	54.82	AV	H	38.74	87.54	N/A	N/A
5210.00	75.60	PK	V	38.74	108.32	N/A	N/A
5210.00	62.64	AV	V	38.74	95.36	N/A	N/A
5150.00	34.17	PK	V	38.64	66.79	74.00	7.21
5150.00	20.31	AV	V	38.64	52.93	54.00	1.07
5350.00	30.18	PK	V	39.03	63.19	74.00	10.81
5350.00	17.24	AV	V	39.03	50.25	54.00	3.75
10420.00	34.18	PK	V	19.09	47.25	68.20	20.95
15630.00	37.65	PK	V	22.37	54.00	74.00	20.00
15630.00	24.50	AV	V	22.37	40.85	54.00	13.15

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

5250-5350MHz:**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	73.75	PK	H	38.90	106.63	N/A	N/A
5260.00	63.89	AV	H	38.90	96.77	N/A	N/A
5260.00	80.23	PK	V	38.90	113.11	N/A	N/A
5260.00	70.20	AV	V	38.90	103.08	N/A	N/A
5150.00	29.84	PK	V	38.64	62.46	74.00	11.54
5150.00	17.00	AV	V	38.64	49.62	54.00	4.38
10520.00	34.05	PK	V	18.93	46.96	68.20	21.24
15780.00	36.95	PK	V	22.26	53.19	74.00	20.81
15780.00	24.48	AV	V	22.26	40.72	54.00	13.28
Middle Channel: 5280MHz							
5280.00	69.33	PK	H	38.91	102.22	N/A	N/A
5280.00	59.26	AV	H	38.91	92.15	N/A	N/A
5280.00	80.95	PK	V	38.91	113.84	N/A	N/A
5280.00	70.97	AV	V	38.91	103.86	N/A	N/A
10560.00	35.49	PK	V	19.20	48.67	68.20	19.53
15840.00	40.45	PK	V	22.34	56.77	74.00	17.23
15840.00	28.34	AV	V	22.34	44.66	54.00	9.34
High Channel: 5320MHz							
5320.00	72.16	PK	H	38.97	105.11	N/A	N/A
5320.00	62.20	AV	H	38.97	95.15	N/A	N/A
5320.00	79.82	PK	V	38.97	112.77	N/A	N/A
5320.00	69.64	AV	V	38.97	102.59	N/A	N/A
5350.00	31.42	PK	V	39.03	64.43	74.00	9.57
5350.00	18.15	AV	V	39.03	51.16	54.00	2.84
10640.00	33.85	PK	V	19.50	47.33	74.00	26.67
10640.00	21.43	AV	V	19.50	34.91	54.00	19.09
15960.00	43.05	PK	V	22.22	59.25	74.00	14.75
15960.00	31.03	AV	V	22.22	47.23	54.00	6.77

802.11a, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	64.07	PK	H	38.90	96.95	N/A	N/A
5260.00	54.11	AV	H	38.90	86.99	N/A	N/A
5260.00	74.85	PK	V	38.90	107.73	N/A	N/A
5260.00	64.91	AV	V	38.90	97.79	N/A	N/A
5150.00	29.45	PK	V	38.64	62.07	74.00	11.93
5150.00	16.80	AV	V	38.64	49.42	54.00	4.58
10520.00	34.34	PK	V	18.93	47.25	68.20	20.95
15780.00	36.62	PK	V	22.26	52.86	74.00	21.14
15780.00	24.31	AV	V	22.26	40.55	54.00	13.45
Middle Channel: 5280MHz							
5280.00	64.49	PK	H	38.91	97.38	N/A	N/A
5280.00	54.38	AV	H	38.91	87.27	N/A	N/A
5280.00	76.87	PK	V	38.91	109.76	N/A	N/A
5280.00	66.10	AV	V	38.91	98.99	N/A	N/A
10560.00	33.21	PK	V	19.20	46.39	68.20	21.81
15840.00	36.13	PK	V	22.34	52.45	74.00	21.55
15840.00	24.07	AV	V	22.34	40.39	54.00	13.61
High Channel: 5320MHz							
5320.00	64.84	PK	H	38.97	97.79	N/A	N/A
5320.00	55.28	AV	H	38.97	88.23	N/A	N/A
5320.00	77.95	PK	V	38.97	110.90	N/A	N/A
5320.00	68.01	AV	V	38.97	100.96	N/A	N/A
5350.00	30.88	PK	V	39.03	63.89	74.00	10.11
5350.00	17.27	AV	V	39.03	50.28	54.00	3.72
10640.00	33.03	PK	V	19.50	46.51	74.00	27.49
10640.00	21.02	AV	V	19.50	34.50	54.00	19.50
15960.00	36.49	PK	V	22.22	52.69	74.00	21.31
15960.00	24.25	AV	V	22.22	40.45	54.00	13.55

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	63.11	PK	H	38.90	95.99	N/A	N/A
5260.00	52.10	AV	H	38.90	84.98	N/A	N/A
5260.00	74.55	PK	V	38.90	107.43	N/A	N/A
5260.00	63.31	AV	V	38.90	96.19	N/A	N/A
5150.00	29.69	PK	V	38.64	62.31	74.00	11.69
5150.00	16.77	AV	V	38.64	49.39	54.00	4.61
10520.00	34.08	PK	V	18.93	46.99	68.20	21.21
15780.00	36.71	PK	V	22.26	52.95	74.00	21.05
15780.00	24.36	AV	V	22.26	40.60	54.00	13.40
Middle Channel: 5280MHz							
5280.00	63.82	PK	H	38.91	96.71	N/A	N/A
5280.00	52.47	AV	H	38.91	85.36	N/A	N/A
5280.00	75.46	PK	V	38.91	108.35	N/A	N/A
5280.00	64.55	AV	V	38.91	97.44	N/A	N/A
10560.00	33.63	PK	V	19.20	46.81	68.20	21.39
15840.00	35.91	PK	V	22.34	52.23	74.00	21.77
15840.00	23.46	AV	V	22.34	39.78	54.00	14.22
High Channel: 5320MHz							
5320.00	66.64	PK	H	38.97	99.59	N/A	N/A
5320.00	55.49	AV	H	38.97	88.44	N/A	N/A
5320.00	77.17	PK	V	38.97	110.12	N/A	N/A
5320.00	66.09	AV	V	38.97	99.04	N/A	N/A
5350.00	30.03	PK	V	39.03	63.04	74.00	10.96
5350.00	16.98	AV	V	39.03	49.99	54.00	4.01
10640.00	33.16	PK	V	19.50	46.64	74.00	27.36
10640.00	21.08	AV	V	19.50	34.56	54.00	19.44
15960.00	37.19	PK	V	22.22	53.39	74.00	20.61
15960.00	25.10	AV	V	22.22	41.30	54.00	12.70

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.00	63.37	PK	H	38.91	96.26	N/A	N/A
5270.00	53.28	AV	H	38.91	86.17	N/A	N/A
5270.00	74.75	PK	V	38.91	107.64	N/A	N/A
5270.00	64.08	AV	V	38.91	96.97	N/A	N/A
5150.00	29.91	PK	V	38.64	62.53	74.00	11.47
5150.00	16.96	AV	V	38.64	49.58	54.00	4.42
10540.00	34.62	PK	V	19.07	47.67	68.20	20.53
15810.00	36.68	PK	V	22.28	52.94	74.00	21.06
15810.00	24.53	AV	V	22.28	40.79	54.00	13.21
High Channel: 5310 MHz							
5310.00	64.73	PK	H	38.95	97.66	N/A	N/A
5310.00	54.17	AV	H	38.95	87.10	N/A	N/A
5310.00	75.52	PK	V	38.95	108.45	N/A	N/A
5310.00	65.03	AV	V	38.95	97.96	N/A	N/A
5350.00	31.79	PK	V	39.03	64.80	74.00	9.20
5350.00	18.05	AV	V	39.03	51.06	54.00	2.94
10620.00	34.85	PK	V	19.49	48.32	74.00	25.68
10620.00	22.54	AV	V	19.49	36.01	54.00	17.99
15930.00	36.45	PK	V	22.33	52.76	74.00	21.24
15930.00	24.34	AV	V	22.33	40.65	54.00	13.35

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	64.23	PK	H	38.90	97.11	N/A	N/A
5260.00	54.49	AV	H	38.90	87.37	N/A	N/A
5260.00	76.97	PK	V	38.90	109.85	N/A	N/A
5260.00	66.91	AV	V	38.90	99.79	N/A	N/A
5150.00	29.85	PK	V	38.64	62.47	74.00	11.53
5150.00	16.84	AV	V	38.64	49.46	54.00	4.54
10520.00	33.62	PK	V	18.93	46.53	68.20	21.67
15780.00	37.01	PK	V	22.26	53.25	74.00	20.75
15780.00	25.13	AV	V	22.26	41.37	54.00	12.63
Middle Channel: 5280MHz							
5280.00	65.68	PK	H	38.91	98.57	N/A	N/A
5280.00	53.27	AV	H	38.91	86.16	N/A	N/A
5280.00	78.24	PK	V	38.91	111.13	N/A	N/A
5280.00	66.03	AV	V	38.91	98.92	N/A	N/A
10560.00	33.47	PK	V	19.20	46.65	68.20	21.55
15840.00	36.71	PK	V	22.34	53.03	74.00	20.97
15840.00	24.36	AV	V	22.34	40.68	54.00	13.32
High Channel: 5320MHz							
5320.00	64.66	PK	H	38.97	97.61	N/A	N/A
5320.00	53.46	AV	H	38.97	86.41	N/A	N/A
5320.00	77.40	PK	V	38.97	110.35	N/A	N/A
5320.00	66.08	AV	V	38.97	99.03	N/A	N/A
5350.00	29.87	PK	V	39.03	62.88	74.00	11.12
5350.00	16.94	AV	V	39.03	49.95	54.00	4.05
10640.00	33.69	PK	V	19.50	47.17	74.00	26.83
10640.00	21.35	AV	V	19.50	34.83	54.00	19.17
15960.00	37.00	PK	V	22.22	53.20	74.00	20.80
15960.00	25.01	AV	V	22.22	41.21	54.00	12.79

802.11ac vht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.00	66.25	PK	H	38.91	99.14	N/A	N/A
5270.00	55.38	AV	H	38.91	88.27	N/A	N/A
5270.00	77.06	PK	V	38.91	109.95	N/A	N/A
5270.00	66.52	AV	V	38.91	99.41	N/A	N/A
5150.00	30.43	PK	V	38.64	63.05	74.00	10.95
5150.00	17.13	AV	V	38.64	49.75	54.00	4.25
10540.00	34.13	PK	V	19.07	47.18	68.20	21.02
15810.00	37.32	PK	V	22.28	53.58	74.00	20.42
15810.00	25.31	AV	V	22.28	41.57	54.00	12.43
High Channel: 5310 MHz							
5310.00	65.47	PK	H	38.95	98.40	N/A	N/A
5310.00	54.58	AV	H	38.95	87.51	N/A	N/A
5310.00	76.01	PK	V	38.95	108.94	N/A	N/A
5310.00	65.27	AV	V	38.95	98.20	N/A	N/A
5350.00	31.10	PK	V	39.03	64.11	74.00	9.89
5350.00	17.91	AV	V	39.03	50.92	54.00	3.08
10620.00	34.05	PK	V	19.49	47.52	74.00	26.48
10620.00	22.03	AV	V	19.49	35.50	54.00	18.50
15930.00	36.20	PK	V	22.33	52.51	74.00	21.49
15930.00	24.13	AV	V	22.33	40.44	54.00	13.56

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5290 MHz							
5290.00	63.10	PK	H	38.92	96.00	N/A	N/A
5290.00	53.01	AV	H	38.92	85.91	N/A	N/A
5290.00	73.79	PK	V	38.92	106.69	N/A	N/A
5290.00	54.12	AV	V	38.92	87.02	N/A	N/A
5150.00	30.55	PK	V	38.64	63.17	74.00	10.83
5150.00	17.22	AV	V	38.64	49.84	54.00	4.16
5350.00	31.76	PK	V	39.03	64.77	74.00	9.23
5350.00	17.56	AV	V	39.03	50.57	54.00	3.43
10580.00	39.90	PK	V	19.34	53.22	68.20	14.98
15870.00	35.83	PK	V	22.39	52.20	74.00	21.80
15870.00	22.76	AV	V	22.39	39.13	54.00	14.87

802.11ac vht160(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5250 MHz							
5250.00	61.40	PK	H	38.89	94.27	N/A	N/A
5250.00	51.28	AV	H	38.89	84.15	N/A	N/A
5250.00	72.80	PK	V	38.89	105.67	N/A	N/A
5250.00	62.89	AV	V	38.89	95.76	N/A	N/A
5150.00	32.53	PK	V	38.64	65.15	74.00	8.85
5150.00	18.80	AV	V	38.64	51.42	54.00	2.58
5350.00	32.10	PK	V	39.03	65.11	74.00	8.89
5350.00	18.82	AV	V	39.03	51.83	54.00	2.17
10500.00	33.48	PK	V	18.79	46.25	68.20	21.95
15750.00	37.07	PK	V	22.27	53.32	74.00	20.68
15750.00	25.04	AV	V	22.27	41.29	54.00	12.71

802.11ax hew20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	72.13	PK	H	38.90	105.01	N/A	N/A
5260.00	61.35	AV	H	38.90	94.23	N/A	N/A
5260.00	82.08	PK	V	38.90	114.96	N/A	N/A
5260.00	71.91	AV	V	38.90	104.79	N/A	N/A
5150.00	30.15	PK	V	38.64	62.77	74.00	11.23
5150.00	17.24	AV	V	38.64	49.86	54.00	4.14
10520.00	33.46	PK	V	18.93	46.37	68.20	21.83
15780.00	37.26	PK	V	22.26	53.50	74.00	20.50
15780.00	25.13	AV	V	22.26	41.37	54.00	12.63
Middle Channel: 5280MHz							
5280.00	71.23	PK	H	38.91	104.12	N/A	N/A
5280.00	61.45	AV	H	38.91	94.34	N/A	N/A
5280.00	81.56	PK	V	38.91	114.45	N/A	N/A
5280.00	71.47	AV	V	38.91	104.36	N/A	N/A
10560.00	33.14	PK	V	19.20	46.32	68.20	21.88
15840.00	38.38	PK	V	22.34	54.70	74.00	19.30
15840.00	26.19	AV	V	22.34	42.51	54.00	11.49
High Channel: 5320MHz							
5320.00	71.24	PK	H	38.97	104.19	N/A	N/A
5320.00	61.47	AV	H	38.97	94.42	N/A	N/A
5320.00	80.82	PK	V	38.97	113.77	N/A	N/A
5320.00	70.50	AV	V	38.97	103.45	N/A	N/A
5350.00	31.88	PK	V	39.03	64.89	74.00	9.11
5350.00	18.53	AV	V	39.03	51.54	54.00	2.46
10640.00	33.00	PK	V	19.50	46.48	74.00	27.52
10640.00	21.02	AV	V	19.50	34.50	54.00	19.50
15960.00	39.39	PK	V	22.22	55.59	74.00	18.41
15960.00	27.20	AV	V	22.22	43.40	54.00	10.60

802.11ax hew40((2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.00	70.24	PK	H	38.91	103.13	N/A	N/A
5270.00	58.49	AV	H	38.91	91.38	N/A	N/A
5270.00	81.57	PK	V	38.91	114.46	N/A	N/A
5270.00	69.80	AV	V	38.91	102.69	N/A	N/A
5150.00	31.31	PK	V	38.64	63.93	74.00	10.07
5150.00	18.09	AV	V	38.64	50.71	54.00	3.29
10540.00	34.04	PK	V	19.07	47.09	68.20	21.11
15810.00	34.12	PK	V	22.28	50.38	74.00	23.62
15810.00	22.06	AV	V	22.28	38.32	54.00	15.68
High Channel: 5310 MHz							
5310.00	70.86	PK	H	38.95	103.79	N/A	N/A
5310.00	59.38	AV	H	38.95	92.31	N/A	N/A
5310.00	80.65	PK	V	38.95	113.58	N/A	N/A
5310.00	69.60	AV	V	38.95	102.53	N/A	N/A
5350.00	38.34	PK	V	39.03	71.35	74.00	2.65
5350.00	19.55	AV	V	39.03	52.56	54.00	1.44
10620.00	32.90	PK	V	19.49	46.37	74.00	27.63
10620.00	30.45	AV	V	19.49	43.92	54.00	10.08
15930.00	36.74	PK	V	22.33	53.05	74.00	20.95
15930.00	24.37	AV	V	22.33	40.68	54.00	13.32

802.11ax hew80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5290 MHz							
5290.00	66.80	PK	H	38.92	99.70	N/A	N/A
5290.00	53.47	AV	H	38.92	86.37	N/A	N/A
5290.00	76.38	PK	V	38.92	109.28	N/A	N/A
5290.00	63.12	AV	V	38.92	96.02	N/A	N/A
5150.00	31.56	PK	V	38.64	64.18	74.00	9.82
5150.00	17.71	AV	V	38.64	50.33	54.00	3.67
5350.00	34.71	PK	V	39.03	67.72	74.00	6.28
5350.00	18.56	AV	V	39.03	51.57	54.00	2.43
10580.00	33.21	PK	V	19.34	46.53	68.20	21.67
15870.00	38.55	PK	V	22.39	54.92	74.00	19.08
15870.00	26.28	AV	V	22.39	42.65	54.00	11.35

802.11ax vht160(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5250 MHz							
5250.00	61.70	PK	H	38.89	94.57	N/A	N/A
5250.00	51.36	AV	H	38.89	84.23	N/A	N/A
5250.00	72.80	PK	V	38.89	105.67	N/A	N/A
5250.00	62.89	AV	V	38.89	95.76	N/A	N/A
5150.00	32.41	PK	V	38.64	65.03	74.00	8.97
5150.00	18.45	AV	V	38.64	51.07	54.00	2.93
5350.00	31.80	PK	V	39.03	64.81	74.00	9.19
5350.00	18.75	AV	V	39.03	51.76	54.00	2.24
10500.00	33.96	PK	V	18.79	46.73	68.20	21.47
15750.00	37.24	PK	V	22.27	53.49	74.00	20.51
15750.00	24.39	AV	V	22.27	40.64	54.00	13.36

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

5725-5850MHz:

802.11a, Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	69.70	PK	H	39.46	103.14	N/A	N/A
5745.00	60.39	AV	H	39.46	93.83	N/A	N/A
5745.00	82.64	PK	V	39.46	116.08	N/A	N/A
5745.00	73.04	AV	V	39.46	106.48	N/A	N/A
5725.00	48.67	PK	V	39.48	82.13	122.20	40.07
5720.00	44.07	PK	V	39.49	77.54	110.80	33.26
5700.00	32.31	PK	V	39.51	65.80	105.20	39.40
5650.00	31.16	PK	V	39.49	64.63	68.20	3.57
11490.00	34.21	PK	V	20.67	48.86	74.00	25.14
11490.00	22.11	AV	V	20.67	36.76	54.00	17.24
17235.00	45.11	PK	V	26.76	65.85	68.20	2.35
Middle Channel: 5785 MHz							
5785.00	68.49	PK	H	39.44	101.91	N/A	N/A
5785.00	58.36	AV	H	39.44	91.78	N/A	N/A
5785.00	80.67	PK	V	39.44	114.09	N/A	N/A
5785.00	70.80	AV	V	39.44	104.22	N/A	N/A
11570.00	33.94	PK	V	20.83	48.75	74.00	25.25
11570.00	21.47	AV	V	20.83	36.28	54.00	17.72
17355.00	45.04	PK	V	27.74	66.76	68.20	1.44
High Channel: 5825 MHz							
5825.00	66.25	PK	H	39.46	99.69	N/A	N/A
5825.00	56.47	AV	H	39.46	89.91	N/A	N/A
5825.00	78.29	PK	V	39.46	111.73	N/A	N/A
5825.00	68.55	AV	V	39.46	101.99	N/A	N/A
5850.00	33.44	PK	V	39.49	66.91	122.20	55.29
5855.00	32.60	PK	V	39.51	66.09	110.80	44.71
5875.00	31.61	PK	V	39.60	65.19	105.20	40.01
5925.00	31.94	PK	V	39.68	65.60	68.20	2.60
11650.00	34.76	PK	V	21.07	49.81	74.00	24.19
11650.00	22.38	AV	V	21.07	37.43	54.00	16.57
17475.00	43.42	PK	V	28.61	66.01	68.20	2.19

802.11a, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	68.12	PK	H	39.46	101.56	N/A	N/A
5745.00	58.47	AV	H	39.46	91.91	N/A	N/A
5745.00	80.69	PK	V	39.46	114.13	N/A	N/A
5745.00	70.78	AV	V	39.46	104.22	N/A	N/A
5725.00	40.82	PK	V	39.48	74.28	122.20	47.92
5720.00	37.37	PK	V	39.49	70.84	110.80	39.96
5700.00	31.42	PK	V	39.51	64.91	105.20	40.29
5650.00	30.55	PK	V	39.49	64.02	68.20	4.18
11490.00	33.90	PK	V	20.67	48.55	74.00	25.45
11490.00	21.56	AV	V	20.67	36.21	54.00	17.79
17235.00	44.71	PK	V	26.76	65.45	68.20	2.75
Middle Channel: 5785 MHz							
5785.00	66.59	PK	H	39.44	100.01	N/A	N/A
5785.00	56.73	AV	H	39.44	90.15	N/A	N/A
5785.00	78.45	PK	V	39.44	111.87	N/A	N/A
5785.00	68.75	AV	V	39.44	102.17	N/A	N/A
11570.00	33.92	PK	V	20.83	48.73	74.00	25.27
11570.00	21.59	AV	V	20.83	36.40	54.00	17.60
17355.00	43.58	PK	V	27.74	65.30	68.20	2.90
High Channel: 5825 MHz							
5825.00	67.38	PK	H	39.46	100.82	N/A	N/A
5825.00	57.17	AV	H	39.46	90.61	N/A	N/A
5825.00	78.76	PK	V	39.46	112.20	N/A	N/A
5825.00	68.96	AV	V	39.46	102.40	N/A	N/A
5850.00	33.15	PK	V	39.49	66.62	122.20	55.58
5855.00	32.83	PK	V	39.51	66.32	110.80	44.48
5875.00	32.60	PK	V	39.60	66.18	105.20	39.02
5925.00	31.18	PK	V	39.68	64.84	68.20	3.36
11650.00	34.06	PK	V	21.07	49.11	74.00	24.89
11650.00	22.00	AV	V	21.07	37.05	54.00	16.95
17475.00	43.86	PK	V	28.61	66.45	68.20	1.75

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	73.35	PK	H	39.46	106.79	N/A	N/A
5745.00	62.34	AV	H	39.46	95.78	N/A	N/A
5745.00	84.74	PK	V	39.46	118.18	N/A	N/A
5745.00	73.83	AV	V	39.46	107.27	N/A	N/A
5725.00	44.63	PK	V	39.48	78.09	122.20	44.11
5720.00	39.41	PK	V	39.49	72.88	110.80	37.92
5700.00	32.16	PK	V	39.51	65.65	105.20	39.55
5650.00	32.43	PK	V	39.49	65.90	68.20	2.30
11490.00	34.00	PK	V	20.67	48.65	74.00	25.35
11490.00	21.76	AV	V	20.67	36.41	54.00	17.59
17235.00	45.41	PK	V	26.76	66.15	68.20	2.05
Middle Channel: 5785 MHz							
5785.00	71.58	PK	H	39.44	105.00	N/A	N/A
5785.00	60.47	AV	H	39.44	93.89	N/A	N/A
5785.00	82.27	PK	V	39.44	115.69	N/A	N/A
5785.00	71.25	AV	V	39.44	104.67	N/A	N/A
11570.00	33.88	PK	V	20.83	48.69	74.00	25.31
11570.00	21.50	AV	V	20.83	36.31	54.00	17.69
17355.00	42.67	PK	V	27.74	64.39	68.20	3.81
High Channel: 5825 MHz							
5825.00	70.59	PK	H	39.46	104.03	N/A	N/A
5825.00	59.37	AV	H	39.46	92.81	N/A	N/A
5825.00	82.16	PK	V	39.46	115.60	N/A	N/A
5825.00	71.90	AV	V	39.46	105.34	N/A	N/A
5850.00	34.51	PK	V	39.49	67.98	122.20	54.22
5855.00	34.08	PK	V	39.51	67.57	110.80	43.23
5875.00	31.84	PK	V	39.60	65.42	105.20	39.78
5925.00	31.29	PK	V	39.68	64.95	68.20	3.25
11650.00	33.77	PK	V	21.07	48.82	74.00	25.18
11650.00	21.45	AV	V	21.07	36.50	54.00	17.50
17475.00	44.04	PK	V	28.61	66.63	68.20	1.57

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.00	69.45	PK	H	39.45	102.88	N/A	N/A
5755.00	59.61	AV	H	39.45	93.04	N/A	N/A
5755.00	81.82	PK	V	39.45	115.25	N/A	N/A
5755.00	71.42	AV	V	39.45	104.85	N/A	N/A
5725.00	43.69	PK	V	39.48	77.15	122.20	45.05
5720.00	43.35	PK	V	39.49	76.82	110.80	33.98
5700.00	37.60	PK	V	39.51	71.09	105.20	34.11
5650.00	31.81	PK	V	39.49	65.28	68.20	2.92
11510.00	33.89	PK	V	20.67	48.54	74.00	25.46
11510.00	21.55	AV	V	20.67	36.20	54.00	17.80
17265.00	45.07	PK	V	26.94	65.99	68.20	2.21
High Channel: 5795 MHz							
5795.00	67.67	PK	H	39.43	101.08	N/A	N/A
5795.00	57.48	AV	H	39.43	90.89	N/A	N/A
5795.00	80.36	PK	V	39.43	113.77	N/A	N/A
5795.00	70.03	AV	V	39.43	103.44	N/A	N/A
5850.00	35.69	PK	V	39.49	69.16	122.20	53.04
5855.00	33.18	PK	V	39.51	66.67	110.80	44.13
5875.00	32.45	PK	V	39.60	66.03	105.20	39.17
5925.00	31.93	PK	V	39.68	65.59	68.20	2.61
11590.00	34.05	PK	V	20.88	48.91	74.00	25.09
11590.00	21.71	AV	V	20.88	36.57	54.00	17.43
17385.00	43.01	PK	V	28.07	65.06	68.20	3.14

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	73.42	PK	H	39.46	106.86	N/A	N/A
5745.00	62.57	AV	H	39.46	96.01	N/A	N/A
5745.00	85.05	PK	V	39.46	118.49	N/A	N/A
5745.00	74.00	AV	V	39.46	107.44	N/A	N/A
5725.00	47.25	PK	V	39.48	80.71	122.20	41.49
5720.00	42.47	PK	V	39.49	75.94	110.80	34.86
5700.00	32.32	PK	V	39.51	65.81	105.20	39.39
5650.00	31.31	PK	V	39.49	64.78	68.20	3.42
11490.00	34.65	PK	V	20.67	49.30	74.00	24.70
11490.00	22.28	AV	V	20.67	36.93	54.00	17.07
17235.00	43.64	PK	V	26.76	64.38	68.20	3.82
Middle Channel: 5785 MHz							
5785.00	71.38	PK	H	39.44	104.80	N/A	N/A
5785.00	60.47	AV	H	39.44	93.89	N/A	N/A
5785.00	83.10	PK	V	39.44	116.52	N/A	N/A
5785.00	72.33	AV	V	39.44	105.75	N/A	N/A
11570.00	33.70	PK	V	20.83	48.51	74.00	25.49
11570.00	21.33	AV	V	20.83	36.14	54.00	17.86
17355.00	44.01	PK	V	27.74	65.73	68.20	2.47
High Channel: 5825 MHz							
5825.00	71.59	PK	H	39.46	105.03	N/A	N/A
5825.00	58.78	AV	H	39.46	92.22	N/A	N/A
5825.00	83.68	PK	V	39.46	117.12	N/A	N/A
5825.00	70.56	AV	V	39.46	104.00	N/A	N/A
5850.00	33.29	PK	V	39.49	66.76	122.20	55.44
5855.00	32.18	PK	V	39.51	65.67	110.80	45.13
5875.00	31.47	PK	V	39.60	65.05	105.20	40.15
5925.00	31.60	PK	V	39.68	65.26	68.20	2.94
11650.00	34.01	PK	V	21.07	49.06	74.00	24.94
11650.00	21.80	AV	V	21.07	36.85	54.00	17.15
17475.00	43.24	PK	V	28.61	65.83	68.20	2.37

802.11ac vht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.00	68.48	PK	H	39.45	101.91	N/A	N/A
5755.00	57.29	AV	H	39.45	90.72	N/A	N/A
5755.00	79.27	PK	V	39.45	112.70	N/A	N/A
5755.00	68.75	AV	V	39.45	102.18	N/A	N/A
5725.00	36.80	PK	V	39.48	70.26	122.20	51.94
5720.00	36.49	PK	V	39.49	69.96	110.80	40.84
5700.00	33.05	PK	V	39.51	66.54	105.20	38.66
5650.00	31.16	PK	V	39.49	64.63	68.20	3.57
11510.00	33.96	PK	V	20.67	48.61	74.00	25.39
11510.00	21.78	AV	V	20.67	36.43	54.00	17.57
17265.00	45.14	PK	V	26.94	66.06	68.20	2.14
High Channel: 5795 MHz							
5795.00	68.74	PK	H	39.43	102.15	N/A	N/A
5795.00	55.49	AV	H	39.43	88.90	N/A	N/A
5795.00	80.70	PK	V	39.43	114.11	N/A	N/A
5795.00	67.76	AV	V	39.43	101.17	N/A	N/A
5850.00	32.81	PK	V	39.49	66.28	122.20	55.92
5855.00	32.77	PK	V	39.51	66.26	110.80	44.54
5875.00	32.08	PK	V	39.60	65.66	105.20	39.54
5925.00	31.71	PK	V	39.68	65.37	68.20	2.83
11590.00	34.09	PK	V	20.88	48.95	74.00	25.05
11590.00	21.89	AV	V	20.88	36.75	54.00	17.25
17385.00	44.40	PK	V	28.07	66.45	68.20	1.75

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
5775.00	63.44	PK	H	39.44	96.86	N/A	N/A
5775.00	51.16	AV	H	39.44	84.58	N/A	N/A
5775.00	73.26	PK	V	39.44	106.68	N/A	N/A
5775.00	61.66	AV	V	39.44	95.08	N/A	N/A
5725.00	34.68	PK	V	39.48	68.14	122.20	54.06
5720.00	37.05	PK	V	39.49	70.52	110.80	40.28
5700.00	34.19	PK	V	39.51	67.68	105.20	37.52
5650.00	31.05	PK	V	39.49	64.52	68.20	3.68
5850.00	34.69	PK	V	39.49	68.16	122.20	54.04
5855.00	32.53	PK	V	39.51	66.02	110.80	44.78
5875.00	32.14	PK	V	39.60	65.72	105.20	39.48
5925.00	31.08	PK	V	39.68	64.74	68.20	3.46
11550.00	33.65	PK	V	20.78	48.41	74.00	25.59
11550.00	21.37	AV	V	20.78	36.13	54.00	17.87
17325.00	41.40	PK	V	27.41	62.79	68.20	5.41

802.11ax hew20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	71.19	PK	H	39.46	104.63	N/A	N/A
5745.00	61.47	AV	H	39.46	94.91	N/A	N/A
5745.00	82.49	PK	V	39.46	115.93	N/A	N/A
5745.00	72.29	AV	V	39.46	105.73	N/A	N/A
5725.00	46.58	PK	V	39.48	80.04	122.20	42.16
5720.00	44.34	PK	V	39.49	77.81	110.80	32.99
5700.00	32.75	PK	V	39.51	66.24	105.20	38.96
5650.00	31.01	PK	V	39.49	64.48	68.20	3.72
11490.00	33.46	PK	V	20.67	48.11	74.00	25.89
11490.00	21.23	AV	V	20.67	35.88	54.00	18.12
17235.00	44.88	PK	V	26.76	65.62	68.20	2.58
Middle Channel: 5785 MHz							
5785.00	66.38	PK	H	39.44	99.80	N/A	N/A
5785.00	56.41	AV	H	39.44	89.83	N/A	N/A
5785.00	77.28	PK	V	39.44	110.70	N/A	N/A
5785.00	67.02	AV	V	39.44	100.44	N/A	N/A
11570.00	34.02	PK	V	20.83	48.83	74.00	25.17
11570.00	22.01	AV	V	20.83	36.82	54.00	17.18
17355.00	43.59	PK	V	27.74	65.31	68.20	2.89
High Channel: 5825 MHz							
5825.00	65.84	PK	H	39.46	99.28	N/A	N/A
5825.00	55.34	AV	H	39.46	88.78	N/A	N/A
5825.00	77.92	PK	V	39.46	111.36	N/A	N/A
5825.00	67.40	AV	V	39.46	100.84	N/A	N/A
5850.00	33.43	PK	V	39.49	66.90	122.20	55.30
5855.00	32.21	PK	V	39.51	65.70	110.80	45.10
5875.00	31.89	PK	V	39.60	65.47	105.20	39.73
5925.00	31.43	PK	V	39.68	65.09	68.20	3.11
11650.00	33.26	PK	V	21.07	48.31	74.00	25.69
11650.00	21.13	AV	V	21.07	36.18	54.00	17.82
17475.00	43.63	PK	V	28.61	66.22	68.20	1.98

802.11ax hew40((2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.00	66.47	PK	H	39.45	99.90	N/A	N/A
5755.00	55.38	AV	H	39.45	88.81	N/A	N/A
5755.00	78.67	PK	V	39.45	112.10	N/A	N/A
5755.00	67.28	AV	V	39.45	100.71	N/A	N/A
5725.00	45.90	PK	V	39.48	79.36	122.20	42.84
5720.00	43.97	PK	V	39.49	77.44	110.80	33.36
5700.00	38.42	PK	V	39.51	71.91	105.20	33.29
5650.00	31.74	PK	V	39.49	65.21	68.20	2.99
11510.00	34.02	PK	V	20.67	48.67	74.00	25.33
11510.00	22.01	AV	V	20.67	36.66	54.00	17.34
17265.00	42.19	PK	V	26.94	63.11	68.20	5.09
High Channel: 5795 MHz							
5795.00	65.13	PK	H	39.43	98.54	N/A	N/A
5795.00	53.17	AV	H	39.43	86.58	N/A	N/A
5795.00	78.66	PK	V	39.43	112.07	N/A	N/A
5795.00	66.04	AV	V	39.43	99.45	N/A	N/A
5850.00	33.80	PK	V	39.49	67.27	122.20	54.93
5855.00	33.01	PK	V	39.51	66.50	110.80	44.30
5875.00	32.01	PK	V	39.60	65.59	105.20	39.61
5925.00	31.77	PK	V	39.68	65.43	68.20	2.77
11590.00	33.77	PK	V	20.88	48.63	74.00	25.37
11590.00	21.39	AV	V	20.88	36.25	54.00	17.75
17385.00	42.26	PK	V	28.07	64.31	68.20	3.89

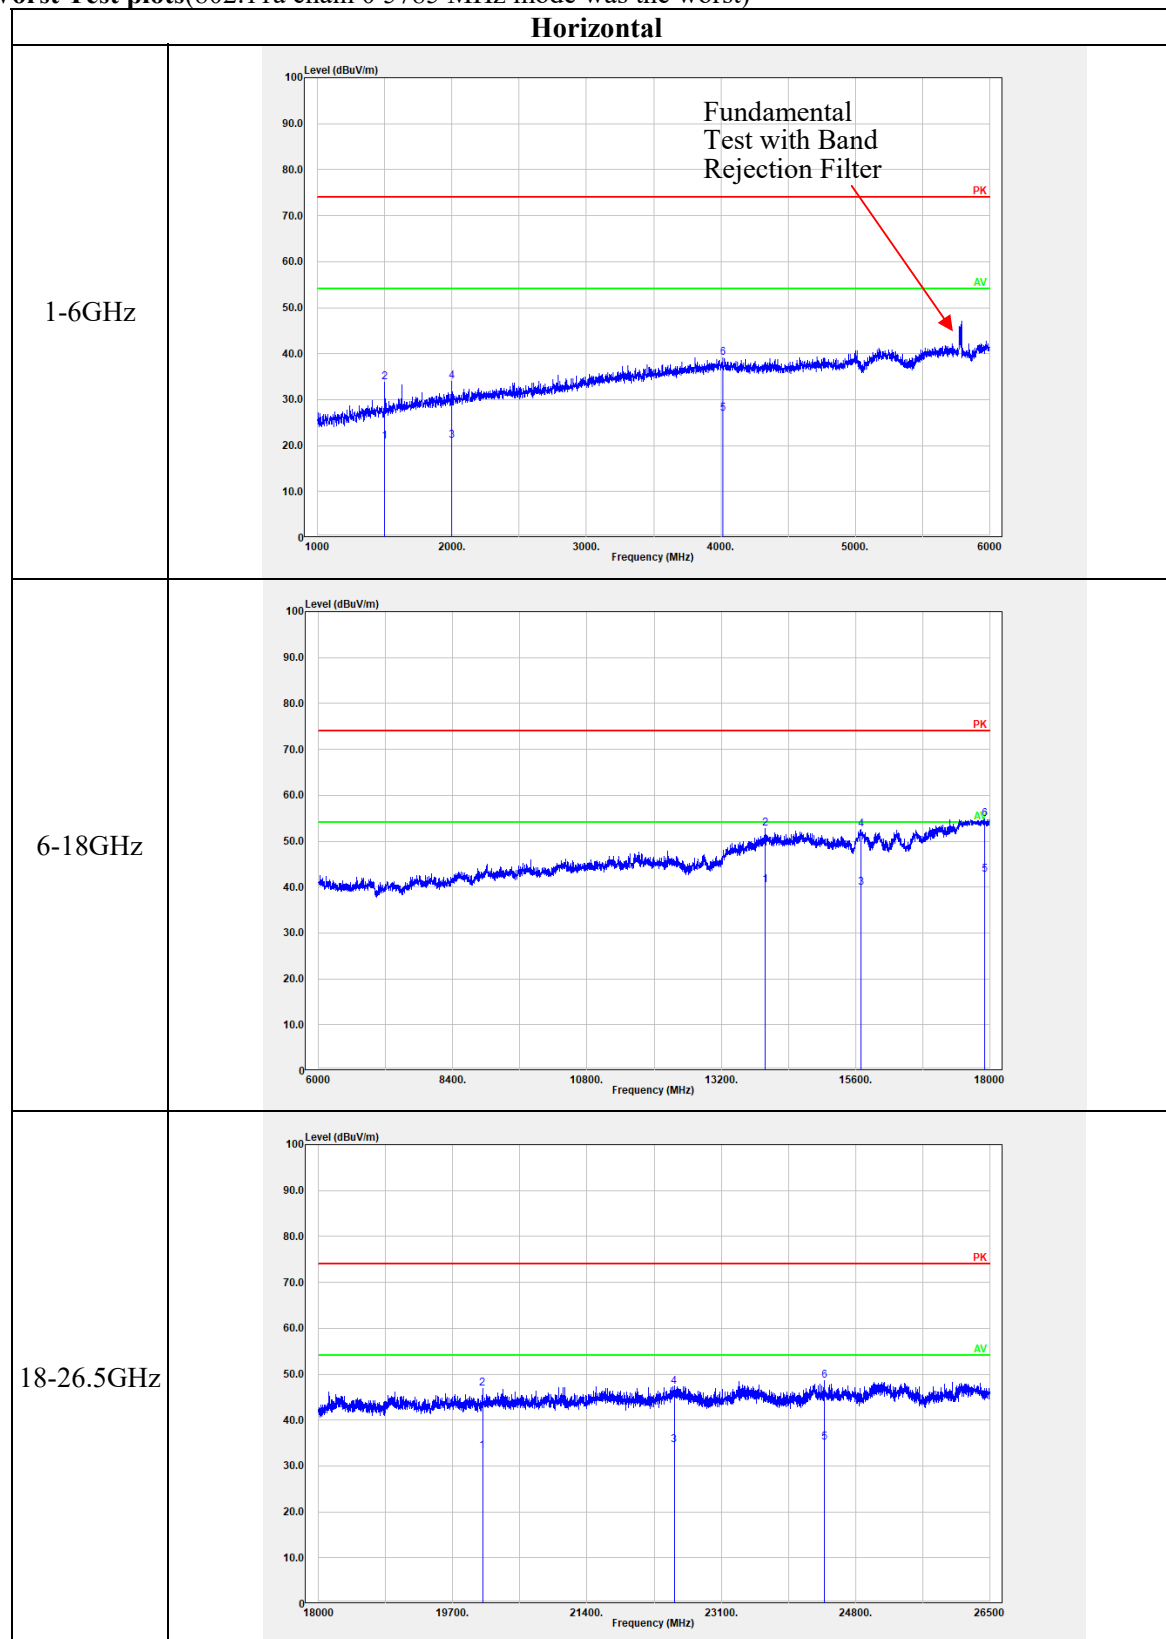
802.11ax hew80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
5775.00	65.92	PK	H	39.44	99.34	N/A	N/A
5775.00	52.64	AV	H	39.44	86.06	N/A	N/A
5775.00	77.42	PK	V	39.44	110.84	N/A	N/A
5775.00	64.82	AV	V	39.44	98.24	N/A	N/A
5725.00	40.01	PK	V	39.48	73.47	122.20	48.73
5720.00	40.52	PK	V	39.49	73.99	110.80	36.81
5700.00	37.91	PK	V	39.51	71.40	105.20	33.80
5650.00	33.58	PK	V	39.49	67.05	68.20	1.15
5850.00	38.82	PK	V	39.49	72.29	122.20	49.91
5855.00	38.16	PK	V	39.51	71.65	110.80	39.15
5875.00	35.25	PK	V	39.60	68.83	105.20	36.37
5925.00	32.15	PK	V	39.68	65.81	68.20	2.39
11550.00	33.88	PK	V	20.78	48.64	74.00	25.36
11550.00	20.65	AV	V	20.78	35.41	54.00	18.59
17325.00	40.56	PK	V	27.41	61.95	68.20	6.25

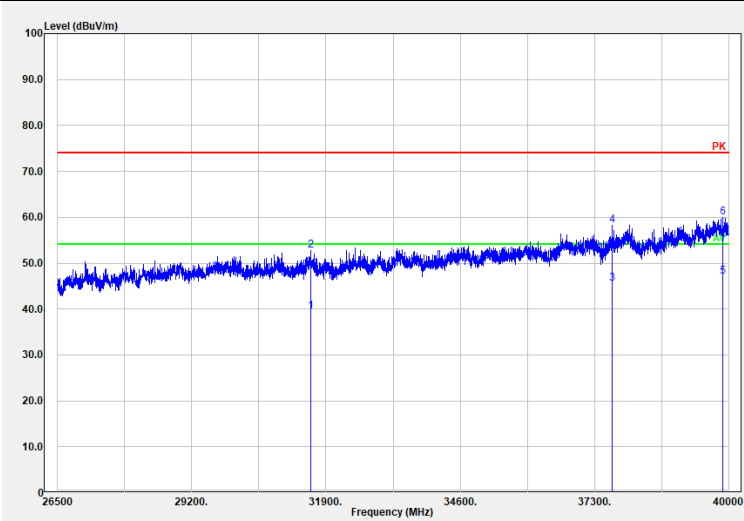
Note:

Result = Reading + Factor- Distance extrapolation Factor

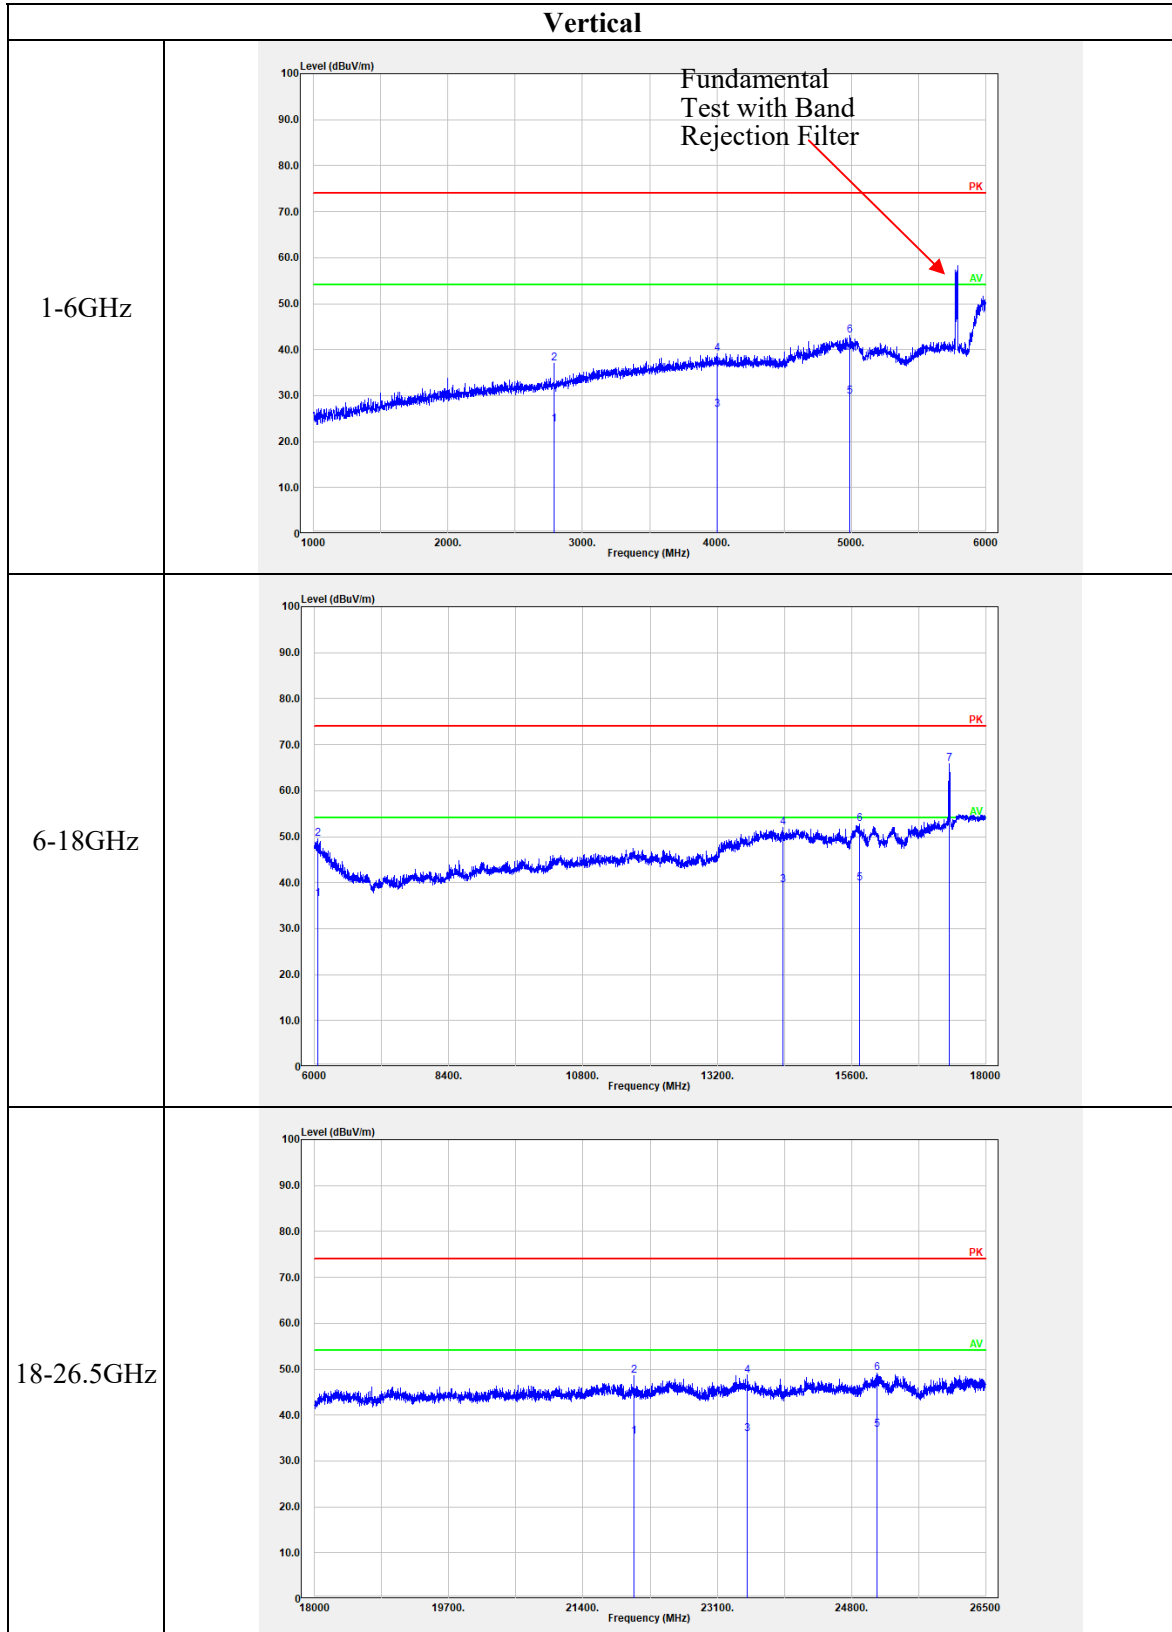
Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

Worst Test plots(802.11a chain 0 5785 MHz mode was the worst)

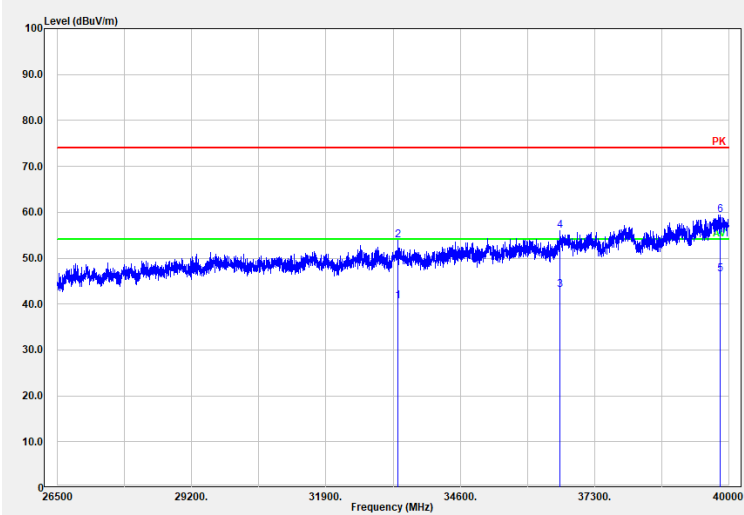
26.5-40GHz



Vertical



26.5-40GHz



4.3 Emission Bandwidth:

Serial Number:	CR22080019-RF-S1	Test Date:	2022/8/20-2022/11/15
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1-27.6	Relative Humidity: (%)	62-68	ATM Pressure: (kPa)	99.8-100.2
----------------------	-----------	------------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	21.2	17.166
	5200	21.2	17.246
	5240	21.2	17.246
802.11n ht20	5180	21.52	18.124
	5200	21.44	18.204
	5240	21.44	18.124
802.11n ht40	5190	39.68	36.886
	5230	39.68	37.046
802.11ac vht20	5180	21.52	17.964
	5200	21.52	18.044
	5240	21.52	17.964
802.11ac vht40	5190	39.52	37.046
	5230	39.68	37.206
802.11ac vht80	5210	81.6	76.008
802.11ax hew20	5180	22	19.002
	5200	21.92	19.002
	5240	22.32	19.002
802.11ax hew40	5190	40.16	38.004
	5230	40.32	38.004
802.11ax hew80	5210	82.56	76.966

Note:

Test only was performed at Chain 0.

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	21.28	17.246
	5280	21.2	17.166
	5320	21.2	17.086
802.11n ht20	5260	21.52	18.044
	5280	21.52	18.044
	5320	21.52	18.124
802.11n ht40	5270	39.04	36.727
	5310	39.04	36.727
802.11ac vht20	5260	21.6	17.964
	5280	21.68	17.964
	5320	21.68	17.964
802.11ac vht40	5270	39.36	36.727
	5310	39.36	36.727
802.11ac vht80	5290	81.92	75.689
802.11ax hew20	5260	21.92	19.002
	5280	21.92	19.002
	5320	21.92	19.002
802.11ax hew40	5270	39.84	37.685
	5310	39.84	37.685
802.11ax hew80	5290	82.24	76.647
802.11ac vht160	5250	169.76	155.848
802.11ax hew160	5250	166.67	156.487

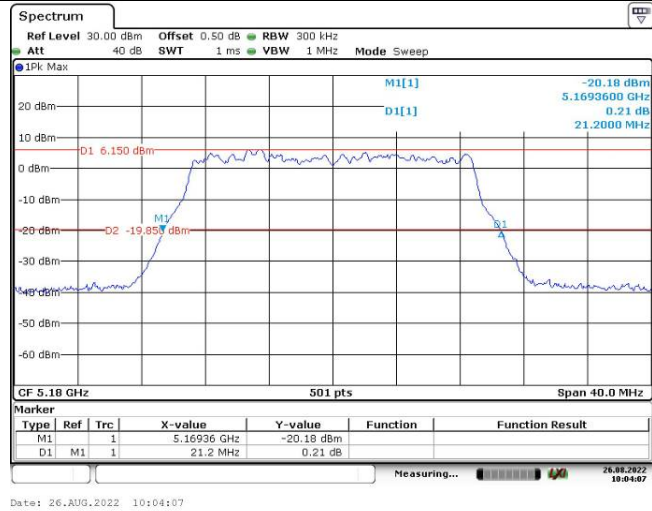
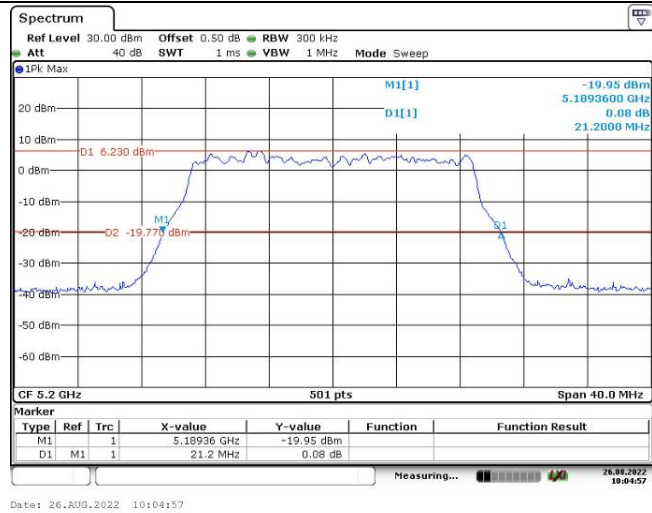
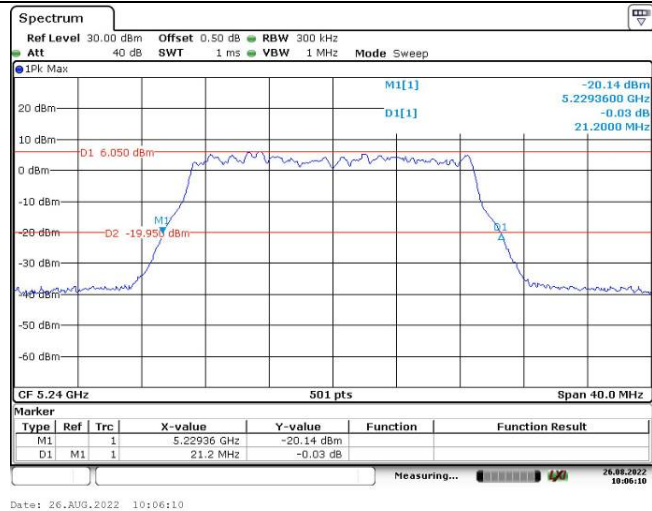
Note: Test only was performed at Chain 0.

5725-5850 MHz:

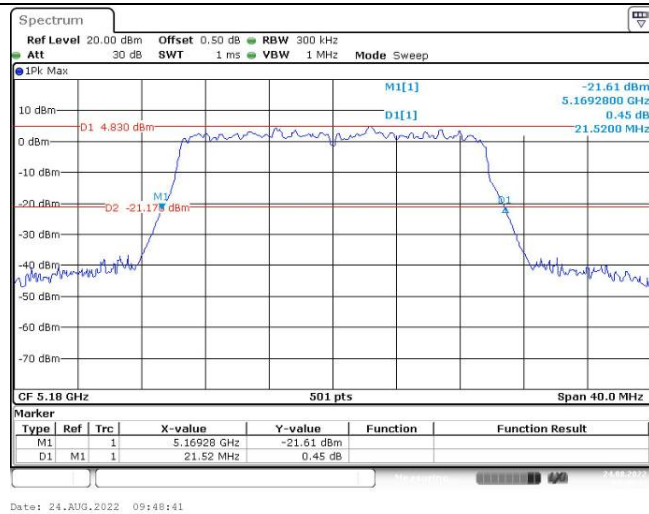
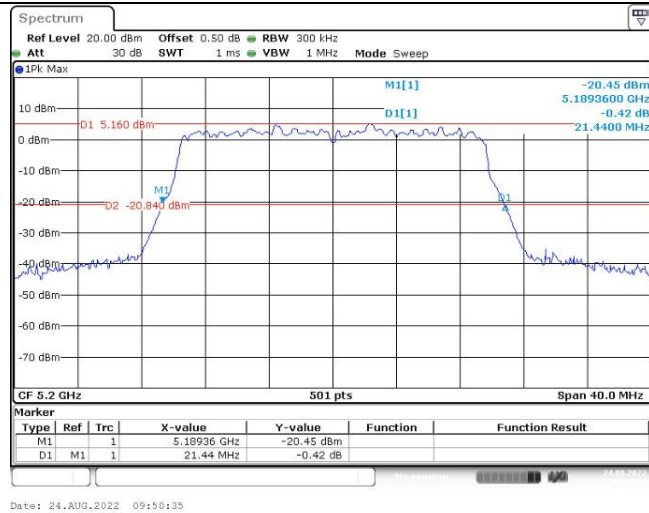
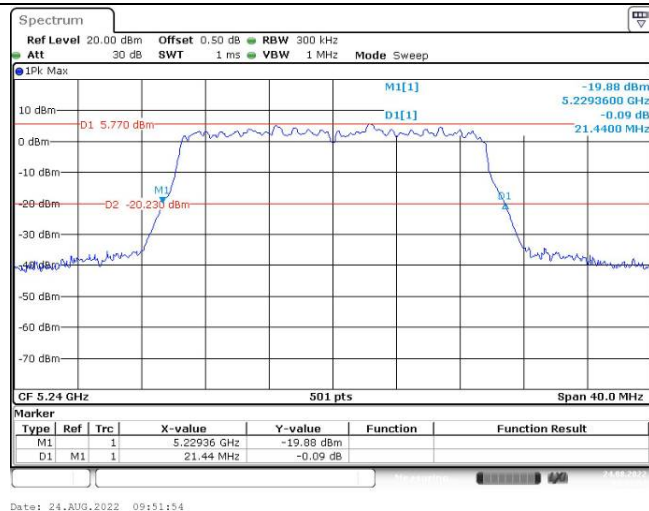
Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.511	17.405
	5785	16.439	17.405
	5825	16.445	17.325
802.11n ht20	5745	17.602	18.283
	5785	17.61	18.283
	5825	17.668	18.283
802.11n ht40	5755	36.333	37.206
	5795	36.39	37.206
802.11ac vht20	5745	17.66	18.124
	5785	17.704	18.124
	5825	17.668	18.124
802.11ac vht40	5755	36.56	37.206
	5795	36.537	37.206
802.11ac vht80	5775	76.28	76.008
802.11ax hew20	5745	19.128	19.002
	5785	19.164	19.002
	5825	19.07	19.002
802.11ax hew40	5755	37.837	38.643
	5795	37.84	38.643
802.11ax hew80	5775	77.24	77.924
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz Test only was performed at Chain 0. The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			

5150-5250MHz:

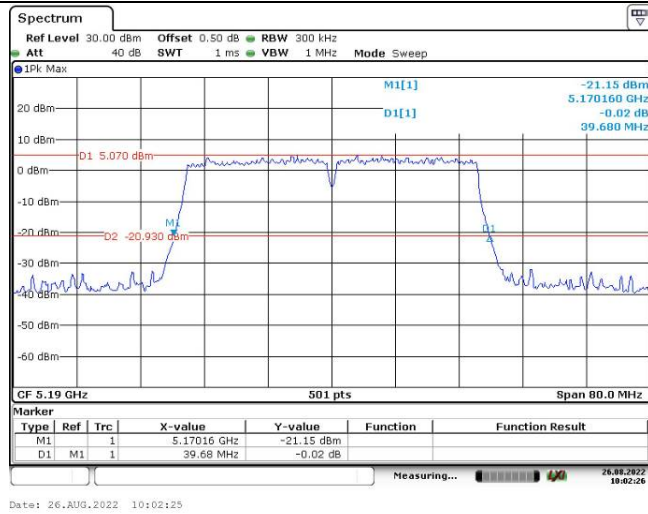
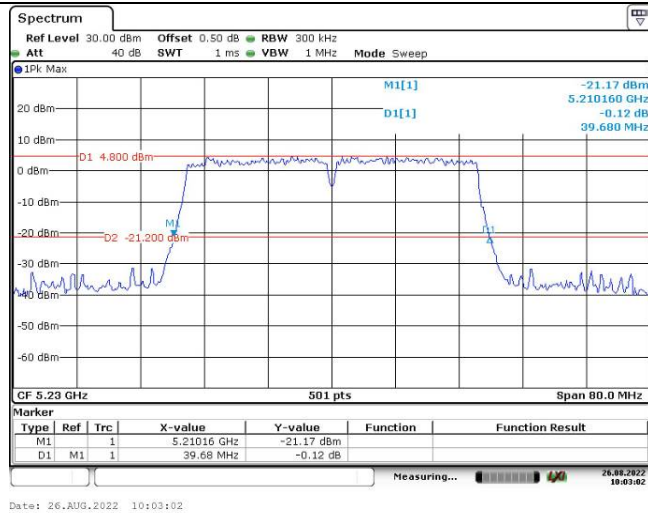
26dB Emission Bandwidth

802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

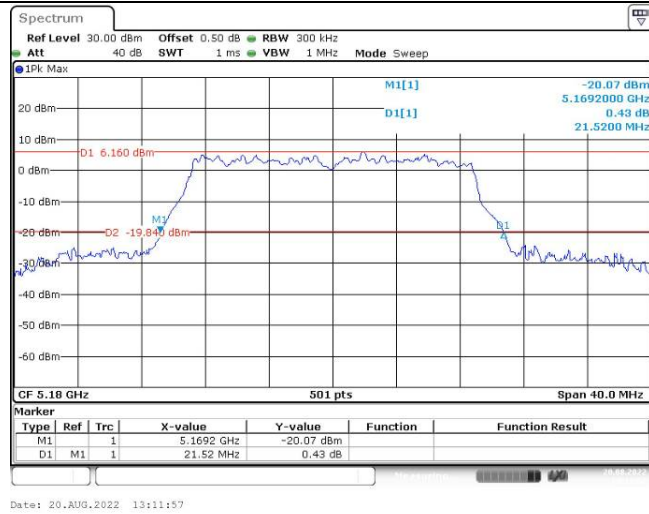
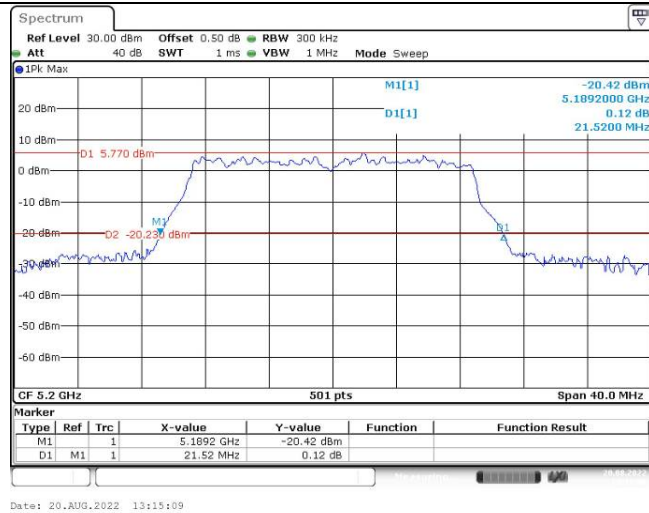
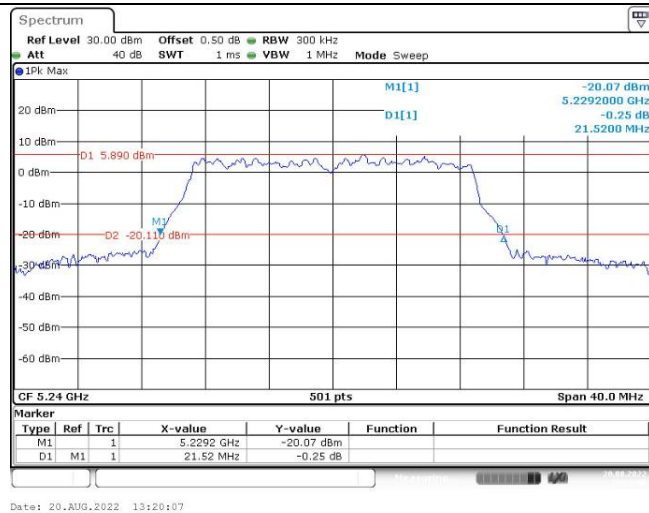
26dB Emission Bandwidth

802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

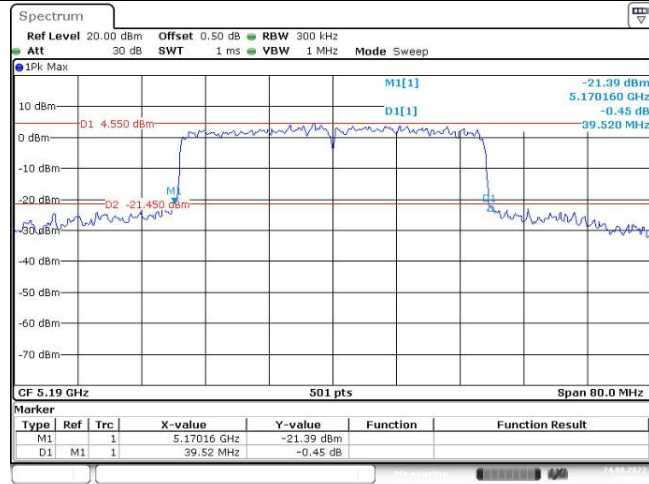
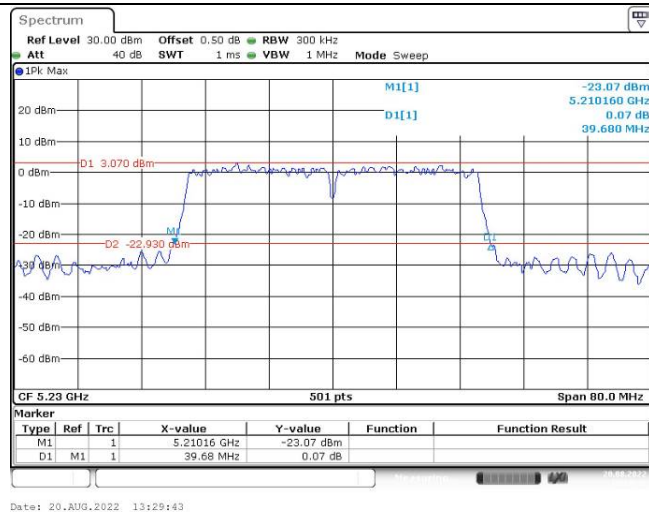
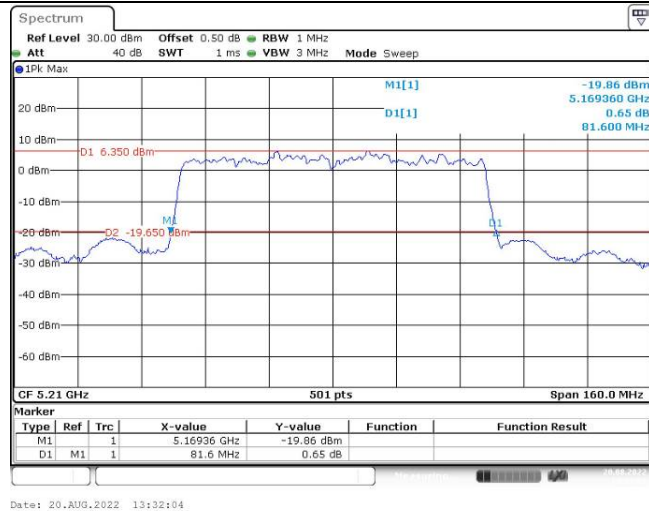
26dB Emission Bandwidth

802.11n ht40
Lowest Channel802.11n ht40
Highest Channel

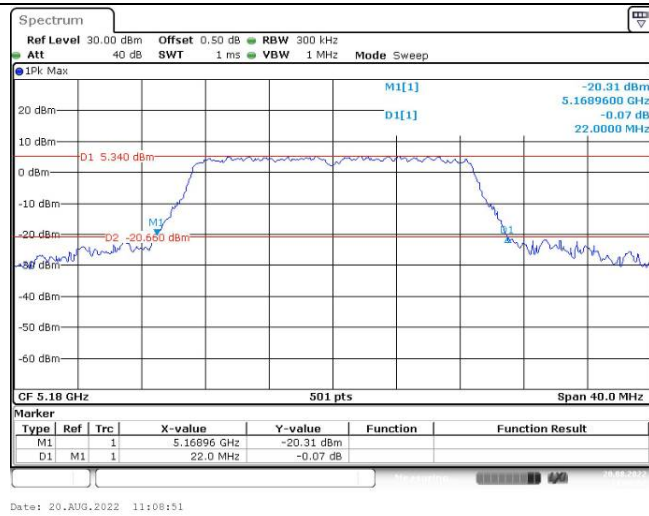
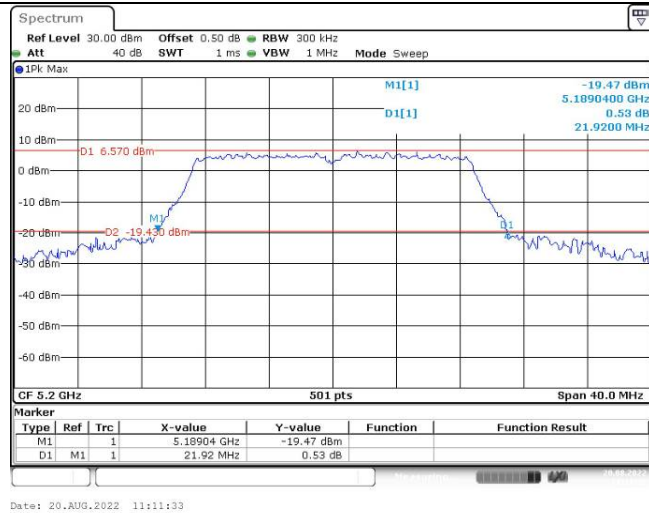
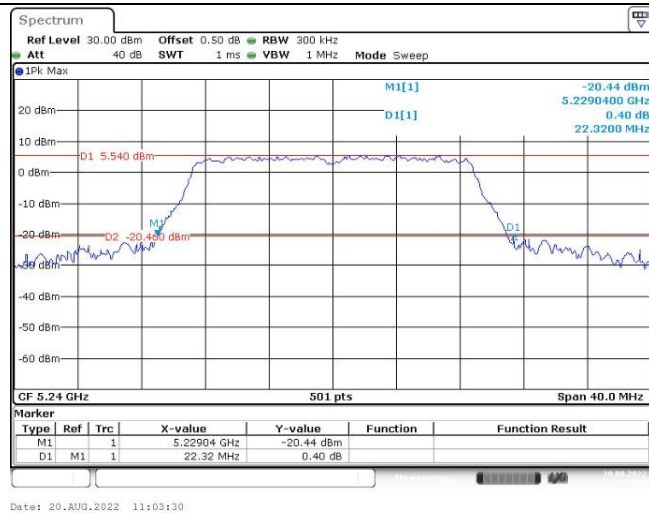
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel802.11ac vht20
Middle Channel802.11ac vht20
Highest Channel

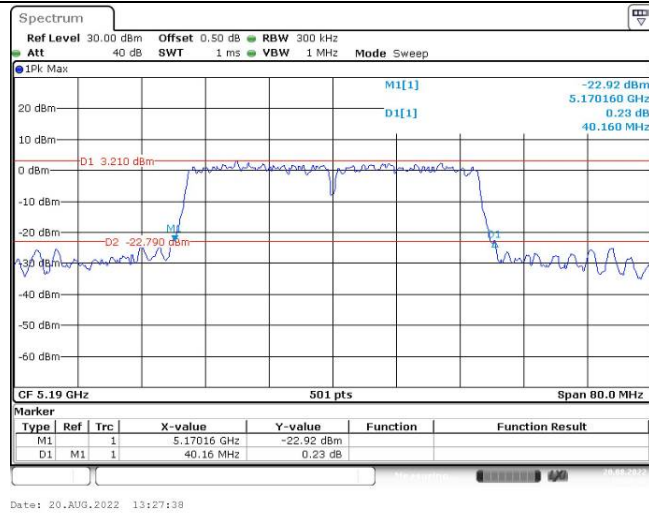
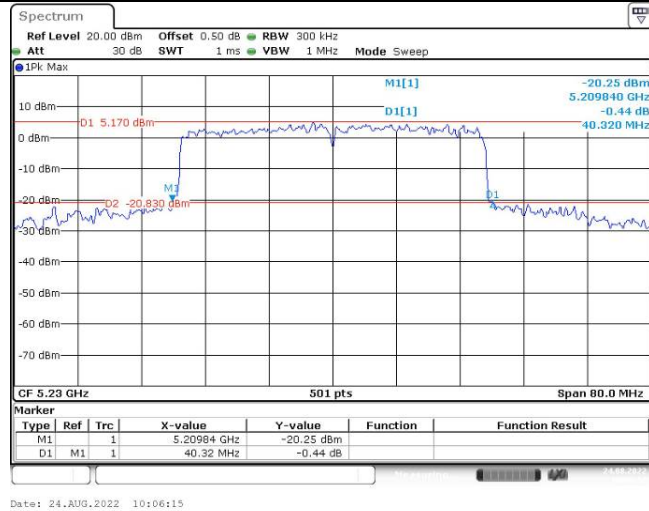
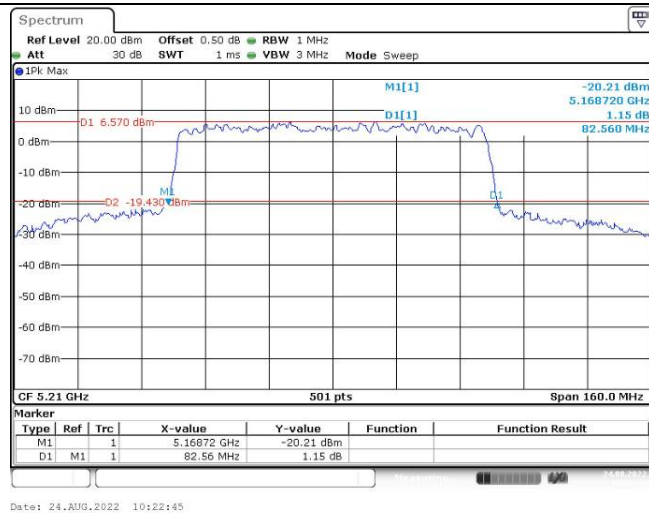
26dB Emission Bandwidth

802.11ac vht40
Lowest Channel802.11ac vht40
Highest Channel802.11ac vht80
Middle Channel

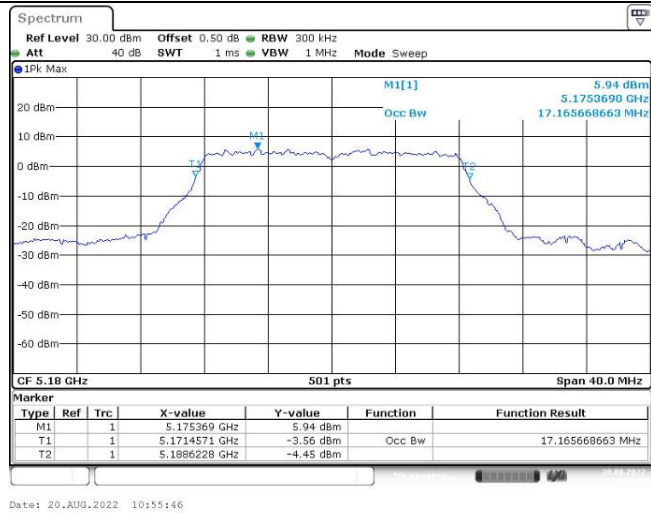
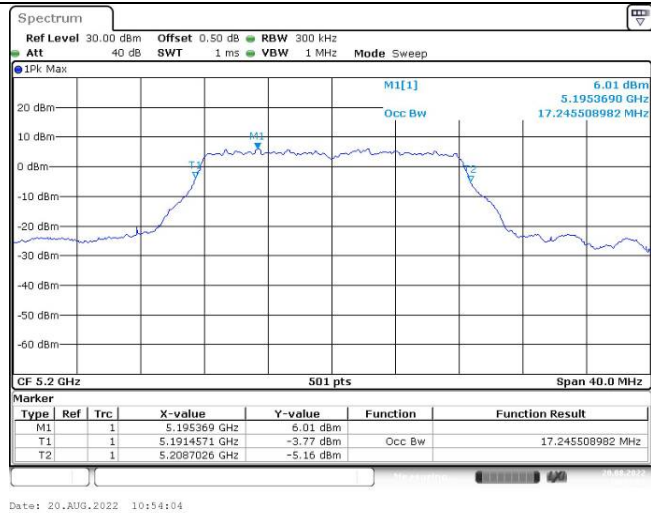
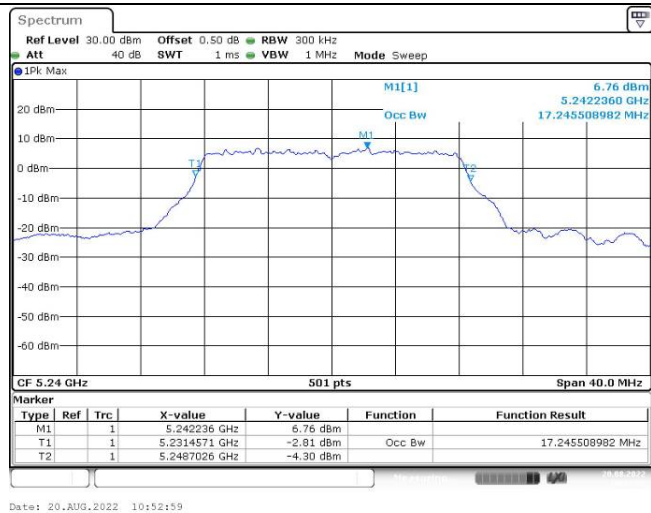
26dB Emission Bandwidth

802.11ax hew20
Lowest Channel802.11ax hew20
Middle Channel802.11ax hew20
Highest Channel

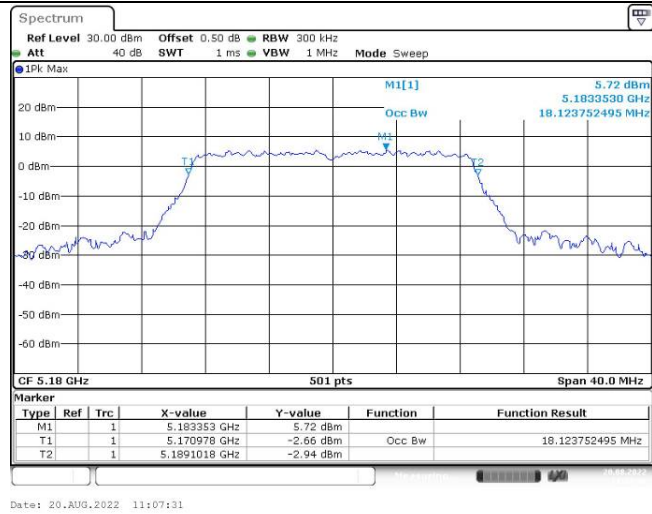
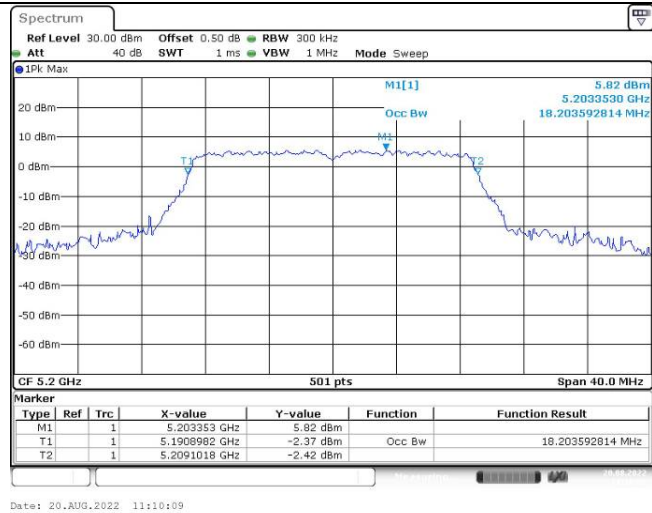
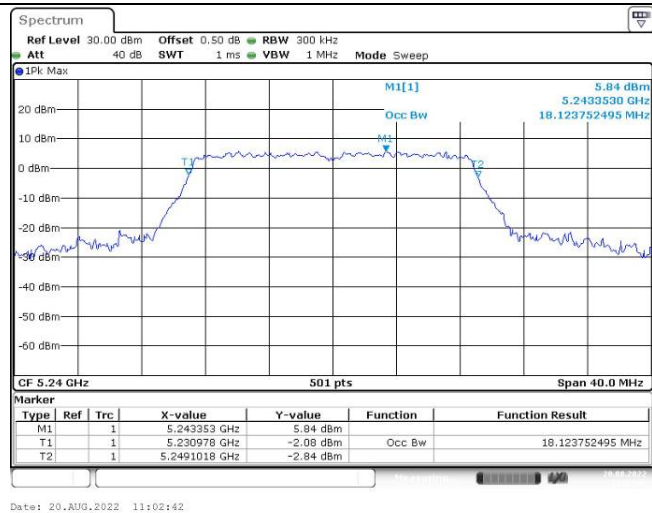
26dB Emission Bandwidth

802.11ax hew40
Lowest Channel802.11ax hew40
Highest Channel802.11ax hew80
Middle Channel

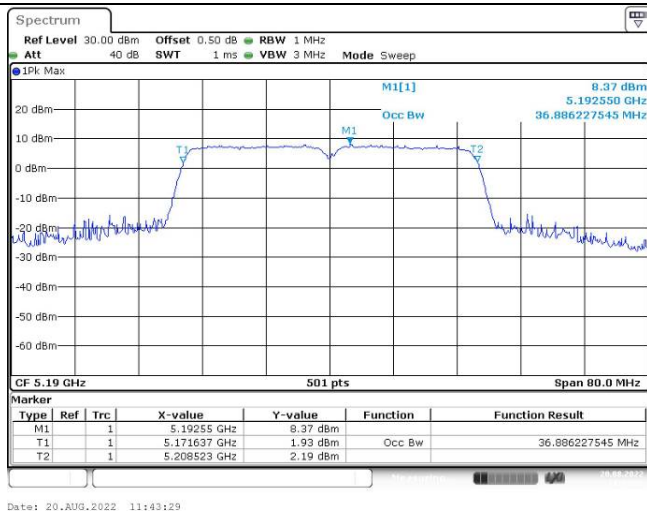
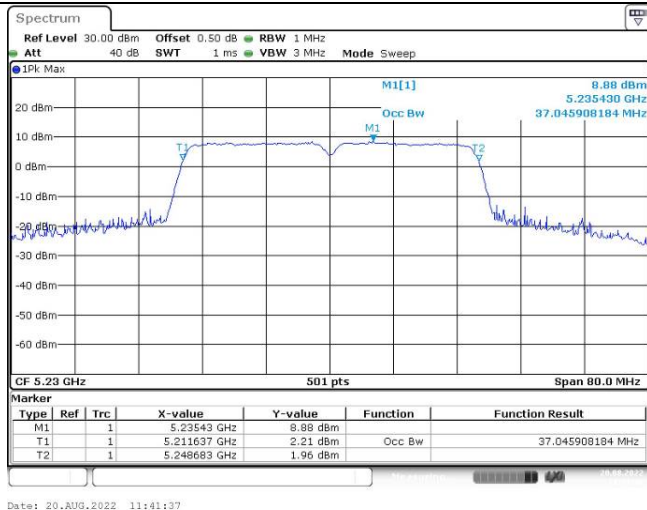
99% Emission Bandwidth

802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

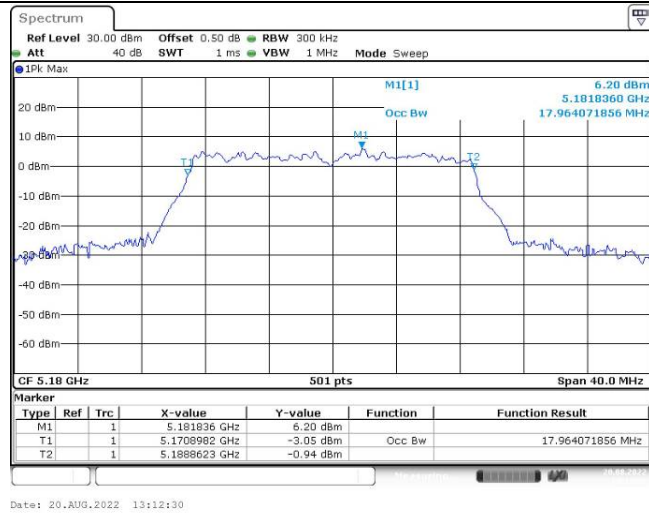
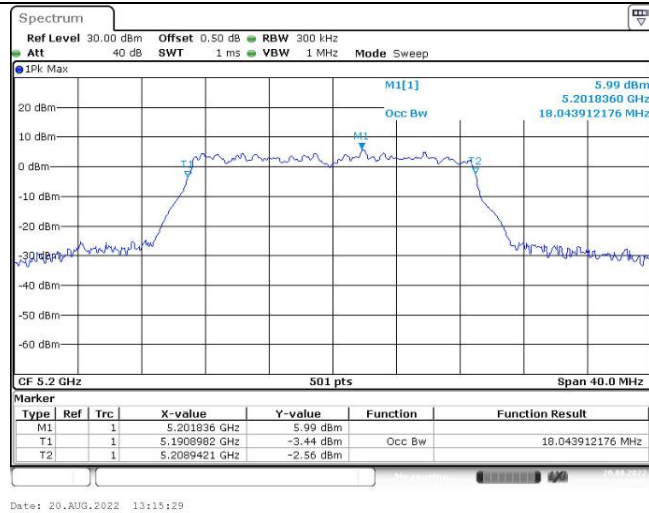
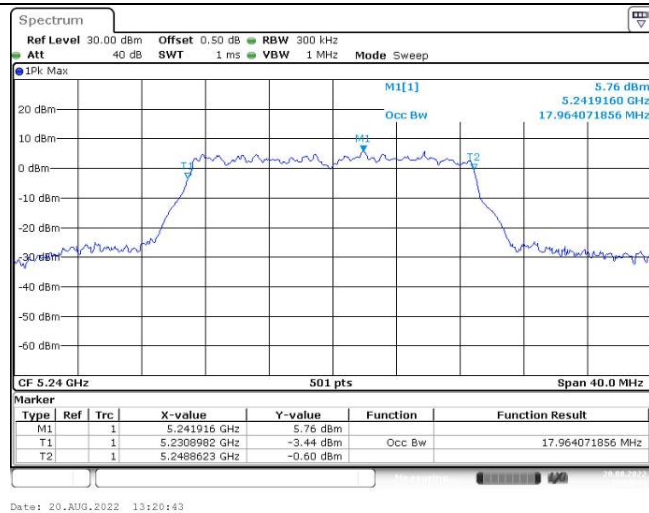
99% Emission Bandwidth

802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

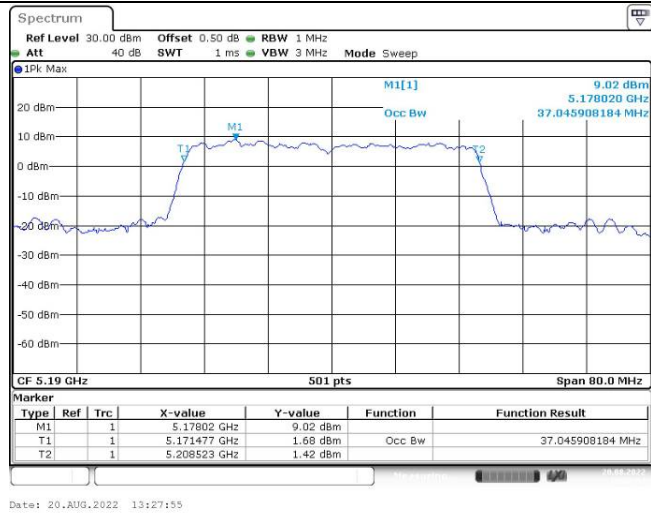
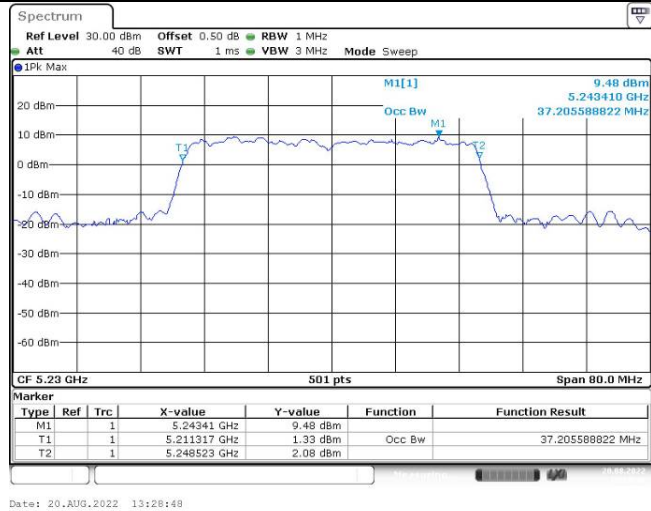
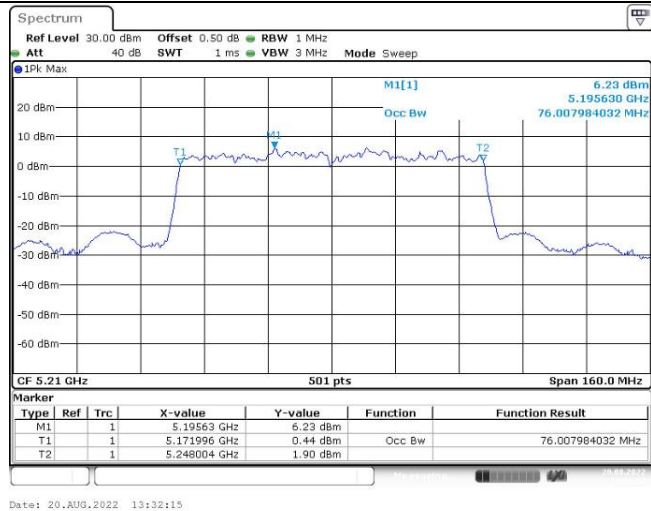
99% Emission Bandwidth

802.11n ht40
Lowest Channel802.11n ht40
Highest Channel

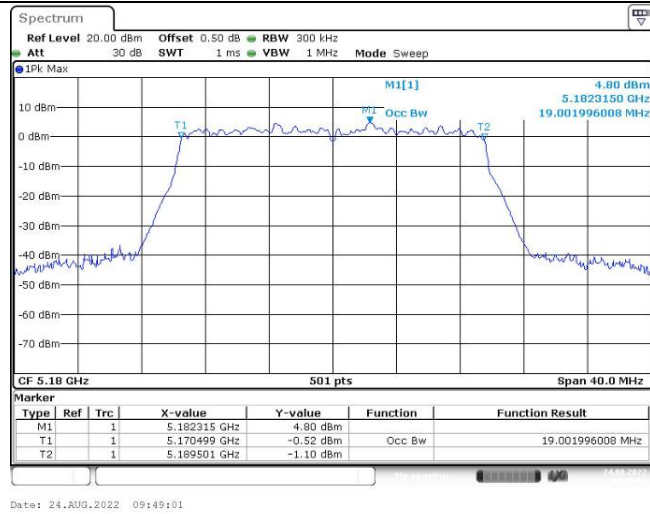
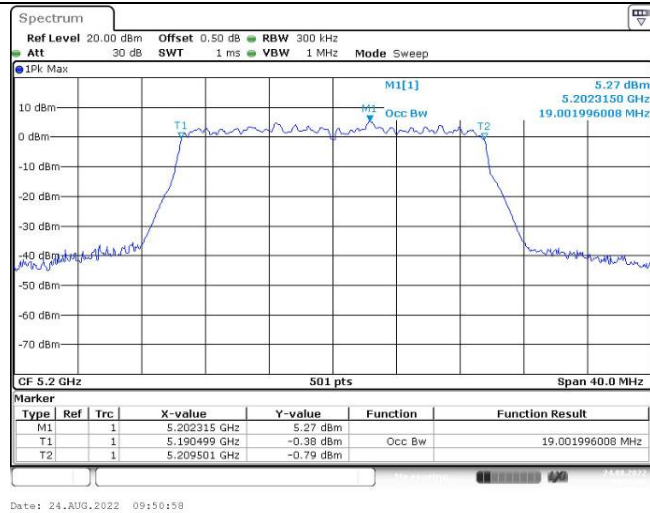
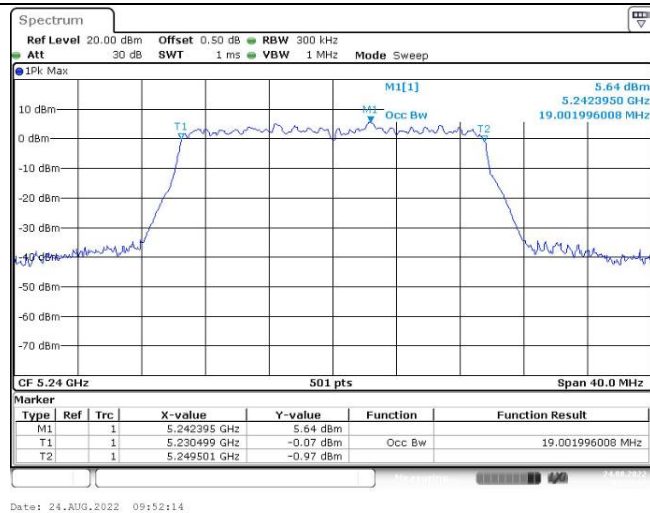
99% Emission Bandwidth

802.11ac vht20
Lowest Channel802.11ac vht20
Middle Channel802.11ac vht20
Highest Channel

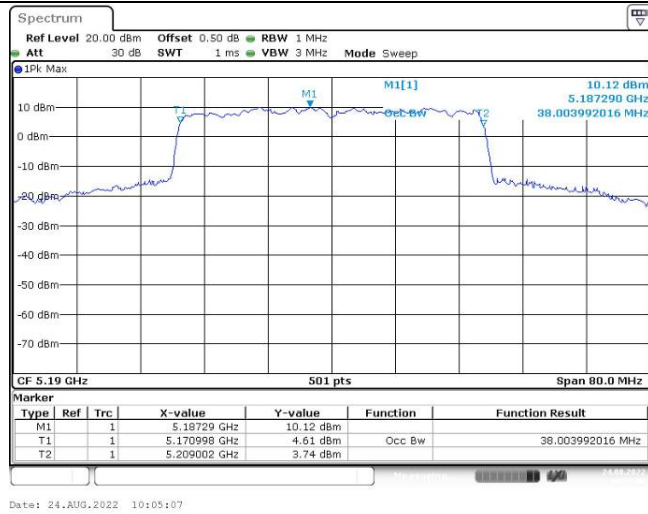
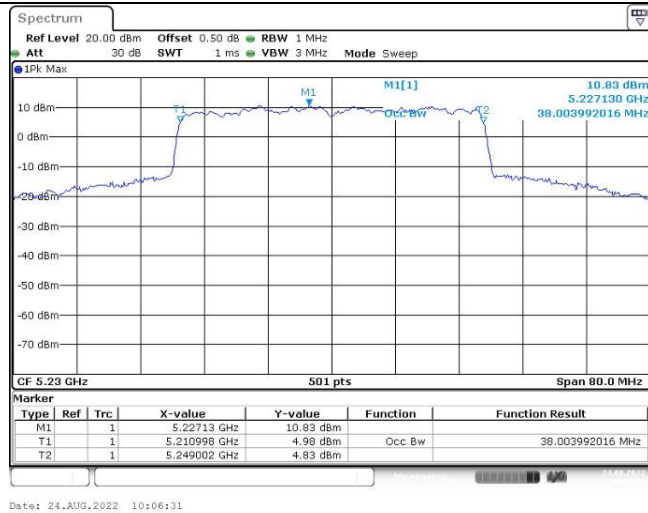
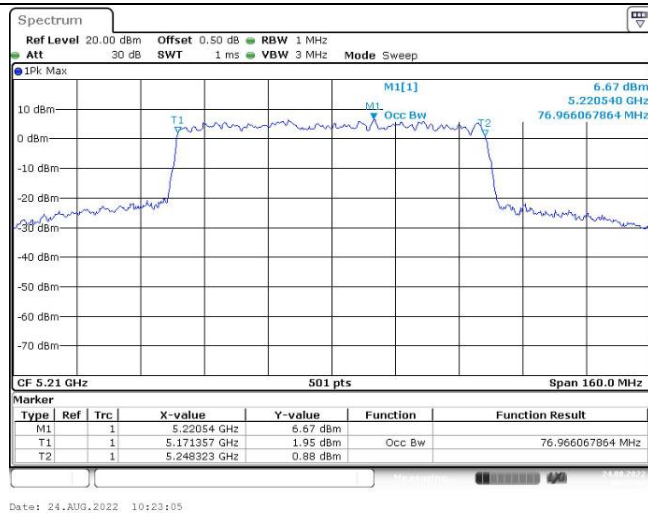
99% Emission Bandwidth

802.11ac vht40
Lowest Channel802.11ac vht40
Highest Channel802.11ac vht80
Middle Channel

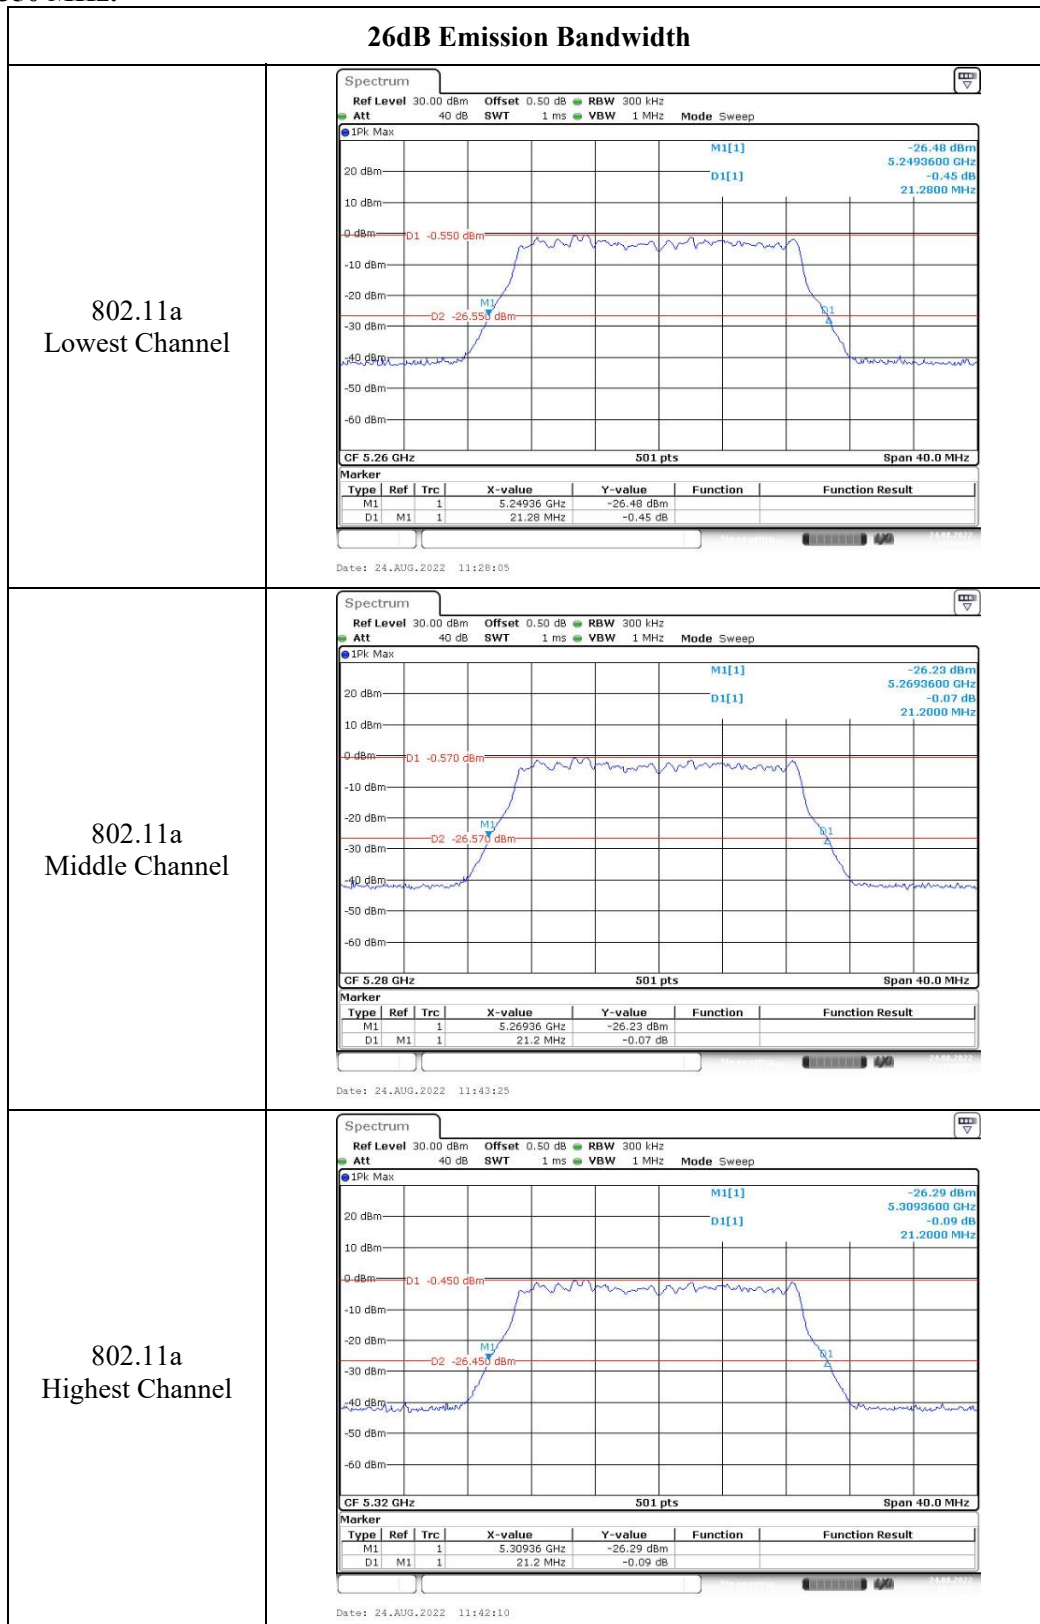
99% Emission Bandwidth

802.11ax hew20
Lowest Channel802.11ax hew20
Middle Channel802.11ax hew20
Highest Channel

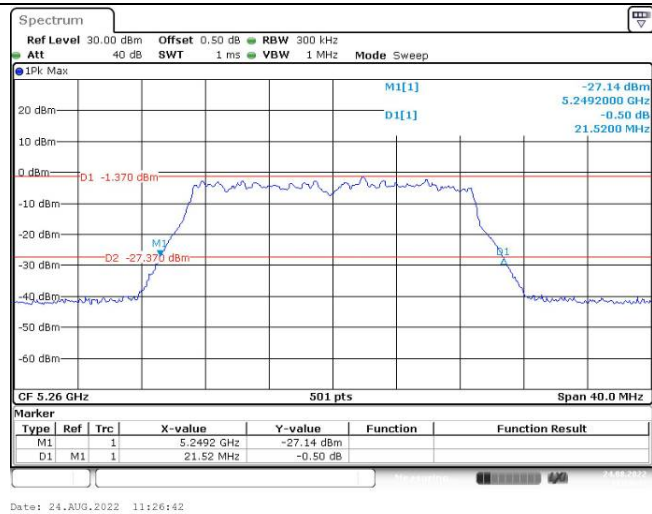
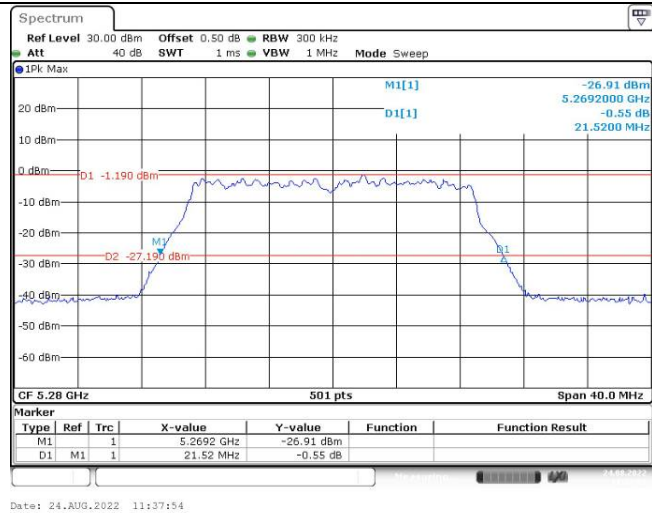
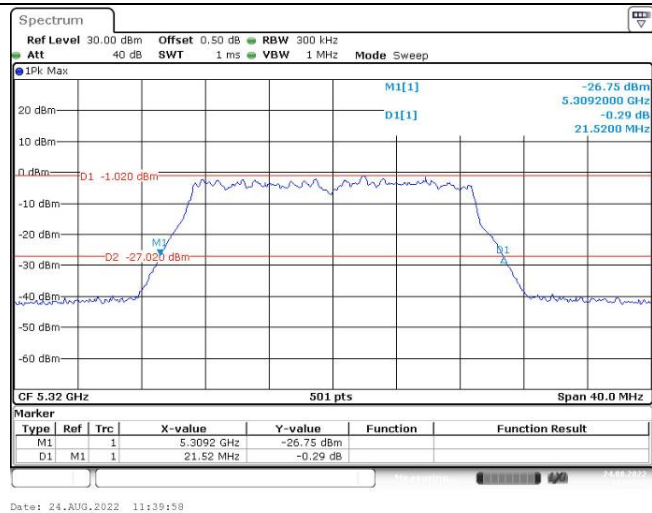
99% Emission Bandwidth

802.11ax hew40
Lowest Channel802.11ax hew40
Highest Channel802.11ax hew80
Middle Channel

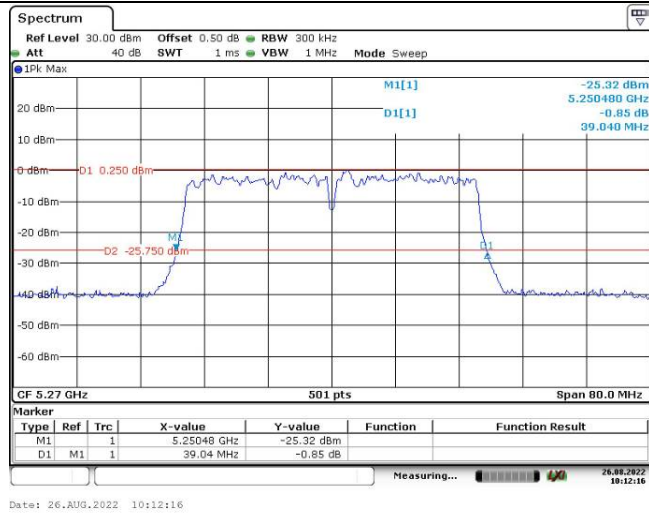
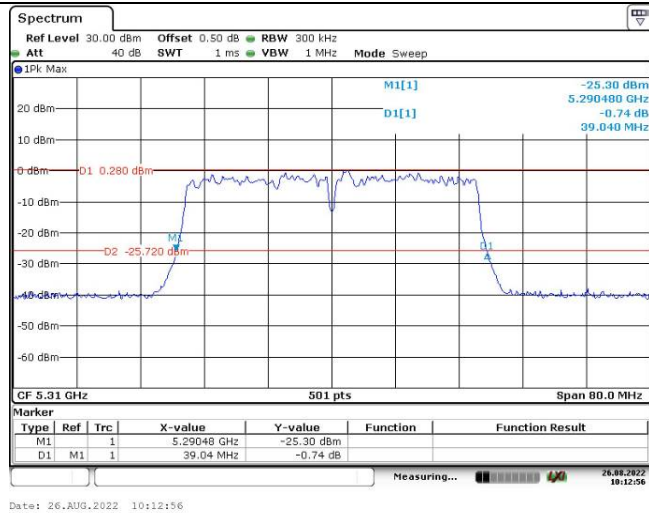
5250-5350 MHz:



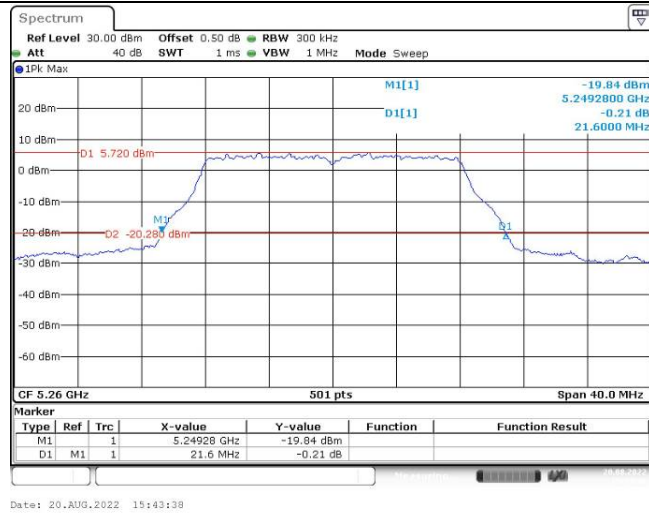
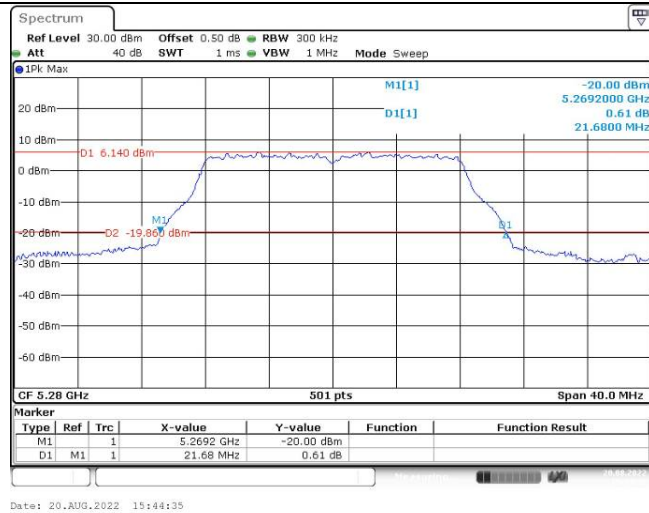
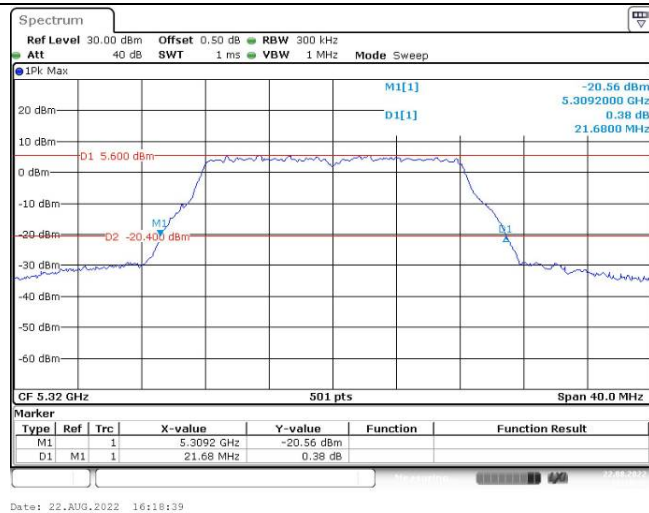
26dB Emission Bandwidth

802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

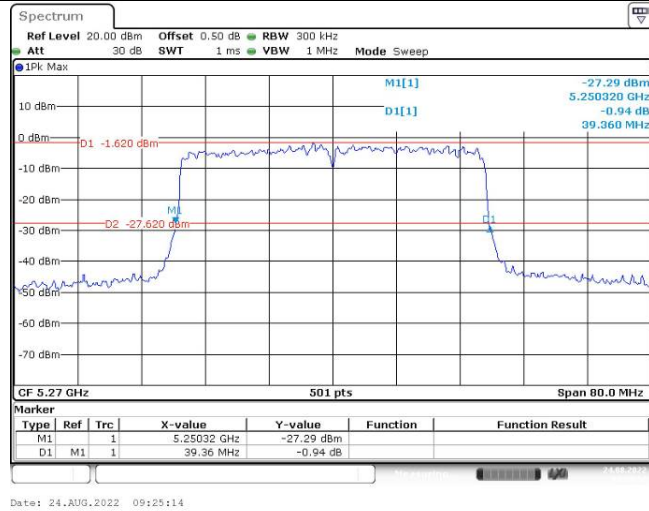
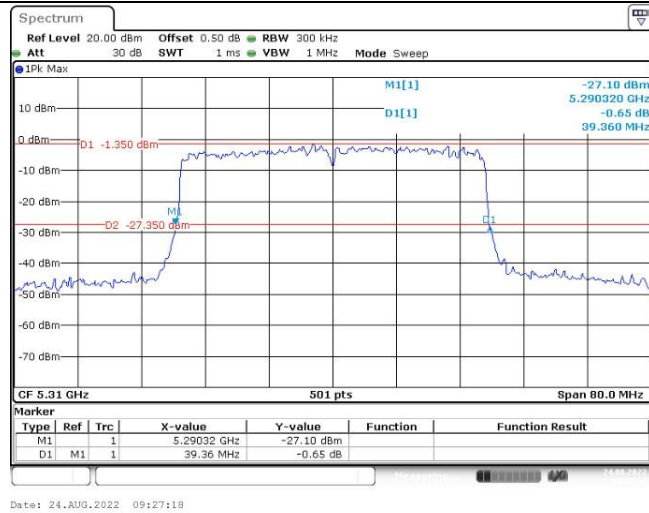
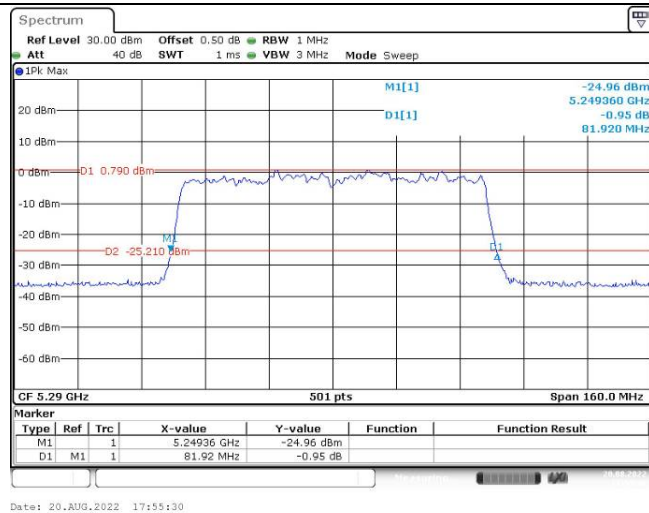
26dB Emission Bandwidth

802.11n ht40
Lowest Channel802.11n ht40
Highest Channel

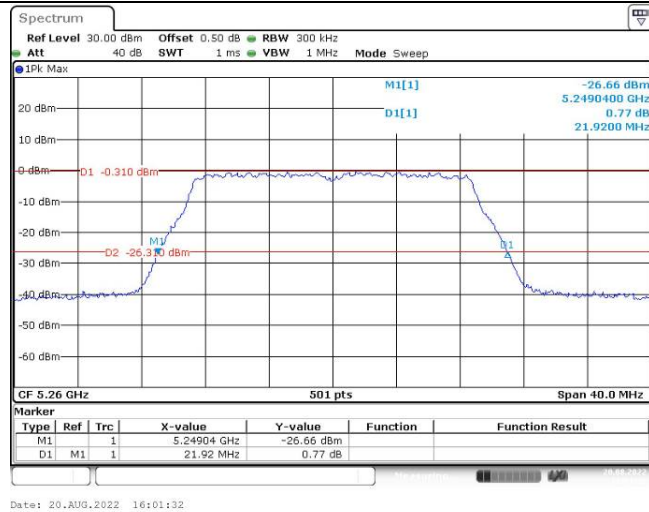
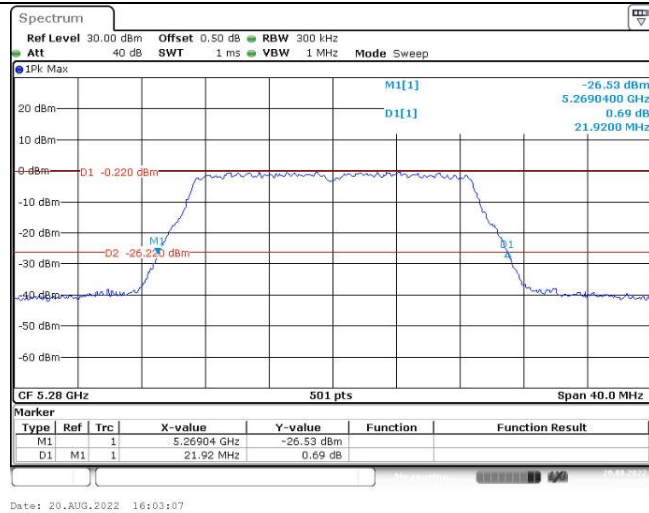
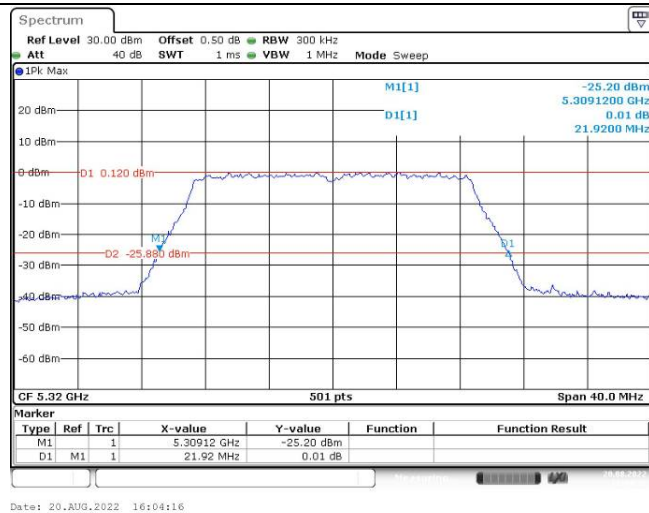
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel802.11ac vht20
Middle Channel802.11ac vht20
Highest Channel

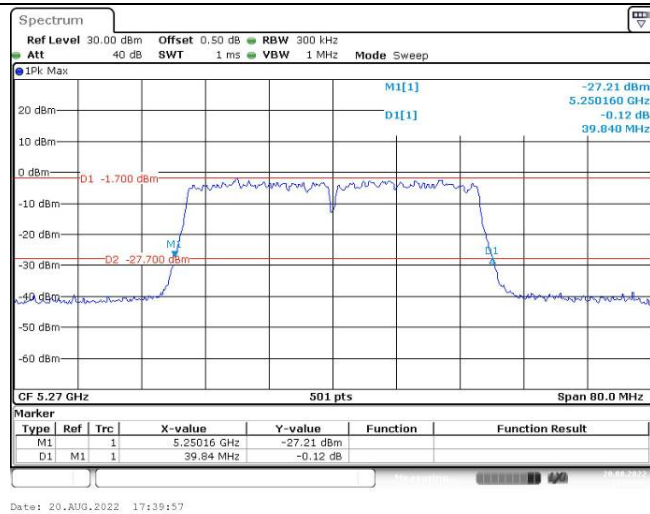
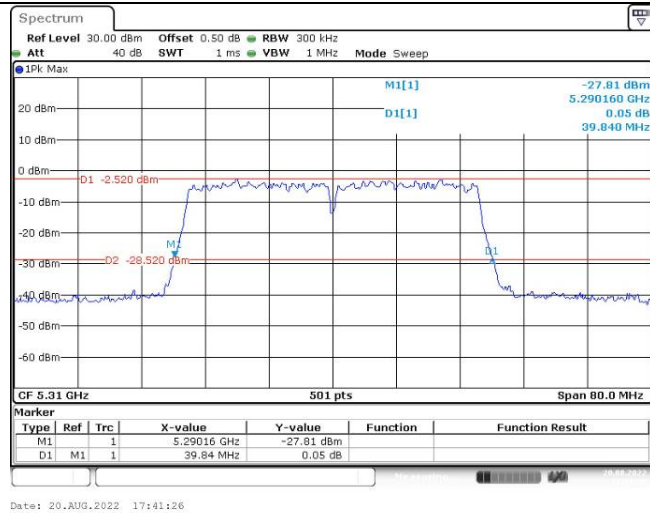
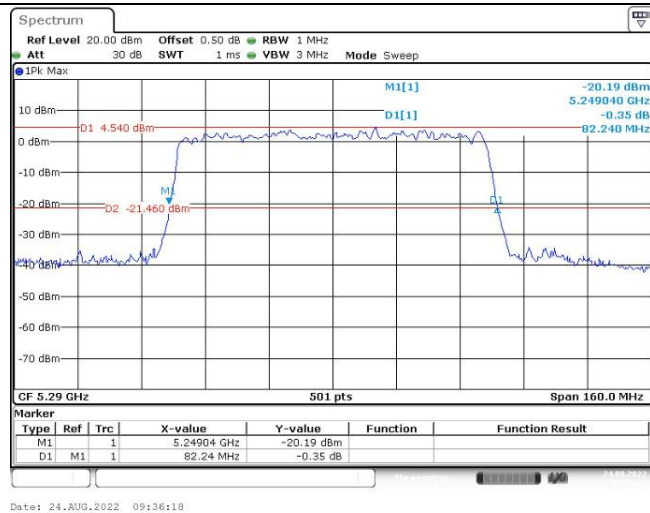
26dB Emission Bandwidth

802.11ac vht40
Lowest Channel802.11ac vht40
Highest Channel802.11ac vht80
Middle Channel

26dB Emission Bandwidth

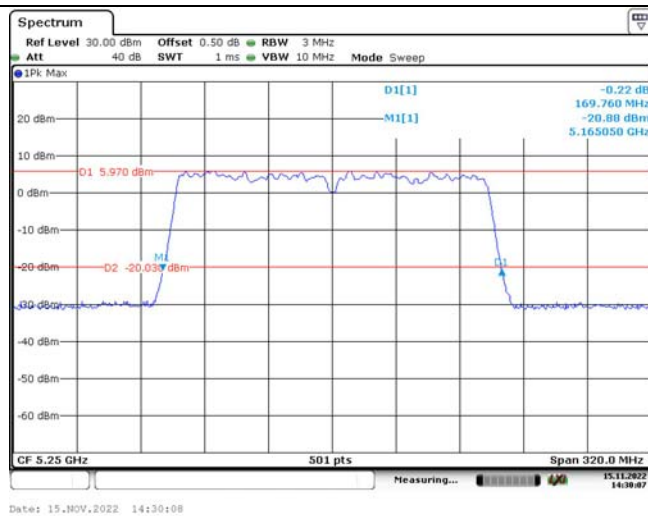
802.11ax hew20
Lowest Channel802.11ax hew20
Middle Channel802.11ax hew20
Highest Channel

26dB Emission Bandwidth

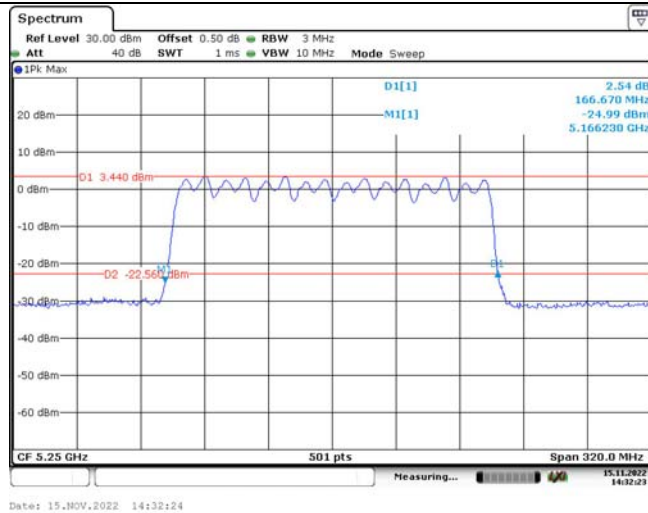
802.11ax hew40
Lowest Channel802.11ax hew40
Highest Channel802.11ax hew80
Middle Channel

26dB Emission Bandwidth

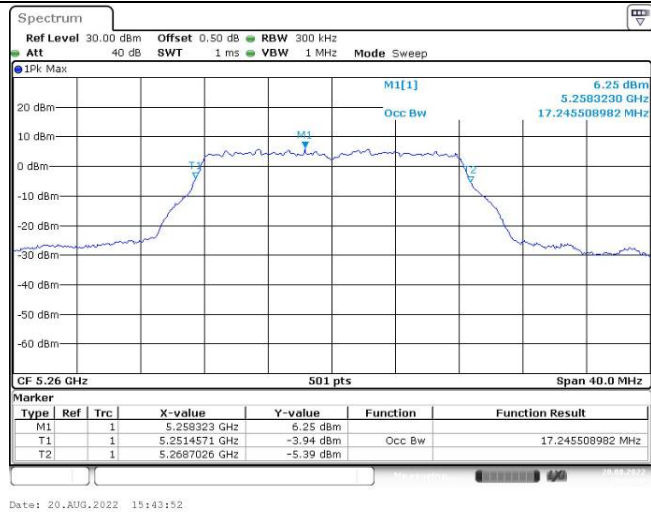
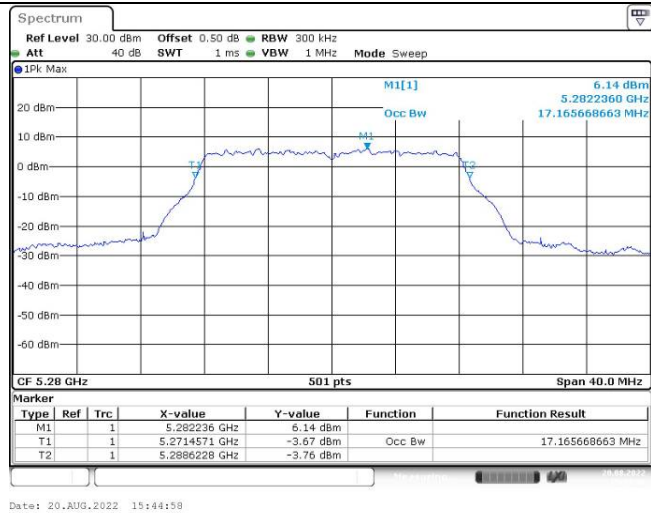
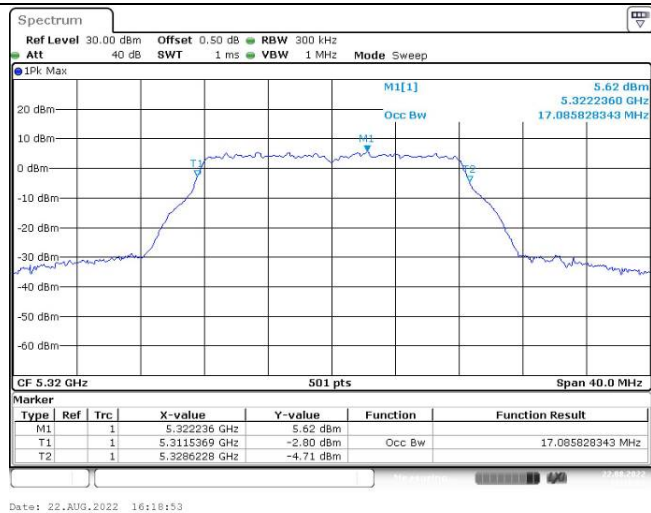
802.11ac vht160



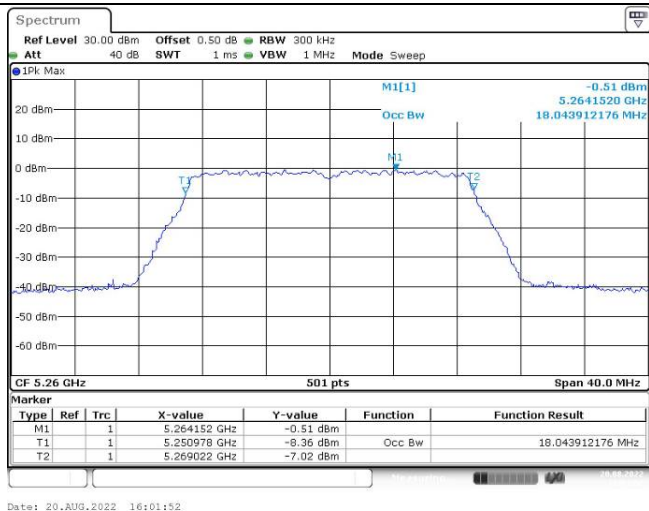
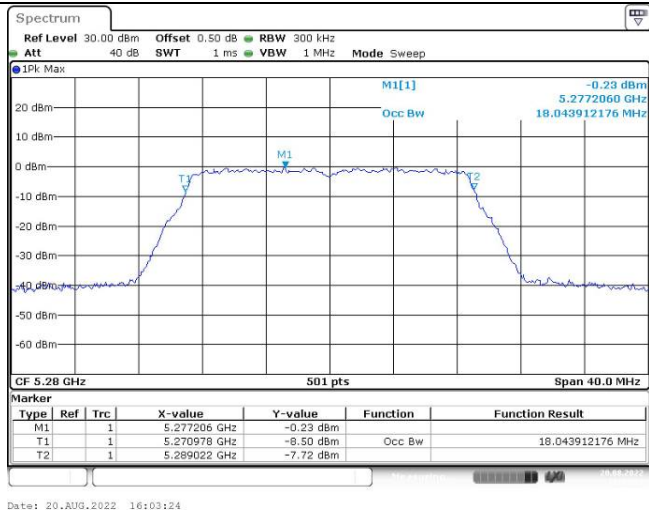
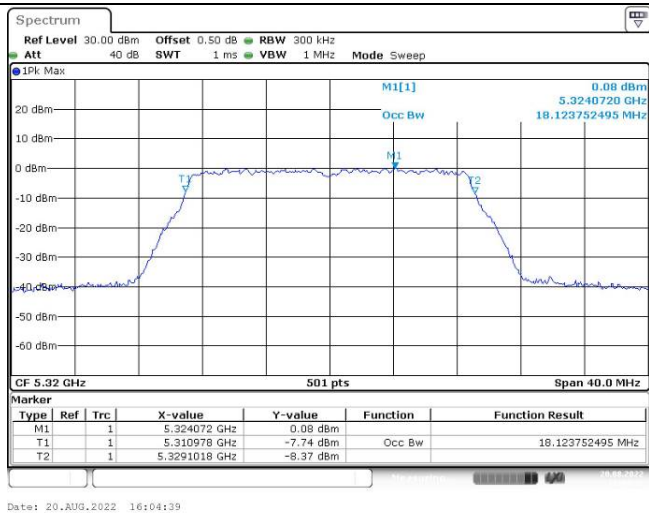
802.11ax hew160



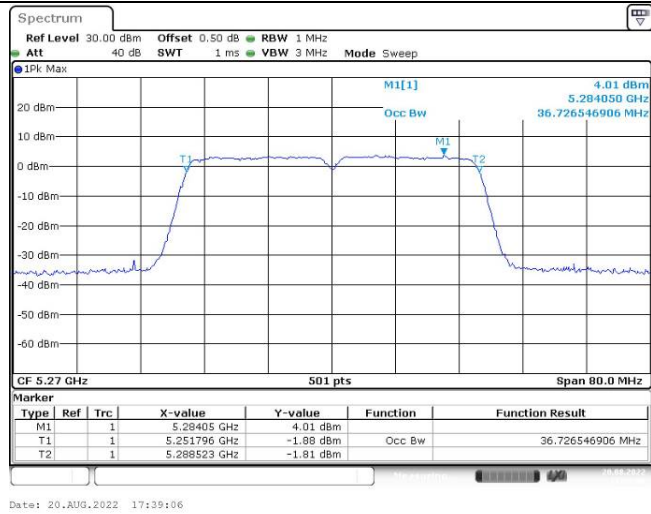
99% Emission Bandwidth

802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

99% Emission Bandwidth

802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

99% Emission Bandwidth

802.11n ht40
Lowest Channel802.11n ht40
Highest Channel