

version 7.0.



FCC PART 15B TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO., LTD.

Tenda Industrial Park, No 34-1, Shilong Rd., Shiyan Town, Bao'an District, Shenzhen, China

FCC ID: V7TW300DV6

Report Type: **Product Type:** Original Report ADSL Router Poh Test Engineer: Leon Chen **Report Number:** R2DG130813011-00A **Report Date:** 2013-09-29 Ivan Cao from Car **Reviewed By:** RF Leader **Test Laboratory:** Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above

TABLE OF CONTENTS

Report No.: R2DG130813011-00A

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION	4
JUSTIFICATION	4
EUT Exercise Software	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
External Cable	4
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
SOMMAN OF TEST RESULTS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	
EMI TEST RECEIVER SETUP	8
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	8
TEST EQUIPMENT LIST AND DETAILS	9
TEST RESULTS SUMMARY	
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	14
TEST RESULTS SUMMARY	14
Troe Data	1.4

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SHENZHEN TENDA TECHNOLOGY CO.,LTD.'s product, model number: W300D (FCC ID: V7TW300DV6) (the "EUT") in this report was a ADSL Router, which was measured approximately: 17.2 cm (L) x 10.8 cm (W) x 3 cm (H), rated input voltage: DC 9V from adapter.

Report No.: R2DG130813011-00A

Adapter Information: HEWEISHUN

MODEL: TEA09U-09100

INPUT: AC 100-240V, 50/60Hz, 0.3A

OUTPUT: DC 9V, 1.0A

* All measurement and test data in this report was gathered from production sample serial number: 130813011 (Assigned by BACL. Dongguan). The EUT was received on 2013-08-15.

Objective

This report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: V7TW300DV6 for Wifi.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at http://ts.nist.gov/standards/scopes/5000690.htm

FCC Part15B Page 3 of 18

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user). The highest operating frequency is 333MHz.

Report No.: R2DG130813011-00A

EUT Exercise Software

The software "Lan test.exe" was used for testing.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
DELL	PC	GX620	/
Huawei	DSLAM Swicth	MA5615	98MA6444773-001
/	Load	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	То
Parallel Cable	yes	no	1.2	Laptop	Printer
Serial Cable	yes	no	1.2	Laptop	Modem
RJ45 Cable	no	no	1.0	EUT	Laptop
RJ45 Cable	no	no	10.0	EUT	PC
RJ45 Cable*2	no	no	10.0	EUT	Load
RJ11 Cable	no	no	10.0	EUT	DSLAM Swicth
Keyboard Cable	yes	no	2.0	Laptop	Keyboard

FCC Part15B Page 4 of 18

Block Diagram of Test Setup

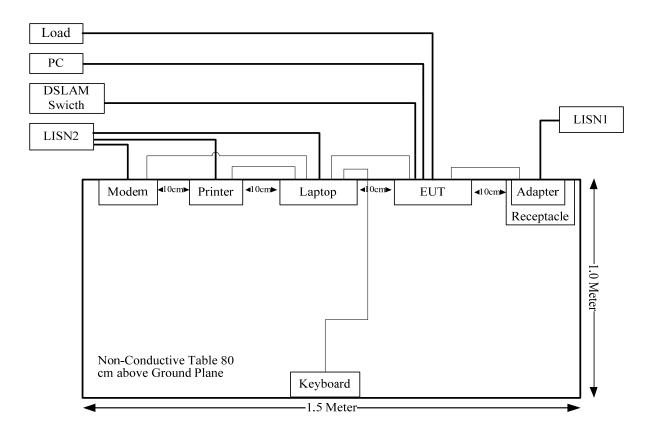

Report No.: R2DG130813011-00A

FCC Part15B Page 5 of 18

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

Report No.: R2DG130813011-00A

FCC Part15B Page 6 of 18

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: R2DG130813011-00A

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	$U_{ m cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

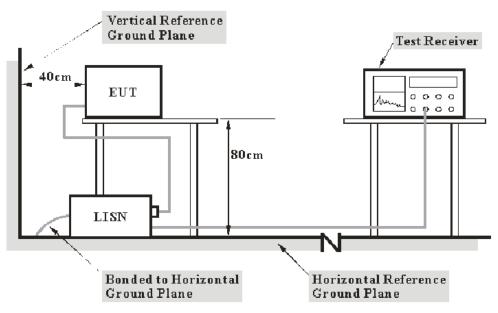

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

FCC Part15B Page 7 of 18

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

Report No.: R2DG130813011-00A

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

 V_R : reading voltage amplitude A_c : attenuation caused by cable loss VDF: voltage division factor of AMN C_f : Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part15B Page 8 of 18

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-9-17	2014-9-16
R&S	L.I.S.N	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

Report No.: R2DG130813011-00A

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

8.65 dB at 13.420 MHz in the Neutral conducted mode

Test Data

Environmental Conditions

Temperature:	27.8 °C
Relative Humidity:	51%
ATM Pressure:	99.1kPa


The testing was performed by Leon Chen on 2013-09-22.

FCC Part15B Page 9 of 18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test mode: Operating

120 V, 60 Hz, Line:

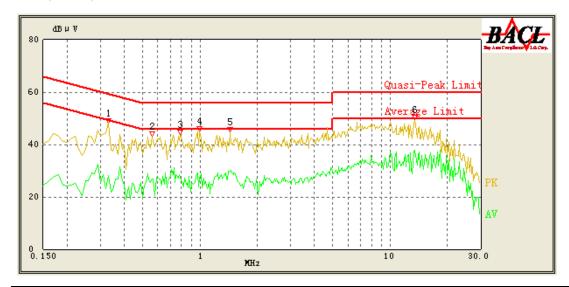


Report No.: R2DG130813011-00A

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.330	41.93	9.69	59.45	17.52	QP
0.330	28.19	9.69	49.45	21.26	AV
0.560	37.67	9.66	56.00	18.33	QP
0.560	26.83	9.66	46.00	19.17	AV
0.790	37.80	9.67	56.00	18.20	QP
0.790	28.00	9.67	46.00	18.00	AV
0.990	37.70	9.68	56.00	18.30	QP
0.990	27.30	9.68	46.00	18.70	AV
1.440	37.10	9.68	56.00	18.90	QP
1.430	29.36	9.68	46.00	16.64	AV
13.420	47.55	9.79	60.00	12.45	QP
13.480	37.80	9.79	50.00	12.20	AV

FCC Part15B Page 10 of 18

120 V, 60 Hz, Neutral:

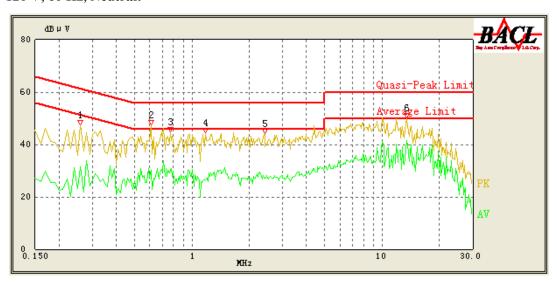

Report No.: R2DG130813011-00A

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.260	36.83	9.68	61.43	24.60	QP
0.260	31.64	9.68	51.43	19.79	AV
0.610	37.73	9.67	56.00	18.27	QP
0.610	30.08	9.67	46.00	15.92	AV
0.770	38.89	9.67	56.00	17.11	QP
0.770	30.33	9.67	46.00	15.67	AV
1.180	36.21	9.69	56.00	19.79	QP
1.180	26.43	9.69	46.00	19.57	AV
2.410	35.26	9.69	56.00	20.74	QP
2.390	27.28	9.69	46.00	18.72	AV
13.420	46.14	9.83	60.00	13.86	QP
13.420	41.35	9.83	50.00	8.65	AV

FCC Part15B Page 11 of 18

FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

Report No.: R2DG130813011-00A

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- non compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 5.0 dB 200M~1GHz: 6.2 dB 1G~6GHz: 4.45 dB 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}

Measurement		
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB	
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB	
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB	


EUT Setup

Below 1 GHz:

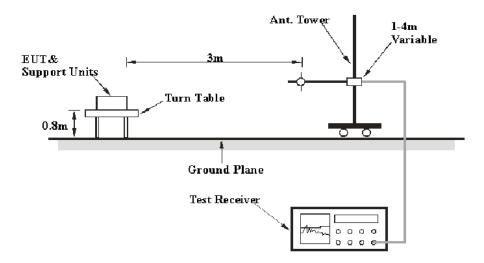

FCC Part15B Page 12 of 18

Above 1GHz:

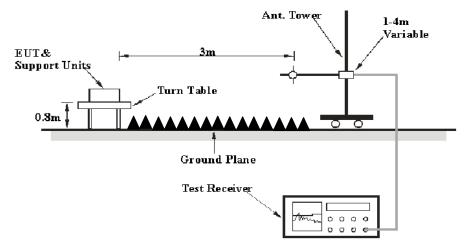

Report No.: R2DG130813011-00A

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

FCC Part15B Page 13 of 18

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: R2DG130813011-00A

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2011-9-6	2014-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-12-7	2013-12-6
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	N/A	N/A
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

0.80 dB at 499.4800 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25.5 °C		
Relative Humidity:	62 %		
ATM Pressure:	100.6 kPa		

The testing was performed by Leon Chen on 2013-09-26.

FCC Part15B Page 14 of 18


1) Below 1 GHz:

Test mode: Operating

Horizontal:

0.0

30.000 127.00

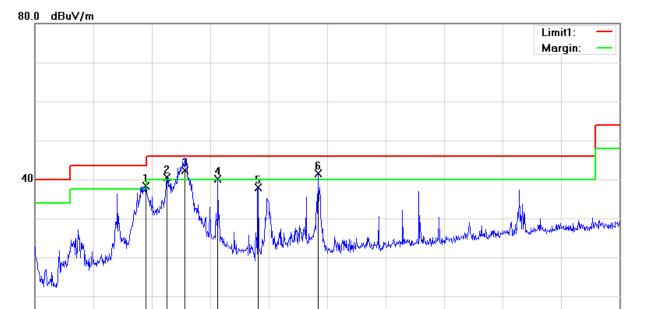

Report No.: R2DG130813011-00A

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
214.3000	46.84	QP	-8.56	38.2	43.50	5.3*
249.2200	48.10	QP	-7.59	40.5	46.00	5.5*
279.2900	48.21	QP	-5.91	42.3	46.00	3.7*
333.6100	44.95	QP	-4.88	40.0	46.00	6.0*
400.5400	41.30	QP	-3.39	37.9	46.00	8.1
499.4800	42.82	QP	-1.41	41.4	46.00	4.6*

515.00

612.00

709.00

806.00

1000.00 MHz

418.00


321.00

224.00

FCC Part15B Page 15 of 18

^{*}Within measurement uncertainty!

Vertical:

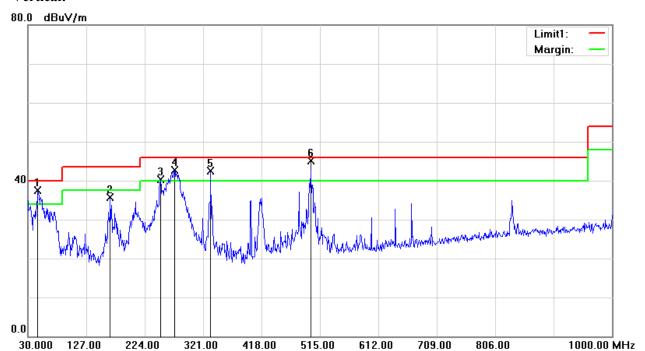

Report No.: R2DG130813011-00A

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
46.4900	47.90	QP	-10.38	37.5	40.00	2.5*
166.7700	43.38	QP	-7.75	35.6	43.50	7.9
250.1900	47.86	QP	-7.57	40.2	46.00	5.8*
273.4700	48.60	QP	-5.91	42.6	46.00	3.4*
333.6100	47.38	QP	-4.88	42.5	46.00	3.5*
499.4800	46.61	QP	-1.41	45.2	46.00	0.8*

^{*}Within measurement uncertainty!


FCC Part15B Page 16 of 18

2) Above 1 GHz:

Test mode: Operating

Horizontal:



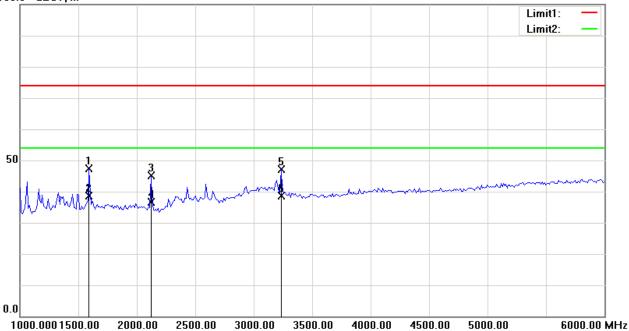


Report No.: R2DG130813011-00A

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1591.182	47.16	peak	0.10	47.26	74.00	26.74
1591.182	38.44	AVG	0.10	38.54	54.00	15.46
2122.244	43.29	peak	1.72	45.01	74.00	28.99
2122.244	34.86	AVG	1.72	36.58	54.00	17.42
3234.469	40.34	peak	6.90	47.24	74.00	26.76
3234.469	31.82	AVG	6.90	38.72	54.00	15.28

FCC Part15B Page 17 of 18

Vertical:

100.0 dBuV/m

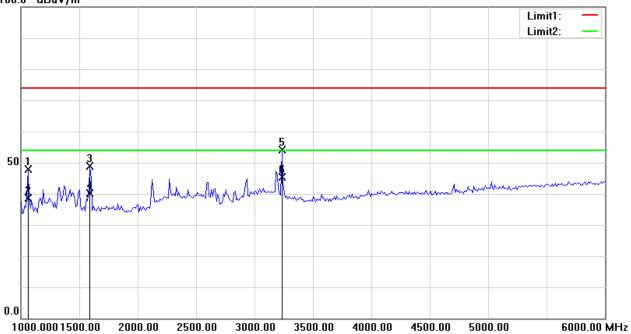

Report No.: R2DG130813011-00A

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1060.120	49.96	peak	-2.09	47.87	74.00	26.13
1060.120	40.66	AVG	-2.09	38.57	54.00	15.43
1591.182	48.75	peak	0.10	48.85	74.00	25.15
1591.182	40.15	AVG	0.10	40.25	54.00	13.75
3234.469	47.20	peak	6.90	54.10	74.00	19.90
3234.469	38.44	AVG	6.90	45.34	54.00	8.66

***** END OF REPORT *****

FCC Part15B Page 18 of 18