

APPLICATION CERTIFICATION
On Behalf of
SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

Entertainment System
Model No.: AN5700NV(CNE-8518-ALP)

FCC ID: V8VCNE8518ALP

Prepared for : SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address : A1 Building, No.6 Xinxing Industrial Park, Xinhe Village,
Fuyong Town, Baoan District, Shenzhen City, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20120123
Date of Test : February 12-28, 2012
Date of Report : February 29, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty.....	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	16
6.6. Test Result	16
7. NUMBER OF HOPPING FREQUENCY TEST	20
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement	20
7.4. Operating Condition of EUT	20
7.5. Test Procedure	21
7.6. Test Result	21
8. DWELL TIME TEST	25
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(a)(1)(iii).....	25
8.3. EUT Configuration on Measurement	25
8.4. Operating Condition of EUT	25
8.5. Test Procedure	26
8.6. Test Result	26
9. MAXIMUM PEAK OUTPUT POWER TEST	30
9.1. Block Diagram of Test Setup.....	30
9.2. The Requirement For Section 15.247(b)(1).....	30
9.3. EUT Configuration on Measurement	30
9.4. Operating Condition of EUT	30
9.5. Test Procedure	31

9.6. Test Result	31
10. BAND EDGE COMPLIANCE TEST	35
10.1. Block Diagram of Test Setup.....	35
10.2. The Requirement For Section 15.247(d)	35
10.3. EUT Configuration on Measurement	35
10.4. Operating Condition of EUT	36
10.5. Test Procedure	36
10.6. Test Result	37
11. RADIATED SPURIOUS EMISSION TEST	48
11.1. Block Diagram of Test Setup.....	48
11.2. The Limit For Section 15.247(d)	49
11.3. Restricted bands of operation	49
11.4. Configuration of EUT on Measurement	50
11.5. Operating Condition of EUT	50
11.6. Test Procedure	50
11.7. The Field Strength of Radiation Emission Measurement Results	51
12. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	72
12.1. Block Diagram of Test Setup.....	72
12.2. The Requirement For Section 15.247(d)	72
12.3. EUT Configuration on Measurement	72
12.4. Operating Condition of EUT	73
12.5. Test Procedure	73
12.6. Test Result	73
13. ANTENNA REQUIREMENT	77
13.1. The Requirement	77
13.2. Antenna Construction	77

Test Report Certification

Applicant : SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
 Manufacturer : SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
 EUT Description : Entertainment System
 (A) MODEL NO.: AN5700NV(CNE-8518-ALP)
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 12V

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :

February 12-28, 2012

Prepared by :

Apple

(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Entertainment System

Model Number : AN5700NV(CNE-8518-ALP)

Frequency Band : 2402MHz-2480MHz

Number of Channels : 79

Antenna Gain : 0dBi

Power Supply : DC 12V

Applicant : SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

Address : A1 Building, No.6 Xinxing Industrial Park, Xinhe Village, Fuyong Town, Baoan District, Shenzhen City, China

Manufacturer : SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

Address : A1 Building, No.6 Xinxing Industrial Park, Xinhe Village, Fuyong Town, Baoan District, Shenzhen City, China

Date of sample received : February 12, 2012

Date of Test : February 12-28, 2012

1.2. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen
	Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 7, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 7, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 7, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 7, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 7, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 7, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 7, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 7, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 7, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 7, 2012	Jan. 7, 2013

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

3.2. Configuration and peripherals



Setup: Transmitting mode


(EUT: Entertainment System)

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup

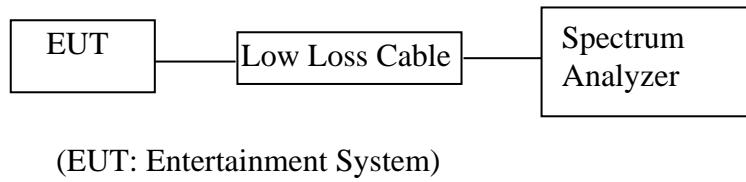

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX(Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.6. Test Result

PASS.

Date of Test:	February 14, 2012	Temperature:	25°C
EUT:	Entertainment System	Humidity:	50%
Model No.:	AN5700NV(CNE-8518-ALP)	Power Supply:	DC 12V
Test Mode:	TX	Test Engineer:	Apple


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.870	N/A
Middle	2441	0.870	N/A
High	2480	0.864	N/A


Note: N/A: 1) The 20 dB bandwidth of the hopping channel is not limit.


2) The data of 20 dB bandwidth of the hopping channel is limit of carrier frequencies separated

The spectrum analyzer plots are attached as below.

Spectrum Analyzer is RS

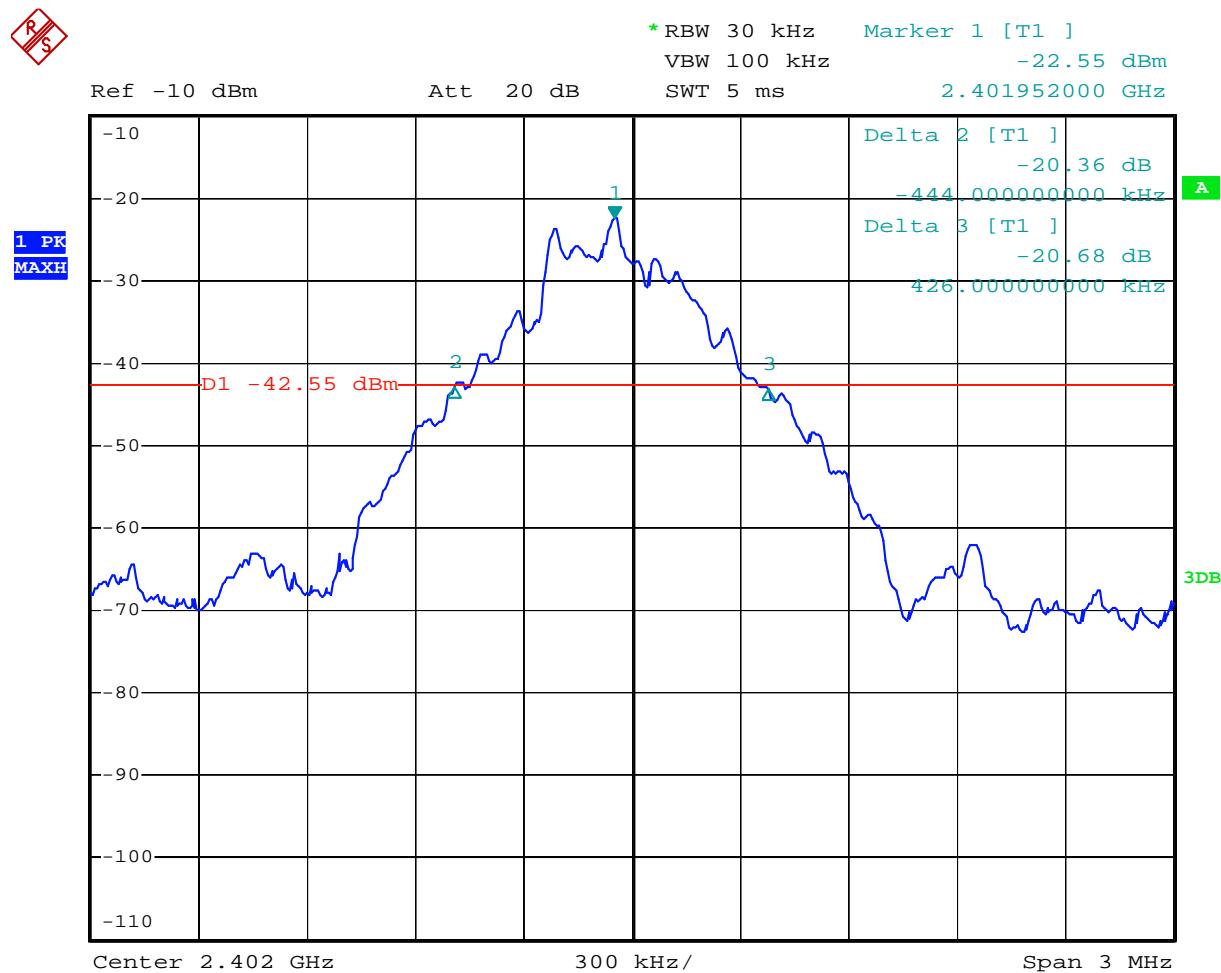


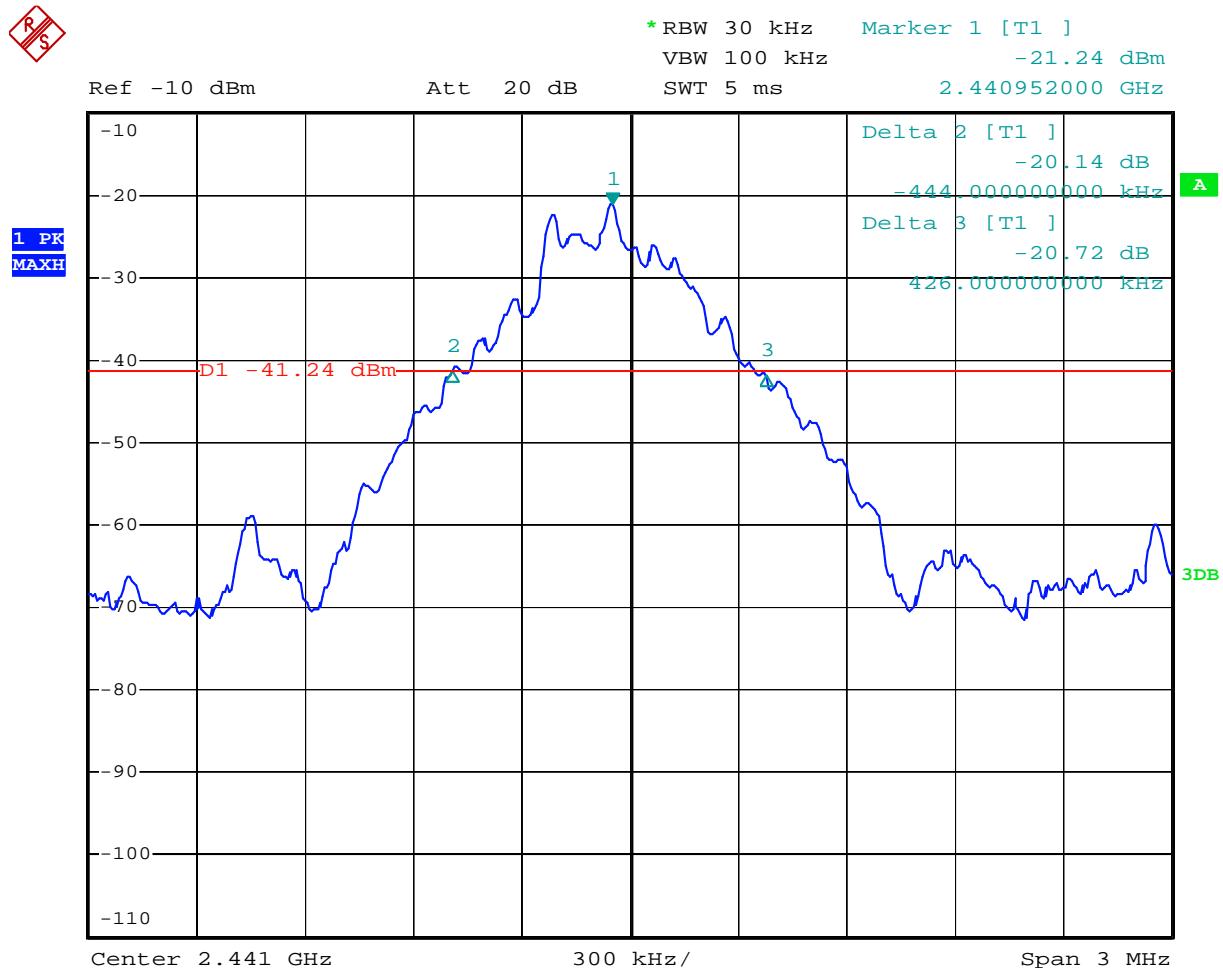

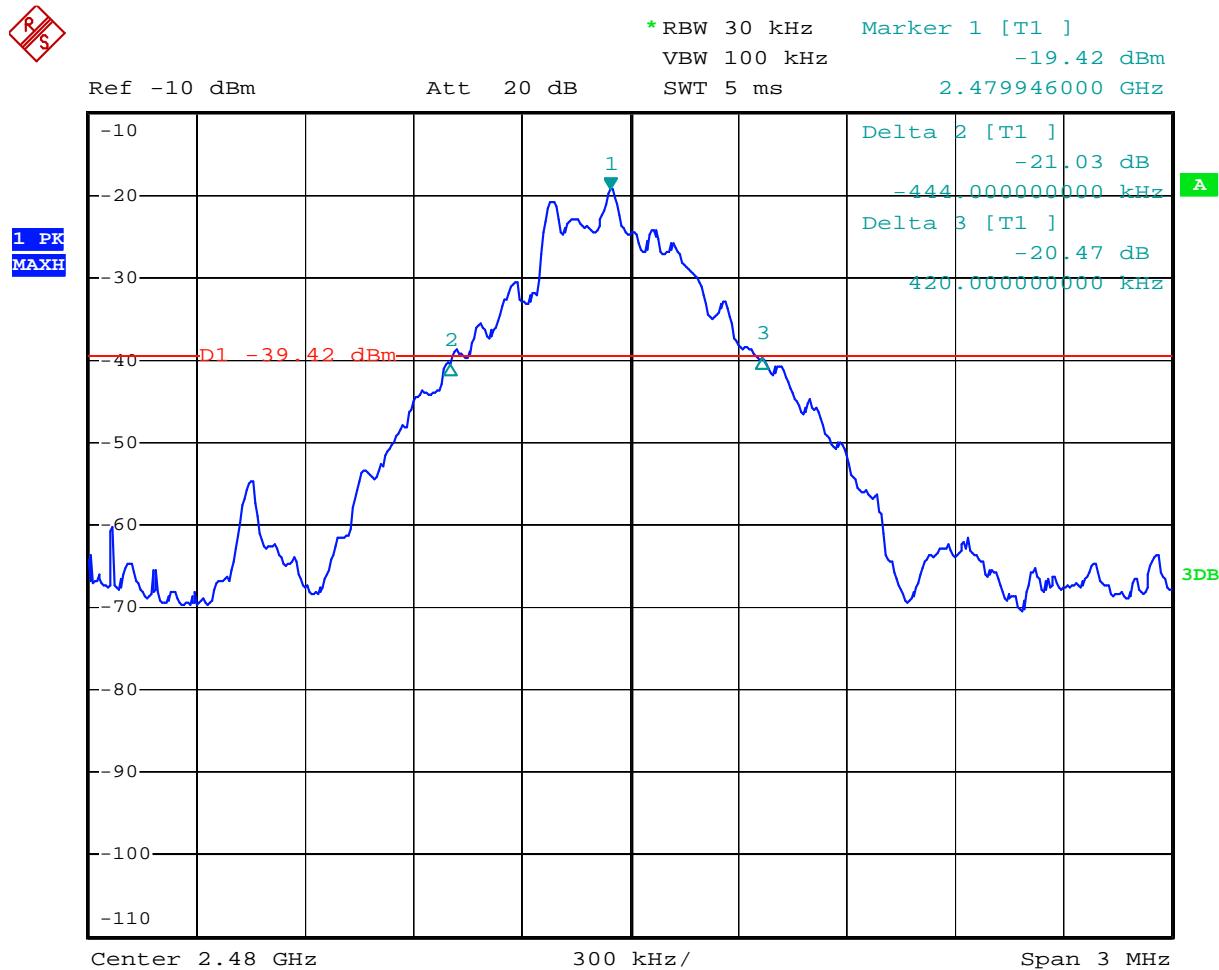

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup

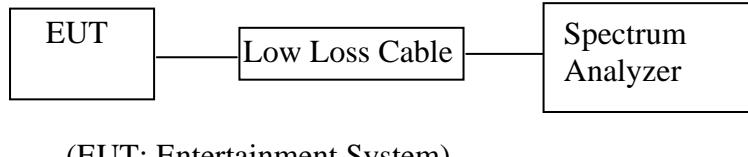

(EUT: Entertainment System)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

6.5. Test Procedure

- 6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 6.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz. Adjust Span to 3 MHz.
- 6.5.3. Set the adjacent channel of the EUT maxhold another trace.
- 6.5.4. Measurement the channel separation


6.6. Test Result


PASS.

Date of Test:	February 14, 2012	Temperature:	25°C
EUT:	Entertainment System	Humidity:	50%
Model No.:	AN5700NV(CNE-8518-ALP)	Power Supply:	DC 12V
Test Mode:	Hopping	Test Engineer:	Apple


Channel	Channel Frequency (MHz)	Channel separation (MHz)	Limit
Low	2402	1.002	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
Middle	2441	1.002	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
High	2480	1.002	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)

The spectrum analyzer plots are attached as below.

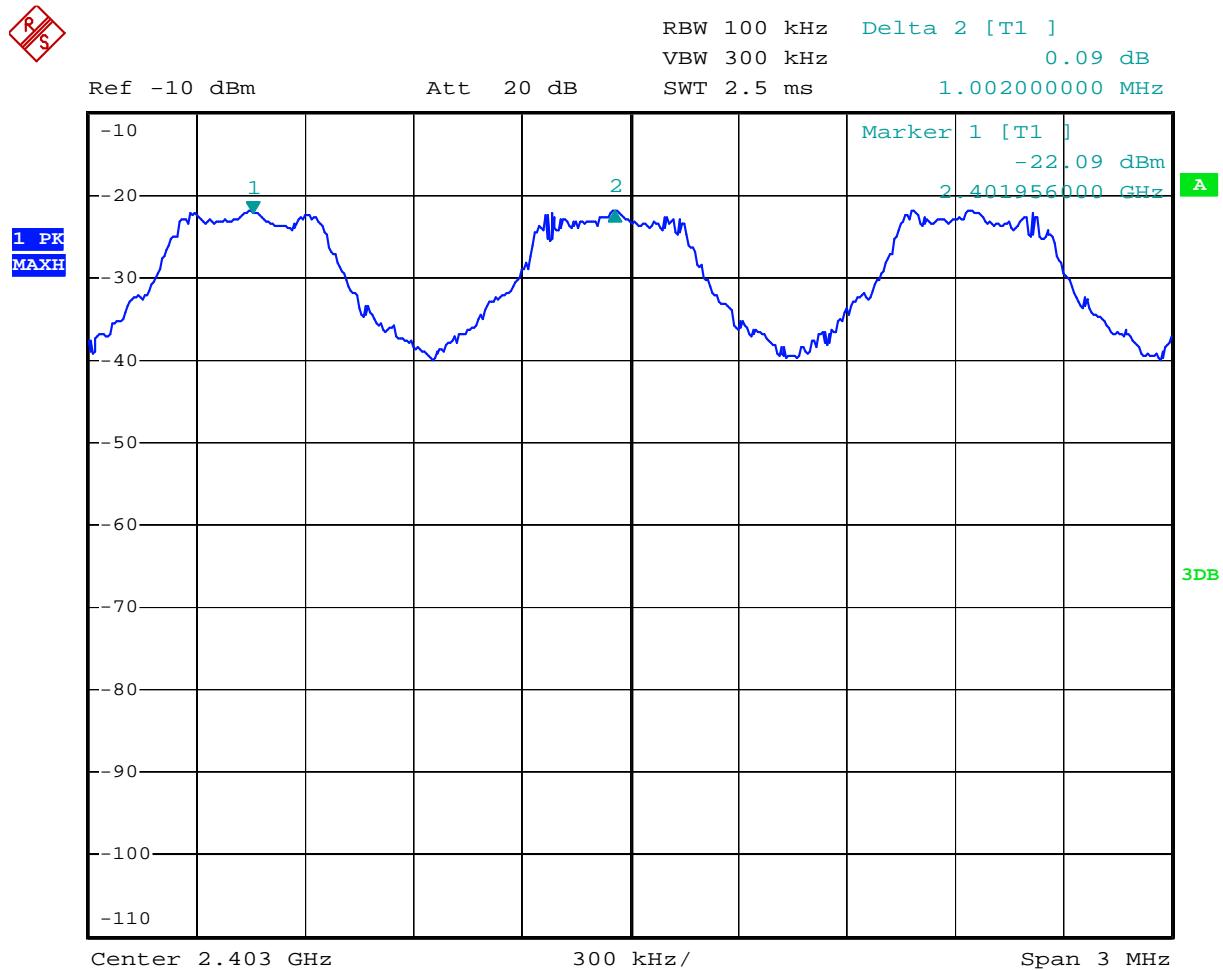

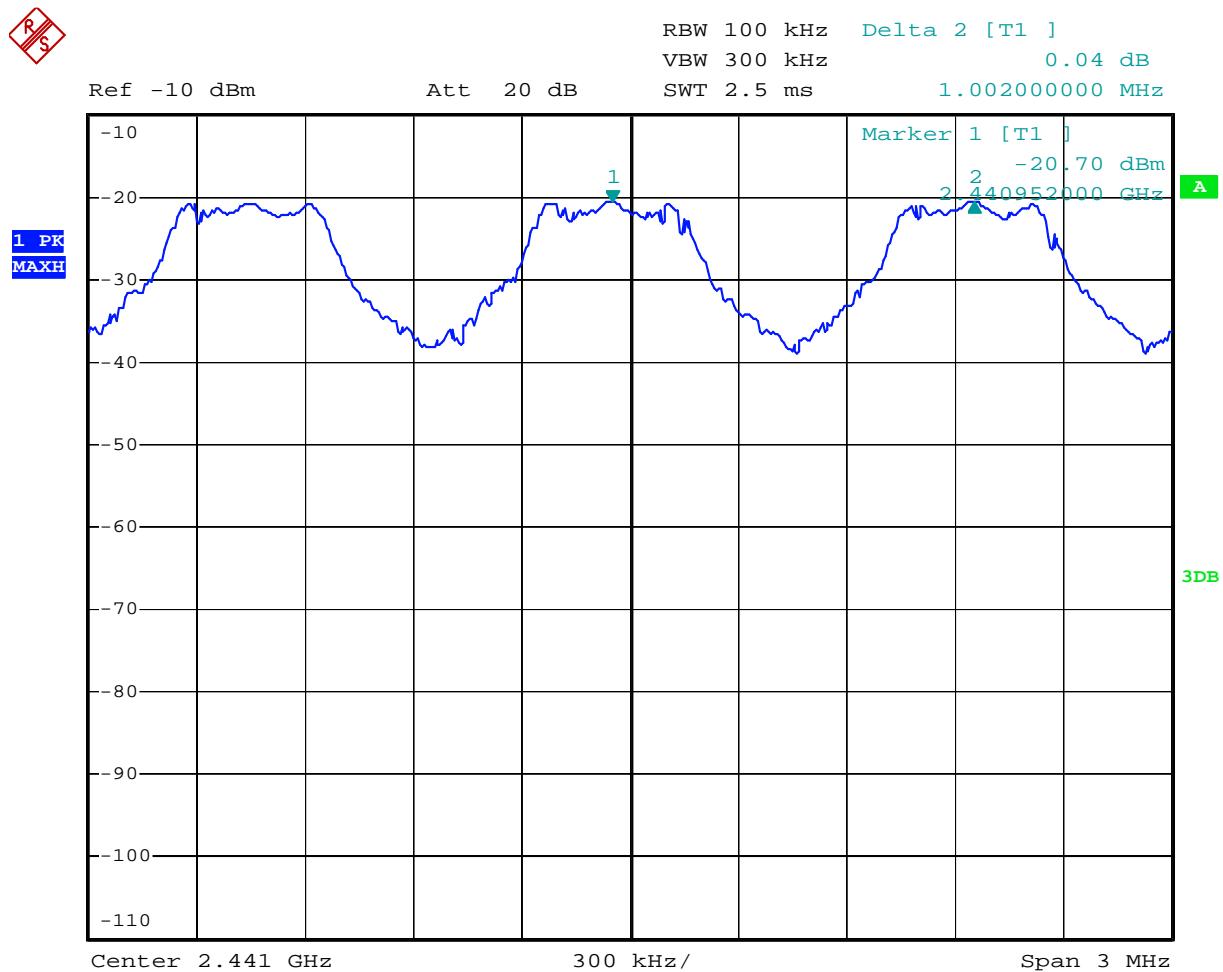


I

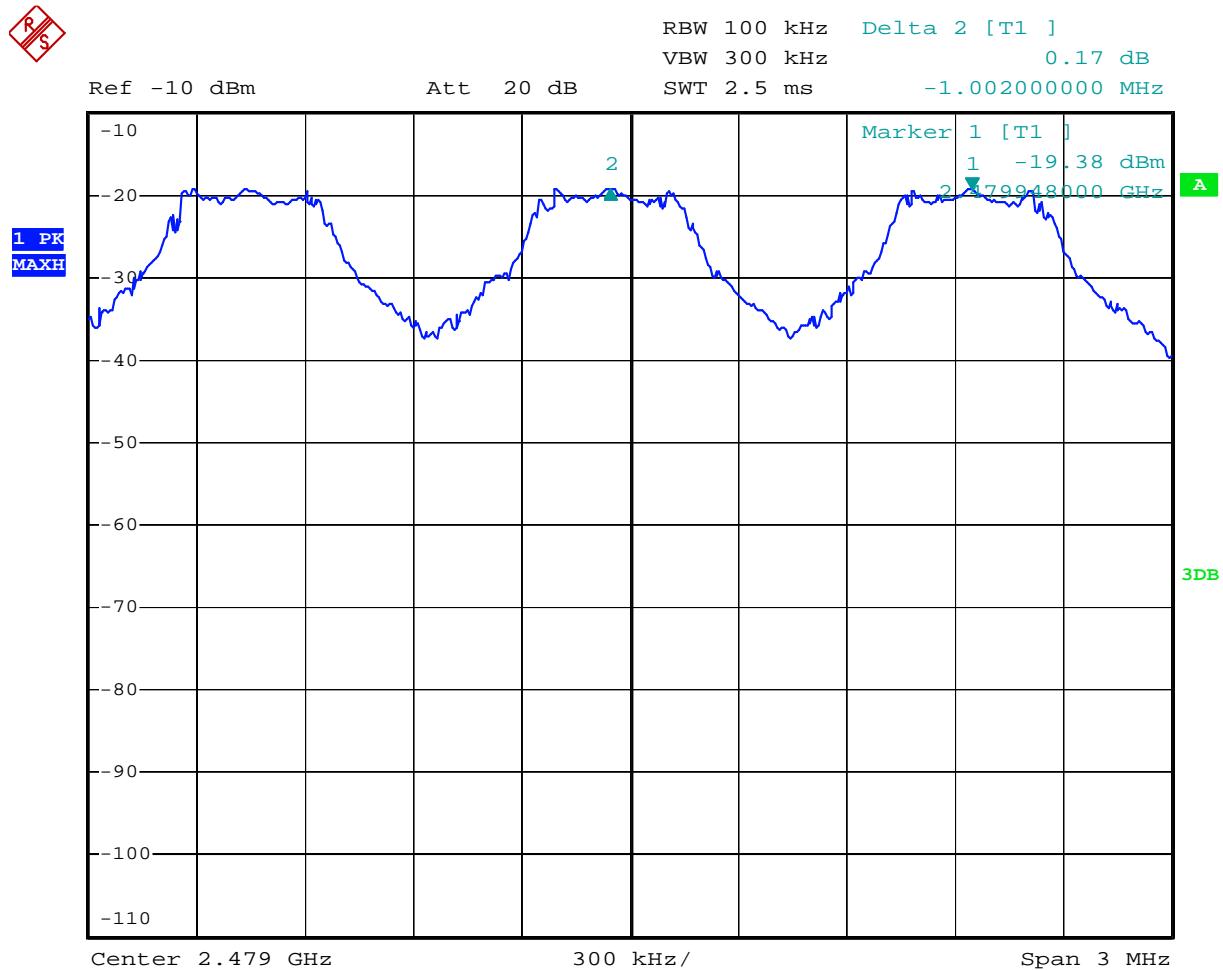

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup

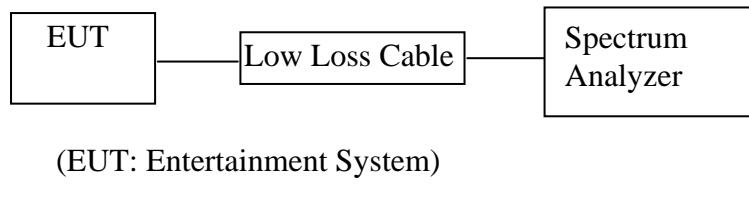

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=30MHz, RBW=300kHz, VBW=300kHz.

7.5.3. Max hold, view and count how many channel in the band.


7.6. Test Result


PASS.


Date of Test:	<u>February 14, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Entertainment System</u>	Humidity:	<u>50%</u>
Model No.:	<u>AN5700NV(CNE-8518-ALP)</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Apple</u>

Total number of hopping channel	Measurement result (CH)	Limit (CH)
	79	>15

The spectrum analyzer plots are attached as below.

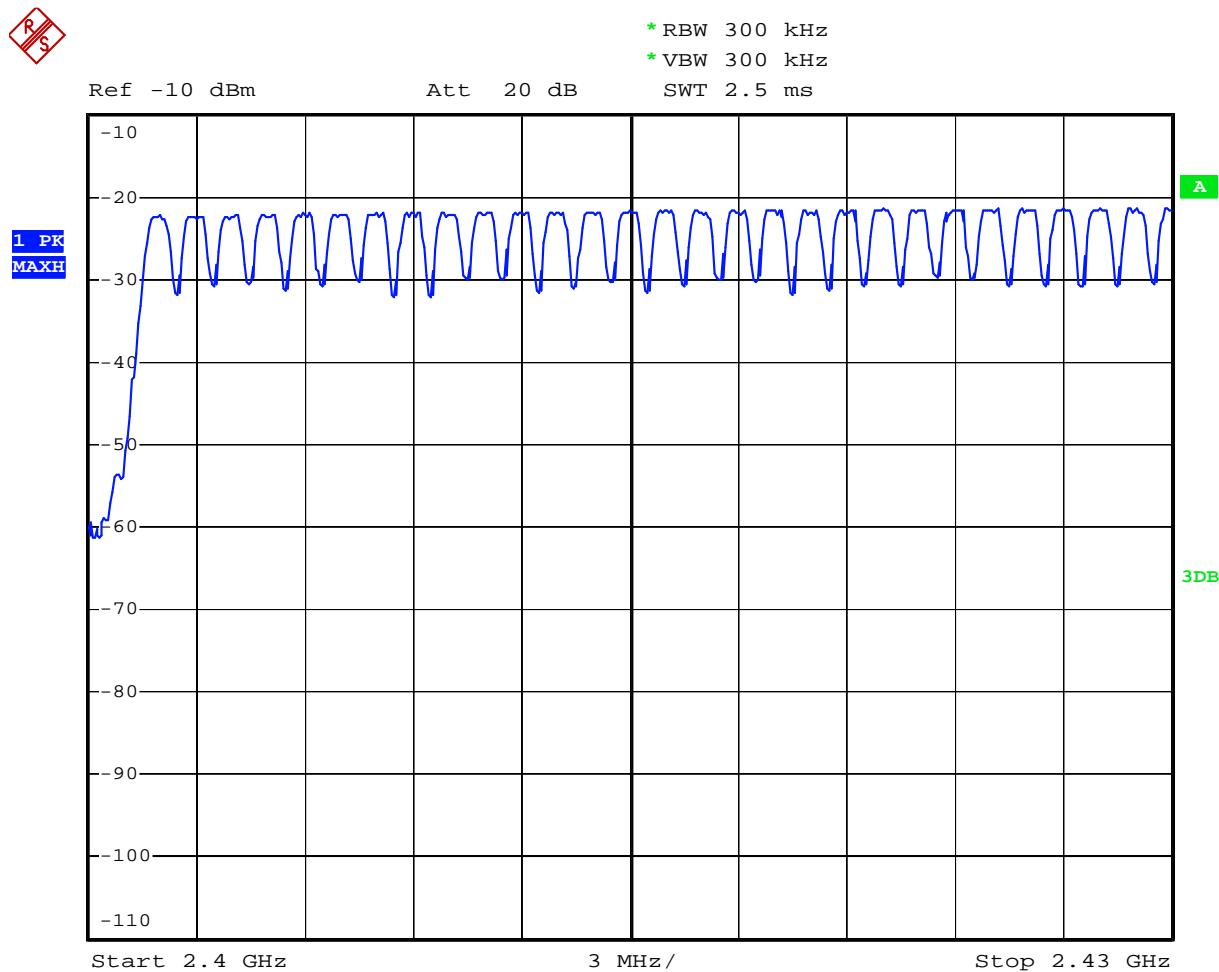


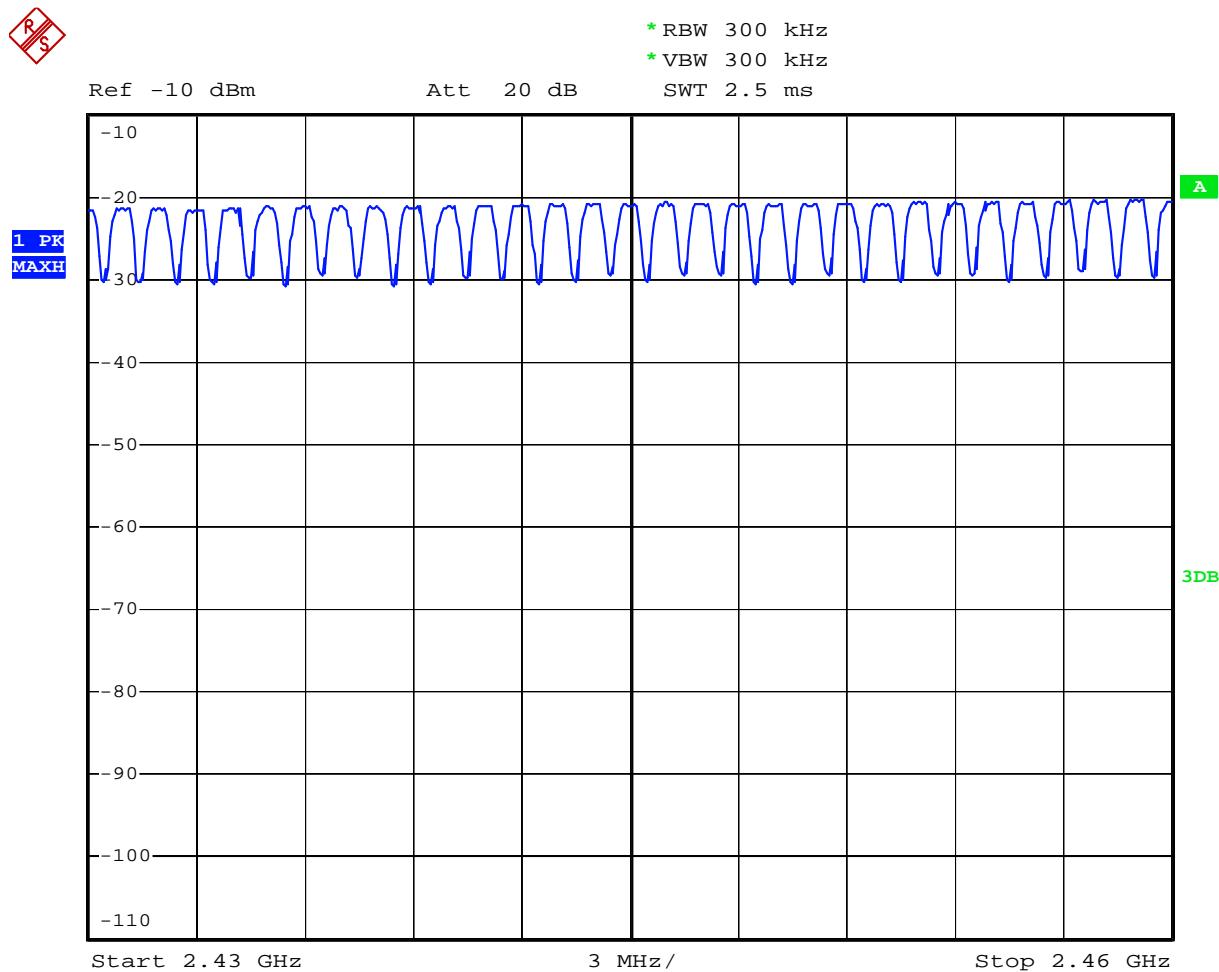

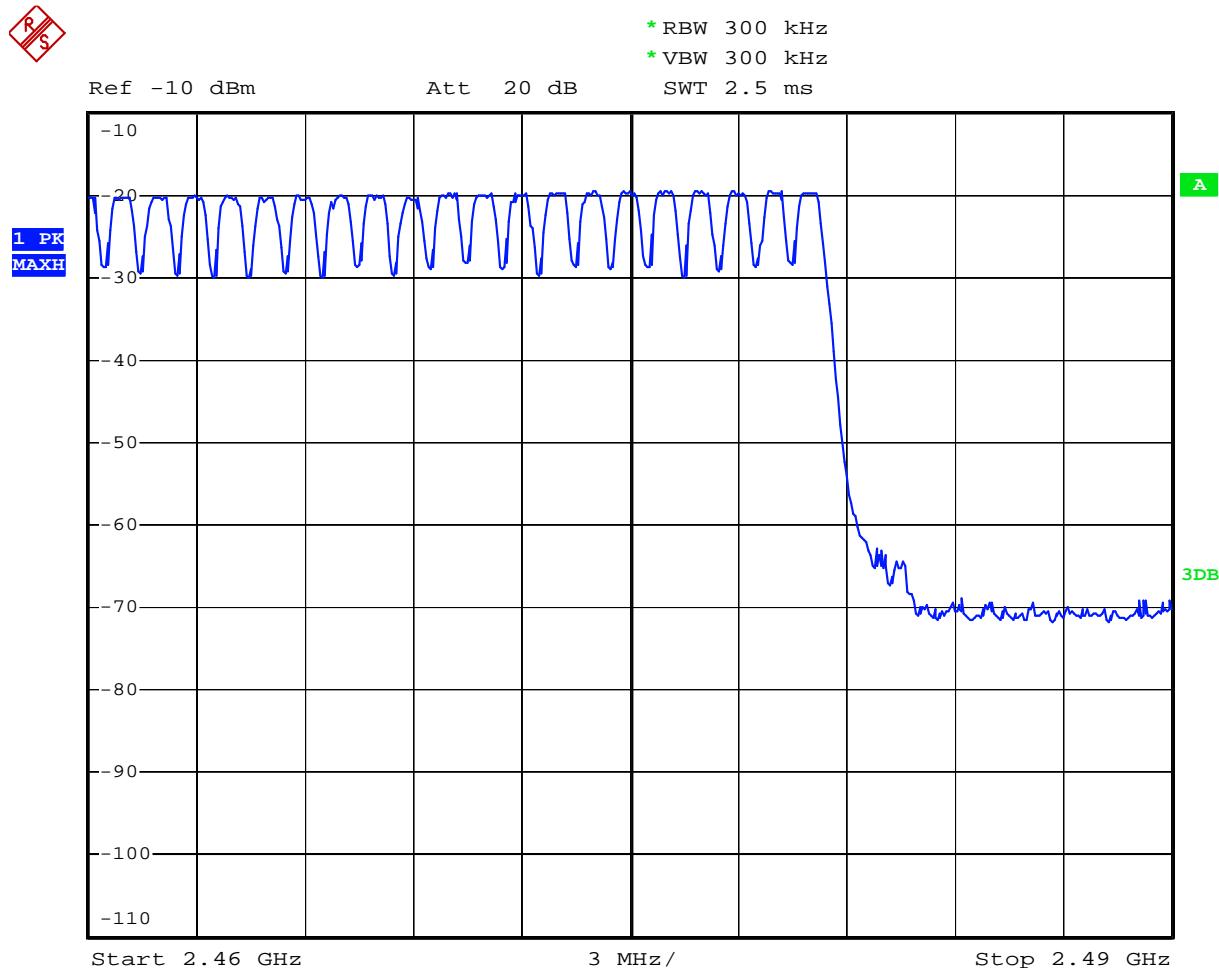

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup

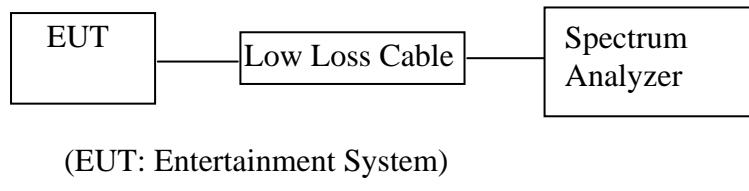

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

- 8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 8.5.2. Set center frequency of spectrum analyzer = operating frequency.
- 8.5.3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=1s. Get the burst (in 1s.).
- 8.5.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=2ms. Get the pulse time.
- 8.5.5. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

PASS.



Date of Test:	February 14, 2012	Temperature:	25°C
EUT:	Entertainment System	Humidity:	50%
Model No.:	AN5700NV(CNE-8518-ALP)	Power Supply:	DC 12V
Test Mode:	Hopping	Test Engineer:	Apple



A period transmit time = $0.4 \times 79 = 31.6$



Dwell time = pulse time \times burst (in 1S) \times 31.6S

Channel	Channel Frequency (MHz)	Pulse Time (ms)	Burst (in 2ms.)	Dwell Time (ms)	Limit (ms)
Low	2402	0.432	10	136.5	400
Middle	2441	0.432	10	136.5	400
High	2480	0.432	10	136.5	400

The spectrum analyzer plots are attached as below.

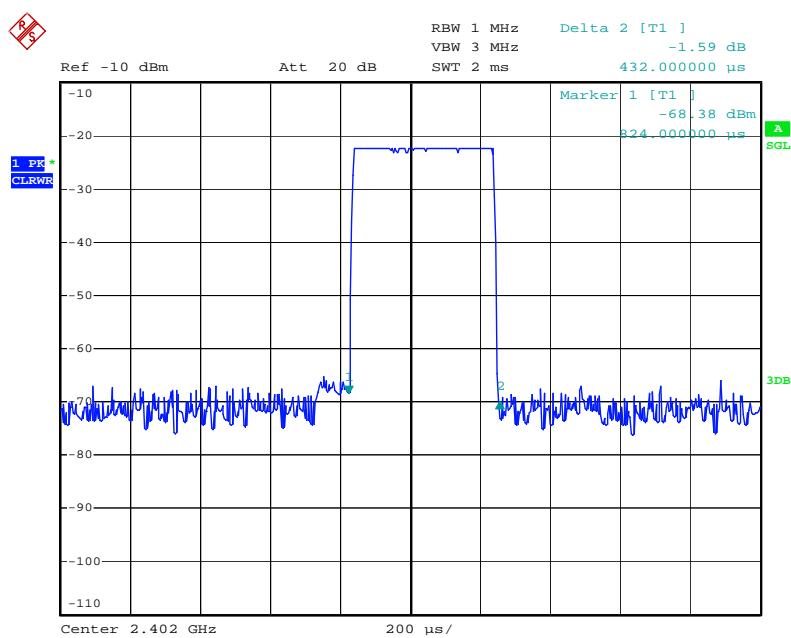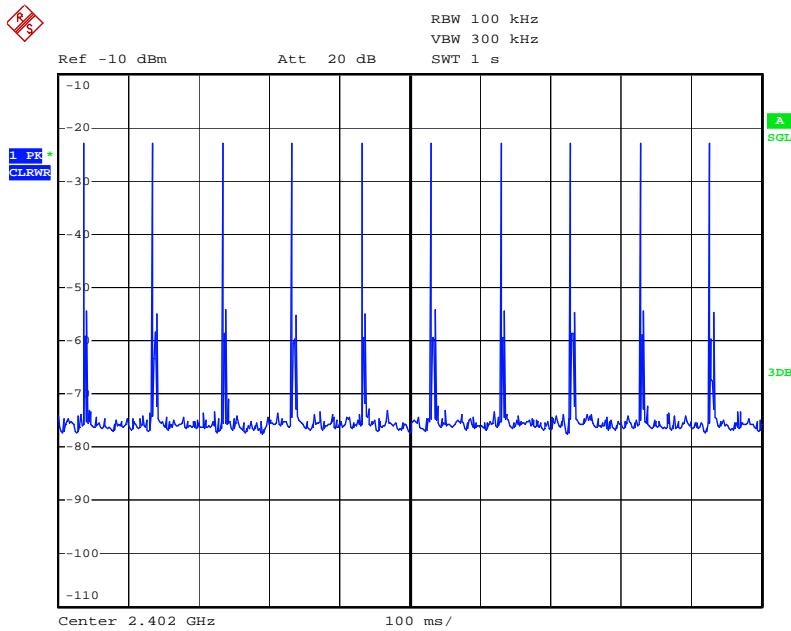


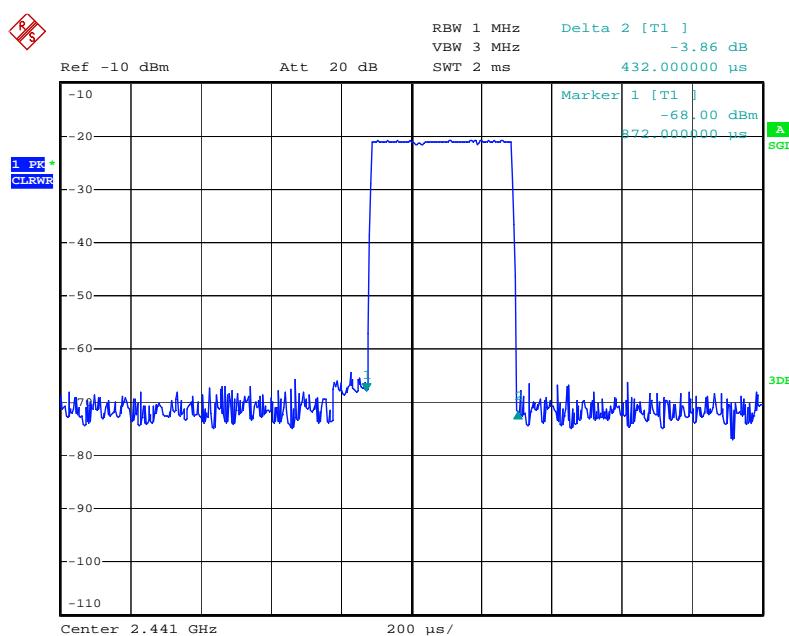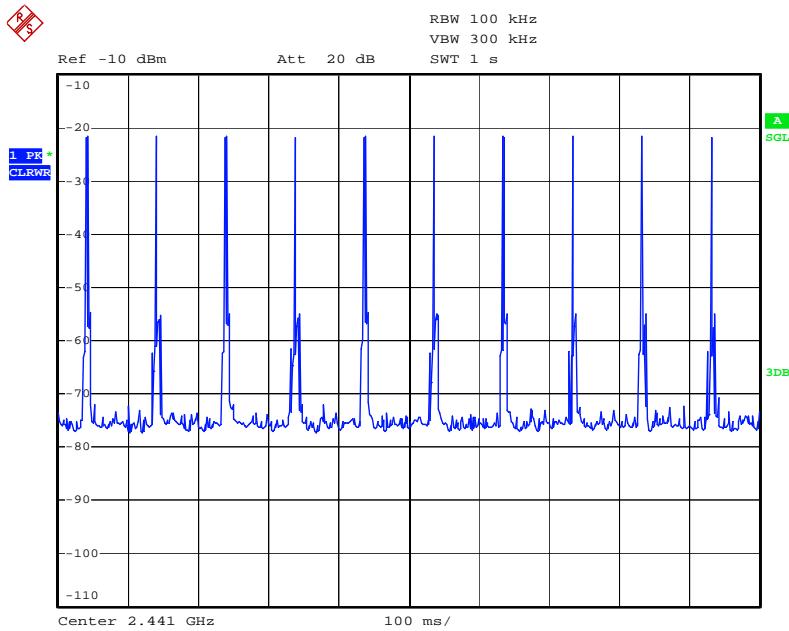

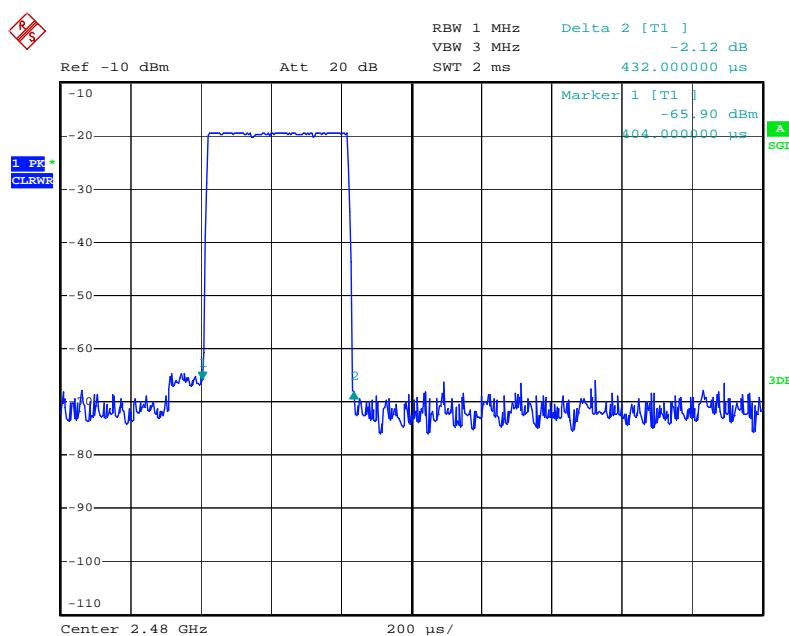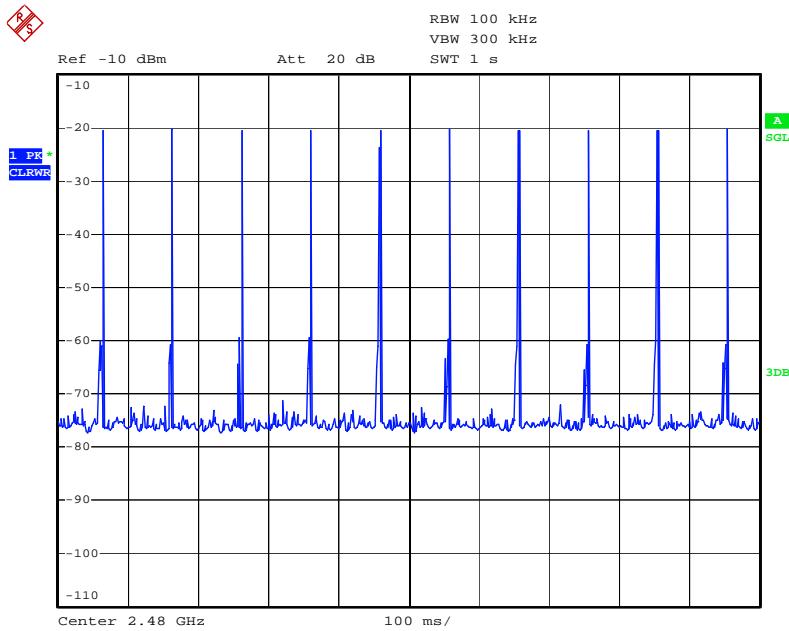

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup

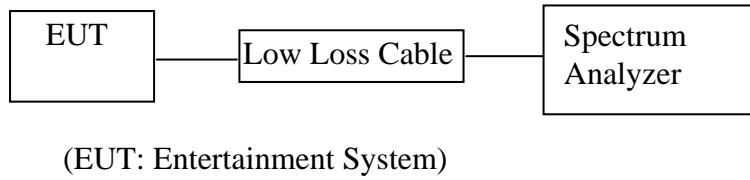

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

- 9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- 9.5.3. Measurement the maximum peak output power.


9.6. Test Result

PASS.


Date of Test:	February 14, 2012	Temperature:	25°C
EUT:	Entertainment System	Humidity:	50%
Model No.:	AN5700NV(CNE-8518-ALP)	Power Supply:	DC 12V
Test Mode:	TX	Test Engineer:	Apple

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2402	-22.45	0.006	30 dBm / 1 W
Middle	2441	-20.87	0.008	30 dBm / 1 W
High	2480	-19.52	0.011	30 dBm / 1 W

The spectrum analyzer plots are attached as below.

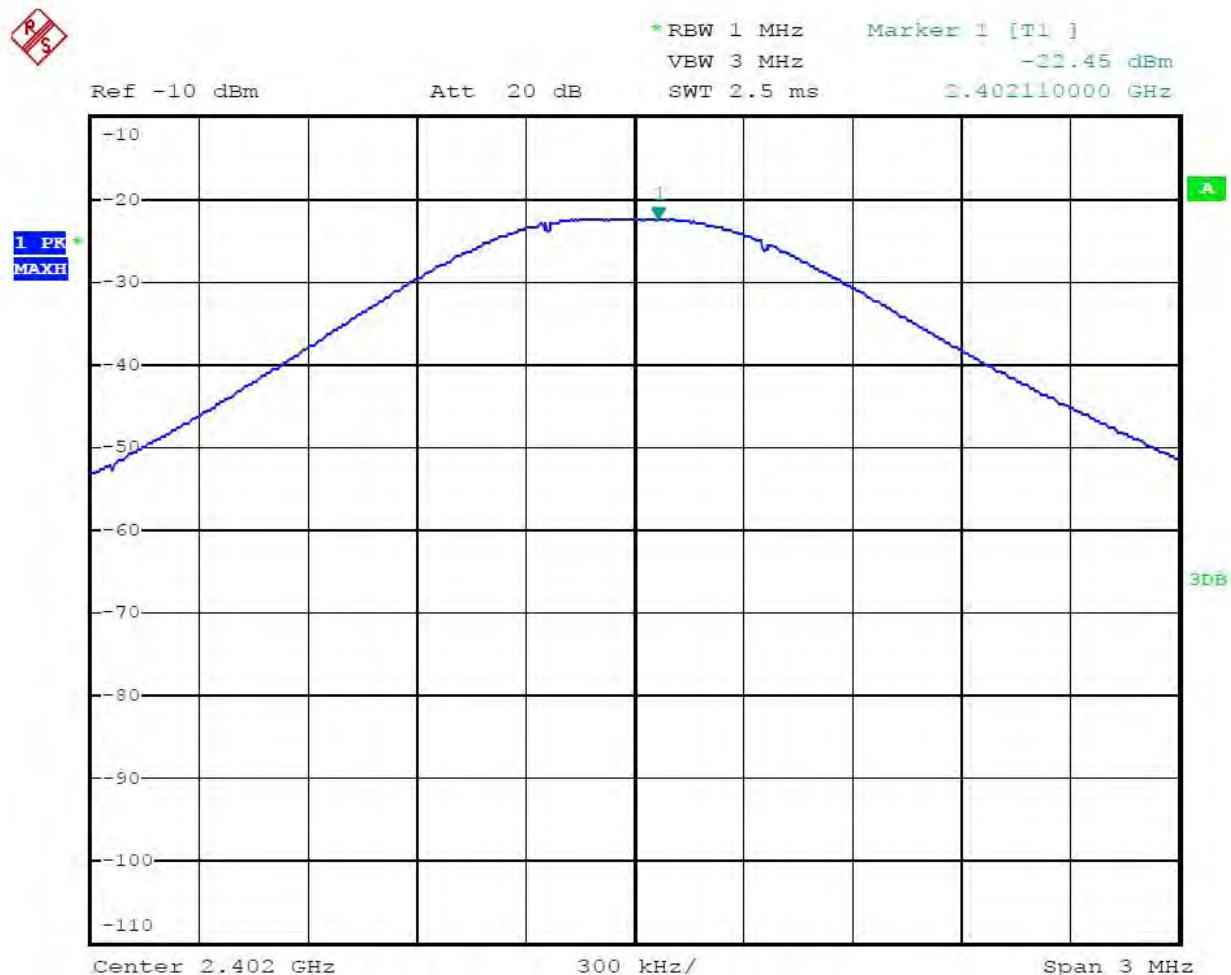




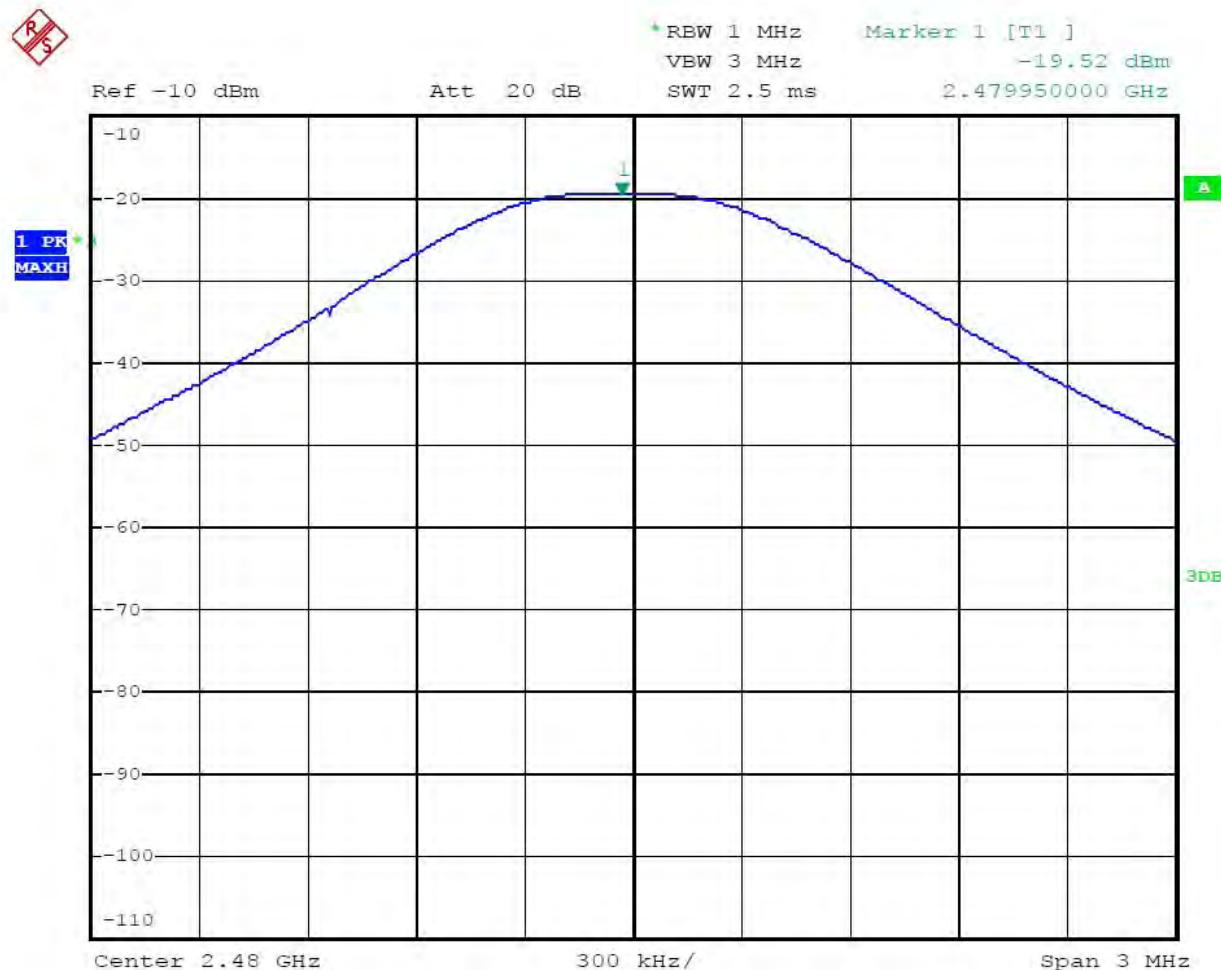

10. BAND EDGE COMPLIANCE TEST

10.1. Block Diagram of Test Setup

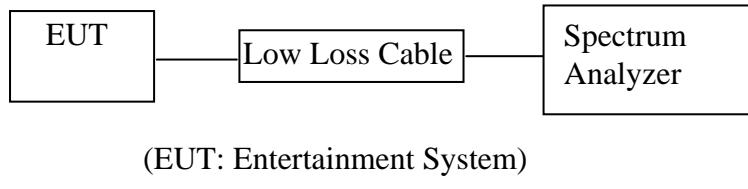

10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

10.5.Test Procedure

Conducted Band Edge:

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

10.5.3.The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

10.5.4.The turntable was rotated for 360 degrees to determine the position of maximum emission level.

10.5.5.EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

10.5.6.Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

10.5.7.The band edges was measured and recorded.

10.6. Test Result

Pass

Date of Test:	<u>February 14, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Entertainment System</u>	Humidity:	<u>50%</u>
Model No.:	<u>AN5700NV(CNE-8518-ALP)</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX (Hopping off)</u>	Test Engineer:	<u>Apple</u>


Conducted test


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	42.85	> 20dBc
2480	51.17	> 20dBc


Date of Test:	<u>February 14, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Entertainment System</u>	Humidity:	<u>50%</u>
Model No.:	<u>AN5700NV(CNE-8518-ALP)</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX (Hopping on)</u>	Test Engineer:	<u>Apple</u>


Conducted test

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	43.86	> 20dBc
2480	52.24	> 20dBc

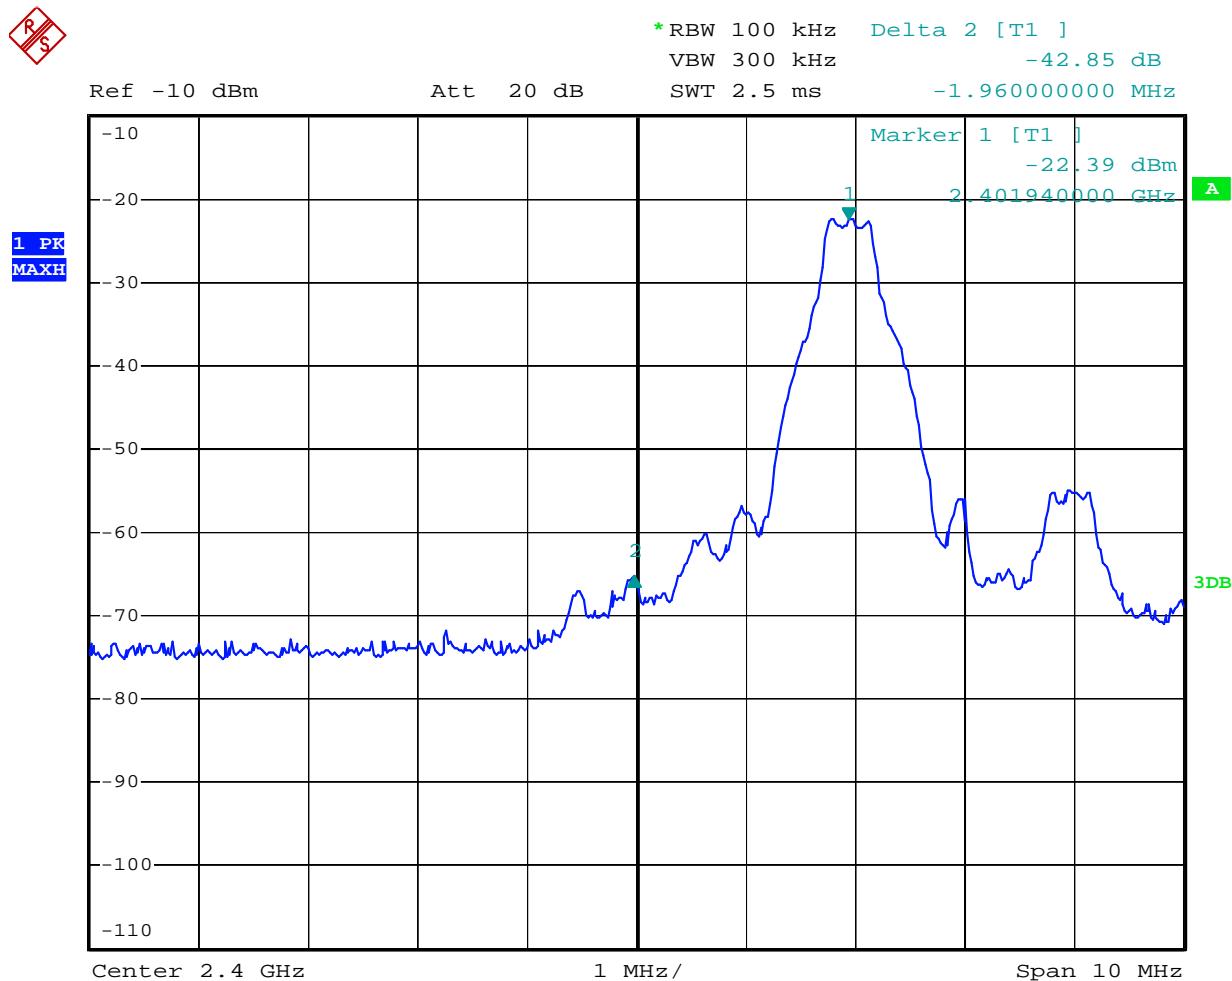

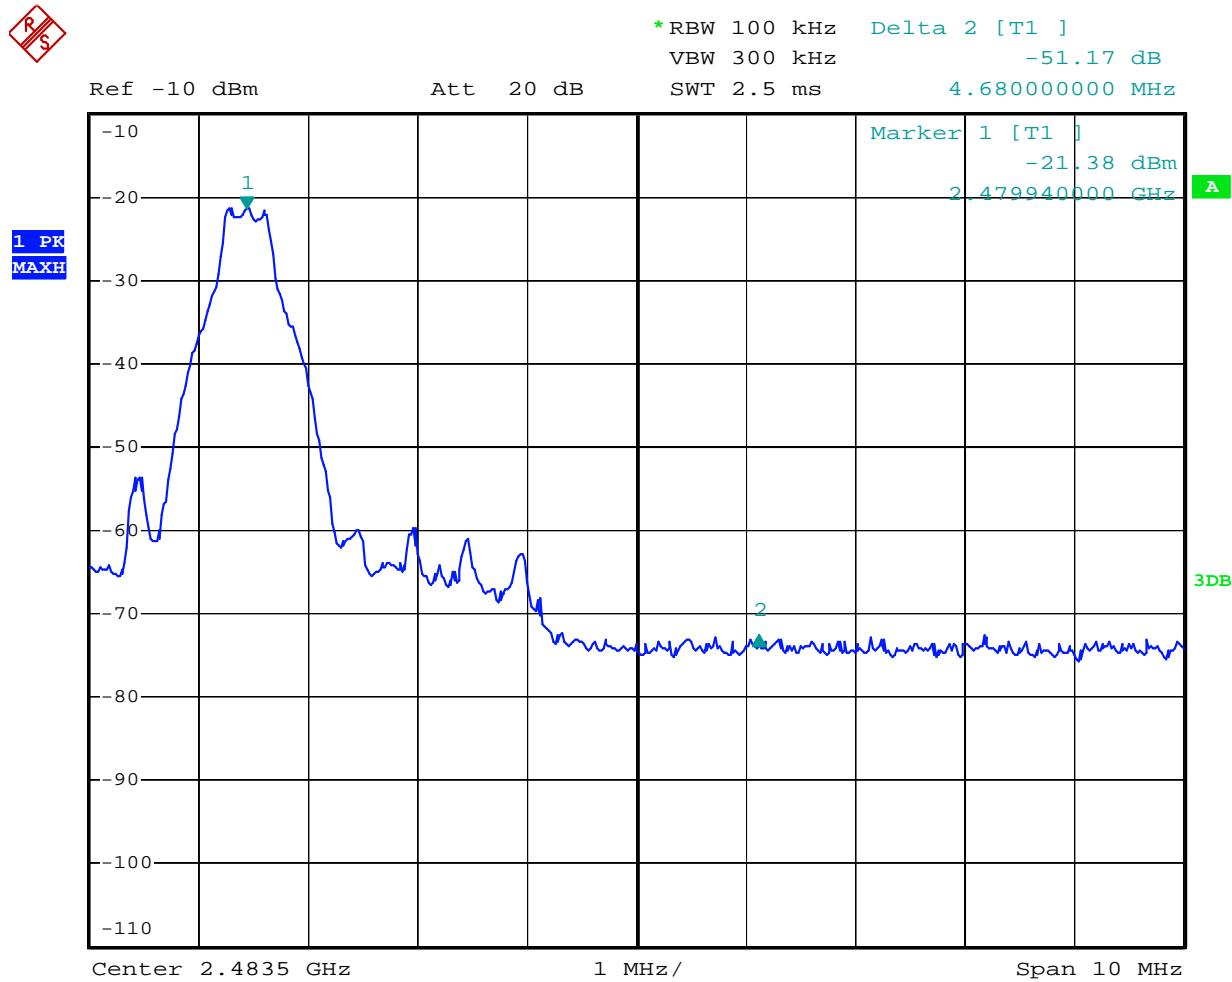

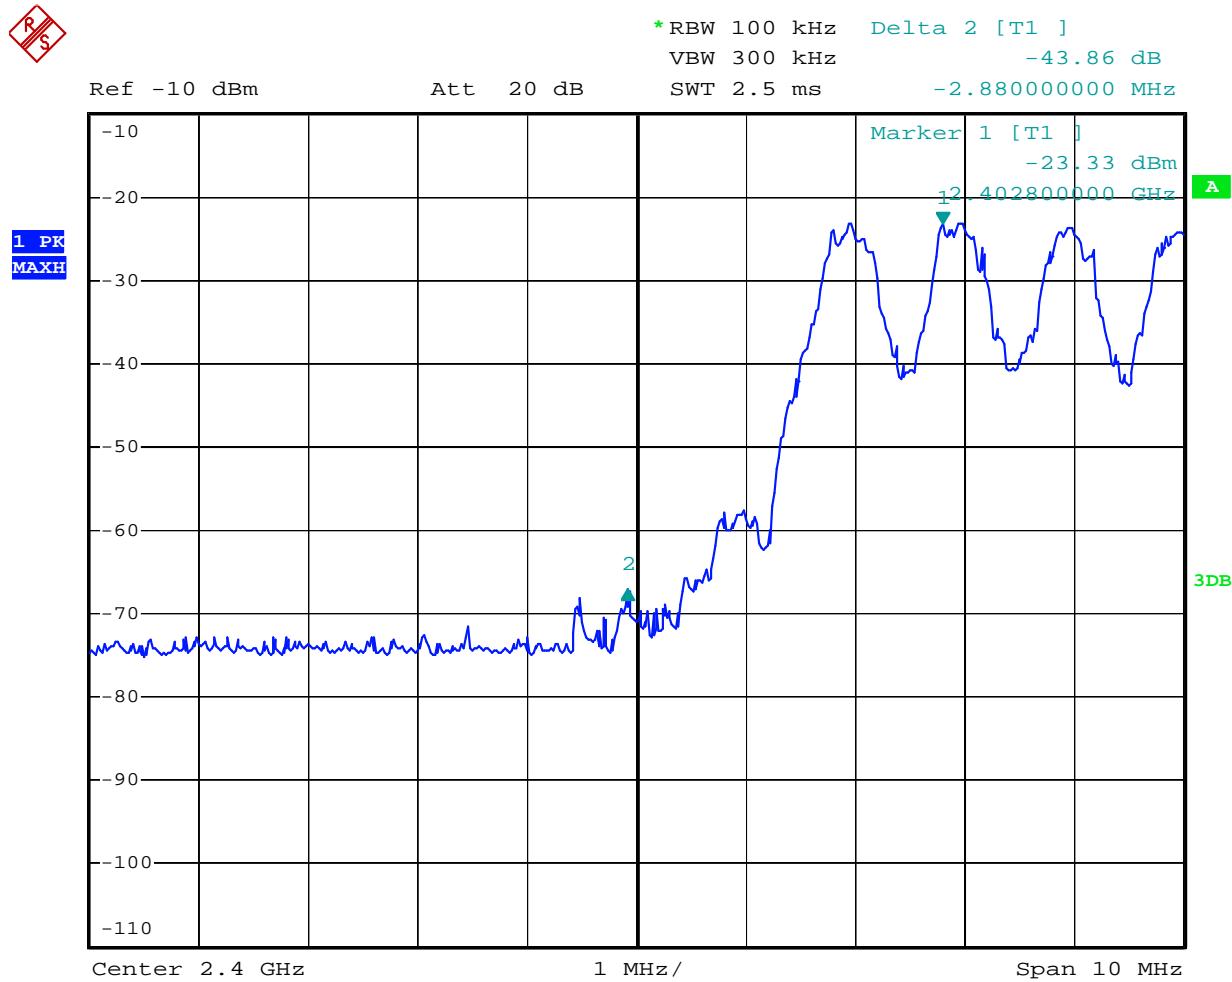

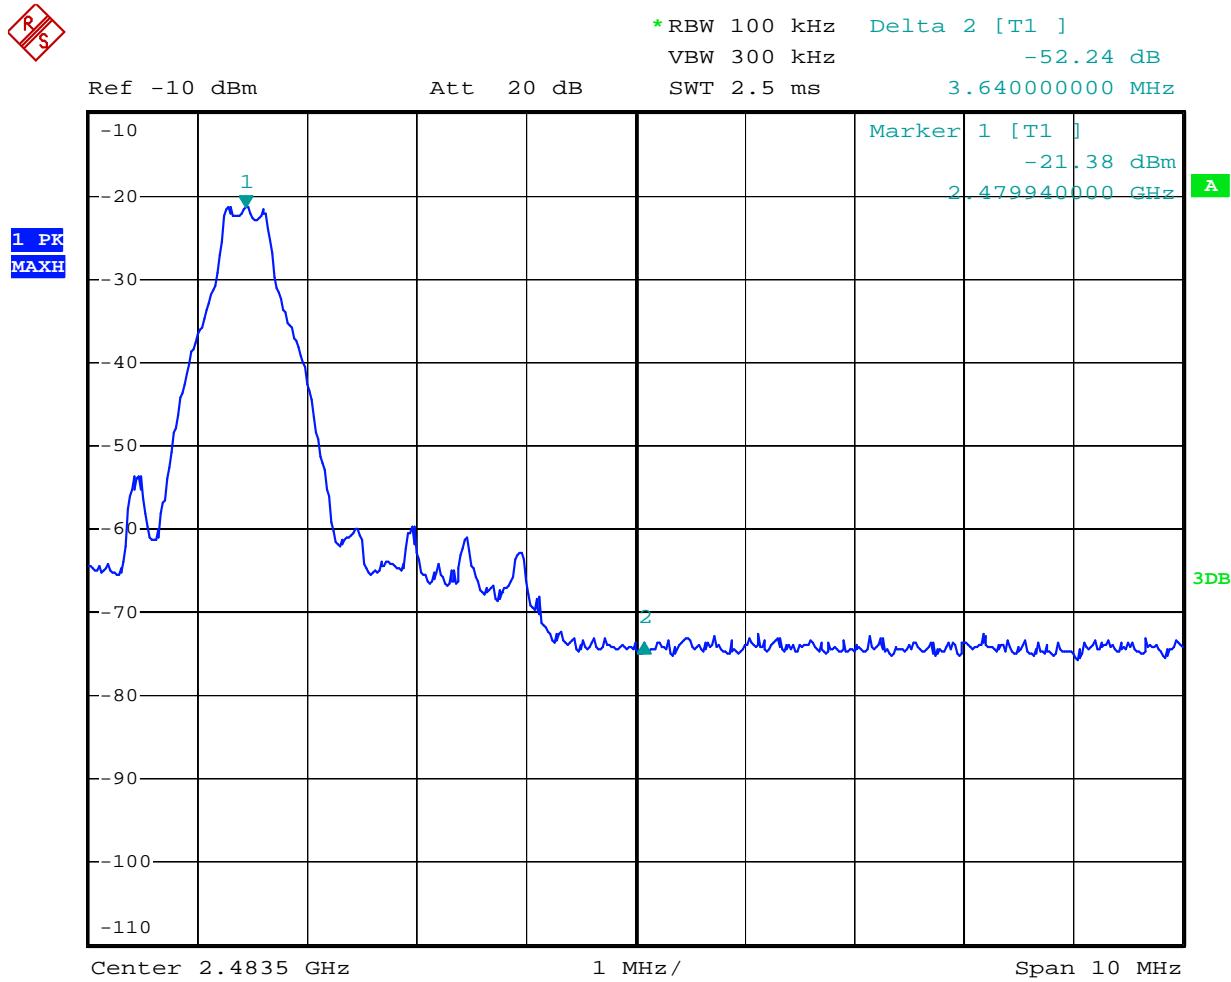

Radiated Band Edge Result

Date of Test: <u>February 23, 2012</u>	Temperature: <u>25°C</u>
EUT: <u>Entertainment System</u>	Humidity: <u>50%</u>
Model No.: <u>AN5700NV(CNE-8518-ALP)</u>	Power Supply: <u>DC 3.7V</u>
Test Mode: <u>TX (2402MHz)</u>	Test Engineer: <u>Kai</u>

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Date of Test:	February 23, 2012	Temperature:	25°C
EUT:	Entertainment System	Humidity:	50%
Model No.:	AN5700NV(CNE-8518-ALP)	Power Supply:	DC 3.7V
Test Mode:	TX (2480MHz)	Test Engineer:	Kai

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1034

Polarization: Horizontal

Standard: FCC Part 15 PEAK 2.4G

Power Source: DC 12V

Test item: Radiation Test

Date: 2012/02/23

Temp. (C)/Hum.(%) 24 C / 48 %

Time: 9/25/32

EUT: Entertainment System

Engineer Signature:


Mode: TX 2402

Distance: 3m

Model: AN5700NV(CNE-8518-ALP)

Manufacturer: SKYPINE

Note: Report NO.:ATE20120123

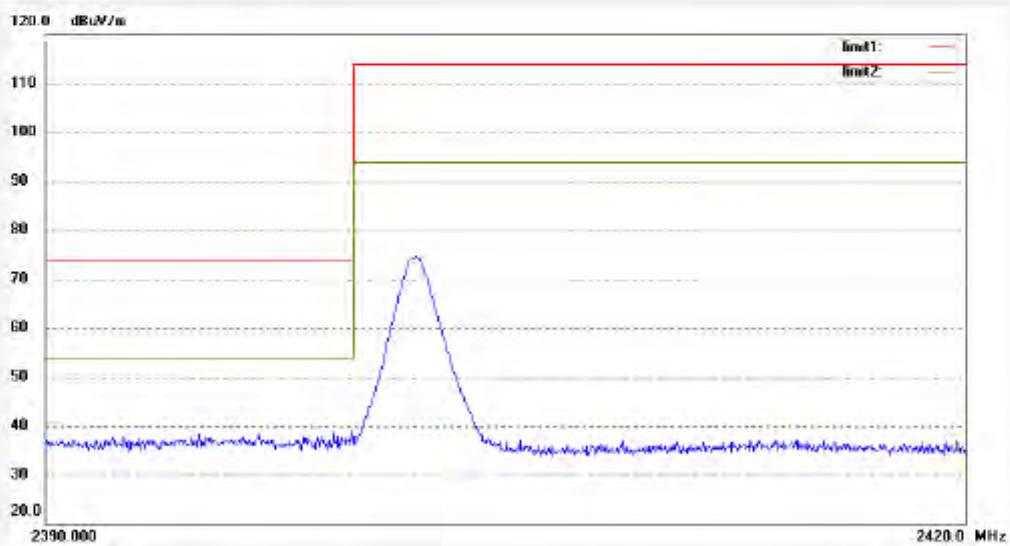

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Bob #1036	Polarization:	Vertical							
Standard:	FCC Part 15 PEAK 2.4G	Power Source:	DC 12V							
Test item:	Radiation Test	Date:	2012/02/23							
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	9/27/21							
EUT:	Entertainment System	Engineer Signature:								
Mode:	TX 2402	Distance:	3m							
Model:	AN5700NV(CNE-8518-ALP)									
Manufacturer:	SKYPINE									
Note:	Report NO.:ATE20120123									
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1038 Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G Power Source: DC 12V
Test item: Radiation Test Date: 2012/02/23
Temp. (C)/Hum.(%) 24 C / 48 % Time: 9/30/59
EUT: Entertainment System Engineer Signature:
Mode: TX 2480 Distance: 3m
Model: AN5700NV(CNE-8518-ALP)
Manufacturer: SKYPINE

Note: Report NO.:ATE20120123

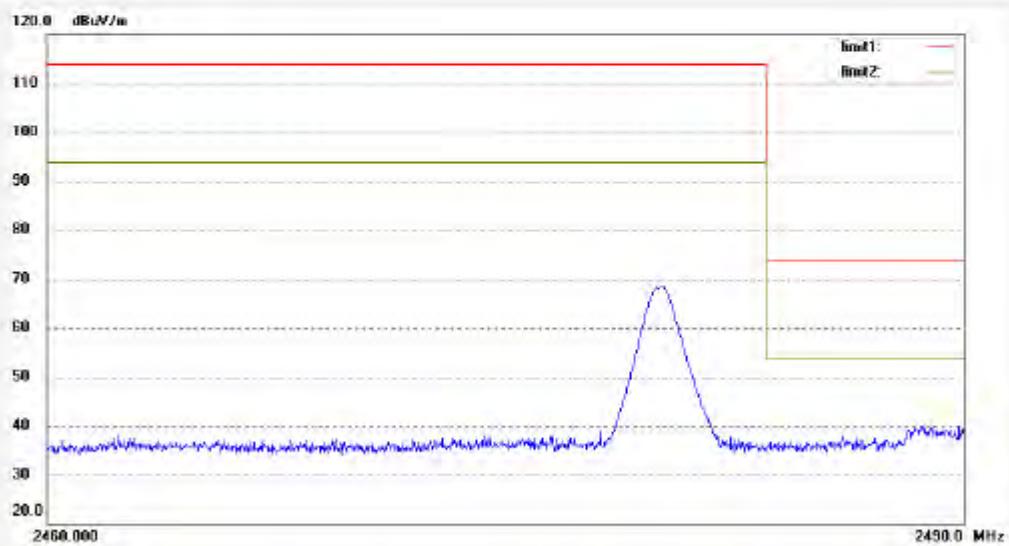

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1037	Polarization: Vertical									
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 9/29/38									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2480	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

11. RADIATED SPURIOUS EMISSION TEST

11.1. Block Diagram of Test Setup


11.1.1. Block diagram of connection between the EUT and simulators



Setup: Transmitting mode

(EUT: Entertainment System)

11.1.2. Semi-Anechoic Chamber Test Setup Diagram

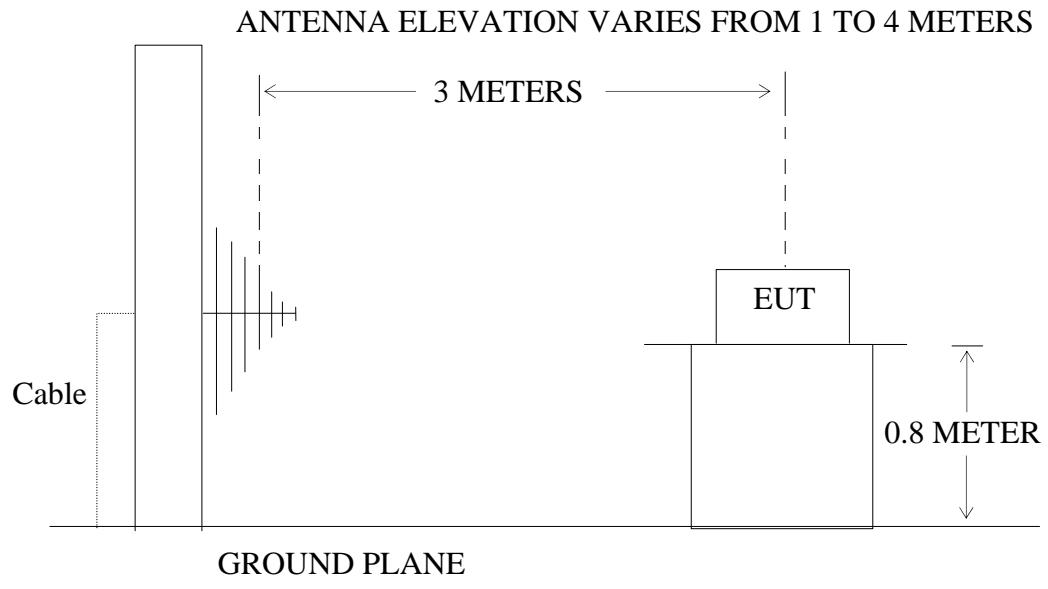

(EUT: Entertainment System)

11.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.Restricted bands of operation

11.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

11.4. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

11.5. Operating Condition of EUT

11.5.1. Setup the EUT and simulator as shown as Section 11.1.

11.5.2. Turn on the power of all equipment.

11.5.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

11.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver (R&S ESI26) is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

11.7.The Field Strength of Radiation Emission Measurement Results
PASS.

Date of Test: <u>February 24, 2012</u>	Temperature: <u>25°C</u>
EUT: <u>Entertainment System</u>	Humidity: <u>50%</u>
Model No.: <u>AN5700NV(CNE-8518-ALP)</u>	Power Supply: <u>DC 12V</u>
Test Mode: <u>TX (2402MHz)</u>	Test Engineer: <u>Apple</u>

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			QP	QP	QP	
546.4365	17.10	25.18	42.28	46.00	-3.72	Vertical
752.3147	14.40	27.62	42.02	46.00	-3.98	Vertical
925.6132	13.28	29.16	42.44	46.00	-3.56	Vertical
258.5332	22.19	18.38	40.57	46.00	-5.43	Horizontal
403.9334	19.61	22.50	42.11	46.00	-3.89	Horizontal
590.3509	16.86	25.39	42.25	46.00	-3.75	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2402.000	57.43	70.18	-7.45	49.98	62.73	-	-	-	-	Vertical
2402.000	55.66	66.66	-7.45	48.21	59.21	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test: February 24, 2012
 EUT: Entertainment System
 Model No.: AN5700NV(CNE-8518-ALP)
 Test Mode: TX (2441MHz)

Temperature: 25°C
 Humidity: 50%
 Power Supply: DC 12V
 Test Engineer: Apple

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result	Limit	Margin (dB)	Polarization
			QP	QP		
258.5332	23.61	18.38	41.99	46	-4.01	Vertical
546.4365	16.10	25.18	41.28	46	-4.72	Vertical
893.6557	12.67	28.79	41.46	46	-4.54	Vertical
231.0398	24.23	16.84	41.07	46	-4.93	Horizontal
749.6761	15.32	27.60	42.92	46	-3.08	Horizontal
833.0126	13.55	28.29	41.84	46	-4.16	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2441.000	55.41	66.37	-7.35	48.06	59.02	-	-	-	-	Vertical
2441.000	58.37	72.03	-7.35	51.02	64.68	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test: February 24, 2012
 EUT: Entertainment System
 Model No.: AN5700NV(CNE-8518-ALP)
 Test Mode: TX (2480MHz)

Temperature: 25°C
 Humidity: 50%
 Power Supply: DC 12V
 Test Engineer: Apple

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr.	Result	Limit	Margin (dB)	Polarization
			(dB μ V/m)	(dB μ V/m)		
QP	(dB)	QP	QP	QP		
493.5009	16.62	23.95	40.57	46	-5.43	Vertical
546.4365	18.10	25.18	43.28	46	-2.72	Vertical
752.3147	14.40	27.62	42.02	46	-3.98	Vertical
546.4365	17.66	25.18	42.84	46	-3.16	Horizontal
590.3509	16.86	25.39	42.25	46	-3.75	Horizontal
749.6761	13.82	27.60	41.42	46	-4.58	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarizati on
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2480.000	57.48	69.06	-7.37	50.11	61.69	-	-	-	-	Vertical
2480.000	58.34	71.54	-7.37	50.97	64.17	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	Bob #1001	Polarization:	Horizontal							
Standard:	FCC Class B 3M Radiated	Power Source:	DC 12V							
Test item:	Radiation Test	Date:	2012/02/24							
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	14:47:22							
EUT:	Entertainment System	Engineer Signature:								
Mode:	TX 2402MHz	Distance:	3m							
Model:	AN5700NV(CNE-8518-ALP)									
Manufacturer:	SKYPINE									
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	258.5332	22.19	18.38	40.57	46.00	-5.43	QP			
2	403.9334	19.61	22.50	42.11	46.00	-3.89	QP			
3	590.3509	18.86	25.39	42.25	46.00	-3.75	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Job #1000

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 12V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 14:44:13

EUT: Entertainment System

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: AN5700NV(CNE-8518-ALP)

Manufacturer: SKYPINE

Note: Report NO.:ATE20120123

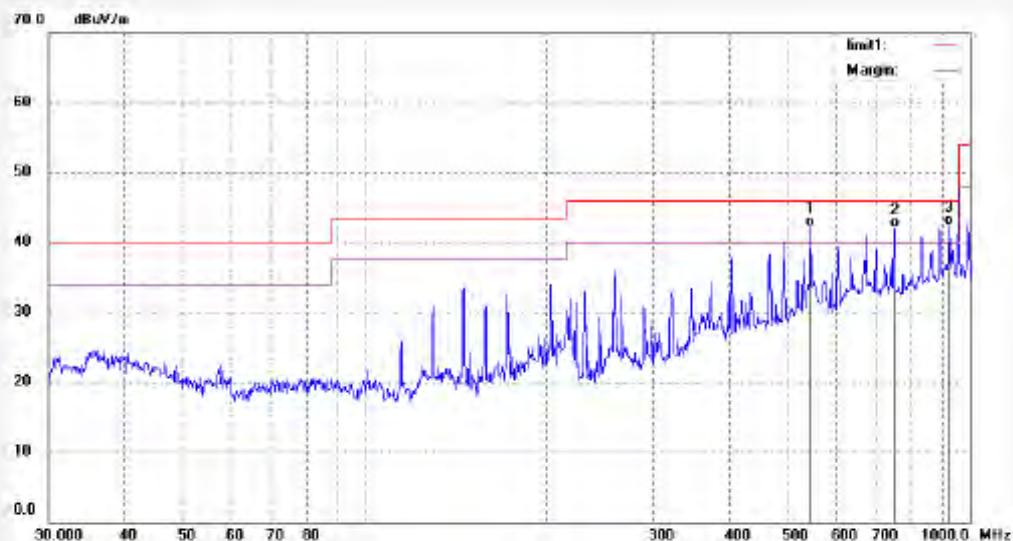

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	546.4365	17.10	25.18	42.28	46.00	-3.72	QP			
2	752.3147	14.40	27.82	42.02	46.00	-3.98	QP			
3	925.6132	13.28	29.16	42.44	46.00	-3.56	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd.
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 906 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #986	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 2012/02/23
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 12:52:17
EUT: Entertainment System	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: AN5700NV(CNE-8518-ALP)	
Manufacturer: SKYPINE	
Note: Report NO.:ATE20120123	

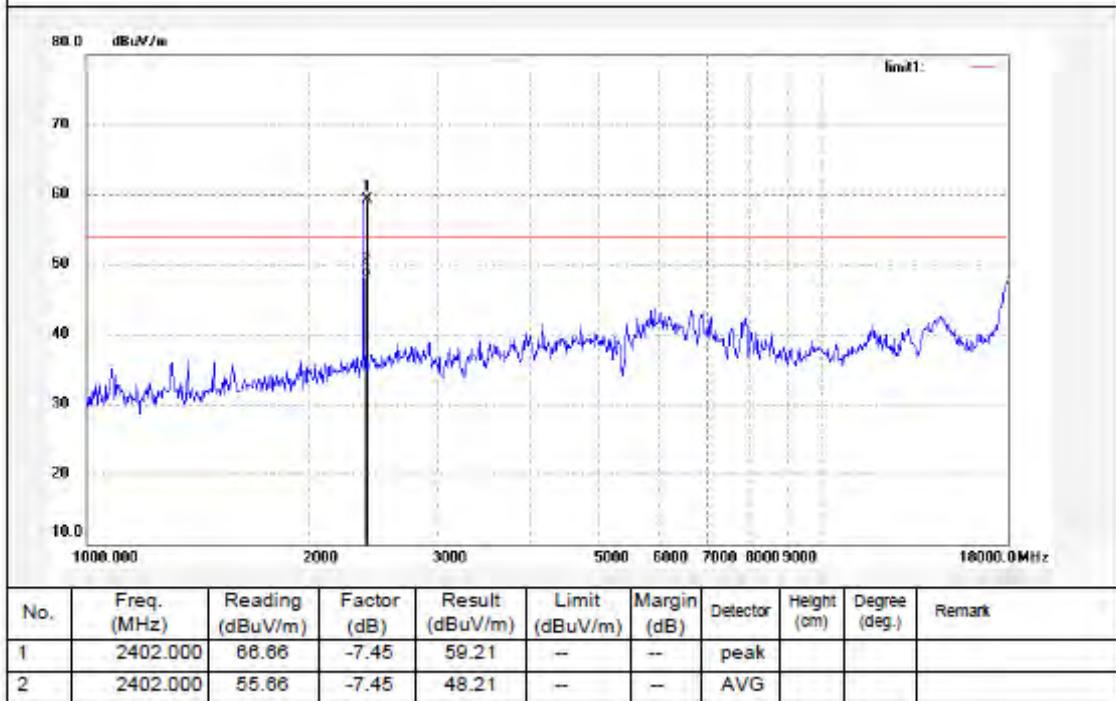


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 906 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #987	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC 12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 12:56:05									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2402MHz	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	70.18	-7.45	62.73	—	—	peak			
2	2402.000	57.43	-7.45	49.98	—	—	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	Bob #1238	Polarization:	Horizontal							
Standard:	FCC Class B 3M Radiated	Power Source:	DC 12V							
Test item:	Radiation Test	Date:	2012/02/24							
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	5/47/15							
EUT:	Entertainment System	Engineer Signature:	Bob							
Mode:	TX 2402MHz	Distance:								
Model:	AN5700NV(CNE-8518-ALP)									
Manufacturer:	SKYPINE									
Note: Report No.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Bob #1239

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC12V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 5/49/05

EUT: Entertainment System

Engineer Signature: Bob


Mode: TX 2402MHz

Distance:

Model: AN5700NV(CNE-8518-ALP)

Manufacturer: SKYPINE

Note: Report No.:ATE20120123

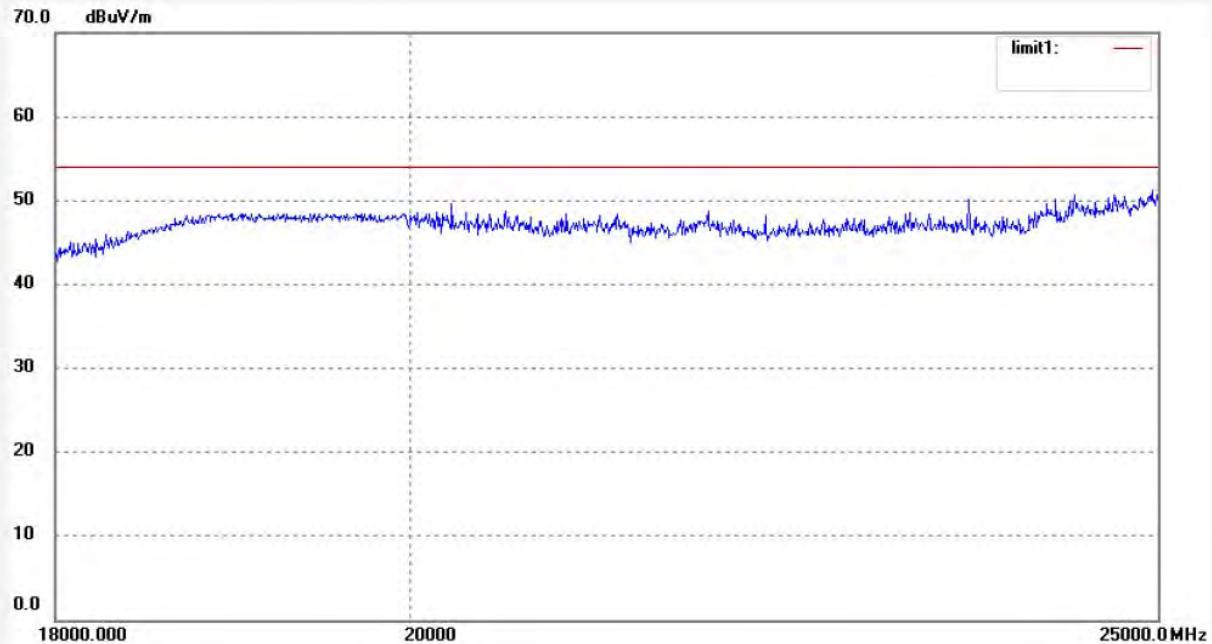

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1002	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 2012/02/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 14:50:45
EUT: Entertainment System	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: AN5700NV(CNE-8518-ALP)	
Manufacturer: SKYPINE	
Note: Report NO.:ATE20120123	

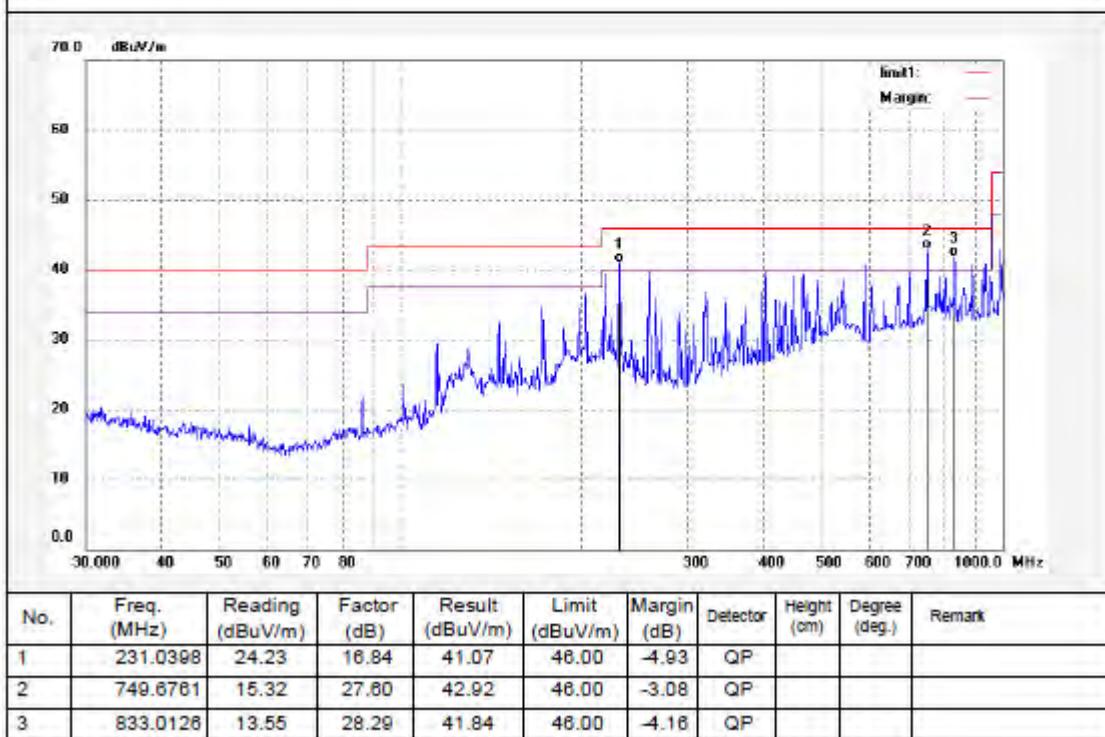



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 906 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1003
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C) / Hum.(%) 24 C / 48 %
EUT: Entertainment System
Mode: TX 2441MHz
Model: AN5700NV(CNE-8518-ALP)
Manufacturer: SKYPINE

Polarization: Vertical

Power Source: DC 12V


Date: 2012/02/24

Time: 14:53:46

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20120123

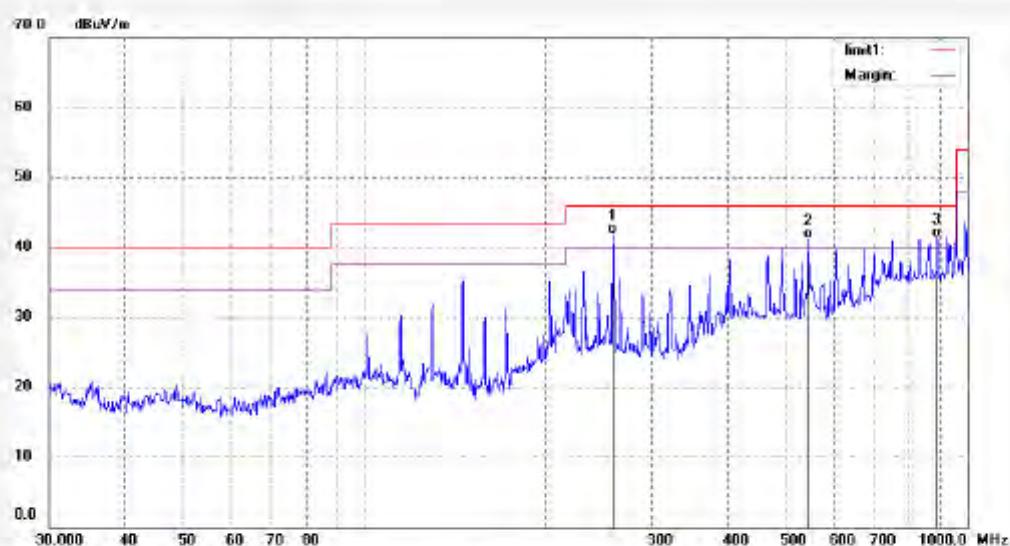

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	258.5332	23.61	18.38	41.99	46.00	-4.01	QP			
2	546.4365	16.10	25.18	41.28	46.00	-4.72	QP			
3	893.6557	12.67	28.79	41.46	46.00	-4.54	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 908 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #992	Polarization: Horizontal									
Standard: FCC Class B 3M Radiated	Power Source: DC12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 13:07:52									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2441MHz	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	72.03	-7.35	64.68	--	--	peak			
2	2441.000	58.37	-7.35	51.02	--	--	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: Bob #991	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 13:05:27									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2441MHz	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	66.37	-7.35	59.02	--	--	peak			
2	2441.000	55.41	-7.35	48.06	--	--	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	Bob #1241	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	DC 12V
Test item:	Radiation Test	Date:	2012/02/24
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	5/53/01
EUT:	Entertainment System	Engineer Signature:	Bob
Mode:	TX 2441MHz	Distance:	
Model:	AN5700NV(CNE-8518-ALP)		
Manufacturer:	SKYPINE		
Note:	Report No.:ATE20120123		

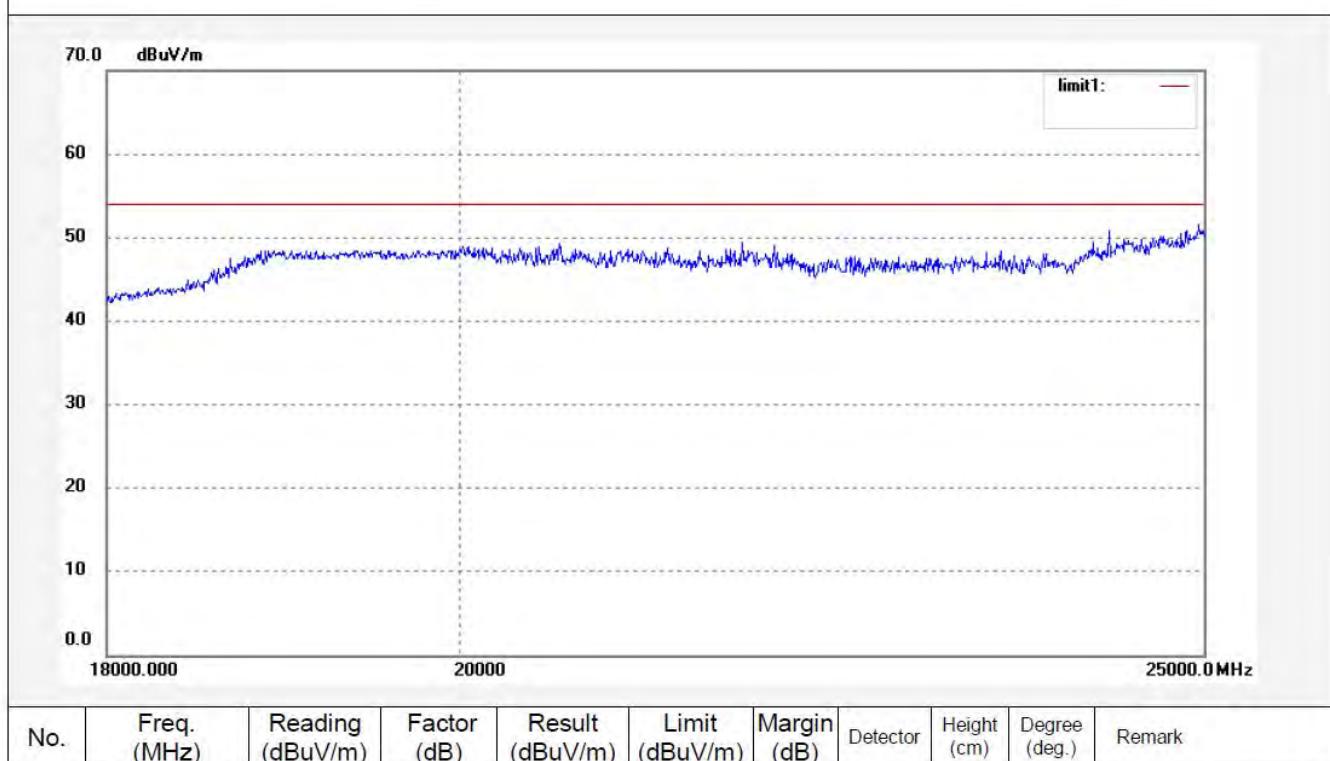

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #1240

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC12V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 5/51/02

EUT: Entertainment System

Engineer Signature: Bob

Mode: TX 2441MHz

Distance:

Model: AN5700NV(CNE-8518-ALP)

Manufacturer: SKYPINE

Note: Report No.:ATE20120123

70.0 dBuV/m

60

50

40

30

20

10

0.0

18000.000

20000

25000.0 MHz

limit1:

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 906 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1004
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Entertainment System
Mode: TX 2480MHz
Model: AN5700NV(CNE-8518-ALP)
Manufacturer: SKYPINE

Polarization: Horizontal
Power Source: DC 12V
Date: 2012/02/24
Time: 14:56:22
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20120123

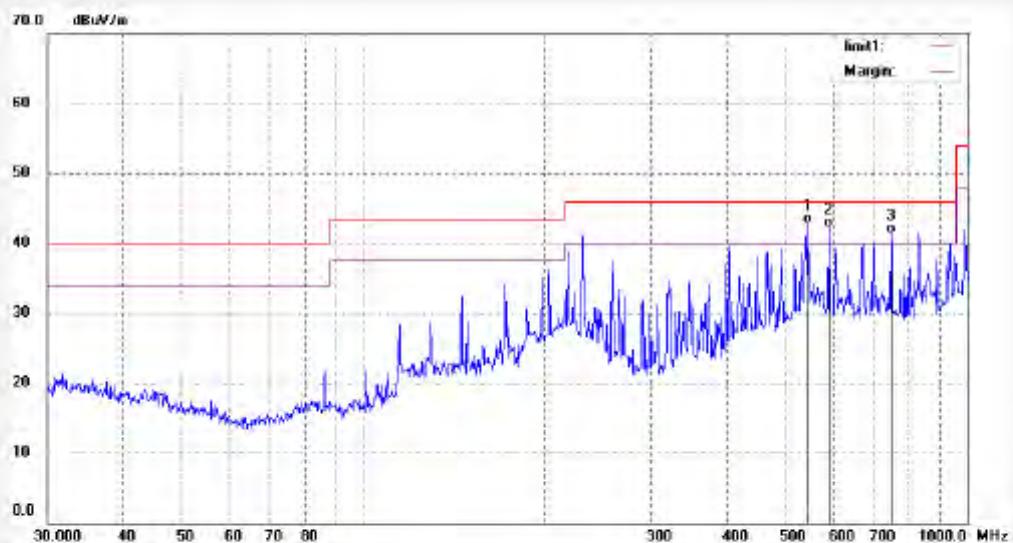

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	546.4365	17.66	25.18	42.84	46.00	-3.16	QP			
2	590.3509	16.88	25.39	42.25	46.00	-3.75	QP			
3	749.8761	13.82	27.60	41.42	46.00	-4.58	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 906 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1005	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 12V
Test item: Radiation Test	Date: 2012/02/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 14:59:08
EUT: Entertainment System	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: AN5700NV(CNE-8518-ALP)	
Manufacturer: SKYPINE	

Note: Report NO.:ATE20120123

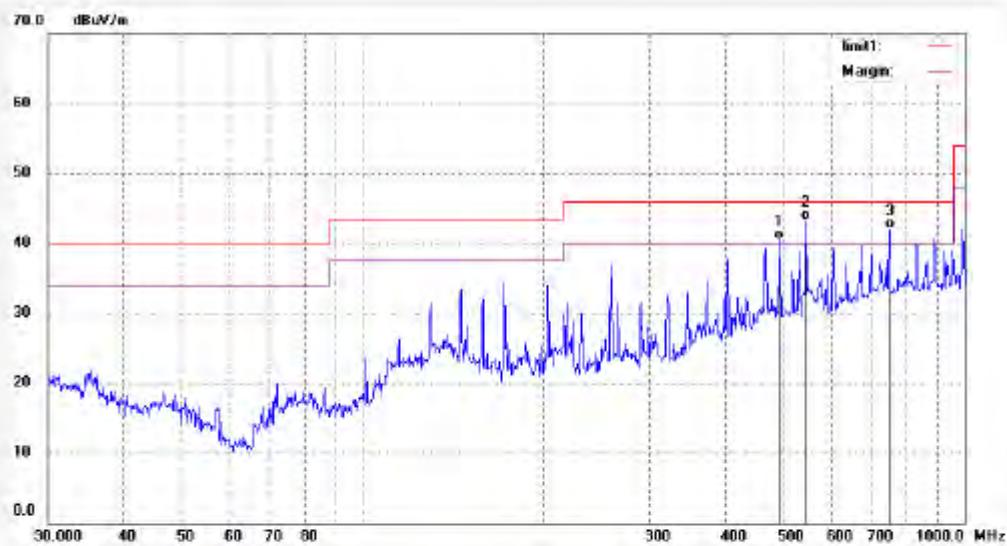

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	493.5009	16.62	23.95	40.57	46.00	-5.43	QP			
2	546.4365	18.10	25.18	43.28	46.00	-2.72	QP			
3	752.3147	14.40	27.62	42.02	46.00	-3.98	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #995	Polarization: Horizontal									
Standard: FCC Class B 3M Radiated	Power Source: DC12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp. (C)/Hum.(%) 24 C / 48 %	Time: 13:14:50									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2480MHz	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	71.54	-7.37	64.17	—	—	peak			
2	2480.000	58.34	-7.37	50.97	—	—	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 968 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #996	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC12V									
Test item: Radiation Test	Date: 2012/02/23									
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 13:19:24									
EUT: Entertainment System	Engineer Signature:									
Mode: TX 2480MHz	Distance: 3m									
Model: AN5700NV(CNE-8518-ALP)										
Manufacturer: SKYPINE										
Note: Report NO.:ATE20120123										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	69.06	-7.37	61.69	--	--	peak			
2	2480.000	57.48	-7.37	50.11	--	--	AVG			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Bob #1242
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 24 C / 48 %
 EUT: Entertainment System
 Mode: TX 2480MHz
 Model: AN5700NV(CNE-8518-ALP)
 Manufacturer: SKYPINE

Polarization: Horizontal
 Power Source: DC12V
 Date: 2012/02/24
 Time: 5/55/57
 Engineer Signature: Bob
 Distance:

Note: Report No.:ATE20120123

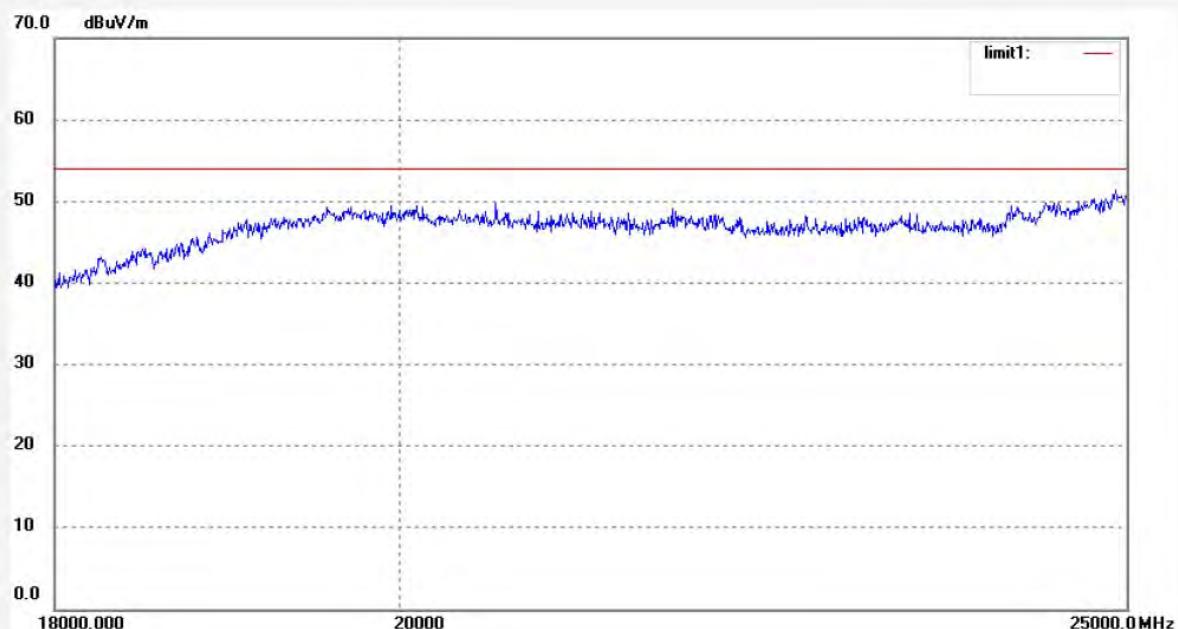

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Bob #1243

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC12V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 5/57/43

EUT: Entertainment System

Engineer Signature: Bob


Mode: TX 2480MHz

Distance:

Model: AN5700NV(CNE-8518-ALP)

Manufacturer: SKYPINE


Note: Report No.:ATE20120123

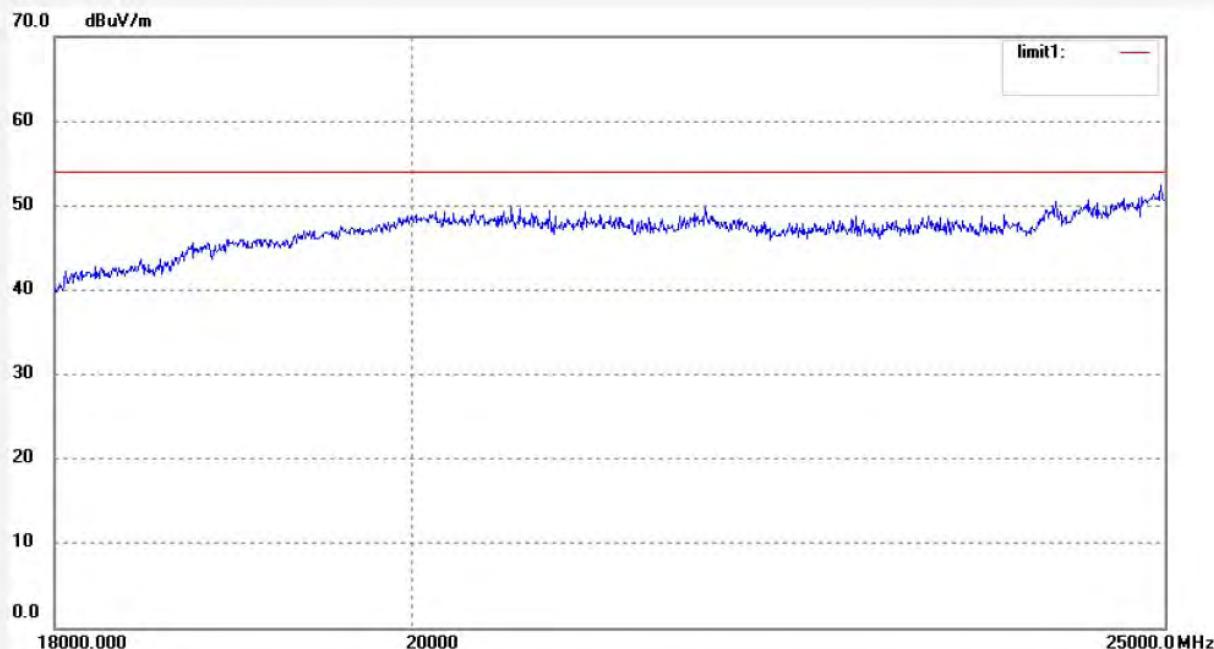

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

12. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

12.1. Block Diagram of Test Setup

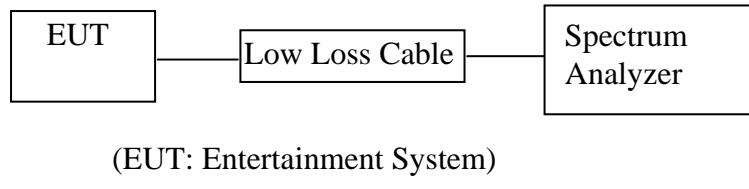

12.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

12.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.3.1. Entertainment System (EUT)

Model Number	:	AN5700NV(CNE-8518-ALP)
Serial Number	:	N/A
Manufacturer	:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 12.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

12.5.Test Procedure

12.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

12.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


12.5.3.The Conducted Spurious Emission was measured and recorded.

12.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


"Spectrum analyzer" is Agilent
TX 2402GHz (30MHz-1GHz)

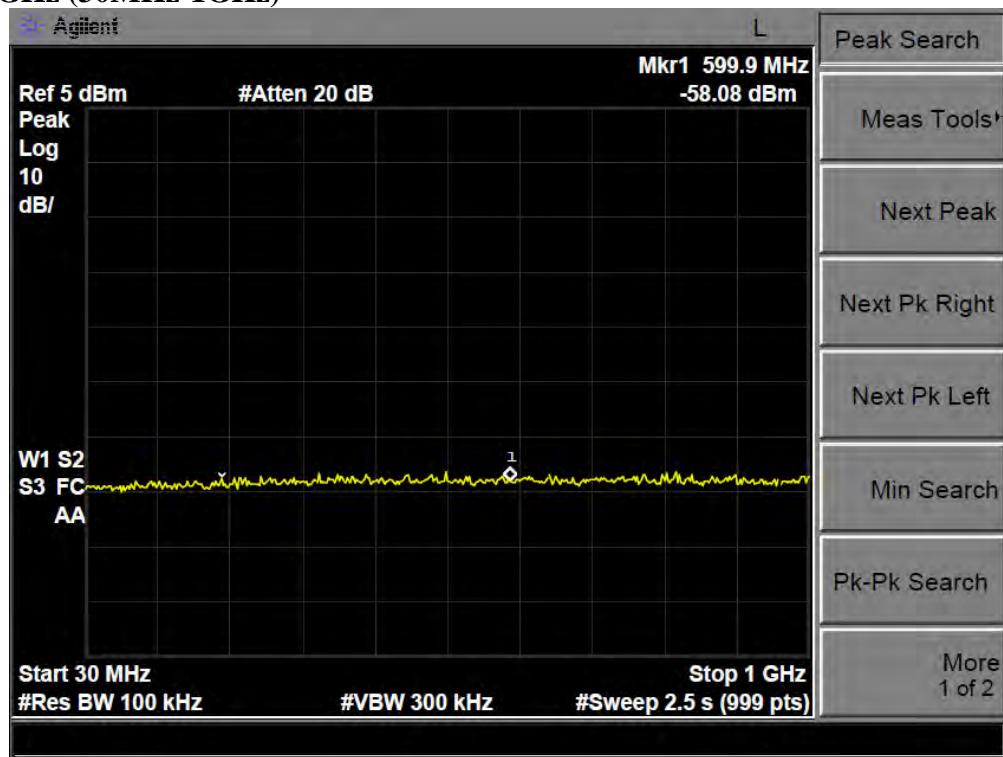


TX 2402GHz (1GHz-25GHz)

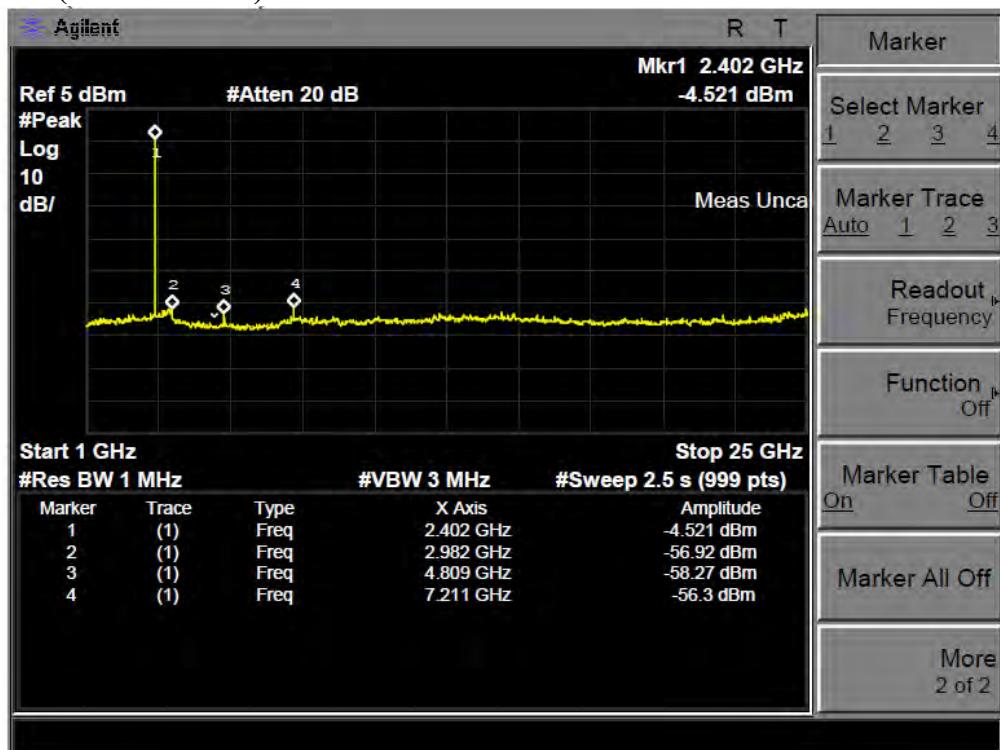


TX 2441GHz (30MHz-1GHz)

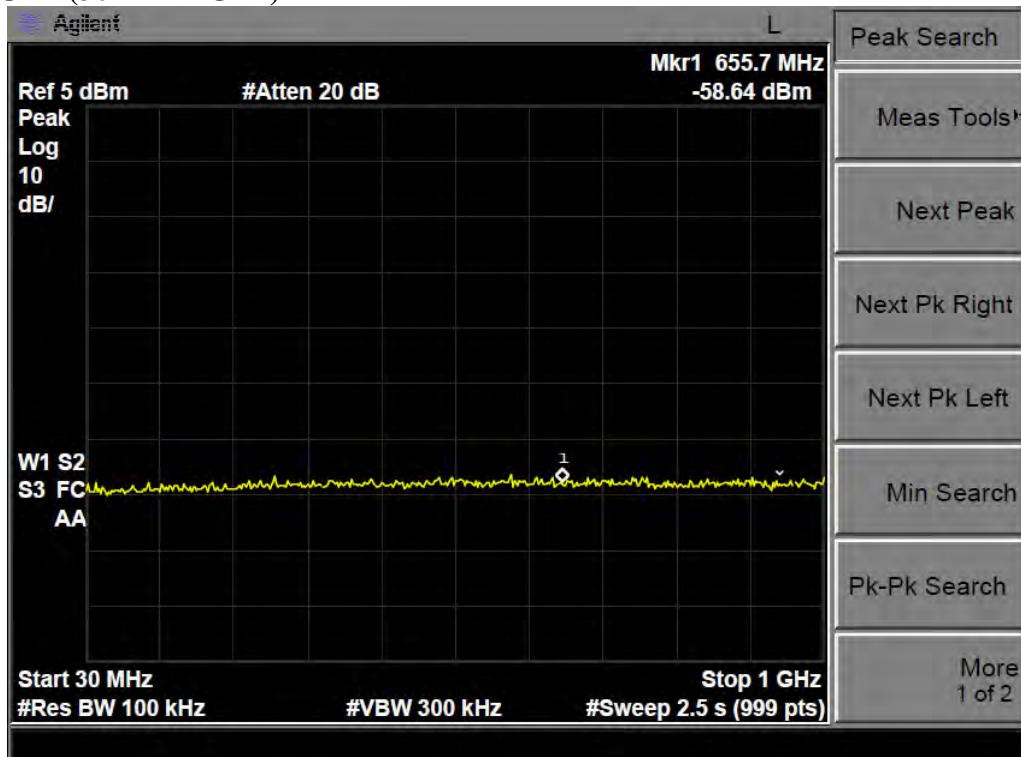


TX 2441GHz (1GHz-25GHz)

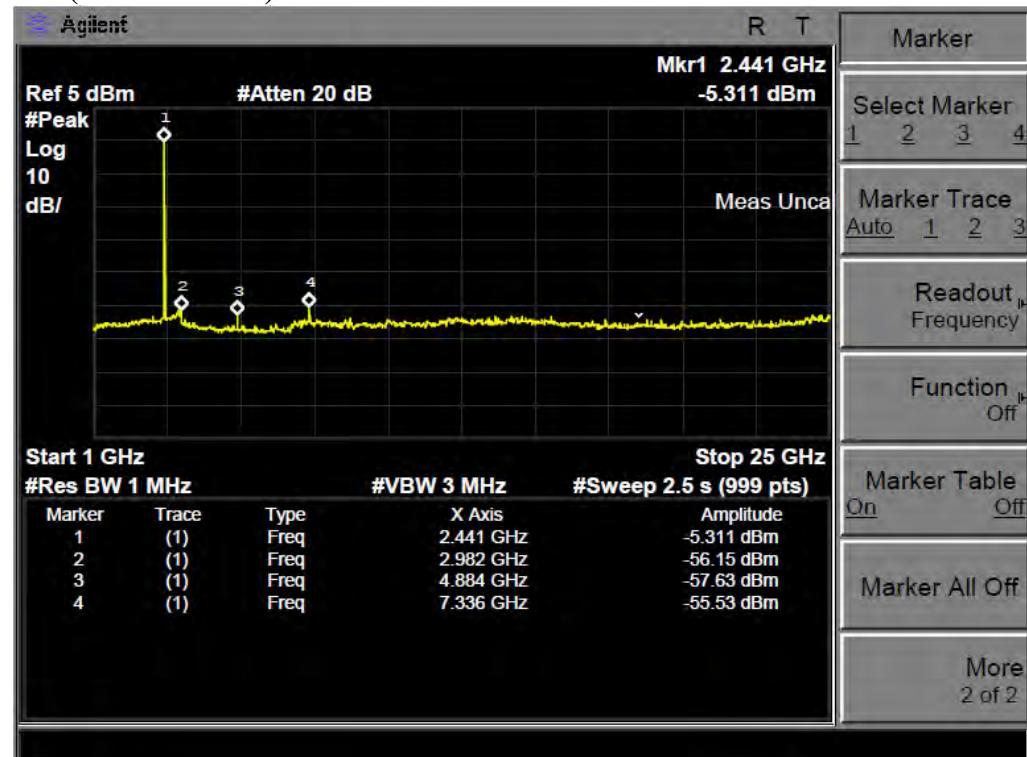

TX 2480GHz (30MHz-1GHz)

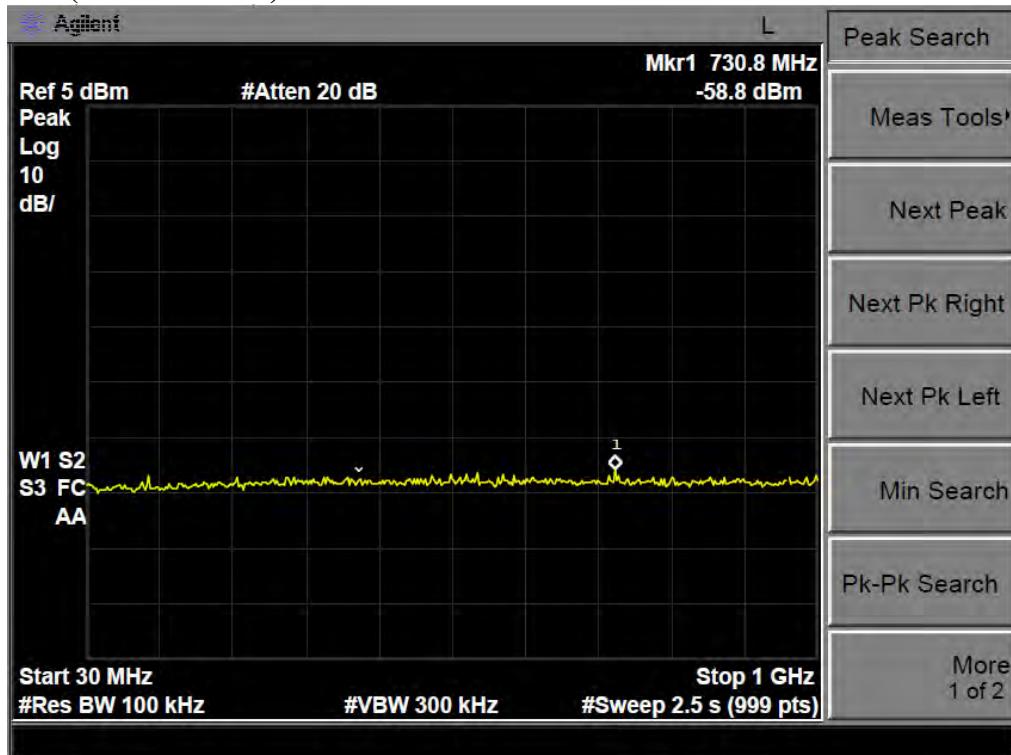

TX 2480GHz (1GHz-25GHz)

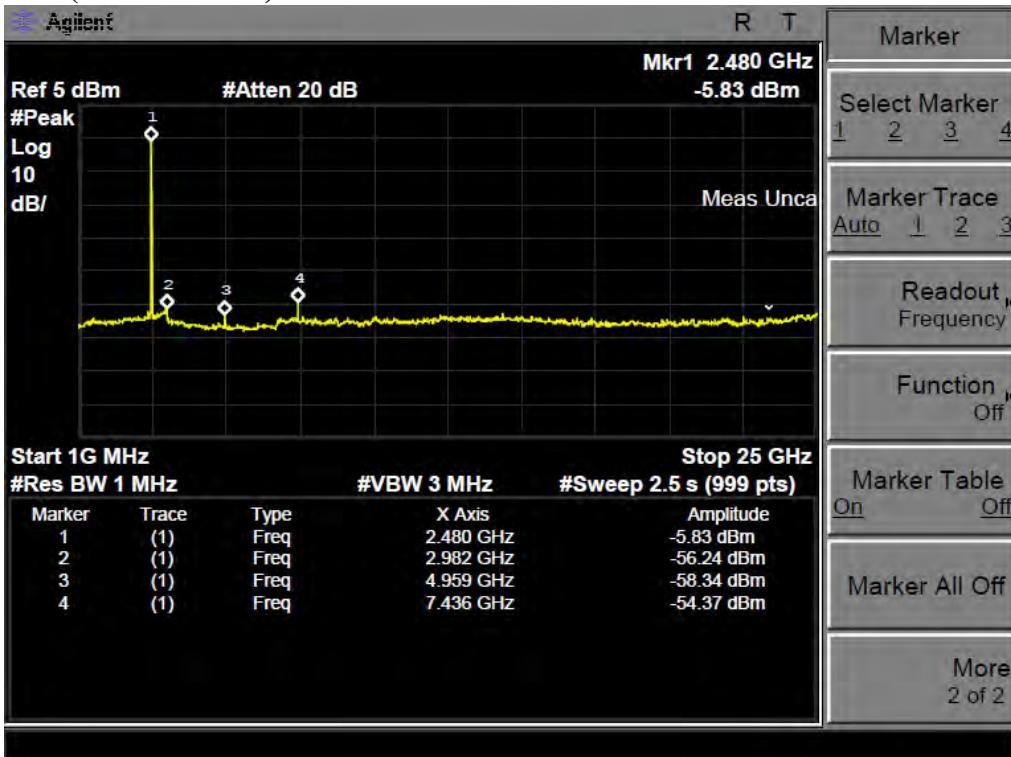

13. ANTENNA REQUIREMENT

13.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

