

TEST REPORT

Product : ALL IN ONE DVD PLAYER
Trade mark : Clarion
Model/Type reference : NX807, VX807
Serial Number : N/A
Report Number : EED32I00292903
FCC ID : V8VNX807
Date of Issue : Dec. 13, 2016
Test Standards : 47 CFR Part 15 Subpart C (2015)
Test result : PASS

Prepared for:

SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
A1 BUILDING, NO.6 XINXING INDUSTRIAL PARK, XINHE VILLAGE,
FUYONG TOWN, BAOAN, SHENZHEN, China, 518000

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom - chen

Compiled by:

Kevin Ian

Reviewed by:

Tom chen (Test Project)

Kevin Ian (Project Engineer)

Kevin Yang

Kevin yang (Reviewer)

Sheek , Luo

Sheek Luo (Lab supervisor)

Date:
Report Seal

Dec. 13, 2016

Check No.: 2402656861

Report No. : EED32I00292903

Page 2 of 34

2 Version

Version No.	Date	Description
00	Dec. 13, 2016	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample and the sample information are provided by the client.

NA: The device is used in the vehicle and only DC operated, the test related AC mains is not applicable.

Model No.: NX807, VX807

Only the model NX807 was tested, since the circuitry design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, with difference on front-panel(including colour and decoration of plastic enclosure, position of button and PWB) and NX807 with Navi function and VX807 without Navi function.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	12
Appendix A): 6dB Occupied Bandwidth.....	13
Appendix B): Conducted Peak Output Power.....	15
Appendix C): Band-edge for RF Conducted Emissions.....	17
Appendix D): RF Conducted Spurious Emissions.....	18
Appendix E): Power Spectral Density.....	21
Appendix F): Antenna Requirement.....	23
Appendix G): Restricted bands around fundamental frequency (Radiated).....	24
Appendix H): Radiated Spurious Emissions.....	27
PHOTOGRAPHS OF TEST SETUP.....	32
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	34

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

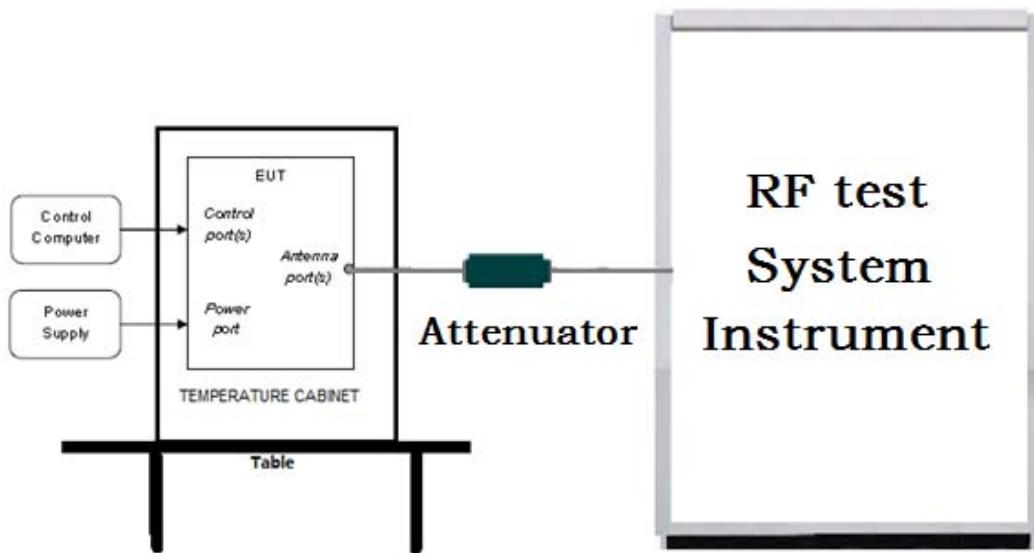

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

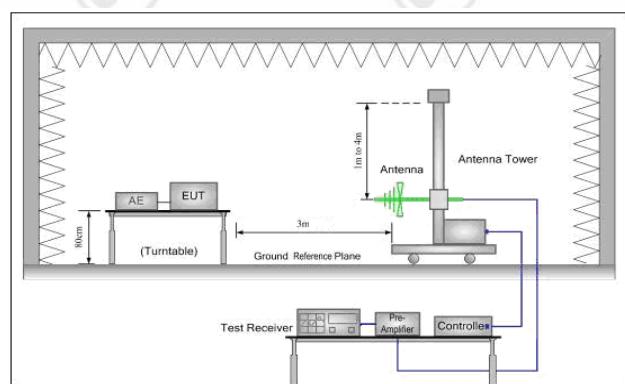
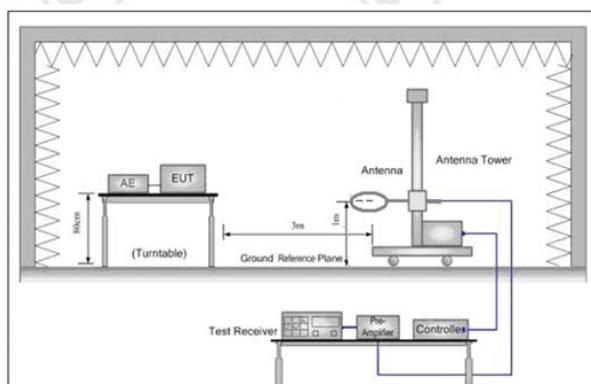


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz


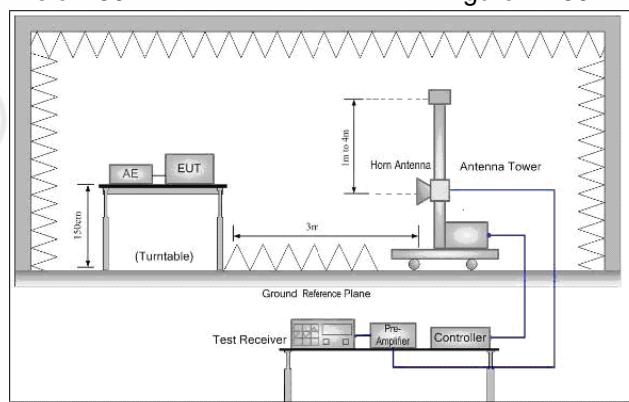


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

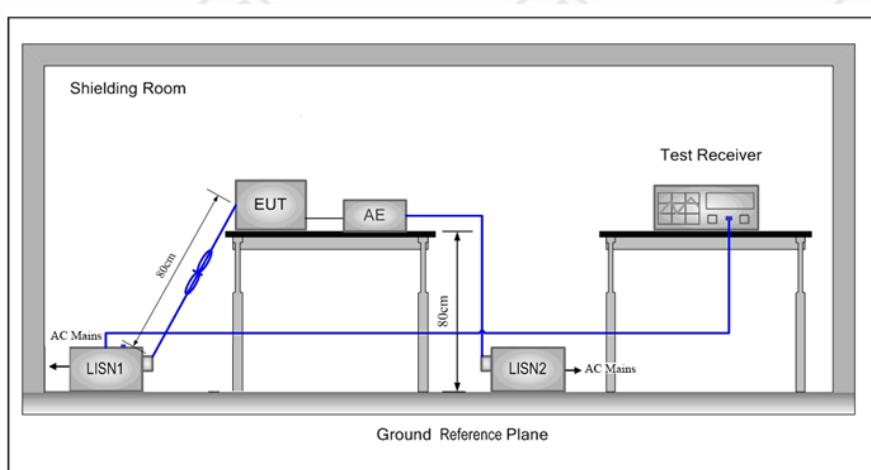

5.2 Test Environment

Operating Environment:

Temperature:	21.5°C
Humidity:	58% RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test channel:

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s).	2402MHz	2440MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address of Applicant:	A1 BUILDING, NO.6 XINXING INDUSTRIAL PARK, XINHE VILLAGE, FUYONG TOWN, BAOAN, SHENZHEN, China, 518000
Manufacturer:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address of Manufacturer:	A1 BUILDING, NO.6 XINXING INDUSTRIAL PARK, XINHE VILLAGE, FUYONG TOWN, BAOAN, SHENZHEN, China, 518000
Factory:	SKYPINE ELECTRONICS (SHEN ZHEN) CO., LTD.
Address of Factory:	A1 BUILDING, NO.6 XINXING INDUSTRIAL PARK, XINHE VILLAGE, FUYONG TOWN, BAOAN, SHENZHEN, China, 518000

6.2 General Description of EUT

Product Name:	ALL IN ONE DVD PLAYER
Model No.:	NX807, VX807
Test Model No.:	NX807
Trade Mark:	Clarion
EUT Supports Radios application:	BT 4.0 Dual mode(2402-2480MHz), GPS(L1: 1575.42MHz)
Power Supply:	DC 12V
Sample Received Date:	Nov. 18, 2016
Sample tested Date:	Nov. 18, 2016 to Dec. 13, 2016

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT 4.0 Dual mode
Modulation Technique:	DSSS
Modulation Type:	GFSK
Number of Channel:	40
Antenna Type:	PCB Inverted-F Antenna
Antenna Gain:	0dBi
Test Power Grade:	255
Test Software of EUT:	BlueTest 2.5.8
Test Voltage:	DC 12V

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz

8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality

assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/1071 1112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-12-2016	01-11-2017

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	N/A
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix H)

Appendix A): 6dB Occupied Bandwidth**Test Result**

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict	Remark
BLE	LCH	0.6989	1.0491	PASS	Peak detector
BLE	MCH	0.6925	1.0481	PASS	
BLE	HCH	0.6997	1.0502	PASS	


Test Graphs

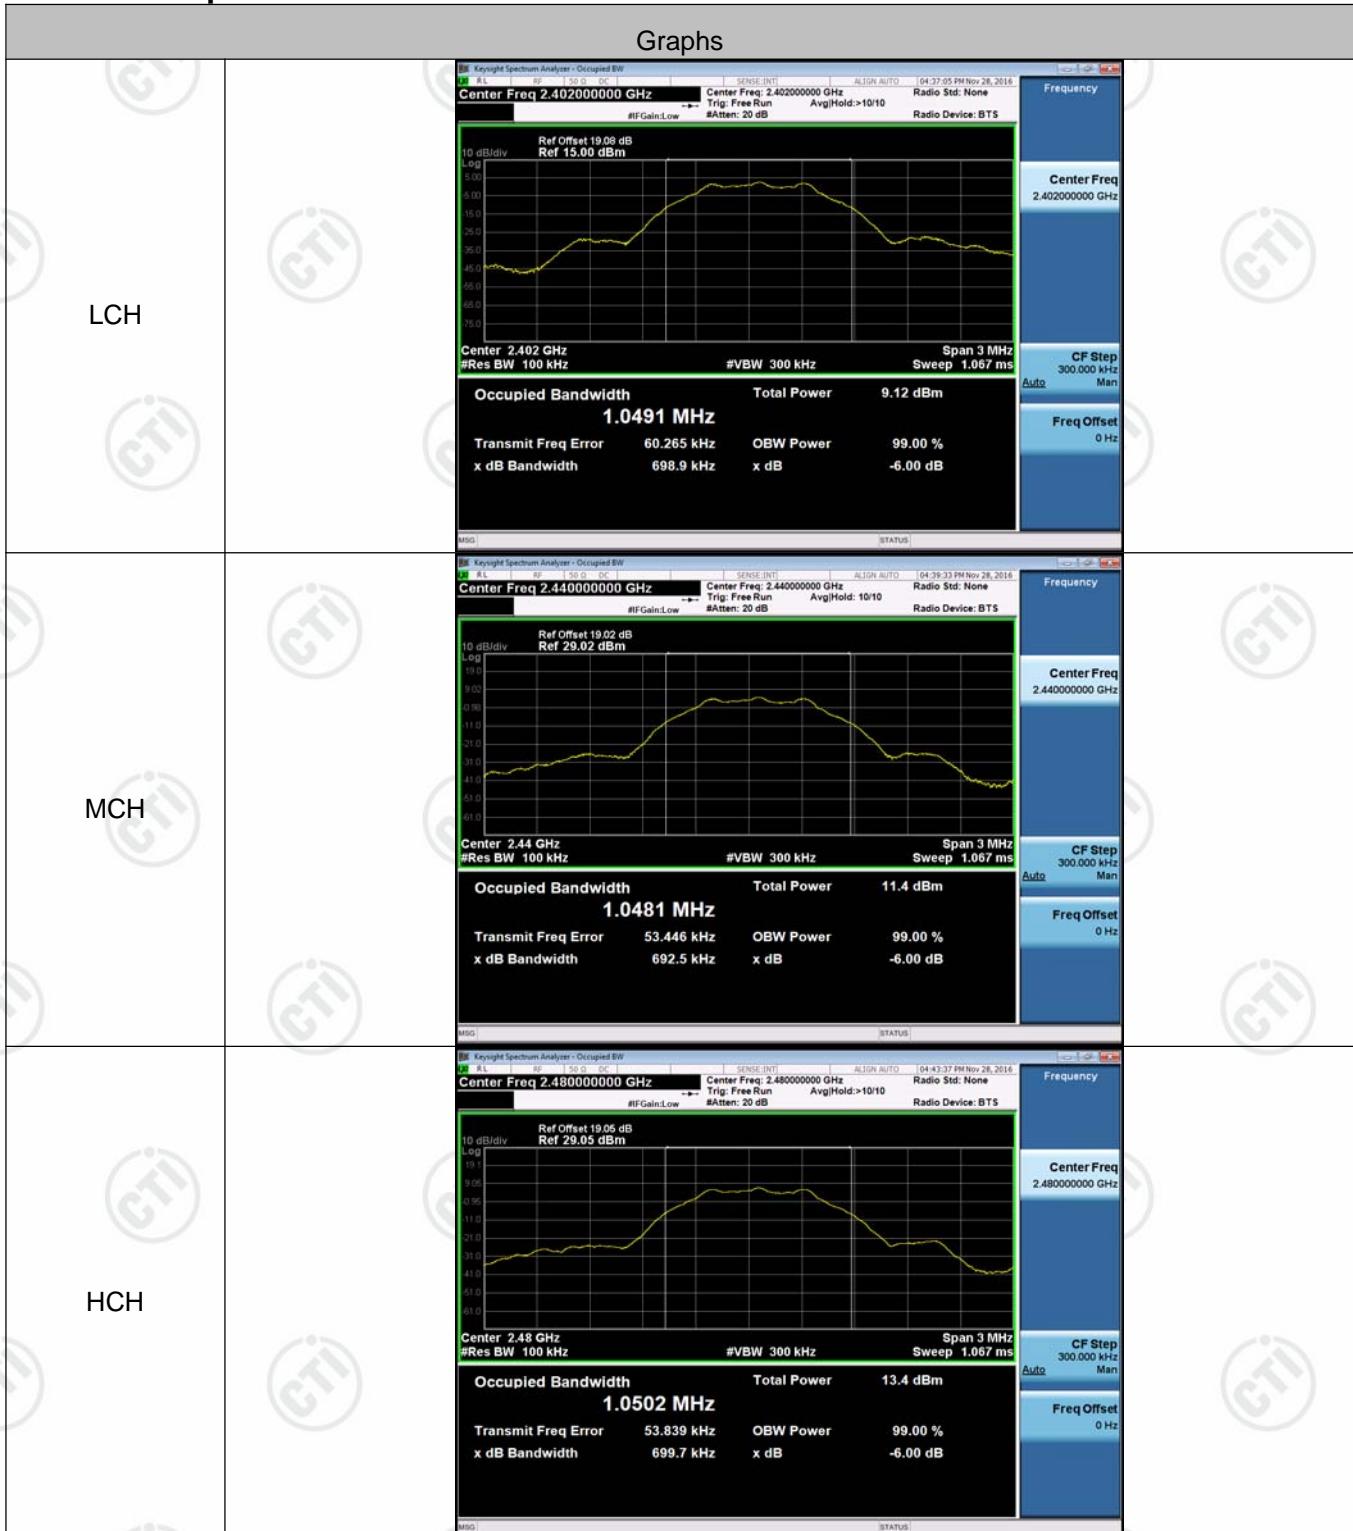

Appendix B): Conducted Peak Output Power**Test Result**

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	2.803	PASS
BLE	MCH	4.939	PASS
BLE	HCH	6.752	PASS

Test Graphs

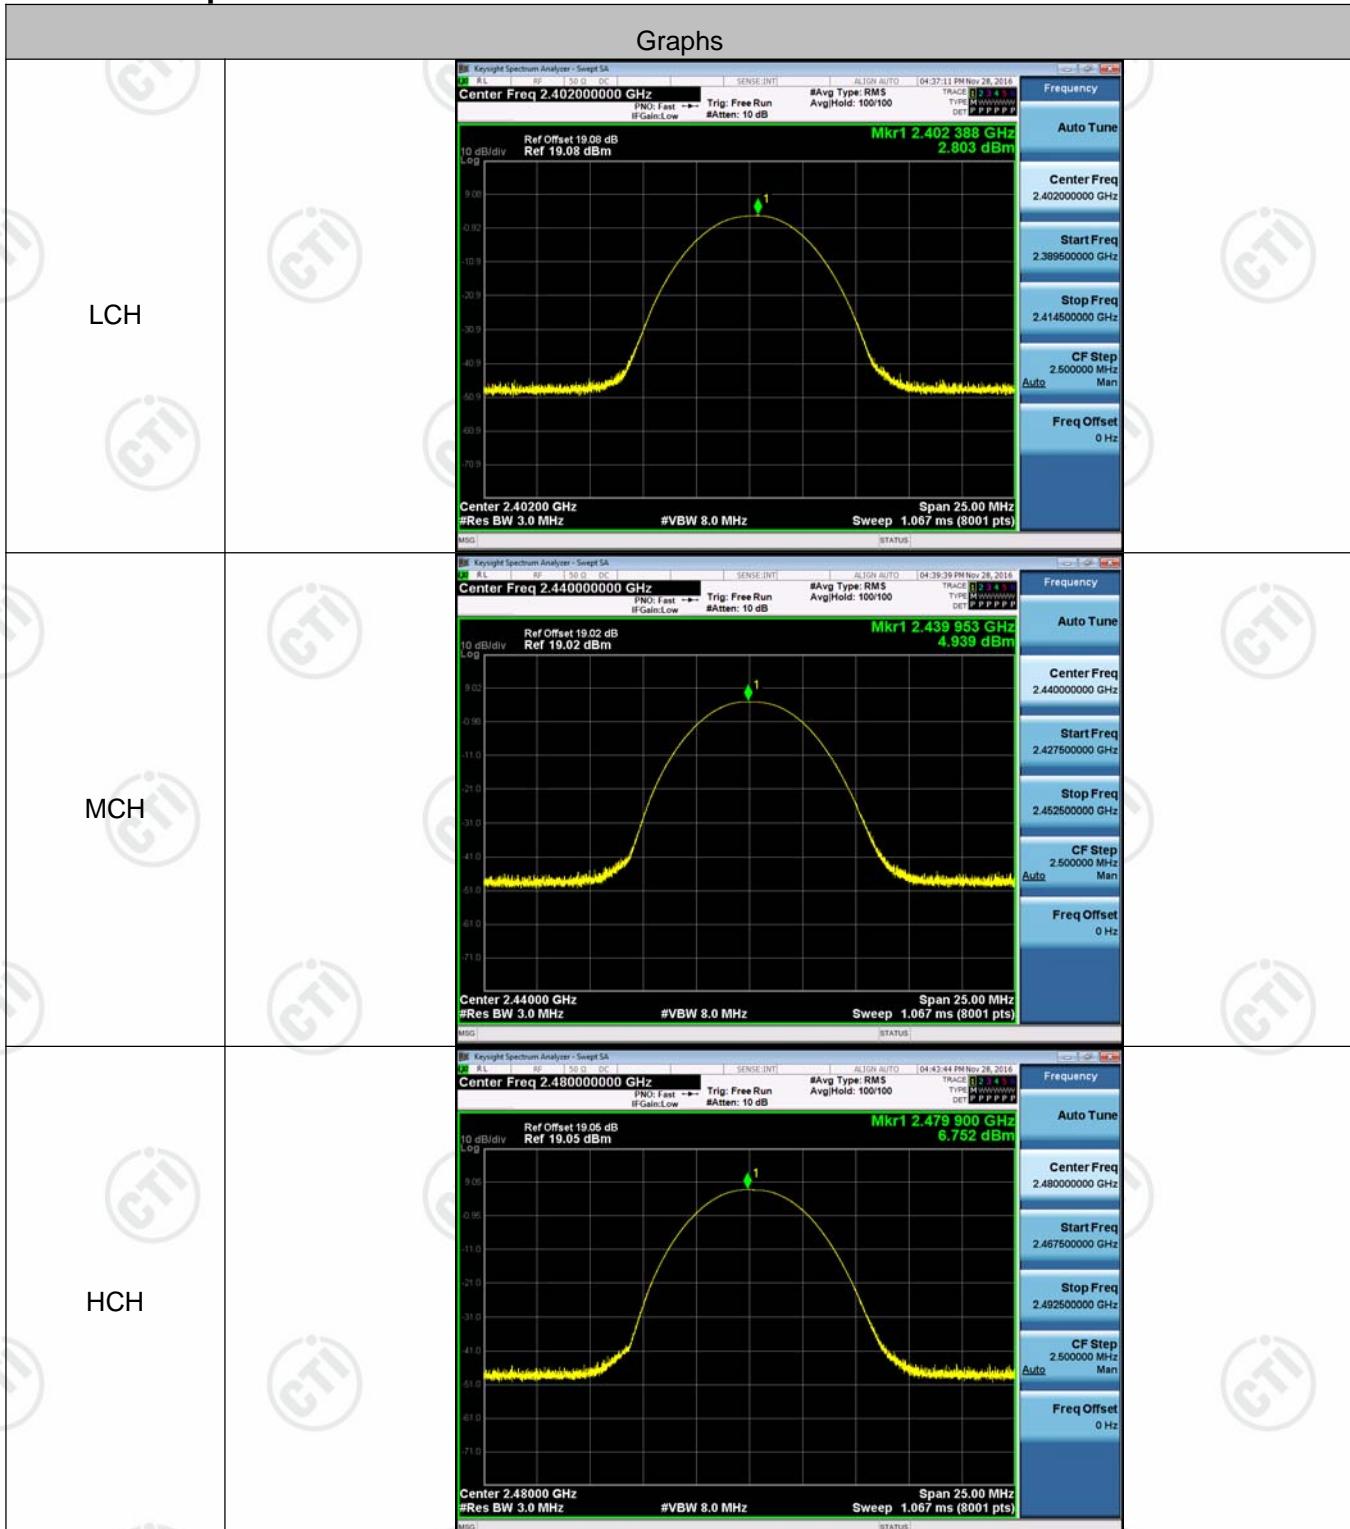

Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	2.240	-60.476	-17.76	PASS
BLE	HCH	6.429	-44.021	-13.57	PASS

Test Graphs





Appendix D): RF Conducted Spurious Emissions


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	2.203	<Limit	PASS
BLE	MCH	4.805	<Limit	PASS
BLE	HCH	6.275	<Limit	PASS

Test Graphs

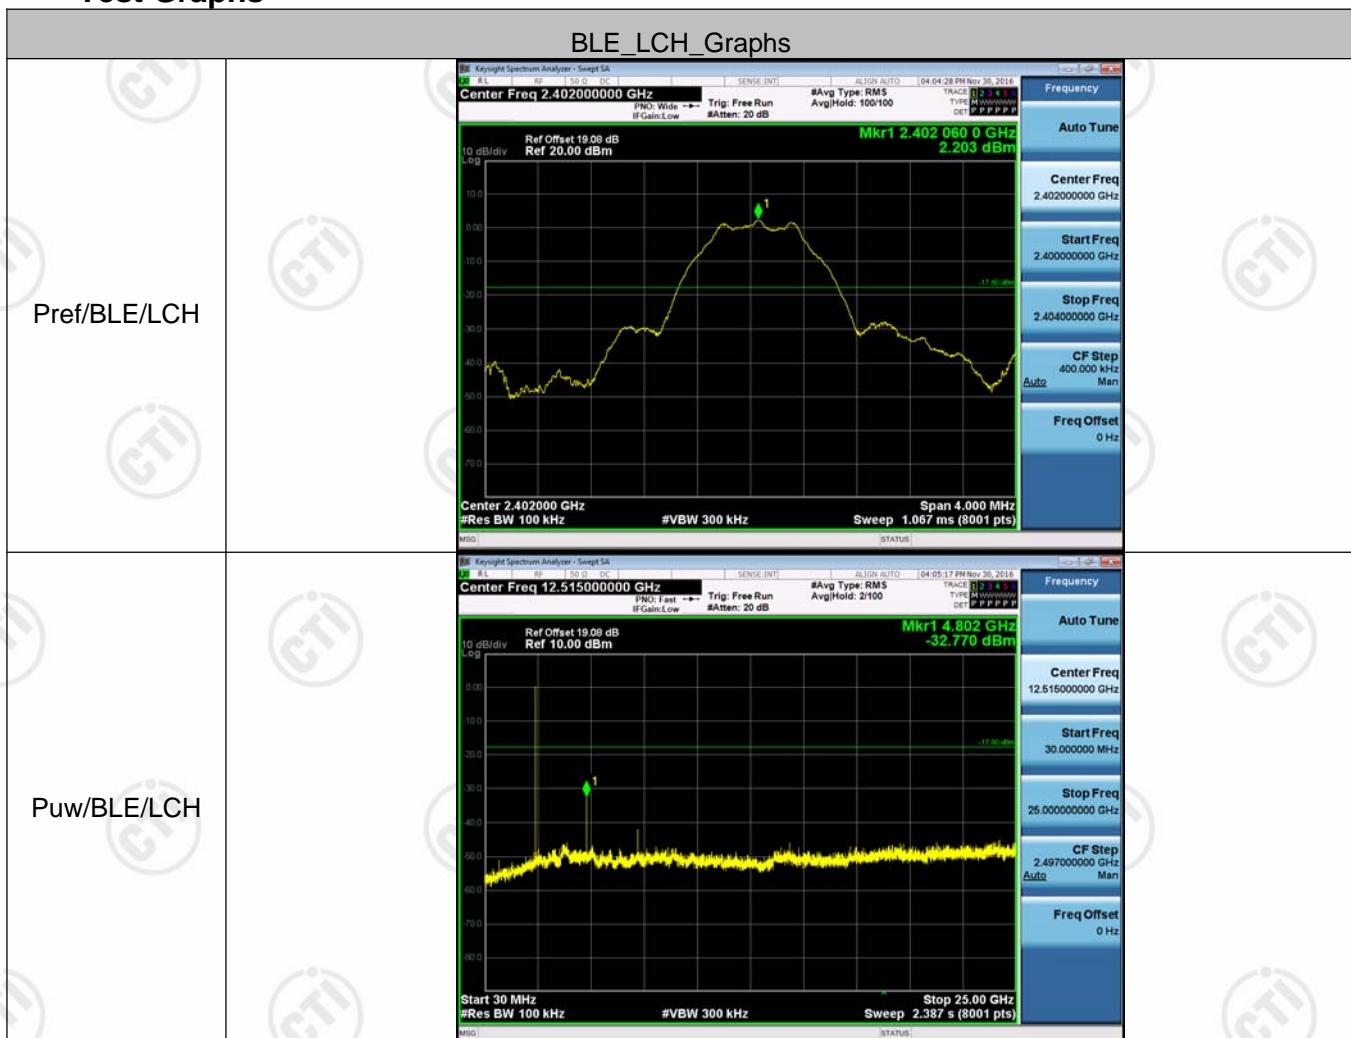

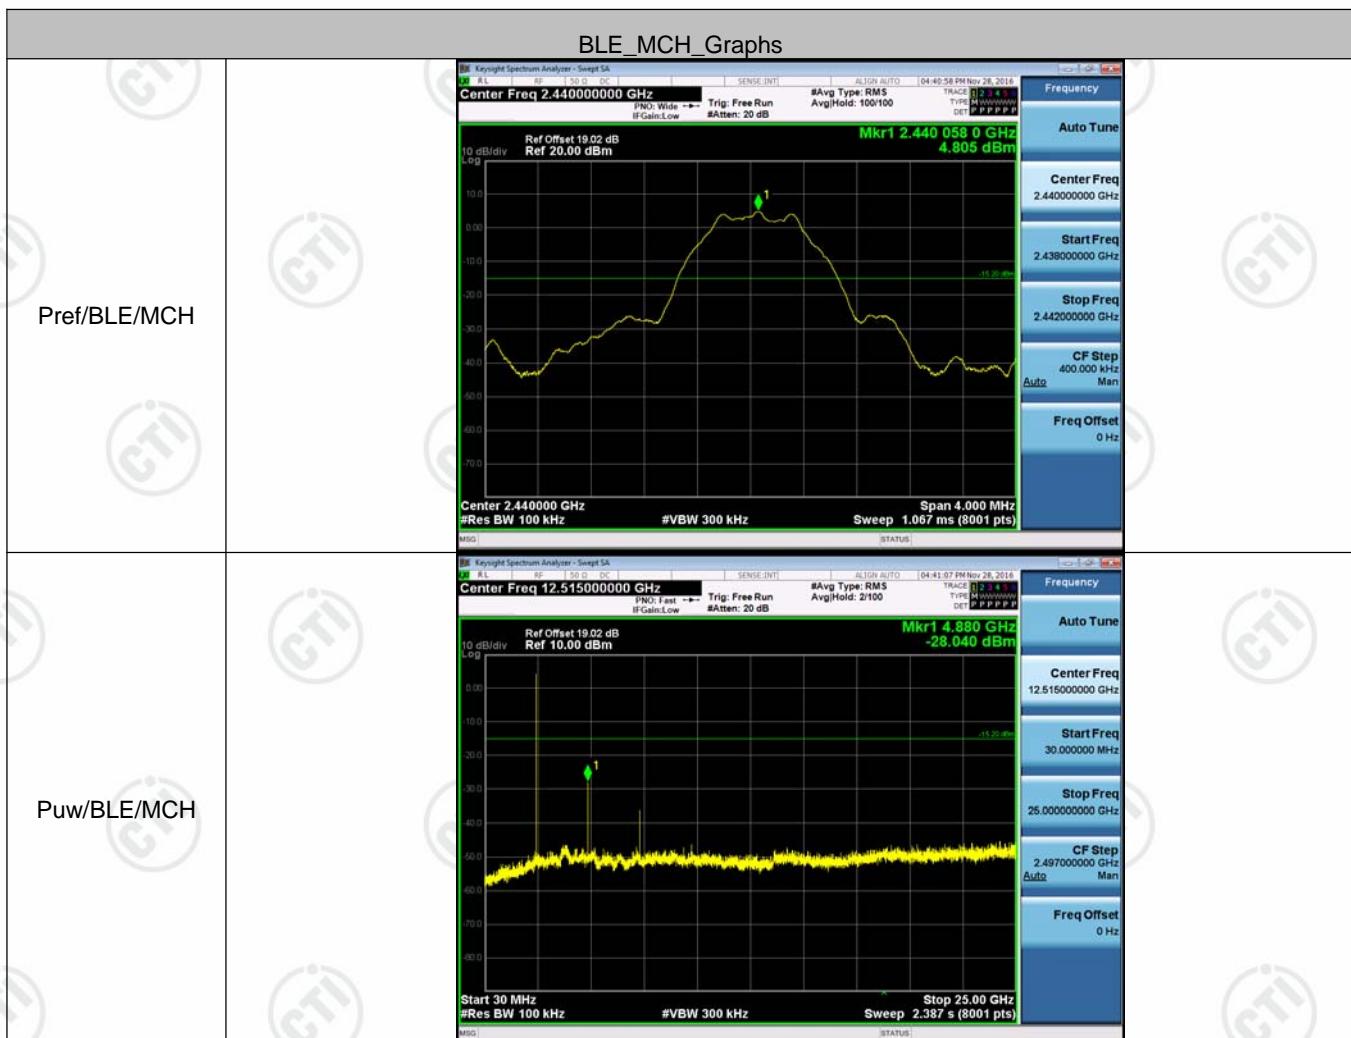

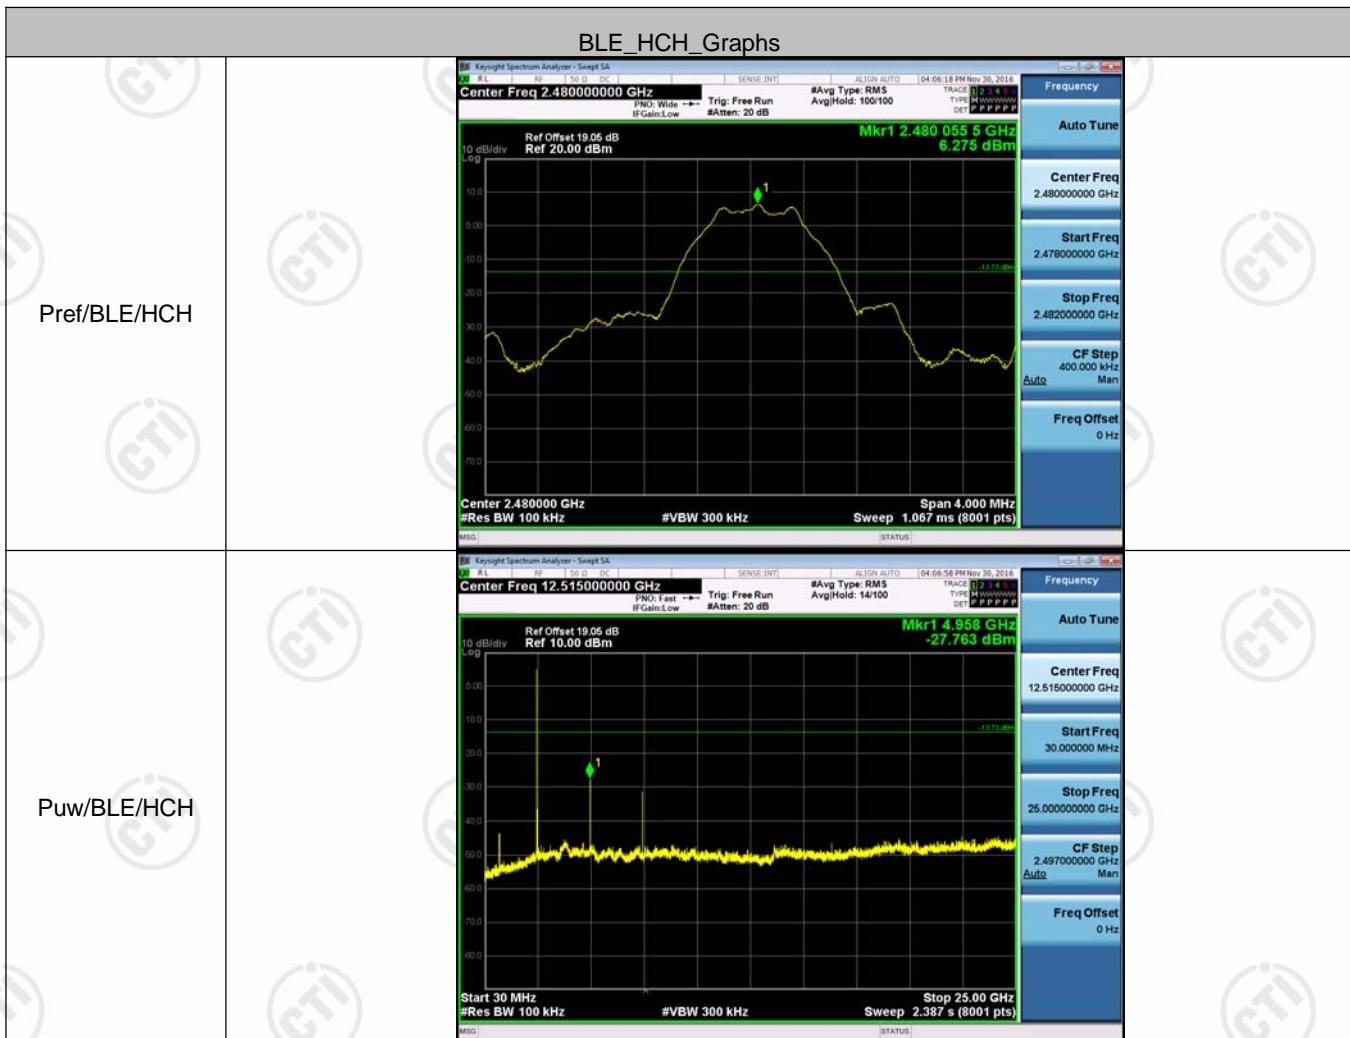


Appendix E): Power Spectral Density

Result Table

Mode	Channel	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE	LCH	-12.893	8	PASS
BLE	MCH	-10.456	8	PASS
BLE	HCH	-8.554	8	PASS

Test Graphs

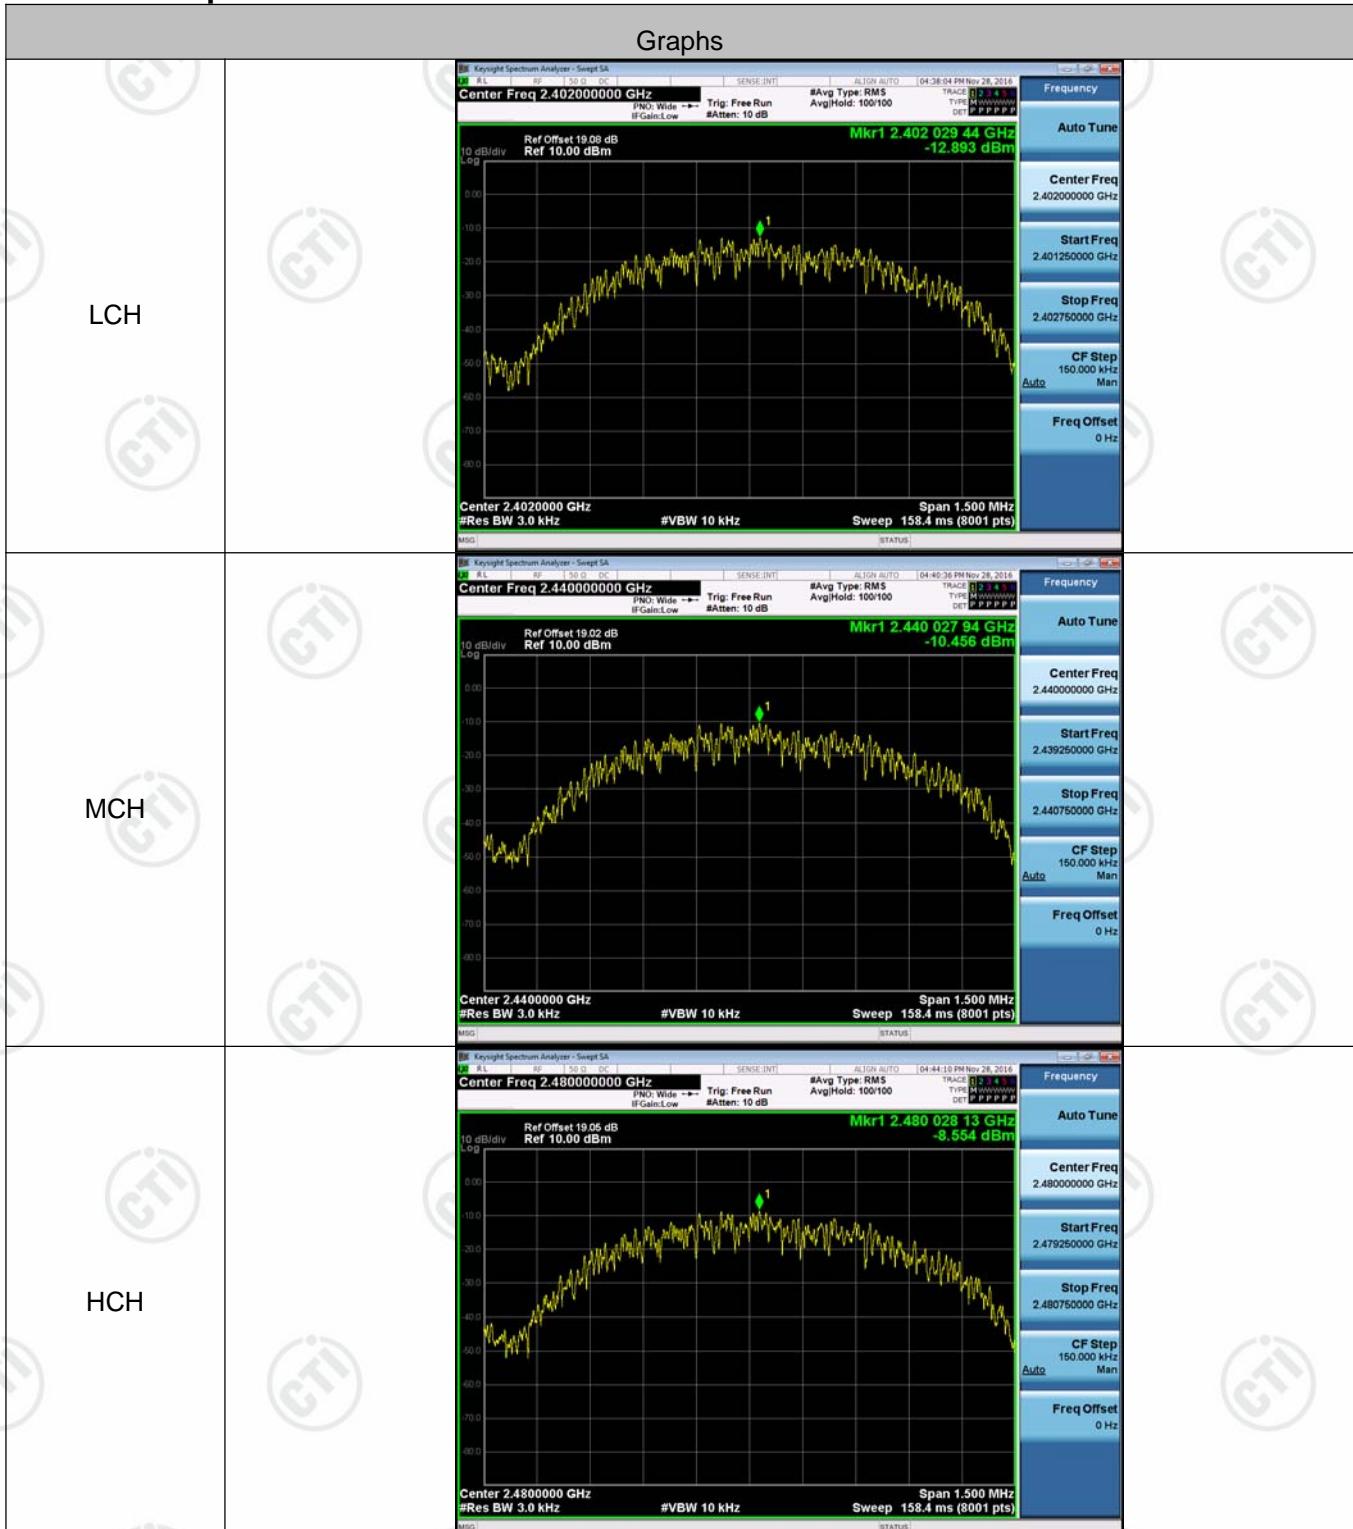

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Inverted-F Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

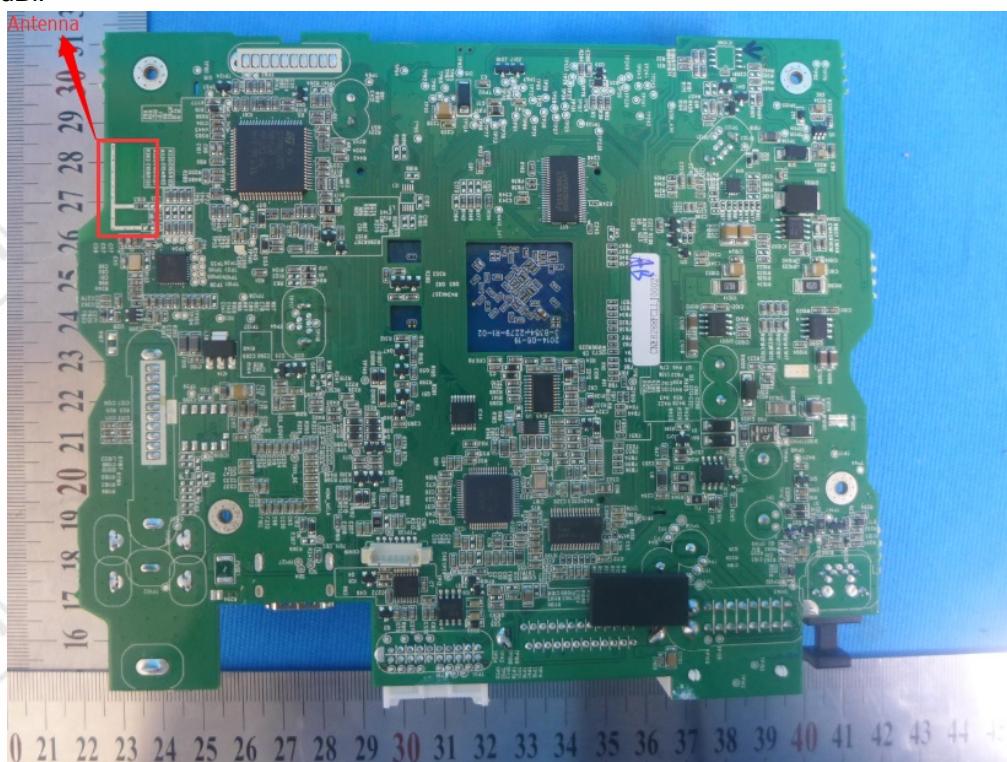


Appendix G): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark																					
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																					
	Above 1GHz	Peak	1MHz	3MHz	Peak																					
		Peak	1MHz	10Hz	Average																					
Test Procedure:		Below 1GHz test procedure as below: <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																								
Limit:		<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBμV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>74.0</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																								
30MHz-88MHz	40.0	Quasi-peak Value																								
88MHz-216MHz	43.5	Quasi-peak Value																								
216MHz-960MHz	46.0	Quasi-peak Value																								
960MHz-1GHz	54.0	Quasi-peak Value																								
Above 1GHz	54.0	Average Value																								
	74.0	Peak Value																								


Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

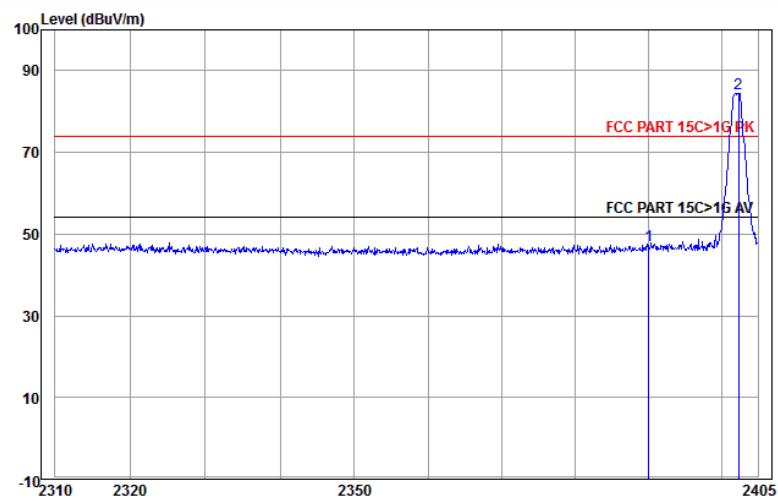


Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level		Limit Line	Over Limit	Over Limit Pol/Phase	Remark
				MHz	dB/m	dB	dB	dBuV	dBuV/m
1	2390.000	32.53	4.28	34.39	44.80	47.22	74.00	-26.78	Horizontal
2 pp	2402.384	32.56	4.31	34.39	81.97	84.45	74.00	10.45	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

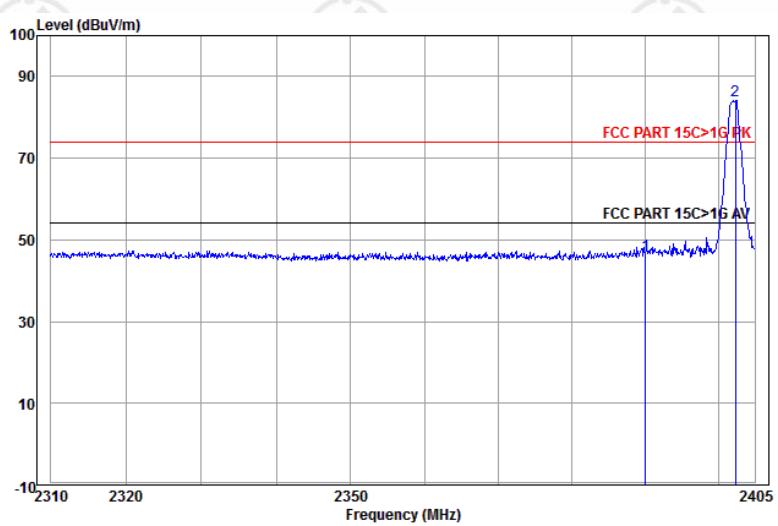


Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level		Limit Line	Over Limit	Over Limit Pol/Phase	Remark
				MHz	dB/m	dB	dB	dBuV	dBuV/m
1	2390.000	32.53	4.28	34.39	43.92	46.34	74.00	-27.66	Vertical
2 pp	2402.384	32.56	4.31	34.39	81.58	84.06	74.00	10.06	Vertical

Worse case mode:	GFSK		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

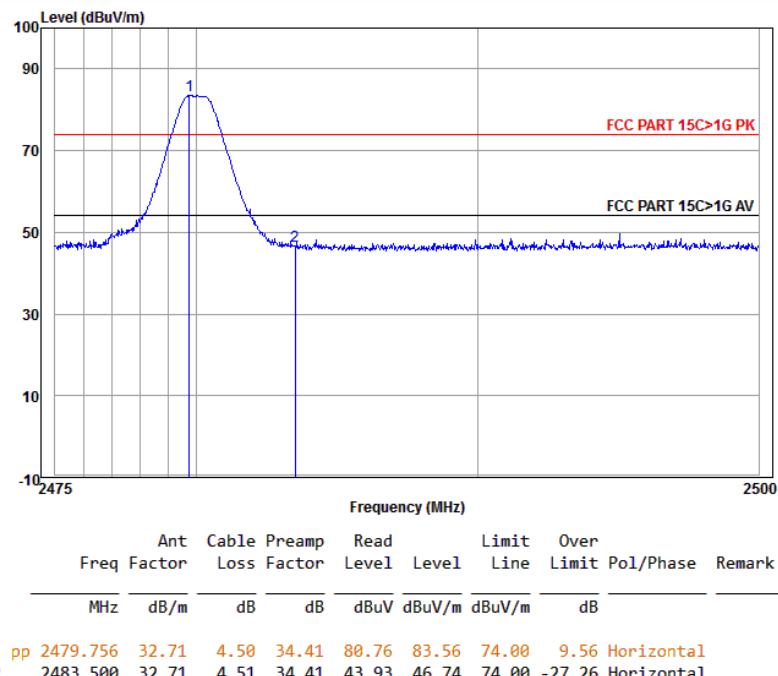

Worse case mode:	GFSK		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

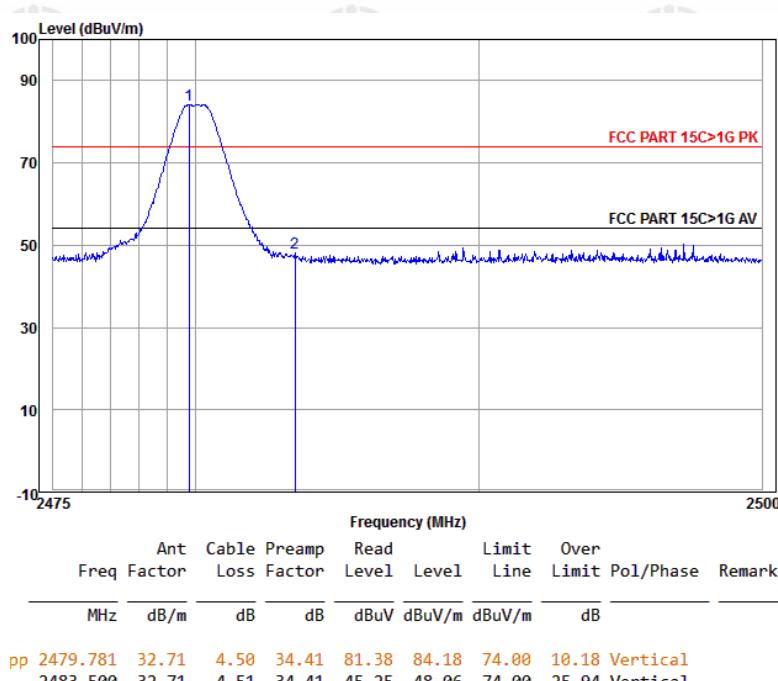

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix H): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak	
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average	
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak	
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average	
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz	Average	

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.


**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	Transmitting	Horizontal

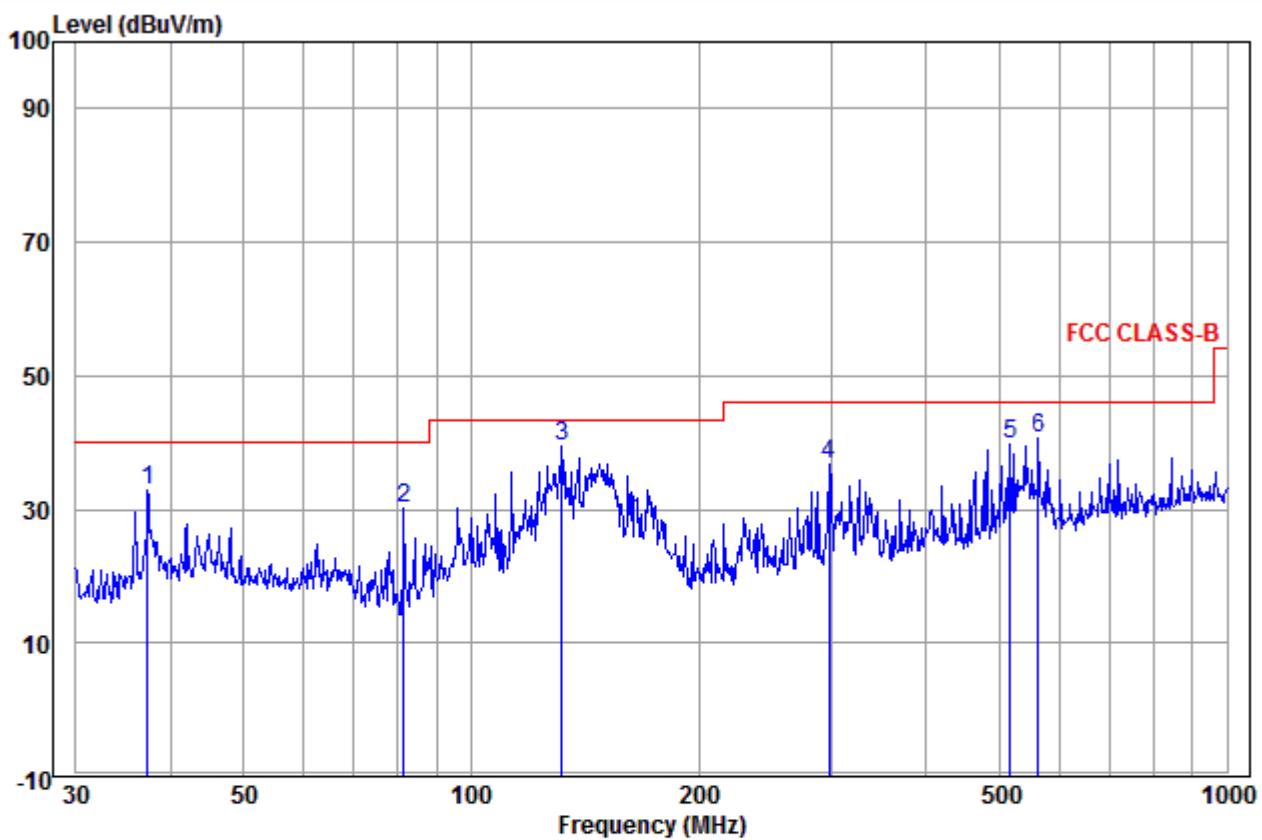

	Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Limit	Pol/Phase	Remark
					Level	Line			
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m			
1	37.285	13.78	0.69	18.33	32.80	40.00	-7.20	Horizontal	
2	81.497	9.01	1.57	19.71	30.29	40.00	-9.71	Horizontal	
3 pp	131.758	10.82	1.58	27.01	39.41	43.50	-4.09	Horizontal	
4	297.224	13.44	2.38	20.83	36.65	46.00	-9.35	Horizontal	
5	517.248	18.47	3.16	17.99	39.62	46.00	-6.38	Horizontal	
6	562.662	18.65	3.29	18.82	40.76	46.00	-5.24	Horizontal	

Test mode:	Transmitting	Vertical
------------	--------------	----------

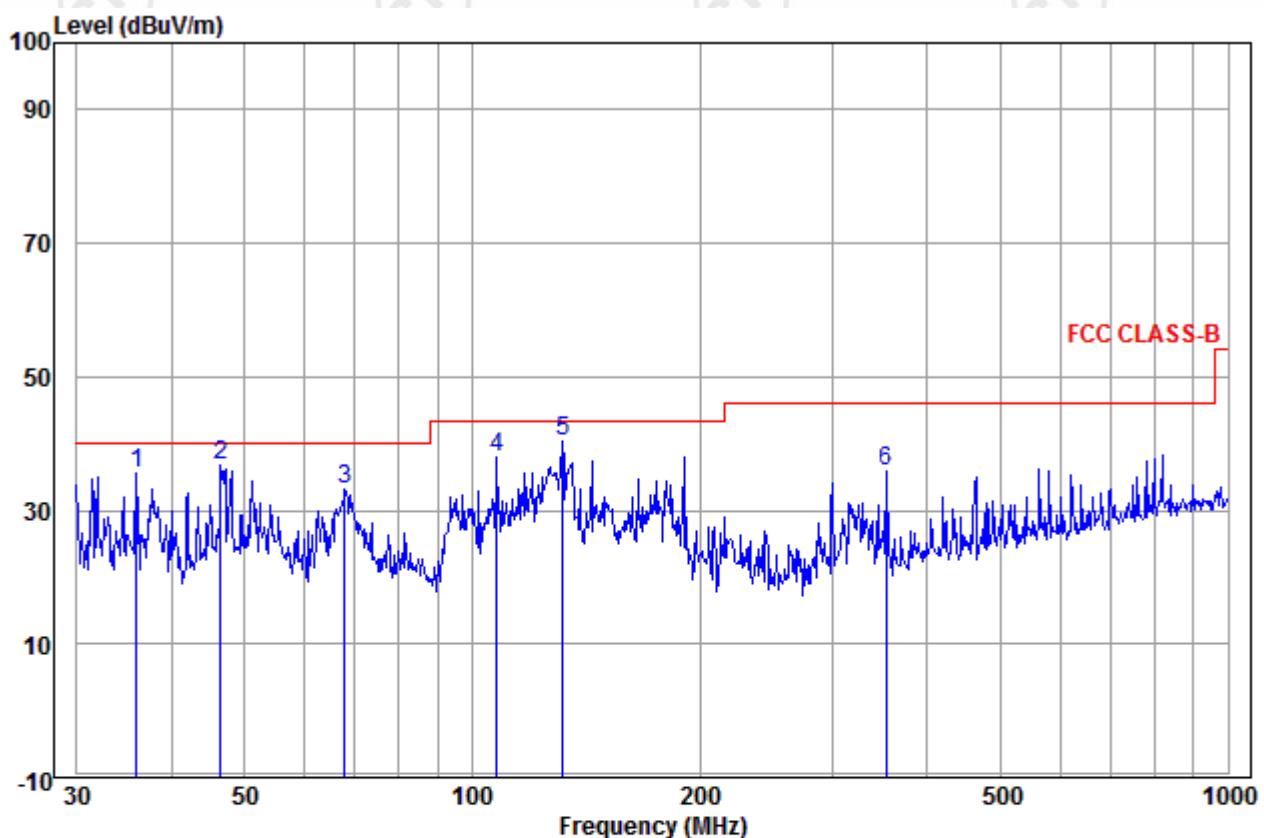

Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Limit	Pol/Phase	Remark
				Level	Line			
36.001	13.58	0.77	21.19	35.54	40.00	-4.46	Vertical	
46.503	14.81	1.12	20.86	36.79	40.00	-3.21	Vertical	
67.913	11.07	1.45	20.79	33.31	40.00	-6.69	Vertical	
107.888	12.54	1.57	23.86	37.97	43.50	-5.53	Vertical	
131.758 pp	10.82	1.58	28.08	40.48	43.50	-3.02	Vertical	
352.943	14.89	2.72	18.18	35.79	46.00	-10.21	Vertical	

Transmitter Emission above 1GHz

Worse case mode:		GFSK		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final Test Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	34.97	47.37	45.13	74.00	-28.87	Pass	H
1495.101	30.86	2.82	34.68	46.58	45.58	74.00	-28.42	Pass	H
1865.735	31.50	3.13	34.39	45.03	45.27	74.00	-28.73	Pass	H
4804.000	34.69	5.11	34.35	43.69	49.14	74.00	-24.86	Pass	H
7206.000	36.42	6.66	34.90	42.42	50.60	74.00	-23.40	Pass	H
9608.000	37.88	7.73	35.08	38.80	49.33	74.00	-24.67	Pass	H
1079.357	29.92	2.37	35.10	48.39	45.58	74.00	-28.42	Pass	V
1360.714	30.59	2.69	34.80	50.08	48.56	74.00	-25.44	Pass	V
1593.340	31.04	2.91	34.60	45.50	44.85	74.00	-29.15	Pass	V
4804.000	34.69	5.11	34.35	44.60	50.05	74.00	-23.95	Pass	V
7206.000	36.42	6.66	34.90	42.22	50.40	74.00	-23.60	Pass	V
9608.000	37.88	7.73	35.08	37.78	48.31	74.00	-25.69	Pass	V

Worse case mode:		GFSK		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final Test Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1079.357	29.92	2.37	35.10	47.51	44.70	74.00	-29.30	Pass	H
1498.912	30.87	2.83	34.67	46.94	45.97	74.00	-28.03	Pass	H
1938.352	31.61	3.19	34.34	44.89	45.35	74.00	-28.65	Pass	H
4880.000	34.85	5.08	34.33	43.04	48.64	74.00	-25.36	Pass	H
7320.000	36.43	6.77	34.90	42.27	50.57	74.00	-23.43	Pass	H
9760.000	38.05	7.60	35.05	37.41	48.01	74.00	-25.99	Pass	H
1079.357	29.92	2.37	35.10	48.47	45.66	74.00	-28.34	Pass	V
1395.796	30.66	2.73	34.77	46.94	45.56	74.00	-28.44	Pass	V
1832.785	31.45	3.11	34.41	45.34	45.49	74.00	-28.51	Pass	V
4880.000	34.85	5.08	34.33	45.13	50.73	74.00	-23.27	Pass	V
7320.000	36.43	6.77	34.90	37.20	45.50	74.00	-28.50	Pass	V
9760.000	38.05	7.60	35.05	37.57	48.17	74.00	-25.83	Pass	V

Worse case mode:		GFSK		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final Test Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1060.295	29.87	2.34	35.12	47.31	44.40	74.00	-29.60	Pass	H
1257.465	30.36	2.58	34.90	45.99	44.03	74.00	-29.97	Pass	H
1593.340	31.04	2.91	34.60	46.86	46.21	74.00	-27.79	Pass	H
4960.000	35.02	5.05	34.31	43.69	49.45	74.00	-24.55	Pass	H
7440.000	36.45	6.88	34.90	39.39	47.82	74.00	-26.18	Pass	H
9920.000	38.22	7.47	35.02	37.77	48.44	74.00	-25.56	Pass	H
1222.743	30.28	2.54	34.94	48.33	46.21	74.00	-27.79	Pass	V
1495.101	30.86	2.82	34.68	49.42	48.42	74.00	-25.58	Pass	V
1993.395	31.69	3.23	34.30	47.45	48.07	74.00	-25.93	Pass	V
4960.000	35.02	5.05	34.31	43.50	49.26	74.00	-24.74	Pass	V
7440.000	36.45	6.88	34.90	39.67	48.10	74.00	-25.90	Pass	V
9920.000	38.22	7.47	35.02	37.25	47.92	74.00	-26.08	Pass	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: NX807

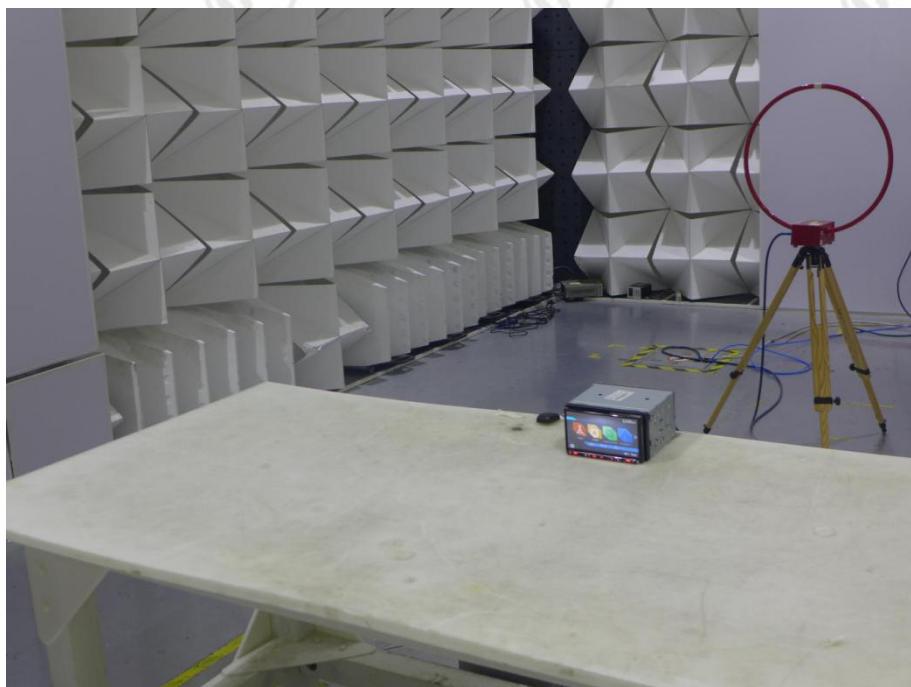

Radiated spurious emission Test Setup-1(Below 30MHz)

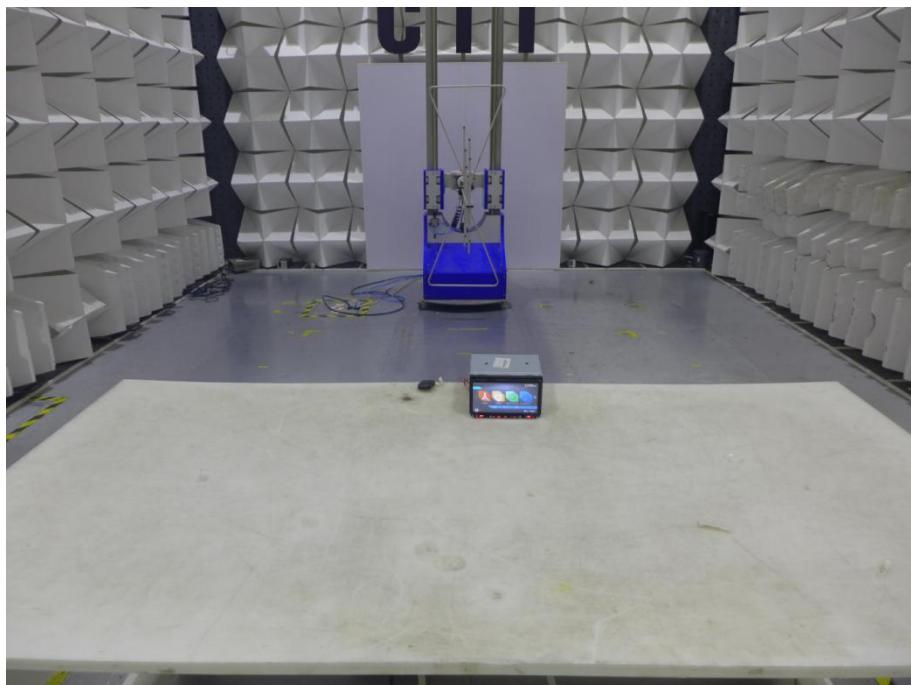

Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

Report No. : EED32I00292903

Page 34 of 34

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32I00292902 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

