

EMC TEST REPORT

FCC 47 CFR Part 15B Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Testing Laboratory: Eurofins Product Service GmbH

Address: Storkower Str. 38c

15526 Reichenwalde

Germany

Accreditation:





A2LA Accredited Testing Laboratory, Certificate No.: 1983.01

FCC Filed Test Laboratory, Reg.-No.: 96970

IC OATS Filing assigned code: 3470A

Applicant's name: Sonetics Corporation

Address: 7340 SW Durham Road

OR 97224 Portland

USA

Test specification:

Standard.....: 47 CFR Part 15 Subpart B

RSS-Gen, Issue 3, 2010-12

ANSI C63.4:2009

Equipment under test (EUT):

Product description Communication Headsets

Model No. APX379

Additional Models none

Hardware version APX379 Rev A (See Additional Information)

Firmware / Software version Revision A (See Additional Information)

FCC-ID: V9N950325200V1 IC: 7895A-95032520

Test result Passed



n			THE ENDINE	CONTRACTOR - CONTRACTOR	
Possi	bie	test	case	verdicts:	

- not applicable to test object N/A

- test object does meet the requirement...... P (Pass)

- test object does not meet the requirement..... F (Fail)

Testing:

Compiled by: Jens Marquardt

Tested by (+ signature).....: Jens Marquardt

Approved by (+ signature): Marcus Klein

Date of issue 2014-12-19

Total number of pages: 30

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:



Product Service

Additional comments:

Page 1 of 2



Subject: Hardware Software/Firmware Declaration

Date: December 01, 2014

Model Number: APX379 DECT & Bluetooth Headset, Revision A

The APX379 Headset shares the same common hardware and software as represented in table A

Table A: Common and Un-common Communication Headset Ear	300 Seri	es Model I	Number
Muff Features	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	х	х	х
Identical Materials and Headset Muff Design	Х	Х	Х
Waterproof Design	Х	Х	Х
Wired Aux Line In	Х	Х	Х
Internal Sound Dosimeter	Х	Х	Х
Stereo Listen Thru	X	Х	Х
Automatic Noise Gate	Х	Х	Х
Passive Noise Reduction	X	Х	Х
Automatic Active Noise Reduction	Х	Х	Х
Voice Prompts	Х	Х	Х
Wireless Bluetooth (Line in)	Х		Х
Wireless DECT (2 way radio)	Х	Х	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing, has the following firmware and hardware installed.

APX379 DECT & Blue	etooth Headset Revision A	(No Headband PM: 950-3257-00 Revision A)				
Item Reference	PartNumber	Description	Qty	BOM Version Revision	Firmware Radio Related?	
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No	
15	490-4016-00	Firmware, APX379, DECT, BT	1	A	Yes	
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes	
25	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A	Yes	
35	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	No	
40	490-4017-00	Firmware, APX379, CONFIGURATION	1	A	No	
5	121-4030-G1	PCBA, APX379, HS, MAIN BOARD	1	G	Hardware	
0	121-4031-J1	PCBA,HS-7X,BATTERYBOARD	1	J	Hardware	

The above is declares accurate and true as of 12 01, 2014. Sincerely,

Michael Heade

Quality Assurance Engineer Regulatory & Product Compliance Engineer

Sonetics Corporation Phone: 800-833-4558 ext. 122 Direct: 503-608-3422

7340 SW Durham Road. Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943



Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-19	Initial Release	



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1	Photos – Equipment external	7
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Input / Output Ports	12
1.6	Operating Modes and Configurations	13
1.7	Test Equipment Used During Testing	14
1.8	Sample emission level calculation	15
2	RESULT SUMMARY	16
3	TEST CONDITIONS AND RESULTS	17
3.1	Test Conditions and Results – Radiated emissions	17
3.2	Test Conditions and Results – AC power line conducted emissions	27



1 Equipment (Test item) Description

Description	Communication Headsets
Model	APX379
Additional Models	none
Serial number	None
Hardware version	APX379 Rev A (See Additional Information)
Software / Firmware version	Revision A (See Additional Information)
FCC-ID	V9N950325200V1
IC	7895A-95032520
Power supply	120 VAC (AC/DC adapter)
AC/DC-Adaptor	Model : YMC06-3U Manufacturer : Ji Ming Input : 110 - 240 VAC 50/60 Hz Output : 12VDC / 0.5A
Manufacturer	Sonetics Corporation 7340 SW Durham Road OR 97224 Portland USA
Highest emission frequency	Fmax [MHz] = 2483.5
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1



1.4 Supporting Equipment Used During Testing

Product Type* Device		Manufacturer	Model No.	Comments				
	None							
*Note: Use the following abbreviations:								
AE:	AE : Auxiliary/Associated Equipment, or							
SIM:	SIM : Simulator (Not Subjected to Test)							
CABL:	Connecting cables							

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	DC Power	DC	-	no	
2					
3					

*Note: Use the following abbreviations:

AC : AC power port
DC : DC power port
N/E : Non electrical

I/O : Signal input or output port
TP : Telecommunication port



1.6 Operating Modes and Configurations

Mode #	Description
1	charging

Configuration #	EUT Configuration
1	EUT connected to AC/DC adapter



1.7 Test Equipment Used During Testing

Measurement Software						
Description	Manufacturer	Name	Version			
EMC Test Software	Dare Instruments	Radimation	2014.1.15			

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2014-01	2015-01

Conducted emissions							
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due		
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11		
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10		



1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer ($dB\mu V$) + A.F. (dB) = Net field strength ($dB\mu V/m$)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of $dB\mu V/m$). The FCC limits are given in units of $\mu V/m$. The following formula is used to convert the units of $\mu V/m$ to $dB\mu V/m$:

Limit $(dB\mu V/m) = 20*log (\mu V/m)$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF = Net Reading : Net reading - FCC limit = Margin 21.5 dB μ V + 26 dB = 47.5 dB μ V/m : 47.5 dB μ V/m - 57.0 dB μ V/m = -9.5 dB



2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen						
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks		
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS			
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS			



3 Test Conditions and Results

3.1 Test Conditions and Results - Radiated emissions

Radiated emission	ons acc. FCC 47 CI	FR 15.109	/ IC RSS-Gen		Verdict: PASS			
Laboratory	Parameters:	Requir	ed prior to the test	During the test				
Ambient T	emperature	15 to 35 °C 23°C						
Relative	Humidity	30 to 60 % 43%			43%			
Test according referenced standards		Reference Method						
		ANSI C63.4						
Sample is tested with respect to the requirements of the equipment class		Equipment class						
		Class B						
Test frequency ran	ge determined from	Highest emission frequency						
highest emission frequency		Fmax [MHz] = 2483.5						
Fully configured sample scanned over the following frequency range		Frequency range						
		30 MHz to 13 GHz						
Operating mode configuration		1						
	Li	imits and	results Class B					
Frequency [MHz]	Quasi-Peak [dBµV/n	n] Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result		
30 – 88	40	PASS	-		-	-		
88 – 216	43.5	PASS	-		-	-		
216 – 960	46	PASS	-		-	-		
960 – 1000	54	PASS	-		-	-		
> 1000	-	-	54	PASS	74	PASS		
Comments:				•		•		



Test Procedure:

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC. The measurement procedure is as follows:

- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379


Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Rohde & Schwarz HK 116, Horizontal

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

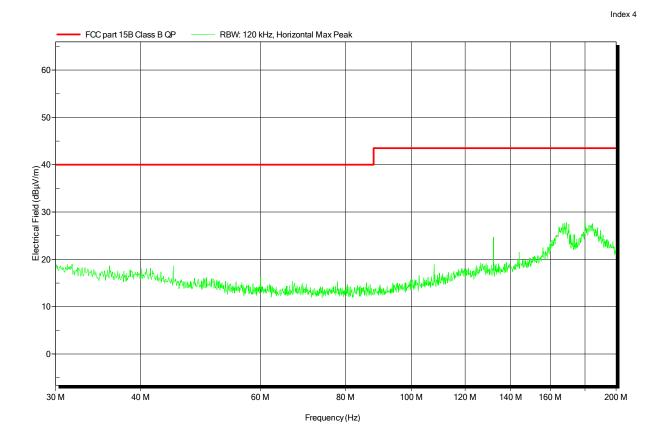



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379


Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Rohde & Schwarz HK 116, Vertical

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

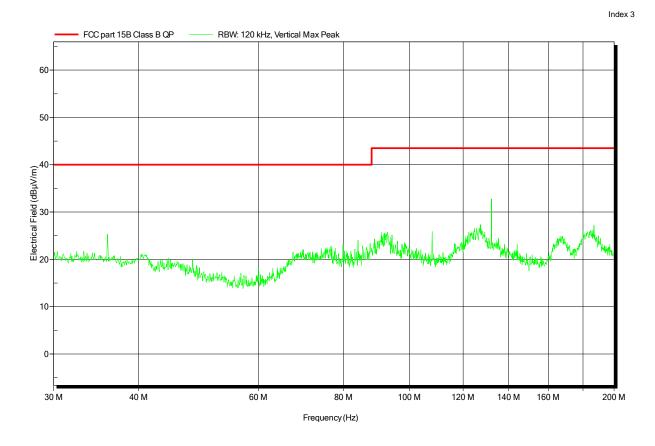



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Rohde & Schwarz HL 223, Horizontal

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

Note:

FCC part 15B Class B QP RBW: 120 kHz, Horizontal Max Peak 60 55 50 45 25 20 15 10 300 M 400 M 500 M 600 M 700 M 800 M 200 M 1 G Frequency (Hz)

Index 13



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Rohde & Schwarz HL 223, Vertical

Measurement distance: 3m Mode: charging

Test Date: 2014-11-20

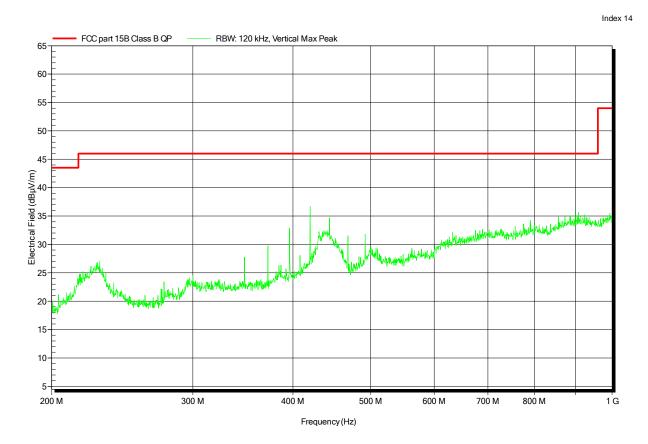



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt


Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

Note:

Index 16

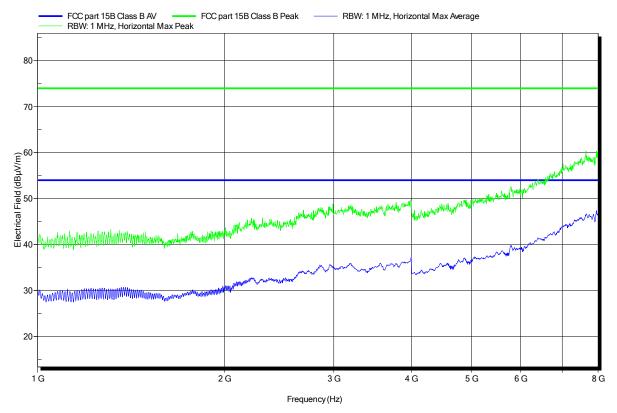



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

Note:

Index 15 FCC part 15B Class B Peak RBW: 1 MHz, Vertical Max Average FCC part 15B Class B AV RBW: 1 MHz, Vertical Max Peak 80 70 Electrical Field (dBµV/m) 20 2 G 4 G 5 G 1 G 3 G 6G Frequency (Hz)



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt


Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

Note:

Index 26

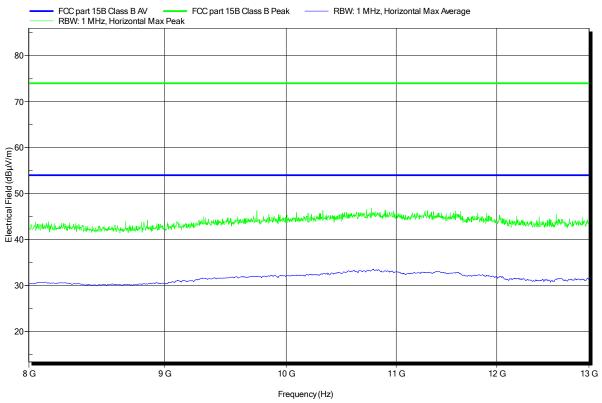



Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20

Note:

Index 25 FCC part 15B Class B Peak - RBW: 1 MHz, Vertical Max Average FCC part 15B Class B AV RBW: 1 MHz, Vertical Max Peak 80 70 Electrical Field (dBµV/m) 30 20 12 G 8 G 9 G 10 G 11 G 13 G Frequency (Hz)



3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen Verdict:						Verdict: PASS	
Laboratory Para	Required prior to the test			Durin	During the test		
Ambient Temperature		15 to 35 °C 23°C			23°C		
Relative Humidity		30 to 60 %			43%		
Test according referenced standards		Reference Method					
		ANSI C63.4					
Fully configured sample scanned over the following frequency range		Frequency range					
		0.15 MHz to 30 MHz					
Sample is tested with respect to the requirements of the equipment class		Equipment class					
		Class B					
Points of Application		Application Interface					
AC Mains		LISN					
Operating mode and configuration		1					
Limits and results Class B							
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Avera	age [dBµV]	Result	
0.15 to 5	66 to 56*		PASS	50	6 to 46*	PASS	
0.5 to 5	56		PASS		46	PASS	
5 to 30	60		PASS	50		PASS	
Comments: * Limit decreases linearly w	vith the logarithm o	f the frequ	ency.			,	



Test Procedure:

- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 30MHz on each current-carrying conductor



EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation EUT Name: Communication Headsets


Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

LISN: ESH2-Z5 N Mode: charging Test Date: 2014-11-18

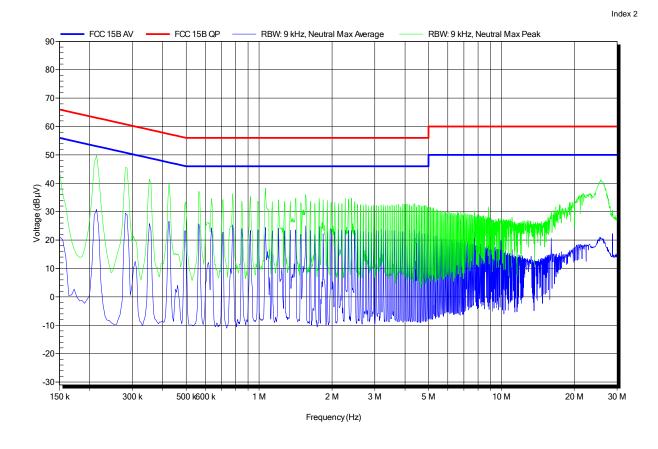



EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation EUT Name: Communication Headsets

Model: APX379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

LISN: ESH2-Z5 L Mode: charging Test Date: 2014-11-18

