

#### **FCC TEST REPORT**

#### FCC 47 CFR Part 15D

#### Unlicensed Personal Communication Service Devices Industry Canada RSS-213

2GHz License-exempt Personal Communications Service Devices (LE-PCS)

**Report Reference No......** G0M-1408-4062-TFC15DFP79-V01

Testing Laboratory ..... Eurofins Product Service GmbH

Address.....: Storkower Str. 38c

15526 Reichenwalde

Germany

Accreditation .....:



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01

FCC Filed Test Laboratory, Reg.-No.: 96970

IC OATS Filing assigned code: 3470A

Applicant's name...... Sonetics Corporation

Address...... 7340 SW Durham Road

OR 97224 Portland

USA

Test specification:

Standard ...... 47 CFR Part 15D

47 CFR Part 15C 47 CFR Part 15B

RSS-213, Issue 2, 2005-12 RSS-Gen, Issue 3, 2010-12

ANSI C63.17:2006 ANSI C63.4:2003

**Equipment under test (EUT):** 

Product description Communication Headsets

Model No. APX379
Additional Model(s) None
Brand Name(s) Sonetics

Hardware version APX379 Rev A (See additional information)

Firmware / Software version Revision A (See additional information)

Test result Passed



### **Product Service**

Possible test case verdicts:	
- neither assessed nor tested	N/N
- required by standard but not appl. to test object N	N/A
- required by standard but not tested N	N/T
- not required by standard for the test object N	V/R
- test object does meet the requirement P	P (Pass)
- test object does not meet the requirement F	F (Fail)
Testing:	
Test Lab Temperature	20 – 23 °C
Test Lab Humidity	32 – 38 %
Date of receipt of test item	2014-09-22
Date (s) of performance of tests	2014-09-22 – 2014-09-24
Compiled by Wilfried Treffke	
Tested by (+ signature) Wilfried Treffke (Responsible for Test)	2. Trefl C. loebe
Approved by (+ signature) Christian Weber	C. Webe
Date of issue 2014-12-18	
Total number of pages 135	

#### General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.



### **Product Service**

#### **Additional comments:**

Page 1 of 2



Subject: Hardware Software/Firmware Declaration

Date: December 01, 2014

Model Number: APX379 DECT & Bluetooth Headset, Revision A

The APX379 Headset shares the same common hardware and software as represented in table A

Table A: Common and Un-common Communication Headset Ear	300 Seri	ies Model I	Number
Muff Features	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	х	х	х
Identical Materials and Headset Muff Design	Х	Х	Х
Waterproof Design	Х	Х	Х
Wired Aux Line In	Х	Х	Х
Internal Sound Dosimeter	Х	Х	Х
Stereo Listen Thru	Х	Х	Х
Automatic Noise Gate	Х	Х	Х
Passive Noise Reduction	Х	Х	Х
Automatic Active Noise Reduction	Х	Х	Х
Voice Prompts	Х	Х	Х
Wireless Bluetooth (Line in)	Х	·	Х
Wireless DECT (2 way radio)	Х	Х	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing, has the following firmware and hardware installed.

APX379 DECT & Blu	LPX379 DECT & Bluetooth Headset Revision A (No Headband PN: 950-3257-00 Revision A)				
Item Reference	Part Number	Description	Otty	BOM Version Revision	Firmware Radio Related?
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No
15	490-4016-00	Firmware, APX379, DECT, BT	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A	Yes
35	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	No
40	490-4017-00	Firmware, APX379, CONFIGURATION	1	A	No
5	121-4030-G1	PCBA, APX379, HS, MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBAHS-7XBATTERY BOARD	1	J	Hardware

The above is declares accurate and true as of 12 01, 2014. Sincerely,

Michael Heade

Michael Reade
Muelity Assurance Engineer
Regulatory & Product Compliance Engineer
Sonetics Corporation
Phone: 800-833-4558 ext. 122

Direct: 503-608-3422
Email: michael.heade@www.sonelicscorp.com

7340 SW Durham Road. Portland, Oregon U.S.A. 97224 \* 503/684-7080 \* Fax 503/620-2943



### **Version History**

Version	Issue Date	Remarks	Revised by
01	2014-12-18	Initial Release	



#### **REPORT INDEX**

1	EQUIPMENT (TEST ITEM) DESCRIPTION	7
1.1	Photos - Equipment external	9
1.2	Photos - Equipment internal	11
1.3	Photos – Test setup	13
1.4	Supporting Equipment Used During Testing	14
1.5	Test Modes:	15
1.6	Test Equipment Used During Testing	16
1.7	Sample emission level calculation	17
2	RESULT SUMMARY	18
3	TEST CONDITIONS AND RESULTS	20
3.1	Test Conditions and Results – Coordination with fixed microwave service	20
3.2	Test Conditions and Results – Cross reference to subpart B	21
3.3	Test Conditions and Results – AC power line conducted emissions	22
3.4	Test Conditions and Results – Antenna requirement	25
3.5	Test Conditions and Results – Digital modulation	26
3.6	Test Conditions and Results – Occupied Bandwidth	27
3.7	Test Conditions and Results – Emission Bandwidth	31
3.8	Test Conditions and Results – Peak transmit power	34
3.9	Test Conditions and Results – Power spectral density	38
3.10	Test Conditions and Results – Carrier frequency stability	41
3.11	Test Conditions and Results – Transmitter in-band unwanted emissions	45
3.12	Test Conditions and Results – Transmitter out-of-band emissions	49
3.13	Test Conditions and Results – Receiver spurious emissions	103
3.14	Test Conditions and Results – Automatic discontinuation of Transmission	112
3.15	Test Conditions and Results – Radiofrequency radiation exposure	113
3.16	Test Conditions and Results – Monitoring threshold	114
3.17	Test Conditions and Results – LIC confirmation	116
3.18	Test Conditions and Results – LIC selection	117
3.19	Test Conditions and Results – Monitoring antenna	118
3.20	Test Conditions and Results – Monitoring time	120
3.21	Test Conditions and Results – Monitoring bandwidth	121
3.22	Test Conditions and Results – Monitoring reaction time	122
3.23	Test Conditions and Results – Acknowledgements	124
	Test Report No.: G0M-1408-4062-TFC15DFP79-V01	

Eurofins Product Service GmbH Storkower Str. 38c, D-15526 Reichenwalde, Germany



3.24	Test Conditions and Results – Maximum transmit period	127
3.25	Test Conditions and Results – Maximum spectral occupancy	128
3.26	Test Conditions and Results – Duplex connections	129
3.27	Test Conditions and Results – Fair access	131
3.28	Test Conditions and Results – Frame period and Jitter	132
3 29	Test Conditions and Results – Frame repetition stability	134



### 1 Equipment (Test item) Description

Description	Communication	n Headsets	
Model	APX379		
Additional Model(s)	None		
Brand Name(s)	Sonetics		
Serial number	None		
Hardware version	APX379 Rev A	(See additional information)	
Software / Firmware version	Revision A (Se	e additional information)	
FCC-ID	V9N950325200	0V1	
IC	7895A-950325	200	
Equipment type	End Product		
Radio type	DECT Portable	Part	
Number of Radios	1 transceivers	is built into the device	
Radio technology	DECT 6.0		
Operating frequency range	1921.536 - 192	28.448MHz	
Assigned frequency band	1920 - 1930MHz		
Number of RF channels	5		
Supported slots	even and odd		
Number of time slots	12 x Tx + 12 x RX = 24		
	F <sub>0</sub>	Ch:0 / 1928.448MHz	
	F <sub>1</sub>	Ch:1 / 1926.720MHz	
Channels	F <sub>2</sub>	Ch:2 / 1924.992MHz	
	F <sub>3</sub>	Ch:3 / 1923.264MHz	
	F <sub>4</sub>	Ch:4 / 1921.536MHz	
	F <sub>LOW</sub>	Ch:4 / 1921.536MHz	
Main test frequencies	F <sub>MID</sub>	Ch:2 / 1924.992MHz	
	F <sub>HIGH</sub>	Ch:0 / 1928.448MHz	
Modulations	GFSK		
Emission designator	F7D		
Nominal emission bandwidth	1.44 MHz		
Channel spacing	1728 kHz		
Spectrum access	Listen before tr	ansmit	
Nominal lower threshold	N/A		
Nominal upper threshold	-60 dBm		
Number of antennas	2 per transceiv	er	



		,	
	Туре	Integrated / printed inverted f Monopole antenna	
Antenna 1	Model	Batt PCBA	
Antenna i	Manufacturer	Sonetics	
	Gain	0 dBi	
	Туре	Integrated / printed inverted f Monopole antenna	
Antenna 2	Model	HS Main	
Antenna 2	Manufacturer	Sonetics	
	Gain	0 dBi	
	Sonetics Corpor	ation	
Manufacturer	7340 SW Durham Road		
	OR 97224 Portland		
	USA		
	V <sub>NOM</sub>	3.7 VDC (lithium battery)	
Power supply	V <sub>MIN</sub>	N/R	
	V <sub>MAX</sub>	N/R	
	Model	YMC06-3U	
AC/DC Adoptor	Vendor	Ji Ming	
AC/DC-Adaptor	Input	110 - 240 VAC 50/60 Hz	
	Output	12VDC Used for charging the 3.7V cell	
	T <sub>NOM</sub>	25°C	
Temperature	T <sub>MIN</sub>	-30°C	
	T <sub>MAX</sub>	70°C	



#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments		
		None				
*Note: Us	*Note: Use the following abbreviations:					
AE:	AE : Auxiliary/Associated Equipment, or					
SIM : Simulator (Not Subjected to Test)						
CABL:	Connecting cables					



#### 1.5 Test Modes:

Mode #		Description
	General conditions:	EUT powered by laboratory power supply. Active connection to companion device.
TDMA	Radio conditions:	Mode = Transmit mode  Modulation = GFSK  Duty cycle = 1/24  Power level = Maximum
General conditions: EUT		EUT powered by laboratory power supply.
Receive	Radio conditions:	Mode = standalone receive Modulation = GFSK
General conditions		Active data connection between EUT and companion device. EUT powered by AC mains via AC/DC-Adaptor.
AC-Powerline	Radio conditions:	Mode = Transmit mode  Modulation = GFSK  Duty cycle = 1/24  Power level = Maximum



#### 1.6 Test Equipment Used During Testing

Measurement Software				
Description	Manufacturer	Name	Version	
EMC Test Software	Dare Instruments	Radimation	2014.1.15	

Conducted					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02
Signal Generator	R&S	SMP 02	EF00165	2013-05	2015-05
Signal Generator	R&S	SMIQ 03B	EF00153	2014-09	2016-09
Signal Generator	R&S	SMIQ 03B	EF00316	2013-06	2015-06
Signal Generator	R&S	SMIQ 03	EF00316	2013-06	2015-06
Signal Generator	R&S	SMT 03	EF00164	2013-04	2015-04
Step Attenuator	R&S	RSP	EF00155	2013-11	2015-11
Frequency Standard	EFRATOM Elektronik GmbH	MFS	EF00308	2013-05	2018-05
Power Meter	R&S	NRVD	EF00139	2014-07	2015-07
Diode Power Sensor	R&S	NRV-Z1	EF00314	2013-06	2015-06

Radiated spurious emissions						
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due	
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-	
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03	
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02	
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03	
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02	

AC powerline conducted emissions						
Description Manufacturer Model Identifier Cal. Date Cal. Due						
AMN R&S ESH2-Z5 EF00182 2014-11 2016-11						
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10	



#### 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

#### Reading:

This is the reading obtained on the spectrum analyzer in  $dB\mu V$ . Any external preamplifiers used are taken into account through internal analyzer settings.

#### A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer ( $dB\mu V$ ) + A.F. (dB) = Net field strength ( $dB\mu V/m$ )

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of  $dB\mu V/m$ ). The FCC limits are given in units of  $\mu V/m$ . The following formula is used to convert the units of  $\mu V/m$  to  $dB\mu V/m$ :

Limit  $(dB\mu V/m) = 20*log (\mu V/m)$ 

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF = Net Reading : Net reading - FCC limit = Margin 21.5 dB $\mu$ V + 26 dB = 47.5 dB $\mu$ V/m : 47.5 dB $\mu$ V/m - 57.0 dB $\mu$ V/m = -9.5 dB



### 2 Result Summary

FCC 47 CFR Part 15D, 15C, IC RSS-213, IC RSS-Gen					
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks	
FCC 15.307	Coordination with fixed microwave service	declaration	N/A		
FCC 15.309(b)	Cross reference to subpart B	declaration	N/A		
FCC 15.315 FCC 15.207 IC RSS-213 6.3 IC RSS-213 4.2 IC RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS		
FCC 15.317 FCC 15.203 IC RSS-213 4.1(e)	Antenna requirements	visual inspection	PASS		
FCC 15.319(b) IC RSS-213 6.1	Digital modulation	ANSI C63.17 6.1.4	PASS		
IC RSS-213 6.4 RSS-Gen 4.6.1	Occupied bandwidth	RSS-Gen 4.6.1	PASS		
FCC 15.323(a)	Emission Bandwidth	ANSI C63.17 6.1.3	PASS		
FCC 15.319(c) FCC 15.319(e) IC RSS-213 6.5 IC RSS-213 4.3.1	Peak transmit power	ANSI C63.17 6.1.2	PASS		
FCC 15.319(d) IC RSS-213 6.6 IC RSS-213 4.3.2	Power spectral density	ANSI C63.17 6.1.5	PASS		
FCC 15.323(f) IC RSS-213 6.2	Carrier frequency stability	ANSI C63.17 6.2.1	PASS		
FCC 15.323(d) IC RSS-213 6.7.2	Transmitter in-band unwanted emissions	ANSI C63.17 6.1.6	PASS		
FCC 15.323(d) IC RSS-213 6.7.1	Transmitter out-of-band emissions	ANSI C63.17 6.1.6 ANSI C63.4	PASS		
IC RSS-213 6.8 IC RSS-Gen 4.10, 6	Receiver spurious emissions	ANSI C63.4	PASS		
FCC 15.319(f) IC RSS-213 4.3.4(a)	Automatic discontinuation of transmission	functional test	PASS		
FCC 15.319(i) RSS-102	Radiofrequency radiation exposure	dedicated report	PASS		
FCC 15.323(c)(2),(5),(9) IC RSS-213 4.3.4(b)(2),(5),(9)	Monitoring threshold + Monitoring threshold relaxation	ANSI C63.17 7.3.1	PASS		
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC confirmation	ANSI C63.17 7.3.4 / 7.3.4	PASS		
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC selection	ANSI C63.17 7.3.2 / 7.3.3	PASS		
FCC 15.323(c)(8) IC RSS-213 4.3.4(b)(8)	Monitoring antenna	ANSI C63.17 4	PASS		



# **Product Service**

FCC 15.323(c)(1) IC RSS-213 4.3.4(b)(1)	Monitoring time	ANSI C63.17 7.3.4	PASS	
FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring bandwidth	ANSI C63.17 7.4	PASS	
FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring reaction time	ANSI C63.17 7.5	PASS	
FCC 15.323(c)(6) IC RSS-213 4.3.4(b)(6)	Access criteria test interval	ANSI C63.17 8.1.1	N/A	Only FP
FCC 15.323(c)(6) IC RSS-213 4.3.4(b)(6)	Access criteria functional test	ANSI C63.17 8.1.2 / 8.1.3	N/A	Only FP
FCC 15.323(c)(4) IC RSS-213 4.3.4(b)(4)	Acknowledgements	ANSI C63.17 8.2.1	PASS	
FCC 15.323(c)(3) IC RSS-213 4.3.4(b)(3)	Maximum transmit period	ANSI C63.17 8.2.2	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	Maximum spectrum occupancy	declaration	PASS	
FCC 15.323(c)(10) IC RSS-213 4.3.4(b)(10)	Duplex connections	ANSI C63.17 8.3	PASS	Only PP
FCC 15.323(c)(11) IC RSS-213 4.3.4(b)(11)	Alternative monitoring interval	ANSI C63.17 8.4	N/A	
FCC 15.323(c)(12) IC RSS-213 4.3.4(b)(12)	Fair access	declaration	PASS	
FCC 15.323(e)(1),(4),(5) IC RSS-213 4.3.4(c)(1),(4),(5)	Frame period and Jitter	ANSI C63.17 6.2.3	PASS	
FCC 15.323(e)(2),(3) IC RSS-213 4.3.4(c)(2),(3)	Frame repetition stability	ANSI C63.17 6.2.2	PASS	
Remarks:		•	•	

Remarks:



#### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results - Coordination with fixed microwave service

Coordination with fixed microwave service acc. to FCC 47 CFR 15D				
EUT requirement	Reference			
rule parts and clause	FCC 15.307			
Test according to	Reference Method			
measurement reference	Customer declaration			
Requirements				

UTAM, Inc. is designated to coordinate and manage the transition of the 1910–1930 MHz band from the Private Operational-Fixed Microwave Service (OFS) operating under part 101 of this chapter to unlicensed PCS operations.

Each application for certification of equipment operating under the provisions of this subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

#### Result

The applicant will provide the affidavit from UTAM Inc. later in the course of certification by TCB or FCB.



#### 3.2 Test Conditions and Results - Cross reference to subpart B

Cross reference to subpart B acc. to FCC 47 CFR 15D Verdict: N/A				
EUT requirement	Reference			
rule parts and clause	FCC 15.309(b)			
Test according to	Reference Method			
measurement reference	Declaration			
	Requirements			
The requirements of subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained elsewhere in this chapter. In particular, a PCS device that includes digital circuitry not directly associated with the radio transmitter also is subject to the requirements for unintentional radiators in subpart B.				
Result				
The test results related to subpart B are given in a dedicated test report				



#### 3.3 Test Conditions and Results – AC power line conducted emissions

Conducted emission	Conducted emissions acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PASS						
EUT requirement			Reference				
rule parts and			FCC 15.315 / FC	C 15.207 / IC RSS-21	3 6.3, 4.2		
Test according re	ferenced		Re	eference Method			
standards				ANSI C63.4			
Fully configured sample	e scanned over		F	requency range			
the following frequency range			0.1	15MHz to 30MHz			
Points of Appli	Points of Application			Application Interface			
AC Mains	S	LISN					
EUT test mo	ode	AC-Powerline					
		Limits	s and results				
Frequency [MHz]	Quasi-Peak [	dBµV]	Result	Average [dBµV]	Result		
0.15 to 5	66 to 56	*	PASS	56 to 46*	PASS		
0.5 to 5	56		PASS	46	PASS		
5 to 30	60	PASS 50			PASS		
Comments: * Limit decreases linearly w	Comments:  * Limit decreases linearly with the logarithm of the frequency.						



#### **Conducted Emissions**

#### EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation EUT Name: Communication Headsets

Model: APX379


Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

LISN: ESH2-Z5 N Mode: charging Test Date: 2014-11-18

Note:

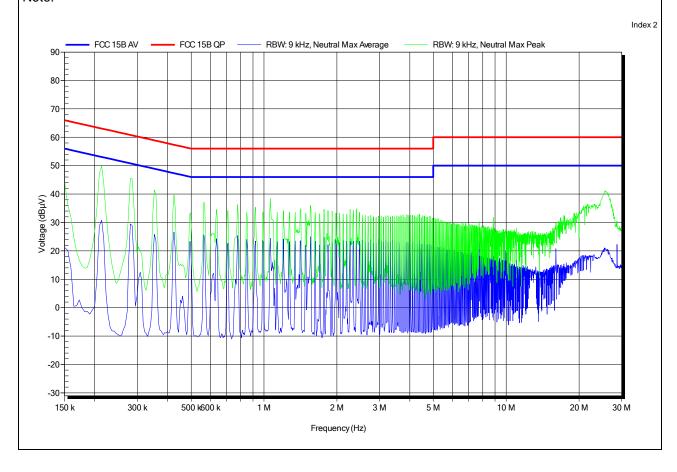



#### **Conducted Emissions**

#### EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation EUT Name: Communication Headsets

Model: APX379


Test Site: Eurofins Product Service GmbH

Operator: Mr. Marquardt

Test Conditions: Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)

LISN: ESH2-Z5 L Mode: charging Test Date: 2014-11-18

Note:

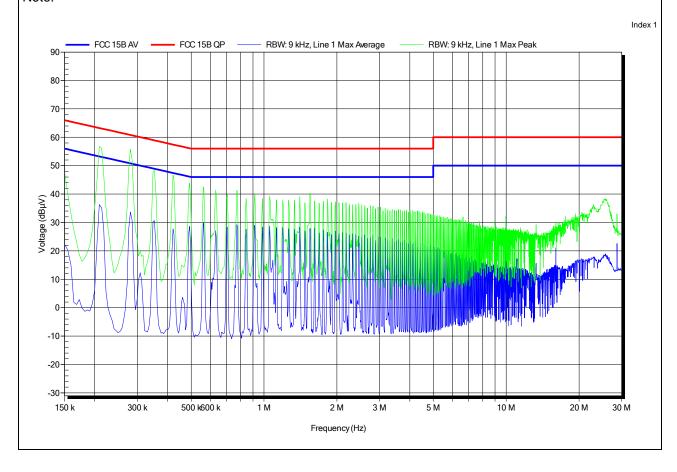



#### 3.4 Test Conditions and Results - Antenna requirement

Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PA					
EUT requirement	Reference				
rule parts and clause	FCC 15.317 / FCC 15.203 / IC RSS-213 4.1(e)				
Test according to	Reference Method				
measurement reference	visual inspection & declaration				
Poquiroments					

#### Requirements

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 3 dBi (3 dB above isotropic gain) shall be added to the measured RF output power before using the power limits

Results						
Antenna No.	Туре	Antenna gain [dBi]	Antenna gain in excess of 3dBi			
1	internal	0	0			
2	internal	0	0			



#### 3.5 Test Conditions and Results - Digital modulation

Antenna requirement acc. to FCC 4	Verdict: PASS			
EUT requirement	Reference			
rule parts and clause	FCC 15.319(b) / IC RSS-213 6.1			
Test according to	Reference Method			
measurement reference	Declaration			
Requirements				
All the constructions are an extended to the first state of the construction of the co				

All transmissions must use only digital modulation techniques.

#### Results


The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device bases on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above.

The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation.

For further details see operational description provided by manufacturer.



#### 3.6 Test Conditions and Results - Occupied Bandwidth

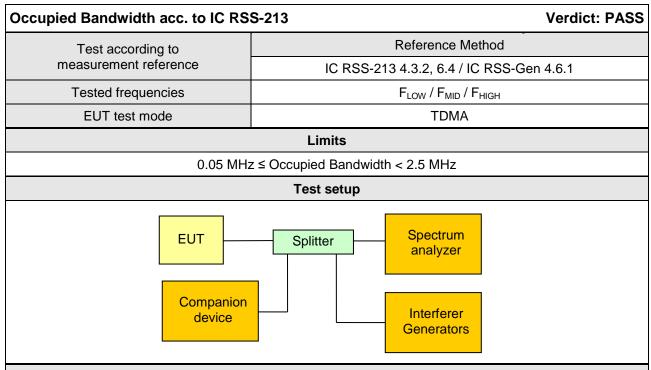

#### **Test procedure**

- 1. EUT is restricted to test channel with the interferes
- 2. Span set to at least twice the emission spectrum
- 3. Resolution bandwidth set to 1% of span
- 4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function

Test results							
Channel	Center frequency [MHz]	Lower edge [MHz]	Upper edge [MHz]	Occupied Bandwidth [MHz]			
F <sub>LOW</sub>	1921.536	1920.912	1922.136	1.224			
F <sub>MID</sub>	1924.992	1924.376	1925.592	1.216			
F <sub>HIGH</sub>	1928.448	1927.824	1929.048	1.224			
Comments:							



#### Occupied Bandwidth - FLOW

#### **RSS Gen**

#### **Occupied Bandwidth**

EUT Communication Headset

Model AXP379

Approval Holder Sonetics Corporation

Temperature / Voltage 24°C / Vnom


Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke

Test Specification Occupied Bandwidth

Comment 1 Channel.: 4

Comment 2 A spectrum analyzer with an integrated 99% power BW function is used

Comment 3 OBW: 1.224 MHz

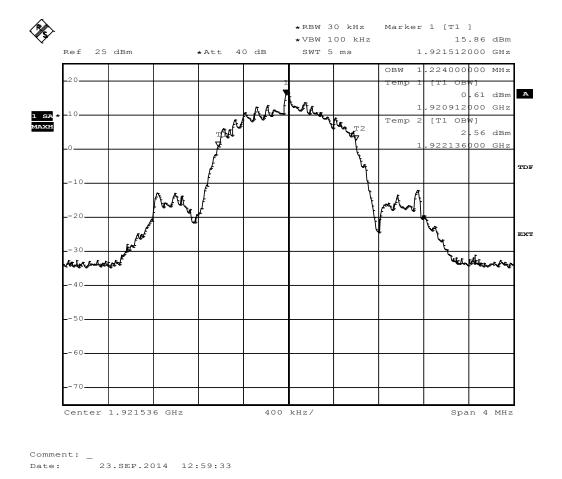



#### Occupied Bandwidth - F<sub>MID</sub>

#### **RSS Gen**

#### **Occupied Bandwidth**

EUT Communication Headset

Model AXP379

Approval Holder Sonetics Corporation

Temperature / Voltage 24°C / Vnom


Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke

Test Specification Occupied Bandwidth

Comment 1 Channel.: 2

Comment 2 A spectrum analyzer with an integrated 99% power BW function is used

Comment 3 OBW: 1.216 MHz

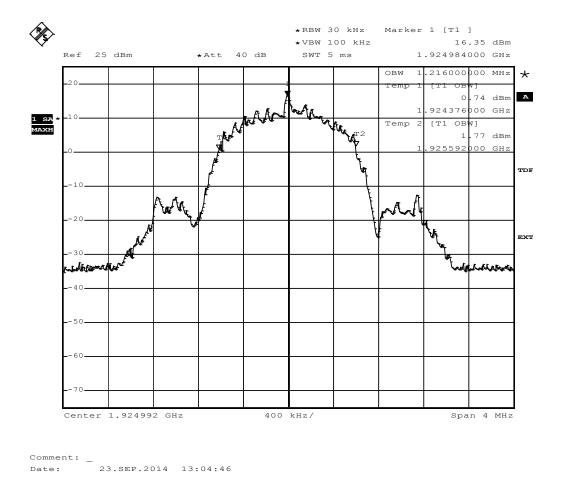



#### Occupied Bandwidth - F<sub>HIGH</sub>

#### **RSS Gen**

#### **Occupied Bandwidth**

EUT Communication Headset

Model AXP379

Approval Holder Sonetics Corporation

Temperature / Voltage 24°C / Vnom


Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke

Test Specification Occupied Bandwidth

Comment 1 Channel.: 0


Comment 2 A spectrum analyzer with an integrated 99% power BW function is used

Comment 3 OBW: 1.224 MHz

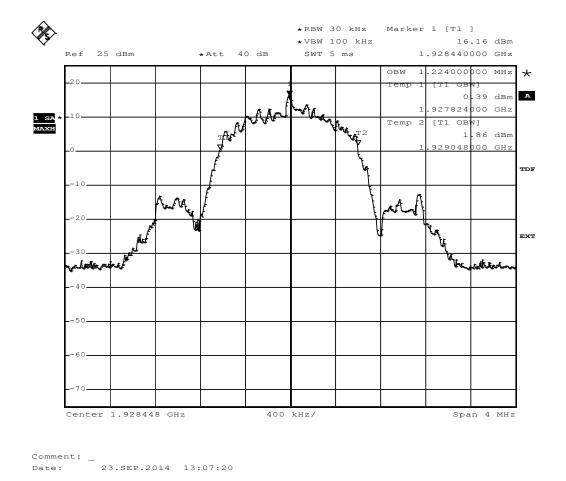



#### 3.7 Test Conditions and Results - Emission Bandwidth

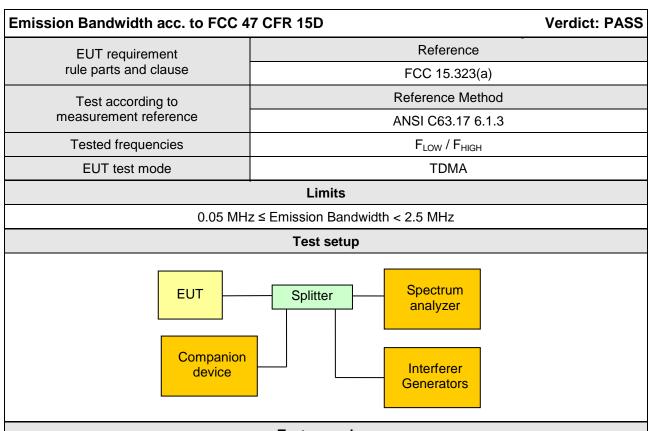

#### Test procedure

- 1. EUT set to test mode
- 2. Span set to at least twice the emission spectrum
- 3. Resolution bandwidth set to 1% of emission bandwidth and detector is set to peak with max hold
- 4. The emission bandwidth is determined by the two -26dB points left and right of the maximum emission level
- (The emission bandwidth is determined by the two -12dB points left and right of the maximum emission level)
- 6. (The emission bandwidth is determined by the two -6dB points left and right of the maximum emission level)

Test result							
Channel	Center frequency [MHz]	Mode	Lower edge [MHz]	Upper edge [MHz]	Bandwidth [MHz]		
$F_{LOW}$	1921.536	-26 dB	1920.826	1922.244	1.418		
F <sub>HIGH</sub>	1928.448	-26 dB	1927.716	1929.156	1.440		
F <sub>LOW</sub>	1921.536	-12 dB	1920.954	1922.118	1.160		
F <sub>HIGH</sub>	1928.448	-12 dB	1927.866	1929.028	1.160		
F <sub>LOW</sub>	1921.536	-6 dB	1921.134	1921.998	0.860		
F <sub>HIGH</sub>	1928.448	-6 dB	1928.024	1928.908	0.880		
Comments:							



#### Emission Bandwidth - FLOW

#### FCC Part 15.303 Emission bandwidth

# Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.42MHz

Max. Permitted Power Limit = 2.5 MHz

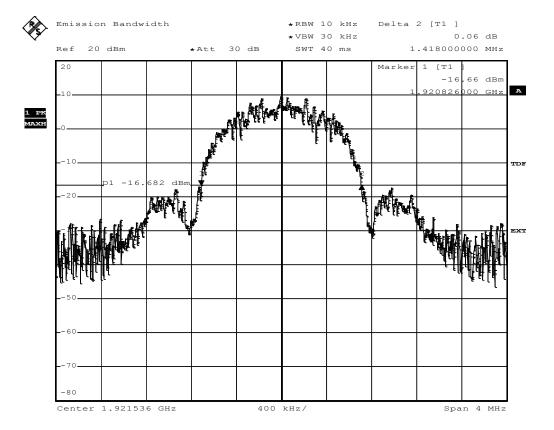

Comment: Ansi C63.17-2006 6.1.3 Date: 23.SEP.2014 11:32:07



#### Emission Bandwidth - FHIGH

#### FCC Part 15.303 Emission bandwidth

# Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.44MHz

Max. Permitted Power Limit = 2.5 MHz

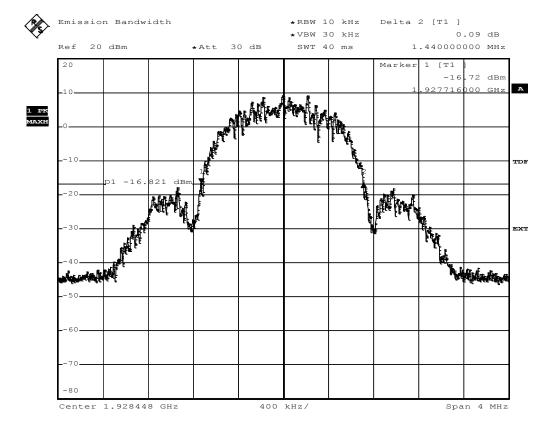

Comment: Ansi C63.17-2006 6.1.3 Date: 23.SEP.2014 12:45:39



#### 3.8 Test Conditions and Results - Peak transmit power


Peak transmit power acc. to FCC 47 CFR 15D / IC RSS-213 Verdi			
EUT requirement rule parts and clause	Reference		
	FCC 15.319(c),(e) / IC RSS-213 4.3.1, 6.5		
Test according to measurement reference	Reference Method		
	ANSI C63.17 6.1.2		
Tested frequencies	F <sub>LOW</sub> / F <sub>HIGH</sub>		
EUT test mode	ode TDMA		
Antenna excess gain	0 dB		

#### Limits

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

$$P_{EUT}[dBm] \le P_{limit}$$
 where  $P_{limit} = \begin{vmatrix} P_{max} - (G_A - g), & \text{when } G_A > 3 \ dBi \\ P_{max}, & G_A < 3 \ dBi \end{vmatrix}$ 

 $P_{max}[dBm] = 5\log(Emission/Occupied~Bandwidth~[Hz]) - 10~dBm$ 

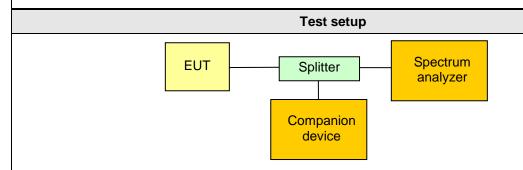

#### Test procedure

- 1. EUT set to test mode
- 2. The RBW is set to be larger than the emission bandwidth and VBW ≥ RBW
- 3. Transmission burst is measured in zero span and peak detector
- 4. The maximum level in the burst is recorded as peak transmit power

Test results - FCC						
Channel	Frequency [MHz]	Peak Power [dbm]	Emission Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F <sub>LOW</sub>	1921.536	20.18	1418000	0	20.76	-0.58
F <sub>HIGH</sub>	1928.448	20.18	1440000	0	20.79	-0.61



Test results - IC						
Channel	Frequency [MHz]	Peak Power [dbm]	Occupied Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F <sub>LOW</sub>	1921.536	20.18	1224000	0	20.43	-0.25
F <sub>HIGH</sub>	1928.448	20.18	1224000	0	20.43	-0.25
Comments:						



#### Peak Power - F<sub>LOW</sub>

#### FCC Part 15.319 Peak Transmit Power limit

# Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Peak transmit power

Supply

Measured Bandwidth 1.418MHz
Max. Permitted Power 20,75 dBm
Measured Power 20,18 dBm
Test result Verdict = PASS

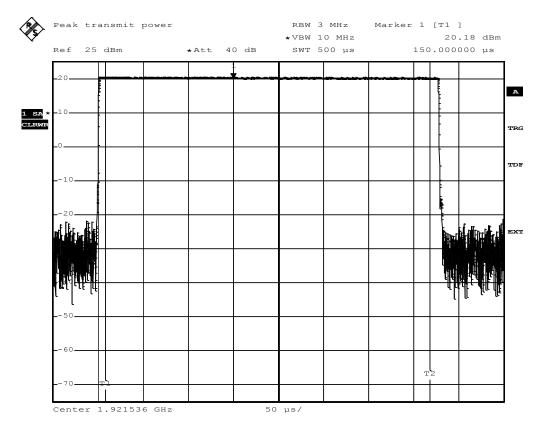

Comment: Ansi C63.17-2006 6.1.2 Date: 23.SEP.2014 11:33:55



#### Peak Power - FHIGH

#### FCC Part 15.319 Peak Transmit Power limit

# Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Peak transmit power

Supply


Measured Bandwidth 1.44MHz
Max. Permitted Power 20,79 dBm
Measured Power 20,18 dBm
Test result Verdict = PASS

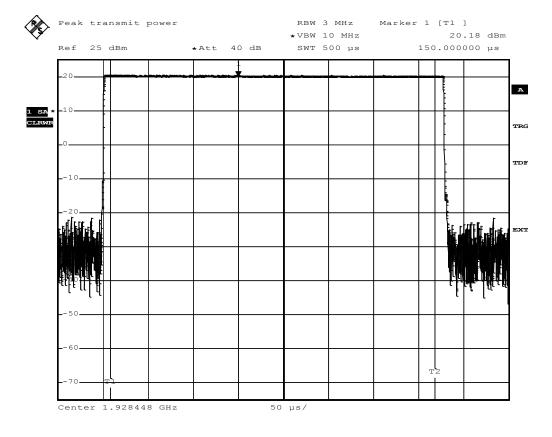

Comment: Ansi C63.17-2006 6.1.2 Date: 23.SEP.2014 12:50:05



#### 3.9 Test Conditions and Results - Power spectral density

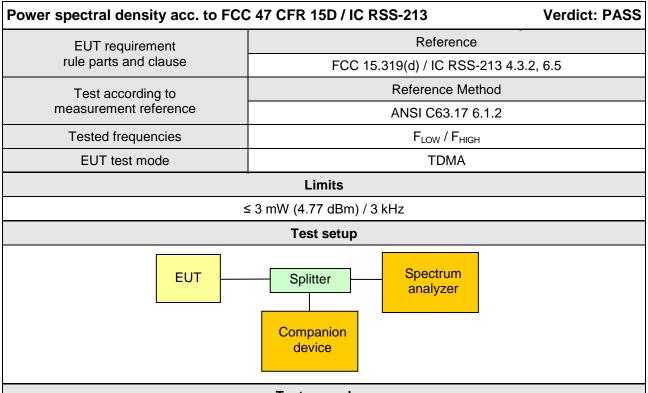

#### **Test procedure**

- 1. EUT set to test mode
- 2. The RBW is set to 3 kHz and VBW  $\geq$  3 x RBW
- 3. The center frequency is set to the maximum of the emission envelope and the span is set to zero
- 4. With sample detector and a minimum of 100 sweeps the -20 dB points below the first peak are determined and the data points between the two -20 dB points are summed and normalized to get the average pulse power in a 3 kHz bandwidth

Test results					
Channel	Frequency [MHz]	Peak Density [dbm/3kHz]	Limit [dBm/3kHz]	Margin [dB]	
F <sub>LOW</sub>	1921.532	-4.9207	4.77	-09.69	
F <sub>HIGH</sub>	1928.444	-1.0525	4.77	-05.82	
Comments:					



#### Power Spectral Density - F<sub>LOW</sub>

### FCC Part 15.319 Power spectral density

### Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Power spectral density
Peak Frequency in MHz 1921,532000 MHz
Total pulse energy in mW 0,000122 mW
Wideband pulse duration in ms
PSD in mW 0,3221 mW
PSD in dBm -4,9207 dBm

Pass criteria: PSD is less than 3mW Verdict = PASS

23.SEP.2014 11:36:43

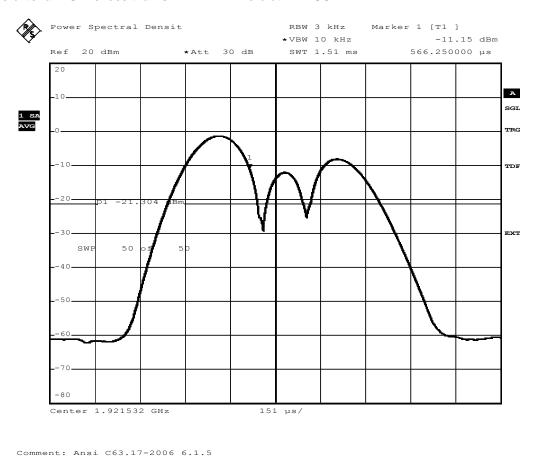



#### Power Spectral Density - F<sub>HIGH</sub>

### FCC Part 15.319 Power spectral density

# Testprocedure ANSI 63.17 UPCS

EUT Communications Headset


Model AXP379

Applicant Sonetics Corporation

Temperature 23°C


Test Site / Operator Eurofins Product Service GmbH

Test Specification Power spectral density
Peak Frequency in MHz 1928,444000 MHz
Total pulse energy in mW 0,000296 mW
Wideband pulse duration in ms
PSD in mW 0,7848 mW
PSD in dBm -1,0525 dBm

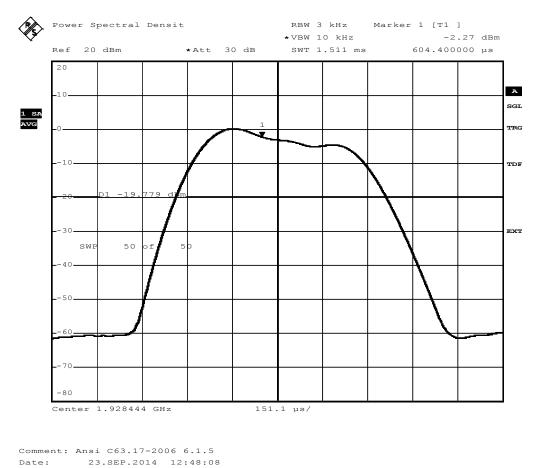



#### 3.10 Test Conditions and Results - Carrier frequency stability

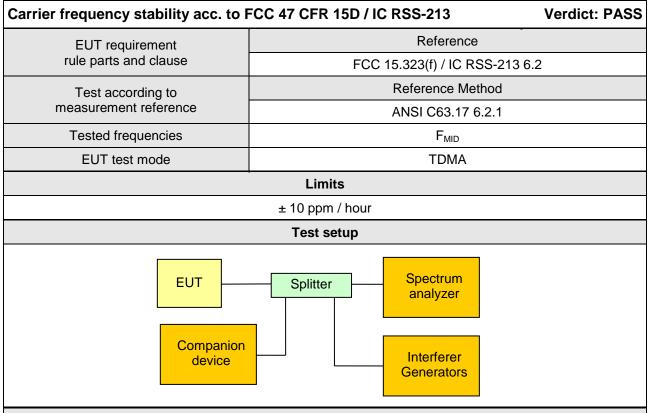

#### **Test procedure**

- 1. With interferer signals the EUT is forced to center channel and communication to companion device is established.
- 2. The demodulated carrier EUT signal is captured over time
- 3. The mean frequency is determined under all supply voltage and temperature conditions

Test results					
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Margin [ppm]	
3.7 VDC	25°C	0.00 (reference)	±10.0	N/A	
3.7 VDC	-30°C	0.36	±10.0	-09.64	
3.7 VDC	70°C	0.21	±10.0	-09.79	
Comments:	_		_	_	



#### Carrier stability - Frequency stability - T<sub>NOM</sub> V<sub>NOM</sub>

### FCC Part 15.323 Carrier Frequency Stability

#### **Testprocedure ANSI 63.17**

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation

Temperature 25 °C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Frequency stability


Power supply Vnom

Frequency of carrier 1924,98743 MHz Measured mean 1924,98743 MHz Stability (supply temp) 0,00 ppm Result Verdict = PASS

Stability over time fmax: 0,56 ppm fmin: 0,63 ppm

Result Verdict = PASS

#### **Histogram**

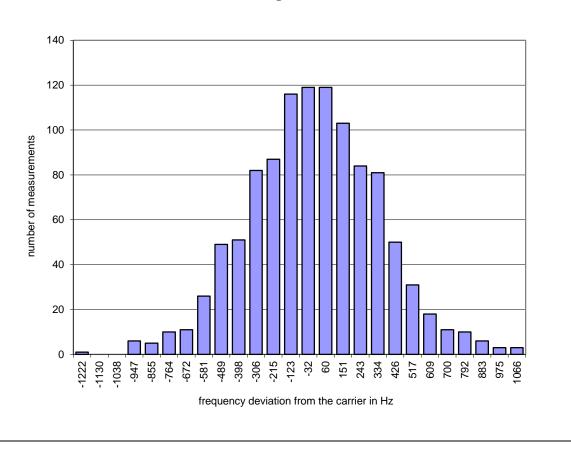



#### Carrier stability - Frequency stability - T<sub>MIN</sub> V<sub>NOM</sub>

#### FCC Part 15.323 Carrier Frequency Stability

#### **Testprocedure ANSI 63.17**

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation

Temperature -30 °C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Frequency stability

Power supply Vnom


Frequency of carrier 1924,987440 MHz Measured mean 1924,986745 MHz

 $\begin{array}{ll} \text{Stability (supply temp)} & 0.36 \text{ ppm} \\ \text{Result} & \text{Verdict} = PASS \end{array}$ 

Stability over time fmax: 0,79 ppm fmin: 1,30 ppm

Result Verdict = PASS

#### **Histogram**

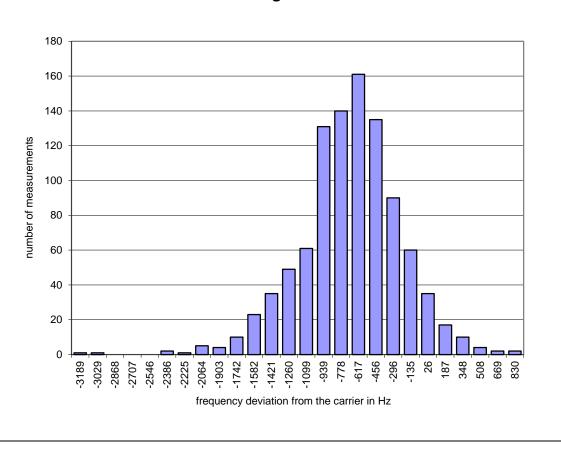



#### Carrier stability - Frequency stability - T<sub>MAX</sub> V<sub>NOM</sub>

#### FCC Part 15.323 Carrier Frequency Stability

#### **Testprocedure ANSI 63.17**

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation

Temperature 70 °C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Frequency stability

Power supply Vnom


Frequency of carrier 1924,987430 MHz Measured mean 1924,987027 MHz

 $\begin{array}{ll} \text{Stability (supply temp)} & 0.21 \text{ ppm} \\ \text{Result} & \text{Verdict} = \text{PASS} \end{array}$ 

Stability over time fmax: 0,71 ppm fmin: 0,73 ppm

Result Verdict = PASS

#### **Histogram**

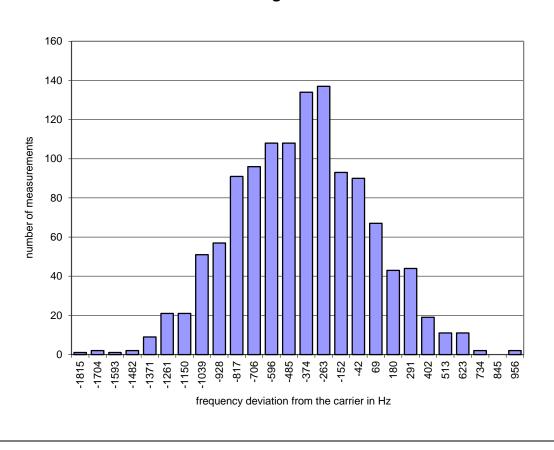




#### 3.11 Test Conditions and Results - Transmitter in-band unwanted emissions

#### Transmitter in-band unwanted emissions acc. to **Verdict: PASS** FCC 47 CFR 15D / IC RSS-213 Reference Method Test according referenced standards FCC 15.323(d) / IC RSS-213 6.7.2 Reference Method Test according to measurement reference ANSI C63.17 6.1.6 Tested frequencies F<sub>LOW</sub> / F<sub>HIGH</sub> 1920 - 1930 MHz Tested frequency range Limits Frequency range [MHz] Detector Limit [dBc] 1920 MHz to $(F_c - 3B)$ Peak -60 $(F_c - 3B)$ to $(F_c - 2B)$ Peak -50 $(F_c - 2B)$ to $(F_c - 1B)$ Peak -30 $(F_c + 1B)$ to $(F_c + 2B)$ Peak -30 $(F_c + 2B)$ to $(F_c + 3B)$ Peak -50 $(F_c + 3B)$ to 1930 MHz Peak -60

B = emission / occupied bandwidth of selected channel

F<sub>c</sub> = Center frequency of selected channel

## Test setup

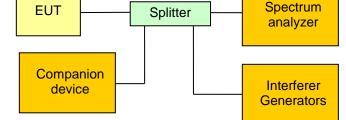

#### **Test procedure**

- 1. With interferer signal the EUT is forced to the test channel and a communication session is established between the EUT and the companion device
- 2. The RBW of the spectrum analyzer is set to 1% of the emission bandwidth and the VBW is set to 3 times the RBW
- 3. With peak detector and max hold the emission spectrum is recorded over the corresponding frequency range

Test results							
Channel	Frequency [MHz]	Verdict					
F <sub>LOW</sub>	1921.536	PASS					
F <sub>HIGH</sub>	1928.448	PASS					
Comments:	•						



#### Transmitter in-band unwanted emissions - F<sub>LOW</sub>

#### FCC Part 15.323 In-band unwanted emission

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset


Model AXP379

Applicant Sonetics Corporation

Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH
Test Specification In-band unwanted emission

1.418MHz

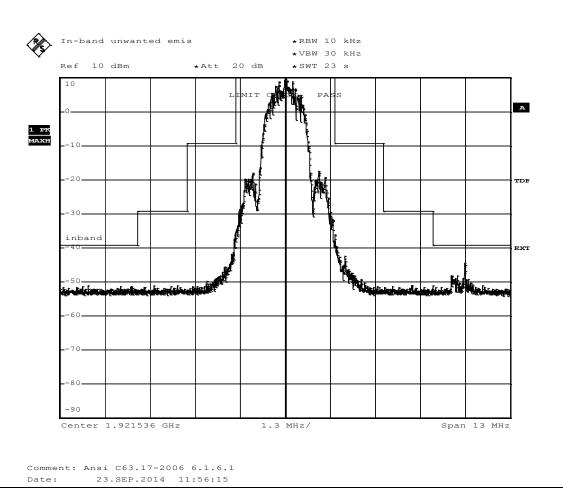



#### Transmitter in-band unwanted emissions - F<sub>HIGH</sub>

#### FCC Part 15.323 In-band unwanted emission

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset


Model AXP379

Applicant Sonetics Corporation

Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH Test Specification In-band unwanted emission

1.418MHz

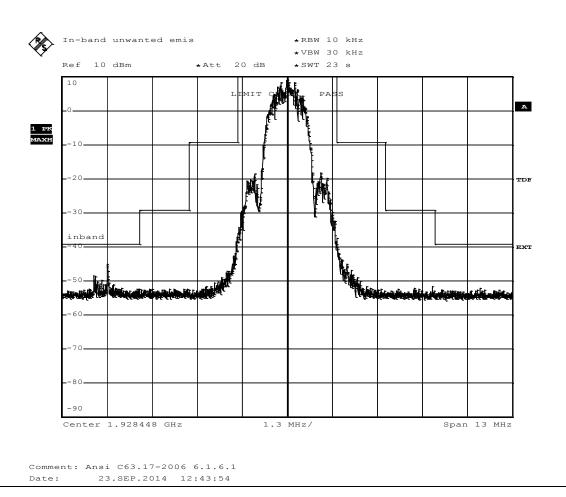




#### 3.12 Test Conditions and Results - Transmitter out-of-band emissions

Transmitter out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PASS						
Test according ref	erenced	Reference Method				
standards		FCC 15.323(d) / IC RSS-213 6.7.1				
Test accordin	g to	Reference Method				
measurement ref	ference	ANSI C63.17 6.1.6				
Tested frequer	ncies	F <sub>LOW</sub> / F <sub>HIGH</sub>				
Tested frequency	y range	30 MHz – 10 <sup>th</sup> Harmonic				
Test option	า	Tested according to option a), b) and d) in C63.17 6.1.6.2				
		Limits				
Frequency range [MHz]	Detector	Limit	Limit Distance [m]			
30 – 88	Quasi-Peak	100 μV/m (40 dBμV/m)	3			
88 – 216	Quasi-Peak	150 μV/m (43.5 dBμV/m)	3			
216 – 960	Quasi-Peak	200 μV/m (46 dBμV/m)	3			
960 – 1000	Quasi-Peak	500 μV/m (54 dBμV/m)	3			
1000 – 1917.5	Average	500 μV/m (54 dBμV/m)	3			
1917.5 – 1918.75	Peak	-39.5 dBm *	N/A			
1918.75 – 1920	Peak	-29.5 dBm *	N/A			
1930 – 1931.25	Peak	-29.5 dBm * N/A				
1931.25 – 1932.5	Peak	-39.5 dBm * N/A				
1932.5 - 20000	Average	500 μV/m (54 dBμV/m) 3				

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

<sup>\*</sup> Measurement is performed with conducted measurement setup

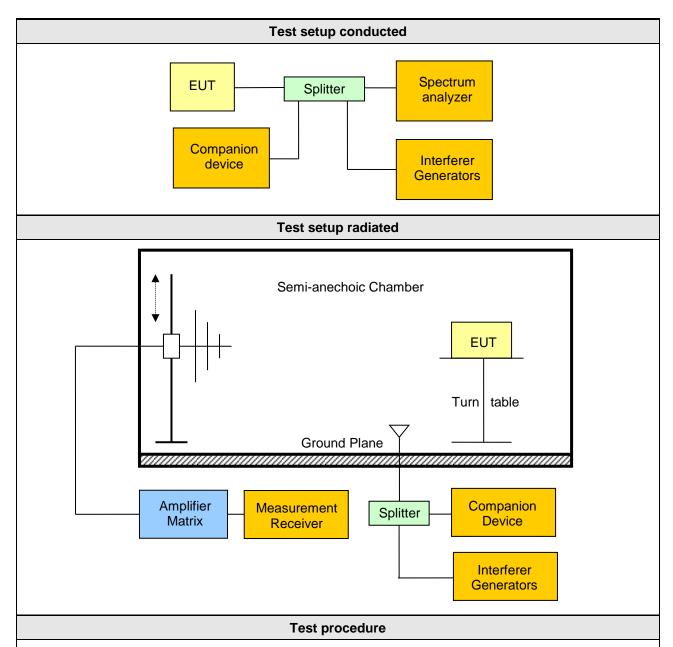

- 1. EUT is forced to test channel with the interferer generators and a communication session is established with the companion device
- 2. Span it set according to measurement range
- Resolution bandwidth , video bandwidth and detector are set according to ANSI C63.17 or ANSI C63.4
- 4. All significant spurious emissions and the band edge emission envelops are recorded



# **Product Service**

Test results – antenna 0									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbµV/m]	Det.	Pol.	Limit [dbµV/m]	Limit dist. [m]*	Margin [dB]
F <sub>HIGH</sub>	1928.448	TX	1932.5	57.80	pk	hor	73.90	3	-16.10
F <sub>HIGH</sub>	1928.448	TX	1932.5	33.17	avg	hor	53.90	3	-20.73
F <sub>HIGH</sub>	1928.448	TX	1932.5	61.73	pk	ver	73.90	3	-12.17
F <sub>HIGH</sub>	1928.448	TX	1932.5	29.98	avg	ver	53.90	3	-23.92
F <sub>HIGH</sub>	1928.448	TX	3855.3	48.43	pk	hor	73.90	3	-25.47
F <sub>HIGH</sub>	1928.448	TX	3855.3	50.52	pk	ver	73.90	3	-23.38
F <sub>HIGH</sub>	1928.448	TX	5784	54.97	pk	hor	73.90	3	-18.93
F <sub>HIGH</sub>	1928.448	TX	5784	51.01	pk	ver	73.90	3	-22.89
F <sub>HIGH</sub>	1928.448	TX	5786	26.29	avg	hor	53.90	3	-27.61
F <sub>LOW</sub>	1921.536	TX	1917.2	56.84	pk	hor	73.90	3	-17.06
F <sub>LOW</sub>	1921.536	TX	1917.2	26.90	avg	hor	53.90	3	-27.00
F <sub>LOW</sub>	1921.536	TX	1917.4	63.27	pk	ver	73.90	3	-10.63
F <sub>LOW</sub>	1921.536	TX	1917.4	30.91	avg	ver	53.90	3	-22.99
F <sub>LOW</sub>	1921.536	TX	3838.7	49.27	pk	hor	73.90	3	-24.63
F <sub>LOW</sub>	1921.536	TX	3842.9	51.68	pk	ver	73.90	3	-22.22
F <sub>LOW</sub>	1921.536	TX	5760	51.45	pk	hor	73.90	3	-22.45
F <sub>LOW</sub>	1921.536	TX	5760	49.87	pk	ver	73.90	3	-24.03
Comments: * Physical distance between EUT and measurement antenna.									



Test results – antenna 1									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbµV/m]	Det.	Pol.	Limit [dbµV/m]	Limit dist. [m]*	Margin [dB]
F <sub>HIGH</sub>	1928.448	TX	1932.5	62.94	pk	hor	73.90	3	-10.96
F <sub>HIGH</sub>	1928.448	TX	1932.5	37.95	avg	hor	53.90	3	-15.95
F <sub>HIGH</sub>	1928.448	TX	1932.5	60.88	pk	ver	73.90	3	-13.02
F <sub>HIGH</sub>	1928.448	TX	1932.5	27.19	avg	ver	53.90	3	-26.71
F <sub>HIGH</sub>	1928.448	TX	3855.3	48.23	pk	hor	73.90	3	-25.67
F <sub>HIGH</sub>	1928.448	TX	3855.3	49.29	pk	ver	73.90	3	-24.61
F <sub>HIGH</sub>	1928.448	TX	5784	46.01	pk	hor	73.90	3	-27.89
F <sub>HIGH</sub>	1928.448	TX	5784	45.18	pk	ver	73.90	3	-28.72
F <sub>LOW</sub>	1921.536	TX	1917.2	64.14	pk	hor	73.90	3	-09.76
F <sub>LOW</sub>	1921.536	TX	1917.2	30.88	avg	hor	53.90	3	-23.02
F <sub>LOW</sub>	1921.536	TX	1917.2	63.92	pk	ver	73.90	3	-09.98
F <sub>LOW</sub>	1921.536	TX	1917.2	30.70	avg	ver	53.90	3	-23.20
F <sub>LOW</sub>	1921.536	TX	3838.7	49.52	pk	ver	73.90	3	-24.38
F <sub>LOW</sub>	1921.536	TX	5760	46.74	pk	hor	73.90	3	-27.16
F <sub>LOW</sub>	1921.536	TX	5760	47.74	pk	ver	73.90	3	-26.16
Comments: * Physical distance between EUT and measurement antenna.									

Comments: \* Physical distance between EUT and measurement antenna.



#### Transmitter out-of-band emissions – Band edge $F_{\text{Low}}$

#### FCC Part 15.323 Out-of-band emission

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Out-of-band emission

measurement on the lowest carrier

Carrier=1921.536MHz

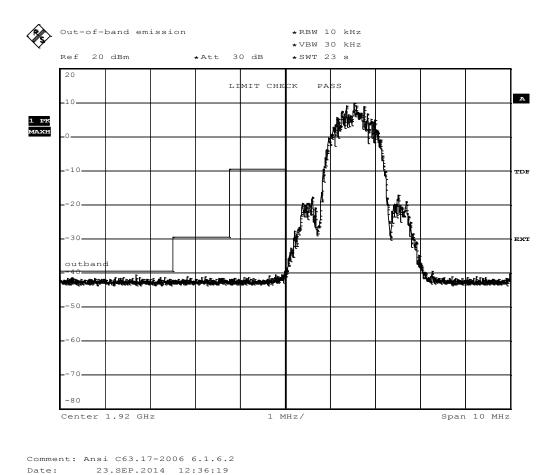



#### Transmitter out-of-band emissions – Band edge F<sub>HIGH</sub>

#### FCC Part 15.323 Out-of-band emission

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation


Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Out-of-band emission

measurement on the highest carrier

Carrier=1928.448MHz

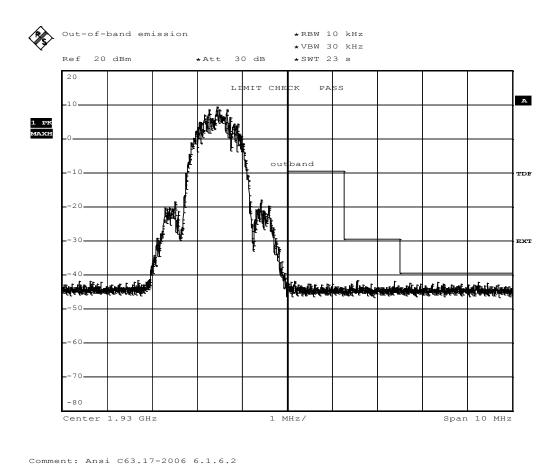

Date: 23.SEP.2014 12:41:12



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HK 116, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29 Note: worst case

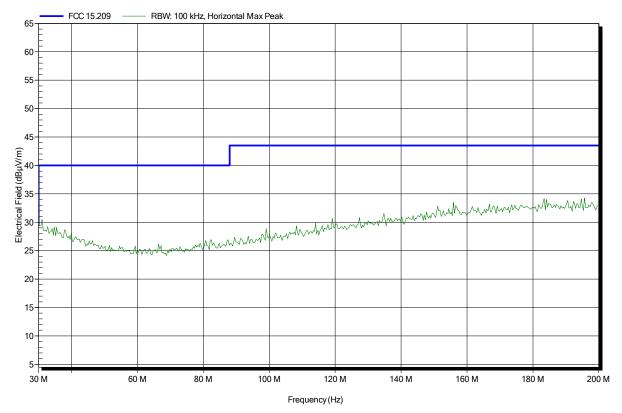



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Rohde & Schwarz HK 116, Vertical

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29 Note: worst case

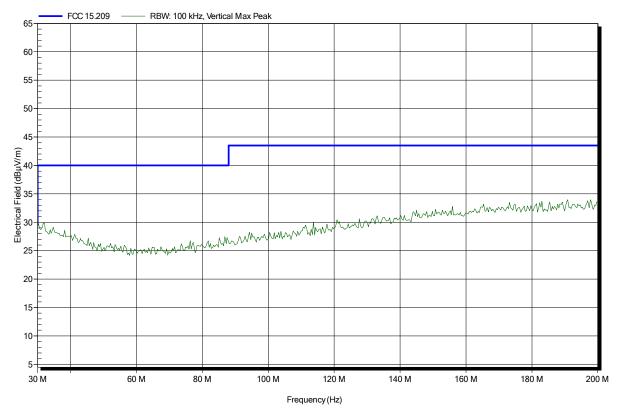



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HL 223, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29 Note: worst case

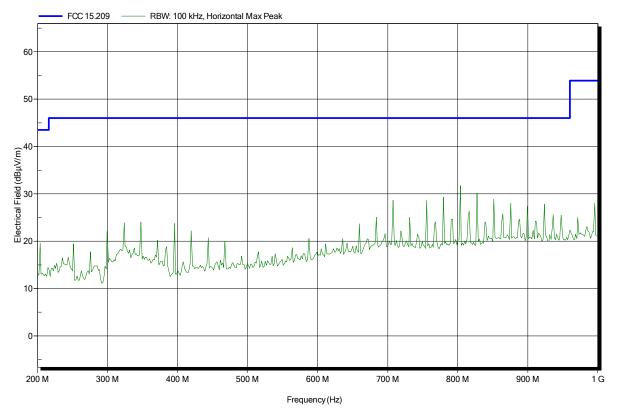



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Rohde & Schwarz HL 223, Vertical

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29 Note: worst case

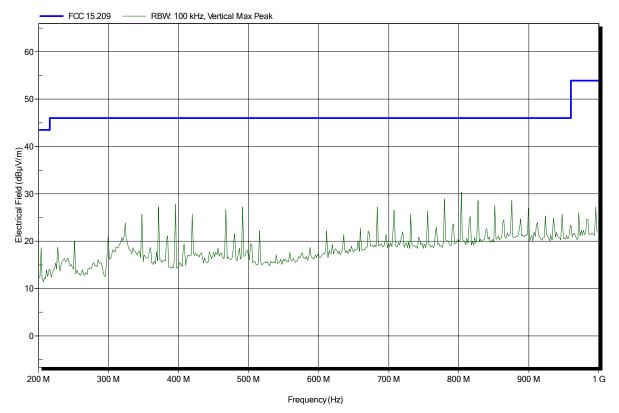



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29
Note: with notch-filter

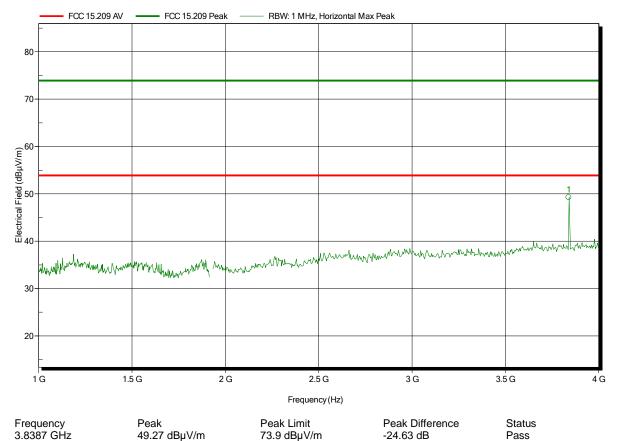



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

**Test Conditions:** Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Schwarzbeck BBHA 9120D, Vertical Antenna:

Measurement distance:

TX; channel 4; antenna 0 Mode:

Test Date: 2014-09-29 with notch-filter Note:

Index 12

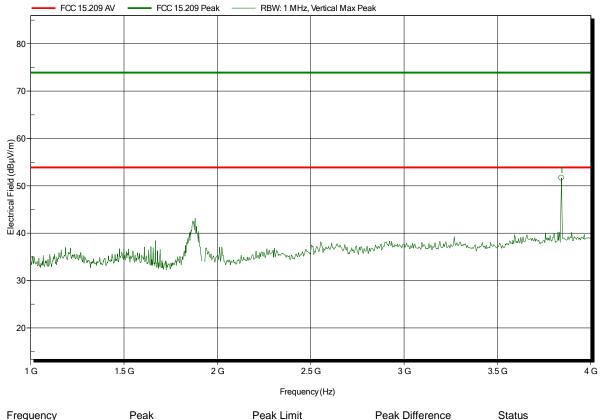

3.8429 GHz

Peak 51.68 dBµV/m Peak Limit 73.9 dBµV/m Peak Difference -22.22 dB

Status Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

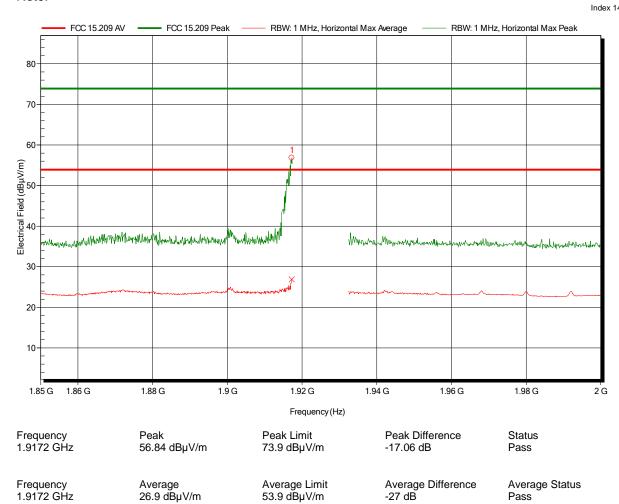



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

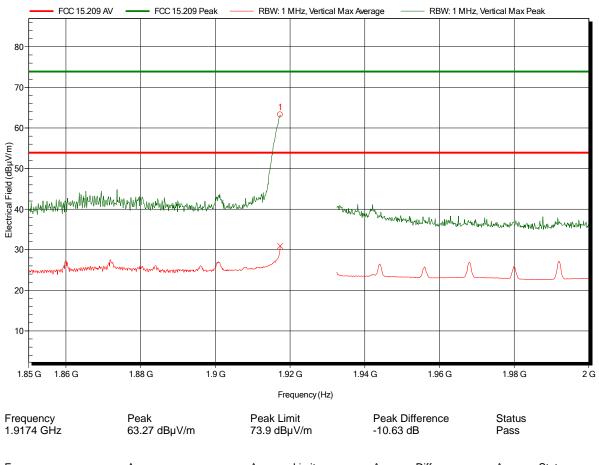

Frequency Average Average Limit Average Difference Average Status 1.9174 GHz 30.91 dB $\mu$ V/m 53.9 dB $\mu$ V/m -22.99 dB Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

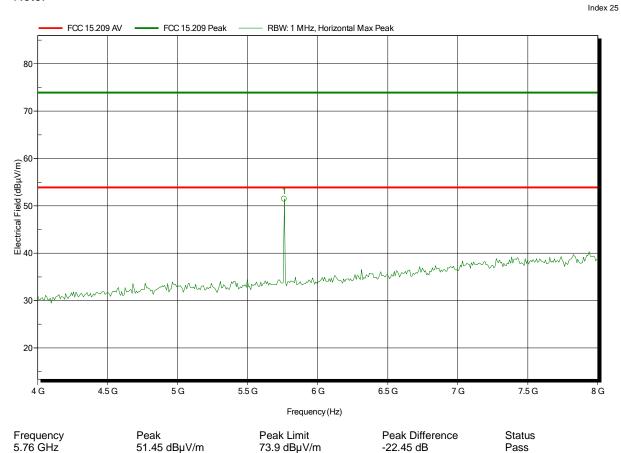



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m


Mode: TX; channel 4; antenna 0

49.87 dBµV/m

Test Date: 2014-09-29

Note:

5.76 GHz

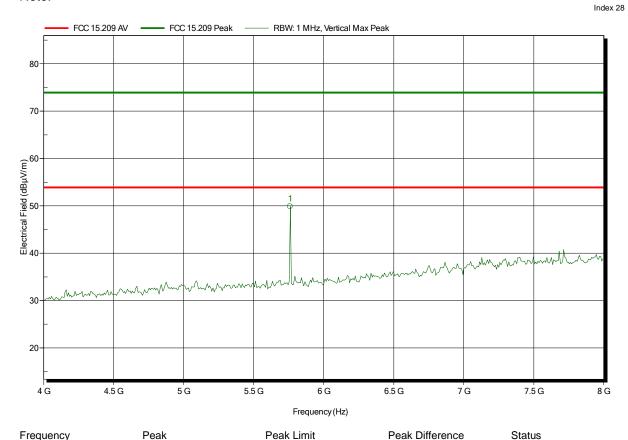

73.9 dBµV/m

-24.03 dB

Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

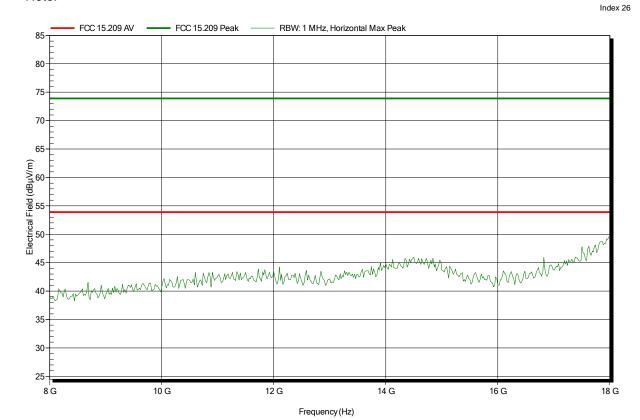



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

**Test Conditions:** Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Schwarzbeck BBHA 9120D, Vertical Antenna:

Measurement distance:

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

8 G

FCC 15.209 Peak FCC 15.209 AV RBW: 1 MHz, Vertical Max Peak 85 80 75 70 65-Electrical Field (dBµV/m) G G G 35 30 10 G 12 G 14 G 16 G 18 G

Frequency (Hz)



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HL 025, Horizontal

Measurement distance: 1 m

Mode: TX; channel 4; antenna 0


18.5 G

Test Date: 2014-09-29

Note:

18 G

FCC 15.209 AV FCC 15.209 Peak RBW: 1 MHz, Horizontal Max Peak

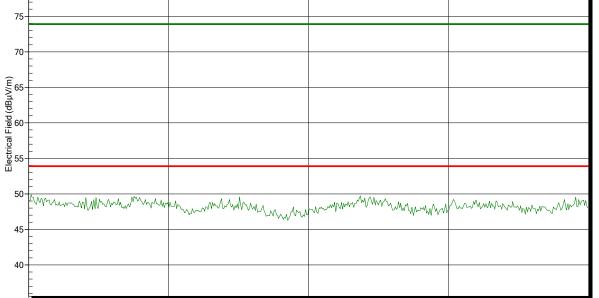

19.5 G

Index 27

20 G



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Rohde & Schwarz HL 025, Vertical

Measurement distance: 1 m

Mode: TX; channel 4; antenna 0

Test Date: 2014-09-29

Note:

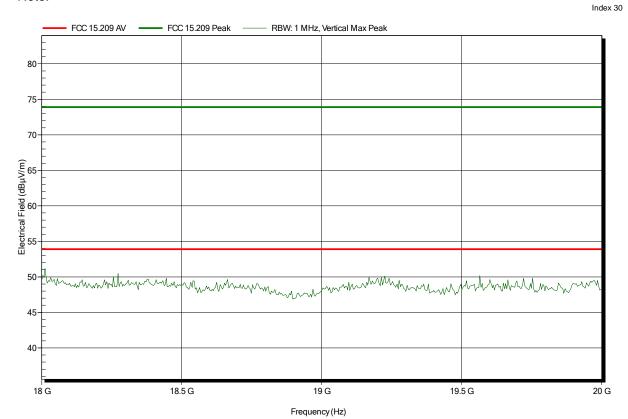



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29
Note: with notch-filter

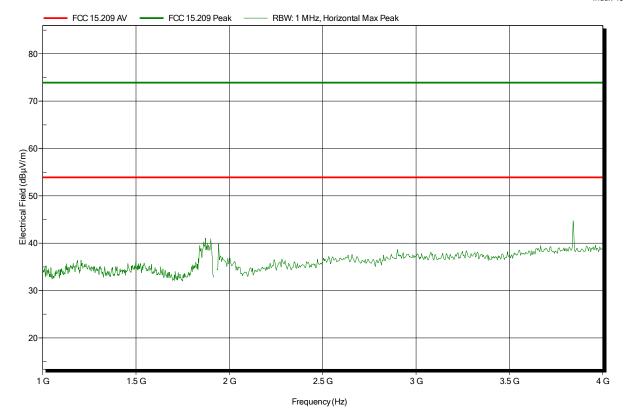



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29
Note: with notch-filter

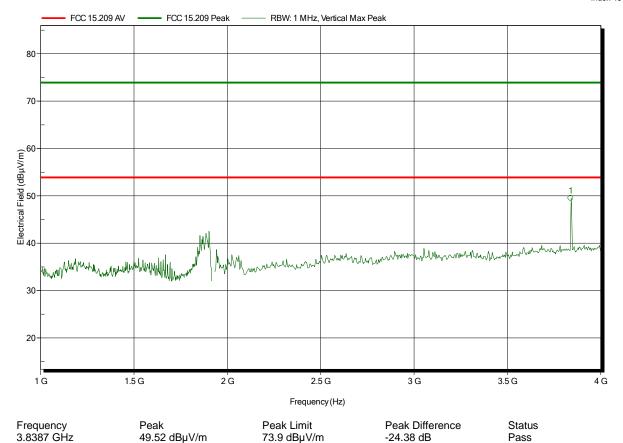



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-30

Note:

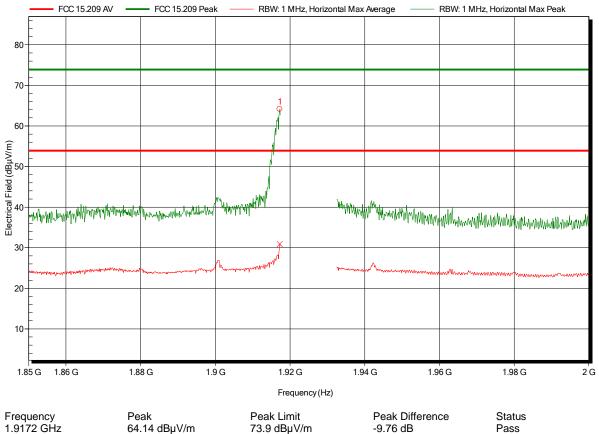

1.9172 GHz	64.14 dBµV/m	73.9 dBµV/m	-9.76 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9172 GHz	30.88 dBµV/m	53.9 dBµV/m	-23.02 dB	Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-30

Note:

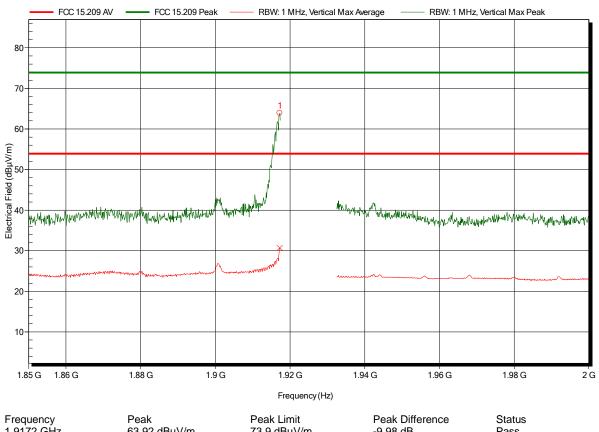

1.9172 GHz 63.92 dB $\mu$ V/m 73.9 dB $\mu$ V/m -9.98 dB Pass

Frequency Average Average Limit Average Difference Average Status 1.9172 GHz 30.7 dB $\mu$ V/m 53.9 dB $\mu$ V/m -23.2 dB Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29

Note:

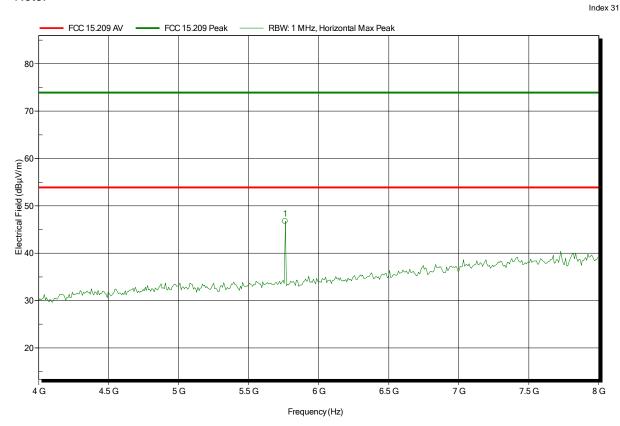

Frequency 5.76 GHz Peak 46.74 dBµV/m Peak Limit 73.9 dBµV/m Peak Difference -27.16 dB Status Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29

Note:

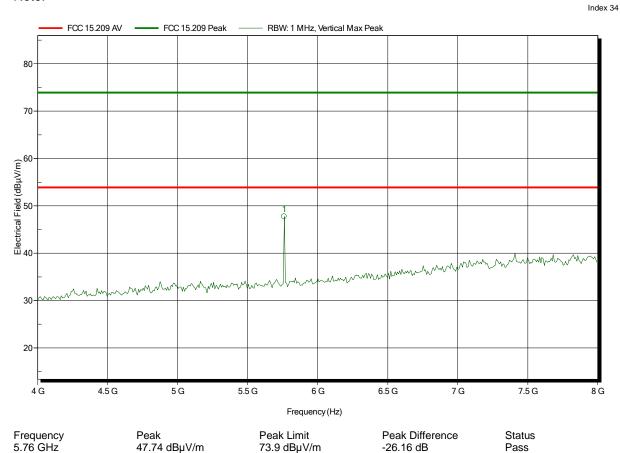



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29

Note:

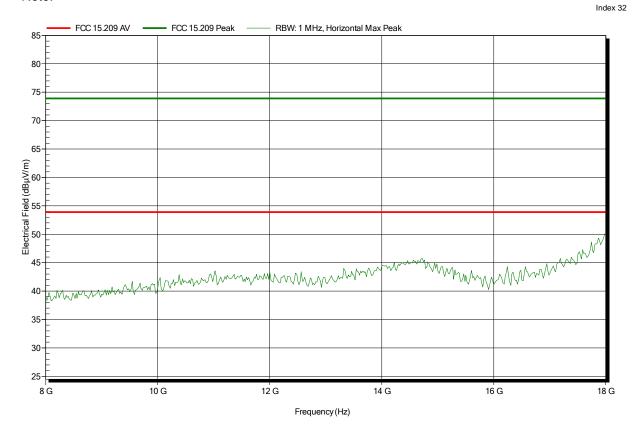



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29

Note:

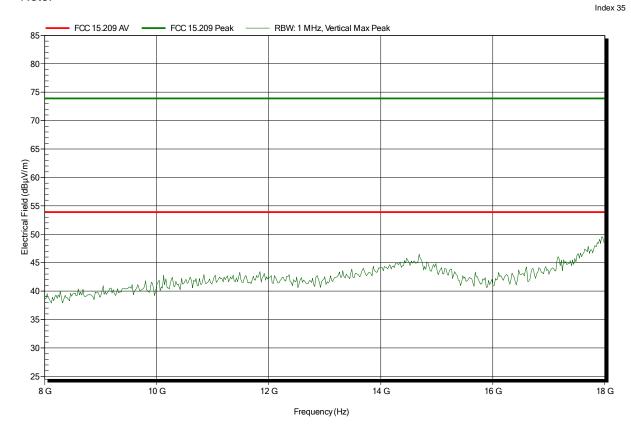



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Rohde & Schwarz HL 025, Horizontal Antenna:

Measurement distance:

TX; channel 4; antenna 1 Mode:

Test Date: 2014-09-29

Note:

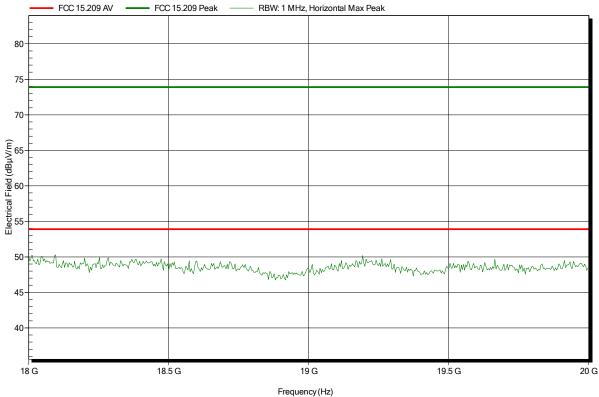



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Rohde & Schwarz HL 025, Vertical

Measurement distance: 1 m

Mode: TX; channel 4; antenna 1

Test Date: 2014-09-29

Note:

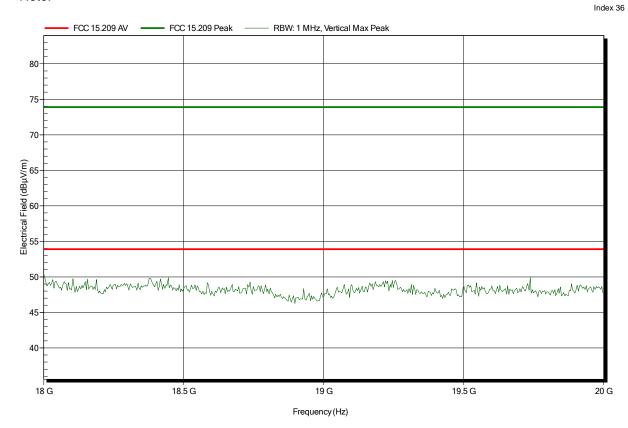



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HK 116, Horizontal

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29 Note: worst case

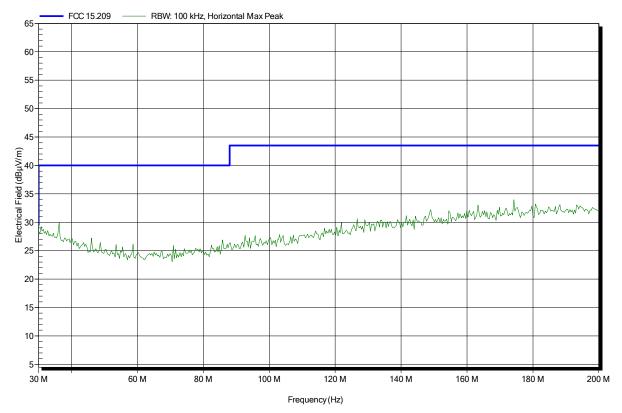



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Rohde & Schwarz HK 116, Vertical

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29 Note: worst case

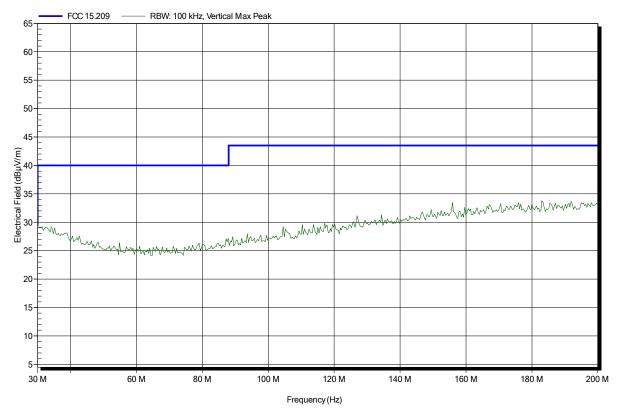



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HL 223, Horizontal

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29 Note: worst case

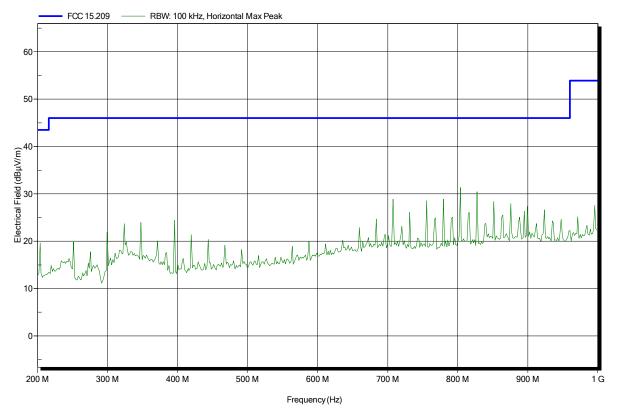



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Rohde & Schwarz HL 223, Vertical

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29 Note: worst case

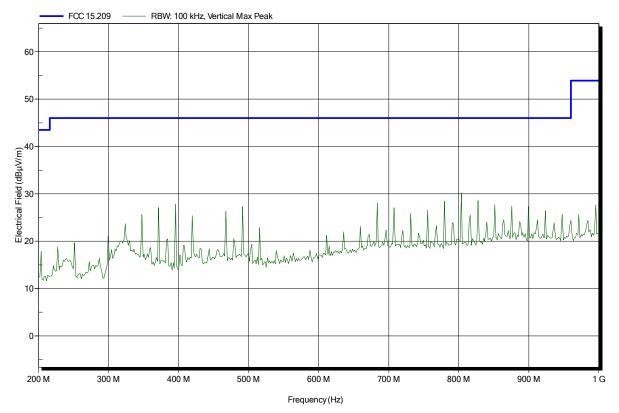



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29
Note: with notch-filter

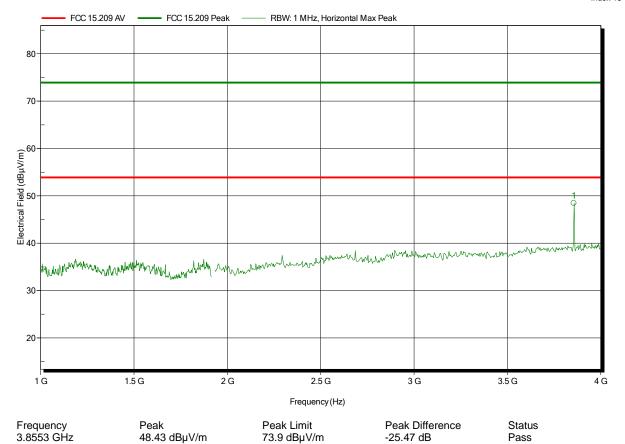



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29
Note: with notch-filter

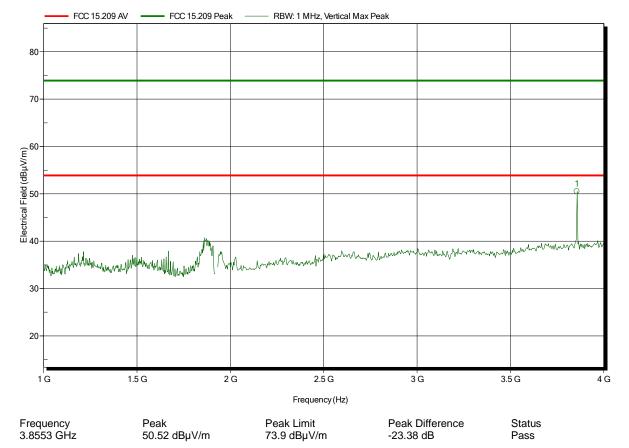



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m


Frequency 1.9325 GHz Average

33.17 dBµV/m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

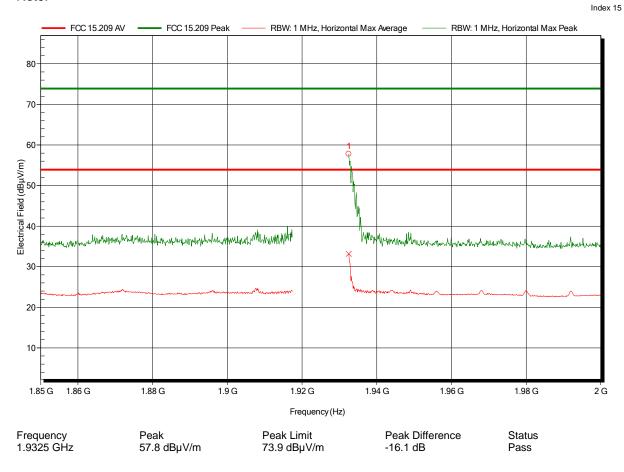

Average Limit 53.9 dBµV/m

Average Difference -20.73 dB

Test Report No.: G0M-1408-4062-TFC15DFP79-V01

Average Status

Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

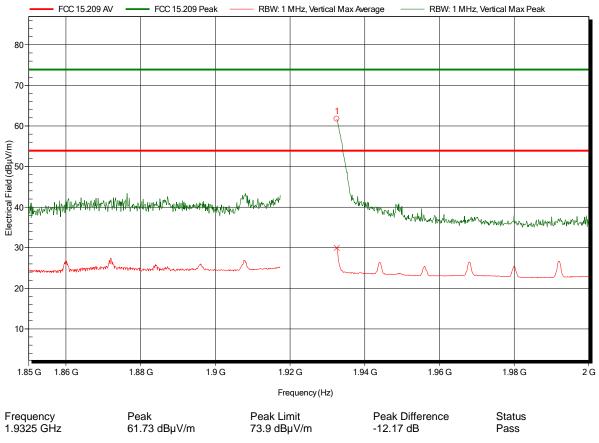

Frequency Average Average Limit Average Difference Average Status 1.9325 GHz 29.98 dBµV/m 53.9 dBµV/m -23.92 dB Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

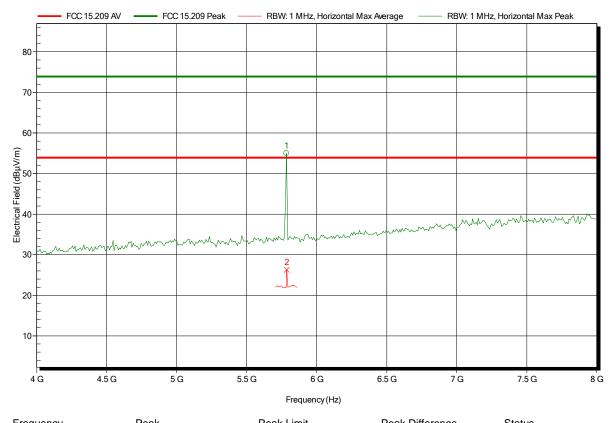

5.784 GHz 5.786 GHz	Реак 54.97 dBµV/m	Peak Limit 73.9 dBμV/m	-18.93 dB	Pass Pass
Frequency 5.784 GHz	Average	Average Limit	Average Difference	Average Status
5.786 GHz	26.29 dBμV/m	53.9 dBµV/m	-27.61 dB	Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

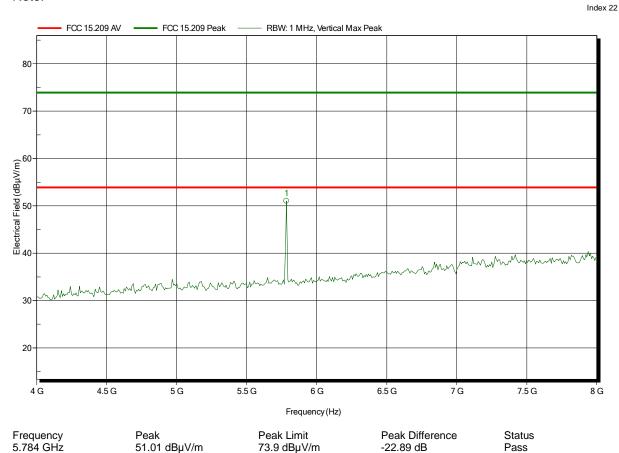

Test Report No.: G0M-1408-4062-TFC15DFP79-V01



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

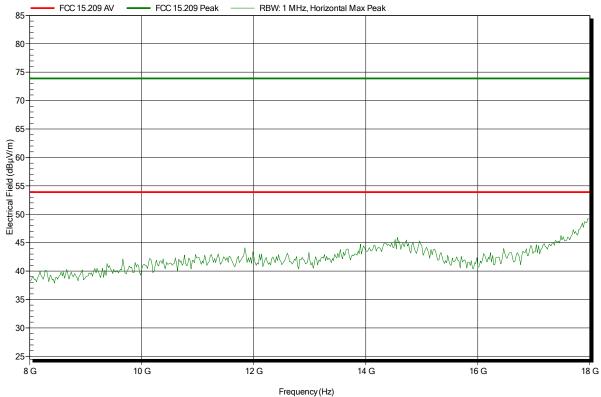



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

**Test Conditions:** Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Schwarzbeck BBHA 9120D, Vertical Antenna:

Measurement distance:

TX; channel 0; antenna 0 Mode:

Test Date: 2014-09-29

Note:

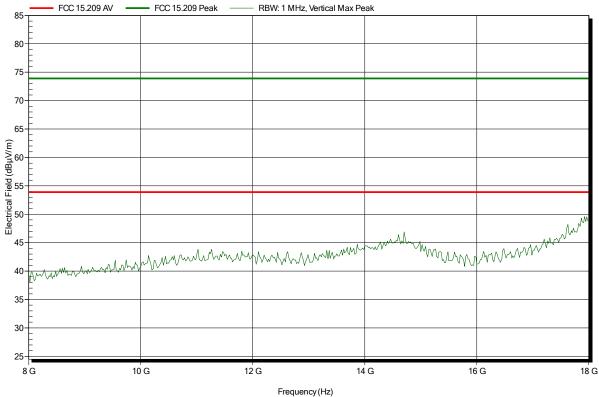



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HL 025, Horizontal

Measurement distance: 1 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

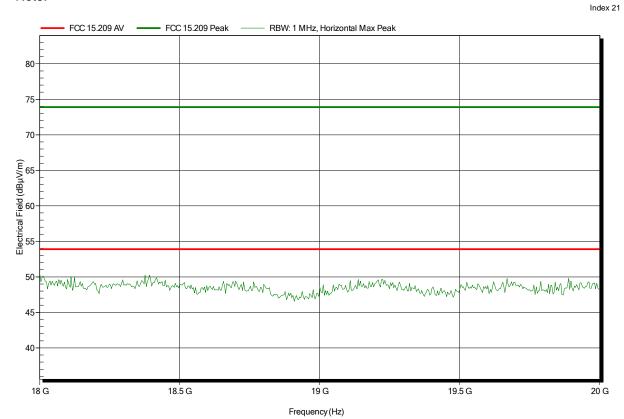



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Rohde & Schwarz HL 025, Vertical

Measurement distance: 1 m

Mode: TX; channel 0; antenna 0

Test Date: 2014-09-29

Note:

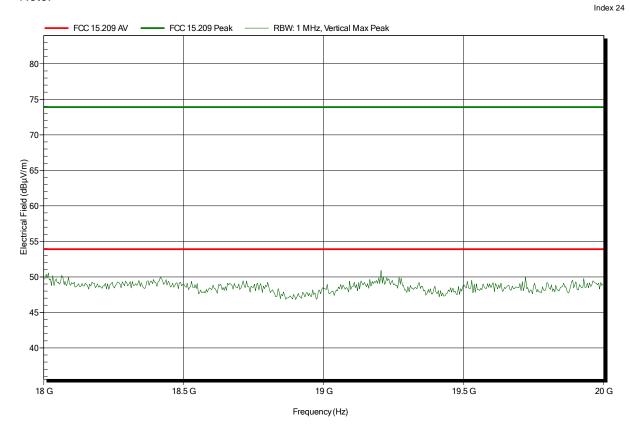



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH


Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29
Note: with notch-filter

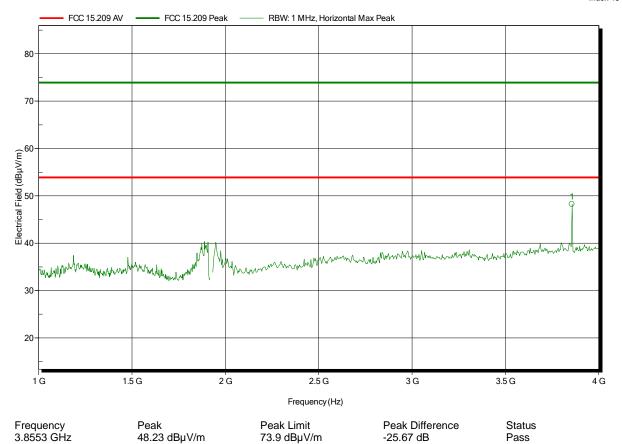



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29
Note: with notch-filter

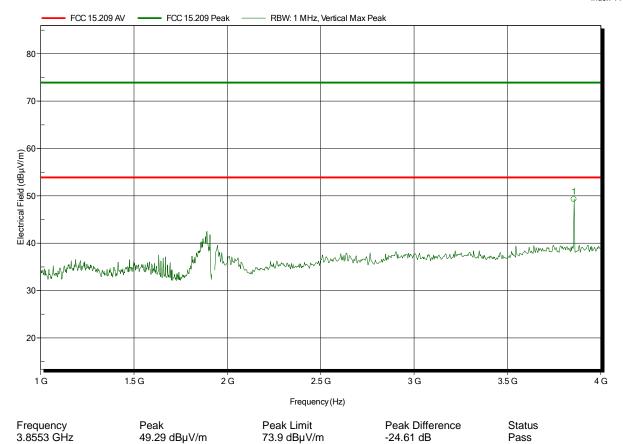



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-30

Note:

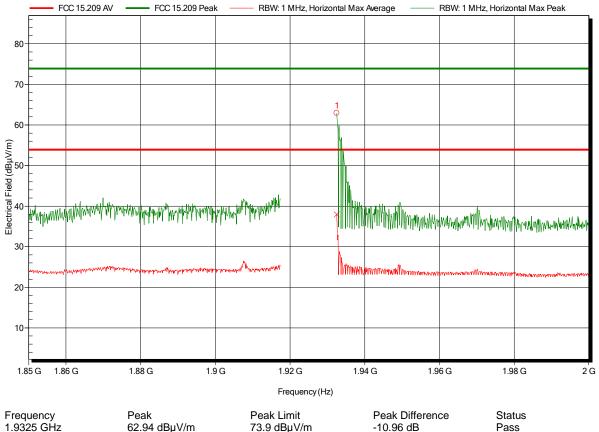

1.9325 GHz	62.94 dBµV/m	73.9 dBµV/m	-10.96 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	37.95 dBμV/m	53.9 dBµV/m	-15.95 dB	Pass



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

**Test Conditions:** Tnom: 25°C, Vnom: 3.7 vDC lithium battery

Schwarzbeck BBHA 9120D, Vertical Antenna:


Measurement distance:

Mode: TX; channel 0; antenna 1

27.19 dBµV/m

2014-09-30 Test Date:

Note:

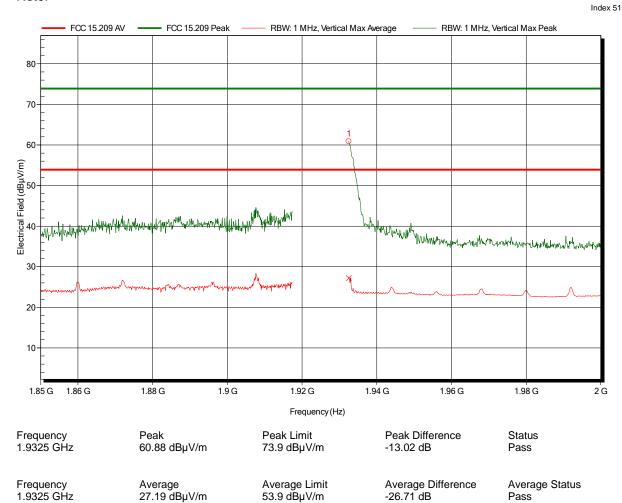

Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 n

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29

Note:

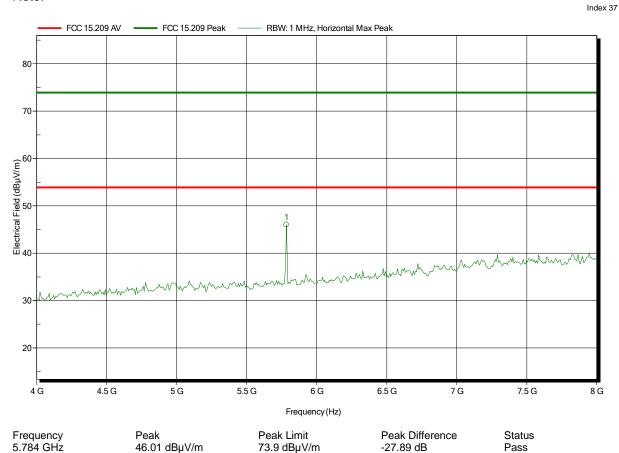

Test Report No.: G0M-1408-4062-TFC15DFP79-V01



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29

Note:

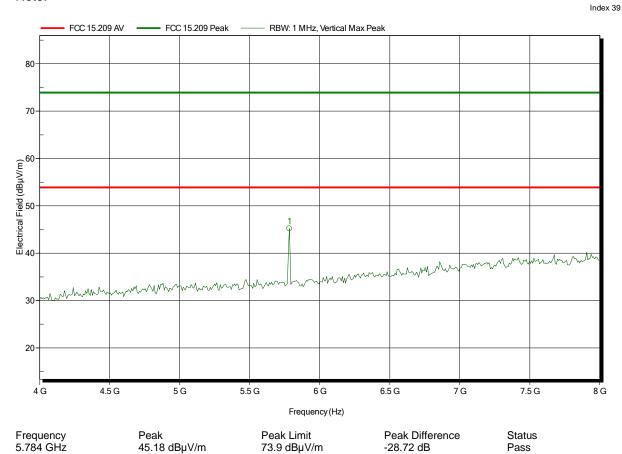

Test Report No.: G0M-1408-4062-TFC15DFP79-V01



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Mr. Treffke Operator:


**Test Conditions:** Tnom: 25°C, Vnom: 3.7 vDC lithium battery Schwarzbeck BBHA 9120D, Horizontal Antenna:

Measurement distance:

TX; channel 0; antenna 1 Mode:

Test Date: 2014-09-29

Note:

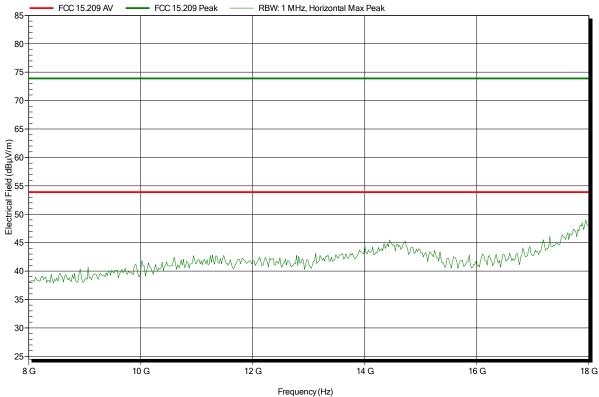



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance:

TX; channel 0; antenna 1 Mode:

Test Date: 2014-09-29

Note:

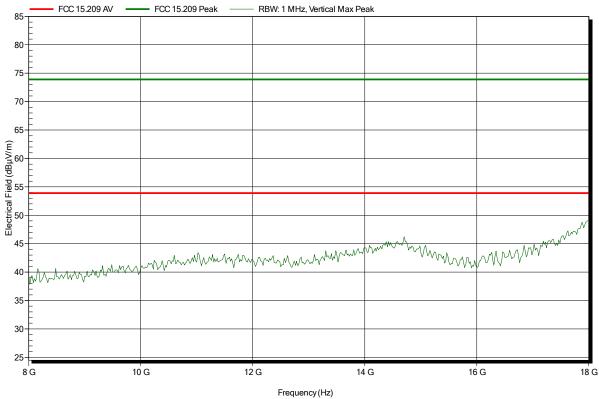



Project number: G0M-1408-4062

Applicant: Sonetics Corporation
EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery Antenna: Rohde & Schwarz HL 025, Horizontal

Measurement distance: 1 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29

Note:

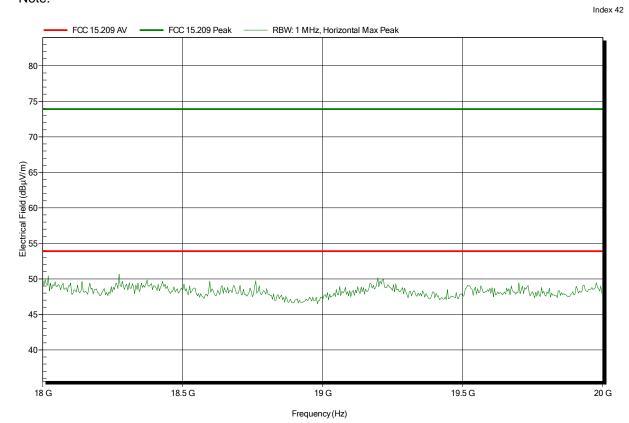



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 vDC lithium battery


Antenna: Rohde & Schwarz HL 025, Vertical

Measurement distance: 1 m

Mode: TX; channel 0; antenna 1

Test Date: 2014-09-29

Note:

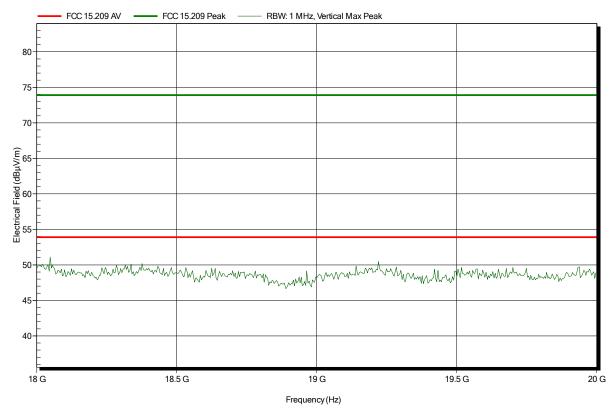



### 3.13 Test Conditions and Results – Receiver spurious emissions

Test according referenstandards  Test according to measurement referen  Tested frequencies  Tested frequency range  EUT test mode  Frequency range [MHz]  30 – 88  88 – 216  216 – 960  960 – 1000  > 1000	nce	Limits Limit [µV/m] 100	Reference Method IC RSS-210 A8.5 Reference Method ANSI C63.4 Scan (All) 0 MHz – 3 <sup>th</sup> Harmonic Receive Limit [dBµV/m]	Limit Distance [m]	
Test according to measurement referen  Tested frequencies  Tested frequency range [MHz]  30 – 88  88 – 216  216 – 960  960 – 1000	Detector Quasi-Peak	Limits Limit [µV/m]	Reference Method  ANSI C63.4  Scan (All)  0 MHz – 3 <sup>th</sup> Harmonic  Receive  Limit [dBµV/m]		
Tested frequencies Tested frequency range EUT test mode  Frequency range [MHz] 30 – 88 88 – 216 216 – 960 960 – 1000	Detector Quasi-Peak	Limits Limit [µV/m]	ANSI C63.4 Scan (All) 0 MHz – 3 <sup>th</sup> Harmonic Receive Limit [dBµV/m]		
Tested frequencies Tested frequency range EUT test mode  Frequency range [MHz] 30 – 88 88 – 216 216 – 960 960 – 1000	Detector Quasi-Peak	Limits Limit [µV/m]	Scan (All)  0 MHz – 3 <sup>th</sup> Harmonic  Receive  Limit [dBµV/m]		
Tested frequency range [MHz]  30 – 88  88 – 216  216 – 960  960 – 1000	Detector Quasi-Peak	Limits Limit [µV/m]	0 MHz – 3 <sup>th</sup> Harmonic Receive Limit [dBµV/m]		
Frequency range [MHz]  30 – 88  88 – 216  216 – 960  960 – 1000	Detector Quasi-Peak	Limits Limit [µV/m]	Receive  Limit [dBµV/m]		
Frequency range [MHz]  30 – 88  88 – 216  216 – 960  960 – 1000	Quasi-Peak	Limit [μV/m]	Limit [dBµV/m]	Limit Distance [m]	
30 – 88 88 – 216 216 – 960 960 – 1000	Quasi-Peak	Limit [μV/m]		Limit Distance [m]	
30 – 88 88 – 216 216 – 960 960 – 1000	Quasi-Peak			Limit Distance [m]	
88 – 216 216 – 960 960 – 1000		100			
216 – 960 960 – 1000	Quasi-Peak		40	3	
960 – 1000		150	43.5	3	
	Quasi-Peak	200	46	3	
> 1000	Quasi-Peak	500	54	3	
	Average	500	54	3	
		Test setup			
	<del>                                     </del>	Semi-anechoic Cha	EUT  Turn table	- e	
Amplifier Measurement					



#### **Test procedure**

- 1. EUT set to receive mode (Communication tester is used if needed)
- 2. Span it set according to measurement range
- 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz
- 4. Markers are set to peak emission levels

Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dbµV/m]	Pol.	Det.	Limit [dBµV/m]	Margin [dB]
$F_{MID}$	1924.992	419.2	30.24	ver	pk	46.00	-15.76

#### Comments:

<sup>\*</sup> Physical distance between EUT and measurement antenna.

<sup>\*\*</sup> Emission level corresponds to ambient noise floor



Project number: G0M-1408-4062

Applicant: **Sonetics Corporation EUT Name:** Communications Headset

**AXP379** Model:

Test Site: Eurofins Product Service GmbH

Mr. Treffke Operator:

**Test Conditions:** Tnom: 25°C, Vnom: 3.7 VDC lithium battery


Rohde & Schwarz HK 116, Vertical Antenna:

Measurement distance:

RX; DECT ch.2 and BT ch.39 acrive Mode:

2014-10-02 Test Date:

Note:

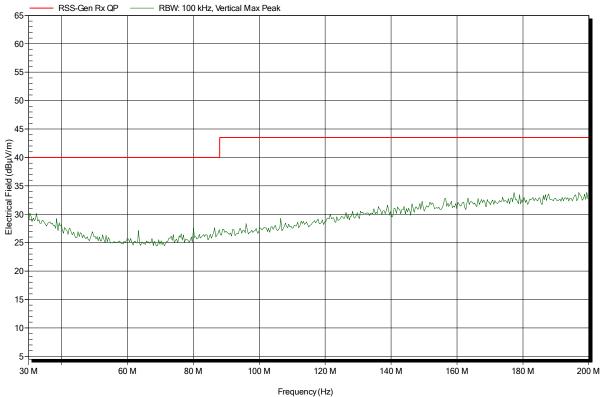



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery


Antenna: Rohde & Schwarz HL 223, Horizontal

Measurement distance: 3 m

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

Note:

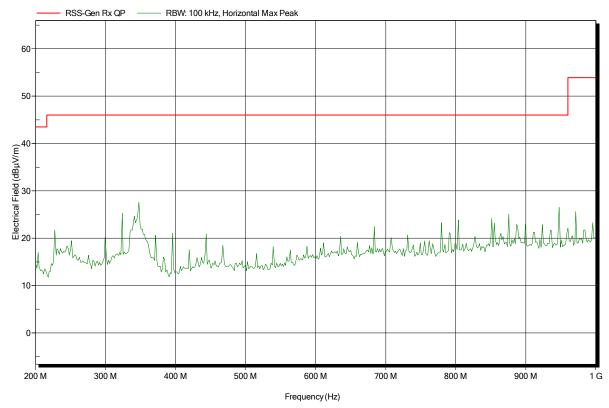



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery

Antenna: Rohde & Schwarz HL 223, Vertical

Measurement distance: 3 m

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

30.24 dBµV/m

Note:

419.2 MHz

Index 94 RSS-Gen Rx QP — - RBW: 100 kHz, Vertical Max Peak 50 Electrical Field (dBµV/m) 10 0 200 M 300 M 400 M 500 M 600 M 700 M 800 M 900 M Frequency (Hz) Frequency Peak Peak Limit Peak Difference Status

46 dBµV/m

-15.76 dB

Pass



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke


Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 m

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

Note:

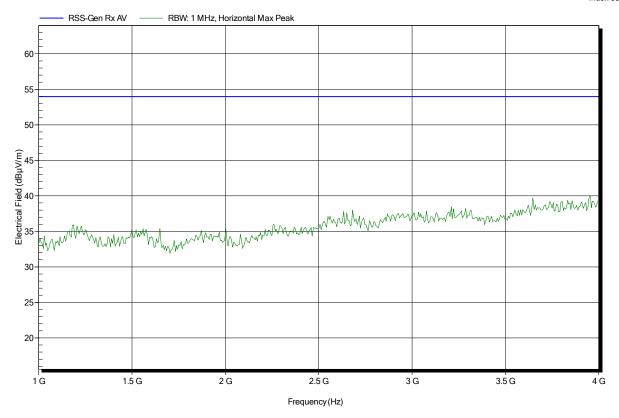



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 m

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

Note:

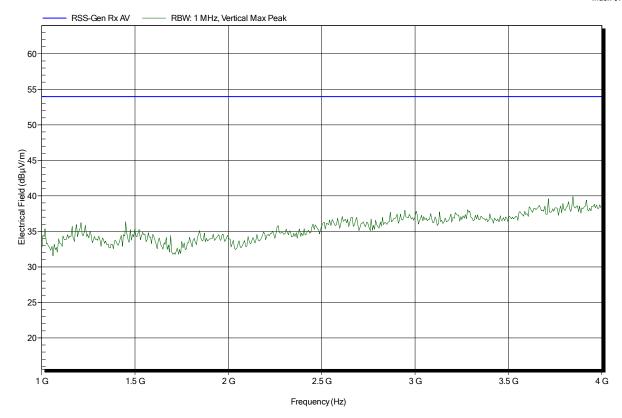



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3 n

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

Note:

35

30

4 G

4.5 G

5 G

5.5 G



Project number: G0M-1408-4062

Applicant: Sonetics Corporation EUT Name: Communications Headset

Model: AXP379

Test Site: Eurofins Product Service GmbH

Operator: Mr. Treffke

Test Conditions: Tnom: 25°C, Vnom: 3.7 VDC lithium battery


Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3 n

Mode: RX; DECT ch.2 and BT ch.39 acrive

Test Date: 2014-10-02

Note:

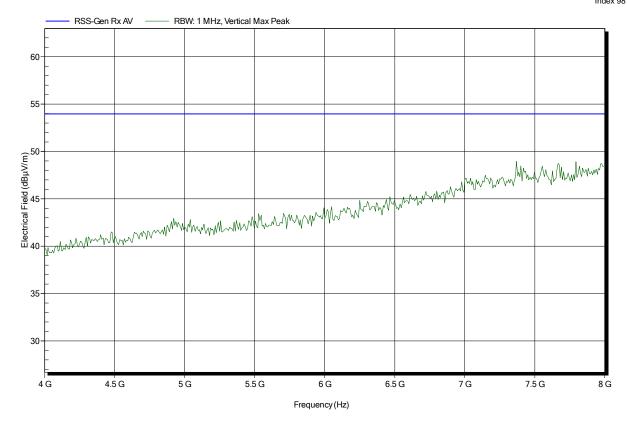




#### 3.14 Test Conditions and Results – Automatic discontinuation of Transmission

Automatic discontinuation of transmission ac	c. to FCC 15D / RSS-213 Verdict: PASS	
EUT requirement	Reference	
rule parts and clause	FCC 15.319(f) / IC RSS-213 4.3.4(a)	
Test according to	Reference Method	
measurement reference	Manual evaluation	
EUT equipment type	Fixed part	

#### Requirements

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

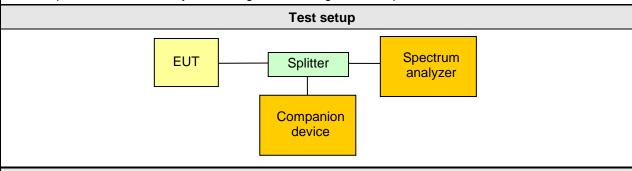

### **Test procedure**

The following situations were simulated to test the reaction of the EUT:

- EUT power removed
- EUT switched -off
- Companion device switched off
- Hook-on by companion device
- Hook-on by EUT
- Power removed from companion device

The reaction of the EUT is recorded by the following results:

- A Connection breakdown, cease of all transmissions
- B Connection breakdown, EUT transmits control and signalling information
- C Connection breakdown, Companion device transmits control and signalling information
- N/A Not applicable (the EUT or companion device does not have an on/off switch or cannot perform hook on

Result				
Test	Reaction	Verdict		
Power removed : EUT	А	PASS		
Power removed : Companion device	А	PASS		
Switch -off : EUT	А	PASS		
Switch –off : Companion device	А	PASS		
Hook-on: EUT	N/A			
Hook-on : Companion device	N/A			

Test Report No.: G0M-1408-4062-TFC15DFP79-V01



### 3.15 Test Conditions and Results – Radiofrequency radiation exposure

Radiofrequency radiation exposure	e acc. to FCC 47 CFR 15D / IC RSS-213	Verdict: PASS		
EUT requirement	Reference			
rule parts and clause	FCC 15.319(c)(i) / IC RSS-Gen 5.6			
Requirements				

FCC: Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

IC: Category I and Category II equipment shall comply with the applicable requirements of RSS-102.

Result	
Reference	Verdict
see dedicated report : G0M-1408-4062-TFC093SR-V01 issued by Eurofins Product Service GmbH	PASS

Test Report No.: G0M-1408-4062-TFC15DFP79-V01



#### 3.16 Test Conditions and Results - Monitoring threshold

Monitoring threshold acc. to FCC 47 CFR 15D / IC RSS-213 Verdic		
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(2),(5),(9) / IC RSS-213 4.3.4(b)(2),(5),(9)	
Test according referenced standards	Reference Method	d
	ANSI C63.17 7.3.	4
Number of duplex channels used 5 carrier with 12 duplex timeslots = 60 duplex channels		60 duplex channels
Requirements		

The monitoring threshold must not be more than 30 dB above the thermal noise power (KTB) of a bandwidth equivalent to the emission/occupied bandwidth of the device.

Devices that have a power output lower than the m aximum permitted under this standard may increase their detection threshold by 1 dB for each 1 dB that the transmitter power is below the maximum permitted.

IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.

$$\begin{split} T_{U}[dBm] &= -174 + 10 \cdot \log_{10}(Bandwidth \, [Hz]) + M_{U} + P_{max}[dBm] - P_{EUT}[dBm] \\ T_{L}[dBm] &= -174 + 10 \cdot \log_{10}(Bandwidth \, [Hz]) + M_{L} + P_{max}[dBm] - P_{EUT}[dBm] \end{split}$$

With  $M_U = 50$  dB and  $M_L = 30$  dB,  $P_{max}$  as given under "Peak transmit power" and bandwidth as emission or occupied bandwidth. The power threshold limit is given by  $T_U + U_M$  ( $U_M = 6$  dB).

# Test setup Spectrum analyzer Companion device Interferer Generators

#### Test procedure – Lower threshold for EUTs that do not implement LIC procedure

- 1. An interferer level of  $T_L + U_M + 10$  dB is applied to all carrier frequencies
- 2. It is verified that the EUT does not transmit on any carrier frequency
- 3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel

#### Test procedure - Upper threshold for EUTs that implement LIC procedure

- 1. An interferer level of T<sub>U</sub> + U<sub>M</sub> + 10 dB is applied to all carrier frequencies
- 2. It is verified that the EUT does not transmit on any carrier frequency
- 3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel



# Product Service

	Test results - FCC					
Threshold	Emission Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1440000	50	20.18	20.79	-55.8	-60
Lower	N/A	N/A	N/A	N/A	N/A	N/A
			Test results -	IC		
Threshold	Occupied Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1224000	50	20.18	20.44	-56.9	-60
Lower	N/A	N/A	N/A	N/A	N/A	N/A
Comments:						



#### 3.17 Test Conditions and Results - LIC confirmation

LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PA			
EUT requirement	Reference		
rule parts and clause	FCC 15.323(c)(5) / IC RSS-21	3 4.3.4(b)(5)	
Test according referenced	Reference Method		
standards	ANSI C63.17 7.3.4	4	
Requirements			
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.			
Test result			
Evaluation Verdict		Verdict	
The requirement is verified using the "Monitoring time" and "LIC Selection" test.  PASS		PASS	
Comments:			




#### 3.18 Test Conditions and Results - LIC selection

LIC selection acc. to FCC 47 CFR 1	5D / IC RSS-213 Verdict: PASS	
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.3	
Requirements		

FCC: If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.

IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.

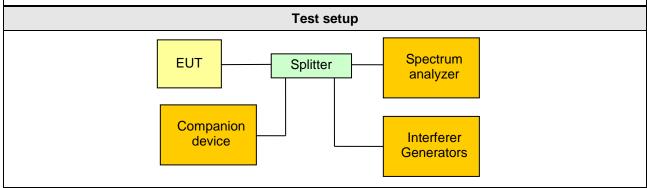

#### Test procedure

- 1. The EUT is forced to two carrier frequencies  $f_1$  and  $f_2$  only be the use of interferer generators with power levels higher than the upper threshold  $T_U$  plus the measurement uncertainty  $U_M$  of 6 dB
- 2. Additional interferer signals are applied to the channels f<sub>1</sub> and f<sub>2</sub> according to the result table below
- 3. A communication session with the companion device is initiated
- 4. Transmission on the least interfered channel is verified
- The communication session is terminated
- 6. The communications session is established another 4 times

Test results				
Interferer Level f <sub>1</sub>	Interferer Level f <sub>2</sub>	Communication channel	Verdict	
$T_L + U_M + 7 dB$	T <sub>L</sub> + U <sub>M</sub>	$f_2$	PASS	
$T_L + U_M$	$T_L + U_M + 7 dB$	f <sub>1</sub>	PASS	
$T_L + U_M + 1 dB$	T <sub>L</sub> + U <sub>M</sub> - 6 dB	f <sub>2</sub>	PASS	
T <sub>L</sub> + U <sub>M</sub> - 6 dB	$T_L + U_M + 1 dB$	f <sub>1</sub>	PASS	
Comments: T <sub>1</sub> corresponds to the lower threshold power value				




#### 3.19 Test Conditions and Results - Monitoring antenna

Monitoring antenna acc. to FCC 47	CFR 15D / IC RSS-213 Verdict: PASS		
EUT requirement	Reference		
rule parts and clause	FCC 15.319(c)(8) / IC RSS-213 (b)(8)		
Test according to measurement reference	Reference Method		
	ANSI C63.17 4.6		
Monitoring antenna	The same as transmitting antenna		
Dequirements			

#### Requirements

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

#### Test setup radiated (monitoring and transmit antenna are not the same)

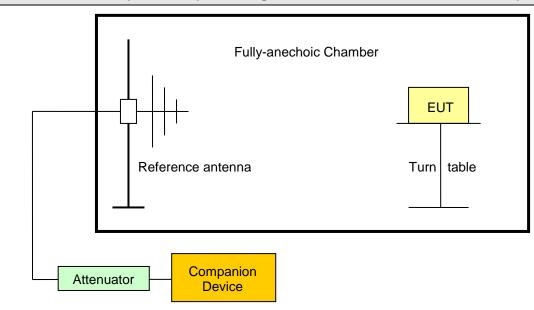

#### Test procedure (collocated monitoring antenna of different type)

- 1. The reference antenna is orientated for horizontal polarization
- 2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna
- 3. A signal with threshold power level is applied to the reference antenna
- 4. It is observed whether or not an connection can be established
- 5. The polarization of the reference antenna is changed to vertical polarization
- 6. It is observed whether or not an connection can be established



#### Test procedure (arbitrarily placed monitoring antenna)

- 1. The reference antenna is orientated for horizontal polarization
- 2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna
- 3. The distance between the reference antenna and the EUT is increased by the maximum distance between the monitoring and transmitting antenna
- 4. The EUT is aligned in such a way that the direction of minimum sensitivity faces the reference antenna
- 5. A signal with threshold power level is applied to the reference antenna and the EUT is illuminated
- 6. It is observed whether the EUT can connect to the companion device or not
- 7. The polarization of the reference antenna is changed to vertical polarization
- 8. It is observed whether or not an connection can be established

Results		
Connection status	Verdict	
N/A (monitoring antenna identical to transmitting antenna)	PASS	




#### 3.20 Test Conditions and Results - Monitoring time

Monitoring time acc. to FCC 47 CFI	R 15D / IC RSS-213 Verdict: PASS
EUT requirement rule parts and clause	Reference
	FCC 15.323(c)(1) / IC RSS-213 4.3.4(b)(1)
Test according referenced standards	Reference Method
	ANSI C63.17 7.3.4

#### Requirements

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.

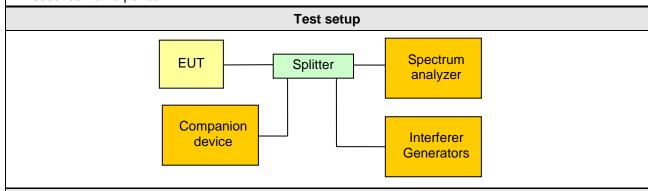

#### **Test procedure**

- 1. The EUT is forced to two carrier frequencies  $f_1$  and  $f_2$  only be the use of interferer generators with power levels higher than the upper threshold  $T_U$  plus the measurement uncertainty  $U_M$  of 6 dB
- 2. The interferer level on channel frequency f<sub>1</sub> is also set to T<sub>U</sub>+ U<sub>M</sub> and channel f<sub>2</sub> has no interferer
- 3. A communication session is initiated on f<sub>2</sub> and transmission on f<sub>2</sub> is verified
- 4. An interferer level of  $T_U$ +  $U_M$  is applied to  $f_2$  and the interferer on channel  $f_1$  is removed 20ms after the interferer on  $f_2$  is applied
- 5. Transmission on f<sub>1</sub> and f<sub>2</sub> is monitored with the spectrum analyzer and it is verified that the EUT does not transmit on f<sub>2</sub>.

Test results				
Initial transmit channel	Interferer level	Final transmit channel	Verdict	
$f_2$	0	f <sub>2</sub>	PASS	
f <sub>2</sub>	T <sub>U</sub> + U <sub>M</sub>	f <sub>1</sub>	PASS	
Comments:				




#### 3.21 Test Conditions and Results - Monitoring bandwidth

Monitoring bandwidth acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 4.	3.4(b)(7)
Test according referenced standards	Reference Method	
	ANSI C63.17 7.4	

#### Requirements

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

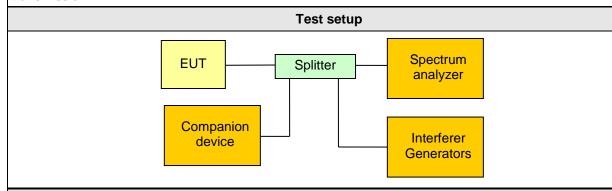

#### **Test procedure**

- 1. Using interferer signals, operation is restricted to channels f<sub>1</sub>
- 2. An communication session is established without interference on f<sub>1</sub>
- 3. An interference signal is set to  $f_1$  + 30% of the emission/occupied bandwidth with a level of 10 dB +  $U_M$  above  $T_U$  or  $T_L$  as appropriate. The bandwidth of the interferer is set to be greater than 0.05 MHz.
- 4. It is verified that the EUT does not transmit
- 5. The interferer is set to  $f_1$  30% of the emission/occupied bandwidth
- 6. It is verified that the EUT does not transmit

Test results				
Interferer Frequency	Interferer Level	Transmission status	Verdict	
F <sub>LOW</sub> + 30 % · BW	$T_{U} + U_{M} + 10 \text{ dB}$	None	PASS	
F <sub>LOW</sub> - 30 % · BW	$T_U + U_M + 10 dB$	None	PASS	
F <sub>HIGH</sub> + 30 % · BW	$T_U + U_M + 10 dB$	None	PASS	
F <sub>HIGH</sub> - 30 % · BW	$T_U + U_M + 10 dB$	None	PASS	
Comments:				




#### 3.22 Test Conditions and Results - Monitoring reaction time

Monitoring reaction time acc. to FC	CC 47 CFR 15D / IC RSS-213 Verd	lict: PASS
EUT requirement	Reference	
rule parts and clause	FCC 15.323(c)(7) / IC RSS-213 4.3.4(b)(7)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.5	

#### Requirements

The monitor shall have a maximum reaction time less than 50xSQRT (1.25/emission(occupied) bandwidth in MHz) microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be 35xSQRT (1.25/emission (occupied) bandwidth in MHz) microseconds but shall not be required to be less than 35 microseconds.

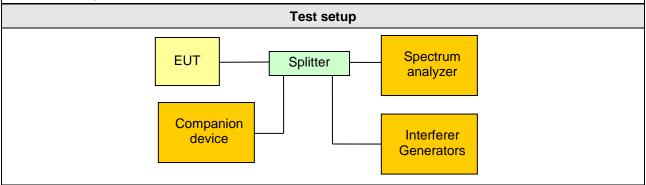

#### **Test procedure**

- 1. Using interferer signals operation is restricted to channel f<sub>1</sub>
- 2. A time-synchronized, pulsed interference is applied to  $f_1$  with a power level of  $T_U + U_M$  or  $T_L + U_M$  as appropriate
- 3. For systems with a 10 ms frame time and N timeslots per frame, a channel interferer with N pulses in a 10 ms repetition period is applied
- 4. The level of the interferer pulses is also set to  $T_U + U_M$  or  $T_L + U_M$  as appropriate
- 5. The pulse width is set to the largest of 50  $\mu$ s and  $50 \cdot \sqrt{1.25/Bandwidh[MHz]} \mu$ s
- 6. It is observed whether or not a connection can be established to the companion device
- 7. The level of the interferer pulses is set to 6 dB above  $T_U + U_M$  or  $T_L + U_M$  as appropriate
- 8. The pulse width is set to the largest of 35 µs and  $35 \cdot \sqrt{1.25/Bandwidh[MHz]}$  µs
- 9. It is observed whether or not a connection can be established to the companion device



# **Product Service**

Test results - FCC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [µs]	Pulse width for test [µs]	Connection possible	Verdict
$F_{LOW}$	1.418	$50 \cdot \sqrt{1.25/B[MHz]} =$	46.9	No	PASS
$F_{LOW}$	1.418	$35 \cdot \sqrt{1.25/B[MHz]} =$	32.8	No	PASS
F <sub>HIGH</sub>	1.440	$50 \cdot \sqrt{1.25/B[MHz]} =$	46.6	No	PASS
F <sub>HIGH</sub>	1.440	$35 \cdot \sqrt{1.25/B[MHz]} =$	32.6	No	PASS
		Test results - IC	;		
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [µs]	Pulse width for test [µs]	Connection possible	Verdict
$F_{LOW}$	1.224	$50 \cdot \sqrt{1.25/B[MHz]} =$	41.3	No	PASS
F <sub>LOW</sub>	1.224	$35 \cdot \sqrt{1.25/B[MHz]} =$	28.9	No	PASS
F <sub>HIGH</sub>	1.224	$50 \cdot \sqrt{1.25/B[MHz]} =$	41.3	No	PASS
F <sub>HIGH</sub>	1.224	$35 \cdot \sqrt{1.25/B[MHz]} =$	28.9	No	PASS
Comments:	· -=	σο γ1.20/Ε[2] –			




#### 3.23 Test Conditions and Results - Acknowledgements

Acknowledgements acc. to FCC 47 C	FR 15D / IC RSS-213 Verdict: PASS		
EUT requirement	Reference		
rule parts and clause	FCC 15.323(c)(4) / IC RSS-213 4.3.4(b)(4)		
Test according referenced	Reference Method		
standards	ANSI C63.17 8.2.1		
EUT can initiate a communication session	No		
Requirements			

Once access to specific combined time and spectrum windows is obtained, an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.

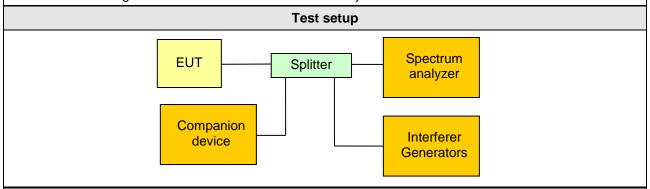

#### **Test procedure**

- 1. (Applies to EUTs that can initiate a communication session (e.g. portable parts)) The acknowledgement timeslots are blocked by interferer signals
- 2. An attempt to establish communication session is started from the EUT
- 3. The emissions from the EUT are monitored to verify that the EUT does not transmit for more than 1s
- 4. Next the acknowledgements are unblocked and another communication session is established between the EUT and the companion device
- 5. It is verified that the communication session is successful
- 6. (Applies to all EUTs) With all acknowledges unblocked, an communication session is initiated between the EUT and the companion device
- 7. The acknowledgements were blocked and the time the EUT continues to transmit is recorded



Test results				
Maximum initial transmission [s]	Transmission time limit [s]	Verdict		
0.513	1	PASS		
Maximum transmission time [s]	Transmission time limit [s]	Verdict		
7	30	PASS		
Comments:				



#### **Acknowledgments ANSI C63.17 - Acknowledgements UPCS EUT** Communication Headset AXP379 Model Sonetics Corporation Approval Holder Temperature / Voltage 24°C / Vnom Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke **Test Specification** ANSI C63.17 - Acknowledgements Comment 1 paragraph a) blocked acknowledgements from the companion device Comment 2 by blocking the Rx time slots from the companion device Comment 3 The EUT cease transmission on the communications channel after 513 ms, Limit: < 1second, Pass RBW 1 MHz Delta 1 [T1 ] VBW 3 MHz 0.26 dB SWT 2 s Ref 10 dBm \*Att 20 dB 513.000000 ms Marker 1 [T1 7.000000 ms 1 AF TRG Center 1.924992 GHz 200 ms/ \*RBW 30 kHz VBW 100 kHz Ref -5 dBm \* Att 20 dB \*SWT 300 ms 1 AP VIEW Center 1.924992 GHz Span 10 MHz Comment: Ansi C63.17-1998 6.1.6.2 26.SEP.2014 09:22:44




#### 3.24 Test Conditions and Results - Maximum transmit period

Maximum transmit period acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: I			
EUT requirement	Reference		
rule parts and clause	FCC 15.323(c)(3) / IC RSS-213 4.3.4(b)(3)		
Test according referenced	Reference Method		
standards	ANSI C63.17 8.2.2		

#### Requirements

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring.

However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

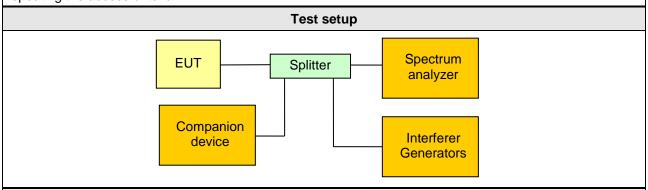

#### Test procedure

- 1. A communication session is established between the EUT and the companion device.
- 2. With the beginning of the communication session a counter is stared
- 3. An interferer is introduced on the communication channel to force the EUT to select a different communication channel if the communications has to be reestablished
- 4. As soon as the communication session switches to a different channel the time measurement is stopped

Test results				
Total transmission time [h] Transmission time limit Verdict				
3.55	8 hours	N/A		

#### Comments:

For the DECT system the communication session is established by the portable part and the fixed part simply follows the portable part. Hence it's the responsibility of the portable part to control the maximum transmit period.



Comments:

#### 3.25 Test Conditions and Results – Maximum spectral occupancy

Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PASS				
EUT requirement	Reference			
rule parts and clause	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)			
Test according referenced	Reference Method			
standards	Customer declaration			
	Requirements			
No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.				
Test result				
Evalu	Verdict			
According to the technical documentation windows is: 5 x 12 = 60				
According to customer declaration the spectrum windows is: 12	PASS			
The number of concurrent allocated time third of the total time and spectrum windo				



and receive time and spectrum windows.


#### 3.26 Test Conditions and Results - Duplex connections

Duplex system LBT acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PA			
EUT requirement	Reference		
rule parts and clause	FCC 15.323(c)(10) / IC RSS-213 4.3.4(b)(10)		
Test according referenced	Reference Method		
standards	ANSI C63.17 8.3.2		
EUT implements upper threshold	Yes		
EUT is initiating device	Yes		
Requirements			

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit

If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window.

If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

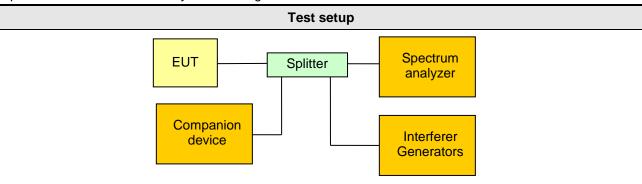

#### Test procedure (EUT does not implement upper threshold)

- 1. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 40 dB above  $T_L + U_M$
- 2. By the use of interference signals the EUT is restricted to channel f<sub>1</sub>
- 3. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
- 4. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows
- 5. It is verified that the interference levels at the companion device are at least 10 dB below T<sub>L</sub> for all time/spectrum windows
- 6. An attempt is made to establish a connection
- 7. Next an interference at  $T_L + U_M$  is applied to all enabled carriers on all it's time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
- 8. An interference of level T<sub>L</sub> + U<sub>M</sub> is applied per carrier on the enabled carriers on all its receive time/spectrum windows
- It is verified that the interference levels at the companion device are at least 10 dB below T<sub>L</sub> for all time/spectrum windows
- 10. An attempt is made to establish a connection



#### Test procedure (EUT implements upper threshold)

- 1. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 40 dB above  $T_L + U_M$
- 2. By the use of interference signals the EUT is restricted to channel f1
- 3. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
- 4. An interference of level  $T_L + U_M + 7dB$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$ . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
- 5. It is verified that the interference levels at the companion device are at least 10 dB below T<sub>L</sub> for all time/spectrum windows
- 6. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free receive time/spectrum window and its duplex mate
- 7. Next an interference of level  $T_L + U_M + 7dB$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
- 8. An interference of level T<sub>L</sub> + U<sub>M</sub> is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below T<sub>L</sub>. The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
- It is verified that the interference levels at the companion device are at least 10 dB below T<sub>L</sub> for all time/spectrum windows
- 10. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free transmit time/spectrum window and its duplex mate
- 11. Next an interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below  $T_L$
- 12. An interference of level  $T_L + U_M$  is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below  $T_L$ . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
- 13. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 30 dB above T<sub>II</sub>
- 14. An attempt is made to establish a connection and it is verified that no connection can be established

Test results – upper threshold not implemented					
Transmit time/spectrum windows	Receive time/spectrum windows	Connection possible	Verdict		
$T_L + U_M$	$T_L + U_M$	No	N/A		
$T_L + U_M$	$T_L + U_M$	No	N/A		
Test results – upper threshold implemented					
Transmit time/spectrum windows	Receive time/spectrum windows	Connection time/spectrum window	Verdict		
T <sub>L</sub> + U <sub>M</sub>	$T_L + U_M + 7dB$	Receive	PASS		
$T_L + U_M + 7dB$	$T_L + U_M$	Transmit	PASS		
T <sub>L</sub> + U <sub>M</sub>	$T_L + U_M$	None	PASS		
Comments:					



#### 3.27 Test Conditions and Results - Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PASS				
EUT requirement	Reference			
rule parts and clause	FCC 15.323(c)(11) / IC RSS-213 4.3.4(b)(11)			
Test according to	Reference Method			
measurement reference	Customer declaration			
Requirements				
The provisions of FCC 47 CRF 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CRF 15.323(c)(11), IC RSS-213(b)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.				
Declaration				
The manufacturer declares that is device does not work in a mode which denies fair access to spectrum for other participants				




#### 3.28 Test Conditions and Results - Frame period and Jitter

Frame period and Jitter acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PASS			
EUT requirement	Reference		
rule parts and clause	FCC 15.323(e)(1),(4) / IC RSS-213 4.3.4(c)(1),(4)		
Test according referenced	Reference Method		
standards	ANSI C63.17 6.2.3		
Requirements			

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this sub-band shall be 20 milliseconds/X where X is a positive whole number.

The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.

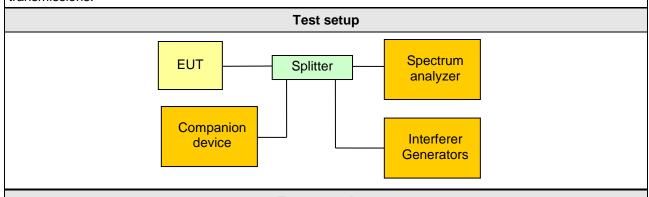

#### **Test procedure**

- 1. With a spectrum analyzer the frame periods are measured over time
- 2. 100 000 frames are measured

3. The the peak-to-peak, mean and standard deviation values are computed					
Test results – Frame period					
Mean value [ms] Divider X (10ms/X) Verdict					
9.999988 = 10.00 - 0.000012 1 PASS					
Test results – Jitter					
Maximum difference between frames [µs] Limit [µs] Verdict					
0.069849 25 - 0.000012 = 24.999988 PASS					
Comments:					



#### Frame period and Jitter

#### FCC Part 15.323 Frame Period and jitter

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation

Temperature 23°C


Test Site / Operator Eurofins Product Service GmbH

Test Specification Frame Period and jitter

Width of the

 $\begin{array}{lll} \text{time class} & 0,002794 \; \mu \text{s} \\ \text{Mean} & 9,999895 \; \text{ms} \\ \text{Deviation} & 0,000012 \\ \text{Max-Min} & 0,069849 \; \mu \text{s} \\ \text{Test result} & \text{Verdict} = \text{PASS} \end{array}$ 

#### Histogram

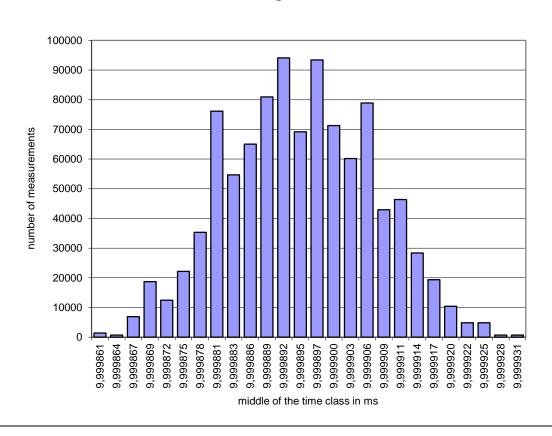




#### 3.29 Test Conditions and Results - Frame repetition stability

Frame repetition stability acc. to FCC 47 CFR 15D / IC RSS-213 Verdict: PAS			
EUT requirement	Reference		
rule parts and clause	FCC 15.323(e)(2),(3) / IC RSS-213 4.3.4(c)(2),(3)		
Test according referenced	Reference Method		
standards	ANSI C63.17 6.2.2		
Access scheme used Time Division Multiple Access			
Dominomento			

#### Requirements

Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm).

Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.

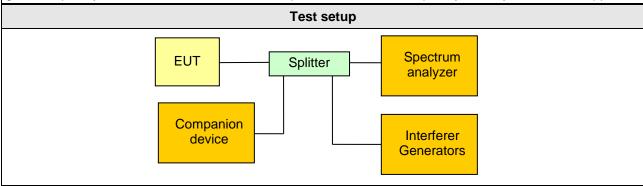

#### **Test procedure**

- 1. With a spectrum analyzer the frame repetition periods are measured over time
- 2. 1 000 frame repetitions are measured
- 3. The mean and standard deviation values are computed

Test results			
Access scheme	Error [ppm]	Limit [ppm]	Verdict
Time Division Access	N/A	50	N/A
Time Division Multiple Access	0.043350	10	PASS
Comments:			I



#### Frame repetition stability

#### FCC Part 15.323 Frame repetition

## Testprocedure ANSI 63.17 UPCS

EUT Communications Headset

Model AXP379

Applicant Sonetics Corporation

Temperature 23°C

Test Site / Operator Eurofins Product Service GmbH

Test Specification Frame repetition

Width of the

 frequency class
 0,000000 Hz

 Mean
 99,999820 Hz

 Deviation
 0,000001

 Stability in ppm
 0,043350 ppm

 Test result
 Verdict = PASS

#### Histogram

