

# **FCC (USA)/ISED (Canada) TEST REPORT**

**FCC 47 CFR Part 15C**

**Industry Canada RSS-247**

**Frequency hopping systems operating within the 2400 –  
2483.5 MHz band**

Report Reference No: SON20221114  
Testing Laboratory: ElectroMagnetic Investigations, LLC  
Address: 8531 NE Cornell Road. Suite 600, Hillsboro, OR, USA  
Accreditation: A2LA Accredited Testing Laboratory

Applicant's name: Sonetics Corporation  
Address: 17600 SW 65th Ave.  
Lake Oswego OR 97035  
United States

Testing specification

Standard: FCC 47 CFR Part 15C  
RSS-247  
RSS-Gen  
ANSI C63.10 :2013  
ANSI C63.4 :2014  
Equipment Under test (EUT): Gen 3.9 Wireless Headset  
Serial Number: APX37-9V2-FW-002  
Product description: DECT headset with Listen through capability and Bluetooth connectivity  
Model No. APX.V2  
Hardware version: APX.V2  
Firmware / Software version: N/A  
FCC ID: V9N950350000  
IC ID: 7895A-950350000  
Test result: Passed

#### Possible test case verdicts

Neither assessed nor tested:	N/N
Required by standard but not applicable:	N/A
Required by standard but not tested:	NOT PERFORMED
Not required by standard:	N/R
EUT meets the requirement:	P (Pass)
EUT does not meet the requirement:	F (Fail)

#### Testing

Test Lab Temperature:	20 – 28 C
Test Lab Humidity:	30 – 38 %
Date EUT received:	November 14, 2022
Date(s) of performance of tests:	November 14, 2022 to June 28, 2023
Complied by:	Ryan Benitez 

Tested by:	Ryan Benitez
Approved by:	Henry Benitez 

Date of issue:	June 28, 2023
Total number of pages:	72

#### General remarks

The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without written approval of the issuing test laboratory.

## Revision History

Version	Date Issued	Description of Revision

## Authorizations

**FCC (USA):** Accepted by FCC for performance of radiated emissions and conducted emissions measurements. FCC ID: US1092.

**Industry Canada:** Accepted by Industry Canada for performance of radiated emissions and conducted emissions measurements. ISED Canada CAB ID US0203.

**European Union (CE):** ElectroMagnetic Investigations, LLC is equipped and capable of performing EMC CE compliance testing to European Union EMC CE requirements for Information Technology Equipment (ITE), Measurement, Control and Laboratory Equipment (MCL), and other equipment.

**American Association of Lab Accreditations (A2LA):** ElectroMagnetic Investigations is accredited to perform the tests contained within this report to the standards listed.



Certificate #2569.01

## Report Index

- 1      Equipment (Test item) Description
  - 1.1 Photos – Equipment external
  - 1.2 Photos - Equipment internal
  - 1.3 Photos – Test setup
  - 1.4 Supporting equipment used during testing
  - 1.5 Test modes
  - 1.6 Test equipment used during testing
  - 1.7 Sample of emissions level calculations
- 2      Result Summary
- 3      Test Conditions and results
  - 3.1      Antenna requirement
  - 3.2      AC Power line conducted emissions
  - 3.3      Occupied Bandwidth
  - 3.4      20 dB Bandwidth
  - 3.5      Number of hopping frequencies
  - 3.6      Frequency hopping channel separation
  - 3.7      Time of occupancy (Dwell time)
  - 3.8      Peak Transmit Power
  - 3.9      Band edge
  - 3.10     Conducted spurious emissions
  - 3.11     Radiated spurious emissions

## 1 Equipment (Test item) description

Description: DECT headset with Listen through capability and Bluetooth connectivity

Model: APX.V2

Brand Name(s): Sonetics Corporation

Serial number: None

Hardware version: N/A

Software / Firmware version: N/A

FCC-ID:

IC:

Equipment type: End product

Radio type: Transceiver

Number of radios: 1 DECT transceiver built into device and 1 Bluetooth transceiver built into device

Radio technology: Bluetooth

Operating frequency range: 2402 – 2480 MHz

Assigned frequency band: 2400 – 2483.5 MHz

Number of RF channels: 79 hopping channels

Main test frequencies

$F_{low}$	2402 MHz
$F_{mid}$	2441 MHz
$F_{high}$	2480 MHz

Spreading FHSS

Modulations GFSK

Channel spacing 1 MHz

Number of antennas 1

Antenna	Type	integrated
	Model	W3008
	Manufacturer	Pulse
	Gain	1.1 dBi
Manufacturer	Sonetcs Corporation 17600 SW 65th Ave. Lake Oswego OR 97035 United States	
Power supply	$V_{\text{nom}}$	12 V DC
	$V_{\text{min}}$	4.5 V DC
	$V_{\text{max}}$	15 V DC
AC/DC adaptor	Model	YMC06-3U
	Vendor	Ji Ming
	Input	100-240 V AC 50/60 Hz
	Output	12 V DC
Temperature	$T_{\text{nom}}$	20 C
	$T_{\text{min}}$	-20 C
	$T_{\text{max}}$	50 C

1.1 Photos – Equipment external

See dedicated report

1.2 Photos – Equipment internal

See dedicated report

1.3 Photos – Test setup

See dedicated report

1.4 Supporting equipment used during testing

Product type*	Device	Manufacturer	Model No.	Comments
		None		

\*Note: Use the following abbreviations:  
AE : Auxiliary/Associated Equipment  
SIM : Simulator (Not Subject to Test)  
CABL : Connecting cables

## 1.5 Test modes

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered by battery.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 78% Power level = Maximum
DH5-Hop	General conditions:	EUT powered by battery.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 78% Power level = Maximum
Receive	General conditions:	EUT powered by battery.
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT powered by AC/DC-Adaptor
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

1.6 Test equipment used during testing

Conducted				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4440A	2023/05/12	2024/05/13
Signal generator	R&S	SME06	2021/09/03	2026/09/03

Radiated spurious emissions				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4440A	2022/01/28	2023/07/28
Antenna	Com-Power	AC-220	2021/08/30	2023/08/30
Antenna	Com-Power	AHA-118	2021/08/24	2023/08/24
Antenna	Com-Power	AH-1840	2022/11/11	2027/11/11
Pre-Amp	Amplifier Research	LN1000	2023/02/18	2024/02/18

AC powerline conducted emissions				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4443A	2023/01/30	2026/01/30
LISN	Fischer Custom Communications	FCC-50-50-04-02	2020/12/08	2025/12/08

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to specific data taken for the product described in this document:

## Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric field strength to voltage that can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on analyzer (dB $\mu$ V) + A.F. (dB) = Net field strength (dB $\mu$ V/m)

## Measurement Uncertainty:

### *Test Measurement uncertainties (k=2.05):*

*Radiated Field strength at 3m measured with:*

*Bilog Antenna (30 MHz – 1 GHz)..... ±5.6 dB*

*Horn Antenna (1-18 GHz) .....*  $\pm 4.0$  dB

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log(\mu\text{V/m})$$

## Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A positive margin indicates the emission was below the limit. A negative margin indicates that the emission exceeds the emission was below the limit.

Example only:

$$\text{Reading + A.F.} = \text{Net Reading} : \text{FCC limit - Net reading} = \text{Margin}$$

$$21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = 47.5 \text{ dB}\mu\text{V/m} : 57.0 \text{ dB}\mu\text{V/m} - 47.5 \text{ dB}\mu\text{V/m} = 9.5 \text{ dB}$$

## 2 Result summary

Section	Requirement - Test	FCC	IC	ANSI	Result
3.1	Antenna requirement	15.207 & 15.247(c)	RSS-GEN 6.3	N/A	PASS
3.2	AC power line conducted emissions	15.207(a)	RSS-213 5.4 RSS-Gen 8.8	C63.10 6.2	PASS
3.3	Occupied Bandwidth	N/A	RSS-GEN 6.7	C63.10 7.8.7	PASS
3.4	20 dB Bandwidth	15.247(a)(1)	RSS-247 5.1(b)	C63.10 7.8.7	PASS
3.5	Number of hopping frequencies	15.247(a)(1)(iii)	RSS-247 5.1(d)	C63.10 7.8.3	PASS
3.6	Frequency hopping channel separation	15.247(a)(1)	RSS-247 5.1(b)	C63.10 7.8.3	PASS
3.7	Time of occupancy (Dwell time)	15.247(a)(1)(iii)	RSS-247 5.1(d)	C63.10 7.8.4	PASS
3.8	Peak Transmit Power	15.247(b)(3)	RSS-247 5.1(b)	C63.10 7.8.5	PASS
3.9	Band edge	15.247(d)	RSS-247 5.5	C63.10 7.8.8 & 11.13.3.2	PASS
3.10	Conducted spurious emissions	15.247(d)	RSS-247 5.5	C63.10 7.8.6 & 11.11	PASS
3.11	Radiated spurious emissions	15.209 15.247(d)	RSS-247 5.5	C63.10 6.4, 6.5, 6.6 & 6.10.5	PASS

N/T – Not tested and not included in the scope of this test report.

### 3 Test conditions and results

#### 3.1 Antenna requirement

Antenna requirement		Verdict: PASS	
Test according to Rule parts and clause	Reference	FCC 15.207, FCC 15.247(c), RSS-GEN 6.3	
Test according to measurement reference	Reference Method	Visual inspection & declaration	
Requirements			
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated based on measurement or on data from the measured RF output power before using the power limits.</p>			
Results			
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3 dBi
1	internal	1.1	0
Comment:			

### 3.2 Test conditions and results – AC power line conducted emissions

Conducted emissions		Verdict: PASS		
Test according to Rule parts and clause		Reference		
		FCC 15.207(a), RSS-Gen 8.8		
Test according to measurement reference		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Points of Application		Application Interface		
AC Mains		LISN		
EUT test mode		AC-Powerline		
Limits and results				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 0.5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: *Limit decreases linearly with the logarithm of the frequency.				

#### Measurement Uncertainty

*Test Measurement uncertainties (k=2.05):*

*Radiated Field strength at 3m measured with:*

*Bilog Antenna (30 MHz – 1 GHz) ..... ±5.6 dB*


*Horn Antenna (1-18 GHz) ..... ±4.0 dB*

## CONDUCTED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Test Report - 06/30/2021			
Customer:	Sonetechs	Job Reference#:	SON20221113
Contact:	Michael Barger	Date:	11/14/2022
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20.9
Serial Number:	1	Relative Humidity (%):	30
Voltage/Freq:	120 V 60 Hz	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C	N/A	
Test Standard:	FCC Part 15.207		
TEST RESULTS	TEST TYPE	LINE	RUN #


TEST RESULTS	TEST TYPE	LINE	RUN #
Pass	Compliance	Line	1

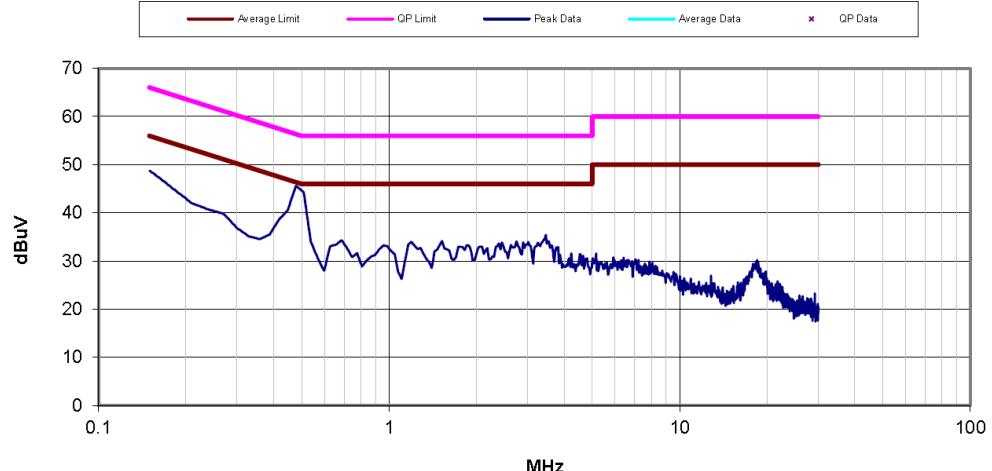

## CONDUCTED EMISSIONS DATA SHEET


Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221113
Contact:	Michael Barger	Date:	11/14/2022
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20.9
Serial Number:	1	Relative Humidity (%):	30
Voltage/Freq:	120 V 60 Hz	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.207		
TEST RESULTS	TEST TYPE	LINE	RUN #
Pass	Compliance	Neutral	1

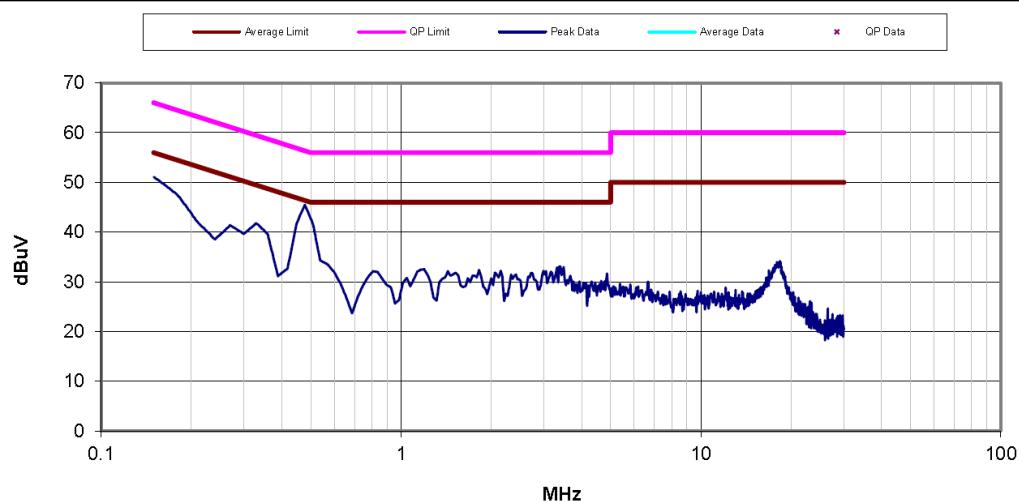


### 3.3 Test conditions and results – Occupied bandwidth

Occupied Bandwidth		Verdict: PASS
Test according to Rule parts and clause		Reference Method IC RSS-GEN 6.7
Test according to measurement reference		Reference Method ANSI C63.10 7.8.7
Tested frequencies		$F_{LOW}$ / $F_{MID}$ / $F_{HIGH}$
EUT test mode		DH5-Sngl
Test results		
Channel	Center frequency [MHz]	99% Occupied Bandwidth [MHz]
$F_{LOW}$	2402	0.8315
$F_{MID}$	2441	0.8365
$F_{HIGH}$	2480	0.8330
Comments:		

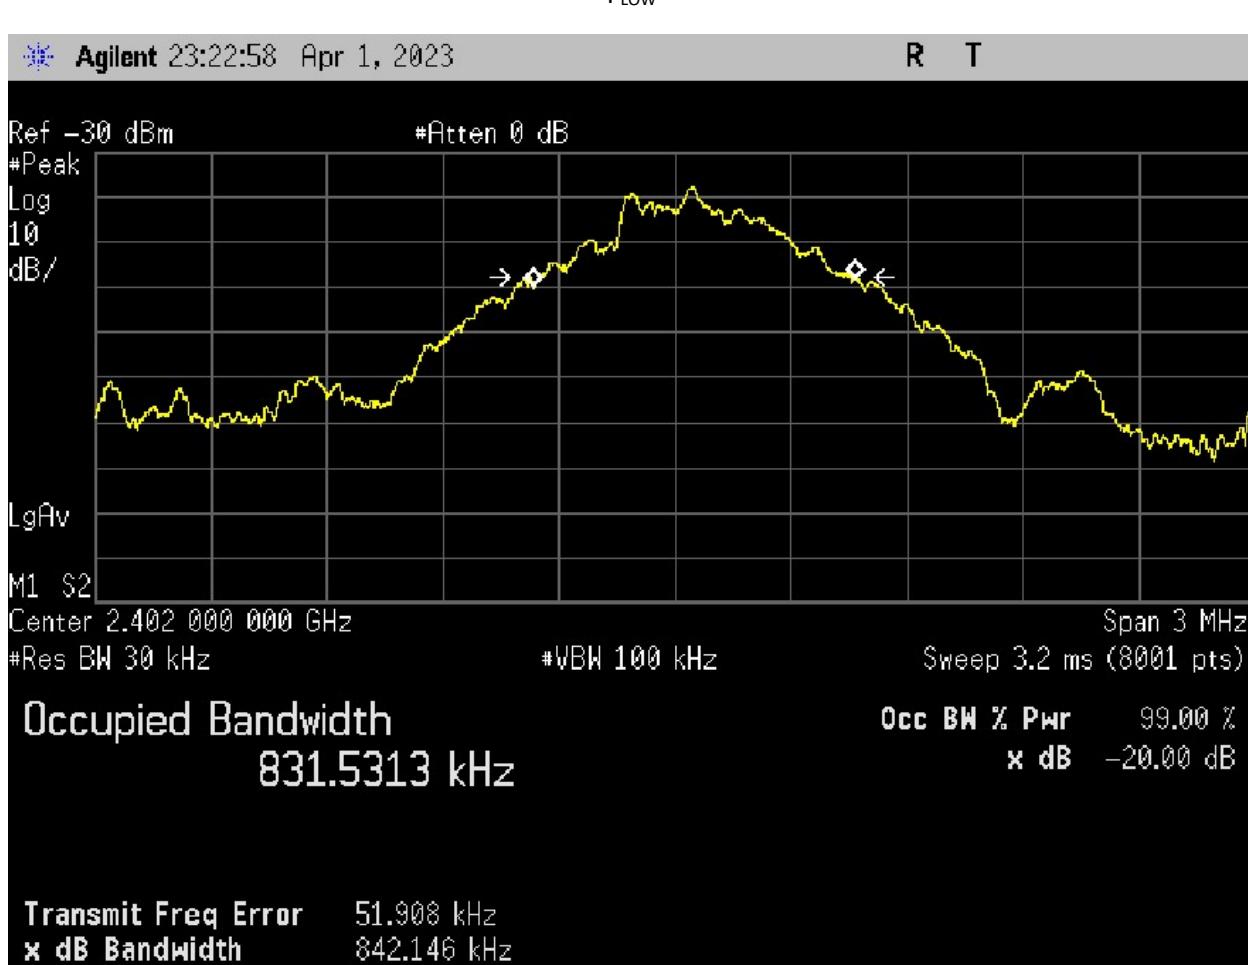




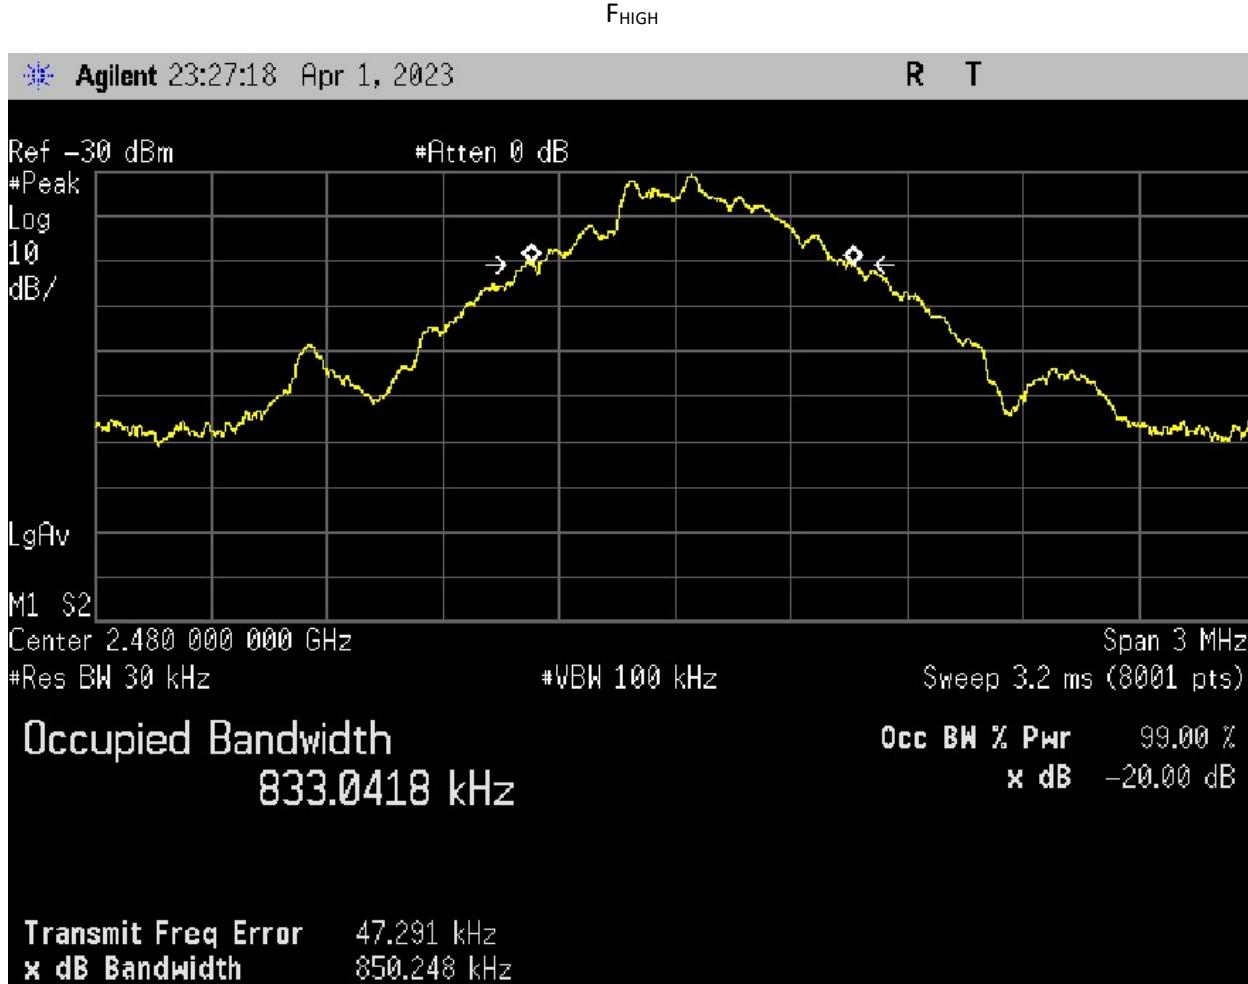

### 3.4 Test conditions and results – Emission Bandwidth

Emission Bandwidth		Verdict: PASS		
Test according to Rule parts and clause	Reference			
	FCC 15.247(a)(1), IC RSS-247 5.1(b)			
Test according to measurement reference	Reference Method			
	ANSI C63.10 7.8.7			
Tested frequencies	$F_{\text{LOW}}$ / $F_{\text{MID}}$ / $F_{\text{HIGH}}$			
EUT test mode	DH5-Sngl			
Limits				
Emission Bandwidth < 1.5 MHz				

Test results		
Channel	Center frequency [MHz]	20 dB Bandwidth [MHz]
$F_{\text{LOW}}$	2402	0.8421
$F_{\text{MID}}$	2441	0.8385
$F_{\text{HIGH}}$	2480	0.8502
Comments:		

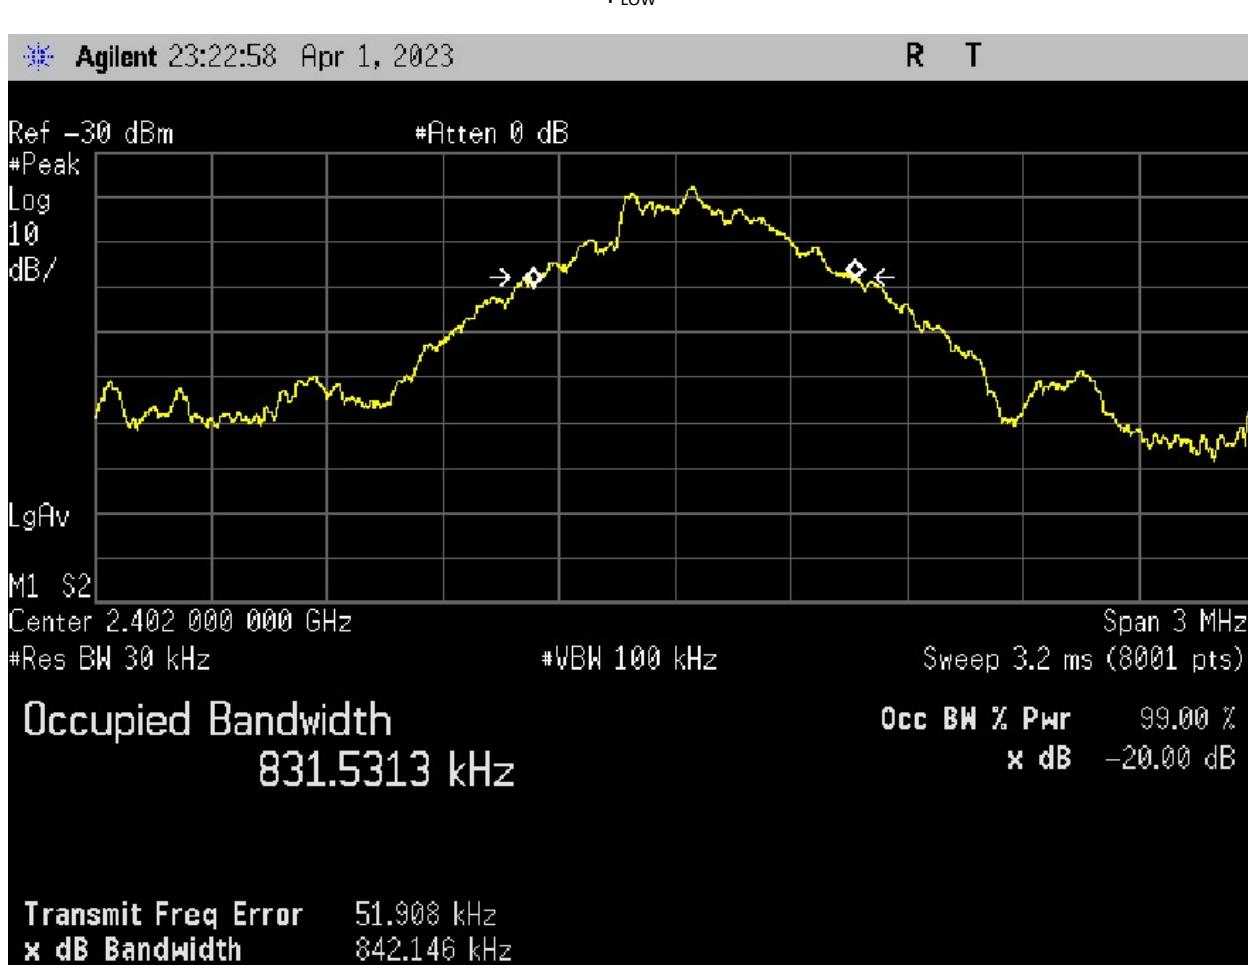

$F_{mid}$







### 3.5 Number of Hopping Frequencies

Number of Hopping Frequencies		Verdict: PASS
Test according to Rule parts and clause		Reference
		FCC 15.247(a)(1)(iii) / IC RSS-247 5.1(d)
Test according to measurement reference		Reference Method
		ANSI C63.10 7.8.3
Tested frequencies		$F_{LOW} / F_{HIGH}$
EUT test mode		DH5-Hop
Test results		
Number of hopping frequencies	Limit	Result
79	$\geq 15$	PASS
Comments:		


Hopping frequencies 0-24

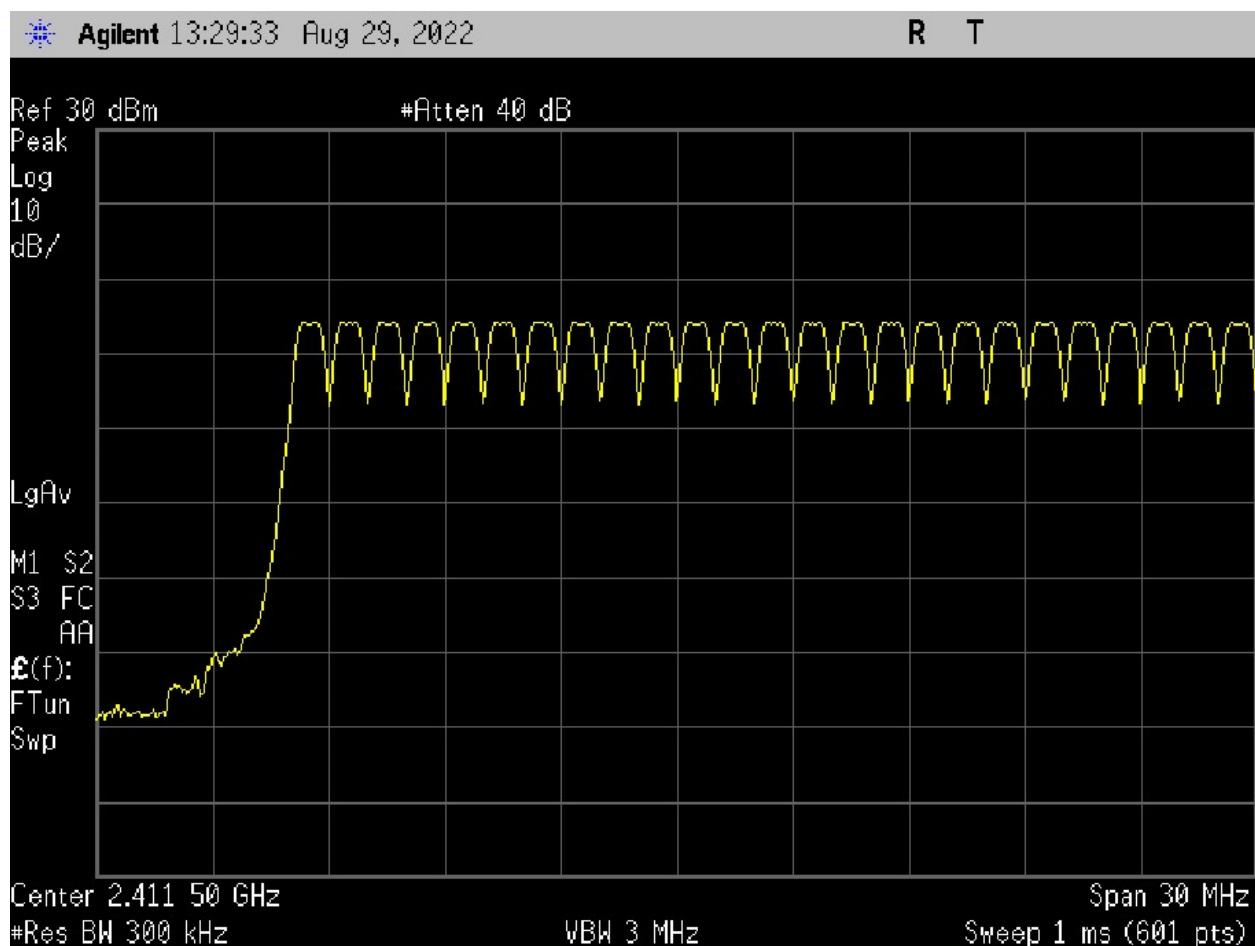

Hopping frequencies 25-54

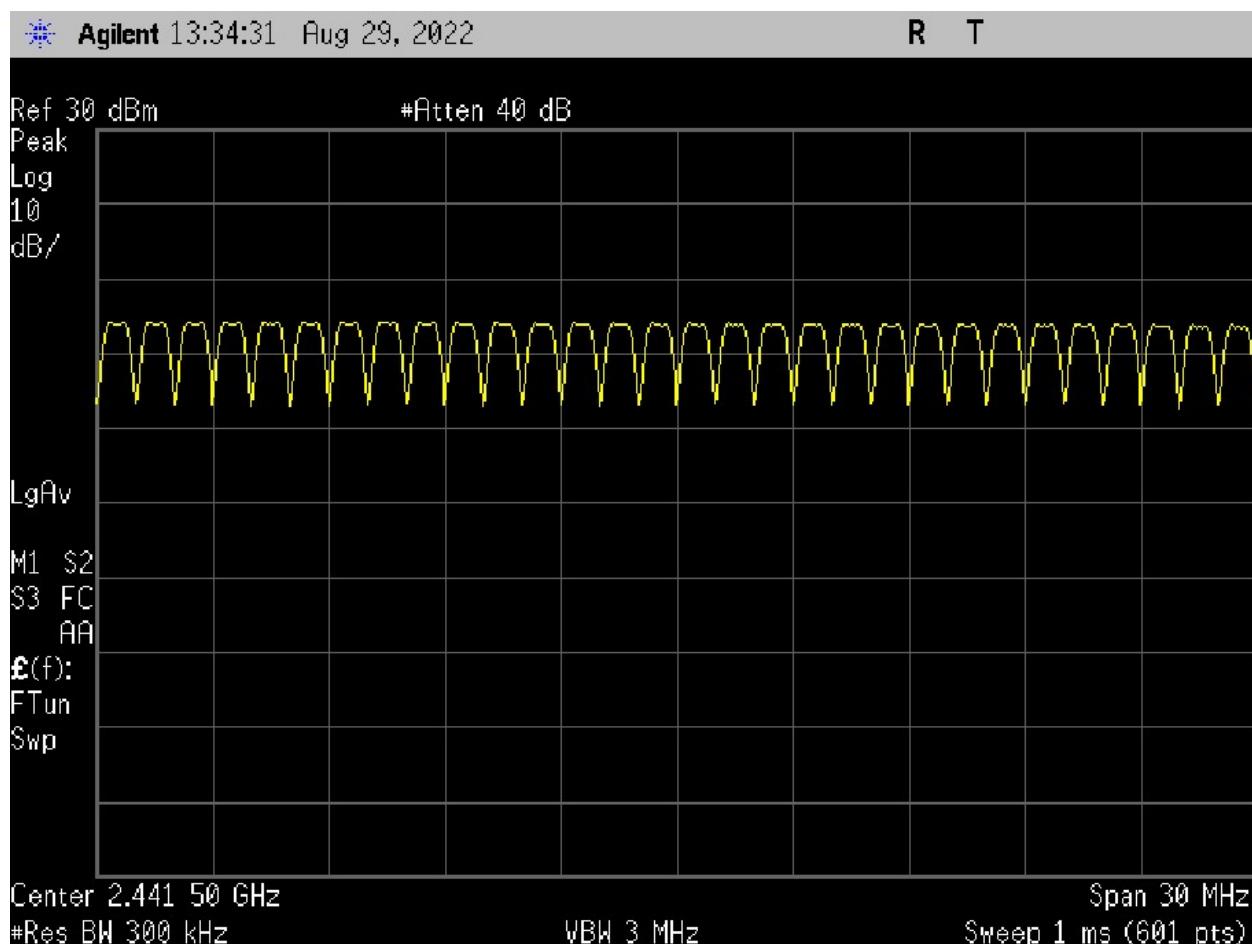


Hopping frequencies 55-78

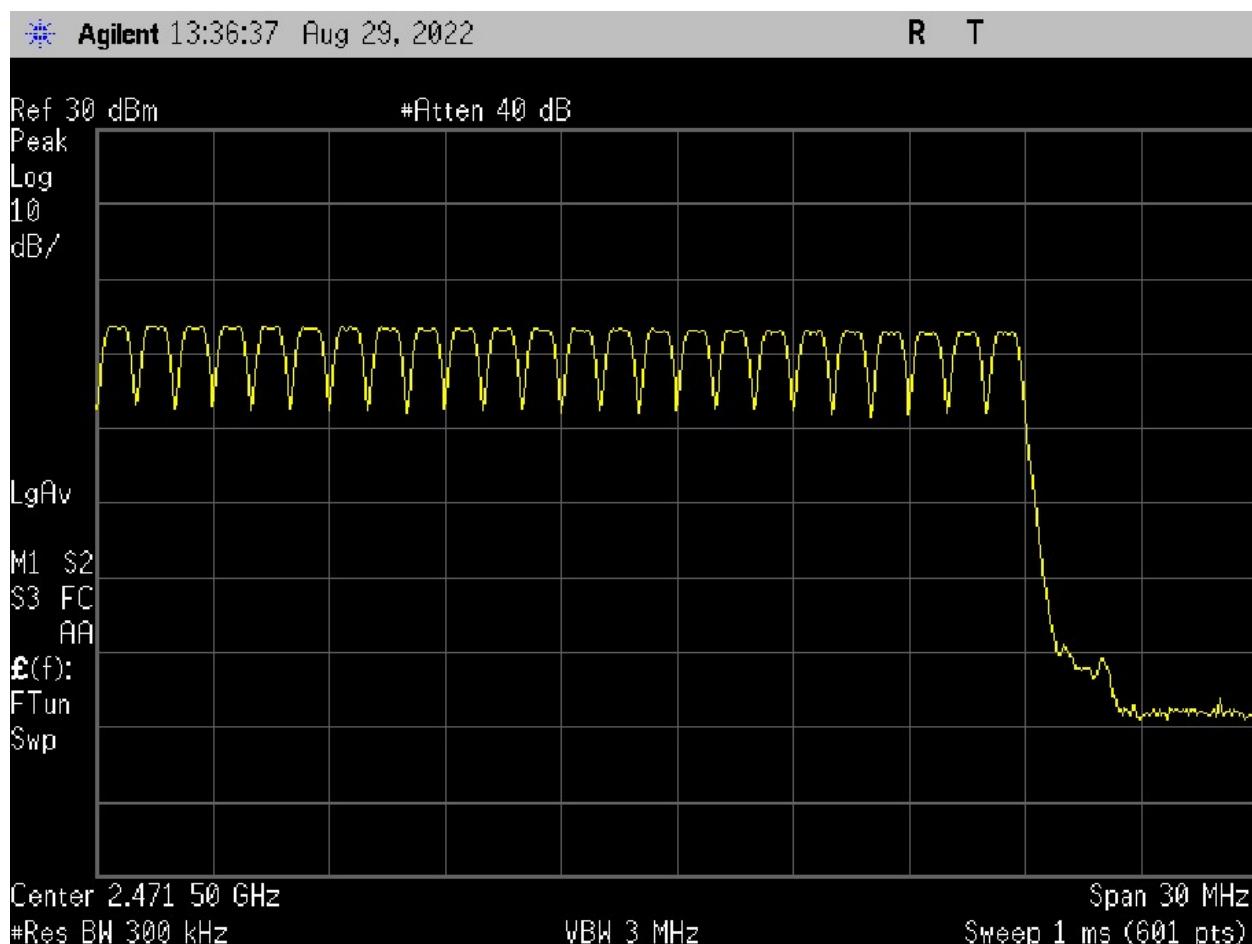

### 3.6 Frequency Hopping channel separation


Number of Hopping Frequencies		Verdict: PASS
Test according to Rule parts and clause		Reference
		FCC 15.247(a)(1) / IC RSS-247 5.1(d)
Test according to measurement reference		Reference Method
		ANSI C63.10 7.8.3
Tested frequencies		2441 & 2442 MHz
EUT test mode		DH5-HOP
Test results		
Channel separation [kHz]	Limit	Result
983	>= 616.66	PASS
Comments:		

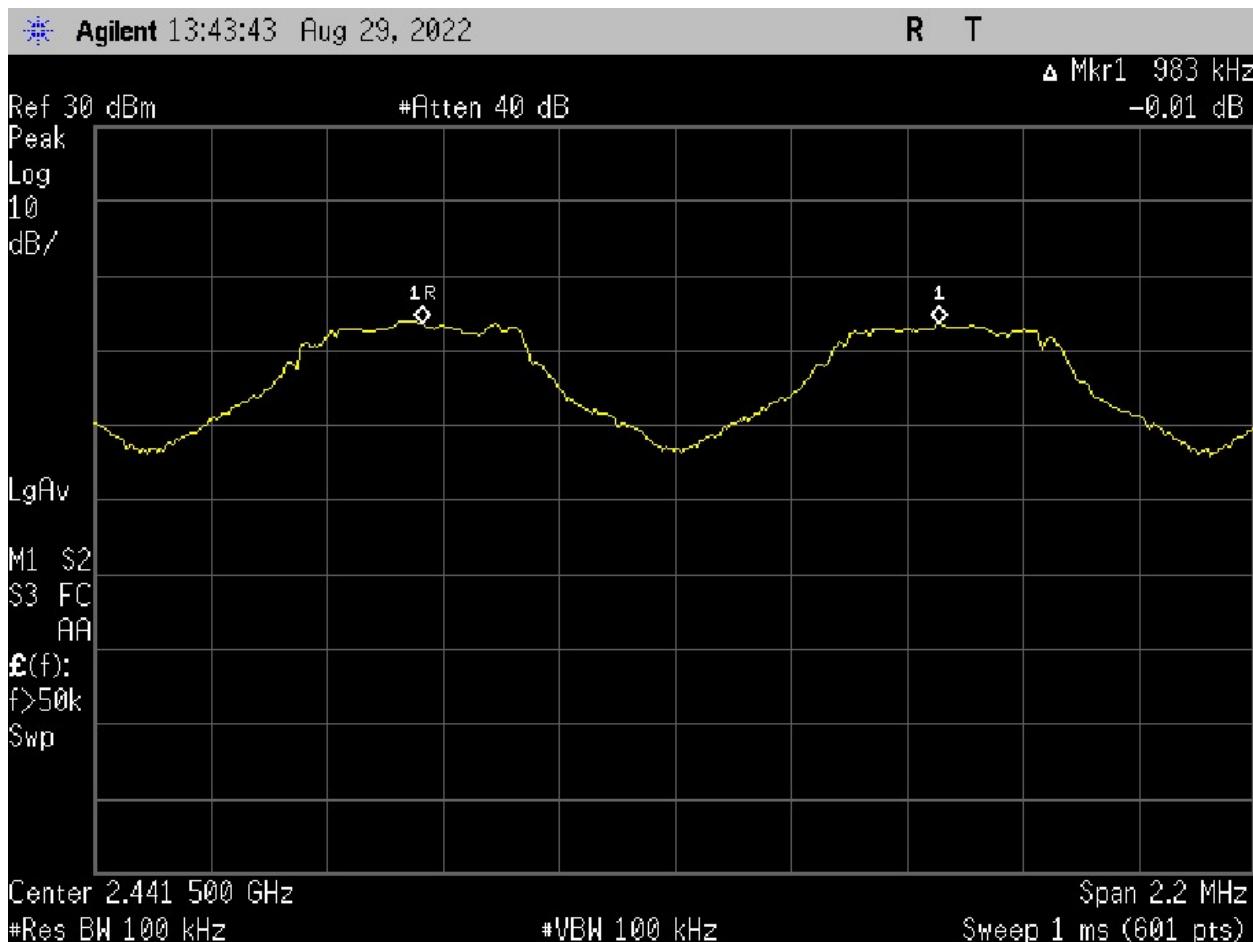


### 3.7 Time of occupancy (Dwell time)


Time of occupancy (Dwell time)					Verdict: PASS
Test according to Rule parts and clause		Reference FCC 15.247(a)(1)(iii) / IC RSS-247 5.1(d)			
Test according to measurement reference		Reference Method ANSI C63.10 7.8.3			
Tested frequencies		2441 MHz			
Test results					
EUT test mode	Observation period [s]	No. of hops	Dwell time/hop [ms]	Time of occupancy [ms]	Limit [ms]
DH1	3.16 * 10	320	0.4207	134.624	<= 400
DH3	3.16 * 10	160	1.667	266.72	<= 400
DH5	3.16 * 10	110	2.918	320.98	<= 400
2-DH1	3.16 * 10	320	0.4269	136.608	<= 400
2-DH3	3.16 * 10	160	1.68	268.8	<= 400
2-DH5	3.16 * 10	110	2.934	322.74	<= 400
3-DH1	3.16 * 10	320	0.427	136.64	<= 400
3-DH3	3.16 * 10	160	1.678	268.48	<= 400
3-DH5	3.16 * 10	110	2.928	322.08	<= 400
Comments:					


DH1

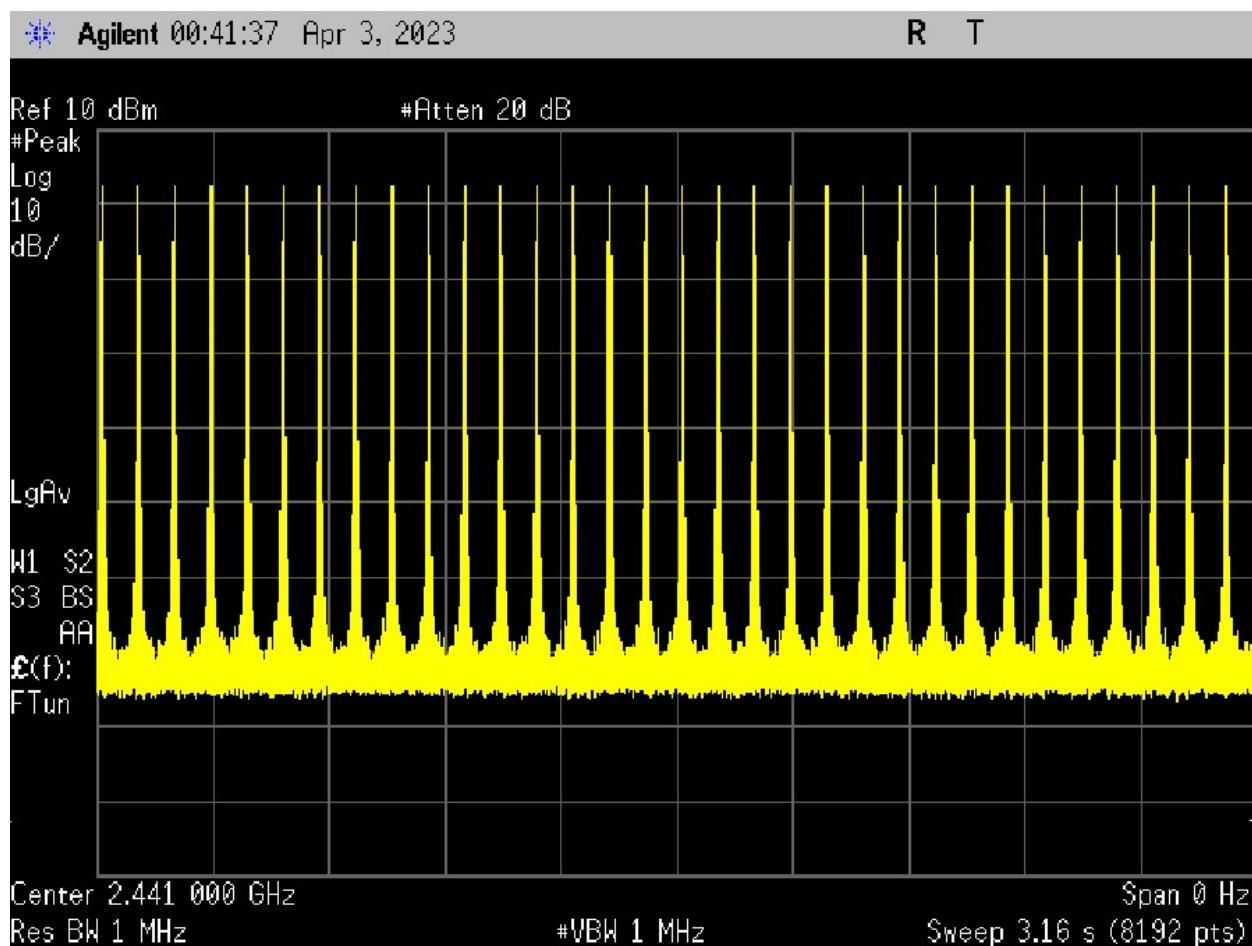

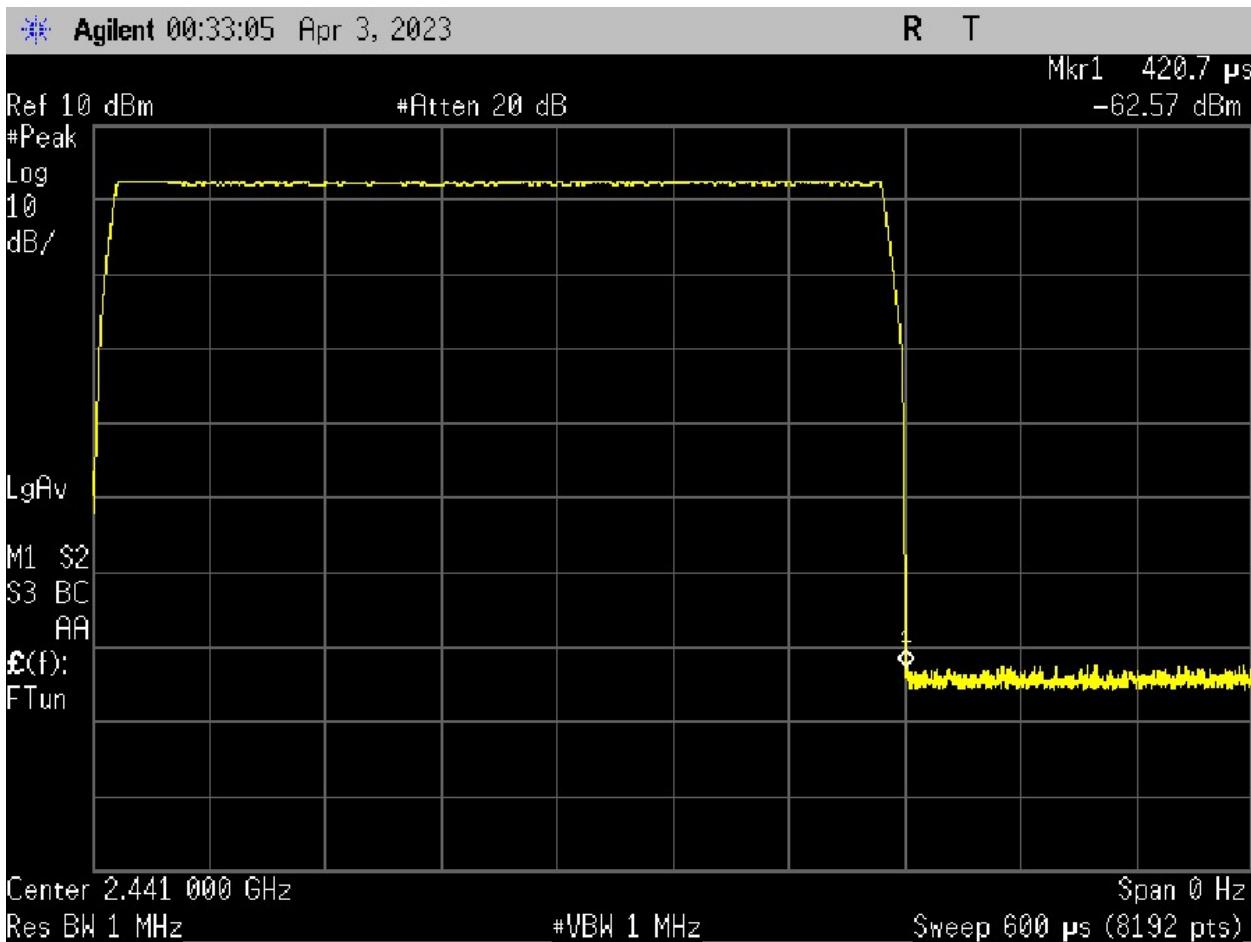



DH3

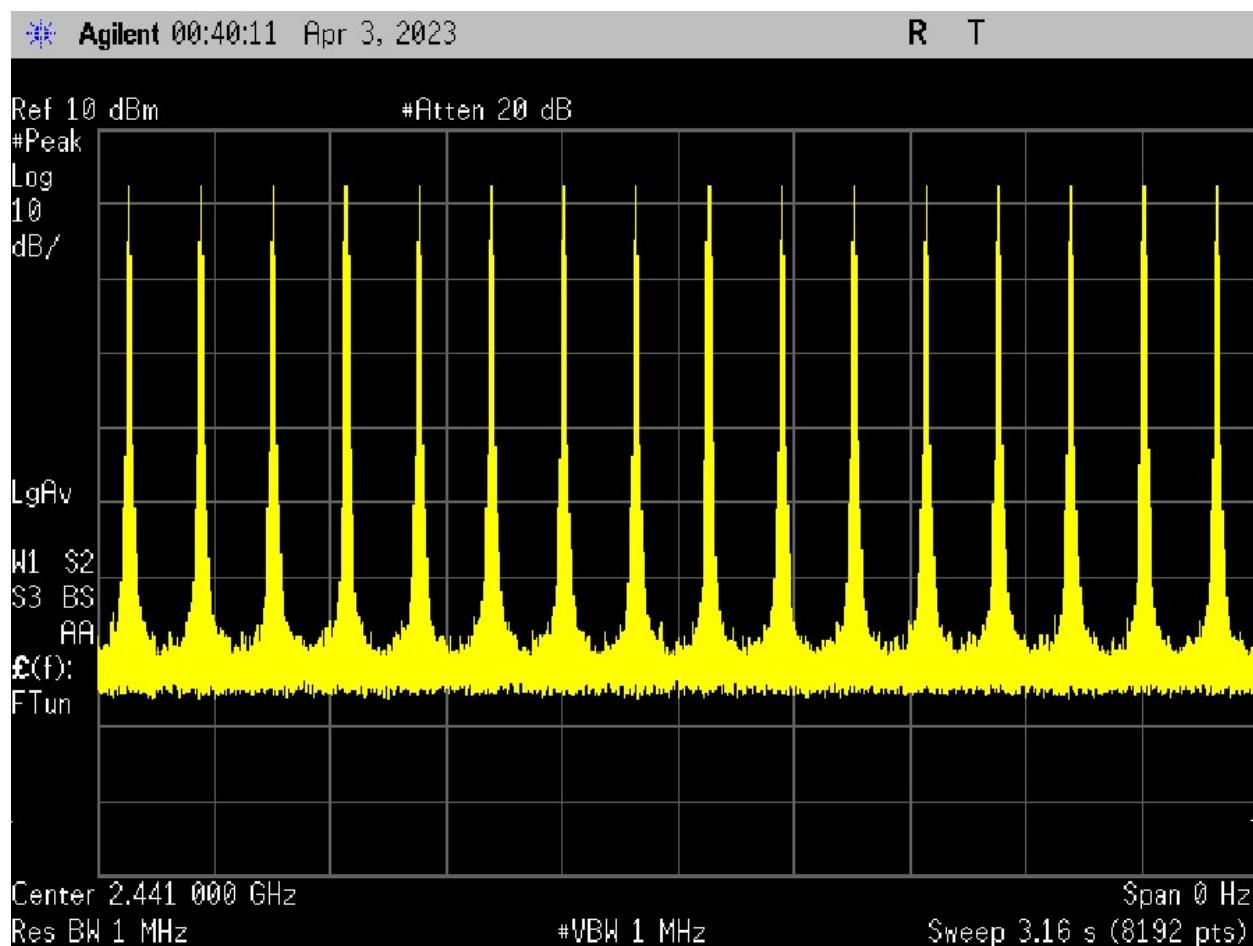

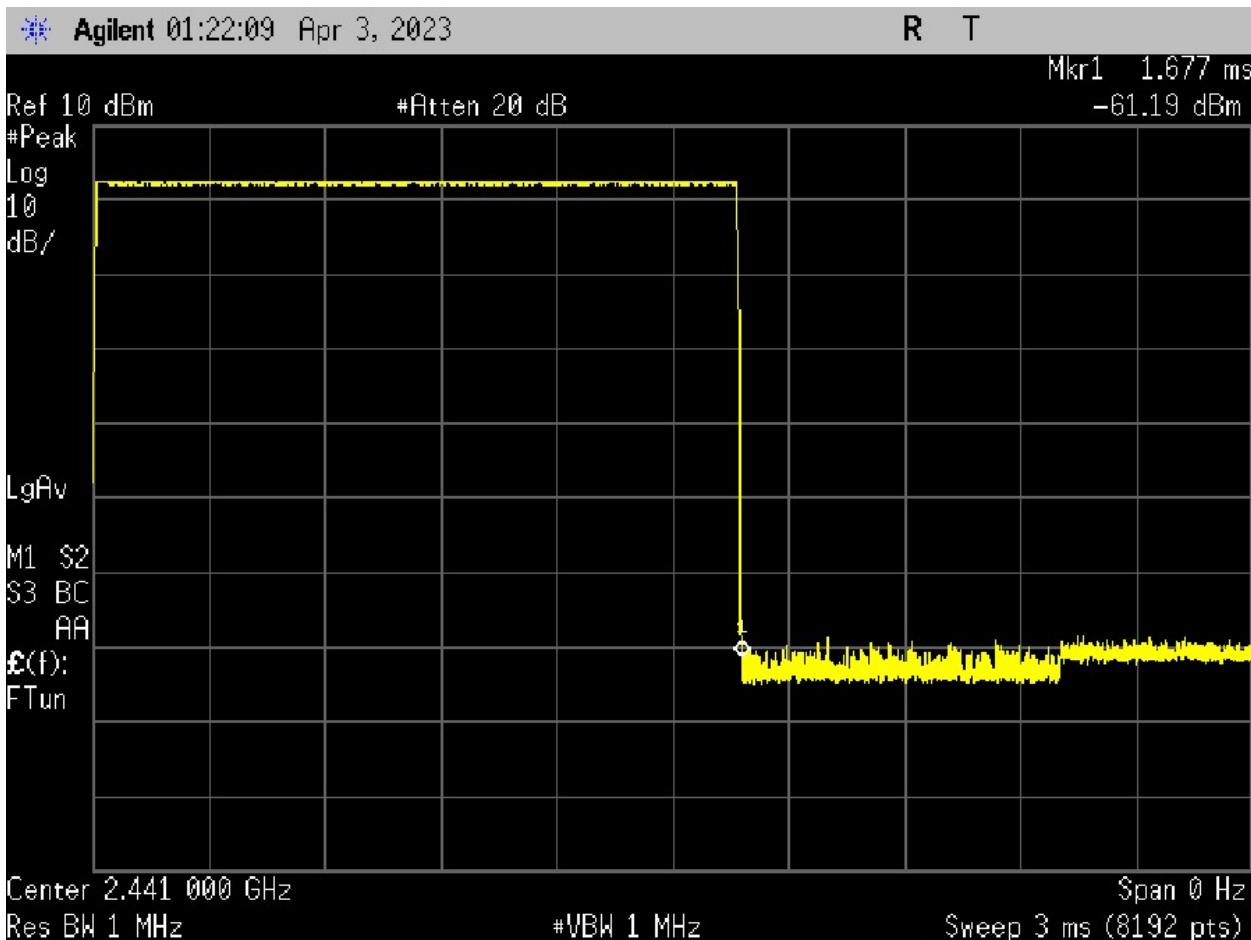



DH5

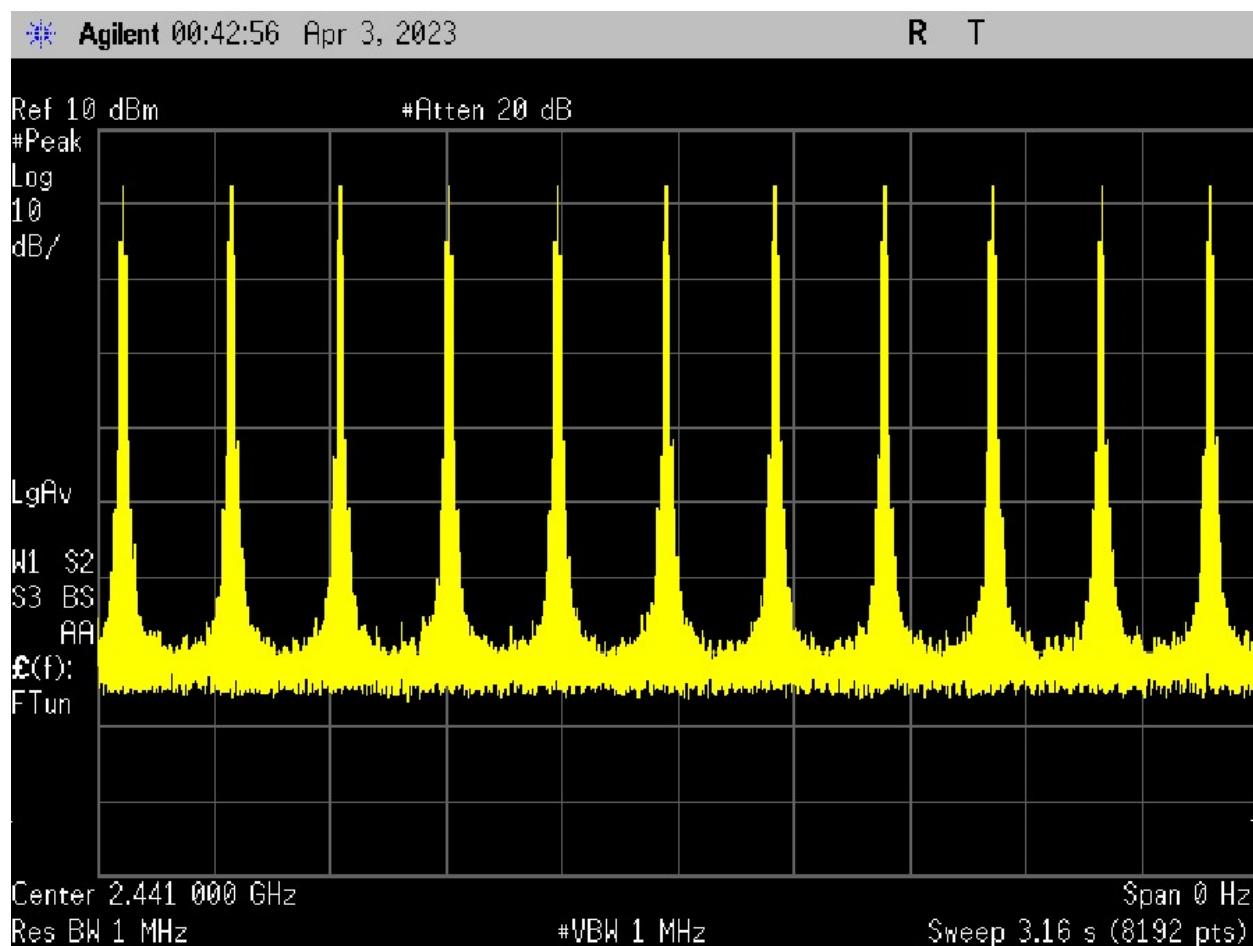

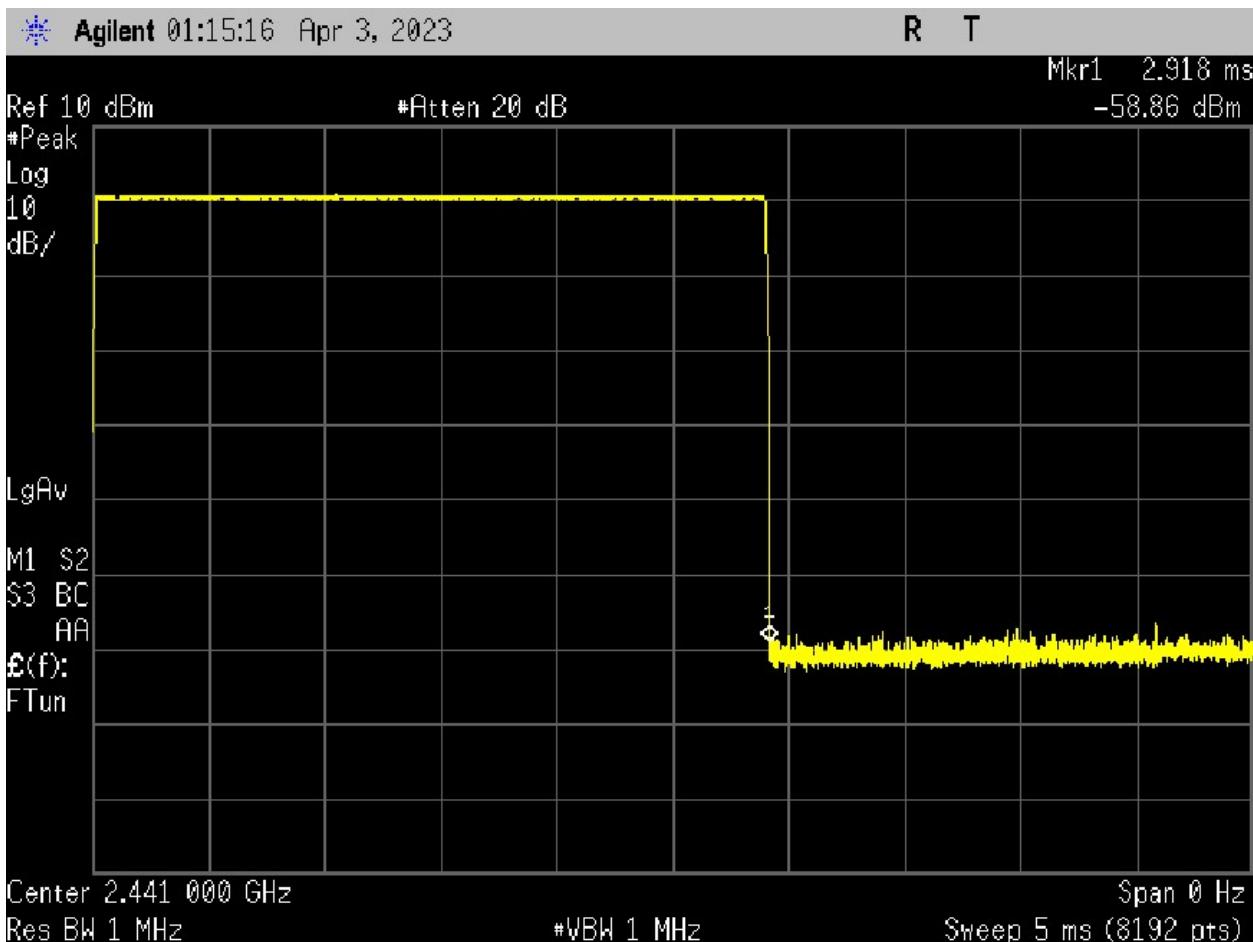



2-DH1

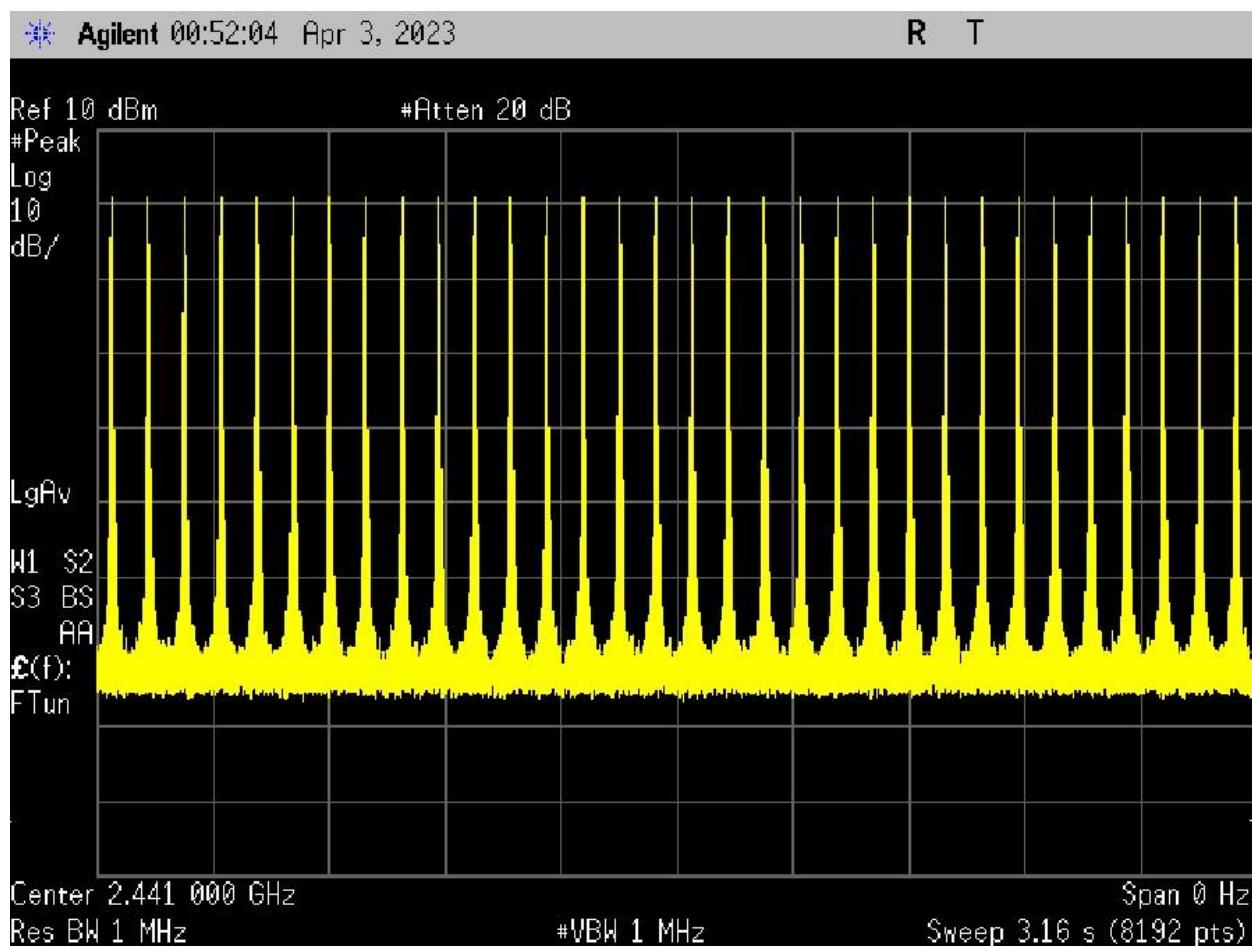

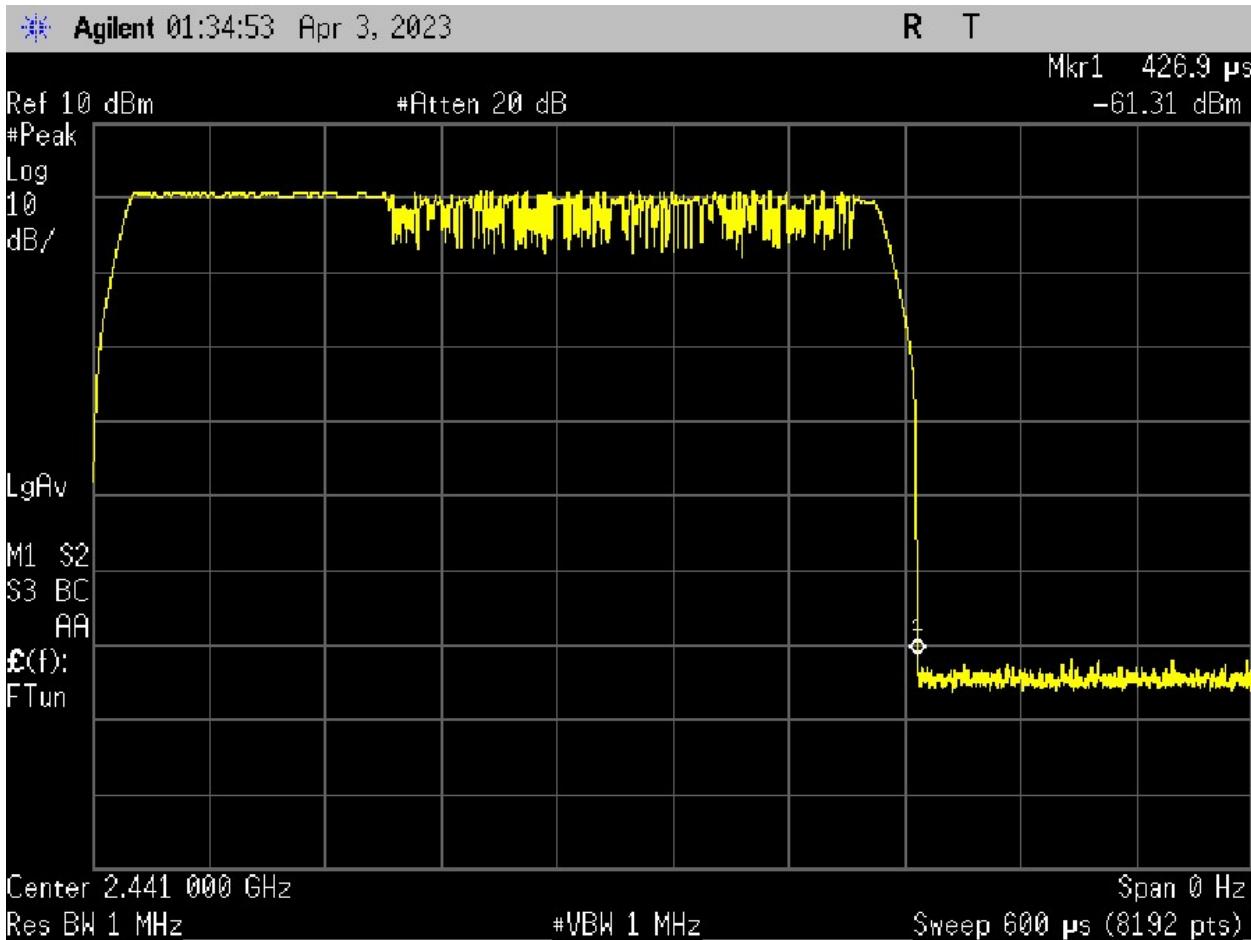



2-DH3

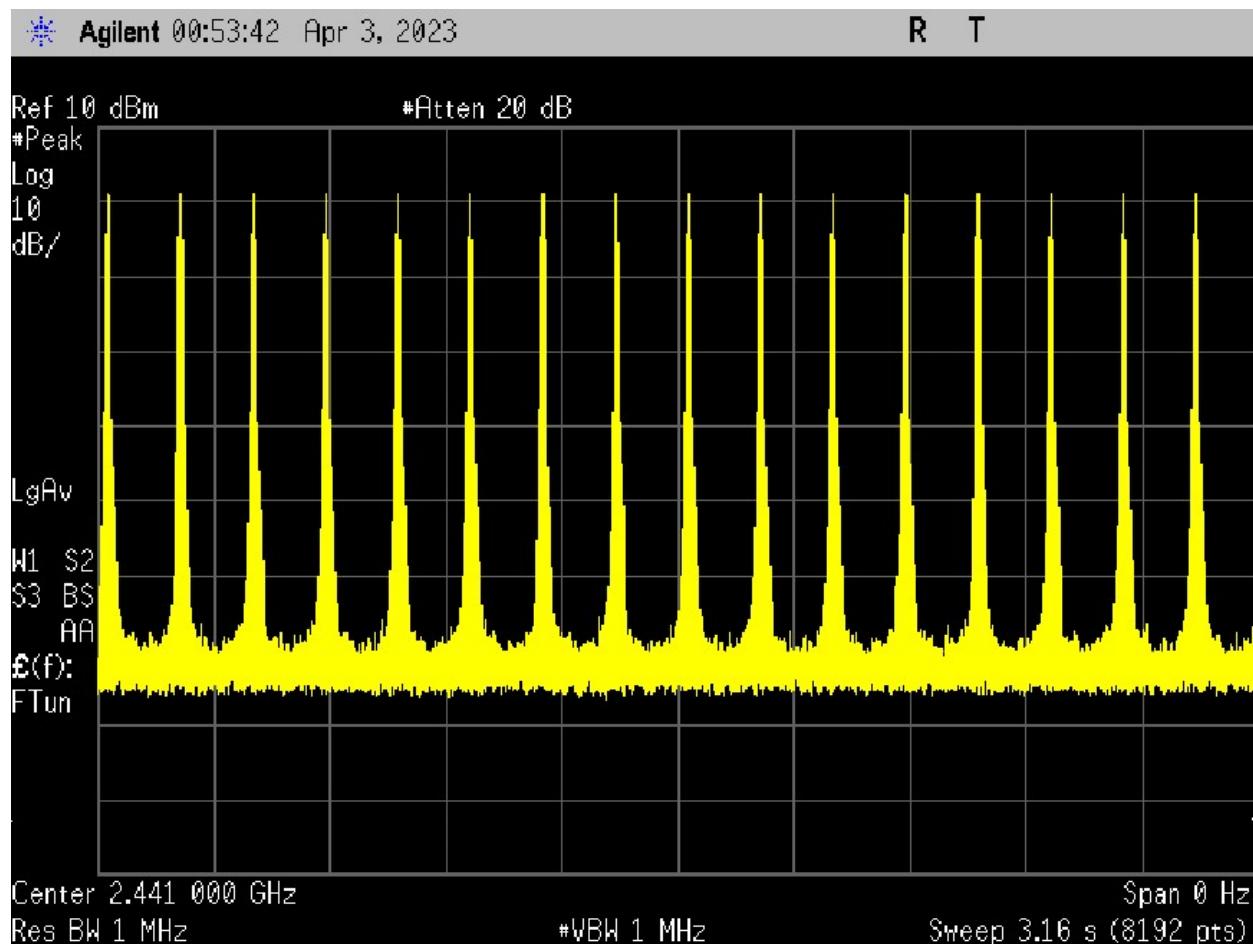

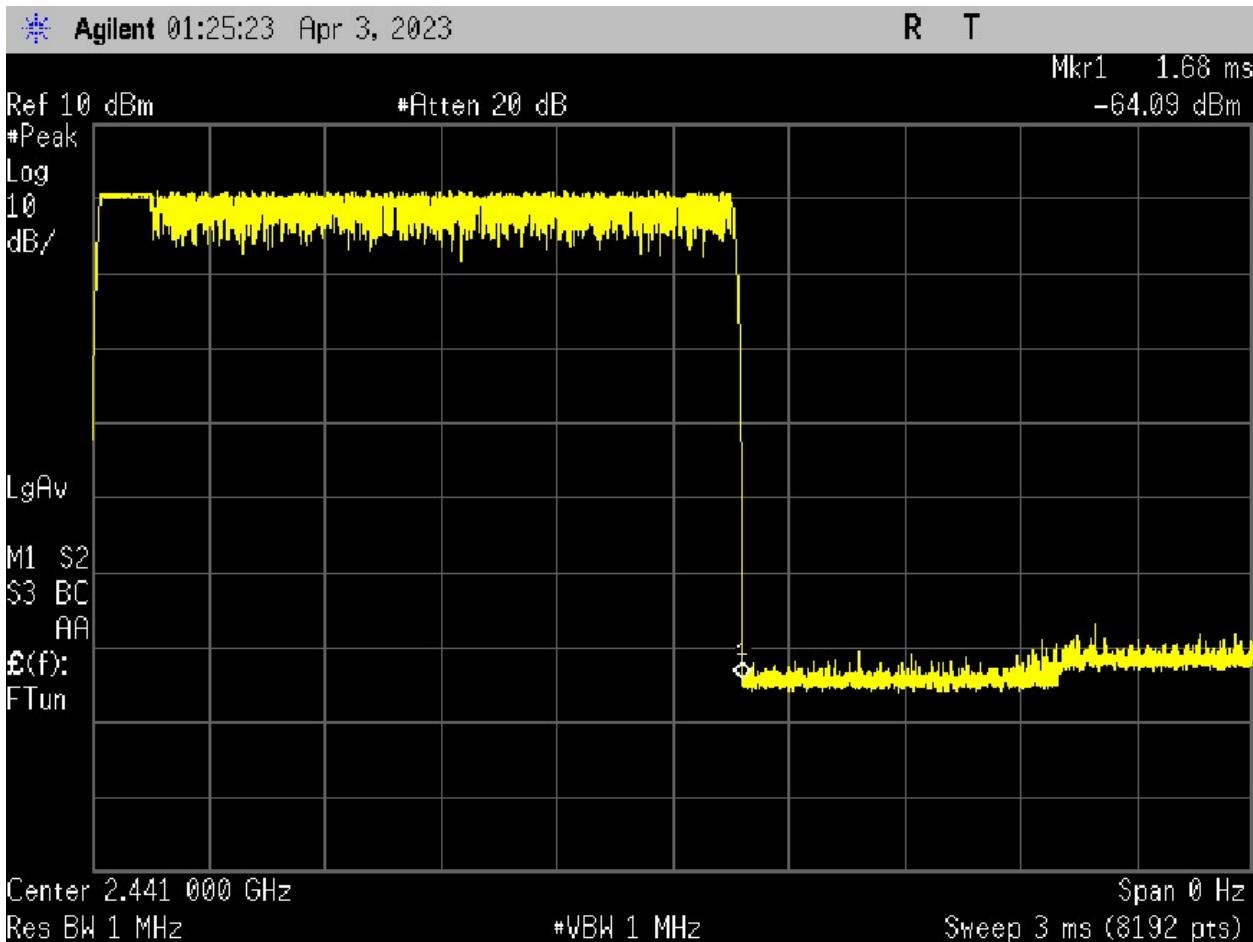



2-DH5

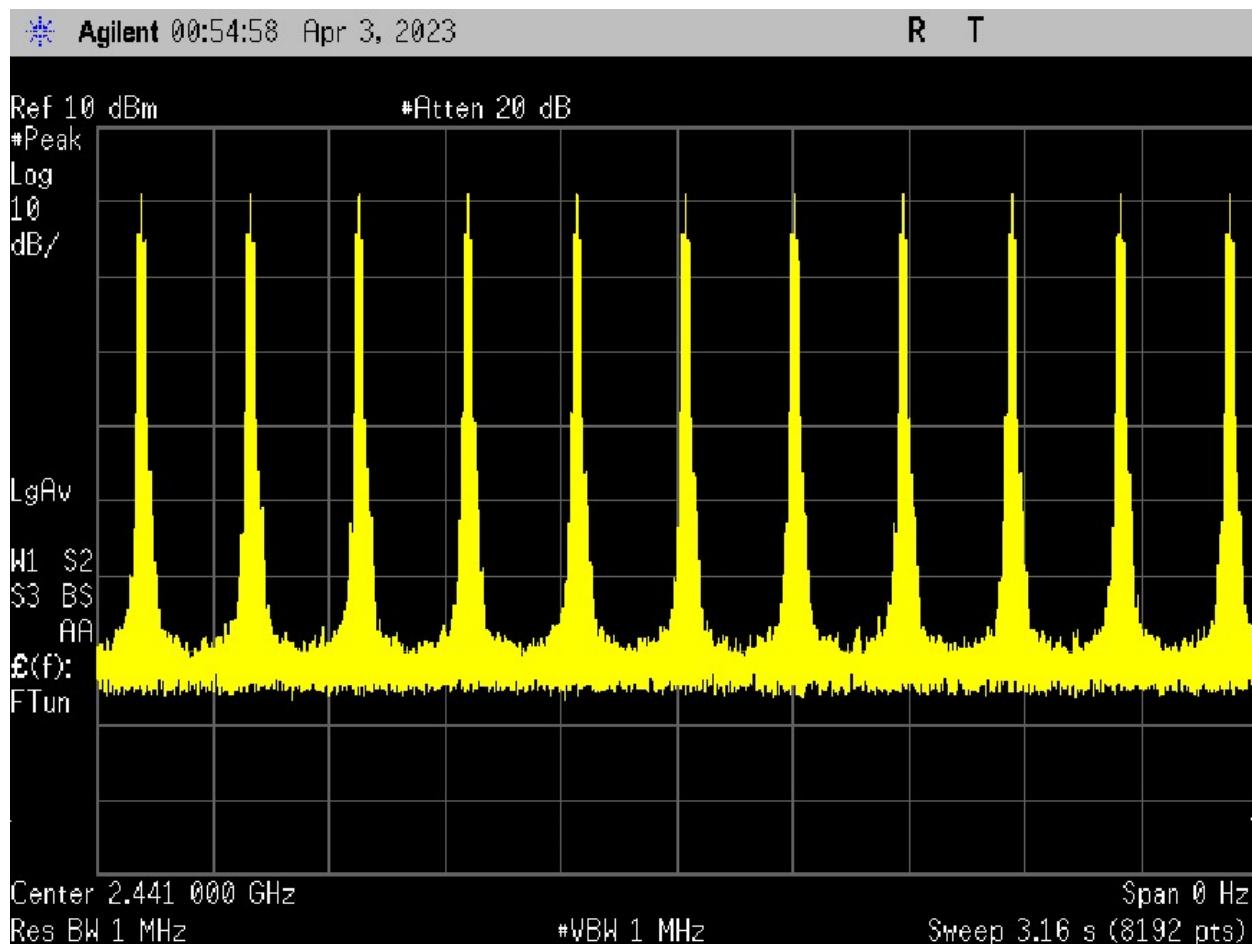

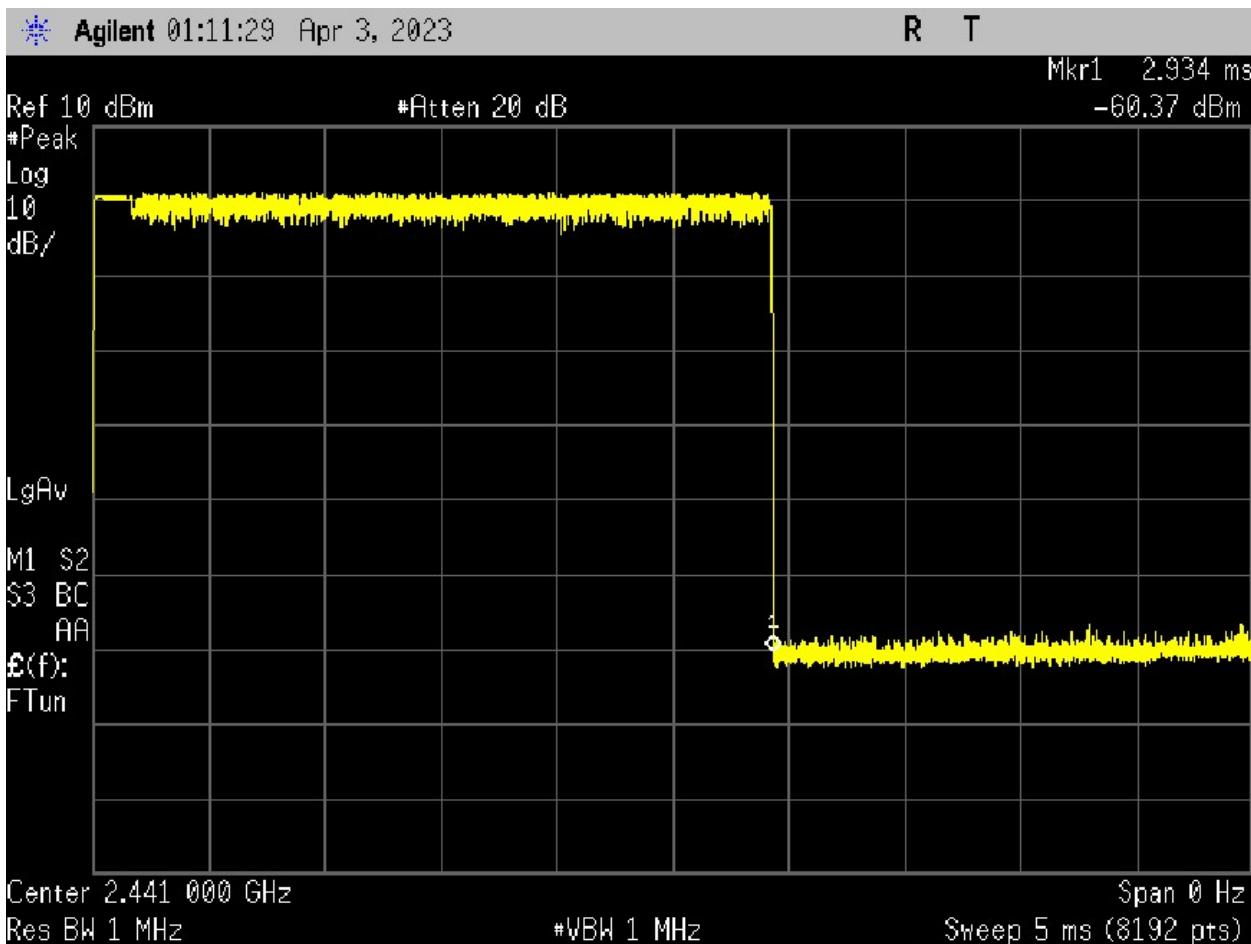



3-DH1

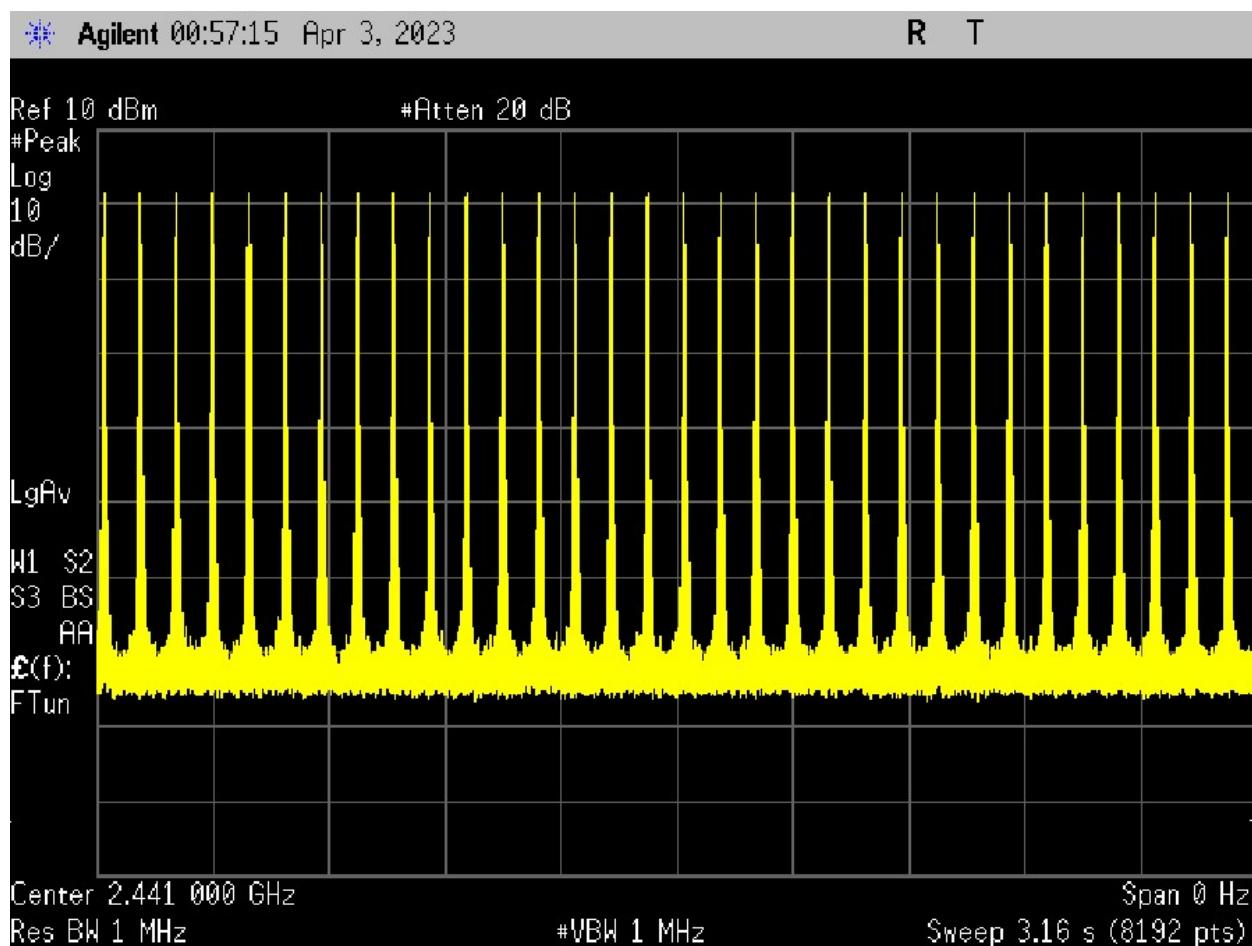

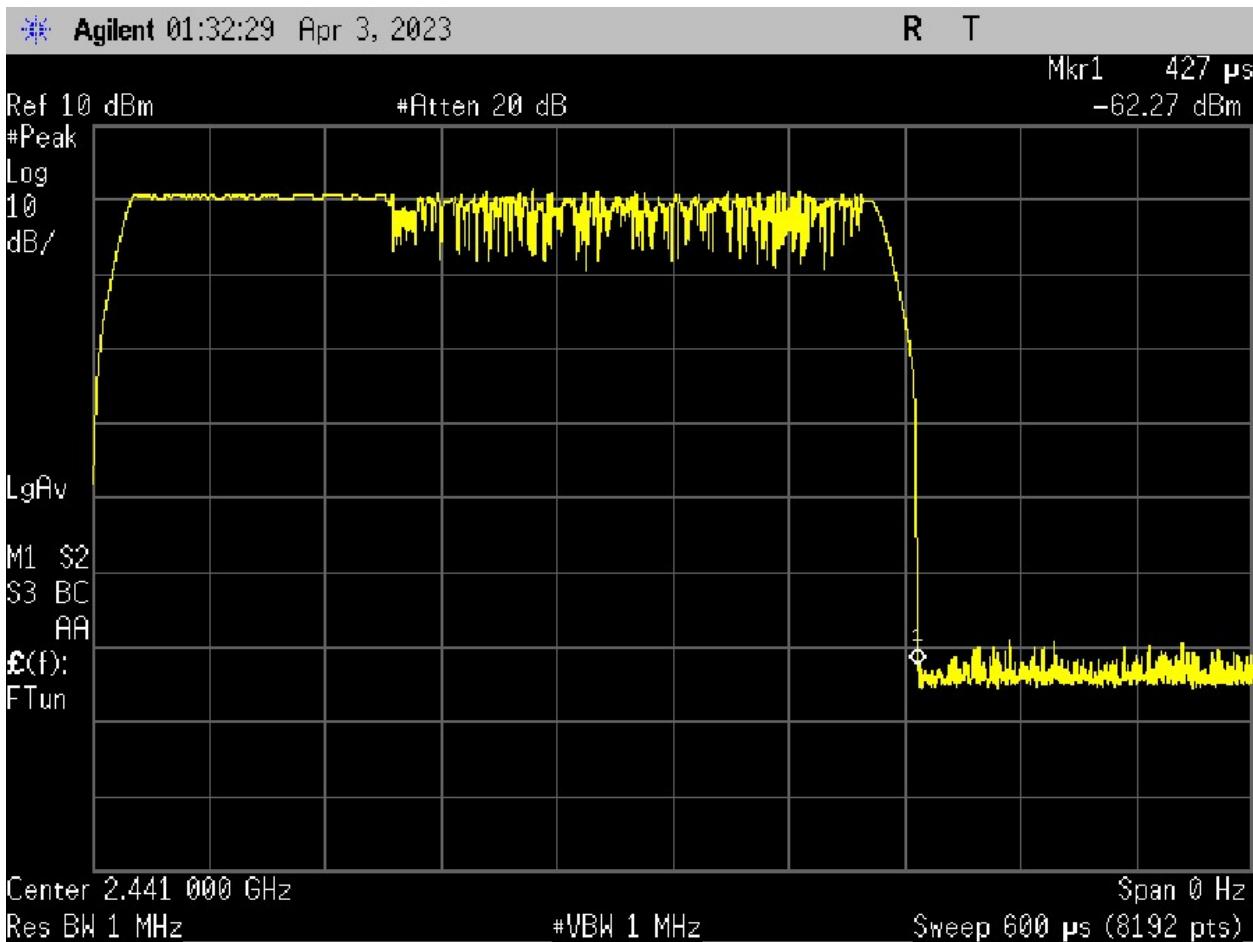



3-DH3

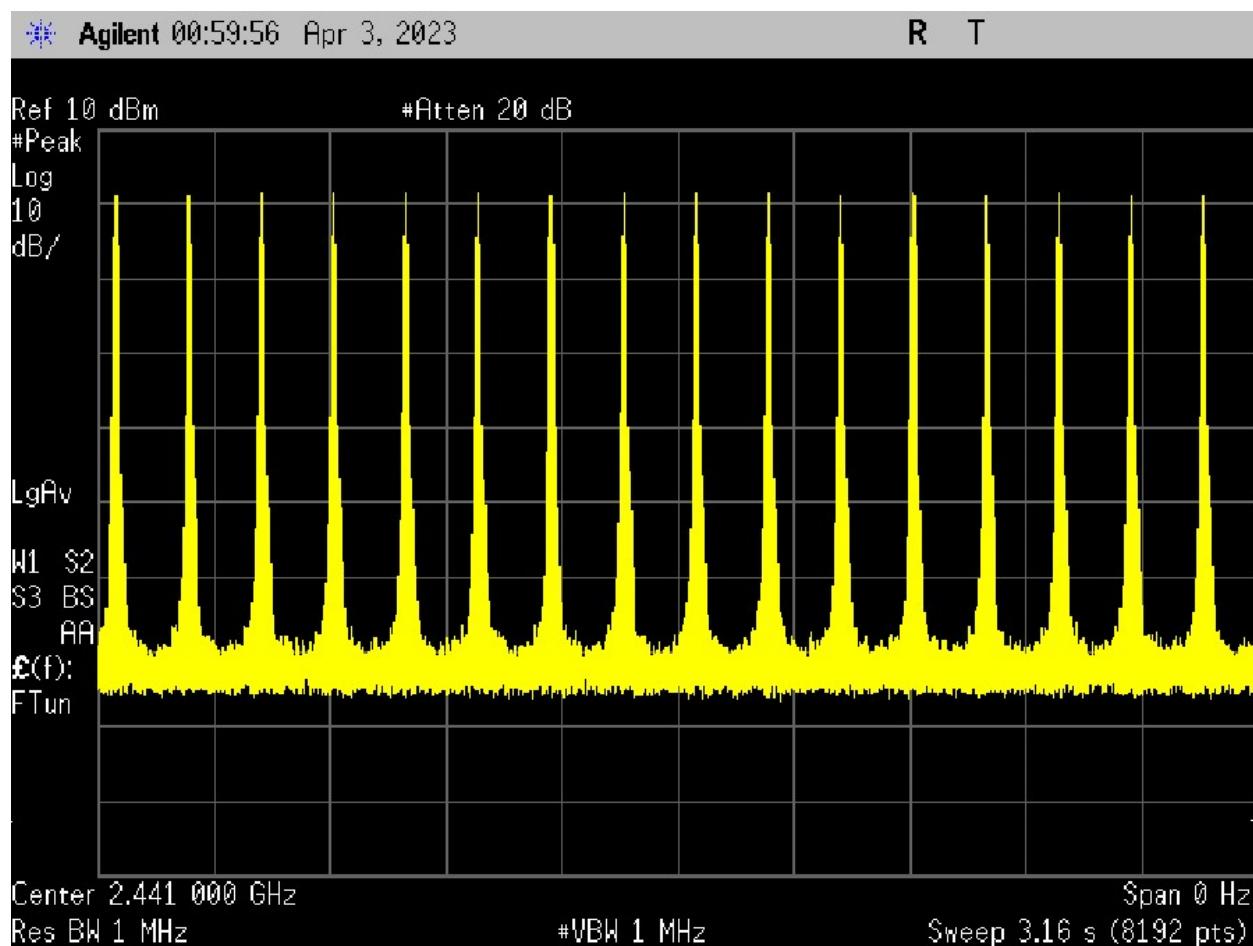

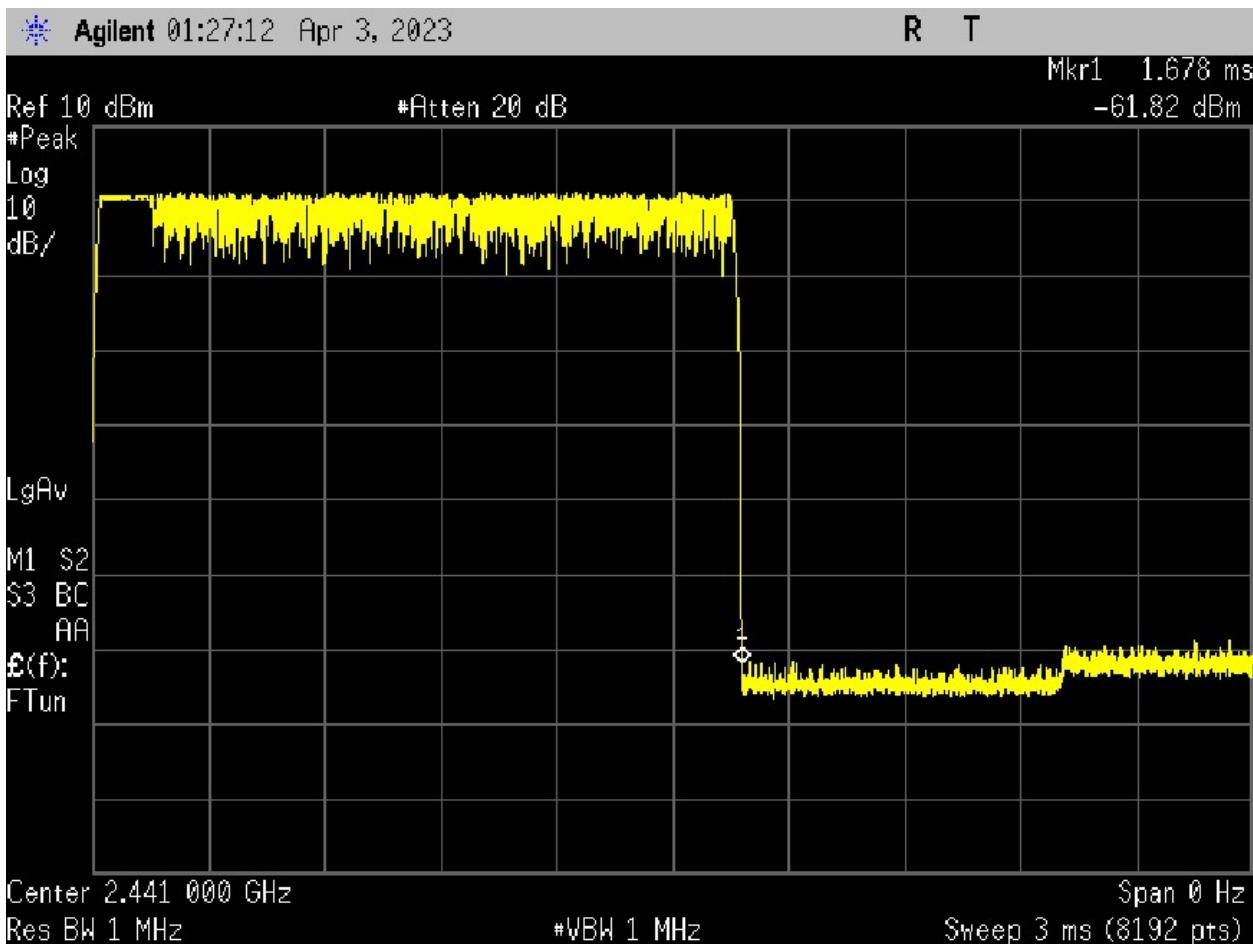

3-DH5

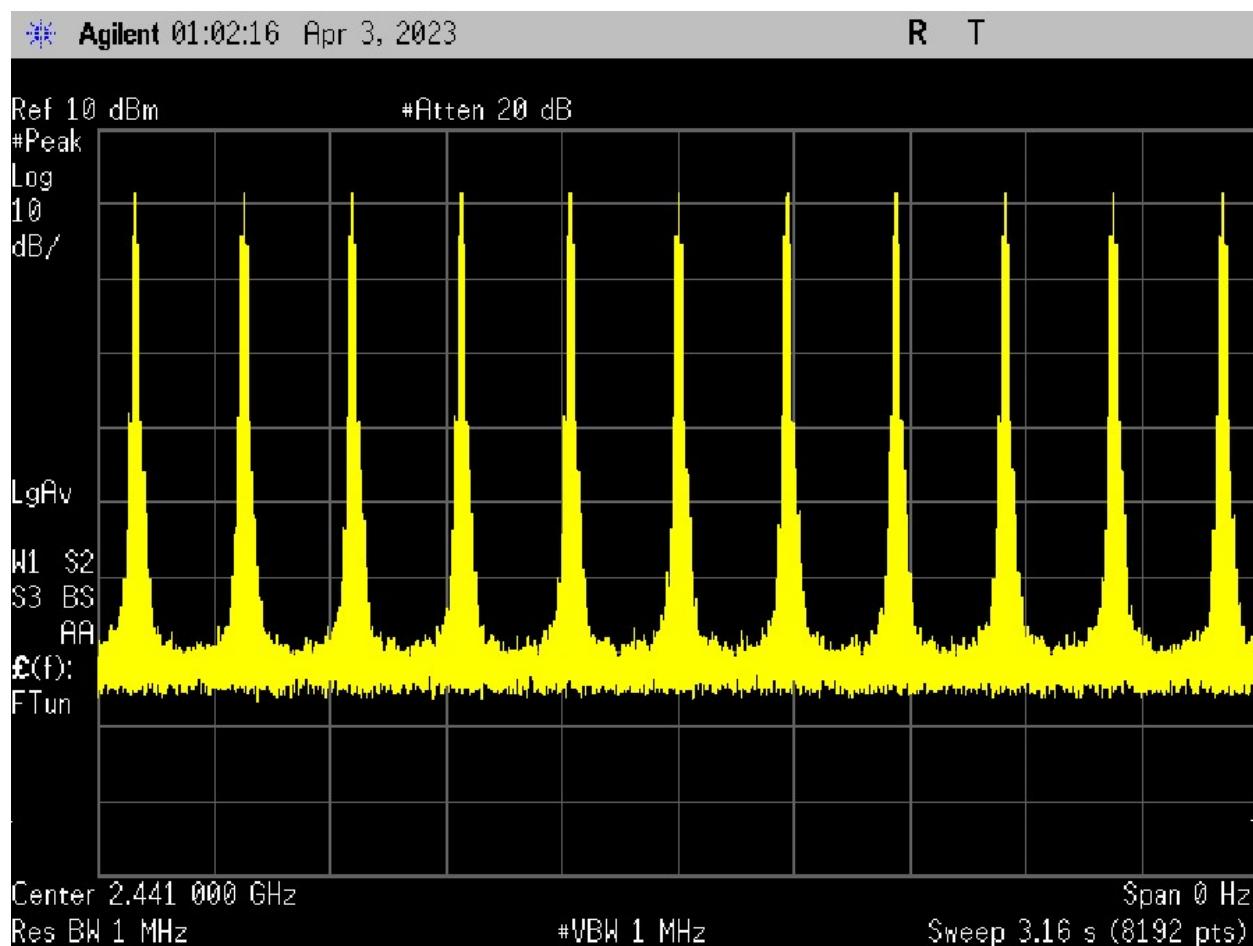


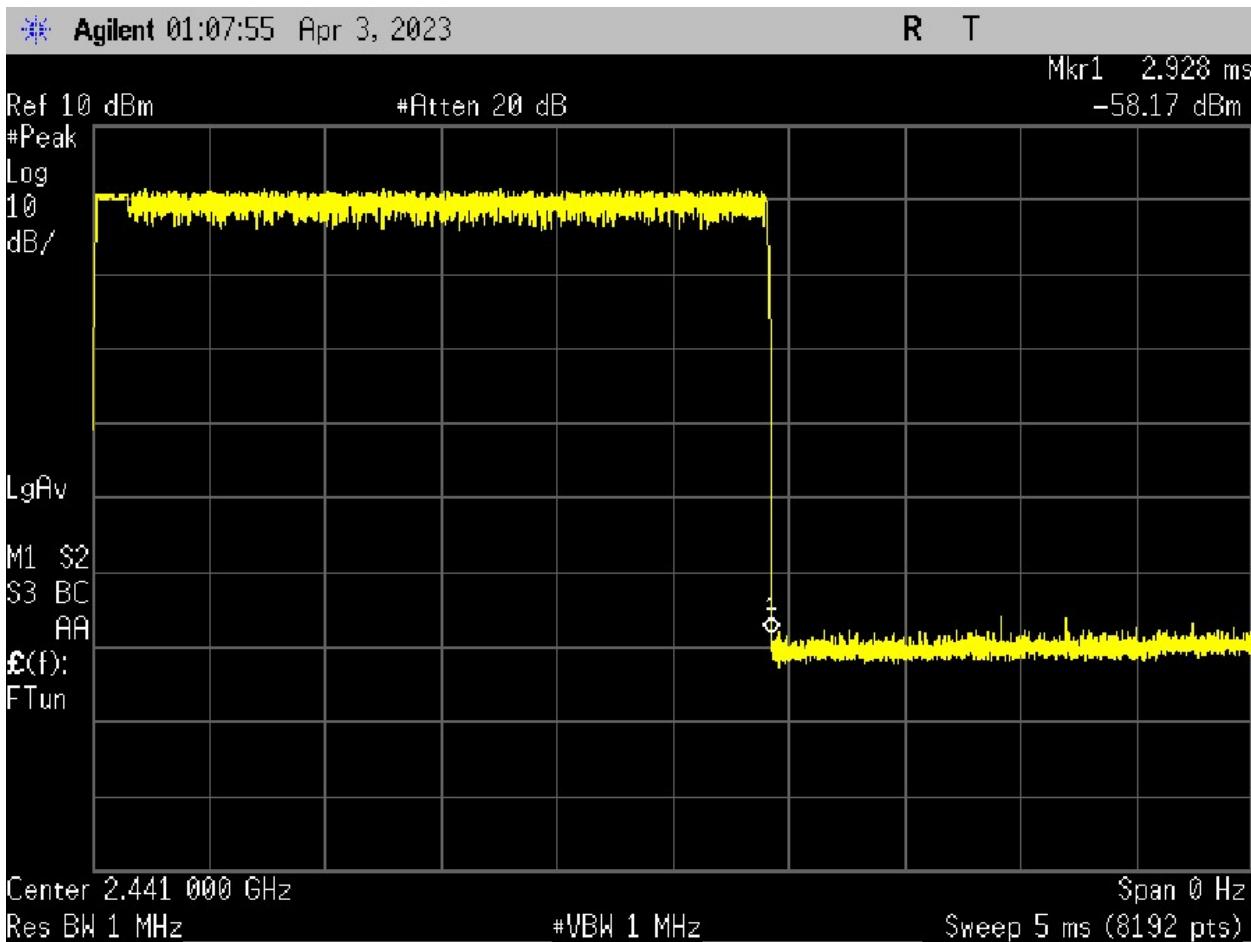


### 3.8 Test conditions and results – Peak transmit power


Peak transmit power		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(b)(3), IC RSS-247 5.1(b)	
Test according to measurement reference	Reference Method	
	ANSI C63.10 7.8.5	
Tested frequencies	$F_{\text{LOW}} / F_{\text{MID}} / F_{\text{HIGH}}$	
Measurement mode	Peak	

Test results - FCC					
Channel	Frequency [MHz]	Mode	Peak power [dBm]	Limit [dBm]	Margin [dB]
$F_{\text{LOW}}$	2402	DH5-Sngl	2.69	30	27.31
$F_{\text{MID}}$	2441	DH5-Sngl	2.64	30	27.36
$F_{\text{HIGH}}$	2480	DH5-Sngl	1.72	30	28.28
Comments:					

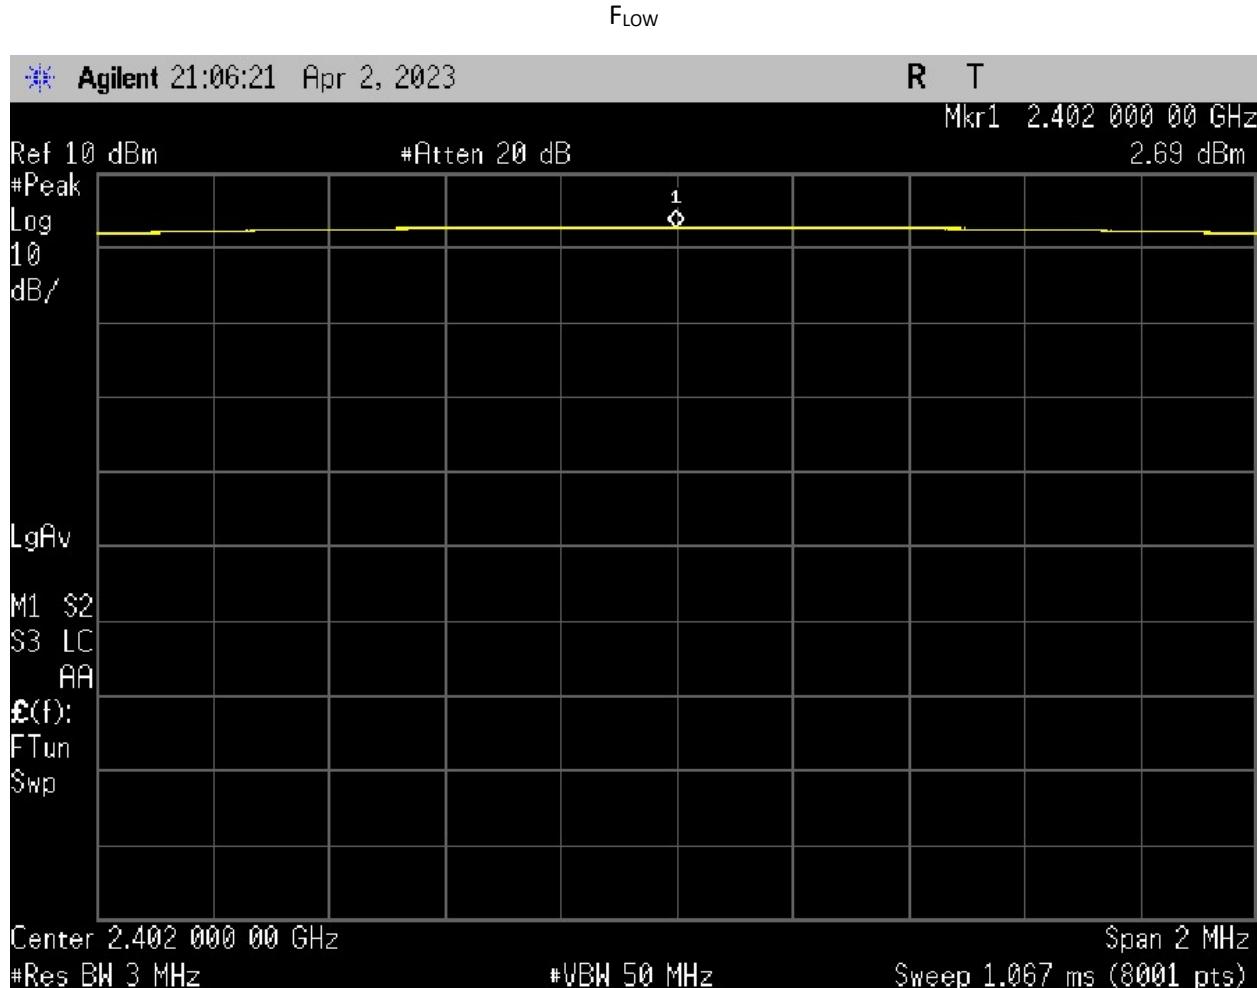

F<sub>MID</sub>

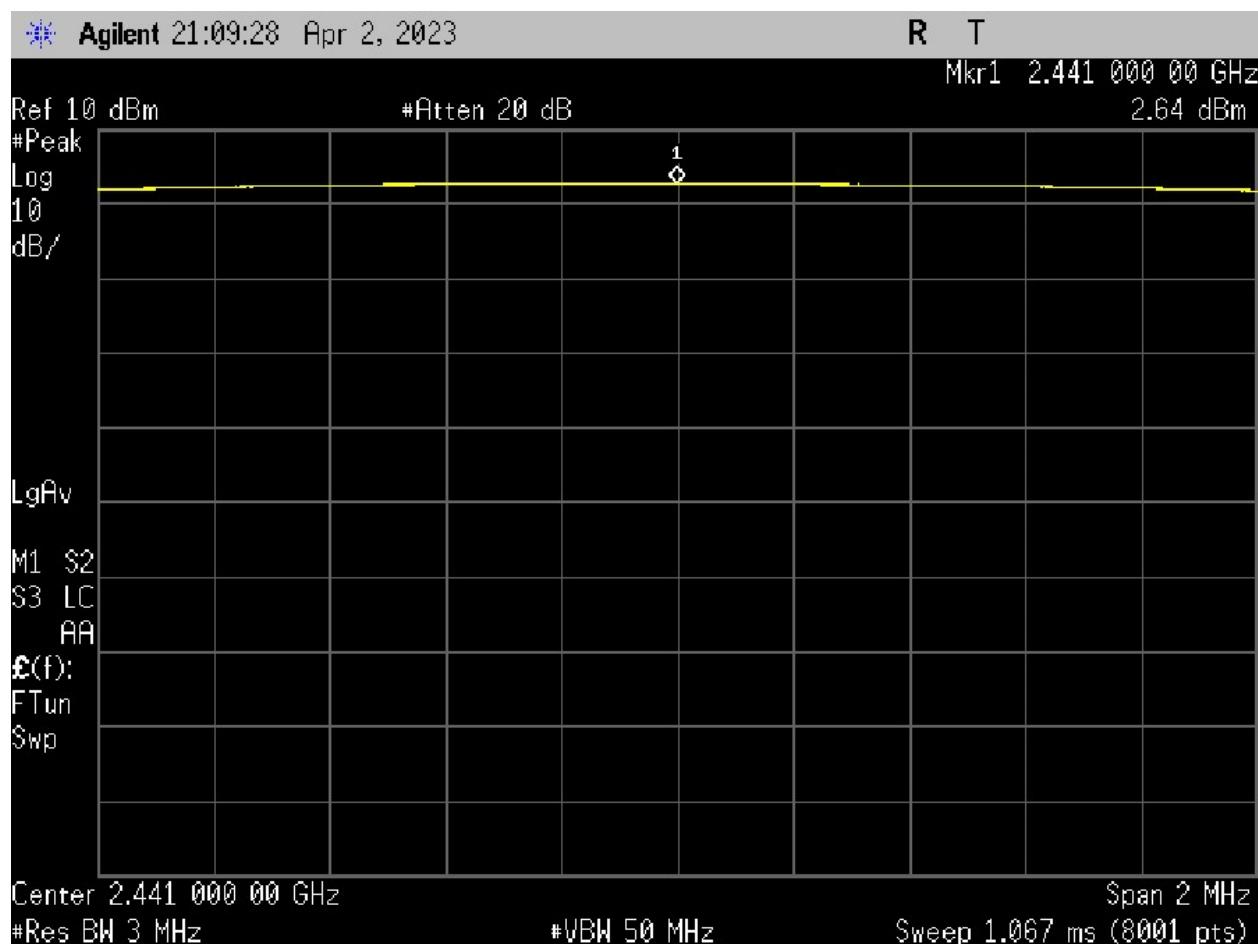


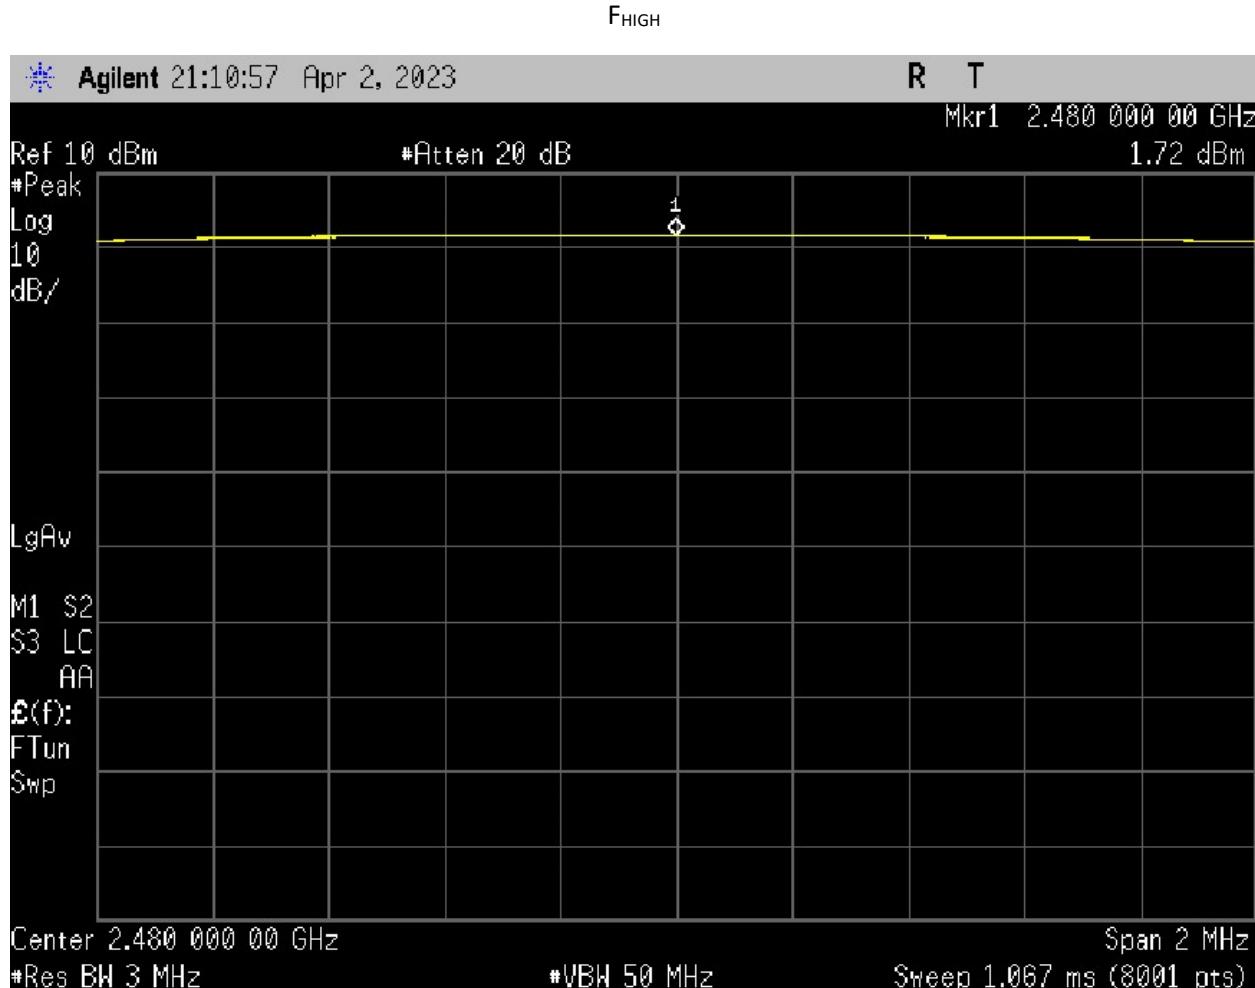


### 3.9 Band edge

Band edge		Verdict: PASS
EUT requirement rule parts and clause		Reference
		FCC 15.247(d), IC RSS-247 5.5
Test according to measurement reference		Reference Method
		ANSI C63.10 7.8.8 & 11.13.3.2
Tested frequencies		$F_{\text{low}} / F_{\text{high}}$
Measurement mode		Peak


Test results					
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBm]	Margin [dB]
$F_{\text{LOW}}$	2402	DH5-Sngl	-42.62	-20	22.62
$F_{\text{HIGH}}$	2402	DH5-Hop	-45.27	-20	25.27
$F_{\text{LOW}}$	2480	DH5-Sngl	-59.93	-20	39.93
$F_{\text{HIGH}}$	2480	DH5-Hop	-61.91	-20	41.91
Comments:					

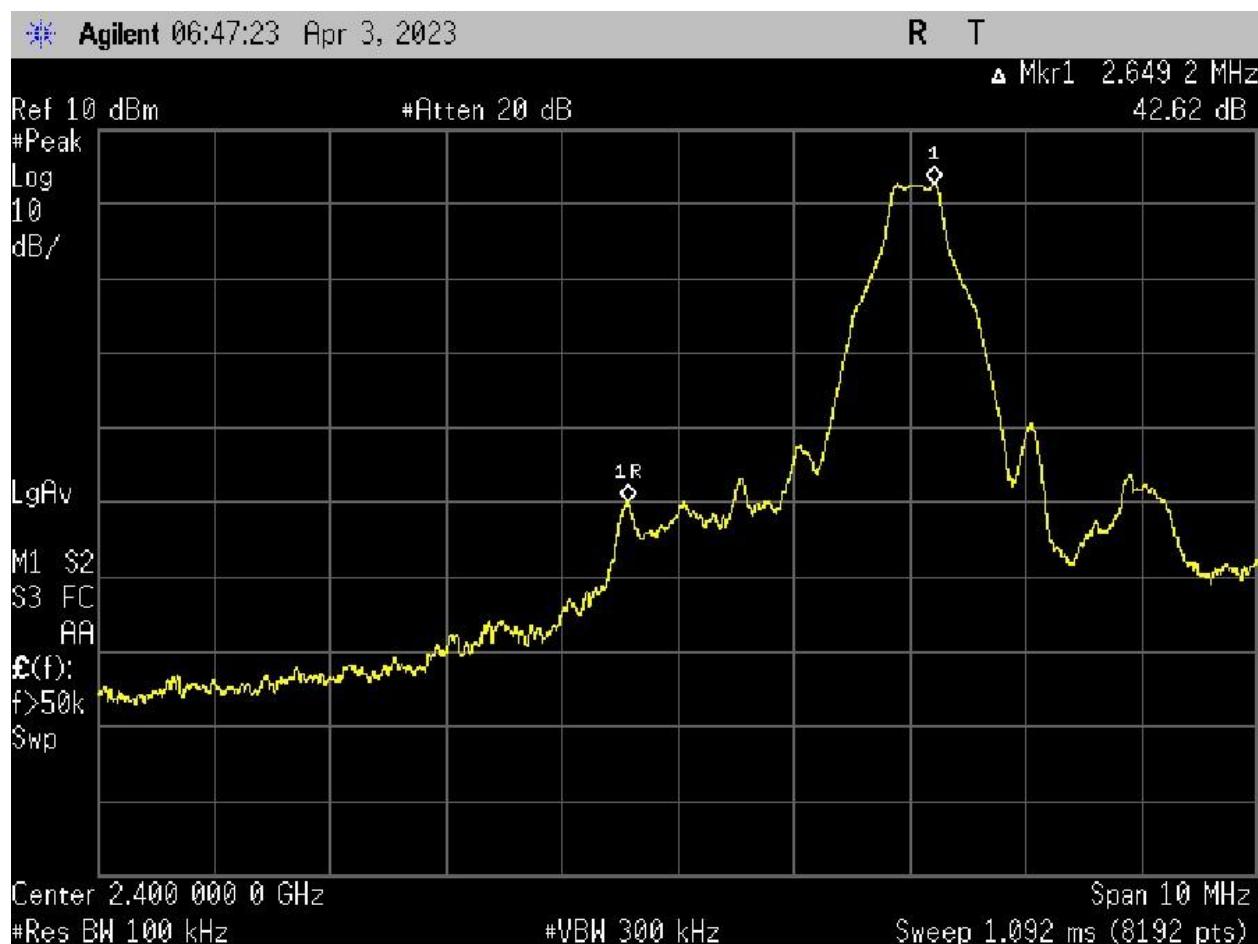F<sub>Low</sub> DH5-Sngl


F<sub>LOW</sub> DH5-Hop

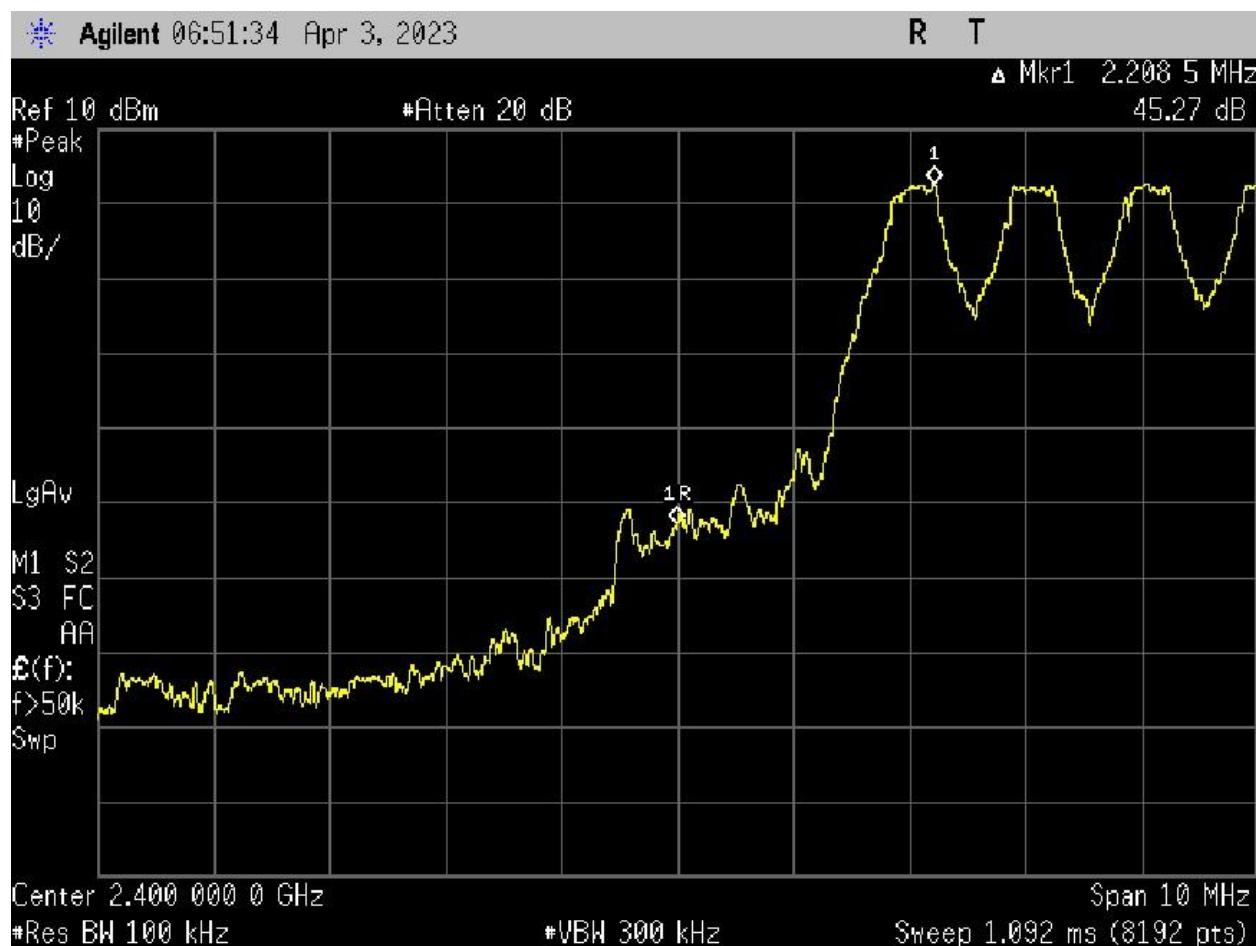

F<sub>HIGH</sub> DH5-Sngl

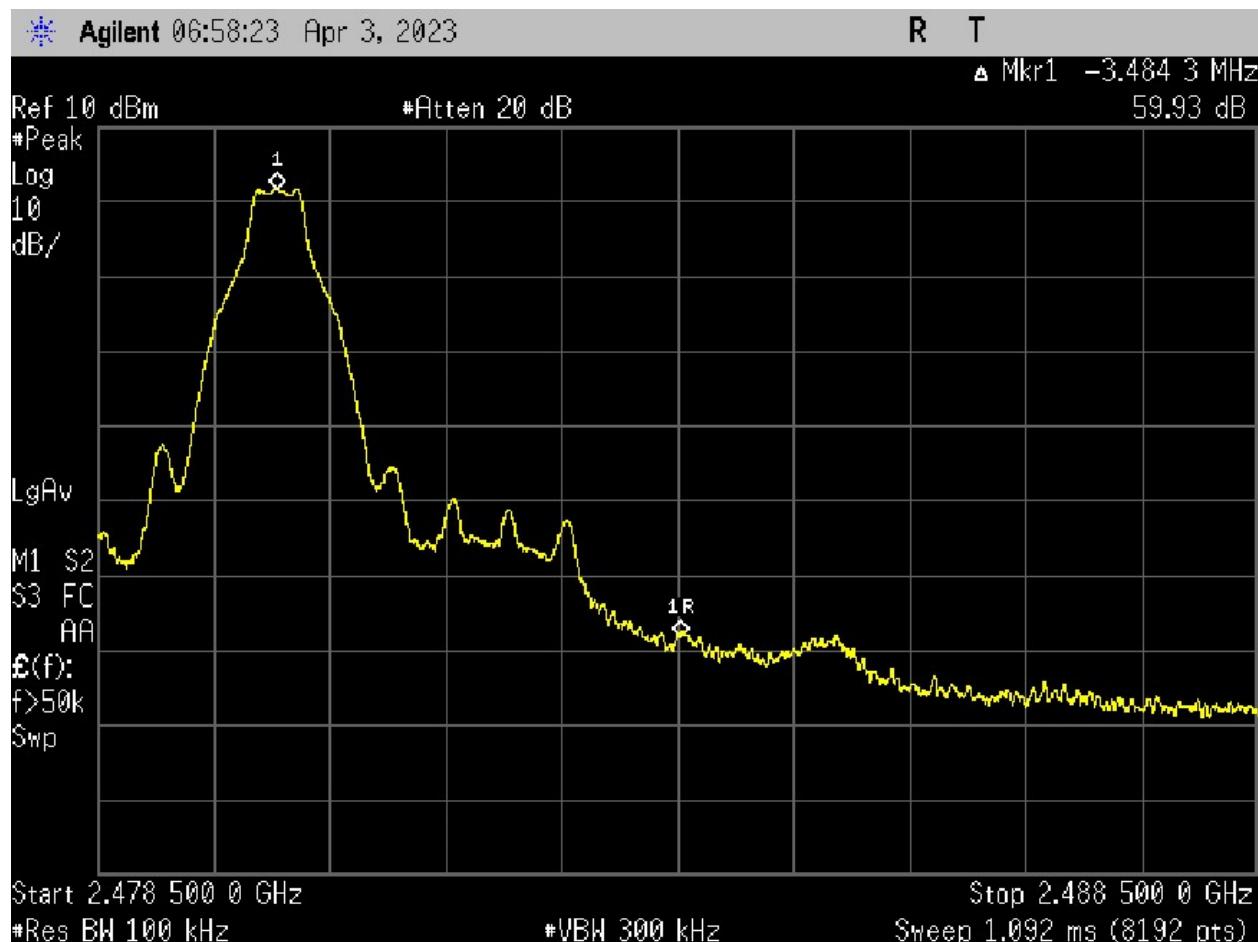


F<sub>HIGH</sub> DH5-Hop

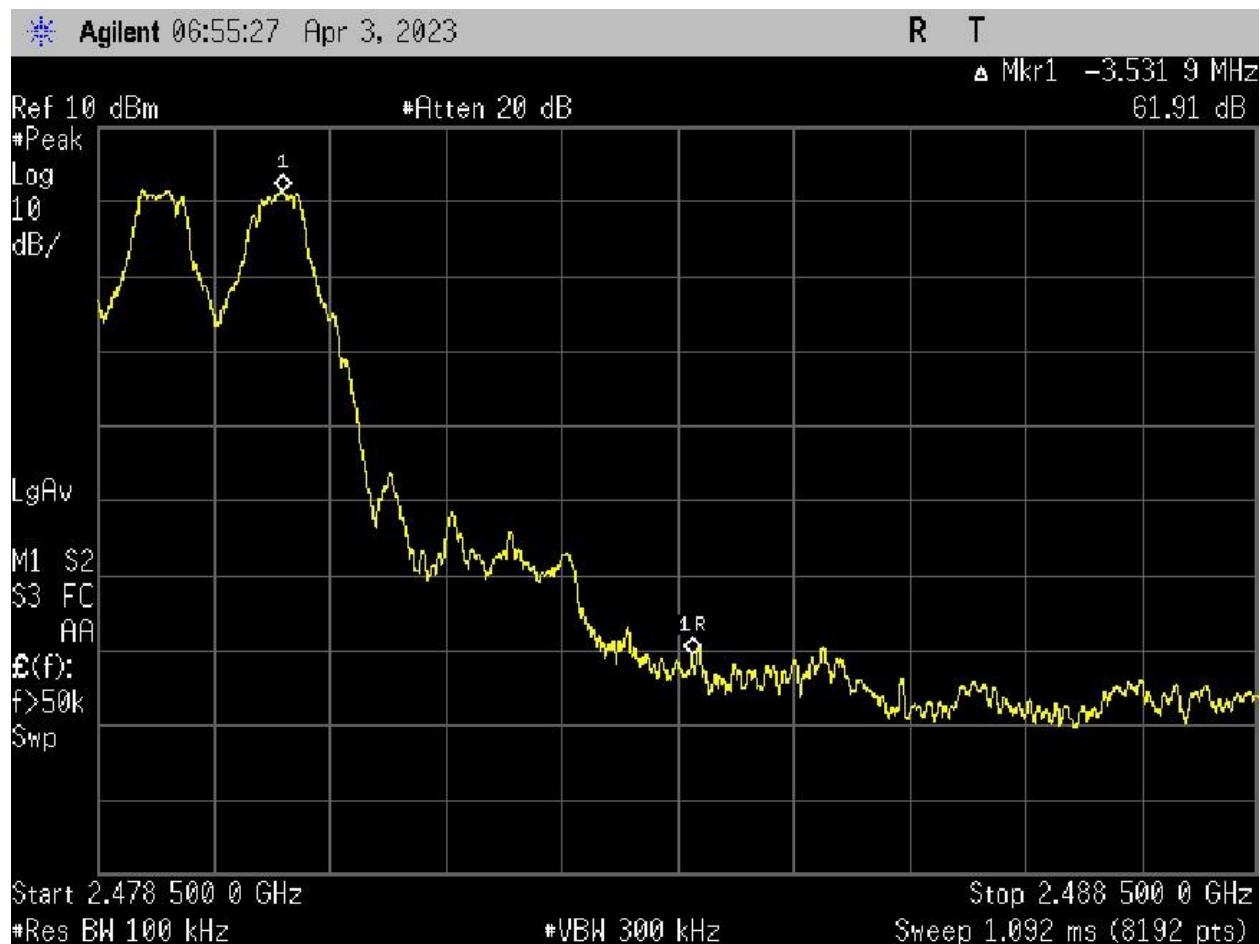



### 3.10 Conducted spurious emissions

Conducted spurious emissions		Verdict: PASS			
EUT requirement rule parts and clause		Reference			
		FCC 15.247(d) / IC RSS-247 5.5			
Test according to measurement reference		Reference Method			
		ANSI C63.10 7.8.6 & 11.11			
Tested frequencies		$F_{LOW}$ / $F_{MID}$ / $F_{HIGH}$			
Mode		DH5-Sngl			
Limits					
Channel	Emission [MHz]	Emission Level [dBm]	Peak power [dBm]	Limit [dBm]	Margin [dB]
$F_{LOW}$	4805	-53.8	2.66	-17.34	36.46
$F_{MID}$	4883	-46.9	2.34	-17.66	29.24
$F_{HIGH}$	4961	-43	1.45	-18.55	24.45
Comments:					

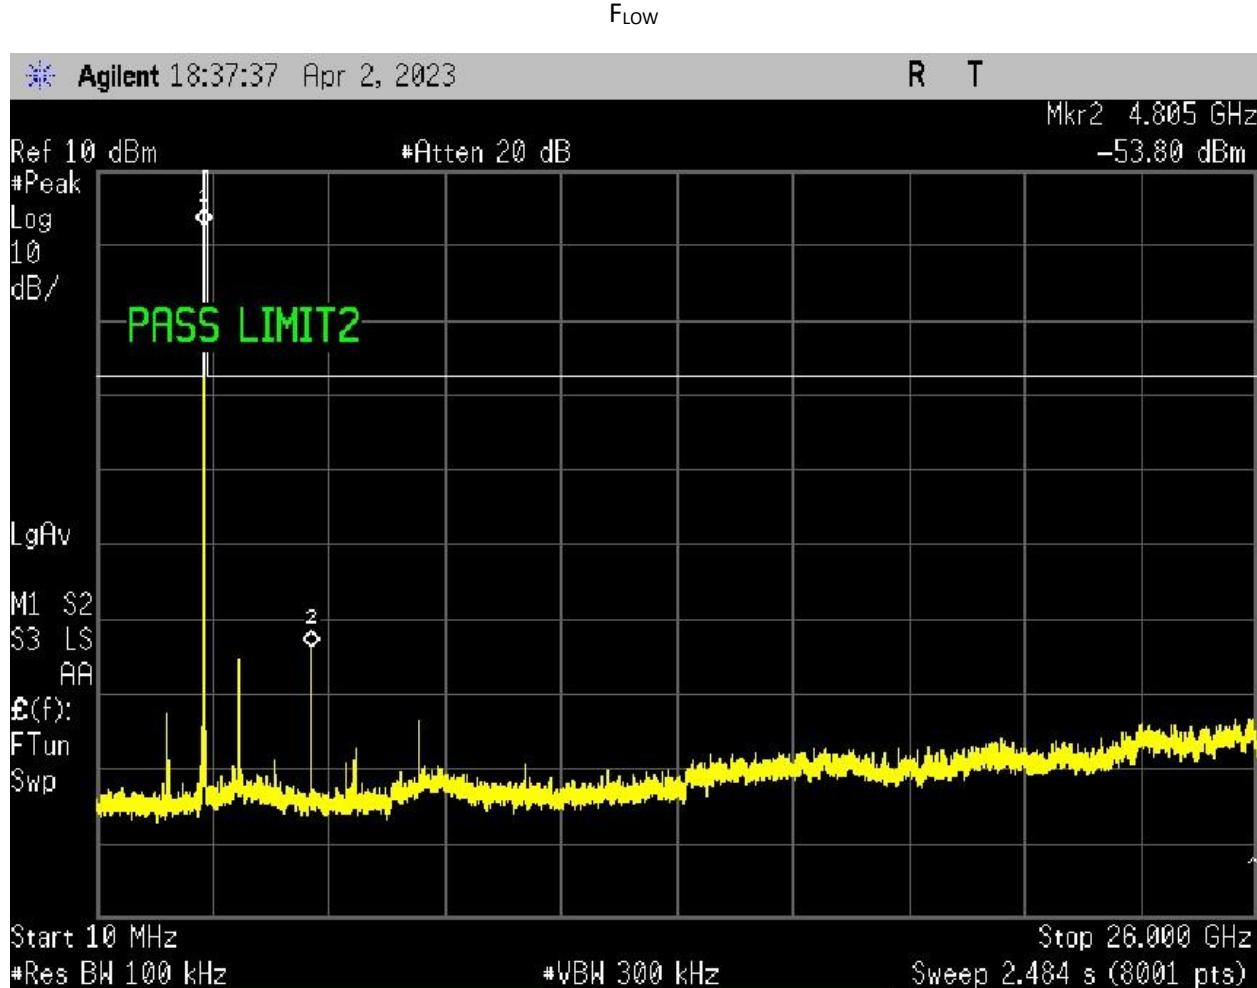

F<sub>MID</sub>

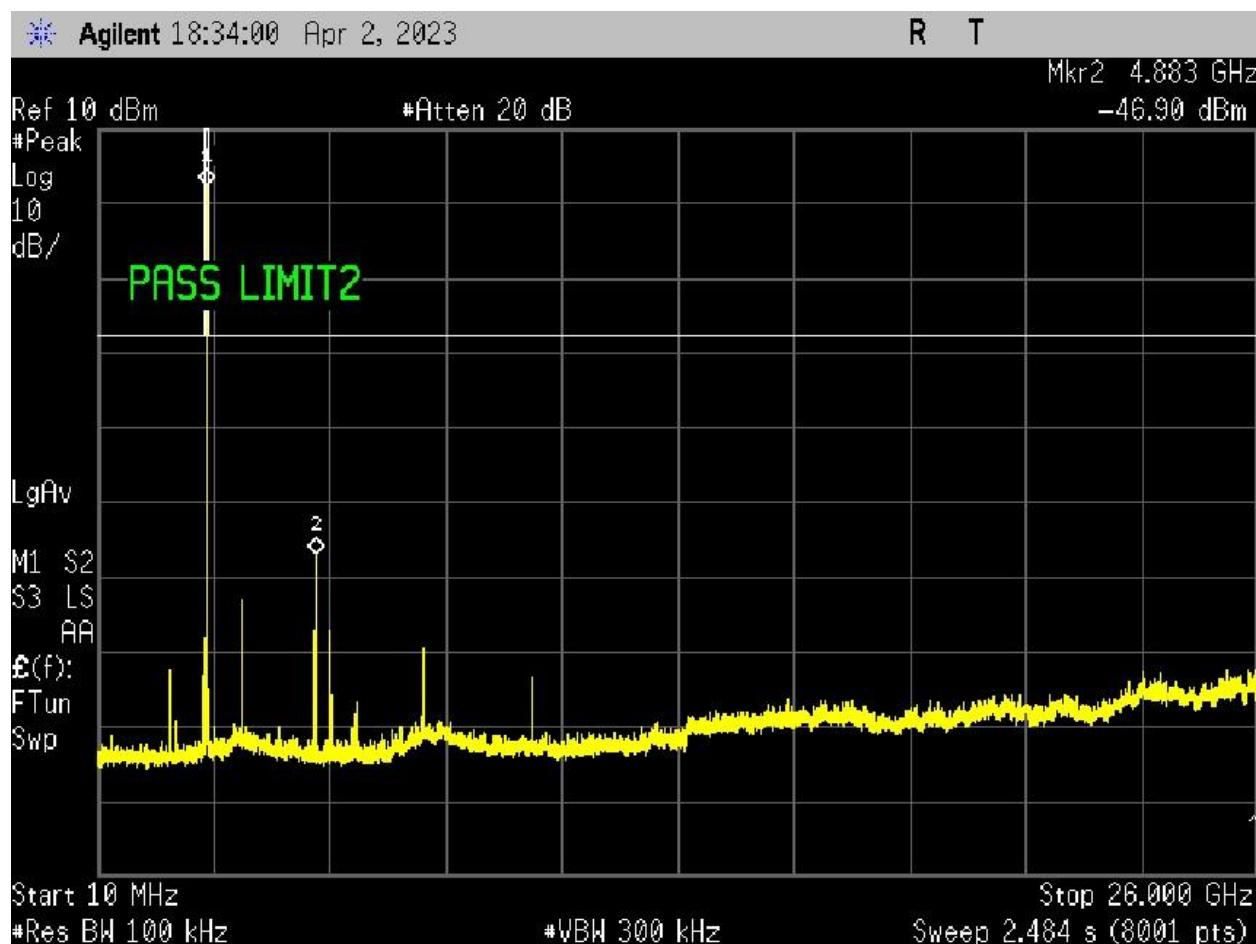

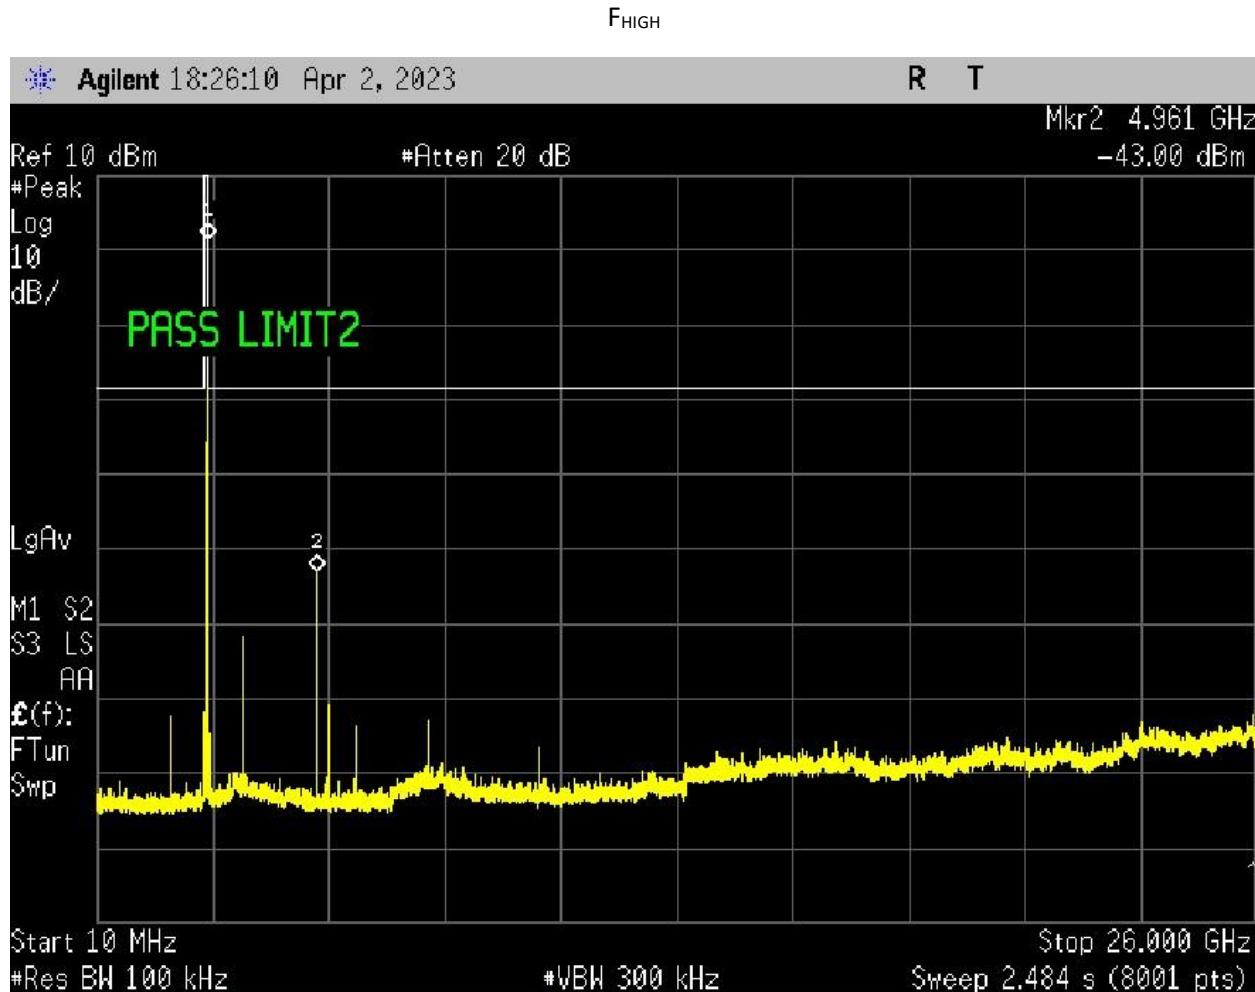

### 3.11 Radiated emissions

Radiated emissions			Verdict: PASS
EUT requirement rule parts and clause		Reference	
		FCC 15.209 & 15.247(d) / IC RSS-247 5.5	
Test according to measurement reference		Reference Method	
		ANSI C63.10 6.4, 6.5, 6.6, 6.10.5	
Tested frequencies		$F_{\text{low}} / F_{\text{high}}$	
Test frequency range		30 MHz – 10 <sup>th</sup> Harmonic	
Limits			
Frequency range [MHz]	Detector	Limit	Limit Distance [meters]
30 – 88	Quasi-Peak	100 $\mu\text{V}/\text{m}$ (40 dB $\mu\text{V}/\text{m}$ )	3
88 – 216	Quasi-Peak	150 $\mu\text{V}/\text{m}$ (43.5 dB $\mu\text{V}/\text{m}$ )	3
216 – 960	Quasi-Peak	200 $\mu\text{V}/\text{m}$ (46 dB $\mu\text{V}/\text{m}$ )	3
960 – 1000	Quasi-Peak	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$ )	3
960 - 26000	Average	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$ )	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).			
When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.			
*Measurement is performed with conducted measurement setup			
Comments: 9 kHz to 30 MHz not tested due to high frequency application of this product.			




## RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/30/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	1

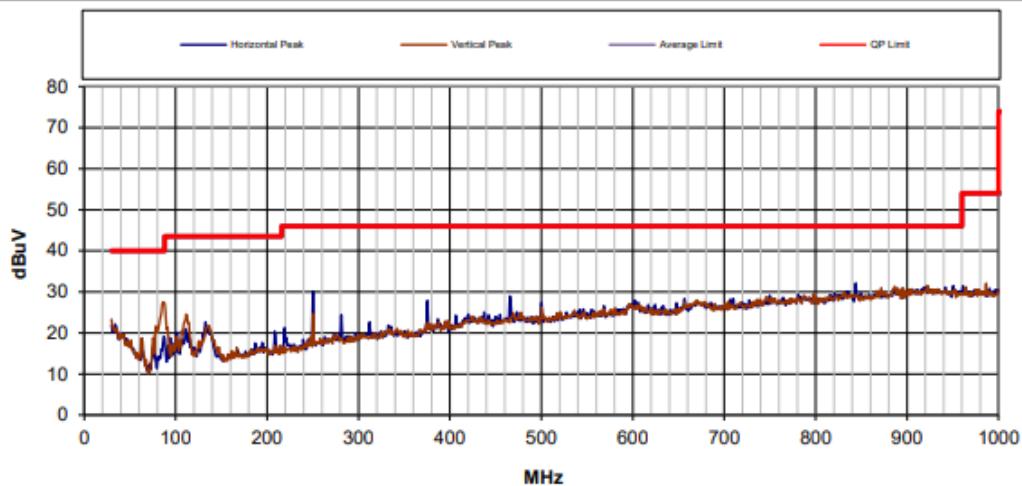

COMMENTS				SIGNATURE																																																																												
BT at 2402;																																																																																
Horizontal																																																																																
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>34.02</td><td>20.07</td><td>15.63</td><td>22.08</td><td>40.00</td><td>40.00</td><td>281°/152cm</td><td>19.93</td><td>24.37</td></tr> <tr> <td>249.99</td><td>31.79</td><td>30.84</td><td>18.36</td><td>46.02</td><td>46.02</td><td>203°/123cm</td><td>14.23</td><td>15.18</td></tr> <tr> <td>843.77</td><td>33.73</td><td>31.20</td><td>29.98</td><td>46.02</td><td>46.02</td><td>230°/99cm</td><td>12.29</td><td>14.82</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	34.02	20.07	15.63	22.08	40.00	40.00	281°/152cm	19.93	24.37	249.99	31.79	30.84	18.36	46.02	46.02	203°/123cm	14.23	15.18	843.77	33.73	31.20	29.98	46.02	46.02	230°/99cm	12.29	14.82																																				
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																								
34.02	20.07	15.63	22.08	40.00	40.00	281°/152cm	19.93	24.37																																																																								
249.99	31.79	30.84	18.36	46.02	46.02	203°/123cm	14.23	15.18																																																																								
843.77	33.73	31.20	29.98	46.02	46.02	230°/99cm	12.29	14.82																																																																								
Vertical																																																																																
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>30.05</td><td>24.47</td><td>18.14</td><td>23.05</td><td>40.00</td><td>40.00</td><td>316°/400cm</td><td>15.53</td><td>21.86</td></tr> <tr> <td>86.16</td><td>27.62</td><td>22.21</td><td>13.07</td><td>40.00</td><td>40.00</td><td>181°/164cm</td><td>12.38</td><td>17.79</td></tr> <tr> <td>111.52</td><td>19.37</td><td>12.55</td><td>15.61</td><td>43.52</td><td>43.52</td><td>191°/99cm</td><td>24.15</td><td>30.97</td></tr> <tr> <td>986.54</td><td>29.53</td><td>24.13</td><td>31.53</td><td>53.98</td><td>53.98</td><td>208°/232cm</td><td>24.45</td><td>29.85</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	30.05	24.47	18.14	23.05	40.00	40.00	316°/400cm	15.53	21.86	86.16	27.62	22.21	13.07	40.00	40.00	181°/164cm	12.38	17.79	111.52	19.37	12.55	15.61	43.52	43.52	191°/99cm	24.15	30.97	986.54	29.53	24.13	31.53	53.98	53.98	208°/232cm	24.45	29.85																											
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																								
30.05	24.47	18.14	23.05	40.00	40.00	316°/400cm	15.53	21.86																																																																								
86.16	27.62	22.21	13.07	40.00	40.00	181°/164cm	12.38	17.79																																																																								
111.52	19.37	12.55	15.61	43.52	43.52	191°/99cm	24.15	30.97																																																																								
986.54	29.53	24.13	31.53	53.98	53.98	208°/232cm	24.45	29.85																																																																								




# RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/31/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	1

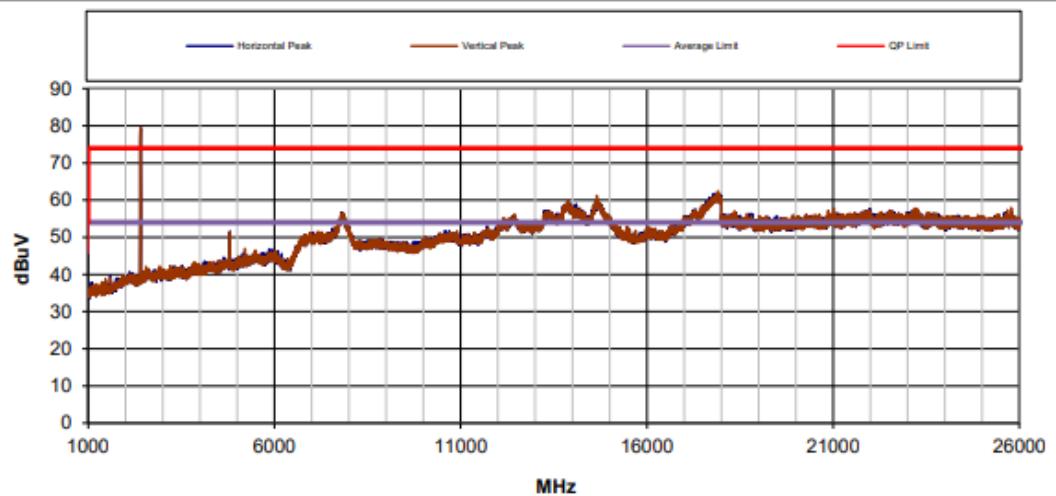

COMMENTS		SIGNATURE																																																												
BT at 2402;																																																														
<b>Horizontal</b>																																																														
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>Final (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>Final Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr> <td>2402.04</td><td>83.11</td><td>82.93</td><td>-9.48</td><td>73.98</td><td>53.98</td><td>68°/144cm</td><td>-9.13</td><td>N/A</td></tr> <tr> <td>4804.08</td><td>50.97</td><td>50.46</td><td>-3.44</td><td>73.98</td><td>53.98</td><td>12°/129cm</td><td>23.01</td><td>3.52</td></tr> <tr> <td>7798.61</td><td>42.16</td><td>39.26</td><td>10.61</td><td>73.98</td><td>53.98</td><td>202°/100cm</td><td>31.82</td><td>14.72</td></tr> <tr> <td>14665.04</td><td>45.07</td><td>42.69</td><td>11.94</td><td>73.98</td><td>53.98</td><td>145°/179cm</td><td>28.91</td><td>11.29</td></tr> <tr> <td>17843.55</td><td>47.30</td><td>44.46</td><td>17.43</td><td>73.98</td><td>53.98</td><td>176°/100cm</td><td>26.68</td><td>9.52</td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	2402.04	83.11	82.93	-9.48	73.98	53.98	68°/144cm	-9.13	N/A	4804.08	50.97	50.46	-3.44	73.98	53.98	12°/129cm	23.01	3.52	7798.61	42.16	39.26	10.61	73.98	53.98	202°/100cm	31.82	14.72	14665.04	45.07	42.69	11.94	73.98	53.98	145°/179cm	28.91	11.29	17843.55	47.30	44.46	17.43	73.98	53.98	176°/100cm	26.68	9.52
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																						
2402.04	83.11	82.93	-9.48	73.98	53.98	68°/144cm	-9.13	N/A																																																						
4804.08	50.97	50.46	-3.44	73.98	53.98	12°/129cm	23.01	3.52																																																						
7798.61	42.16	39.26	10.61	73.98	53.98	202°/100cm	31.82	14.72																																																						
14665.04	45.07	42.69	11.94	73.98	53.98	145°/179cm	28.91	11.29																																																						
17843.55	47.30	44.46	17.43	73.98	53.98	176°/100cm	26.68	9.52																																																						
<b>Vertical</b>																																																														
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>Final (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>Final Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr> <td>2402.04</td><td>84.57</td><td>84.46</td><td>-9.48</td><td>73.98</td><td>53.98</td><td>169°/100cm</td><td>-10.59</td><td>N/A</td></tr> <tr> <td>4804.08</td><td>50.39</td><td>49.80</td><td>-3.44</td><td>73.98</td><td>53.98</td><td>113°/169cm</td><td>23.59</td><td>4.18</td></tr> <tr> <td>7803.56</td><td>41.73</td><td>39.38</td><td>10.67</td><td>73.98</td><td>53.98</td><td>158°/200cm</td><td>32.25</td><td>14.60</td></tr> <tr> <td>14658.02</td><td>47.52</td><td>42.60</td><td>11.96</td><td>73.98</td><td>53.98</td><td>190°/174cm</td><td>26.46</td><td>11.38</td></tr> <tr> <td>17909.99</td><td>49.91</td><td>44.58</td><td>17.75</td><td>73.98</td><td>53.98</td><td>302°/200cm</td><td>24.07</td><td>9.40</td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	2402.04	84.57	84.46	-9.48	73.98	53.98	169°/100cm	-10.59	N/A	4804.08	50.39	49.80	-3.44	73.98	53.98	113°/169cm	23.59	4.18	7803.56	41.73	39.38	10.67	73.98	53.98	158°/200cm	32.25	14.60	14658.02	47.52	42.60	11.96	73.98	53.98	190°/174cm	26.46	11.38	17909.99	49.91	44.58	17.75	73.98	53.98	302°/200cm	24.07	9.40
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																						
2402.04	84.57	84.46	-9.48	73.98	53.98	169°/100cm	-10.59	N/A																																																						
4804.08	50.39	49.80	-3.44	73.98	53.98	113°/169cm	23.59	4.18																																																						
7803.56	41.73	39.38	10.67	73.98	53.98	158°/200cm	32.25	14.60																																																						
14658.02	47.52	42.60	11.96	73.98	53.98	190°/174cm	26.46	11.38																																																						
17909.99	49.91	44.58	17.75	73.98	53.98	302°/200cm	24.07	9.40																																																						




## RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/30/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	2

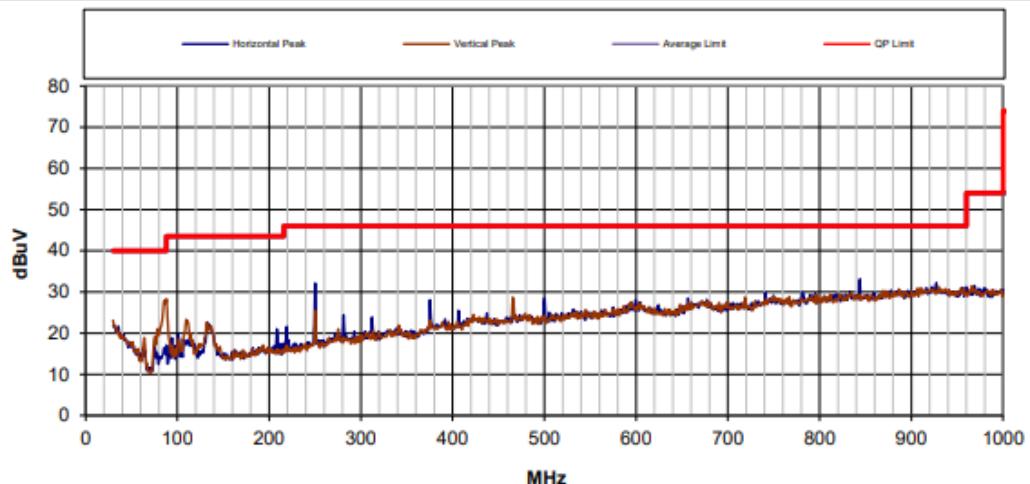

COMMENTS		SIGNATURE																																																																													
BT at 2441;																																																																															
Horizontal																																																																															
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>31.37</td><td>21.10</td><td>15.31</td><td>22.73</td><td>40.00</td><td>40.00</td><td>315°/325cm</td><td>18.90</td><td>24.69</td></tr> <tr> <td>250.01</td><td>33.22</td><td>32.43</td><td>18.36</td><td>46.02</td><td>46.02</td><td>203°/102cm</td><td>12.80</td><td>13.59</td></tr> <tr> <td>843.73</td><td>35.94</td><td>32.70</td><td>29.98</td><td>46.02</td><td>46.02</td><td>316°/102cm</td><td>10.08</td><td>13.32</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>								Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	31.37	21.10	15.31	22.73	40.00	40.00	315°/325cm	18.90	24.69	250.01	33.22	32.43	18.36	46.02	46.02	203°/102cm	12.80	13.59	843.73	35.94	32.70	29.98	46.02	46.02	316°/102cm	10.08	13.32																																				
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																							
31.37	21.10	15.31	22.73	40.00	40.00	315°/325cm	18.90	24.69																																																																							
250.01	33.22	32.43	18.36	46.02	46.02	203°/102cm	12.80	13.59																																																																							
843.73	35.94	32.70	29.98	46.02	46.02	316°/102cm	10.08	13.32																																																																							
Vertical																																																																															
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>30.18</td><td>23.53</td><td>17.93</td><td>23.01</td><td>40.00</td><td>40.00</td><td>247°/400cm</td><td>16.47</td><td>22.07</td></tr> <tr> <td>87.72</td><td>27.15</td><td>21.64</td><td>13.36</td><td>40.00</td><td>40.00</td><td>22°/175cm</td><td>12.85</td><td>18.36</td></tr> <tr> <td>966.17</td><td>28.97</td><td>24.29</td><td>31.09</td><td>53.98</td><td>53.98</td><td>0°/196cm</td><td>25.01</td><td>29.69</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	30.18	23.53	17.93	23.01	40.00	40.00	247°/400cm	16.47	22.07	87.72	27.15	21.64	13.36	40.00	40.00	22°/175cm	12.85	18.36	966.17	28.97	24.29	31.09	53.98	53.98	0°/196cm	25.01	29.69																																			
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																							
30.18	23.53	17.93	23.01	40.00	40.00	247°/400cm	16.47	22.07																																																																							
87.72	27.15	21.64	13.36	40.00	40.00	22°/175cm	12.85	18.36																																																																							
966.17	28.97	24.29	31.09	53.98	53.98	0°/196cm	25.01	29.69																																																																							



# RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114					
Contact:	Michael Barger	Date:	5/31/2023					
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20					
Serial Number:	1	Relative Humidity (%):	37					
Voltage/Freq:	N/A	Barometric Pressure:	30					
Tested by:	Ryan Benitez	Location:	Hillsboro					
Product Standards:	FCC Part 15 Subpart C							
	N/A							
Test Standard:	FCC Part 15.209							
TEST RESULTS	TEST TYPE	DISTANCE	RUN #					
Pass	Compliance	3 meters	2					
COMMENTS	SIGNATURE							
BT at 2441;								
Horizontal								
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
2441.04	84.83	84.80	-9.11	73.98	53.98	221°/130cm	-10.85	N/A
4882.10	51.25	50.62	-3.32	73.98	53.98	-1°/154cm	22.73	3.36
7809.45	41.06	39.41	10.73	73.98	53.98	0°/143cm	32.92	14.57
14681.42	47.78	42.73	11.92	73.98	53.98	0°/168cm	26.20	11.25
17984.08	46.61	44.22	17.89	73.98	53.98	100°/124cm	27.37	9.76
Vertical								
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
2441.04	87.09	86.88	-9.11	73.98	53.98	202°/101cm	-13.11	N/A
4882.10	51.13	50.71	-3.32	73.98	53.98	112°/128cm	22.85	3.27
7806.32	42.21	39.40	10.69	73.98	53.98	35°/169cm	31.77	14.58
14673.31	47.72	42.76	11.93	73.98	53.98	302°/100cm	26.26	11.22
17874.87	47.54	44.64	17.54	73.98	53.98	203°/125cm	26.44	9.34




## RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/30/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	3

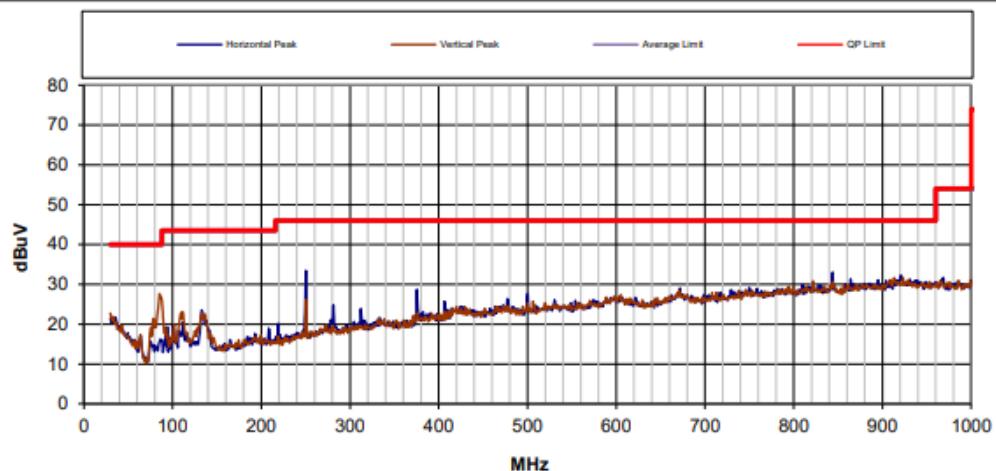


COMMENTS		SIGNATURE																																																																					
BT at 2480;																																																																							
<b>Horizontal</b>																																																																							
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>34.81</td><td>19.90</td><td>15.29</td><td>21.91</td><td>40.00</td><td>40.00</td><td>113°/100cm</td><td>20.10</td><td>24.71</td></tr> <tr> <td>133.11</td><td>19.98</td><td>15.51</td><td>15.43</td><td>43.52</td><td>43.52</td><td>126°/131cm</td><td>23.54</td><td>28.01</td></tr> <tr> <td>250.00</td><td>33.60</td><td>32.69</td><td>18.36</td><td>46.02</td><td>46.02</td><td>0°/101cm</td><td>12.42</td><td>13.33</td></tr> <tr> <td>843.74</td><td>34.74</td><td>32.46</td><td>29.98</td><td>46.02</td><td>46.02</td><td>315°/101cm</td><td>11.28</td><td>13.56</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	34.81	19.90	15.29	21.91	40.00	40.00	113°/100cm	20.10	24.71	133.11	19.98	15.51	15.43	43.52	43.52	126°/131cm	23.54	28.01	250.00	33.60	32.69	18.36	46.02	46.02	0°/101cm	12.42	13.33	843.74	34.74	32.46	29.98	46.02	46.02	315°/101cm	11.28	13.56																		
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																															
34.81	19.90	15.29	21.91	40.00	40.00	113°/100cm	20.10	24.71																																																															
133.11	19.98	15.51	15.43	43.52	43.52	126°/131cm	23.54	28.01																																																															
250.00	33.60	32.69	18.36	46.02	46.02	0°/101cm	12.42	13.33																																																															
843.74	34.74	32.46	29.98	46.02	46.02	315°/101cm	11.28	13.56																																																															
<b>Vertical</b>																																																																							
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>QP (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>QP Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>QP Margin (dB)</th></tr> </thead> <tbody> <tr> <td>30.11</td><td>23.00</td><td>17.81</td><td>23.03</td><td>40.00</td><td>40.00</td><td>98°/400cm</td><td>17.00</td><td>22.19</td></tr> <tr> <td>85.53</td><td>26.83</td><td>22.54</td><td>12.96</td><td>40.00</td><td>40.00</td><td>185°/161cm</td><td>13.17</td><td>17.46</td></tr> <tr> <td>923.45</td><td>29.33</td><td>24.75</td><td>31.49</td><td>46.02</td><td>46.02</td><td>-1°/247cm</td><td>16.69</td><td>21.27</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	30.11	23.00	17.81	23.03	40.00	40.00	98°/400cm	17.00	22.19	85.53	26.83	22.54	12.96	40.00	40.00	185°/161cm	13.17	17.46	923.45	29.33	24.75	31.49	46.02	46.02	-1°/247cm	16.69	21.27																											
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																															
30.11	23.00	17.81	23.03	40.00	40.00	98°/400cm	17.00	22.19																																																															
85.53	26.83	22.54	12.96	40.00	40.00	185°/161cm	13.17	17.46																																																															
923.45	29.33	24.75	31.49	46.02	46.02	-1°/247cm	16.69	21.27																																																															



## RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetech	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/30/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		
TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	3

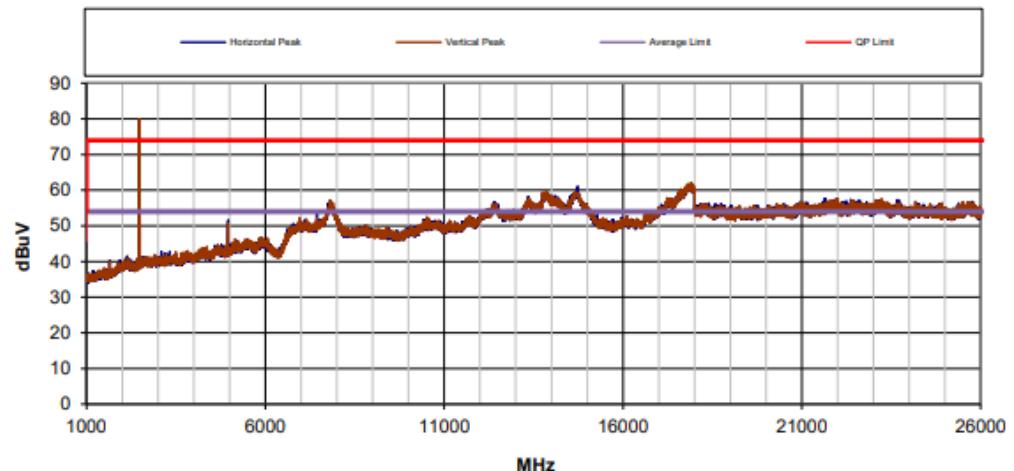

COMMENTS				SIGNATURE																																																										
BT at 2480;																																																														
<b>Horizontal</b>																																																														
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>Final (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>Final Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr><td>2480.05</td><td>86.20</td><td>86.12</td><td>-8.89</td><td>73.98</td><td>53.98</td><td>158°/129cm</td><td>-12.22</td><td>N/A</td></tr> <tr><td>4960.09</td><td>50.64</td><td>50.08</td><td>-3.11</td><td>73.98</td><td>53.98</td><td>41°/120cm</td><td>23.34</td><td>3.90</td></tr> <tr><td>7748.71</td><td>40.04</td><td>37.89</td><td>9.65</td><td>73.98</td><td>53.98</td><td>22°/101cm</td><td>33.94</td><td>16.09</td></tr> <tr><td>14731.19</td><td>45.47</td><td>42.48</td><td>11.83</td><td>73.98</td><td>53.98</td><td>12°/122cm</td><td>28.51</td><td>11.50</td></tr> <tr><td>17920.79</td><td>46.89</td><td>44.57</td><td>17.72</td><td>73.98</td><td>53.98</td><td>228°/102cm</td><td>27.09</td><td>9.41</td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	2480.05	86.20	86.12	-8.89	73.98	53.98	158°/129cm	-12.22	N/A	4960.09	50.64	50.08	-3.11	73.98	53.98	41°/120cm	23.34	3.90	7748.71	40.04	37.89	9.65	73.98	53.98	22°/101cm	33.94	16.09	14731.19	45.47	42.48	11.83	73.98	53.98	12°/122cm	28.51	11.50	17920.79	46.89	44.57	17.72	73.98	53.98	228°/102cm	27.09	9.41
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																						
2480.05	86.20	86.12	-8.89	73.98	53.98	158°/129cm	-12.22	N/A																																																						
4960.09	50.64	50.08	-3.11	73.98	53.98	41°/120cm	23.34	3.90																																																						
7748.71	40.04	37.89	9.65	73.98	53.98	22°/101cm	33.94	16.09																																																						
14731.19	45.47	42.48	11.83	73.98	53.98	12°/122cm	28.51	11.50																																																						
17920.79	46.89	44.57	17.72	73.98	53.98	228°/102cm	27.09	9.41																																																						
<b>Vertical</b>																																																														
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dB<math>\mu</math>V)</th><th>Final (dB<math>\mu</math>V)</th><th>Factors (dB)</th><th>Peak Limit (dB<math>\mu</math>V)</th><th>Final Limit (dB<math>\mu</math>V)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr><td>2480.04</td><td>89.04</td><td>88.56</td><td>-8.89</td><td>73.98</td><td>53.98</td><td>12°/144cm</td><td>-15.06</td><td>N/A</td></tr> <tr><td>7812.05</td><td>42.21</td><td>39.38</td><td>10.75</td><td>73.98</td><td>53.98</td><td>94°/175cm</td><td>31.77</td><td>14.60</td></tr> <tr><td>13853.91</td><td>41.53</td><td>39.30</td><td>9.35</td><td>73.98</td><td>53.98</td><td>12°/100cm</td><td>32.45</td><td>14.68</td></tr> <tr><td>17892.94</td><td>46.05</td><td>44.63</td><td>17.69</td><td>73.98</td><td>53.98</td><td>111°/169cm</td><td>27.93</td><td>9.35</td></tr> </tbody> </table>									Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	2480.04	89.04	88.56	-8.89	73.98	53.98	12°/144cm	-15.06	N/A	7812.05	42.21	39.38	10.75	73.98	53.98	94°/175cm	31.77	14.60	13853.91	41.53	39.30	9.35	73.98	53.98	12°/100cm	32.45	14.68	17892.94	46.05	44.63	17.69	73.98	53.98	111°/169cm	27.93	9.35									
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																						
2480.04	89.04	88.56	-8.89	73.98	53.98	12°/144cm	-15.06	N/A																																																						
7812.05	42.21	39.38	10.75	73.98	53.98	94°/175cm	31.77	14.60																																																						
13853.91	41.53	39.30	9.35	73.98	53.98	12°/100cm	32.45	14.68																																																						
17892.94	46.05	44.63	17.69	73.98	53.98	111°/169cm	27.93	9.35																																																						

Antenna: integrated / Channel 3



**RADIATED EMISSIONS DATA SHEET**

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114					
Contact:	Michael Barger	Date:	5/26/2023					
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20					
Serial Number:	1	Relative Humidity (%):	37					
Voltage/Freq:	N/A	Barometric Pressure:	30					
Tested by:	Ryan Benitez	Location:	Hillsboro					
Product Standards:	FCC Part 15 Subpart C							
	N/A							
Test Standard:	FCC Part 15.209							
<b>TEST RESULTS</b>	<b>TEST TYPE</b>	<b>DISTANCE</b>	<b>RUN #</b>					
Pass	Compliance	3 meters	5					
<b>COMMENTS</b>		<b>SIGNATURE</b>						
BT at 2441; DECT mid chan;								
<b>Horizontal</b>								
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)
35.82	19.63	14.83	21.68	40.00	40.00	50°/173cm	20.37	25.17
249.98	33.69	32.97	18.36	46.02	46.02	-1°/100cm	12.33	13.05
843.73	32.01	29.04	29.98	46.02	46.02	29°/101cm	14.01	16.98
<b>Vertical</b>								
Freq (MHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)
30.17	21.87	16.40	23.01	40.00	40.00	67°/373cm	18.13	23.60
88.15	26.41	20.99	13.44	43.52	43.52	315°/121cm	17.11	22.53
109.62	15.08	9.75	15.50	43.52	43.52	91°/160cm	28.44	33.77
977.83	28.85	24.14	31.32	53.98	53.98	315°/101cm	25.13	29.84



# RADIATED EMISSIONS DATA SHEET

Revision 11  
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114					
Contact:	Michael Barger	Date:	5/26/2023					
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20					
Serial Number:	1	Relative Humidity (%):	37					
Voltage/Freq:	N/A	Barometric Pressure:	30					
Tested by:	Ryan Benitez	Location:	Hillsboro					
Product Standards:	FCC Part 15 Subpart C							
	N/A							
Test Standard:	FCC Part 15.209							
TEST RESULTS	TEST TYPE	DISTANCE	RUN #					
Pass	Compliance	3 meters	5					
COMMENTS	SIGNATURE							
BT at 2441; DECT mid chan; notch filter at 1.9 GHz								
Horizontal								
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1924.99	56.32	29.47	-10.05	73.98	53.98	158°/100cm	17.66	N/A
2441.03	87.40	87.16	-9.11	73.98	53.98	247°/175cm	-13.42	N/A
7805.28	42.97	39.33	10.68	73.98	53.98	0°/101cm	31.01	14.65
13850.63	41.61	39.24	9.34	73.98	53.98	68°/175cm	32.37	14.74
17792.00	49.56	44.36	17.44	73.98	53.98	315°/150cm	24.42	9.62
Vertical								
Freq (MHz)	Peak (dB $\mu$ V)	Final (dB $\mu$ V)	Factors (dB)	Peak Limit (dB $\mu$ V)	Final Limit (dB $\mu$ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1924.99	53.34	28.84	-10.05	73.98	53.98	49°/200cm	20.64	N/A
2441.04	87.77	87.64	-9.11	73.98	53.98	157°/125cm	-13.79	N/A
4882.08	49.20	48.52	-3.32	73.98	53.98	113°/130cm	24.78	5.46
7819.83	41.60	39.33	10.79	73.98	53.98	315°/101cm	32.38	14.65
14682.03	44.81	42.59	11.92	73.98	53.98	68°/175cm	29.17	11.39
17873.03	49.50	44.47	17.54	73.98	53.98	0°/168cm	24.48	9.51

# END OF REPORT

EMI4019.05 Report_SON20220810_BT	Testing Report ElectroMagnetic Investigations	Page 72 of 72 APX.V2
-------------------------------------	---	-------------------------