

FCC (USA)/ISED (Canada) TEST REPORT

FCC 47 CFR Part 15D

Unlicensed Personal Communications Service Devices

Industry Canada RSS-213

**2 GHz License-exempt Personal Communications Service
Devices (LE-PCS)**

Report Reference No: SON20221114
Testing Laboratory: ElectroMagnetic Investigations, LLC
Address: 8531 NE Cornell Road. Suite 600, Hillsboro, OR, USA
Accreditation: A2LA Accredited Testing Laboratory

Applicant's name: Sonetics Corporation
Address: 17600 SW 65th Ave.
Lake Oswego OR 97035
United States
Testing specification
Standard: FCC 47 CFR Part 15D
FCC 47 CFR Part 15C
FCC 47 CFR Part 15B
RSS-213, Issue 2, 2005-12
RSS-Gen, Issue 3, 2010-12
ANSI C63.17 :2013
ANSI C63.4 :2014
Equipment Under test (EUT): Gen 3.9 Wireless Headset
Serial Number: APX37-9V2-FW-002
Product description: DECT headset with Listen through capability and Bluetooth connectivity
Model No. APX.V2
Additional Model(s): APX378 (DECT-only version)
Hardware version: APX.V2
Firmware / Software version: N/A
FCC ID: V9N950350000
IC ID 7895A-950350000
Test result: Passed

Possible test case verdicts

Neither assessed nor tested:	N/N
Required by standard but not applicable:	N/A
Required by standard but not tested:	NOT PERFORMED
Not required by standard:	N/R
EUT meets the requirement:	P (Pass)
EUT does not meet the requirement:	F (Fail)

Testing

Test Lab Temperature:	20 – 28 C
Test Lab Humidity:	30 – 38 %
Date EUT received:	August 29, 2022
Date(s) of performance of tests:	August 29, 2022 to March 13, 2023
Complied by:	Ryan Benitez 

Tested by:	Ryan Benitez 
Approved by:	Henry Benitez 
Date of issue:	July 25, 2023
Total number of pages:	75

General remarks

The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without written approval of the issuing test laboratory.

Revision History

Version	Date Issued	Description of Revision

Authorizations

FCC (USA): Accepted by FCC for performance of radiated emissions and conducted emissions measurements. FCC ID: US1092.

Industry Canada: Accepted by Industry Canada for performance of radiated emissions and conducted emissions measurements. ISED Canada CAB ID US0203.

European Union (CE): ElectroMagnetic Investigations, LLC is equipped and capable of performing EMC CE compliance testing to European Union EMC CE requirements for Information Technology Equipment (ITE), Measurement, Control and Laboratory Equipment (MCL), and other equipment.

American Association of Lab Accreditations (A2LA): ElectroMagnetic Investigations is accredited to perform the tests contained within this report to the standards listed.



Certificate #2569.01

Report Index

- 1 Equipment (Test item) Description
 - 1.1 Photos – Equipment external
 - 1.2 Photos - Equipment internal
 - 1.3 Photos – Test setup
 - 1.4 Supporting equipment used during testing
 - 1.5 Test modes
 - 1.6 Test equipment used during testing
 - 1.7 Sample of emissions level calculations
- 2 Result Summary
- 3 Test Conditions and results
 - 3.1 Channel Frequencies
 - 3.2 AC Power line conducted emissions
 - 3.3 Antenna requirement
 - 3.4 Digital modulation
 - 3.5 Occupied Bandwidth
 - 3.6 Emissions Bandwidth
 - 3.7 Peak transmit power
 - 3.8 Power spectral density
 - 3.9 Frequency stability
 - 3.10 In-band unwanted emissions
 - 3.11 Out-of-band emissions
 - 3.12 Receiver spurious emissions
 - 3.13 Automatic discontinuation of transmission
 - 3.14 Radiofrequency radiation exposure
 - 3.15 Monitoring threshold
 - 3.16 LIC confirmation
 - 3.17 LIC selection
 - 3.18 Monitoring antenna
 - 3.19 Monitoring time
 - 3.20 Monitoring bandwidth
 - 3.21 Monitoring reaction time
 - 3.22 Access Criteria functional test
 - 3.23 Acknowledgments
 - 3.24 Maximum spectral occupancy
 - 3.25 Fair access
 - 3.26 Frame period and Jitter
 - 3.27 Frame and repetition stability

1 Equipment (Test item) description

Description:	DECT headset with Listen through capability and Bluetooth connectivity
Model:	APX.V2
Additional Model(s):	APX378
Brand Name(s):	Sonetcs Corporation
Serial number:	None
Hardware version:	N/A
Software / Firmware version:	N/A
FCC-ID:	V9N950350000
IC:	7895A-950350000
Equipment type:	End product
Radio type:	DECT portable part
Number of radios:	1 DECT transceiver built into device and 1 Bluetooth transceiver built into device
Radio technology:	DECT 6.0
Operating frequency range:	1921.536 – 1928.448 MHz
Assigned frequency band:	1920 – 1930 MHz
Number of RF channels:	5
Supported slots:	even and odd
Number of time slots:	$12 \times \text{Tx} + 12 \times \text{Rx} = 24$
Channels	$F_0 \quad \text{CH:1 / 1928.448 MHz}$ $F_1 \quad \text{CH:2 / 1926.720 MHz}$ $F_2 \quad \text{CH:3 / 1924.992 MHz}$ $F_3 \quad \text{CH:4 / 1923.264 MHz}$ $F_4 \quad \text{CH:5 / 1921.532 MHz}$
Main test frequencies	$F_{\text{low}} \quad \text{CH:5 / 1921.532 MHz}$ $F_{\text{mid}} \quad \text{CH:3 / 1924.992 MHz}$ $F_{\text{high}} \quad \text{CH:1 / 1928.448 MHz}$
Modulations	GFSK
Emissions designator	F7D
Nominal emission bandwidth	1.42 MHz
Channel spacing	1728 kHz
Spectrum access	Listen before transmit
Nominal lower threshold	N/A
Nominal upper threshold	-60 dBm
Number of antennas	2

Antenna 1

Type	integrated
Model	printed f antenna
Manufacturer	Sonetcs
Gain	0 dBi

Antenna 2

Type	integrated
Model	printed f antenna
Manufacturer	Sonetcs
Gain	0 dBi

Manufacturer

Sonetcs Corporation
17600 SW 65th Ave.
Lake Oswego OR 97035
United States

Power supply

V_{nom}	12 V DC
V_{min}	4.5 V DC
V_{max}	15 V DC

AC/DC adaptor

Model	YMC06-3U
Vendor	Ji Ming
Input	100-240 V AC 50/60 Hz
Output	12 V DC

Temperature

T_{nom}	25 C
T_{min}	-40 C
T_{max}	70 C

1.1 Photos – Equipment external

See dedicated report

1.2 Photos – Equipment internal

See dedicated report

1.3 Photos – Test setup

See dedicated report

1.4 Supporting equipment used during testing

Product type*	Device	Manufacturer	Model No.	Comments
		None		

*Note: Use the following abbreviations:
AE : Auxiliary/Associated Equipment
SIM : Simulator (Not Subject to Test)
CABL : Connecting cables

1.5 Test modes

Mode #	Description	
TDMA	General conditions:	EUT powered by a laboratory power supply. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
Receive	General conditions:	EUT powered by a laboratory power supply.
	Radio conditions:	Mode = standalone receive Modulation = GFSK
AC-Powerline	General conditions:	Active data connection between EUT and companion device. EUT connected to AM main via AC/DC Adaptor
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum

1.6 Test equipment used during testing

Conducted				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4440A	2022/01/28	2023/07/28
DECT Tester	R&S	CMD60	2023/03/16	2024/03/16
Signal generator	R&S	SME06	2021/09/03	2026/09/03
Signal generator	R&S	SME06	Cal on use	Cal on use
Signal generator	R&S	SME03	Cal on use	Cal on use
Signal generator	Marconi	2412	Cal on use	Cal on use
Pulse generator	Agilent	81104A	Cal on use	Cal on use
Coupler	Narda	4222-16	2022/12/05	2023/12/05

Radiated spurious emissions				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4440A	2023/05/13	2024/05/13
Analyzer	Agilent	E4443A	2023/01/30	2026/01/30
Antenna	Com-Power	AC-220	2021/08/30	2023/08/30
Antenna	Com-Power	AHA-118	2021/08/24	2023/08/24
Antenna	Com-Power	AH-1840	2022/11/11	2027/11/11
Pre-Amp	Amplifier Research	LN1000	2023/02/18	2024/02/18

AC powerline conducted emissions				
Description	Manufacturer	Model	Cal. Date	Cal. Due
Analyzer	Agilent	E4443A	2023/01/30	2026/01/30
LISN	Fischer Custom Communications	FCC-50-50-04-02	2020/12/08	2025/12/08

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric field strength to voltage that can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Measurement Uncertainty:

Test Measurement uncertainties (k=2.05):

Radiated Field strength at 3m measured with:

<i>Bilog Antenna (30 MHz – 1 GHz)</i>	<i>±5.6 dB</i>
<i>Horn Antenna (1-18 GHz)</i>	<i>±4.0 dB</i>

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A positive margin indicates the emission was below the limit. A negative margin indicates that the emission exceeds the emission was below the limit.

Example only:

$$\text{Reading + A.F.} = \text{Net Reading} : \text{FCC limit – Net reading} = \text{Margin}$$

$$21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = 47.5 \text{ dB}\mu\text{V/m} : 57.0 \text{ dB}\mu\text{V/m} - 47.5 \text{ dB}\mu\text{V/m} = 9.5 \text{ dB}$$

2 Result summary

FCC 47 CFR Part 15D, 15C, IC RSS-213. IC RSS-Gen					
Section	Requirement - Test	FCC	IC	ANSI	Result
3.1	Channel Frequencies	15.303	RSS-213 5.1	---	PASS
3.2	AC power line conducted emissions	15.107(a) 15.207(a)	RSS-213 5.4 RSS-Gen 7.2 / 8.8	C63.4 7	PASS
3.3	Antenna Requirement	15.317, 15.203	RSS-GEN 6.8	---	PASS
3.4	Digital modulation	15.319(b)	RSS -213 5.1	6.1.4	PASS
3.5	Occupied Bandwidth	N/A	RSS-GEN 6.7	6.1.3	PASS
3.6	Emission Bandwidth	15.323(a)	RSS-213 5.5	6.1.3	PASS
3.7	Peak Transmit Power and Antenna Gain	15.319(c)(e) 15.31(e)	RSS-213 5.6 RSS-GEN 8.3	6.1.2	PASS
3.8	Power Spectral Density	15.319(d)	RSS-213 5.7	6.1.5	PASS
3.9	Frequency stability	15.323(f)	RSS-213 5.3	6.2.2	PASS
3.10	In-band unwanted emissions	15.323(d)	RSS-213 5.8.2	6.1.6.1	PASS
3.11	Out-of-band-emissions	15.323(d)	RSS-213 5.8.1	6.1.6.2	PASS
3.12	Spurious Emissions (Radiated)	15.319(g) 15.109(a) 15.209(a)	RSS-GEN 7.3 / 8.9	C63.4	PASS
3.13	Automatic discontinuation of transmission	15.319(f)	RSS-213 5.2	---	PASS
3.14	Radiofrequency radiation exposure	15.319(i)	RSS-102	---	N/A
3.15	Monitoring threshold	15.323(c)(2)(5)(9)	RSS-213 5.2 (2)(5)(9)	7.3.1	N/A
3.16	LIC confirmation	15.323(c)(5)	RSS-213 5.2 (5)	7.3.2	PASS
3.17	LIC selection	15.323(c)(5)	RSS-213 5.2 (5)	7.3.2	PASS
3.18	Monitoring antenna	15.323(c)(8)	RSS-213 5.2 (8)	4	PASS
3.19	Monitoring time	15.323(c)(1)	RSS-213 5.2 (1)	7.3.3	PASS
3.20	Monitoring bandwidth	15.323(c)(7)	RSS-213 5.2 (7)	7.4	PASS
3.21	Monitoring reaction time	15.323(c)(7)	RSS-213 5.2 (7)	7.5	PASS
N/A	Access criteria test interval	15.323(c)(4)(6)	RSS-213 5.2 (6)	---	PASS
3.22	Access criteria functional test	15.323(c)(4)(6)	RSS-213 5.2 (6)	8.1.2 or 8.1.3	PASS
3.23	Acknowledgments	15.323(c)(4)	RSS-213 5.2 (4)	8.1 or 8.2	PASS

N/A	Maximum transmit duration	15.323(c)(3)	RSS-213 5.2 (3)	---	N/A
3.24	Maximum spectrum occupancy	15.323(c)(5)	RSS-213 5.2 (5)	---	PASS
N/A	Duplex connections	15.323(c)(10)	RSS-213 5.2 (10)	8.3	N/A
N/A	Alternative monitoring interval	15.323(c)(11)(12)	RSS-213 5.2 (11)(12)	8.4	N/A
3.25	Fair access	FCC 15.323(c)(12)	IC RSS-213 4.3.4(b)(12)	---	PASS
3.26	Frame period and jitter	15.323(e)	RSS-213 5.2 (13)	6.2.3	PASS
3.27	Frame repetition stability	15.323(e)	RSS-213 5.2 (13)	6.2.2	PASS

3 Test conditions and results

3.1 Channel Frequencies

FCC 15.303, RSS-213 Issue 3, clause 5.1:

Within 1920 – 1930 MHz band for isochronous devices.

UPCS Channel	Frequency (MHz)
Upper Band Edge	1930.000
1 (Highest)	1928.448
2	1926.720
3	1924.992
4	1923.264
5 (Lowest)	1921.536
Lower Band Edge	1920.000

3.2 Test conditions and results – AC power line conducted emissions

Conducted emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
Test performed by: ElectroMagnetic Investigations				
EUT requirement rule parts and clause		Reference		
		FCC 15.107(a), FCC 15.207(a) RSS-213 5.4, RSS-Gen 7.2 / 8.8		
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Points of Application		Application Interface		
AC Mains		LISN		
EUT test mode		AC-Powerline		
Limits and results				
Frequency [MHz]	Quasi-Peak [dB μ V]	Result	Average [dB μ V]	Result
0.15 to 0.5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: *Limit decreases linearly with the logarithm of the frequency.				

Conducted Emissions Measurement System uncertainty ($k=2.05$) ± 3.7 dB


Sample conducted emissions measurement:

RF Reading from Spectrum Analyzer (dB μ V) + Cable Loss Factor (dB) + LISN Factor (dB) = Final Conducted Emission Level (dB μ V).

CONDUCTED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221113
Contact:	Michael Barger	Date:	11/14/2022
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20.9
Serial Number:	1	Relative Humidity (%):	30
Voltage/Freq:	120 V 60 Hz	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.207		
TEST RESULTS	TEST TYPE	LINE	RUN #
Pass	Compliance	Line	1

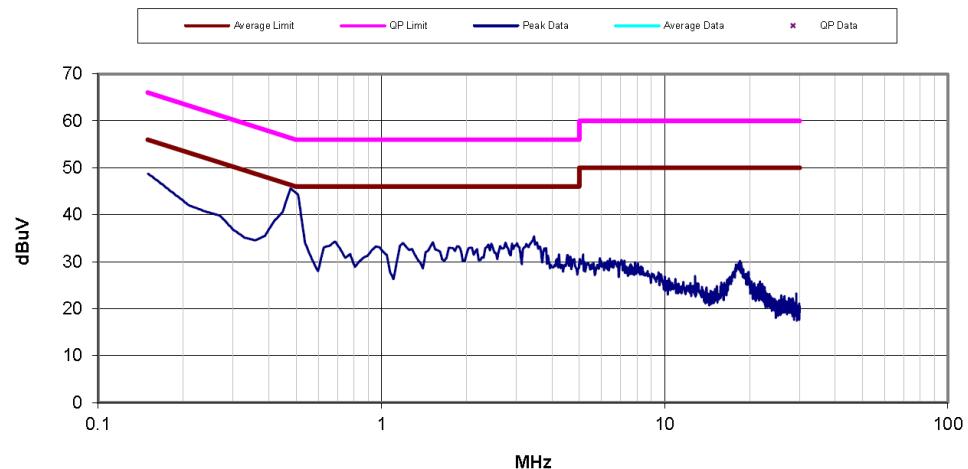


CONDUCTED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetechs	Job Reference#:	SON20221113
Contact:	Michael Barger	Date:	11/14/2022
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20.9
Serial Number:	1	Relative Humidity (%):	30
Voltage/Freq:	120 V 60 Hz	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.207		
TEST RESULTS	TEST TYPE	LINE	RUN #
Pass	Qualification	Not Applicable	

TEST RESULTS	TEST TYPE	LINE	RUN #
Pass	Compliance	Neutral	1

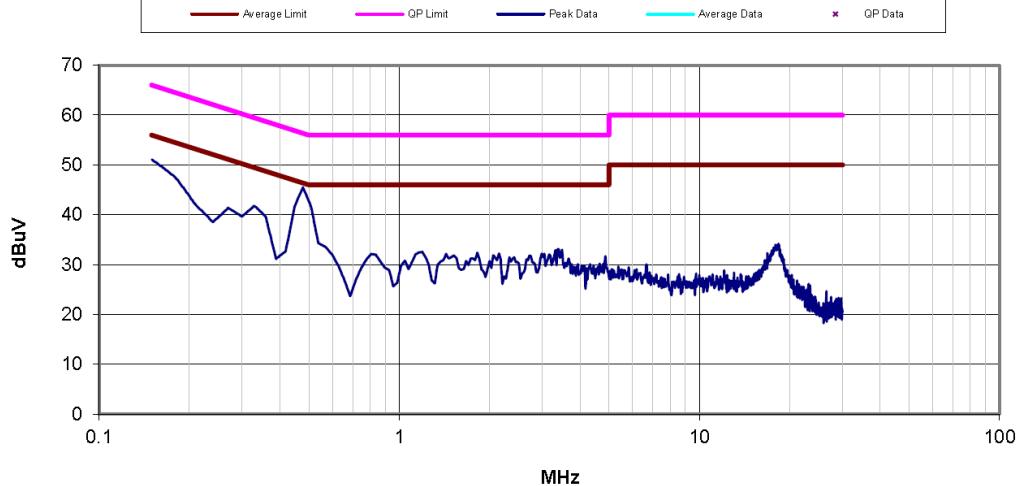

3.3 Test conditions and results – Antenna requirement


Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-GEN		Verdict: PASS	
Test performed by: ElectroMagnetic Investigations			
EUT requirement rule parts and clause	Reference	FCC 15.317, FCC 15.203, RSS-GEN 6.8	
Test according to measurement reference	Reference	Visual inspection & declaration	
Requirements			
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated based on measurement or on data from the measured RF output power before using the power limits.</p>			
Results			
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3 dBi
1	internal	0	0
Comment:			


3.4 Test conditions and results – Digital modulation


Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: Pass
Test performed by: ElectroMagnetic Investigations		
EUT requirement rule parts and clause	Reference	
	FCC 15.319(b), IC RCC-213 5.1	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
All transmission must use only digital modulation techniques.		
Results		
<p>The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device is based on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above.</p> <p>The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation.</p> <p>For further details see operational description provided by manufacturer.</p>		

3.5 Test conditions and results – Occupied bandwidth

Occupied Bandwidth acc. to IC RSS-GEN		Verdict: PASS
Test performed by: ElectroMagnetic Investigations		
Test according to measurement reference		Reference Method
		IC RSS-GEN 6.7
Tested frequencies		F_{mid}
EUT test mode		TDMA
Limits		
0.05 MHz <= Occupied Bandwidth < 2.5 MHz		
Test results		
Channel	Center frequency [MHz]	Occupied Bandwidth [MHz]
F_{LOW}	1921.536	1.2228
F_{MID}	1924.992	1.2306
F_{HIGH}	1928.448	1.2334
Comments:		

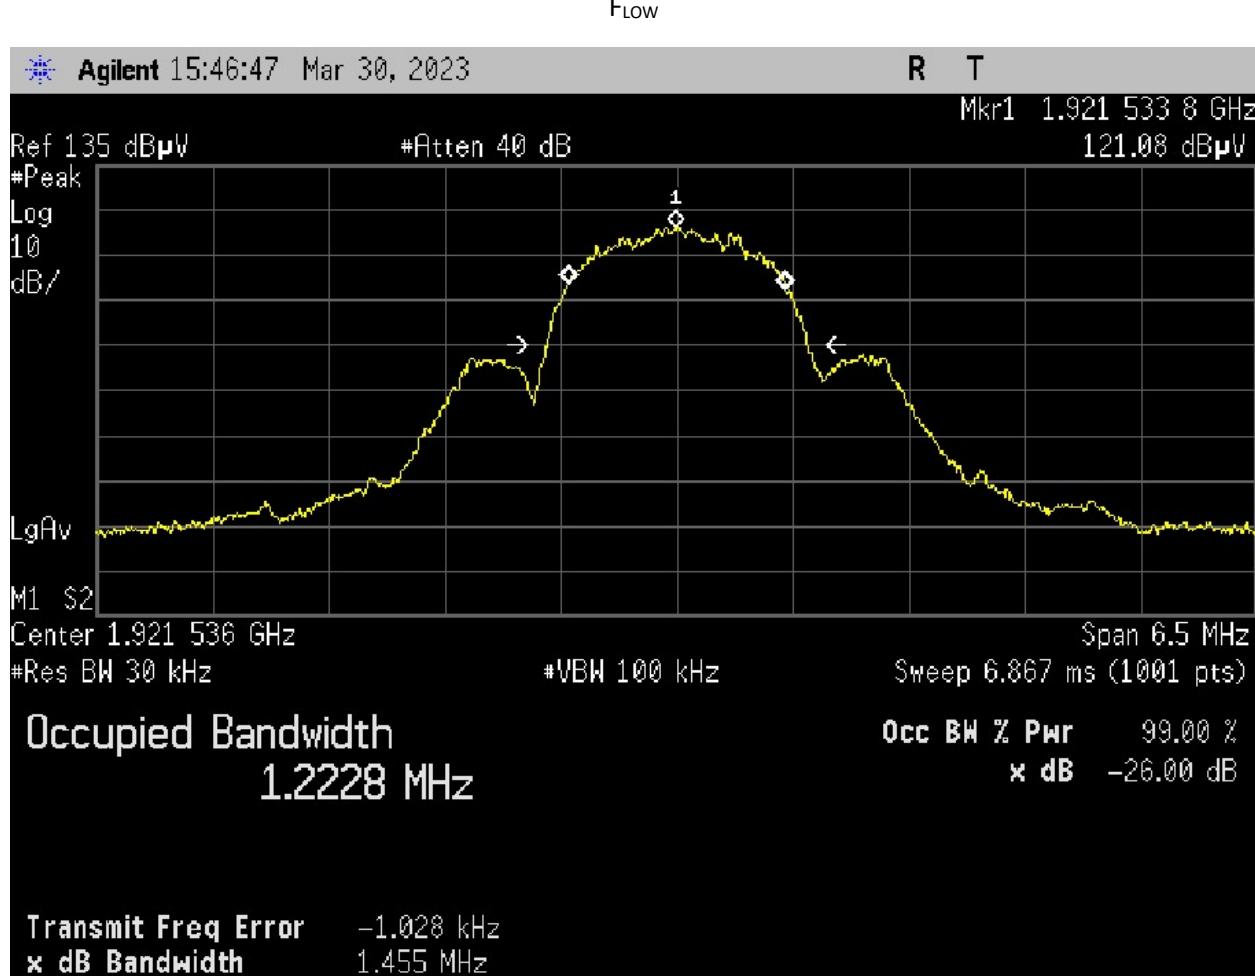


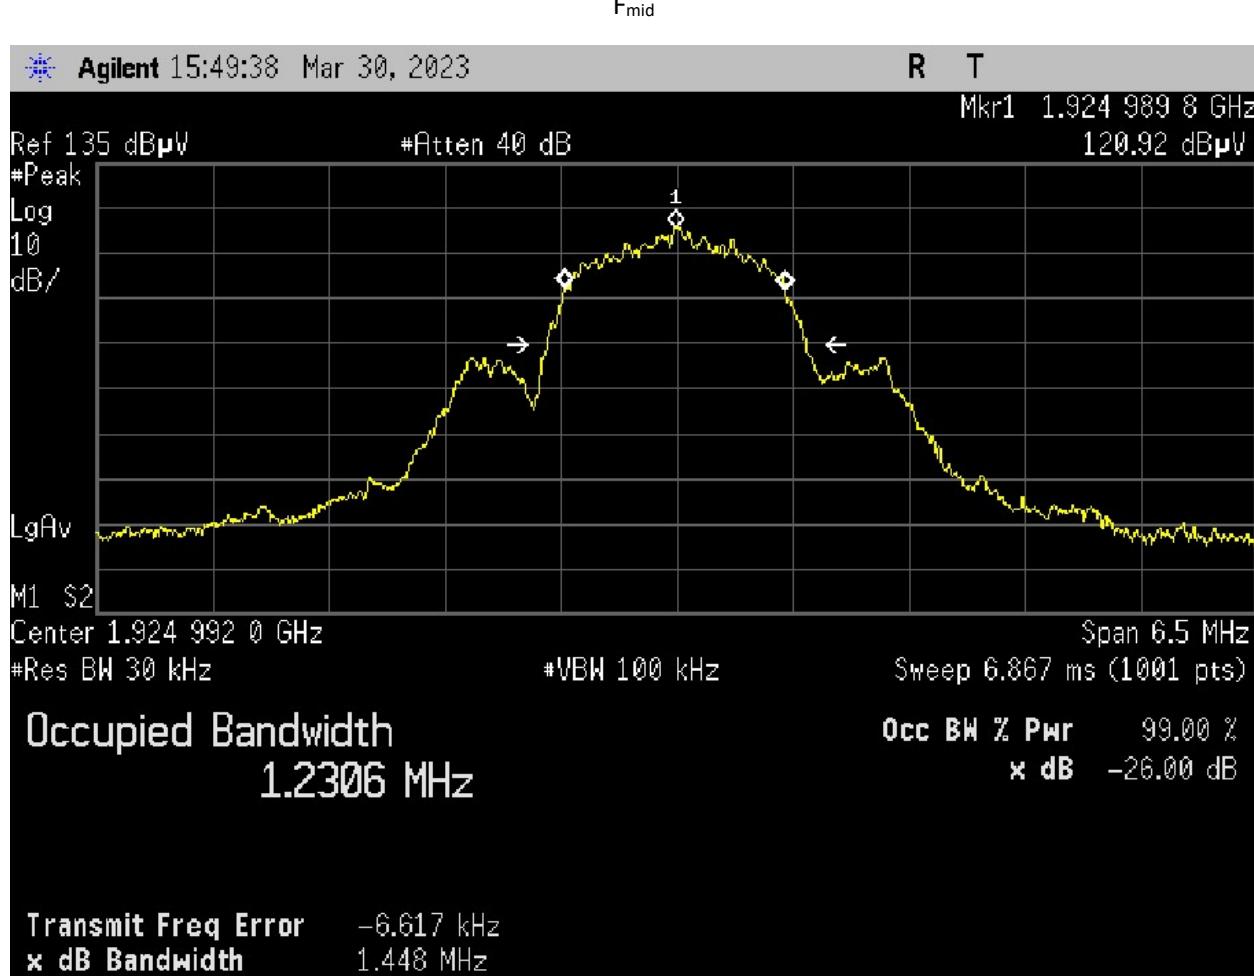


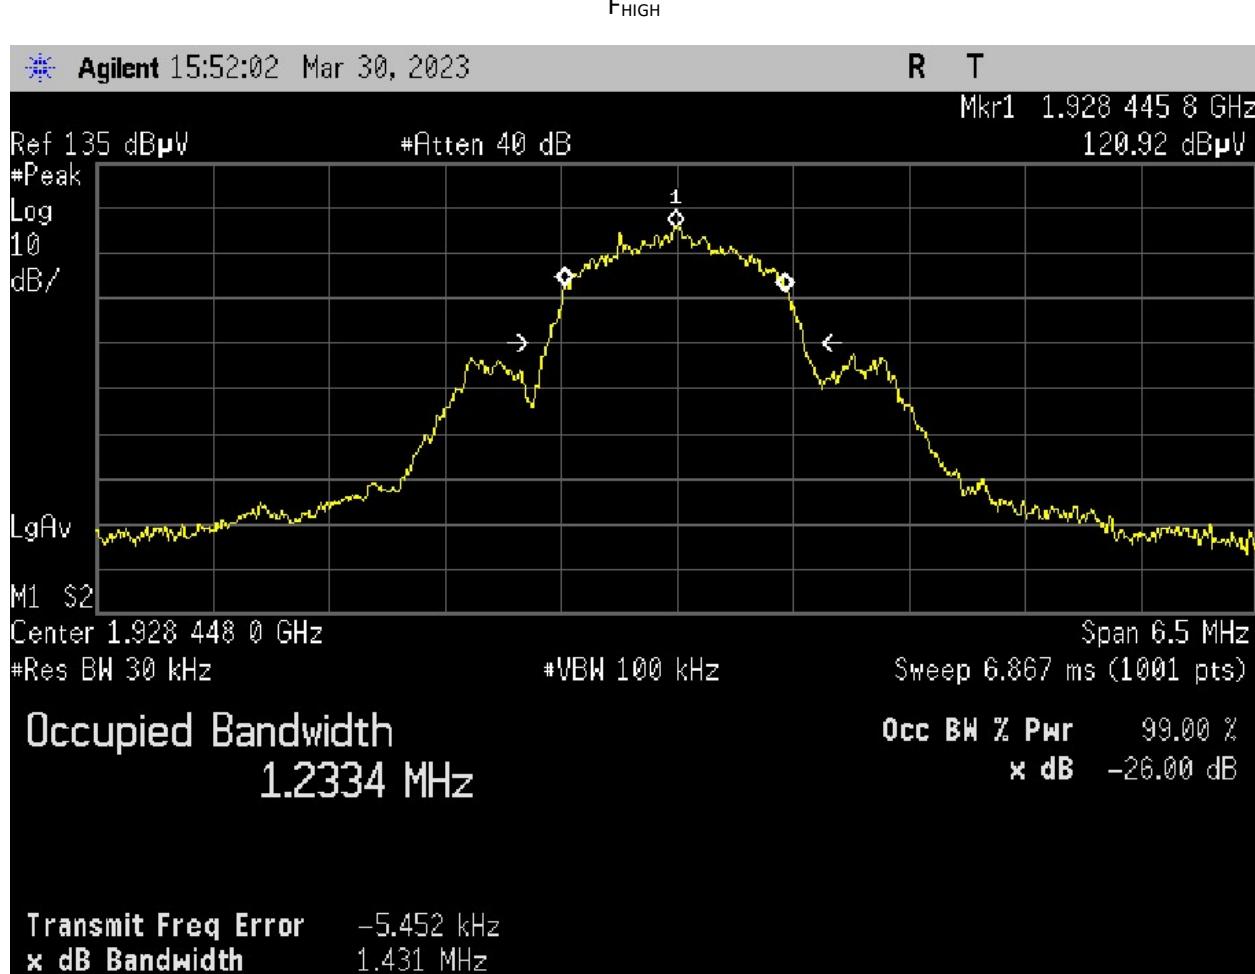


3.6 Test conditions and results – Emission Bandwidth

Emission Bandwidth acc. to FCC 47 CFR 15D and RSS-213		Verdict: PASS		
Test performed by: ElectroMagnetic Investigations				
Test according to measurement reference	Reference			
	FCC 15.323(a), IC RSS-213 5.5			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.1.3			
Tested frequencies	$F_{\text{low}} / F_{\text{high}}$			
EUT test mode	TDMA			
Limits				
0.05 MHz ≤ Emission Bandwidth < 2.5 MHz				
Test results				
Channel	Center frequency [MHz]	Mode	Emission Bandwidth [MHz]	
F_{low}	1921.536	-26 dB	1.455	
F_{MID}	1924.992	-26 dB	1.448	
F_{high}	1928.448	-26 dB	1.431	
Comments:				

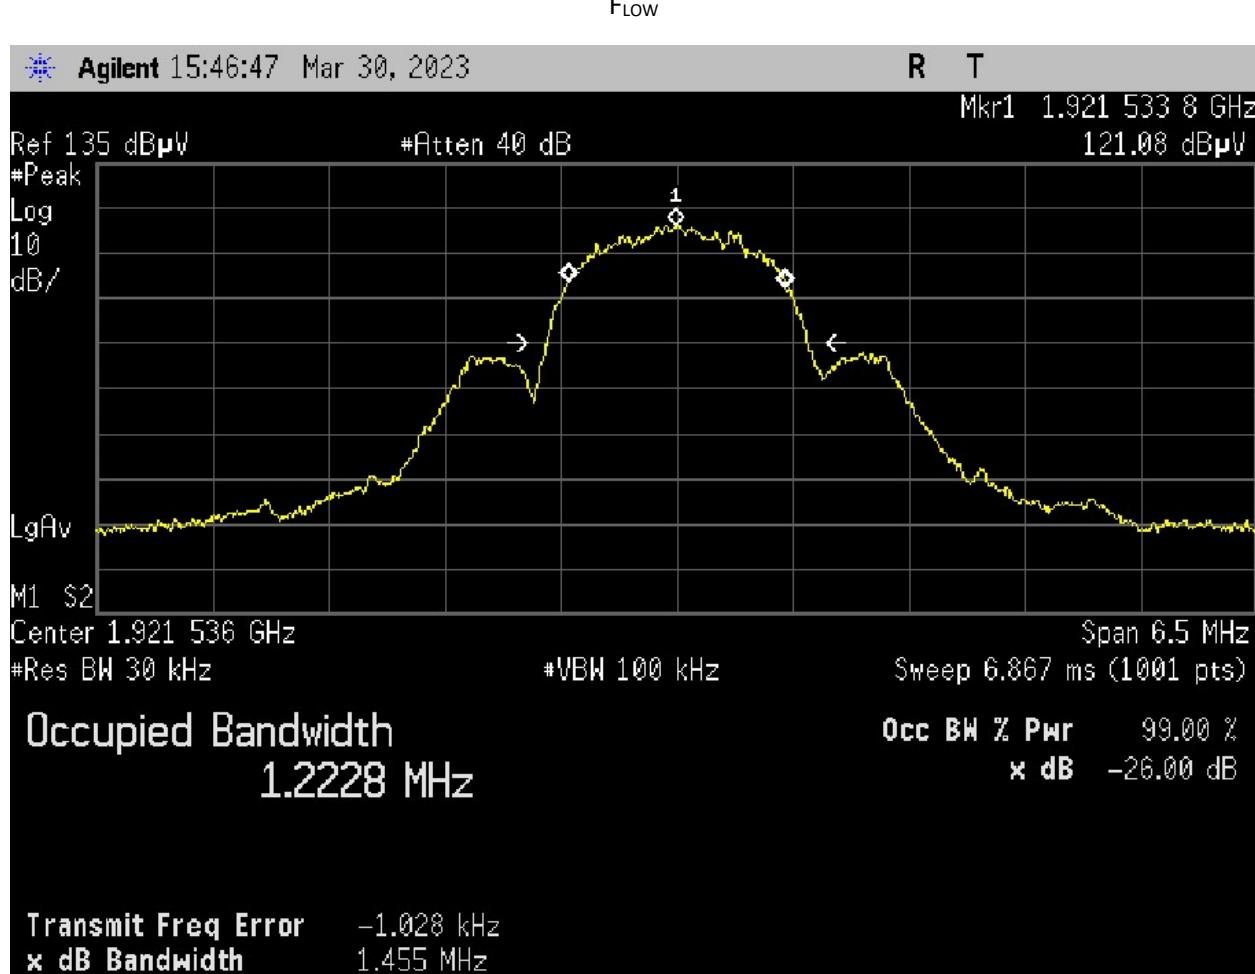


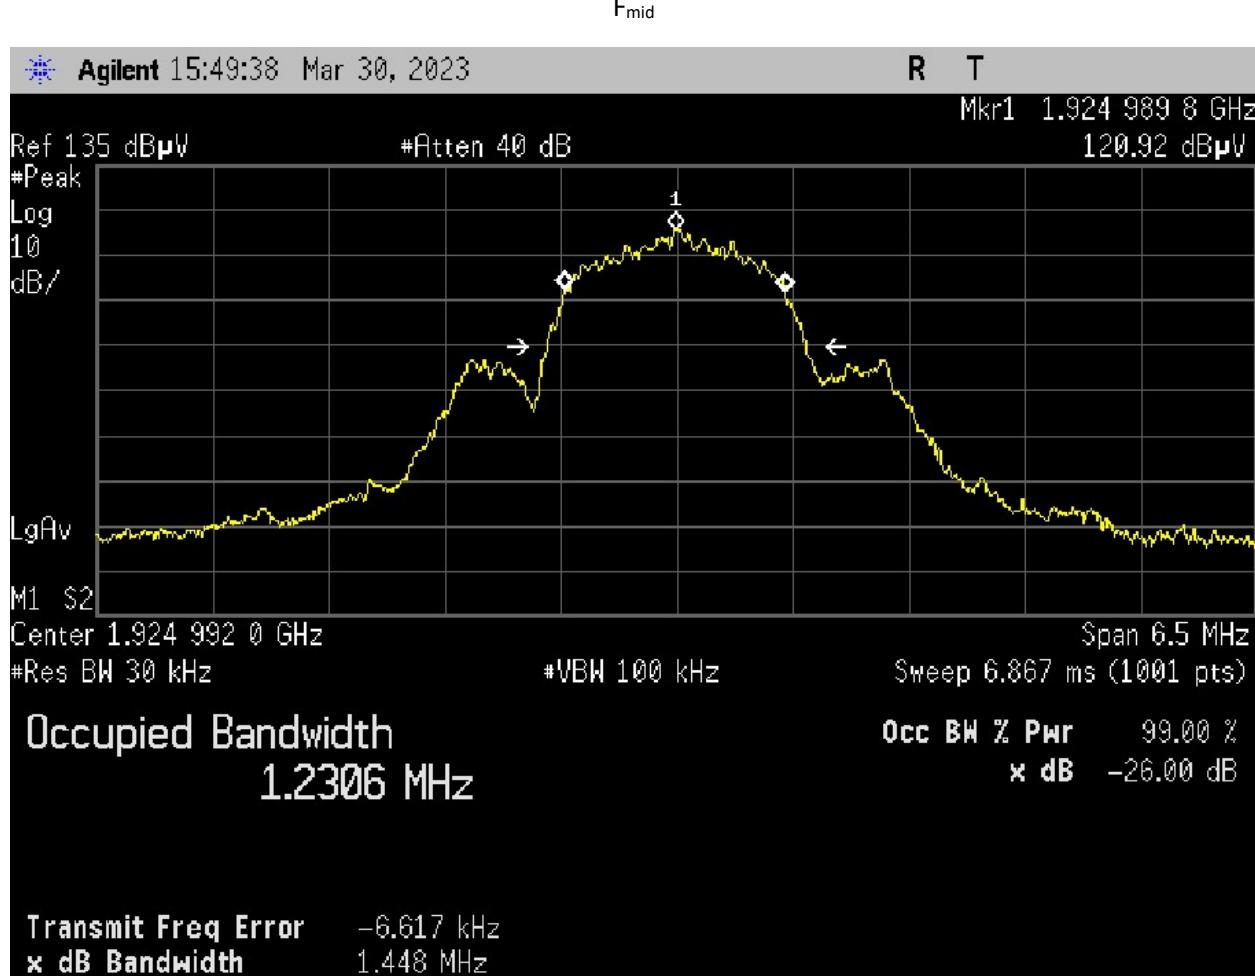

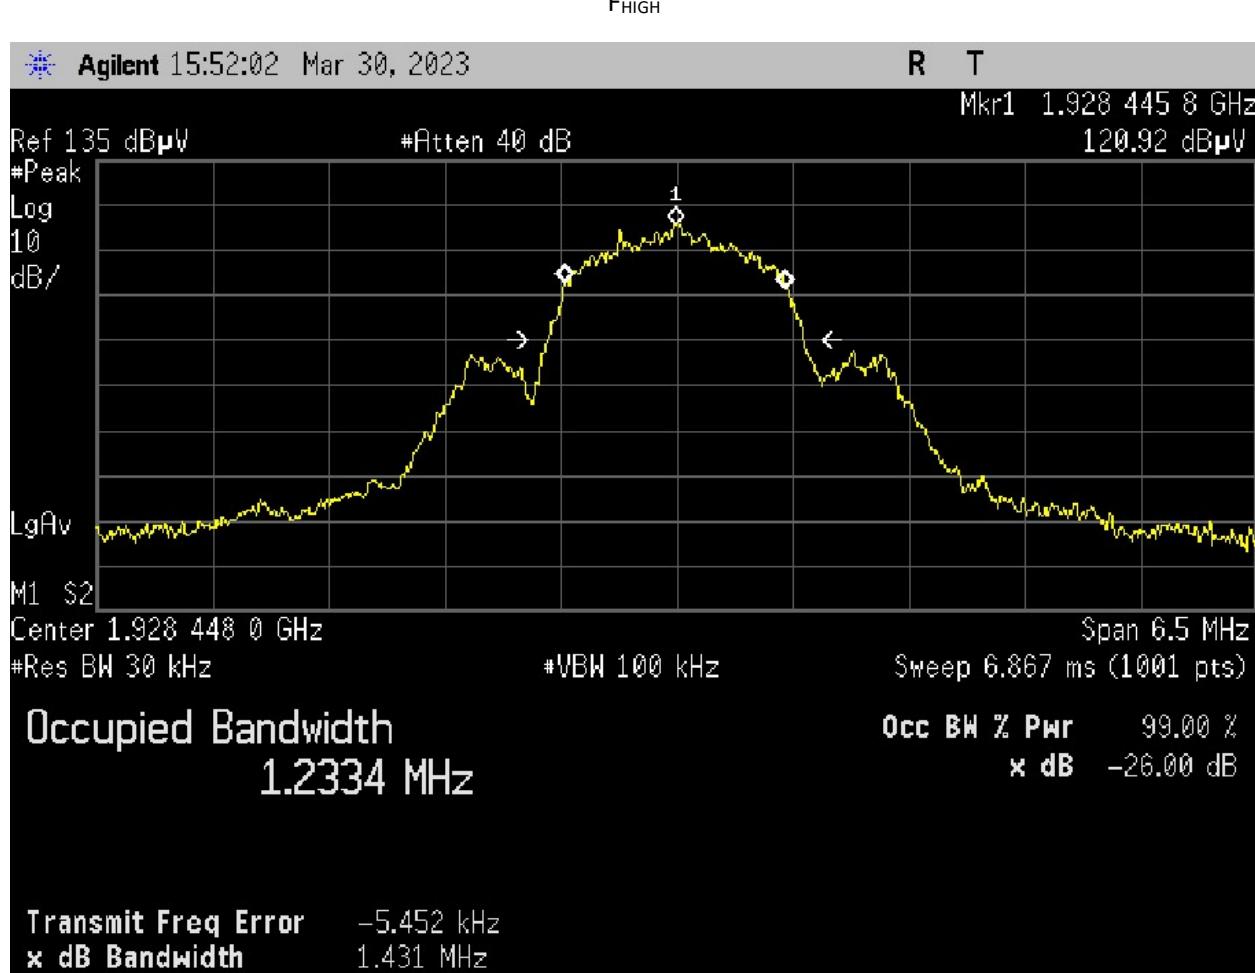



3.7 Test conditions and results – Peak transmit power

Peak transmit power acc. to FCC 47 CFR 15D / ICC RSS-213			Verdict: PASS									
Test performed by: ElectroMagnetic Investigations												
EUT requirement rule parts and clause		Reference										
		FCC 15.319(c),(e), IC RSS-5.6, IC RSS-GEN 8.3										
Test according to measurement reference		Reference Method										
		ANSI C63.17 6.1.2										
Tested frequencies		$F_{\text{LOW}} / F_{\text{MID}} / F_{\text{HIGH}}$										
EUT test mode		TDMA										
Antenna excess gain		0 dB										
Limits												
Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.												
Test results - FCC												
Channel	Frequency [MHz]	Peak Power [dBm]	Excess gain [dB]	Limit [dBm]	Margin [dB]							
F_{LOW}	1921.536	20.27	0	20.88	0.31							
F_{MID}	1924.992	20.34	0	20.88	0.24							
F_{HIGH}	1928.448	20.23	0	20.88	0.35							
Test results – IC												
Channel	Frequency [MHz]	Peak Power [dBm]	Excess gain [dB]	Limit [dBm]	Margin [dB]							
F_{LOW}	1921.536	20.27	0	20.45	0.18							
F_{MID}	1924.992	20.34	0	20.45	0.11							
F_{HIGH}	1928.448	20.23	0	20.45	0.22							
Comments:												

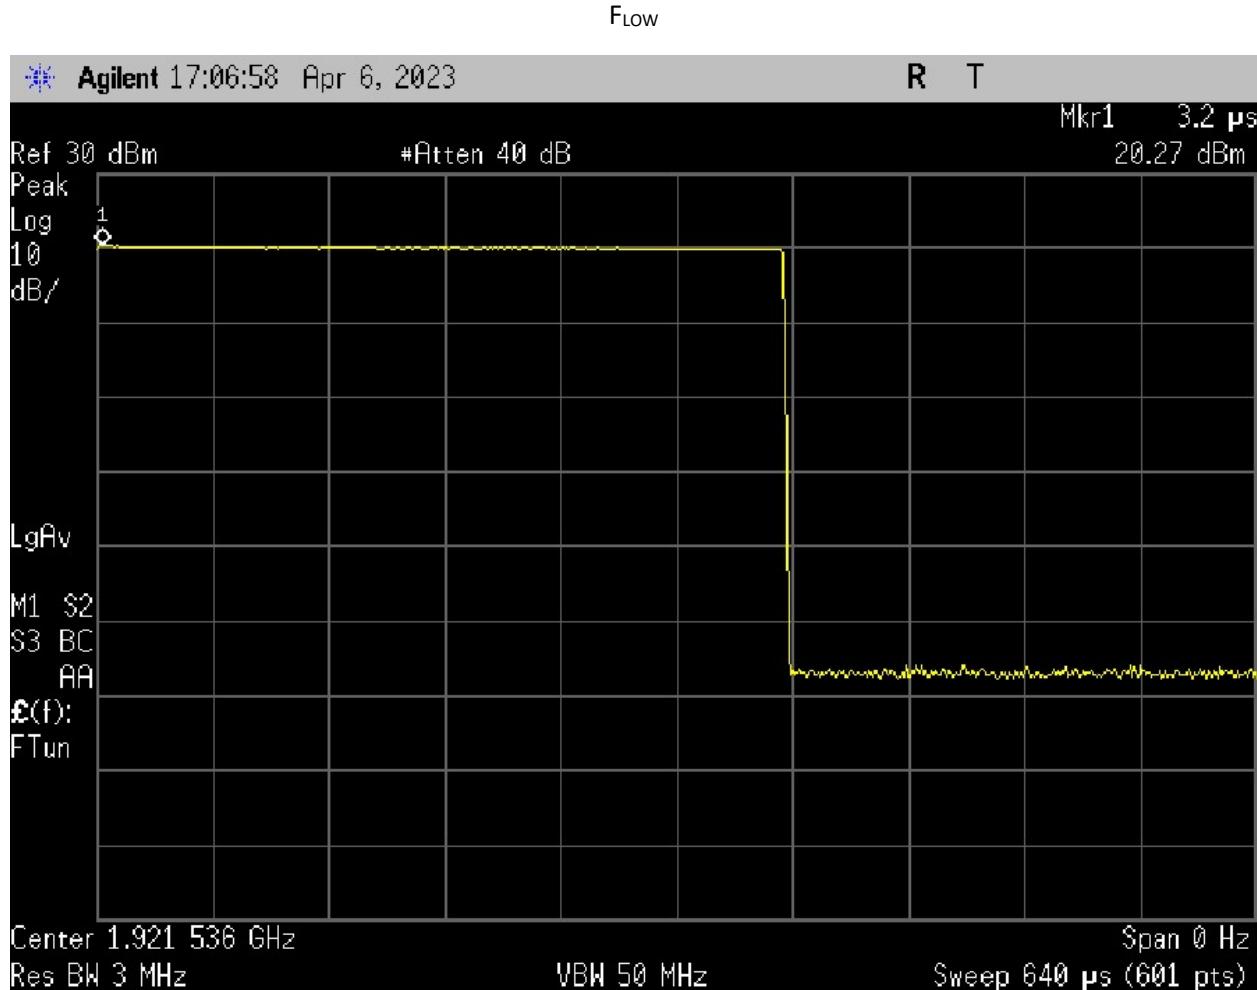


F_{MID}

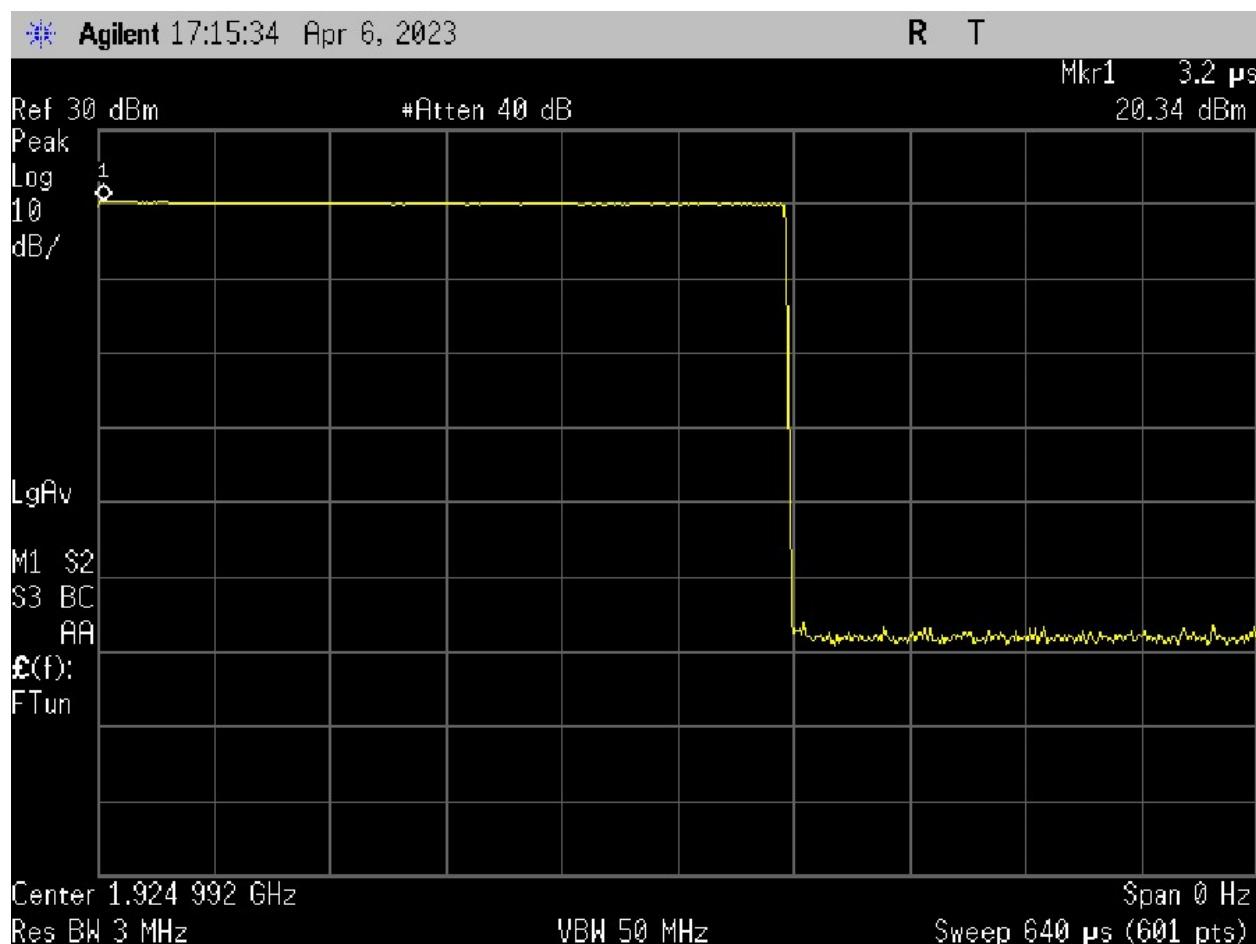

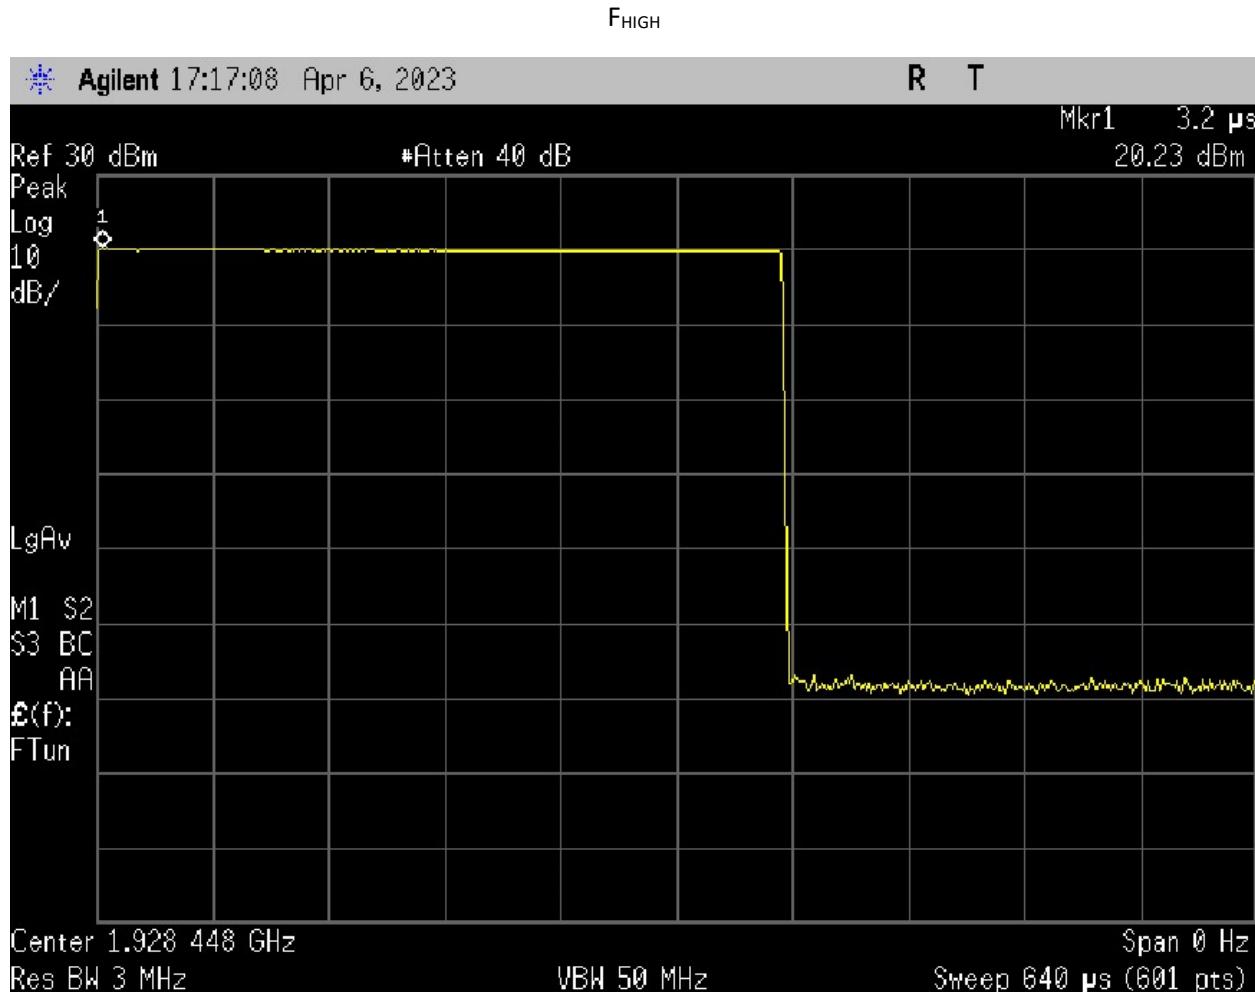


3.8 Test conditions and results – Power spectral density


Power spectral density acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
Test performed by: ElectroMagnetic Investigations				
EUT requirement rule parts and clause	Reference			
	FCC 15.319(d) / IC RSS-213 5.7			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.1.5			
Tested frequencies	F_{low} / F_{high}			
EUT test mode	TDMA			
Limits				
\leq mW (4.77 dBm) / 3 kHz				
Test results				
Channel	Frequency [MHz]	Peak Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
F_{low}	1921.536	-0.987	4.77	5.757
F_{MID}	1924.992	-0.033	4.77	4.803
F_{high}	1928.448	-0.474	4.77	5.244
Comments:				

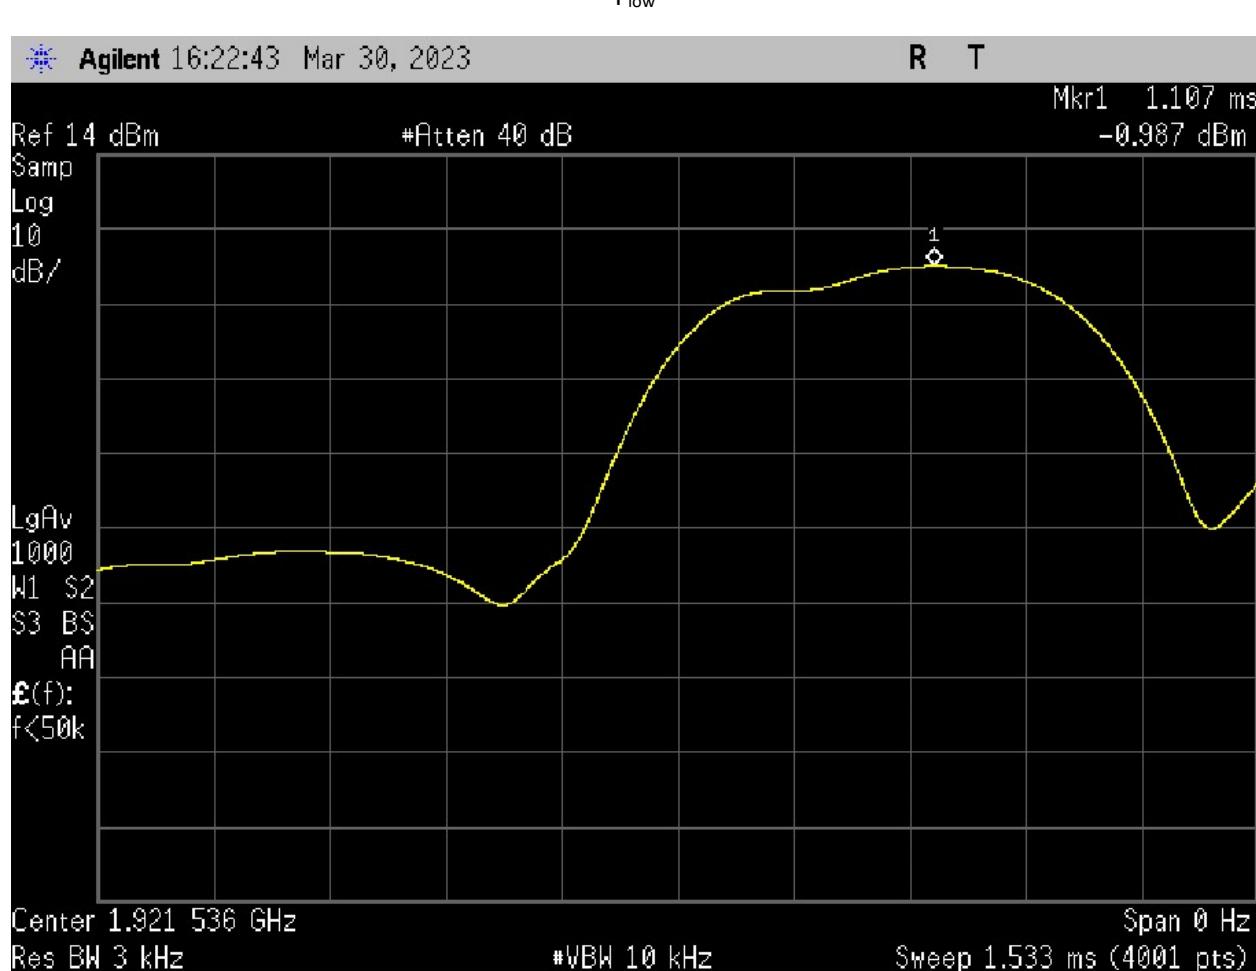

F_{MID}

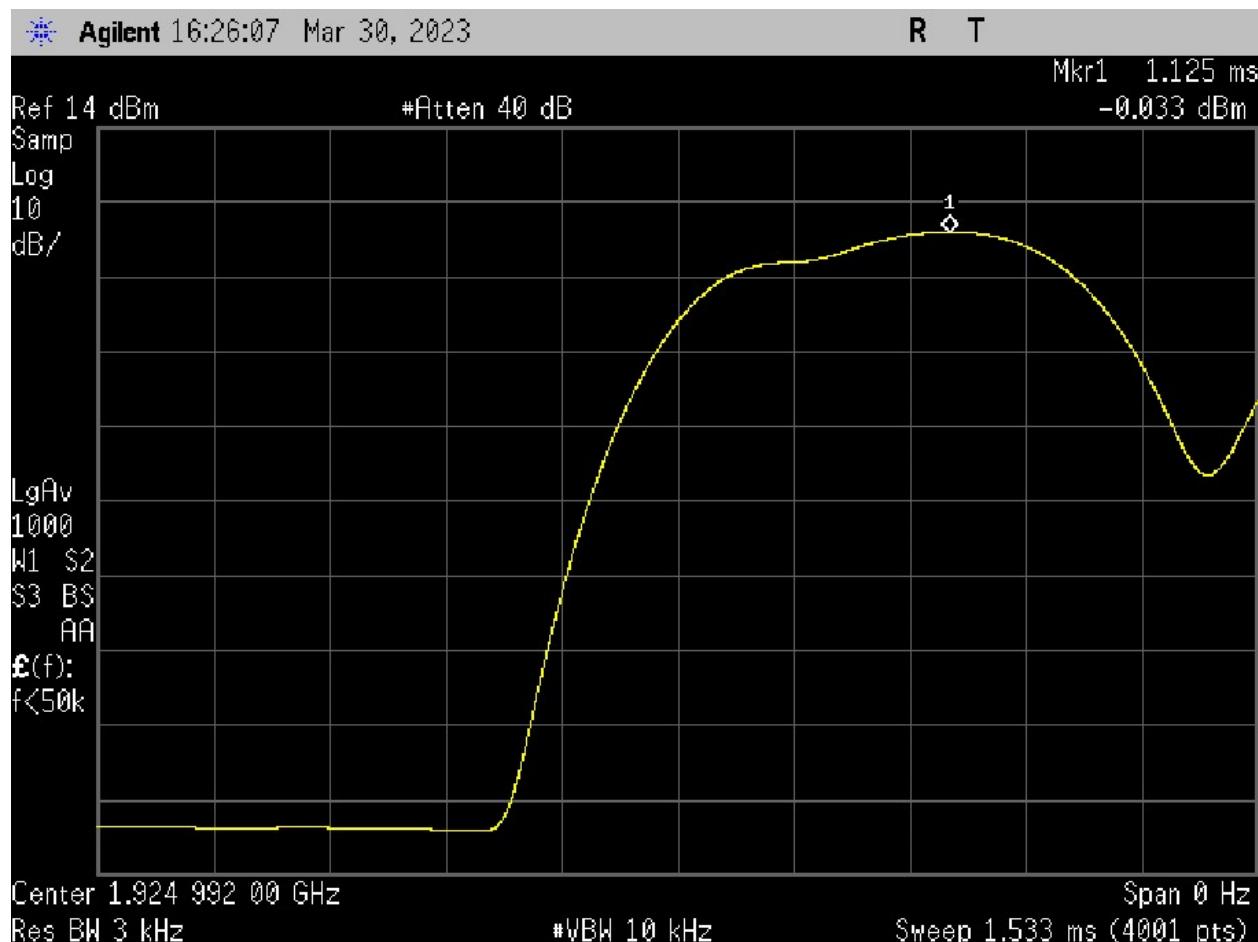


F_{high}

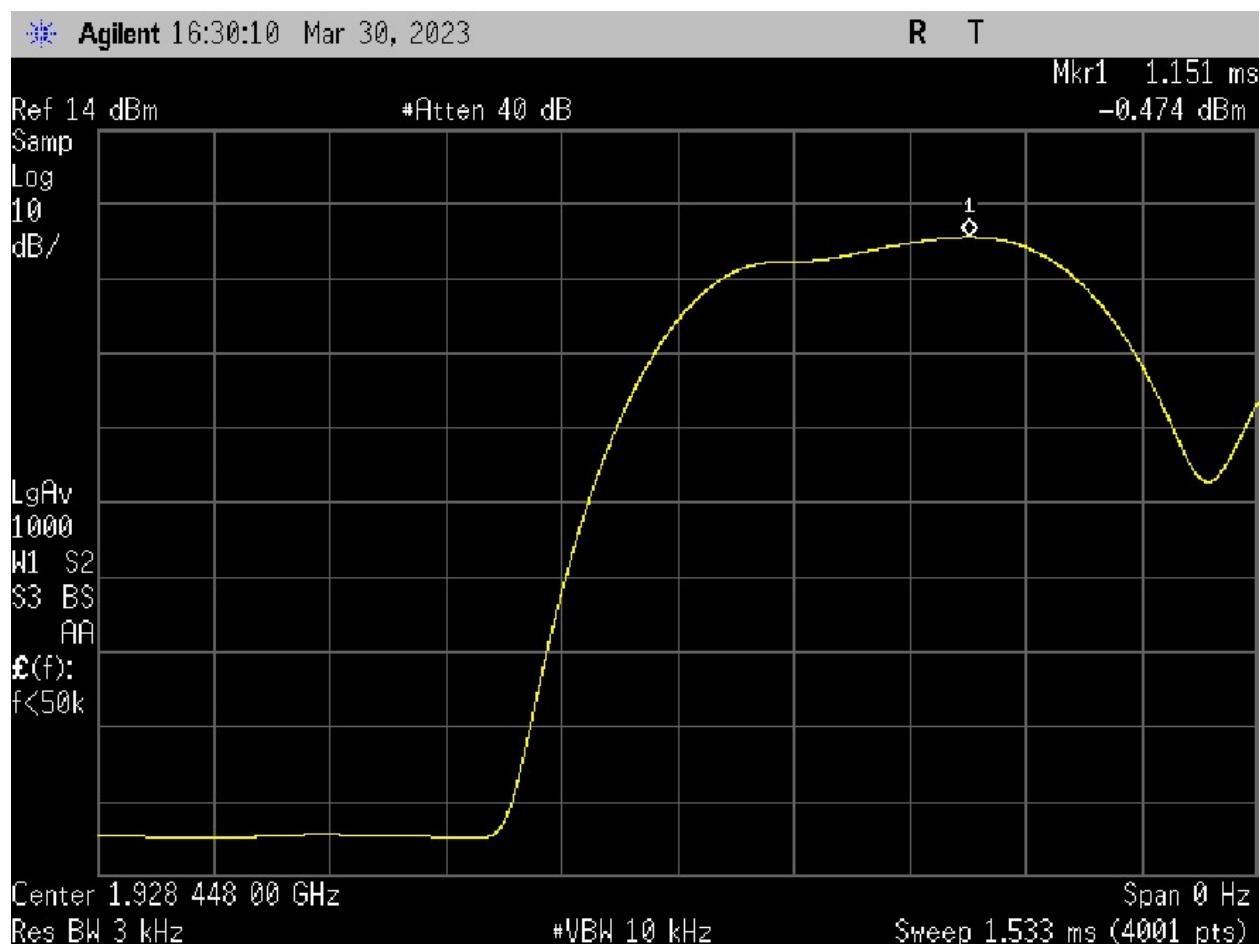


3.9 Test conditions and results – Frequency stability

Frequency stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause		Reference		
		FCC 15.323(f) / IC RSS213 5.3		
Test according to measurement reference		Reference Method		
		ANSI C63.17 6.2.1		
Tested frequencies		F_{mid}		
EUT test mode		TDMA		
Limits				
± 10 ppm / hour				
Test results				
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Verdict
Nominal	+20 °C	0.8297	± 10	PASS
Nominal	-20 °C	0.9333	± 10	PASS
Nominal	+50 °C	1.4519	± 10	PASS
Comments:				


+20°C

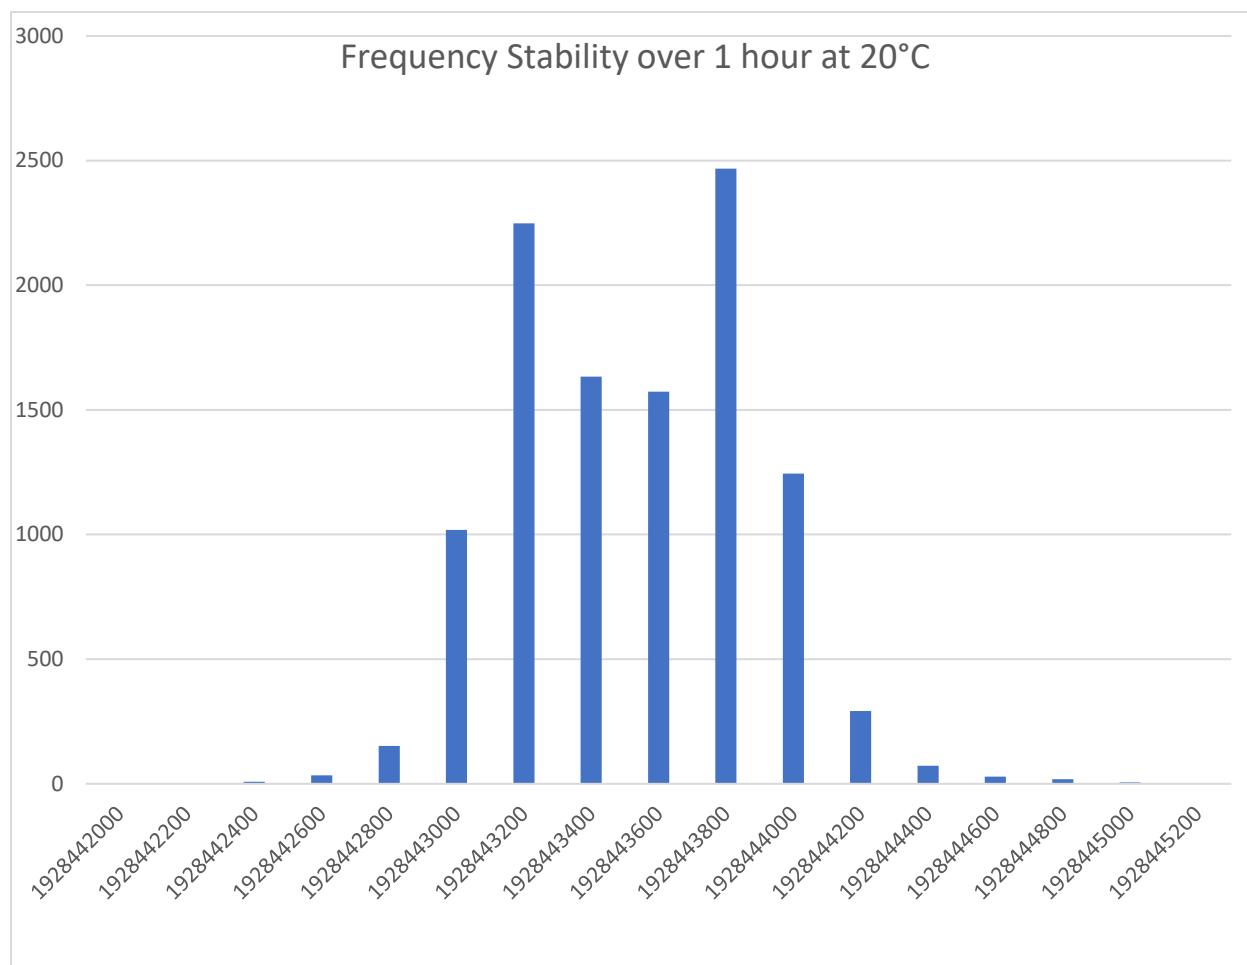

-20°C

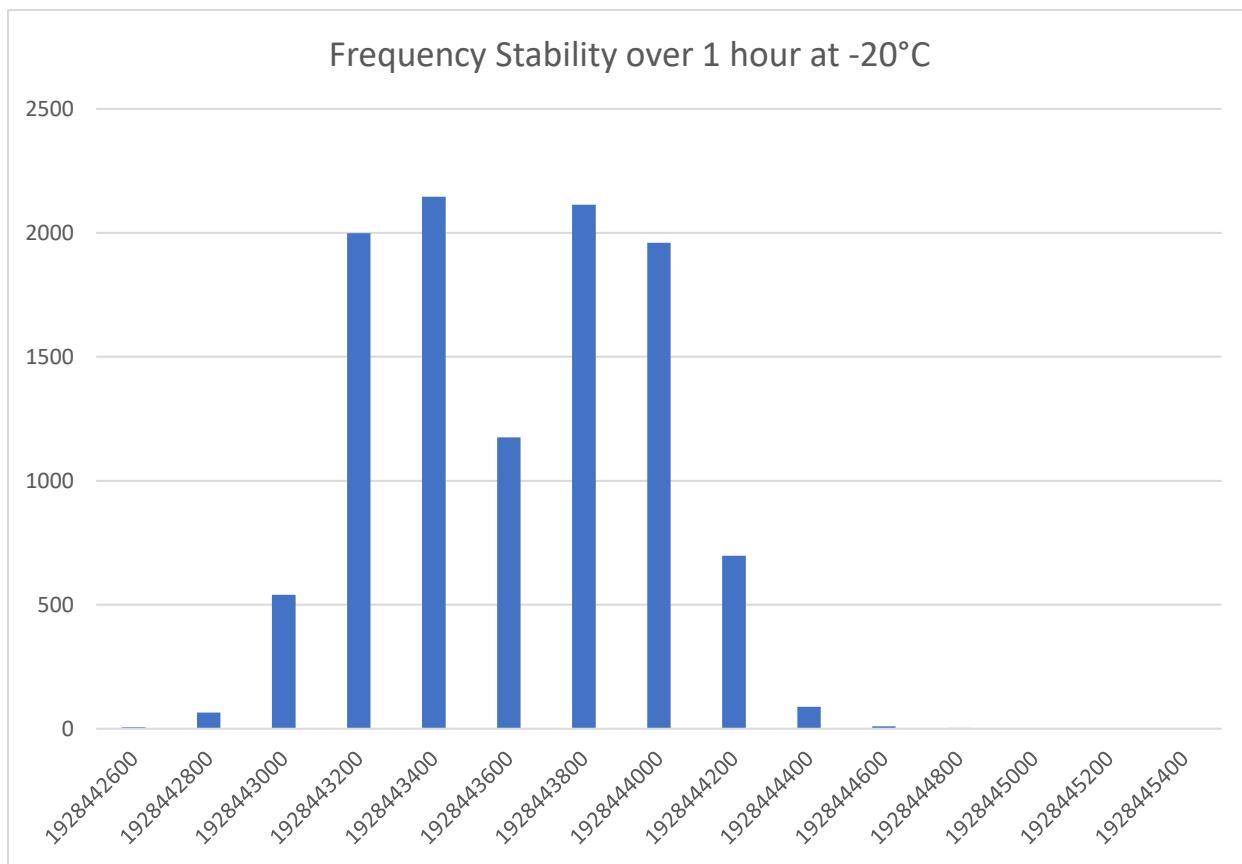


+50°C

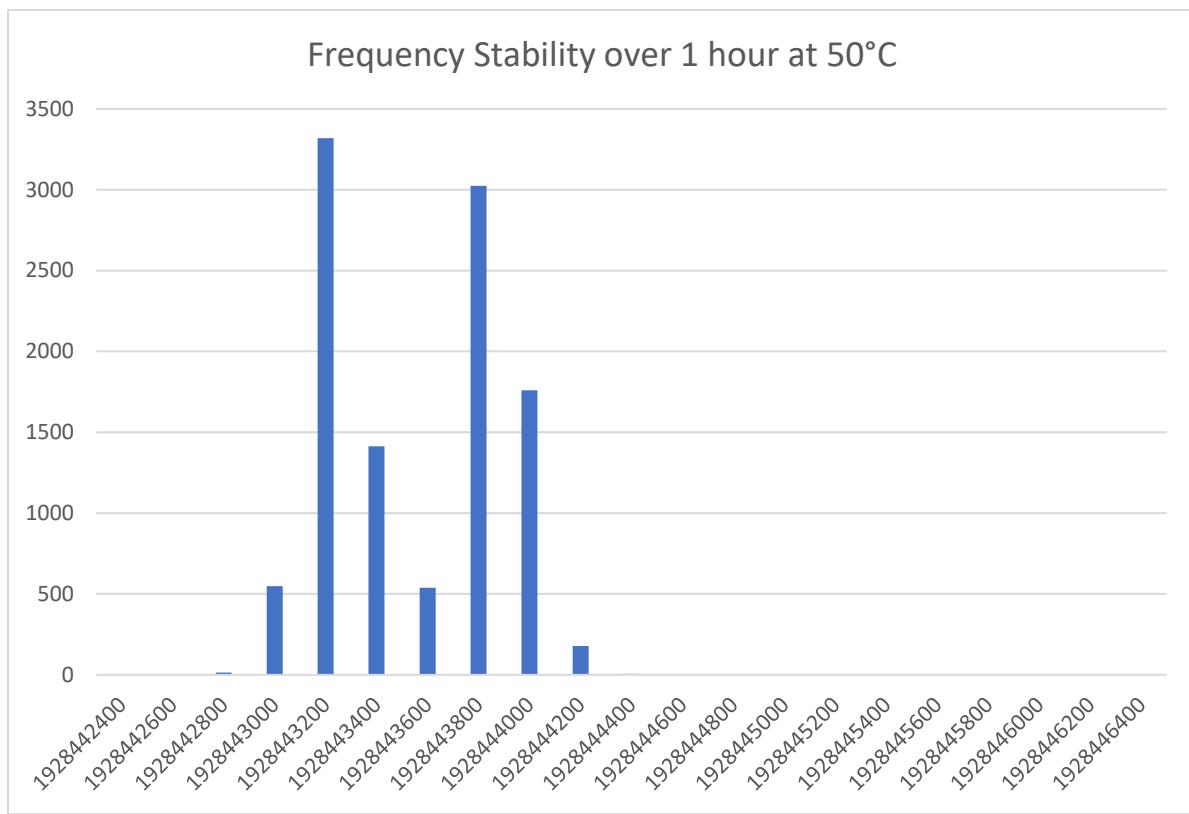



3.10 Test conditions and results – Transmitter in-band unwanted emissions

In-band unwanted emissions acc. to FCC 47 CFR 15D / IC RSS-213	Verdict: PASS	
Test performed by: ElectroMagnetic Investigations		
EUT requirement rule parts and clause	Reference	
	FCC 15.323(d) / IC RSS-213 5.8.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.6.1	
Tested frequencies	F_{low} / F_{high}	
Test frequency range	1920 – 1930 MHz	
Limits		
Frequency range [MHz]	Detector	Limit [dBc]
UPCS Band Edge to (F_c – 3B)	Peak	-60
(F_c – 3B) to (F_c – 2B)	Peak	-50
(F_c – 2B) to (F_c – 1B)	Peak	-30
(F_c + 1B) to (F_c + 2B)	Peak	-30
(F_c + 2B) to (F_c + 3B)	Peak	-50
(F_c + 3B) to UPCS Band Edge	Peak	-60
B = emission / occupied bandwidth of selected channel		
F_c = Center frequency of selected channel		

Test results		
Channel	Frequency [MHz]	Verdict
F_{low}	1921.536	Pass
F_{MID}	1924.992	Pass
F_{high}	1928.448	Pass
Comments:		

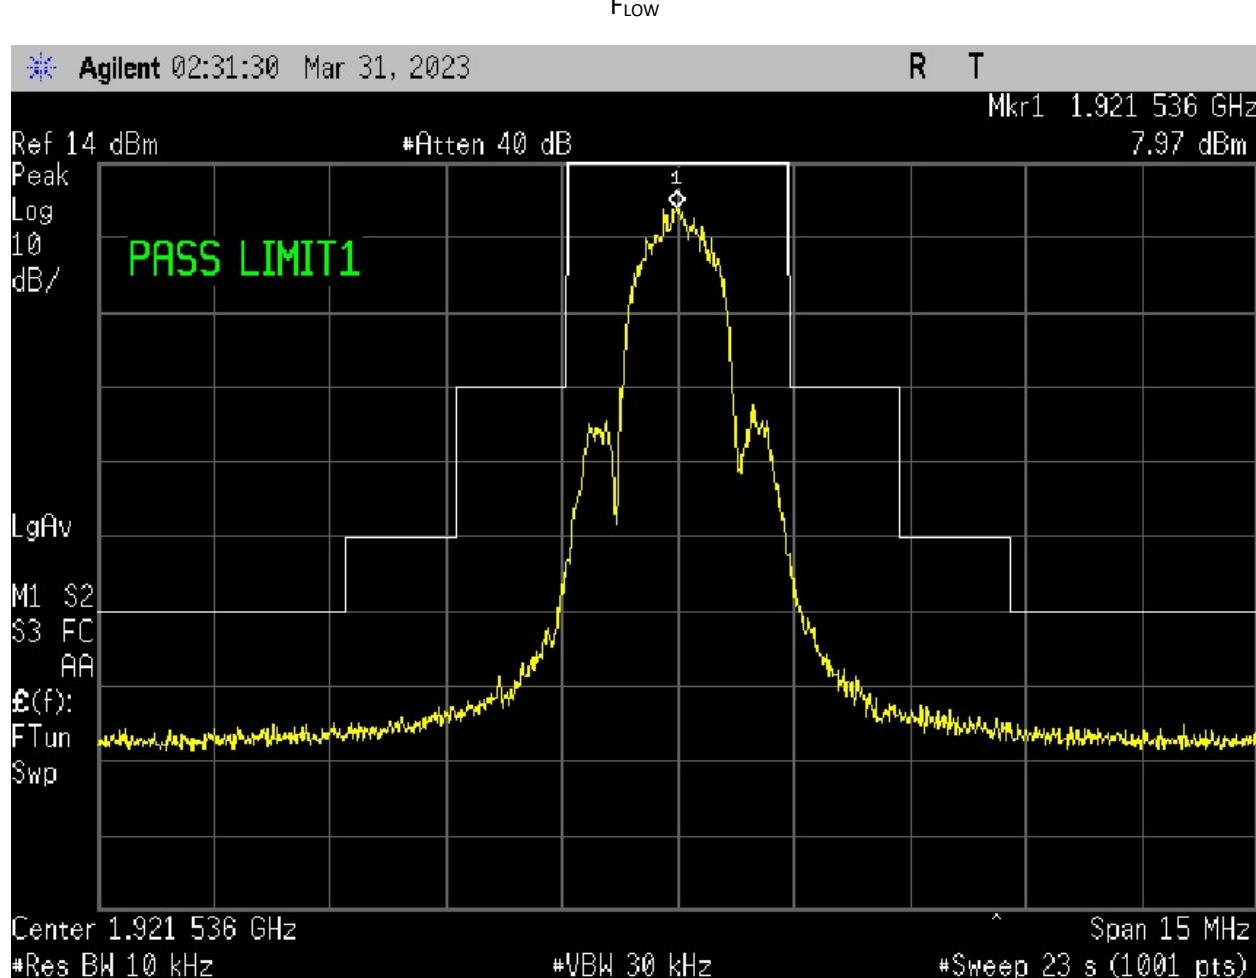


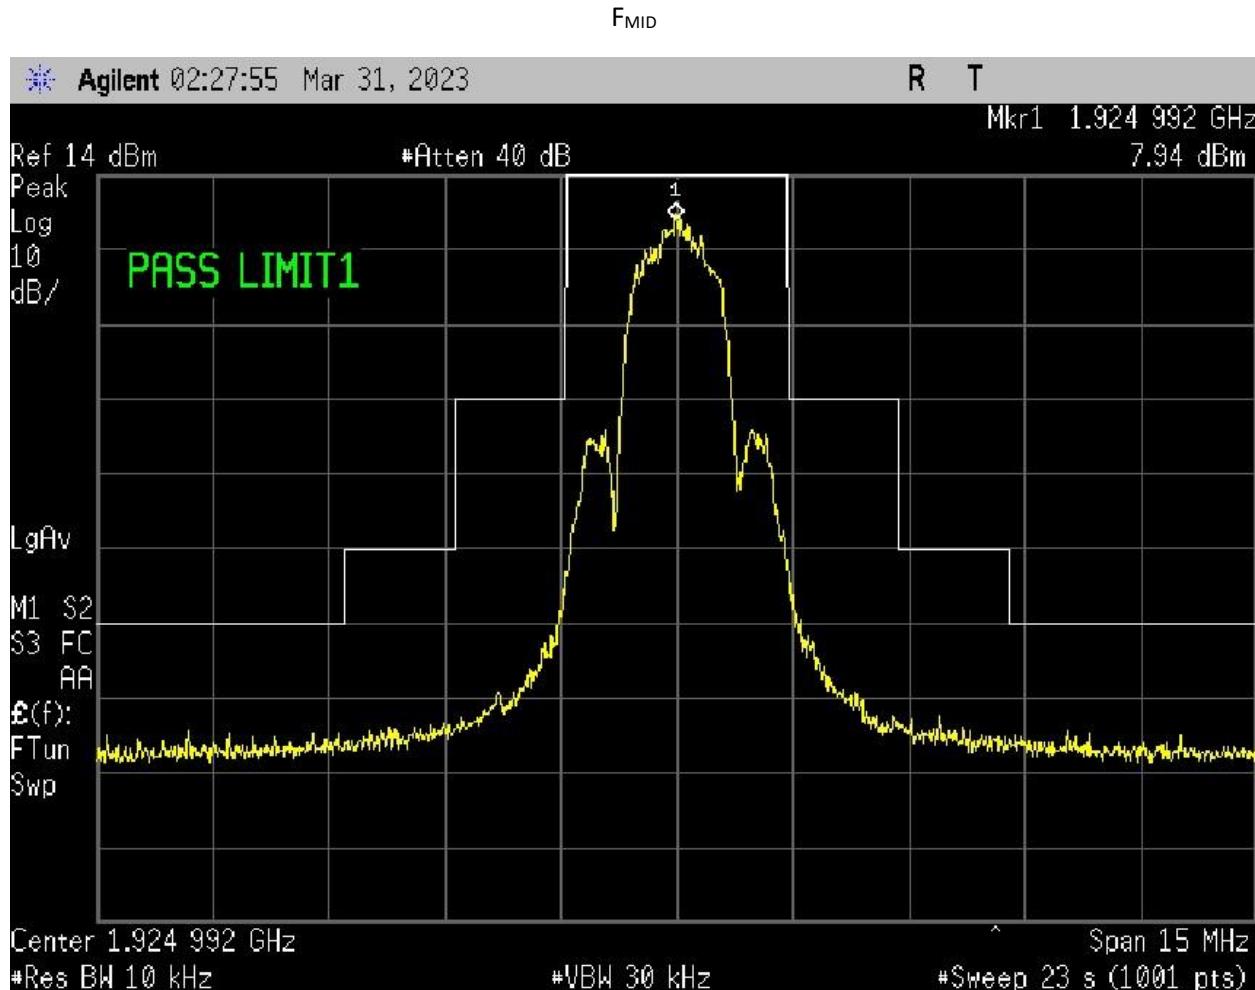


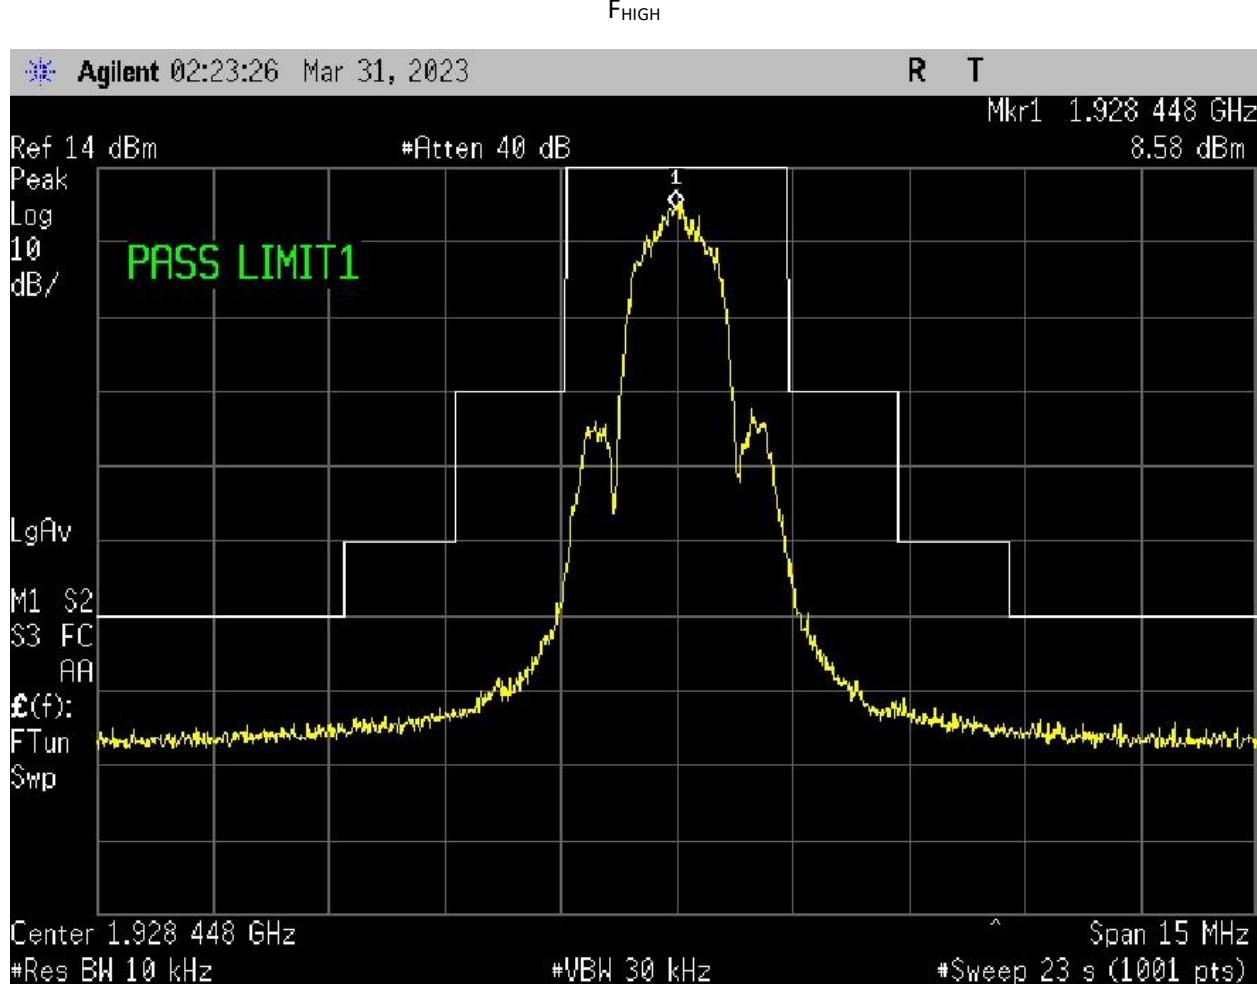

3.11 Test conditions and results – Transmitter out-of-band emissions

Out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
Test performed by: ElectroMagnetic Investigations			
EUT requirement rule parts and clause		Reference	
		FCC 15.323(d) / IC RSS-213 5.8.1	
Test according to measurement reference		Reference Method	
		ANSI C63.17 6.1.6	
Tested frequencies		$F_{\text{low}} / F_{\text{high}}$	
Test frequency range		30 MHz – 10 th Harmonic	
Limits			
Frequency range [MHz]	Detector	Limit	Limit Distance [meters]
30 – 88	Quasi-Peak	100 $\mu\text{V}/\text{m}$ (40 dB $\mu\text{V}/\text{m}$)	3
88 – 216	Quasi-Peak	150 $\mu\text{V}/\text{m}$ (43.5 dB $\mu\text{V}/\text{m}$)	3
216 – 960	Quasi-Peak	200 $\mu\text{V}/\text{m}$ (46 dB $\mu\text{V}/\text{m}$)	3
960 – 1000	Quasi-Peak	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3
1000 – 1917.5	Average	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3
Below 1917.5	Peak	-39.5 dBm *	N/A
1917.5 - 1918.75	Peak	-29.5 dBm *	N/A
1918.75 – 1920	Peak	-9.5 dBm *	N/A
1930 – 1931.25	Peak	-9.5 dBm *	N/A
1931.25 – 1932.5	Peak	-29.5 dBm *	N/A
Above 1932.5	Peak	-39.5 dBm *	N/A
1932.5 - 20000	Average	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).			
When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.			
*Measurement is performed with conducted measurement setup			
Comments:			

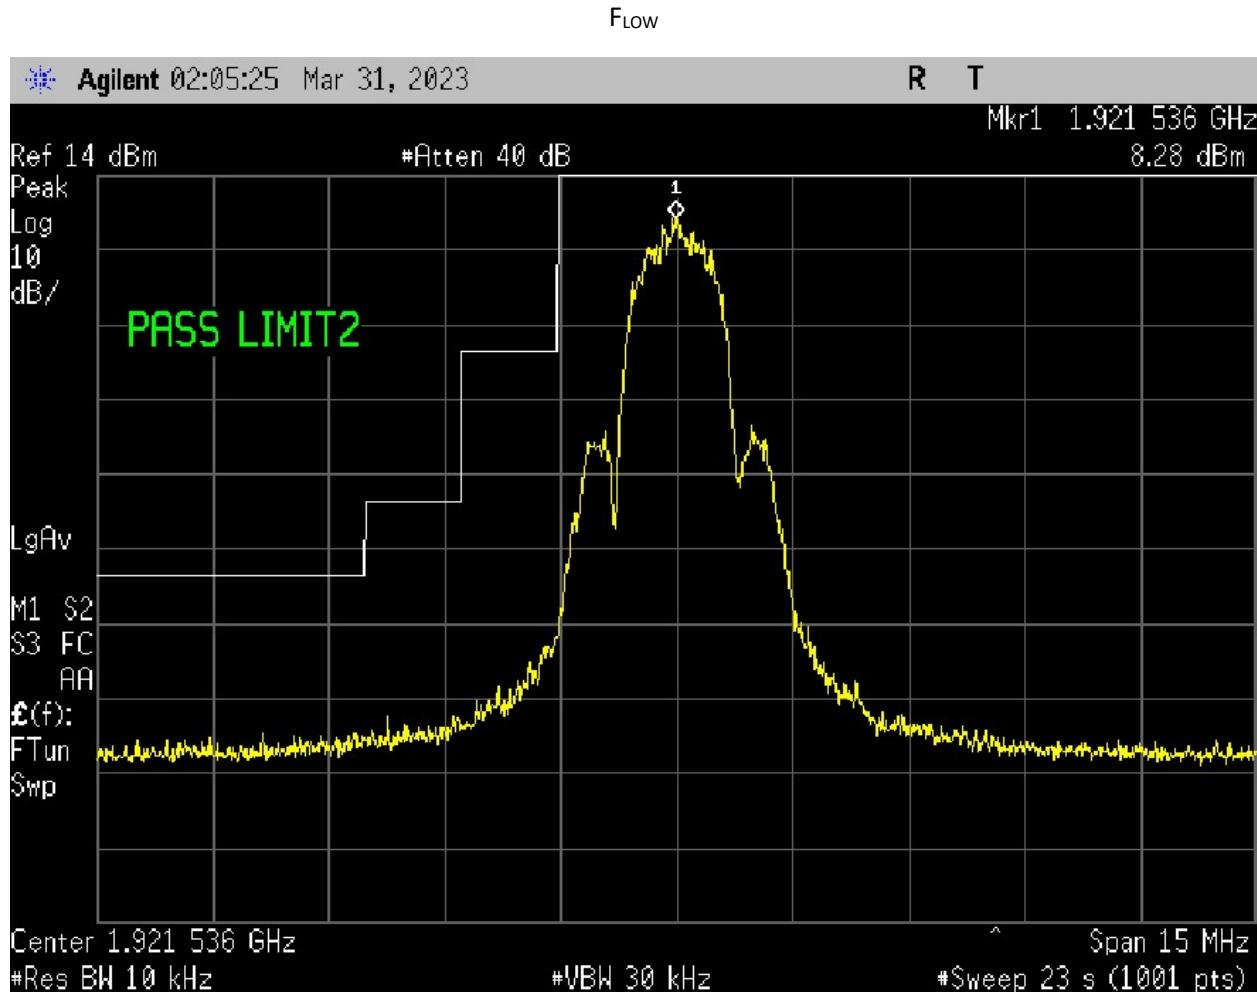

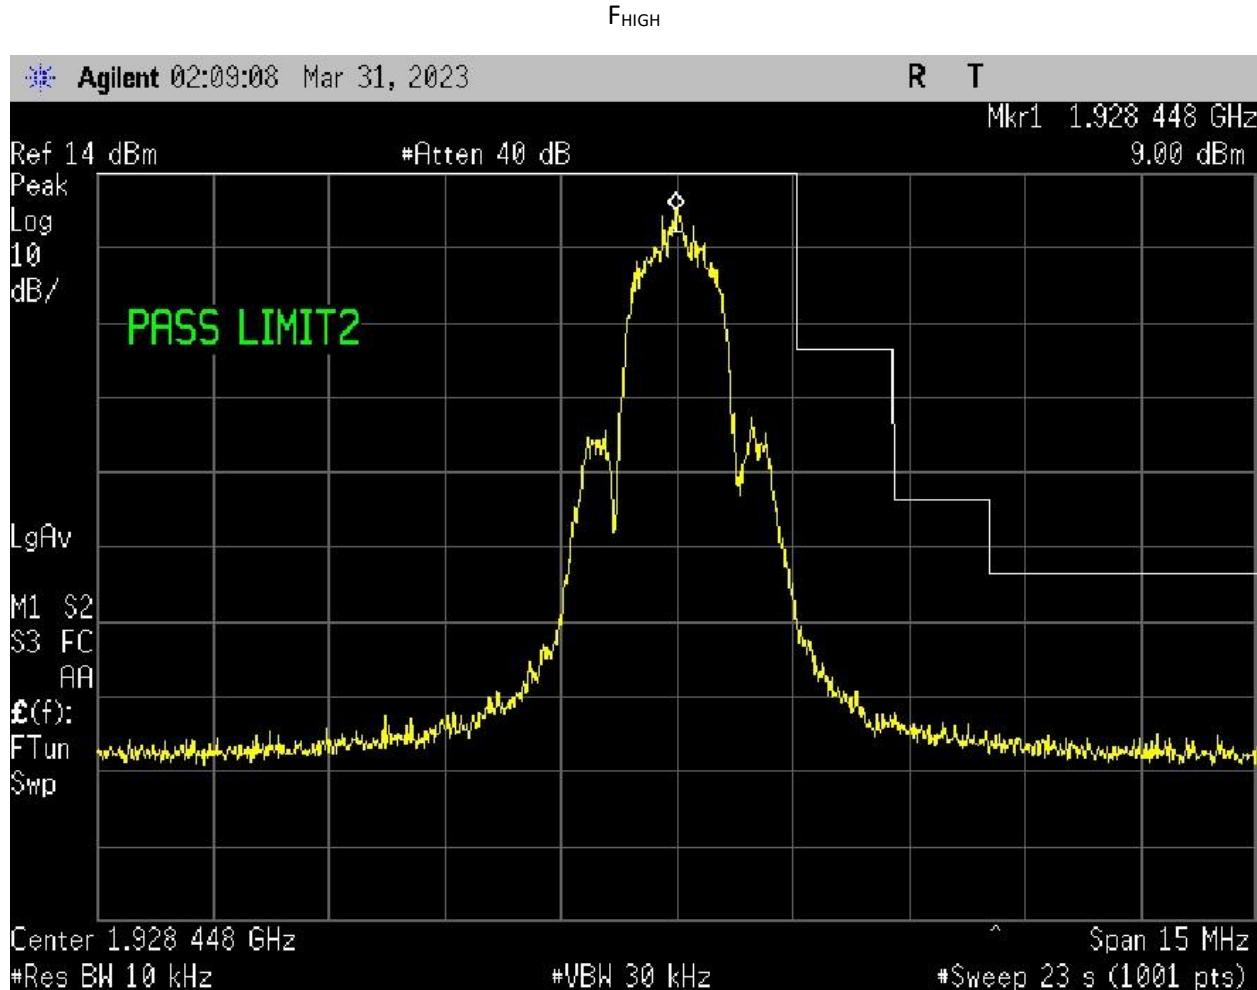




RADIATED EMISSIONS DATA SHEET

 Revision 11
 6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/10/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	1

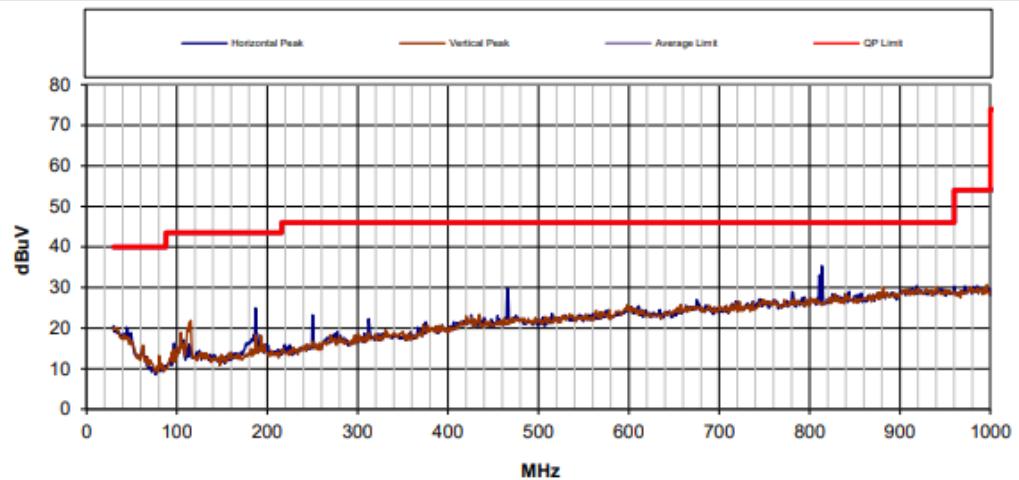

COMMENTS								SIGNATURE	
Ant: 1 Chan: 1									
Horizontal									
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	
30.20	17.62	13.84	23.01	40.00	40.00	73°/375cm	22.38	26.16	
187.48	25.70	23.64	16.33	43.52	43.52	199°/101cm	17.82	19.88	
813.59	26.33	21.02	29.69	46.02	46.02	112°/212cm	19.69	25.00	
Vertical									
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	
115.18	20.04	12.29	15.81	43.52	43.52	282°/400cm	23.48	31.23	
996.01	28.71	23.65	31.49	53.98	53.98	315°/209cm	25.27	30.33	




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	8/1/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	1

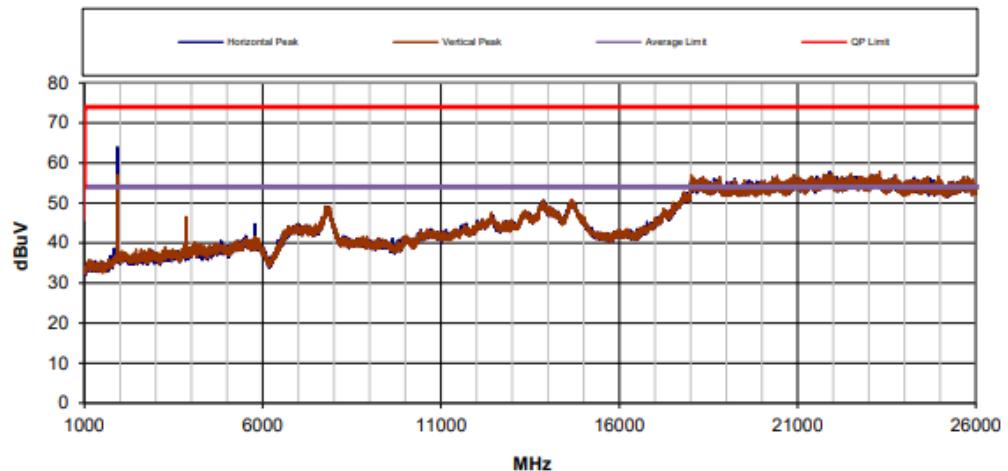

COMMENTS		SIGNATURE																									
Ant 1; CH High; Notch filter at 1.9 GHz																											
Horizontal																											
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th></tr> </thead> <tbody> <tr><td>1928.43</td><td>61.65</td><td>21.16</td><td>-10.01</td></tr> <tr><td>3856.23</td><td>47.95</td><td>22.62</td><td>-6.17</td></tr> <tr><td>7818.30</td><td>41.01</td><td>38.29</td><td>10.78</td></tr> <tr><td>13882.41</td><td>41.58</td><td>39.00</td><td>9.38</td></tr> <tr><td>17912.52</td><td>46.40</td><td>44.23</td><td>17.75</td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	1928.43	61.65	21.16	-10.01	3856.23	47.95	22.62	-6.17	7818.30	41.01	38.29	10.78	13882.41	41.58	39.00	9.38	17912.52	46.40	44.23	17.75
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)																								
1928.43	61.65	21.16	-10.01																								
3856.23	47.95	22.62	-6.17																								
7818.30	41.01	38.29	10.78																								
13882.41	41.58	39.00	9.38																								
17912.52	46.40	44.23	17.75																								
Vertical																											
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th></tr> </thead> <tbody> <tr><td>1928.45</td><td>55.97</td><td>21.09</td><td>-10.01</td></tr> <tr><td>3856.85</td><td>35.86</td><td>22.46</td><td>-6.16</td></tr> <tr><td>7758.87</td><td>39.34</td><td>37.26</td><td>9.89</td></tr> <tr><td>14678.57</td><td>45.17</td><td>42.75</td><td>11.92</td></tr> <tr><td>17807.77</td><td>46.84</td><td>43.90</td><td>17.35</td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	1928.45	55.97	21.09	-10.01	3856.85	35.86	22.46	-6.16	7758.87	39.34	37.26	9.89	14678.57	45.17	42.75	11.92	17807.77	46.84	43.90	17.35
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)																								
1928.45	55.97	21.09	-10.01																								
3856.85	35.86	22.46	-6.16																								
7758.87	39.34	37.26	9.89																								
14678.57	45.17	42.75	11.92																								
17807.77	46.84	43.90	17.35																								




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/10/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	2

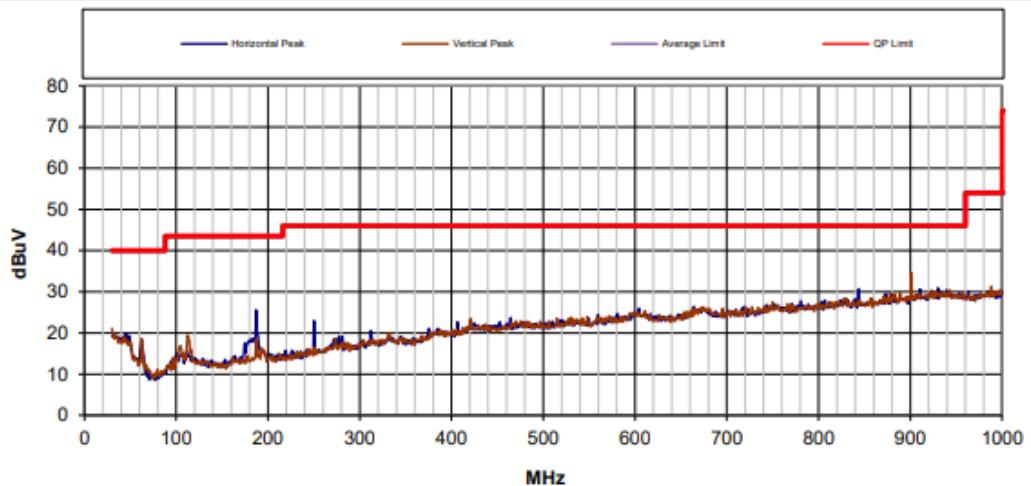

COMMENTS				SIGNATURE																																																																		
Ant: 2 Chan: 1																																																																						
Horizontal																																																																						
<table border="1"> <thead> <tr> <th>Freq (MHz)</th> <th>Peak (dBμV)</th> <th>QP (dBμV)</th> <th>Factors (dB)</th> <th>Peak Limit (dBμV)</th> <th>QP Limit (dBμV)</th> <th>Turntable (deg) / Height (cm)</th> <th>Peak Margin (dB)</th> <th>QP Margin (dB)</th> </tr> </thead> <tbody> <tr> <td>187.51</td> <td>26.39</td> <td>24.55</td> <td>16.33</td> <td>43.52</td> <td>43.52</td> <td>0°/100cm</td> <td>17.13</td> <td>18.97</td> </tr> <tr> <td>930.03</td> <td>27.99</td> <td>23.62</td> <td>31.53</td> <td>46.02</td> <td>46.02</td> <td>316°/325cm</td> <td>18.03</td> <td>22.40</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	187.51	26.39	24.55	16.33	43.52	43.52	0°/100cm	17.13	18.97	930.03	27.99	23.62	31.53	46.02	46.02	316°/325cm	18.03	22.40																																				
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																														
187.51	26.39	24.55	16.33	43.52	43.52	0°/100cm	17.13	18.97																																																														
930.03	27.99	23.62	31.53	46.02	46.02	316°/325cm	18.03	22.40																																																														
Vertical																																																																						
<table border="1"> <thead> <tr> <th>Freq (MHz)</th> <th>Peak (dBμV)</th> <th>QP (dBμV)</th> <th>Factors (dB)</th> <th>Peak Limit (dBμV)</th> <th>QP Limit (dBμV)</th> <th>Turntable (deg) / Height (cm)</th> <th>Peak Margin (dB)</th> <th>QP Margin (dB)</th> </tr> </thead> <tbody> <tr> <td>30.00</td> <td>19.21</td> <td>14.24</td> <td>23.06</td> <td>40.00</td> <td>40.00</td> <td>157°/332cm</td> <td>20.79</td> <td>25.76</td> </tr> <tr> <td>900.88</td> <td>26.76</td> <td>23.08</td> <td>30.76</td> <td>46.02</td> <td>46.02</td> <td>293°/225cm</td> <td>19.26</td> <td>22.94</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	30.00	19.21	14.24	23.06	40.00	40.00	157°/332cm	20.79	25.76	900.88	26.76	23.08	30.76	46.02	46.02	293°/225cm	19.26	22.94																																				
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																														
30.00	19.21	14.24	23.06	40.00	40.00	157°/332cm	20.79	25.76																																																														
900.88	26.76	23.08	30.76	46.02	46.02	293°/225cm	19.26	22.94																																																														




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	8/1/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	2

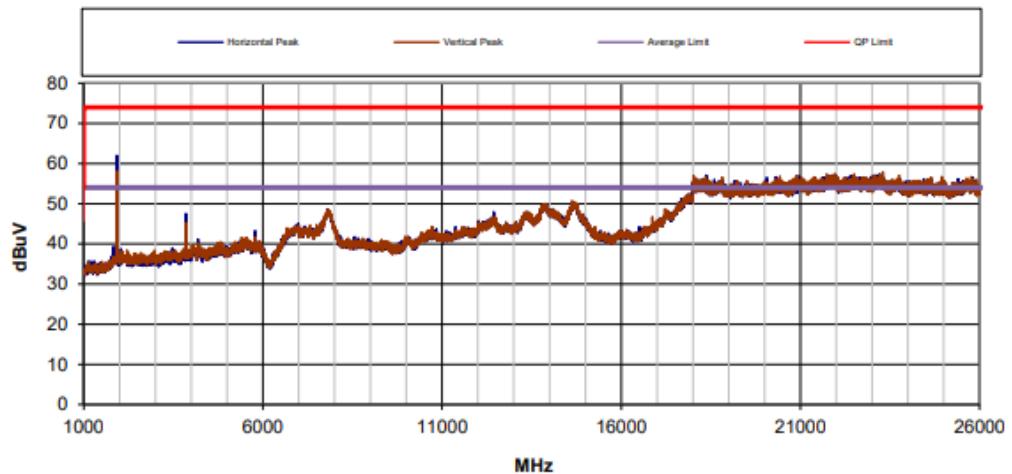

COMMENTS		SIGNATURE																									
Ant 2; CH High; Notch filter at 1.9 GHz																											
Horizontal																											
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th></tr> </thead> <tbody> <tr><td>1928.43</td><td>59.49</td><td>28.56</td><td>-10.01</td></tr> <tr><td>3856.23</td><td>42.96</td><td>25.16</td><td>-6.17</td></tr> <tr><td>7825.42</td><td>43.71</td><td>38.16</td><td>10.80</td></tr> <tr><td>14695.73</td><td>47.20</td><td>42.36</td><td>11.92</td></tr> <tr><td>17973.46</td><td>49.29</td><td>43.84</td><td>17.77</td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	1928.43	59.49	28.56	-10.01	3856.23	42.96	25.16	-6.17	7825.42	43.71	38.16	10.80	14695.73	47.20	42.36	11.92	17973.46	49.29	43.84	17.77
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)																								
1928.43	59.49	28.56	-10.01																								
3856.23	42.96	25.16	-6.17																								
7825.42	43.71	38.16	10.80																								
14695.73	47.20	42.36	11.92																								
17973.46	49.29	43.84	17.77																								
<table border="1"> <thead> <tr> <th>Peak Limit (dBμV)</th><th>Final Limit (dBμV)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th></tr> </thead> <tbody> <tr><td>73.98</td><td>53.98</td><td>316°/128cm</td><td>14.49</td></tr> <tr><td>73.98</td><td>53.98</td><td>36°/101cm</td><td>31.02</td></tr> <tr><td>73.98</td><td>53.98</td><td>239°/199cm</td><td>30.27</td></tr> <tr><td>73.98</td><td>53.98</td><td>315°/153cm</td><td>26.78</td></tr> <tr><td>73.98</td><td>53.98</td><td>176°/198cm</td><td>24.69</td></tr> </tbody> </table>				Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	73.98	53.98	316°/128cm	14.49	73.98	53.98	36°/101cm	31.02	73.98	53.98	239°/199cm	30.27	73.98	53.98	315°/153cm	26.78	73.98	53.98	176°/198cm	24.69
Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)																								
73.98	53.98	316°/128cm	14.49																								
73.98	53.98	36°/101cm	31.02																								
73.98	53.98	239°/199cm	30.27																								
73.98	53.98	315°/153cm	26.78																								
73.98	53.98	176°/198cm	24.69																								
Vertical																											
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th></tr> </thead> <tbody> <tr><td>1928.44</td><td>54.91</td><td>27.52</td><td>-10.01</td></tr> <tr><td>3857.54</td><td>42.16</td><td>24.98</td><td>-6.16</td></tr> <tr><td>7817.68</td><td>43.52</td><td>38.17</td><td>10.78</td></tr> <tr><td>14625.84</td><td>48.93</td><td>41.98</td><td>11.87</td></tr> <tr><td>17908.87</td><td>47.49</td><td>44.09</td><td>17.75</td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	1928.44	54.91	27.52	-10.01	3857.54	42.16	24.98	-6.16	7817.68	43.52	38.17	10.78	14625.84	48.93	41.98	11.87	17908.87	47.49	44.09	17.75
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)																								
1928.44	54.91	27.52	-10.01																								
3857.54	42.16	24.98	-6.16																								
7817.68	43.52	38.17	10.78																								
14625.84	48.93	41.98	11.87																								
17908.87	47.49	44.09	17.75																								
<table border="1"> <thead> <tr> <th>Peak Limit (dBμV)</th><th>Final Limit (dBμV)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th></tr> </thead> <tbody> <tr><td>73.98</td><td>53.98</td><td>108°/123cm</td><td>19.07</td></tr> <tr><td>73.98</td><td>53.98</td><td>135°/102cm</td><td>31.82</td></tr> <tr><td>73.98</td><td>53.98</td><td>288°/199cm</td><td>30.46</td></tr> <tr><td>73.98</td><td>53.98</td><td>122°/128cm</td><td>25.05</td></tr> <tr><td>73.98</td><td>53.98</td><td>55°/200cm</td><td>26.49</td></tr> </tbody> </table>				Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	73.98	53.98	108°/123cm	19.07	73.98	53.98	135°/102cm	31.82	73.98	53.98	288°/199cm	30.46	73.98	53.98	122°/128cm	25.05	73.98	53.98	55°/200cm	26.49
Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)																								
73.98	53.98	108°/123cm	19.07																								
73.98	53.98	135°/102cm	31.82																								
73.98	53.98	288°/199cm	30.46																								
73.98	53.98	122°/128cm	25.05																								
73.98	53.98	55°/200cm	26.49																								



RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114					
Contact:	Michael Barger	Date:	5/10/2023					
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20					
Serial Number:	1	Relative Humidity (%):	37					
Voltage/Freq:	N/A	Barometric Pressure:	30					
Tested by:	Ryan Benitez	Location:	Hillsboro					
Product Standards:	FCC Part 15 Subpart C							
	N/A							
Test Standard:	FCC Part 15.209							
TEST RESULTS	TEST TYPE	DISTANCE	RUN #					
Pass	Compliance	3 meters	3					
COMMENTS	SIGNATURE							
Ant: 1 Chan: 5								
Horizontal								
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)
44.29	18.81	14.50	19.80	40.00	40.00	73°/198cm	21.19	25.50
187.51	25.65	24.19	16.33	43.52	43.52	0°/157cm	17.87	19.33
900.72	27.90	22.98	30.75	46.02	46.02	247°/131cm	18.12	23.04
Vertical								
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)
33.06	18.04	13.94	22.31	40.00	40.00	144°/400cm	21.96	26.06
980.54	28.02	23.49	31.42	53.98	53.98	203°/260cm	25.96	30.49




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	8/1/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	3

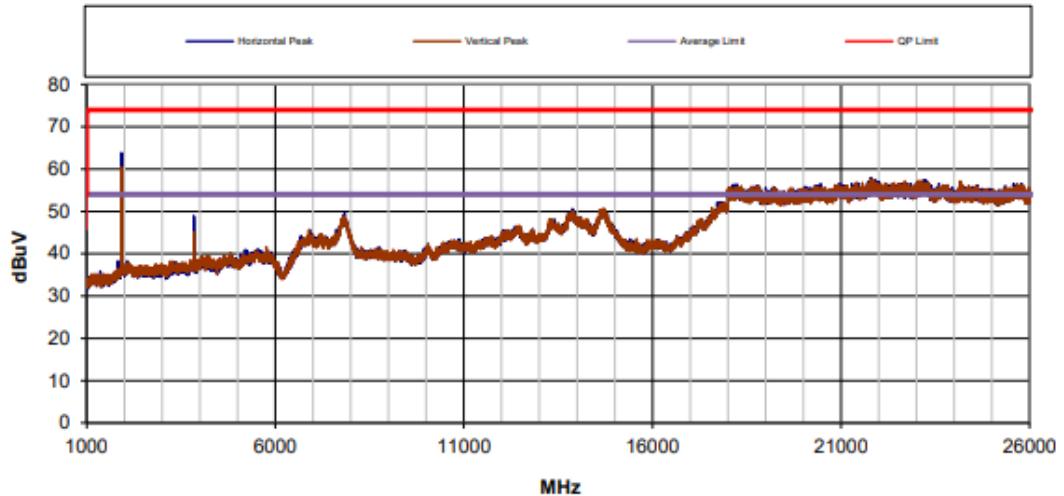

COMMENTS		SIGNATURE																																																																
Ant 1; CH Low; Notch filter at 1.9 GHz																																																																		
Horizontal																																																																		
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th><th>Peak Limit (dBμV)</th><th>Final Limit (dBμV)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr><td>1921.53</td><td>64.33</td><td>21.07</td><td>-10.08</td><td>73.98</td><td>53.98</td><td>107°/175cm</td><td>9.65</td><td>N/A</td></tr> <tr><td>3843.04</td><td>38.94</td><td>21.88</td><td>-6.23</td><td>73.98</td><td>53.98</td><td>316°/100cm</td><td>35.04</td><td>32.10</td></tr> <tr><td>7833.10</td><td>41.69</td><td>38.11</td><td>10.80</td><td>73.98</td><td>53.98</td><td>239°/175cm</td><td>32.29</td><td>15.87</td></tr> <tr><td>13878.43</td><td>41.53</td><td>38.85</td><td>9.40</td><td>73.98</td><td>53.98</td><td>316°/101cm</td><td>32.45</td><td>15.13</td></tr> <tr><td>17793.03</td><td>46.76</td><td>43.66</td><td>17.43</td><td>73.98</td><td>53.98</td><td>316°/179cm</td><td>27.22</td><td>10.32</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	1921.53	64.33	21.07	-10.08	73.98	53.98	107°/175cm	9.65	N/A	3843.04	38.94	21.88	-6.23	73.98	53.98	316°/100cm	35.04	32.10	7833.10	41.69	38.11	10.80	73.98	53.98	239°/175cm	32.29	15.87	13878.43	41.53	38.85	9.40	73.98	53.98	316°/101cm	32.45	15.13	17793.03	46.76	43.66	17.43	73.98	53.98	316°/179cm	27.22	10.32									
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																										
1921.53	64.33	21.07	-10.08	73.98	53.98	107°/175cm	9.65	N/A																																																										
3843.04	38.94	21.88	-6.23	73.98	53.98	316°/100cm	35.04	32.10																																																										
7833.10	41.69	38.11	10.80	73.98	53.98	239°/175cm	32.29	15.87																																																										
13878.43	41.53	38.85	9.40	73.98	53.98	316°/101cm	32.45	15.13																																																										
17793.03	46.76	43.66	17.43	73.98	53.98	316°/179cm	27.22	10.32																																																										
Vertical																																																																		
<table border="1"> <thead> <tr> <th>Freq (MHz)</th><th>Peak (dBμV)</th><th>Final (dBμV)</th><th>Factors (dB)</th><th>Peak Limit (dBμV)</th><th>Final Limit (dBμV)</th><th>Turntable (deg) / Height (cm)</th><th>Peak Margin (dB)</th><th>Final Margin (dB)</th></tr> </thead> <tbody> <tr><td>1921.54</td><td>58.63</td><td>20.97</td><td>-10.08</td><td>73.98</td><td>53.98</td><td>134°/200cm</td><td>15.35</td><td>N/A</td></tr> <tr><td>3843.65</td><td>28.84</td><td>21.66</td><td>-6.23</td><td>73.98</td><td>53.98</td><td>252°/124cm</td><td>45.14</td><td>32.32</td></tr> <tr><td>7819.14</td><td>41.00</td><td>38.15</td><td>10.79</td><td>73.98</td><td>53.98</td><td>12°/126cm</td><td>32.98</td><td>15.83</td></tr> <tr><td>14715.09</td><td>47.06</td><td>42.34</td><td>11.92</td><td>73.98</td><td>53.98</td><td>315°/175cm</td><td>26.92</td><td>11.64</td></tr> <tr><td>17896.19</td><td>48.86</td><td>44.01</td><td>17.71</td><td>73.98</td><td>53.98</td><td>202°/100cm</td><td>25.12</td><td>9.97</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>				Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)	1921.54	58.63	20.97	-10.08	73.98	53.98	134°/200cm	15.35	N/A	3843.65	28.84	21.66	-6.23	73.98	53.98	252°/124cm	45.14	32.32	7819.14	41.00	38.15	10.79	73.98	53.98	12°/126cm	32.98	15.83	14715.09	47.06	42.34	11.92	73.98	53.98	315°/175cm	26.92	11.64	17896.19	48.86	44.01	17.71	73.98	53.98	202°/100cm	25.12	9.97									
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)																																																										
1921.54	58.63	20.97	-10.08	73.98	53.98	134°/200cm	15.35	N/A																																																										
3843.65	28.84	21.66	-6.23	73.98	53.98	252°/124cm	45.14	32.32																																																										
7819.14	41.00	38.15	10.79	73.98	53.98	12°/126cm	32.98	15.83																																																										
14715.09	47.06	42.34	11.92	73.98	53.98	315°/175cm	26.92	11.64																																																										
17896.19	48.86	44.01	17.71	73.98	53.98	202°/100cm	25.12	9.97																																																										

Antenna 2 / Channel: 5



RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114						
Contact:	Michael Barger	Date:	5/11/2023						
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20						
Serial Number:	1	Relative Humidity (%):	37						
Voltage/Freq:	N/A	Barometric Pressure:	30						
Tested by:	Ryan Benitez	Location:	Hillsboro						
Product Standards:	FCC Part 15 Subpart C								
	N/A								
Test Standard:	FCC Part 15.209								
TEST RESULTS	TEST TYPE	DISTANCE	RUN #						
Pass	Compliance	3 meters	4						
COMMENTS	SIGNATURE								
Ant: 2 Chan: 5									
Horizontal									
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	
187.49	26.80	24.93	16.33	43.52	43.52	0°/158cm	16.72	18.59	
994.23	28.99	23.65	31.48	53.98	53.98	293°/263cm	24.99	30.33	
Vertical									
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	
932.94	27.27	23.72	31.50	46.02	46.02	157°/101cm	18.75	22.30	




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	8/1/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	4

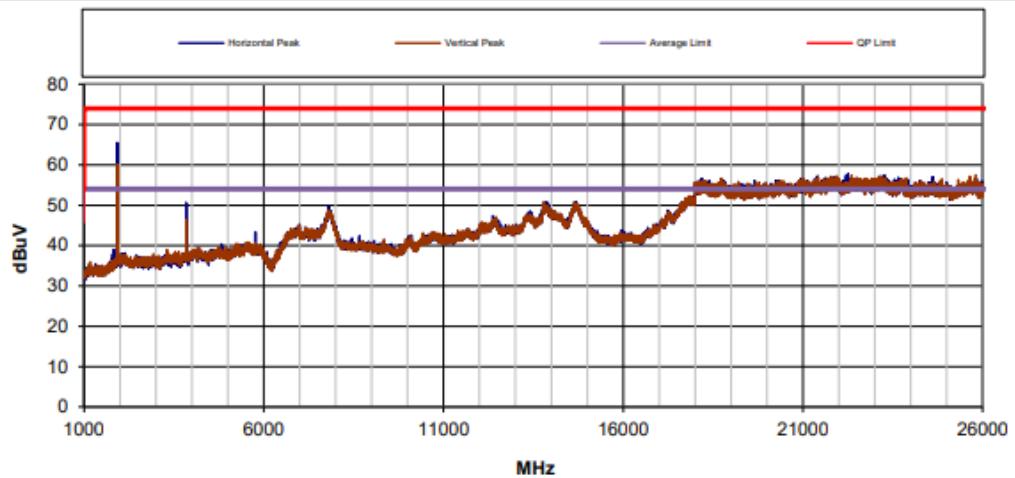

COMMENTS					SIGNATURE			
Ant 2; CH Low; Notch filter at 1.9 GHz								
Horizontal								
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1921.51	62.02	29.08	-10.08	73.98	53.98	108°/100cm	11.96	N/A
3843.03	46.90	25.79	-6.23	73.98	53.98	241°/100cm	27.08	28.19
7816.09	41.14	38.18	10.77	73.98	53.98	140°/100cm	32.84	15.80
14687.84	44.84	42.43	11.91	73.98	53.98	315°/128cm	29.14	11.55
17958.89	50.13	43.70	17.59	73.98	53.98	36°/150cm	23.85	10.28
Vertical								
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1921.53	59.39	28.56	-10.08	73.98	53.98	176°/127cm	14.59	N/A
3843.05	39.17	24.20	-6.23	73.98	53.98	315°/100cm	34.81	29.78
7820.49	40.18	38.18	10.79	73.98	53.98	21°/100cm	33.80	15.80
13799.07	41.64	39.46	9.30	73.98	53.98	108°/200cm	32.34	14.52
17840.94	49.45	43.80	17.42	73.98	53.98	315°/150cm	24.53	10.18

3.12 Test conditions and results – Receiver spurious emissions

Receiver spurious emissions acc. to IC RSS-213				Verdict: PASS
Test performed by: ElectroMagnetic Investigations				
EUT requirement rule parts and clause				Reference
				IC RSS-GEN 7.3 / 8.9
Test according to measurement reference				Reference Method
				ANSI C63.4
Tested frequencies				Scan (All)
Test frequency range				30 MHz – 5 th Harmonic
EUT test mode				Receive
Limits				
Frequency range [MHz]	Detector	Limit [μ V/m]	Limit [$\text{dB}\mu$ V/m]	Limit Distance [meters]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
>1000	Average	500	54	3
Comments:				
*Physical distance between EUT and measurement antenna.				
**Emission level corresponds to ambient noise floor.				


Antenna: integrated / Channel 3



RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/26/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

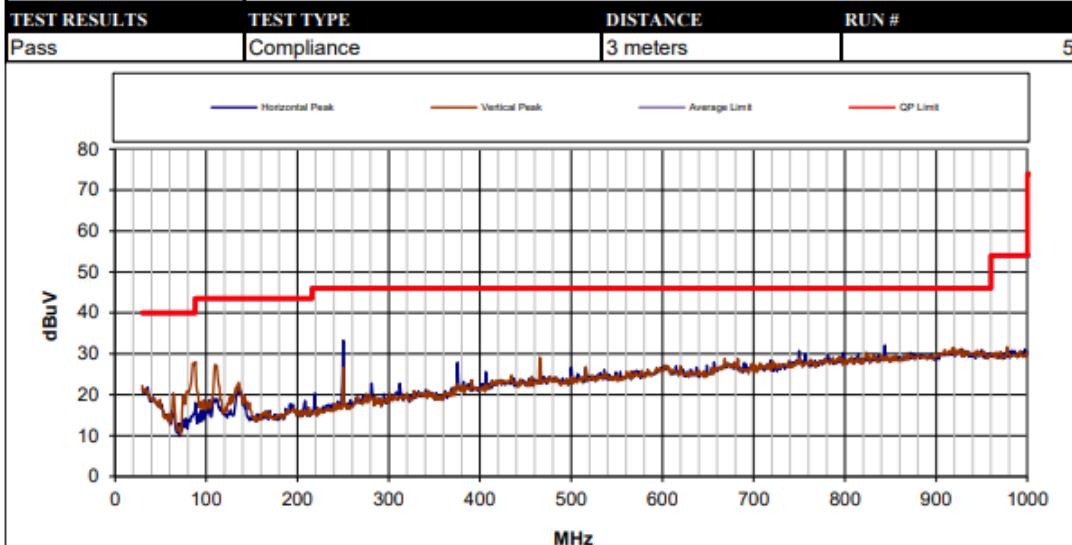

COMMENTS		SIGNATURE																																																																														
BT at 2441; DECT mid chan;																																																																																
Horizontal																																																																																
<table border="1"> <thead> <tr> <th>Freq (MHz)</th> <th>Peak (dBμV)</th> <th>QP (dBμV)</th> <th>Factors (dB)</th> <th>Peak Limit (dBμV)</th> <th>QP Limit (dBμV)</th> <th>Turntable (deg) / Height (cm)</th> <th>Peak Margin (dB)</th> <th>QP Margin (dB)</th> </tr> </thead> <tbody> <tr> <td>35.82</td> <td>19.63</td> <td>14.83</td> <td>21.68</td> <td>40.00</td> <td>40.00</td> <td>50°/173cm</td> <td>20.37</td> <td>25.17</td> </tr> <tr> <td>249.98</td> <td>33.69</td> <td>32.97</td> <td>18.36</td> <td>46.02</td> <td>46.02</td> <td>-1°/100cm</td> <td>12.33</td> <td>13.05</td> </tr> <tr> <td>843.73</td> <td>32.01</td> <td>29.04</td> <td>29.98</td> <td>46.02</td> <td>46.02</td> <td>29°/101cm</td> <td>14.01</td> <td>16.98</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>									Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	35.82	19.63	14.83	21.68	40.00	40.00	50°/173cm	20.37	25.17	249.98	33.69	32.97	18.36	46.02	46.02	-1°/100cm	12.33	13.05	843.73	32.01	29.04	29.98	46.02	46.02	29°/101cm	14.01	16.98																																				
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																								
35.82	19.63	14.83	21.68	40.00	40.00	50°/173cm	20.37	25.17																																																																								
249.98	33.69	32.97	18.36	46.02	46.02	-1°/100cm	12.33	13.05																																																																								
843.73	32.01	29.04	29.98	46.02	46.02	29°/101cm	14.01	16.98																																																																								
Vertical																																																																																
<table border="1"> <thead> <tr> <th>Freq (MHz)</th> <th>Peak (dBμV)</th> <th>QP (dBμV)</th> <th>Factors (dB)</th> <th>Peak Limit (dBμV)</th> <th>QP Limit (dBμV)</th> <th>Turntable (deg) / Height (cm)</th> <th>Peak Margin (dB)</th> <th>QP Margin (dB)</th> </tr> </thead> <tbody> <tr> <td>30.17</td> <td>21.87</td> <td>16.40</td> <td>23.01</td> <td>40.00</td> <td>40.00</td> <td>67°/373cm</td> <td>18.13</td> <td>23.60</td> </tr> <tr> <td>88.15</td> <td>26.41</td> <td>20.99</td> <td>13.44</td> <td>43.52</td> <td>43.52</td> <td>315°/121cm</td> <td>17.11</td> <td>22.53</td> </tr> <tr> <td>109.62</td> <td>15.08</td> <td>9.75</td> <td>15.50</td> <td>43.52</td> <td>43.52</td> <td>91°/160cm</td> <td>28.44</td> <td>33.77</td> </tr> <tr> <td>977.83</td> <td>28.85</td> <td>24.14</td> <td>31.32</td> <td>53.98</td> <td>53.98</td> <td>315°/101cm</td> <td>25.13</td> <td>29.84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>									Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)	30.17	21.87	16.40	23.01	40.00	40.00	67°/373cm	18.13	23.60	88.15	26.41	20.99	13.44	43.52	43.52	315°/121cm	17.11	22.53	109.62	15.08	9.75	15.50	43.52	43.52	91°/160cm	28.44	33.77	977.83	28.85	24.14	31.32	53.98	53.98	315°/101cm	25.13	29.84																											
Freq (MHz)	Peak (dB μ V)	QP (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	QP Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	QP Margin (dB)																																																																								
30.17	21.87	16.40	23.01	40.00	40.00	67°/373cm	18.13	23.60																																																																								
88.15	26.41	20.99	13.44	43.52	43.52	315°/121cm	17.11	22.53																																																																								
109.62	15.08	9.75	15.50	43.52	43.52	91°/160cm	28.44	33.77																																																																								
977.83	28.85	24.14	31.32	53.98	53.98	315°/101cm	25.13	29.84																																																																								




RADIATED EMISSIONS DATA SHEET

Revision 11
6/30/2021

Customer:	Sonetics	Job Reference#:	SON20221114
Contact:	Michael Barger	Date:	5/26/2023
DUT:	Gen 3.9 Wireless Headset	Temperature (°C):	20
Serial Number:	1	Relative Humidity (%):	37
Voltage/Freq:	N/A	Barometric Pressure:	30
Tested by:	Ryan Benitez	Location:	Hillsboro
Product Standards:	FCC Part 15 Subpart C		
	N/A		
Test Standard:	FCC Part 15.209		

TEST RESULTS	TEST TYPE	DISTANCE	RUN #
Pass	Compliance	3 meters	5

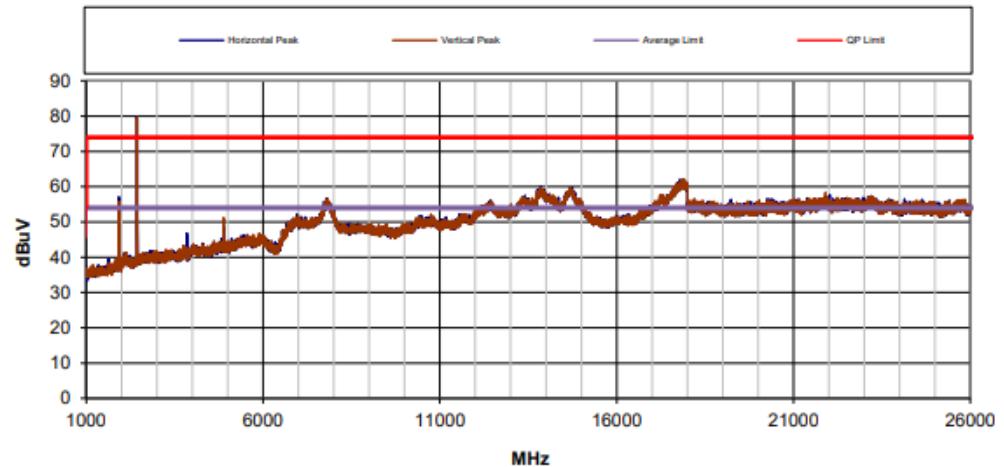

COMMENTS	SIGNATURE
BT at 2441; DECT mid chan; notch filter at 1.9 GHz	<i>Ryan Benitez</i>

Horizontal								
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1924.99	56.32	29.47	-10.05	73.98	53.98	158°/100cm	17.66	N/A
2441.03	87.40	87.16	-9.11	73.98	53.98	247°/175cm	-13.42	N/A
7805.28	42.97	39.33	10.68	73.98	53.98	0°/101cm	31.01	14.65
13850.63	41.61	39.24	9.34	73.98	53.98	68°/175cm	32.37	14.74
17792.00	49.56	44.36	17.44	73.98	53.98	315°/150cm	24.42	9.62

Vertical								
Freq (MHz)	Peak (dB μ V)	Final (dB μ V)	Factors (dB)	Peak Limit (dB μ V)	Final Limit (dB μ V)	Turntable (deg) / Height (cm)	Peak Margin (dB)	Final Margin (dB)
1924.99	53.34	28.84	-10.05	73.98	53.98	49°/200cm	20.64	N/A
2441.04	87.77	87.64	-9.11	73.98	53.98	157°/125cm	-13.79	N/A
4882.08	49.20	48.52	-3.32	73.98	53.98	113°/130cm	24.78	5.46
7819.83	41.60	39.33	10.79	73.98	53.98	315°/101cm	32.38	14.65
14682.03	44.81	42.59	11.92	73.98	53.98	68°/175cm	29.17	11.39
17873.03	49.50	44.47	17.54	73.98	53.98	0°/168cm	24.48	9.51

3.13 Test conditions and results – Automatic discontinuation of transmission

Automatic discontinuation of transmission acc. to FCC 15D / RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	ANSI C63.4	
EUT equipment type	Scan (All)	
Requirements		
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.		

Result		
Test	Reaction	Verdict
Power removed: EUT	A	PASS
Power removed: Companion device	A	PASS
Switch -off: EUT	A	PASS
Switch -off: Companion device	A	PASS
Hook-on: EUT	N/A	N/A
Hook-on: Companion device	N/A	N/A

Comments:

A – Cease of all transmissions

B – EUT transmits control and signaling information

C – Companion device transmits control and signaling information

N/A – Not applicable

3.14 Test conditions and results – Radiofrequency radiation exposure

Radiofrequency radiation exposure acc. to FCC 47 CFR 15D / IC RSS-213	Verdict: N/A						
Test performed by: ElectroMagnetic Investigations							
EUT requirement rule parts and clause	Reference FCC 15.319(i) / IC RSS-102						
Requirements							
<p>FCC: Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.</p> <p>IC: Category I and Category II equipment shall comply with the applicable requirements of RSS-102.</p>							
<table border="1"> <thead> <tr> <th>Result</th> <th>Reference</th> <th>Verdict</th> </tr> </thead> <tbody> <tr> <td>RF Exposure is addressed in a separate exhibit.</td> <td></td> <td>N/A</td> </tr> </tbody> </table>		Result	Reference	Verdict	RF Exposure is addressed in a separate exhibit.		N/A
Result	Reference	Verdict					
RF Exposure is addressed in a separate exhibit.		N/A					

3.15 Test conditions and results – Monitoring threshold

Monitoring threshold acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: N/A
EUT requirement rule parts and clause		Reference FCC 15.323(c)(2),(5),(9) / IC RSS-213 5.2 (2)(5)(9)
Test according to referenced standards		Reference Method ANSI C63.17 7.3.4
Number of duplex channels used	5 carrier with 12 duplex timeslots = 60 duplex channels	
Requirements		
<p>The monitoring threshold must not be more than 30 dB above the thermal noise power (KTB) of a bandwidth equivalent to the emission/occupied bandwidth of the device.</p> <p>Devices that have a power output lower than the maximum permitted under this standard may increase their detection threshold by 1 dB for each 1 dB that the transmitter power is below the maximum permitted.</p> <p>IC: If access to spectrum is not available as determined by the above, a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the terminal noise power determined for the occupied bandwidth may be accessed.</p> $T_u[\text{dBm}] = -174 + 10 * \log_{10}(\text{Bandwidth [Hz]}) M_U + P_{MAX}[\text{dBm}] - P_{EUT}[\text{dBm}]$ $T_L[\text{dBm}] = -174 + 10 * \log_{10}(\text{Bandwidth [Hz]}) M_L + P_{MAX}[\text{dBm}] - P_{EUT}[\text{dBm}]$ <p>With $M_U = 50$ dB and $M_L = 30$ dB, P_{MAX} as given under “Peak transmit power” and bandwidth as emission or occupied bandwidth. The power threshold limit is given by T_u+U_M ($U_M = 6$ dB).</p>		
Comments:		

3.16 Test conditions and results – LIC confirmation

LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	FCC 15.323(c)(5) / IC RSS-213 5.2(5)
Test according to referenced standards	Reference Method	ANSI C63.17 7.3.2
Requirements		
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selection time and spectrum windows is no higher than the previously detected value.		
Test Result		
Evaluation		Verdict
The requirement is verified using the “Monitoring time” and “LIC Selection” test.		PASS
Comments:		

3.17 Test conditions and results – LIC selection

LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(5) / IC RSS-213 5.2 (5)		
Test according to referenced standards	Reference Method		
	ANSI C63.17 7.3.3		
Requirements			
<p>FCC: if access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power levels may be accessed.</p> <p>IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.</p>			
Test Result			
Interferer Level f_1	Interferer Level f_2	Communication channel	Verdict
$T_L + U_M + 7 \text{ dB}$	$T_L + U_M$	f_2	PASS
$T_L + U_M$	$T_L + U_M + 7 \text{ dB}$	f_1	PASS
$T_L + U_M + 1 \text{ dB}$	$T_L + U_M - 6 \text{ dB}$	f_2	PASS
$T_L + U_M - 6 \text{ dB}$	$T_L + U_M + 1 \text{ dB}$	f_1	PASS
Comments: T_L corresponds to the lower threshold power value			

3.18 Test conditions and results – Monitoring antenna

Monitoring antenna acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference
FCC 15.319(c)(8) / IC RSS-213 5.2(8)		
Test according to referenced standards		Reference Method
ANSI C63.17 4.6		
Monitoring antenna		The same as transmitting antenna
Requirements		
The monitoring system shall use the same antenna used for transmission, or antenna that yields equivalent reception at the location.		

Results		
Connection status	Verdict	
N/A (monitoring antenna identical to transmitting antenna)		PASS
Comments:		

3.19 Test conditions and results – Monitoring time

Monitoring Time acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.323(c)(1) / IC RSS-213 5.2(1)	
Test according to referenced standards		Reference Method	
		ANSI C63.17 7.3.4	
Requirements			
Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 millisecond or shorter frame period or at least 20 milliseconds for systems designed to use a 20 millisecond frame period.			
Test results			
Initial transmit channel	Interferer level	Final transmit channel	Verdict
F_2	0	F_2	PASS
F_2	$T_U + U_M$	F_1	PASS
Comments:			

3.20 Test conditions and results – Monitoring bandwidth

Monitoring bandwidth acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.323(c)(7) / IC RSS-213 5.2(7)	
Test according to referenced standards		Reference Method	
		ANSI C63.17 7.4	
Requirements			
The monitoring system bandwidth must be equal or greater than the emission bandwidth of the intended transmission.			
Test results			
Initial transmit channel	Interferer level	Transmission status	Verdict
$F_{LOW} + 30\% \text{ BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{LOW} - 30\% \text{ BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{HIGH} + 30\% \text{ BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{HIGH} - 30\% \text{ BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
Comments:			

3.21 Test conditions and results – Monitoring reaction time

Monitoring reaction time acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: Pass
EUT requirement rule parts and clause		Reference FCC 15.323(c)(7) / IC RSS-213 5.2(7)
Test according to referenced standards		Reference Method ANSI C63.17 7.5
Requirements		
<p>The monitor shall have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission(occupied) bandwidth in MHz})$ microseconds for signal at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission(occupied) bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.</p>		

Test results				
Channel	Pulse width	Level	Connection possible	Result
F _{LOW}	50	T _L + U _M + 0 dB	No	PASS
F _{MID}	50	T _L + U _M + 0 dB	No	PASS
F _{HIGH}	50	T _L + U _M + 0 dB	No	PASS
F _{LOW}	35	T _L + U _M + 6 dB	No	PASS
F _{MID}	35	T _L + U _M + 6 dB	No	PASS
F _{HIGH}	35	T _L + U _M + 6 dB	No	PASS

3.22 Random Waiting

Random Waiting acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference FCC 15.323(c)(6) / IC RSS-213 5.2(6)
Test according to referenced standards		Reference Method ANSI C63.17 8.1.2 / 8.1.3
Option implemented		No
Requirements		
If the selected combined time and spectrum windows are unavailable the device may either monitor and select different windows or seek to use the same window after waiting an amount of time randomly chosen from a uniform distribution between 10 and 150 milliseconds commencing from the time when the channel becomes available.		

Test results – Access criteria functional test option not implemented				
Initial channel / timeslot	Interferer level	Final Channel / timeslot	Verdict	
F_1 / Slot 2	0	F_1 / Slot 2	PASS	
F_1 / Slot 2	$T_U + U_M$	F_1 / Slot 4	PASS	
Test results – Access criteria functional test option implemented				
Minimum waiting time [ms]	Lower limit [ms]	Maximum waiting time [ms]	Upper limit [ms]	Verdict
N/A	10	N/A	150	N/A
Comments:				

3.23 Test conditions and results – Acknowledgements

Acknowledgements acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
		FCC 15.323(c)(4) / IC RSS-213 5.2(4)
Test according to referenced standards	Reference Method	
		ANSI C63.17 8.2.1
EUT can initiate a communication session	No	
Requirements		
Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initial transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.		

Test results		
Maximum initial transmission [s]	Transmission time limit [s]	Verdict
1.25	30	PASS
Maximum transmission time [s]	Transmission time limit [s]	Verdict
7.0	30	PASS
Comments:		

3.24 Test conditions and results – Maximum spectral occupancy



Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
Test performed by: ElectroMagnetic Investigations		
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 5.2(5)	
Test according to referenced standards	Reference Method	
	Customer declaration	
Requirements		
Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initial transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.		
Test result		
Evaluation		Verdict
According to the technical documentation the total number of time and spectrum windows is: $5 \times 12 = 60$		PASS
According to customer declaration the total number of concurrent time and spectrum windows is: 12		
The number of concurrent allocated time and spectrum windows is less than one third of the total time and spectrum windows of the EUT		
Comments:		

3.25 Test conditions and results – Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
Test performed by: ElectroMagnetic Investigations		
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(12) / IC RSS-213 4.3.4(b)(12)	
Test according to measurement reference	Reference Method	
	Customer declaration	
Requirements		
The provisions of FCC 47 CFR 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CFR 15.323(c)(12), IC RSS – 213(b)(12) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.		
Declaration		
The manufacturer declares that the device does not work in a mode which denies fair access to spectrum for other participants.		


3.26 Test conditions and results – Frame period and jitter

Frame period and jitter acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference
		FCC 15.323(e) / IC RSS-213 5.2(13)
Test according to referenced standards		Reference Method
		ANSI C63.17 6.2.3
Requirements		
<p>The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in the sub-band shall be 20 milliseconds/X where X is a positive whole number.</p> <p>The jitter (time-related, abrupt, spurious variations in the duration of the duration of the frame interval) introduced at the two ends of a communication link shall not exceed 25 microseconds for any two consecutive transmissions.</p>		
Test results – Frame period		
Mean value [ms]	Divider X (10 ms/X)	Verdict
9.99999975	1	PASS
Test results – Jitter		
Maximum difference between frames [μs]	Limit [μs]	Verdict
0.059	25	PASS
Comments:		

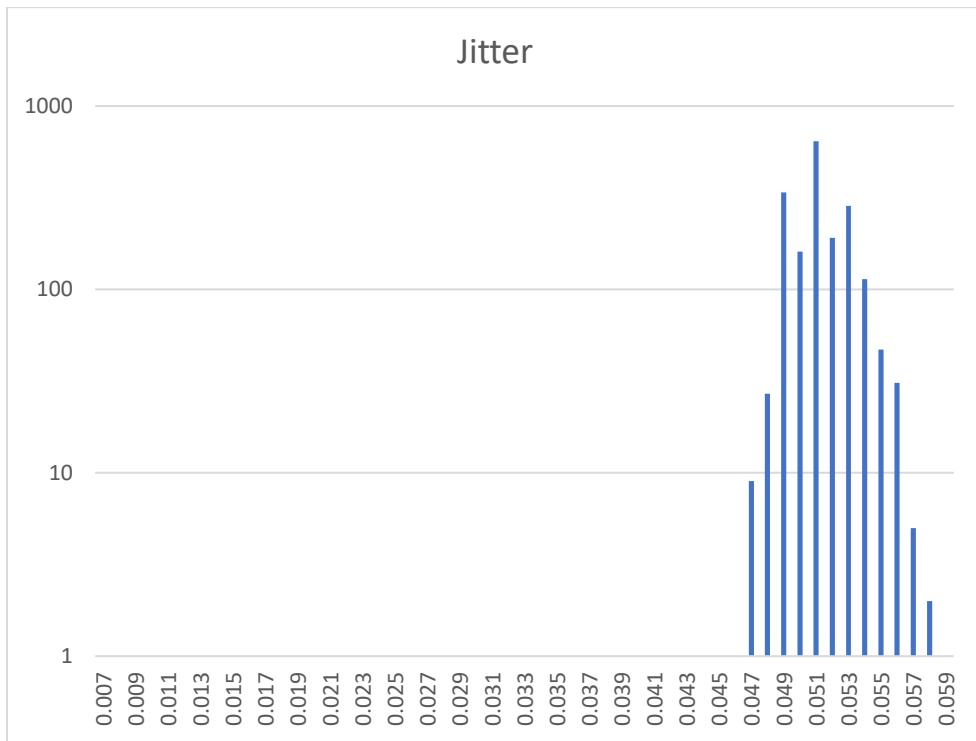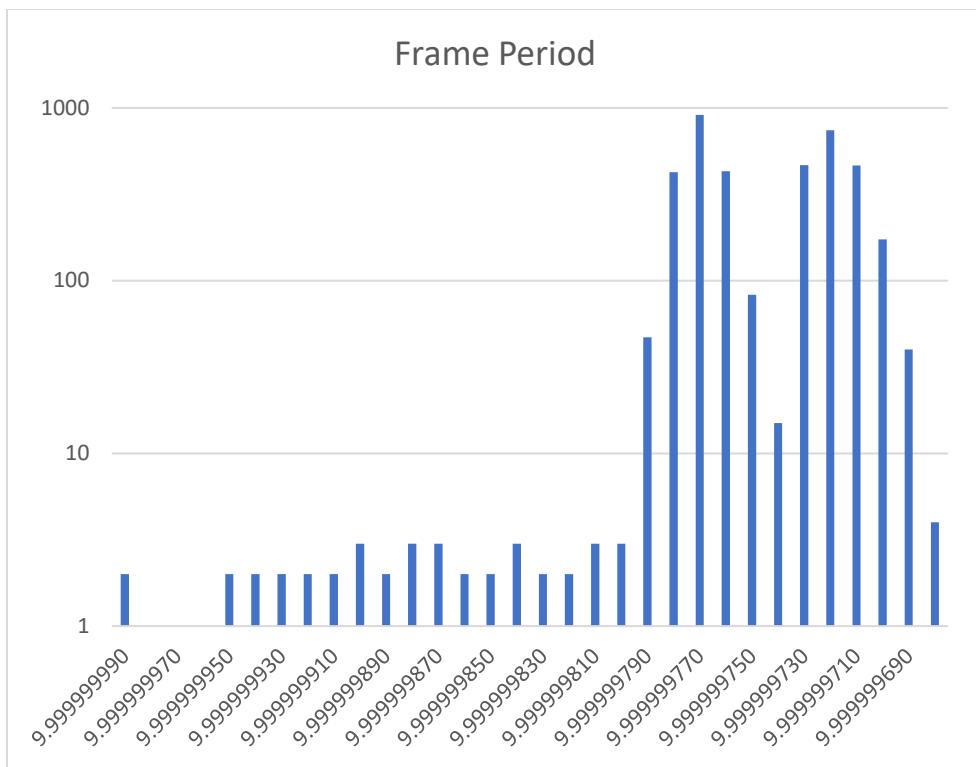

3.27 Test conditions and results – Frame and repetition stability

Frame and TDMA repetition stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.323(e) / IC RSS-213 5.2(13)	
Test according to referenced standards		Reference Method	
		ANSI C63.17 6.2.2	
Access scheme used		Time Division Multiple Access	
Requirements			
Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.			
Test results			
Access scheme	Error [ppm]	Limit [ppm]	Verdict
Time Division Access	N/A	50	N/A
Time Division multiple Access	6	10	PASS
Comments:			

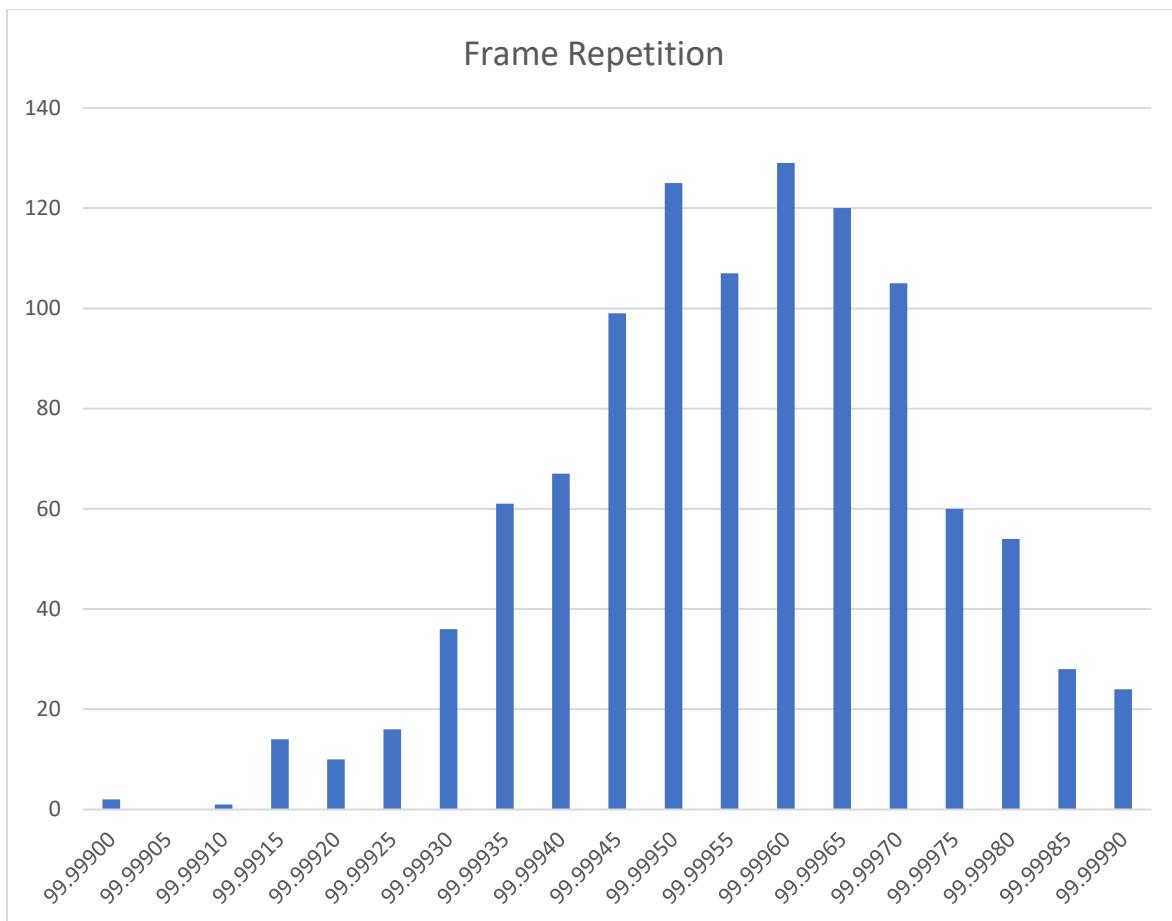

END OF REPORT