

Report No.: EESZG01140003-1 Page 1 of 28



**Product** Wireless Flash Transceiver

**Trade mark Cactus** 

V6 Model/Type reference

**FCC ID** VAAWFTV6

**Report Number** EESZG01140003-1

Apr. 23, 2014 **Date** 

Regulations See below

Test Standards	Results
	PASS

Prepared for

**Harvest One Limited** 9D On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fo Tan, N.T., **Hong Kong** 

Prepared by

**Centre Testing International (Shenzhen) Corporation** Hongwei Industrial Zone, 70 Area, Bao'an District, Shenzhen, Guangdong, China

> TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Tested by:

Reviewed by:

Approved by:

Date:

Apr. 23, 2014

Check No.: 1022590361













Page 2 of 28

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	3
2. TEST SUMMARY	3
3. MEASUREMENT UNCERTAINTY	3
4. TEST EQUIPMENT LIST	
5. SUPPORT EQUIPMENT LIST	2
6. PRODUCT INFORMATION	
7. 20DB BANDWIDTH MEASUREMENT	
7.1 LIMITS 7.2 BLOCK DIAGRAM OF TEST SETUP 7.3 TEST PROCEDURE 7.4 TEST RESULT	
8. RADIATED EMISSIONS MEASUREMENT	
8.1 LIMITS 8.2 BLOCK DIAGRAM OF TEST SETUP 8.4 TEST RESULT	10
9. BAND EDGE EMISSION MEASUREMENT	15
9.1 LIMITS 9.2 BLOCK DIAGRAM OF TEST SETUP 9.3 TEST PROCEDURE 9.4 TEST RESULT	15 15
10. CONDUCTED EMISSION TEST	18
10.1 LIMITS  10.2 BLOCK DIAGRAM OF TEST SETUP  10.3 PROCEDURE OF CONDUCTED EMISSION TEST  10.4 GRAPHS AND DATA	18 18
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	21
APPENDIX 2 PHOTOGRAPHS OF EUT	23
(Note: N/A means not applicable)	





# 1. GENERAL INFORMATION

**Applicant:** Harvest One Limited

9D On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fo

Tan, N.T., Hong Kong

FCC ID: VAAWFTV6

**Product:** Wireless Flash Transceiver

Trade mark:

Cactus

Model/Type reference: V6

Serial Number: N/A

Report Number: EESZG01140003-1

Sample Received Date: Jan. 16, 2014

**Sample tested Date:** Jan. 16, 2014 to Apr. 23, 2014

The above equipment was tested by Centre Testing International for compliance with the requirements set forth in the FCC Rules and Regulations Part 15 and the measurement procedure according to ANSI C63.4:2009.

#### 2. TEST SUMMARY

The complete list of measurements is given below:

No.	Test Item	Rule	Result
1	20dB Bandwidth	FCC 15.215(c)	PASS
2	Radiated Emission	FCC 15.209	PASS
3	Out of Band Emission	FCC 15.249 (d)	PASS
4	Antenna Requirements *	FCC 15.203	PASS
5	Conducted Emission (CE)	FCC 15.207	PASS

<sup>\*:</sup> According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The EUT has a built in antenna which is a short wire solder on the PCB, this is permanently attached antenna and meets the requirements of this section.

#### 3. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty
Conducted Emission Test	3.2 dB
Radiated Emissions / Bandedge Emission	4.5 dB







Report No. : EESZG01140003-1 Page 4 of 28

# 4. TEST EQUIPMENT LIST

		/ 20 71		
Equipment	Manufacturer	Model Number	Serial Number	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/12/2016
Spectrum Analyzer	Agilent	E4443A	MY45300910	01/18/2015
Receiver	R&S	ESCI	100435	07/19/2014
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	06/25/2014
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/19/2014
Receiver	R&S	ESCI	100009	07/19/2014
LISN	R&S	ENV216	100098	07/19/2014

# 5. SUPPORT EQUIPMENT LIST

	No.	Device Type	Brand	Model	Series No.	Data Cable	Remark
	1.	Notebook	DELL	Vostro 3400	GYQTVP1	N/A	FCC DOC
Ī	2.	Mouse	L.Selectron	M004	02284699	Un-shielded 1.2M	FCC DOC

# **6. PRODUCT INFORMATION**

Items	Description
Rating	DC 3V
Intentional Transceiver	Intentional Transceiver
Modulation	MSK
Frequency Range	2.445796783~2.480988190GHz
Channel Number	12
Frequency list	2.445796783GHz, 2.448996002GHz, 2.452195221GHz, 2.455394440GHz, 2.458593658GHz, 2.461792877GHz, 2.464992096GHz, 2.468191315GHz, 2.471390533GHz, 2.474589752GHz, 2.477788971GHz, 2.480988190GHz
Туре	PCB Antenna
Antenna gain	0dBi
Connector	fixed on board















Page 5 of 28


Report No.: EESZG01140003-1

# 7. 20DB BANDWIDTH MEASUREMENT

### 7.1 LIMITS

None

# 7.2 BLOCK DIAGRAM OF TEST SETUP



# 7.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. A PEAK output reading and 20dB BW function in spectrum analyzer were taken.

### 7.4 TEST RESULT

20dB Bandwidth:

Channel	Frequency (GHz)	20 dB BW (MHz)
Low	2.445796783	1.19
Middle	2.458593658	1.11
High	2.480988190	1.13













Report No.: EESZG01140003-1

Page 6 of 28

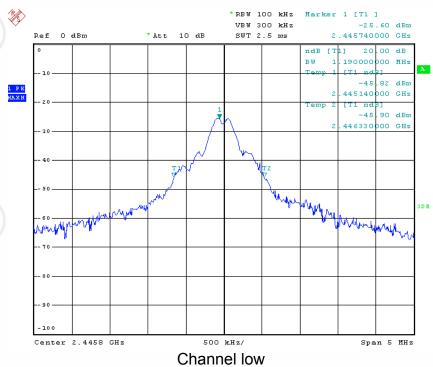

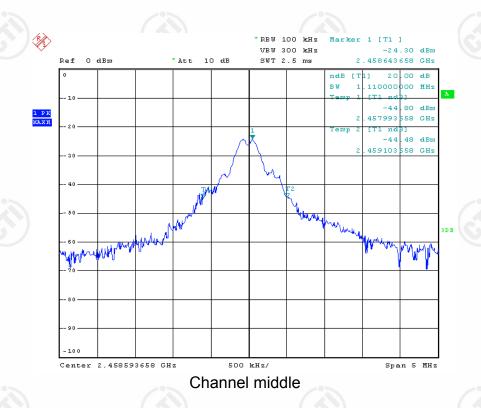












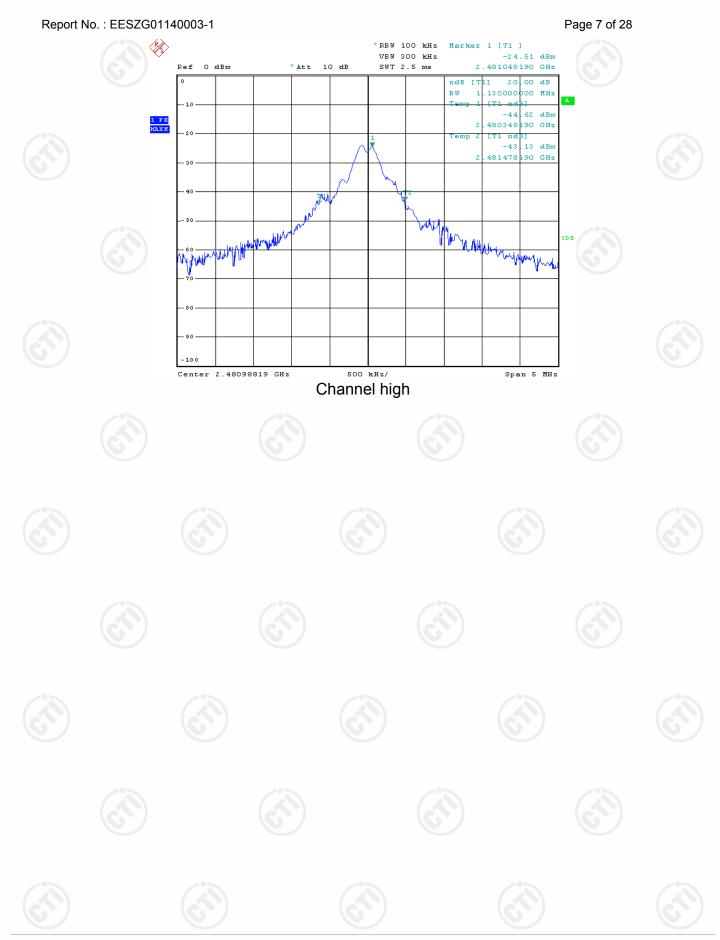







Report No.: EESZG01140003-1 Page 8 of 28

## 8. RADIATED EMISSIONS MEASUREMENT

#### 8.1 LIMITS

(1) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400-2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0-24.25 GHz	250	2500


(2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209 as the following, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (mV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note: the tighter limit applies at the band edges.

#### **8.2 BLOCK DIAGRAM OF TEST SETUP**

For radiated emissions from 9kHz to 30MHz

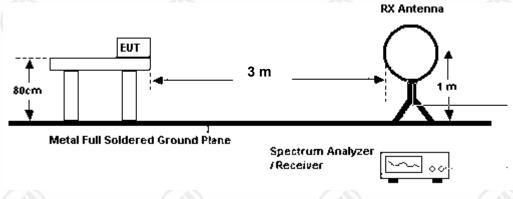











Report No.: EESZG01140003-1 Page 9 of 28

For radiated emissions from 30 - 1000MHz

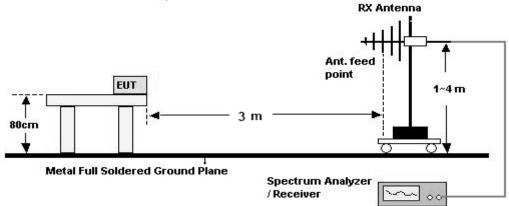

For radiated emissions from 1GHz to 25GHz

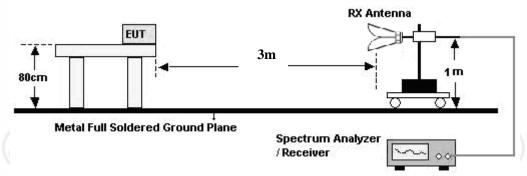

# 8.3 TEST PROCEDURE

#### **Below 30MHz**

- a. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 1 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- b. For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### 30MHz ~ 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.



















Report No.: EESZG01140003-1 Page 10 of 28

c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### **Above 1GHz:**

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### **8.4 TEST RESULT**

Note: Limit  $dB\mu V/m$  @3m = Limit  $dB\mu V/m$  @300m+ 80 Limit  $dB\mu V/m$  @3m = Limit  $dB\mu V/m$  @30m + 40

Remark: The radiation measurements are performed in X, Y, Z axis positioning, only the test worst case mode is recorded in the report.



















































Report No.: EESZG01140003-1 Page 11 of 28


## A. Below 30MHz:


The test data below 30MHz are very low, so they are not recorded.

## B. $30 \mathrm{MHz} \sim 1 \mathrm{GHz}$ :

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of low channel are chosen as representative in below:

### H:

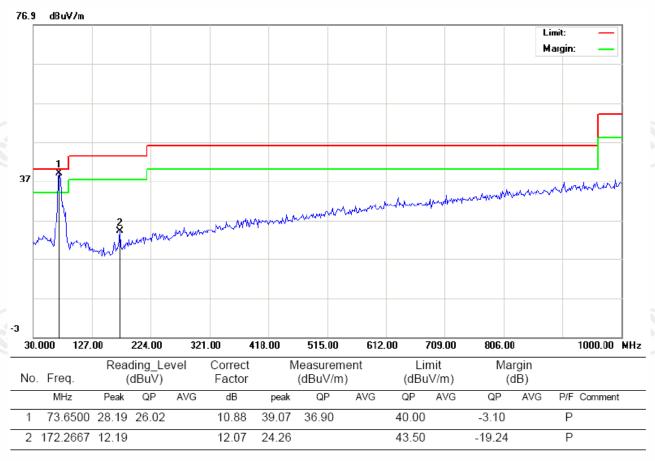

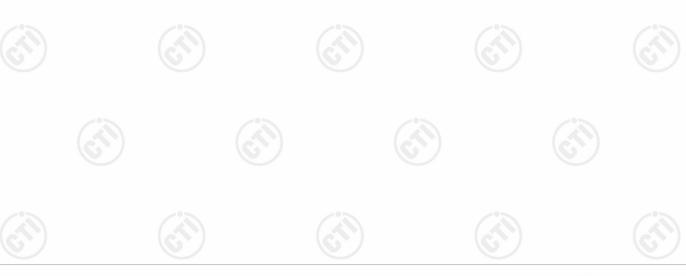










Report No.: EESZG01140003-1 Page 12 of 28

V:

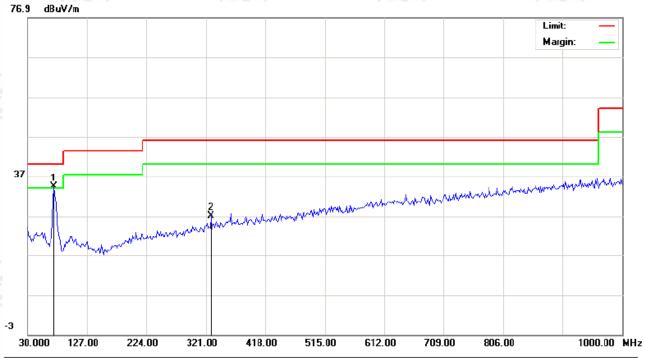

Reading_Level No. Freq. (dBuV)		0_				_								
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F Comment	
1	73.6500	23.55	20.98		10.88	34.43	31.86		40.00		-8.14		Р	
2	329.0833	9.97			16.95	26.92			46.00		-19.08		Р	









































# C. Above 1GHz:

	Test Results-(Measurement Distance: 3m)_Channel low									
_	Mea	asurement v	alue	Li	mit	Antenna	Result			
Frequency (MHz)	PK (dBµV/m)	AV factor (dB)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)			
2445.8*	93.12	)	(6	114	94	Н	Р			
4891.6	45.19			74	54	Н	Р			
7337.4	39.05			74	54	Н	Р			
2445.8*	92.29	(c	<u>)</u>	114	94	V	P			
4891.6	44.12			74	54	V	Р			
7337.4	30.21			74	54	V	Р			

<sup>\*:</sup> fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle											
Frequency (MHz)	Mea	asurement v	alue	Li	mit	Antenna	Result				
	PK (dBµV/m)	AV factor (dB)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)				
2458.6*	90.06		<b>—</b>	114	94	Н	Р				
4917.2	41.19			74	54	Н	Р				
7375.8	38.03			74	54	Н	Р				
2458.6*	89.95	)		114	94	V	Р				
4917.2	40.29			74	54	V	Р				

<sup>\*:</sup> fundamental frequency











Report No.: EESZG01140003-1 Page 14 of 28

	Test	Results-(Me	asurement l	Distance: 3n	n)_Channel	high	
_	Mea	asurement v	alue	Li	mit	Antenna	Result
Frequency (GHz)	PK (dBµV/m)	AV factor (dB)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)
2481.0*	90.06	<u> </u>	(	114	94	Н	P
4962.0	44.29	)	(6	74	54	Н	Р
7443.0	36.15			74	54	Н	Р
2481.0*	90.14	/		114	94	V	Р
4962.0	42.19	(c	N)	74	54	V	Р
7443.0	35.54			74	54	V	Р

<sup>\*:</sup> fundamental frequency

#### Remark:

1. For above 1GHz, except fundamental frequency:

PK detector: RBW=1MHz, VBW=1MHz For above 1GHz, fundamental frequency: PK detector: RBW=3MHz, VBW=3MHz

2. According to the emissions below 18GHz, the data curve is lower than the limit, and the data between 18GHz to 25GHz will be lower than the limit, so they are not recorded in the report.












































Report No. : EESZG01140003-1 Page 15 of 28

### 9. BAND EDGE EMISSION MEASUREMENT

#### 9.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § FCC 15.209 & , whichever is the lesser attenuation.

#### 9.2 BLOCK DIAGRAM OF TEST SETUP

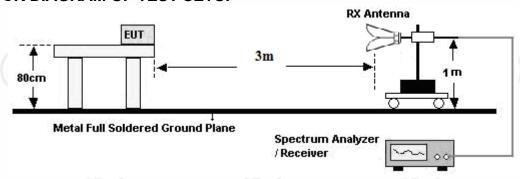

#### 9.3 TEST PROCEDURE

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### 9.4 TEST RESULT

**PASS** 









Report No.: EESZG01140003-1 Page 16 of 28

## 2.445796783GHz:

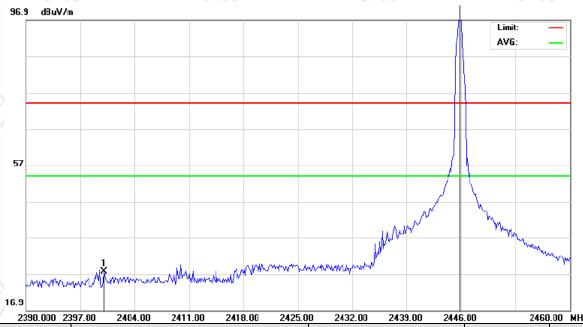

Fraguenav	Mea	asurement v	/alue		mit	Antenna	Result
Frequency (MHz)	PK (dBµV/m)	AV factor (dB)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBμV/m)	(H/V)	(P/F)
2400.000	27.52	(0)	/	74	54	Н	Р

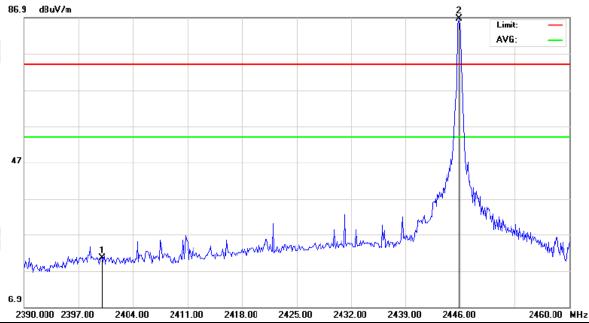


_	Mea	asurement v	value value	Li	mit	Antenna	Result
Frequency (MHz)	PK (dBµV/m)	AV factor (dB)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2400.000	20.38			74	54	V	Р








## 2.480988190GHz:

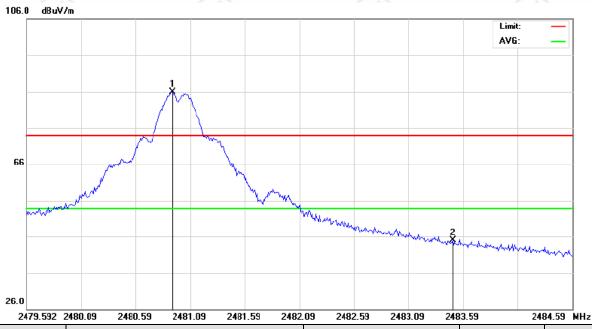

<b></b>	Mea	asurement w	alue	Li	mit	Antenna	Result
Frequency (MHz)	PK (dBµV/m)	AV factor (dB)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)
2483.500	44.96	(6)	/	74	54	Н	Р

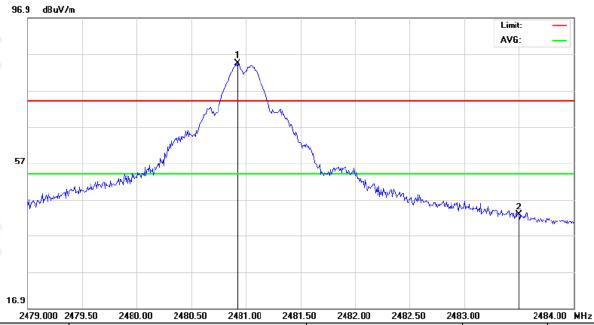

Frequency (MHz) $\begin{array}{ c c c c c c c c c c c c c c c c c c c$	Antenna	Result				
					(H/V)	(P/F)
2483.500	43.10	 	74	54	٧	Р





## 10. CONDUCTED EMISSION TEST


# **10.1 LIMITS**

	l imito dE	2//\
Frequency range (MHz)	Limits dE	σ(μν)
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.


2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

### 10.2 BLOCK DIAGRAM OF TEST SETUP

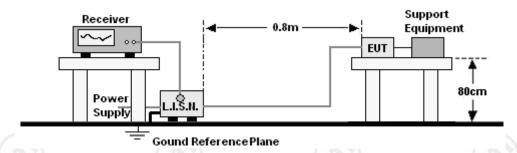

#### 10.3 PROCEDURE OF CONDUCTED EMISSION TEST

- a. The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

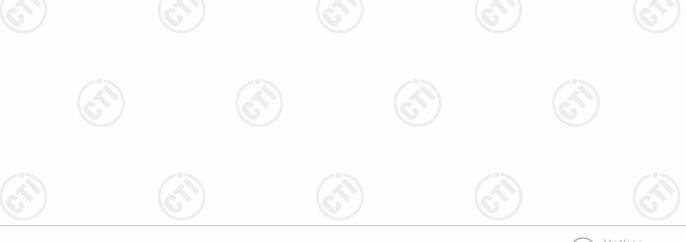








Humidity:

51 %



Report No. : EESZG01140003-1 Page 19 of 28

## 10.4 GRAPHS AND DATA

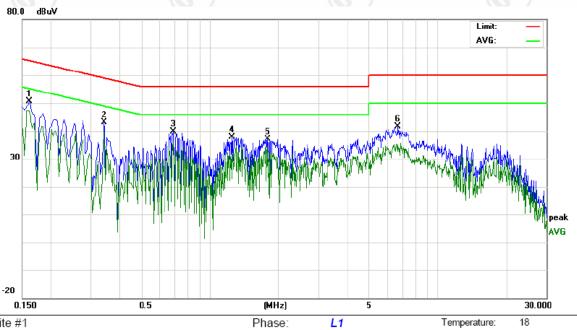

AC 120V/60Hz

Site site #1

Limit: FCC CE

EUT: Wireless Flash Transceiver

M/N: V6

Mode: Keeping TX

Note:

No.	Freq.		ling_L∈ dBuV)	vel	Correct Factor	M	Measurement Limit (dBuV) (dBuV)			rgin dB)				
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1620	40.74		37.70	9.76	50.50		47.46	65.36	55.36	-14.86	-7.90	Р	
2	0.3460	33.31		30.04	9.80	43.11		39.84	59.06	49.06	-15.95	-9.22	Р	
3	0.6900	30.10		26.59	9.80	39.90		36.39	56.00	46.00	-16.10	-9.61	Р	
4	1.2620	28.12		22.77	9.83	37.95		32.60	56.00	46.00	-18.05	-13.40	Р	
5	1.7940	27.14		24.67	9.88	37.02		34.55	56.00	46.00	-18.98	-11.45	Р	
6	6.7020	31.55		25.09	10.00	41.55		35.09	60.00	50.00	-18.45	-14.91	Р	

Power:












Page 20 of 28

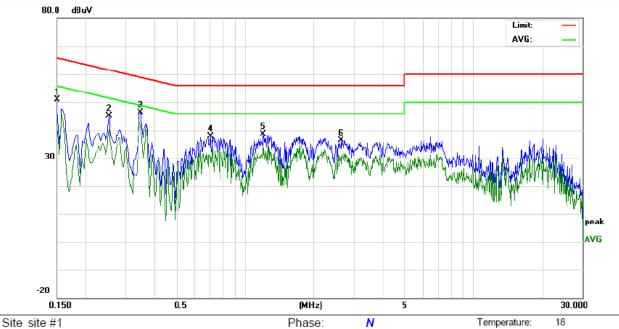

AC 120V/60Hz

Limit: FCC CE

EUT: Wireless Flash Transceiver

M/N: V6

Mode: Keeping TX

Note:

No.	Freq.		ling_Le dBuV)	vel	Correct Factor	M	Measurement Limit (dBuV) (dBuV)			rgin dB)				
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1500	41.23		34.20	9.75	50.98		43.95	65.99	55.99	-15.01	-12.04	Р	
2	0.2540	35.35		30.38	9.80	45.15		40.18	61.62	51.62	-16.47	-11.44	Р	
3	0.3500	36.52		32.04	9.80	46.32		41.84	58.96	48.96	-12.64	-7.12	Р	
4	0.7060	28.12		20.87	9.80	37.92		30.67	56.00	46.00	-18.08	-15.33	Р	
5	1.2059	28.83		24.56	9.82	38.65		34.38	56.00	46.00	-17.35	-11.62	Р	
6	2.6380	26.53		20.81	9.92	36.45		30.73	56.00	46.00	-19.55	-15.27	Р	

Power:













Humidity:

51 %





















Report No. : EESZG01140003-1 Page 21 of 28

# **APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**



TEST SETUP OF CONDUCTED EMISSION



TEST SETUP OF RADIATED EMISSION (30MHz~1GHz)



















Page 22 of 28



TEST SETUP OF RADIATED EMISSION (Above1GHz)























































Report No.: EESZG01140003-1 Page 23 of 28

# **APPENDIX 2 PHOTOGRAPHS OF EUT**

























Page 24 of 28























Page 25 of 28



View of external EUT-5



View of external EUT-6











Page 26 of 28



View of internal EUT-1



View of internal EUT-2



















Report No.: EESZG01140003-1 Page 27 of 28



View of internal EUT-3



View of internal EUT-4















Report No. : EESZG01140003-1 Page 28 of 28



View of internal EUT-5



View of internal EUT-6

# \*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.