



Project: **07CA29340**  
File: **MC15627**  
Report: **07CA29340-FCC**  
Date: **July 25, 2007**  
Model: **SKSN-TRI-CO**

## **Electromagnetic Compatibility Test Report**

### **FCC Certification 47 CFR Part 90 Subpart I & Part 24 Subpart E**

**For**

**SK Telesys Co.,Ltd.**

**12F, Chorim Bldg. 6-3, Sunae-Dong,  
Buandang-Gu, Seongnam, Gyeonggi-Do,  
463-825, Korea**

**UL Korea Ltd.**

<sup>rd</sup>  
33<sup>rd</sup> Fl. Star Tower, 737 Yeoksam-Dong, Kangnam-Gu, Seoul, 135-984, Korea

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

## Report Directory

1. G E N E R A L - Product Description	5
1.1 Equipment Description	5
1.2 Equipment	6
1.3 Equipment Marking Plate	6
2. Test Conditions	7
2.1 Equipment Used During Test	7
2.2 Input/Output Ports	7
2.3 Test Equipments used	8
2.4 Power Interface	8
2.5 EUT Internal Operating Frequencies	8
2.6 EUT Operation Modes	9
2.7 EUT Operating Frequencies	9
2.8 Test Signal Source	9
2.9 EUT Configurations	10
2.10 Test Lab Environmental Condition	12
2.11 Test Specifications	12
2.12 Test Laboratory Details	12
3. Test Results	13
3.1 Test Conditions and Results – Conducted emissions at mains terminal	13
3.2 Test Conditions and Results – Radiated Emissions	20
3.3 Test Conditions and Results – RF Power Output	25
3.4 Test Conditions and Results – Occupied Bandwidth	40
3.5 Test Conditions and Results – Emission Mask	66
3.6 Test Conditions and Results – Spurious Emission at Antenna Terminal	77
3.7 Test Conditions and Results – Radiated Spurious Emission	118
3.8 Test Conditions and Results – Frequency Stability	122

## **Test Report Details :**

Tests Performed By:	UL Korea Ltd. 33 <sup>rd</sup> FL. Star Tower 737 Yeoksam-dong, Kangnam-ku, Seoul, 135-984, Korea
Test Site:	BWS Tech Inc. 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea, 449-080
	FCC Registration No. : 553281
Tests Performed For:	SK Telesys Co.,Ltd. 12F, Chorim Bldg. 6-3, Sunae-Dong, Buandang-Gu, Seongnam, Gyeonggi-Do, 463-825, Korea
Applicant Contact:	Jae Hyung, Kim
Title:	Manager / RF Development Team
Phone:	+82 31-786-5628
Fax:	+82 31-719-9451
E-mail:	<a href="mailto:kjhyung@sktelesys.com">kjhyung@sktelesys.com</a>
Test Report Number:	07CA29340-FCC
Test Report Date:	July 25, 2007
Equipment Class:	TNB - Licensed Non-Broadcast Station Transmitter
Product Type:	TRI Repeater
Model Number:	SKSN-TRI-CO
FCC ID:	VAWSKSN-TRI-CO
Test standards	47 CFR Part 24 Subpart E, Part 90 Subpart I , Part 15 Subpart B
Sample Serial Number:	Proto type
Sample Receive Date:	2007-06-14
Testing Start Date:	2007-06-15
Date Testing Complete:	2007-06-21
<b>Overall Results:</b>	<b>Pass</b>

UL Korea as an affiliate of Underwriters Laboratories Inc. EMC report apply only to the specific test samples and test results submitted for UL's review. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL Korea Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL Korea Ltd. issued reports. This report shall not be used to claim, constitute or imply product certification, approval, or any agency of the National Authorities. This report may contain test results that are not covered by the NVLAP or KOLAS accreditation.

### Summary of Testing:

The following tests were performed on a sample submitted for evaluation of compliance with 47 CFR Part 24 Subpart E , Part 90 Subpart I and Part 15 Subpart B.

Test #	Test Name Test Requirement/Specification	Compliant	Not Compliant	See Remark
1	Part 15, Subpart B Section 15.109(a)/ CISPR 22:1997 Class A Radiated Emissions - 30 to 1000 MHz Electric Field	X	-	2
2	Part 15, Subpart B Section 15.107(a) / CISPR 22:1997 Class A Conducted Emissions	X	-	2
3	Section 2.1046, § 90.205, § 24.232 RF Power Output	X		
4	Section 2.1047 Audio Frequency Response	-	-	1
5	Section 2.1047, Modulation Limiting	-	-	1
6	Section 2.1049, § 90.209, FCC 2-11-04/EAB/RF Occupied Bandwidth	X		
7	Section 2.1051, § 90.210, § 90.669, § 24.238 Spurious Emission at antenna terminal	X		
8	Section 2.1053, § 90.210, § 24.238 Radiated Spurious Emission	X		
9	Section 2.1055, § 90.213, § 24.135, § 24.235 Frequency Stability	X		
10	FCC 2-11-04/EAB/RF Out of band Rejection	X		
11	RF Exposure			3

### Remarks:

- 1) Not applicable to this EUT.
- 2) Emissions Data can also be considered applicable to FCC Part 15 Subpart A.
- 3) RF Exposure will be addressed at the time of licensing.
- 4) Modifications to EUT required for compliance: NONE.

### Conclusion:


The tests listed in the Summary of Testing section of this report have been performed and the results recorded by UL Korea Ltd. in accordance with the procedures stated in each test requirement and specification. The test list was determined by the Applicant as being applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

Tested By:



Kyung Yong, Kim  
EMC Engineer  
UL Korea Ltd.

Reviewed By:



Jea Woon, Choi  
EMC Engineer  
UL Korea Ltd.

## 1. G E N E R A L - Product Description

### 1.1 Equipment Description

The SK telesys SKSN-I30-CO is a dual band bi-directional RF signal amplifier system for the wireless SMR 800 MHz and 900 MHz iDEN spectrum bands. The iDEN (Integrated Digital Enhanced Network) RF repeater is a RF repeater for indoor use using a frequency band of iDEN networks. This dual band RF repeater is designed to be elastically applicable to frequency of iDEN band, is excellent in frequency selection levels of frequency bandwidth to service of down links and up links through an up/down converter module, and minimizes interference in other signals.


- Basic model tested : SKSN-TRI-CO
- Model covered : SKSN-TRI-CM , SKSN-TRI-NO

Items		Standards
Frequency Range	iDEN 800MHz band	Downlink : 851~869 MHz , Uplink : 806~824MHz
	iDEN 900MHz band	Downlink : 935~940MHz , Uplink : 896~901MHz
	CDMA 1900 MHz band	Downlink : 1930~1995 MHz , Uplink : 1850~1915 MHz
Output Power per channel / Amplifier Gain		iDEN 25dBm / 65dB CDMA 24dBm / 80dB
Modulation		QAM (iDEN) , QPSK(CDMA)
Emission Designator		GXW(iDEN) , F9W(CDMA)
Input Level		-15 ~ -40dBm (iDEN) -16 ~ -56dBm (CDMA)
Gain Control Range		25 dB(1dB/Step±0.5dB) : iDEN 40 dB(1dB/Step±0.5dB) : CDMA
Input/output connector		50Ω N-Type (Female)
Cabinet		Indoor type
Size (H*W*D)		580*420*261 mm
Working temperature/ working humidity		-10°C ~ 50°C / 5 % ~ 95%
Power		108 ~ 127 VAC, 60Hz

## 1.2 Equipment



## 1.3 Equipment Marking Plate

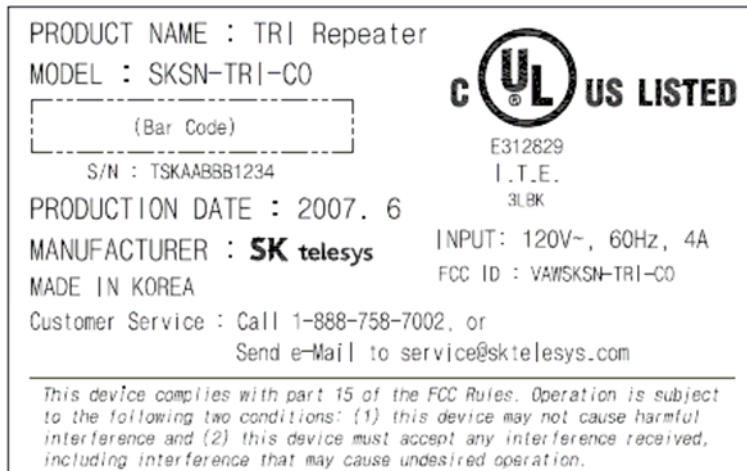

## 2. Test Conditions

### 2.1 Equipment Used During Test

Use*	Product Type	Manufacturer	Model	Comments
EUT	iDEN Repeater	SK Telesys	SKSN-TRI-CO	Indoor metal enclosure
AE	RF Load	Bird	8173	Coaxial Load S/N : 2501
AE	RF Attenuator	Bird	8325	Coaxial Attenuator S/N : 4572
SIM	Notebook PC	DELL	PP17L	For Frequency tune up

Note:  
\* **EUT** - Equipment Under Test, **AE** - Auxiliary/Associated Equipment, or **SIM** - Simulator (Not Subjected to Test)

### 2.2 Input/Output Ports

Port #	Name	Type*	Cable Max. >3m (Y/N)	Cable Shielded (Y/N)	Comments
0	Enclosure	N/E	—	—	Metal cabinet type (indoor purpose)
1	Mains (AC input)	AC	< 3m	N	Cable length (1m)
2	Antenna port (Donor)	RF	N	Y	Connected to RF Load
3	Antenna port (Service)	RF	N	Y	Connected to RF Load
4	Coupling Port	RF	-	-	No use : Maintenance purpose only
5	Coupling Port	RF	-	-	No use : Maintenance purpose only

Note:  
\*AC = AC Power Port      DC = DC Power Port      N/E = Non-Electrical  
I/O = Signal Input or Output Port (Not Involved in Process Control)  
TP = Telecommunication Ports

### 2.3 Test Equipments used

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/212	2006-05-12	2007-05-12
Signal Generator	Aeroflex	IFR3413	341006/012	2006-09-26	2007-09-36
Spectrum Analyzer	Agilent	E4440A	MY44022474	2006-11-06	2007-11-06
Spectrum Analyzer	Agilent	E4440A	MY43362280	2005-10-06	2007-11-06
Fixed Attenuator	H.P	8498A	3318A10568	-	-
Fixed Attenuator	Microwave device	MA-530	2309	-	-

Note : E4440A : 3Hz~26.5GHz, IFR3413: 250kHz ~3GHz, Attn : 30dB

### 2.4 Power Interface

Mode #	Voltage (V)	Frequency (DC/AC-Hz)	Phases (#)	Comments
Rated	120Vac	60Hz	Single Phase	Nominal voltage
1	120Vac	60Hz	Single Phase	
2	108Vac	60Hz	Single Phase	Voltage variation (Norminal-15%)
3	138Vac	60Hz	Single Phase	Voltage variation (Norminal+15%)

### 2.5 EUT Internal Operating Frequencies

Frequency (MHz)	Description	Frequency (MHz)	Description

Note : The data has not been provided from the applicant.

## 2.6 EUT Operation Modes

### Emission measurement modes

Mode #	Description
1	Ethernet communication & RF stand-by mode : Ethernet communication was established between NCU(Network Control Unit) and external PC through Ping test mode. The repeater was conditioned at stand-by mode with 50 ohm terminated at both input and output ports.
2	Transmission mode : RF signal from the signal generator injected to the service port of the repeater and the amplified RF output signal from the Doner port was connected to the RF Load.

### RF measurement modes

Mode #	Description
3	Uplink mode : RF signal from the signal generator injected to the service port of the repeater and the amplified RF output signal at the Doner port of the repeater was connected to the Spectrum analyzer.
4	Downlink mode : RF signal from the signal generator injected to the Doner port of the repeater and the amplified RF output signal at the Service port of the repeater was connected to the Spectrum analyzer.

## 2.7 EUT Operating Frequencies

Mode #	Description
1	Uplink mode : 3 frequencies (Bottom, Mid, Top channel) for each frequency band - iDEN 18 MHz band : 806 MHz, 815 MHz, 824 MHz - iDEN 7 MHz band : 817 MHz, 820.5 MHz, 824 MHz - iDEN 5 MHz band : 896 MHz, 898.5 MHz, 901 MHz - PCS band : 1851.25 MHz, 1887.5 MHz, 1913.75 MHz
2	Downlink mode : 3 frequencies (Bottom, Mid, Top channel) for each frequency band - iDEN 18 MHz band : 851 MHz, 860 MHz, 869 MHz - iDEN 7 MHz band : 862 MHz, 865.5 MHz, 869 MHz - iDEN 5 MHz band : 935 MHz, 937.5 MHz, 940 MHz - PCS band : 1931.25 MHz, 1967.5 MHz, 1993.75 MHz

## 2.8 Test Signal Source



For iDEN modulation, the carrier from the signal generator applied to the repeater was a Quadrature Amplitude Modulation(QAM)

- Baseband Modulation type : 16-QAM, 64 kbps Random Data Per Channel
- Baseband Channelization : 25 kHz
- Signal source sample rate : 640ks/sec
- No. of samples : 960,000
- RMS Value : 2907
- Crest factor : 9.475dB


For CDMA modulation, the carrier from the signal generator applied to the repeater was a IS-95 CDMA standard signal.

- Baseband Modulation type : QPSK
- Baseband Channelization : 1.25 MHz
- Signal source sample rate : 1.2288 MHz

## 2.9 EUT Configurations

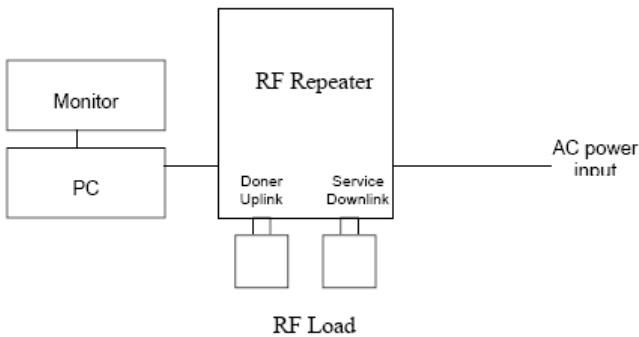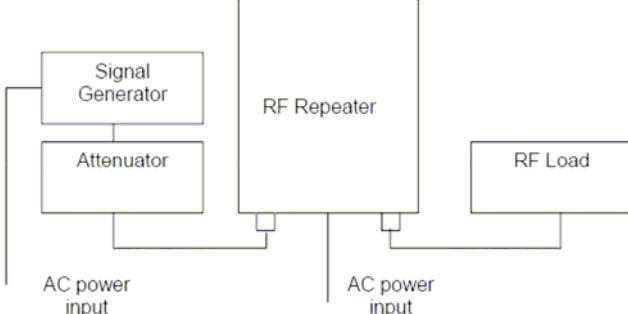
Mode #	Description
1	 <p><b>Test Configuration of EMI Measurement</b></p>
2	 <p><b>Test Configuration of EMI Measurement -</b></p>

3

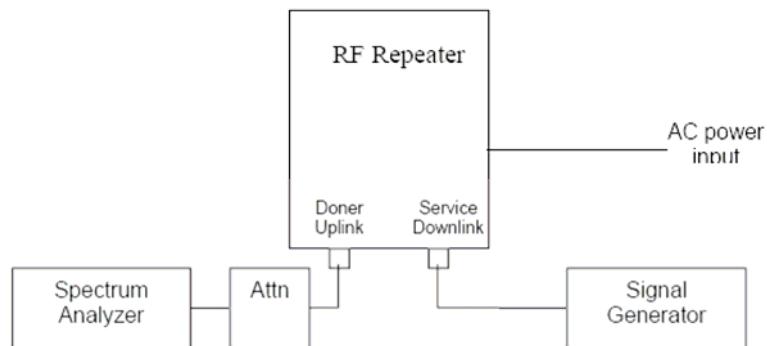

**Test Configuration of Conducted Measurement – Up link**

4

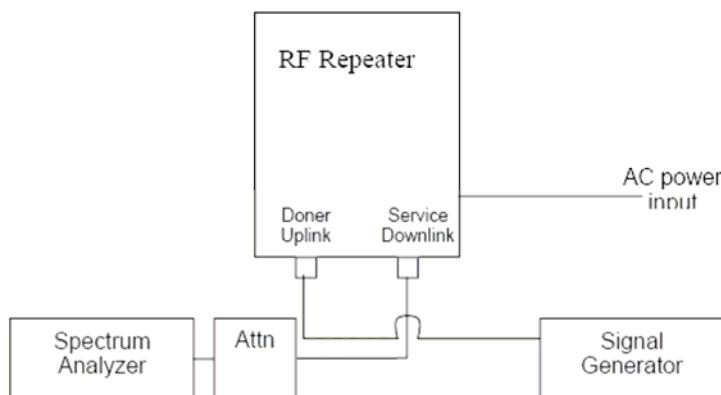

**Test Configuration of Conducted Measurement – Down link**

## 2.10 Test Lab Environmental Condition

Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C
	Relative Humidity	10 to 90 %
Parameters recorded during the test	Laboratory Ambient Temperature	25 °C
	Relative Humidity	40 %

## 2.11 Test Specifications

Standard Number	Standard Name	Standard Date
CFR 47 Part 24 Subpart E	General Technical Standards	2006
CFR 47 Part 90 Subpart I	General Technical Standards	2006
CFR 47 Part 15 Subpart B	General Technical requirements	2006
ANSI C63.4-2003	Methods of Measurements of Radio-Noise Emission from Low voltage and electrical equipment in the range of 9kHz~40GHz	2003
EIA/TIA-603 Edition C 2004	Land Mobile FM or PM communication equipment measurement and performance standards	2004
FCC 2-11-04	EAB/RF Amplifier, Booster, and Repeater reminder	2004

## 2.12 Test Laboratory Details

All the testing has been performed by UL Korea engineer at both test laboratories described below. The radiated spurious emission measurements were performed in a 10 meter open site which has been filed to the commission in accordance with section 2.948 at BWS Tech Inc.

Conducted RF Measurement Test Laboratory : SK Telesys Test Lab (Manufacturer's Test Lab)  
Location : 12F, Chorim Bldg. 6-3, Sunae-Dong, Buandang-Gu, Seongnam, Gyeonggi-Do, 463-825, Korea.

Persons who have been presented during the test : Si Hwan, Sung (Research engineer / SK Telesys) Dae Kwang, Kim (Manager of R&D office/ SK Telesys), Jae Hyung, Kim(Manager of R&D office/ SK Telesys)

Radiated Emission Measurement Test Laboratory : BWS Tech Inc.  
10 m Open Field Test Site (FCC Registration No. : 553281)  
611-1, Maesan-ri, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-853, Korea  
Persons who have been presented during the test : Min sup, Shim (Senior test engineer)

### 3. Test Results

#### 3.1 Test Conditions and Results – Conducted emissions at mains terminal

Test Description	Measurements were made on a ground plane. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN.	
Basic Standard	ANSI C63.4-2003, 47 CFR § 15.107	
Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C
	Relative Humidity	10 to 90 %
Parameters recorded during the test	Laboratory Ambient Temperature	25 °C
	Relative Humidity	42 %
	Frequency range on each side of line	Measurement Point
Fully configured sample scanned over the following frequency range	150kHz to 30MHz	Mains
<b>Limits - Class A</b>		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.50	79	66
0.50 to 30	73	60
<b>Limits - Class B</b>		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Supplementary information: None		

### Conducted Emissions EUT Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1	1, 2	1, 2


Supplementary information:  
The EUT operation modes specified in Section 2.6 have been investigated and final measurement reported was performed with LAN communication mode (mode 1) and iDEN down-link mode with mid frequency 860 MHz as a worst case emission conditions.

### Conducted Emissions Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/012	2006-09-26	2007-09-26
LISN	COM-POWER	L1-115	241017	2006-11-13	2007-11-13
Signal Analyzer	PMM	PMM9000	3100570602	2006-09-22	2007-09-22

**Figure 1 Test Setup for Conducted Emissions**

**Test configuration – Mode 1 : LAN communication**

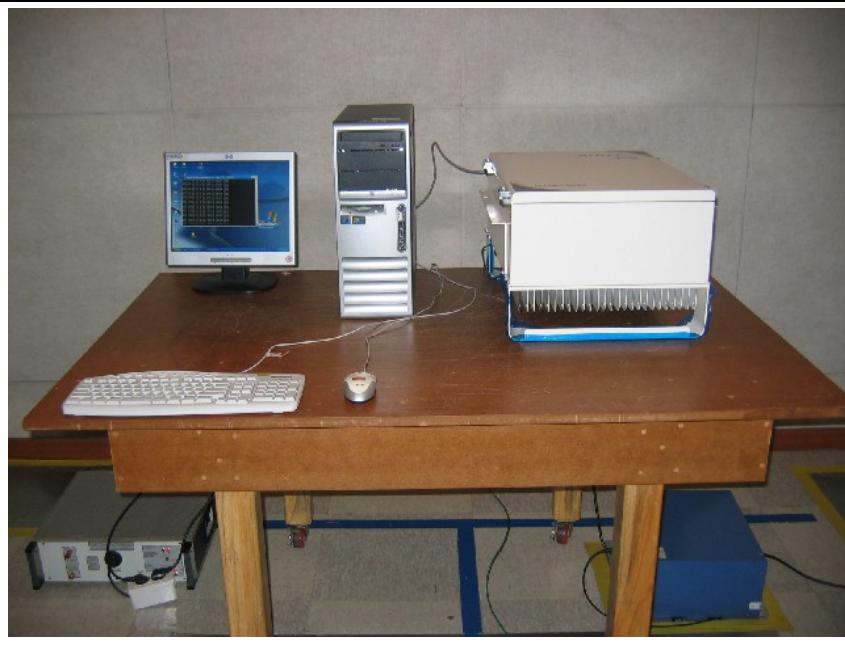

Project Number: 07CA29340  
File Number : MC15627


Test Report No: 07CA29340-FCC  
Date of Issue : July 25, 2007

**Test configuration – Mode 2 : RF Transmission**




### Figure 2 Conducted Emissions Graph

#### Mode 1 : LAN communication

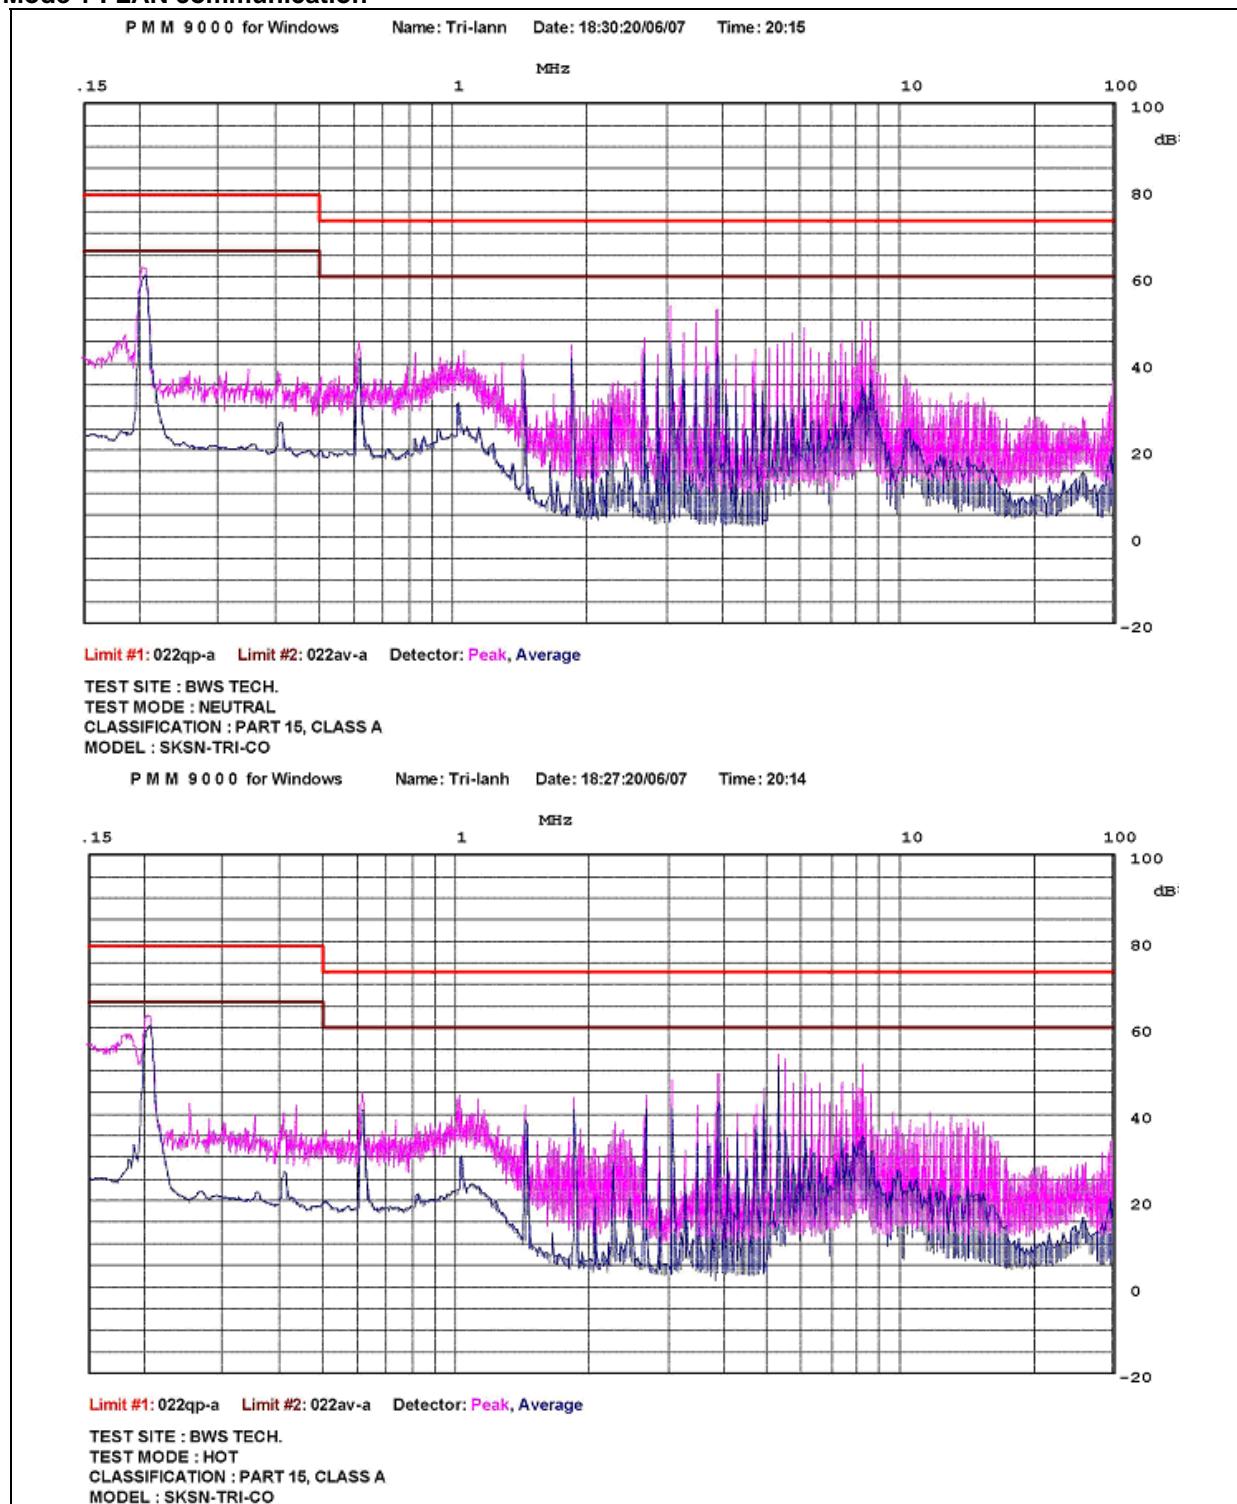

**Mode 2 : RF Transmission : iDEN Down-link 860 MHz**

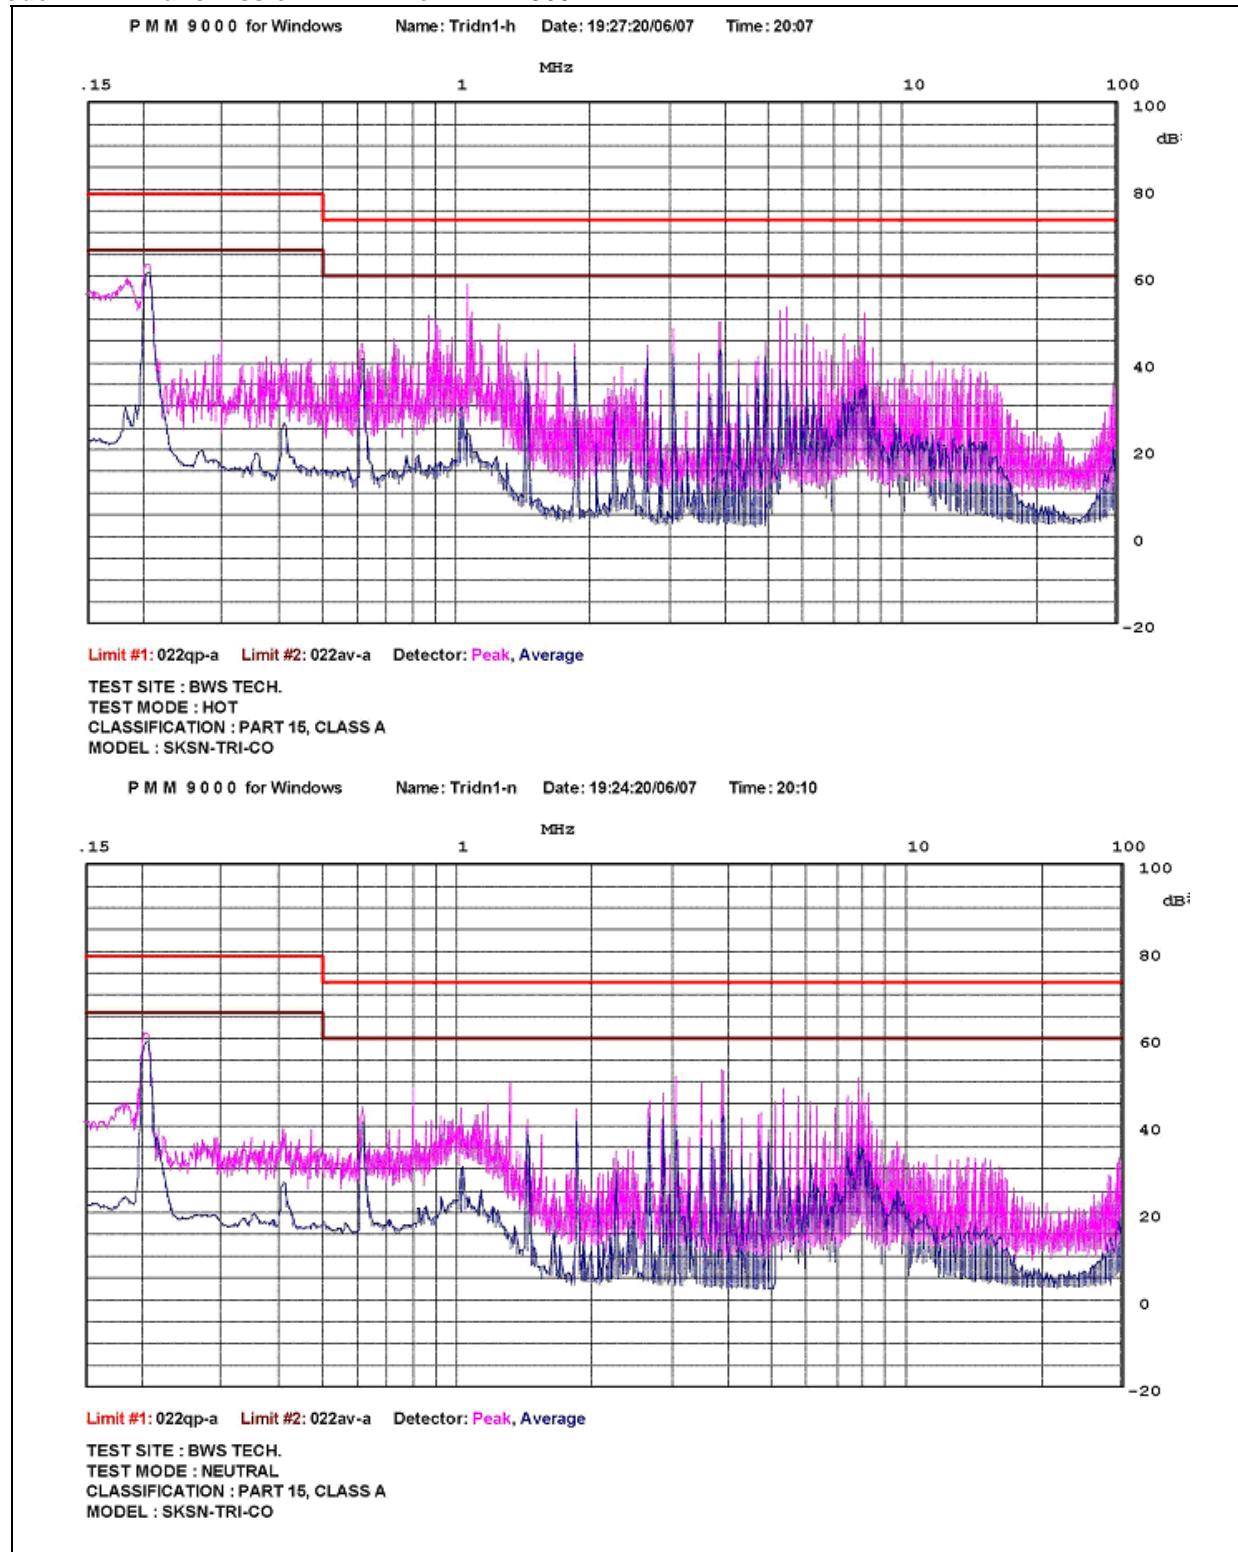

**Table 1 Conducted Emissions Data Points**

**LAN communication mode**

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk/QP/Av) /Polarity	Gain/Loss Factor (dB)	Transducer Factor(dB)	Level (dBuV)	QP Limit (dBuV)	Ave Limit (dBuV)	Margin (dB)
0.203	62.90	QP/H	0.10	0.07	62.90	79.0	66.0	16.10
1.016	44.20	QP/H	0.40	0.04	44.20	73.0	60.0	28.80
3.049	53.30	QP/N	0.60	0.04	53.30	73.0	60.0	19.70
5.290	53.80	QP/H	0.88	0.05	53.80	73.0	60.0	19.20
8.130	51.50	QP/H	1.00	0.06	51.50	73.0	60.0	21.50
11.590	40.50	QP/H	1.11	0.04	40.50	73.0	60.0	32.50
Supplementary information:								

**RF Transmission mode : iDEN down-link 860 MHz**

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk/QP/Av) /Polarity	Gain/Loss Factor (dB)	Transducer Factor(dB)	Level (dBuV)	QP Limit (dBuV)	Ave Limit (dBuV)	Margin (dB)
0.202	62.70	QP/H	0.10	0.07	62.87	79.0	66.0	16.13
1.056	58.20	QP/H	0.41	0.04	58.65	73.0	60.0	14.35
3.862	52.90	QP/N	0.74	0.03	53.67	73.0	60.0	19.33
5.490	52.80	QP/H	0.88	0.05	53.73	73.0	60.0	19.27
8.130	51.60	QP/H	1.00	0.06	52.66	73.0	60.0	20.34
29.480	35.50	QP/H	1.65	0.26	37.41	73.0	60.0	35.59
Supplementary information:								

### 3.2 Test Conditions and Results – Radiated Emissions

Test Description	Measurements were made in a 10-meter open field test site that complies to CISPR 16/ANSI C63.4. Preliminary (peak) measurements were performed at semi anechoic chamber with antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.	
Basic Standard	ANSI C63.4-2003, 47 CFR § 15.107 Class A	
Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C
	Relative Humidity	10 to 90 %
Parameters recorded during the test	Laboratory Ambient Temperature	27 °C
	Relative Humidity	47 %
	Frequency range	Measurement Point
Fully configured sample scanned over the following frequency range	30MHz – 1GHz	(10 meter measurement distance)
<b>Limits - Class A</b>		
Frequency (MHz)	Limit (dB $\mu$ V/m)	
	Quasi-Peak	Average
30 to 230	40	NA
230 to 1000	47	NA
<b>Limits - Class B</b>		
Frequency (MHz)	Limit (dB $\mu$ V/m)	
	Quasi-Peak	Average
30 to 230	30	NA
230 to 1000	37	NA
Supplementary information:		

### Radiated Emissions EUT Configuration Settings


Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See Section 2.6)
1	1, 2	1, 2
Supplementary information: The EUT operation modes specified in Section 2.6 have been investigated and final measurement reported was performed with LAN communication mode (mode 1) and iDEN down-link mode with mid frequency 860 MHz as a worst case emission conditions.		

### Radiated Emissions Test Equipment

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Bilog Antenna	Schwarzbwck	VULB9160	9160-3122	2006-12-29	2007-12-29
Test Receiver	Rohde & Schwarz	ESVN30	832854/010	2005-06-22	2006-06-22
Signal Generator	Aeroflex	IFR3413	341006/012	2006-09-26	2007-09-26
Horn Antenna	Schwarzbeck	BBHA 9120D	234	2007-02-08	2008-02-08
Test Receiver	Rohde & Schwarz	ESPI	100063	2006-11-09	2007-11-09

**Figure 3 Test setup for Radiated Emissions**


**Test configuration – Mode 1 : LAN communication**

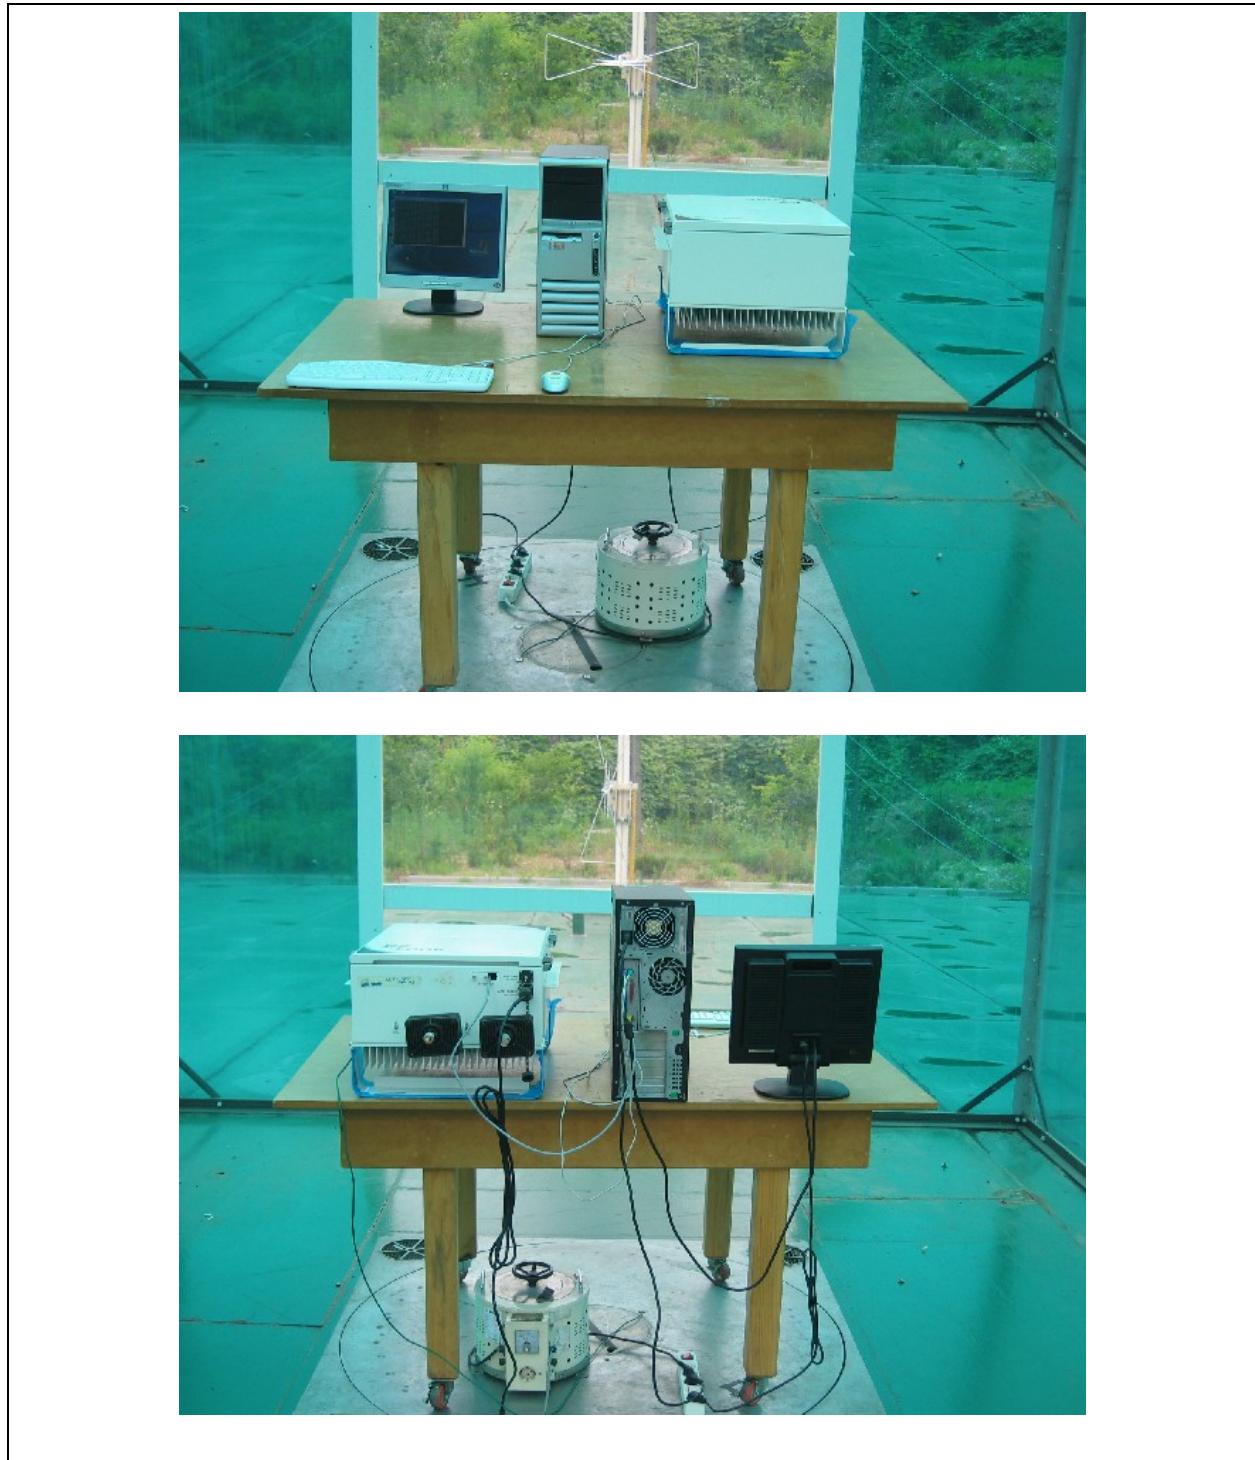

Project Number: 07CA29340  
File Number : MC15627

Test Report No: 07CA29340-FCC  
Date of Issue : July 25, 2007

**Test configuration – Mode 2 : RF Transmission**

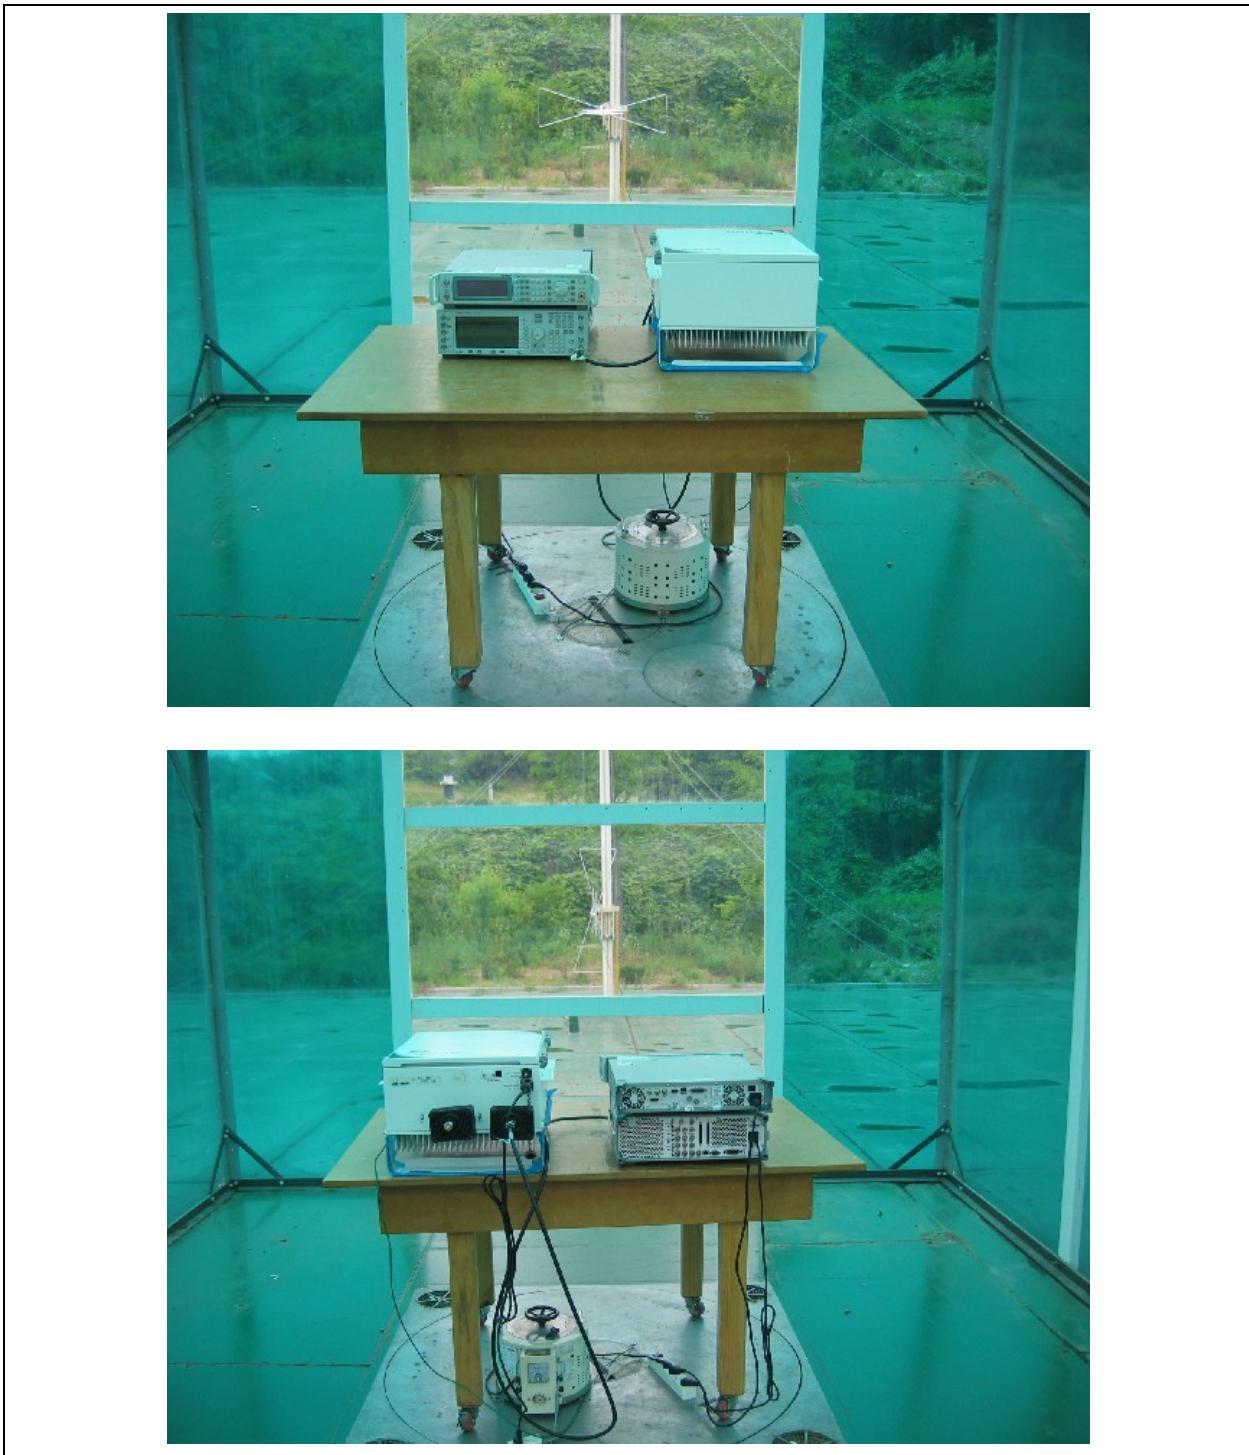

**Table 2 Radiated Emissions Data Points**

**LAN communication mode**

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk/QP)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Gain/Loss Factor (dB)	Transducer Factor (dB/m)	Emission Level dBuV/m	Class A Limit dBuV/m	Margin (dB)
530.82	16.42	QP	H	270	200	5.24	18.26	39.92	47	7.08
968.40	12.40	QP	H	300	200	7.52	24.38	44.30	47	2.70

Supplementary information:  
- Margin = Class A Limit – Emission Level

**RF Transmission mode : iDEN down-link 860 MHz**

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk/QP)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Gain/Loss Factor (dB)	Transducer Factor (dB/m)	Emission Level dBuV/m	Class A Limit dBuV/m	Margin (dB)
530.84	13.02	QP	H	310	220	5.24	18.26	36.52	47	10.48
884.74	4.91	QP	H	270	210	7.08	23.34	35.32	47	11.68
968.43	12.80	QP	H	270	260	7.52	24.38	44.70	47	2.30

Supplementary information:  
- Margin = Class A Limit – Emission Level

### 3.3 Test Conditions and Results – RF Power Output

Test Description	Measurements were made in the laboratory environment. For RF power measurements, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. The EUT was adjusted to produce maximum power rating of the product specification. The measurements were made at the EUT input and output ports in downlink and uplink transmit modes of operation at B,M,T channels.			
Basic Standard	47 CFR § 2.1046, § 90.205, § 90.219, § 24.232			
<b>Output Power Limits</b>				
§ 90.219 Signal boosters must be equipped with automatic gain control circuitry which will limit the total effective radiated power (ERP) of the unit to a maximum of 5 watts under all conditions.				
Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C		
	Relative Humidity	10 to 90 %		
Parameters recorded during the test	Laboratory Ambient Temperature	23 °C		
	Relative Humidity	40 %		

#### RF output power Configuration Settings


Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1	3, 4	3, 4
Supplementary information: None		

#### Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/212	2006-05-12	2007-05-12
Spectrum Analyzer	Agilent	E4440A	MY44022474	2006-11-06	2007-11-06
Fixed Attenuator	H.P	8498A	3318A10568		

Note : E4440A : 3Hz~26.5GHz, IFR3413: 250kHz ~3GHz, Attn : 30dB

**Figure 4 Test setup for Conducted Measurement**

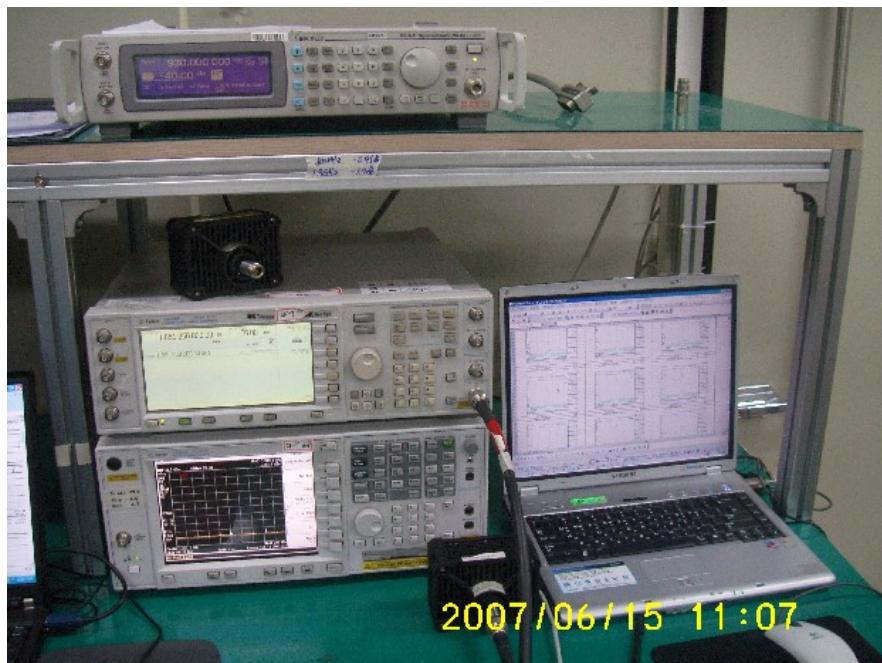

**Table 3 RF output power measured data**

**Down Link**

Carrier Band	Frequency (MHz)	Loss offset (dB)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	851	31	24.62	37	12.38
	860	31	25.35	37	11.65
	869	31	24.57	37	12.43
iDEN 7 MHz	862	31	25.13	37	11.87
	865.5	31	25.45	37	11.55
	869	31	24.56	37	12.44
iDEN 5 MHz	935	31	24.39	37	12.61
	937.5	31	24.80	37	12.2
	940	31	24.97	37	12.03
CDMA	1931.25	32	23.46	33	9.54
	1967.50	32	23.87	33	9.13
	1993.75	32	23.79	33	9.21

Supplementary information:

- Modulation signal 16-QAM / CDMA, Power measurement : Channel power w/ mean value
- Before the measurement, the system calibration for compensation of cable loss and attenuator has been made and included in the test result.


**Up Link**



Carrier Band	Frequency (MHz)	Loss offset (dB)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	806	31	25.19	37	11.81
	815	31	24.79	37	12.21
	824	31	25.23	37	11.77
iDEN 7 MHz	817	31	24.57	37	12.43
	820.5	31	25.29	37	11.71
	824	31	24.76	37	12.24
iDEN 5 MHz	896	31	24.64	37	12.36
	898.5	31	25.28	37	11.72
	901	31	24.88	37	12.12
CDMA	1851.25	32	24.24	33	8.76
	1887.50	32	23.88	33	9.12
	1913.75	32	23.71	33	9.29



Supplementary information:



- Modulation signal 16-QAM / CDMA, Power measurement : Channel power w/ mean value
- Before the measurement, the system calibration for compensation of cable loss and attenuator has been made and included in the test result.



**Figure 4 RF output power graphical data**


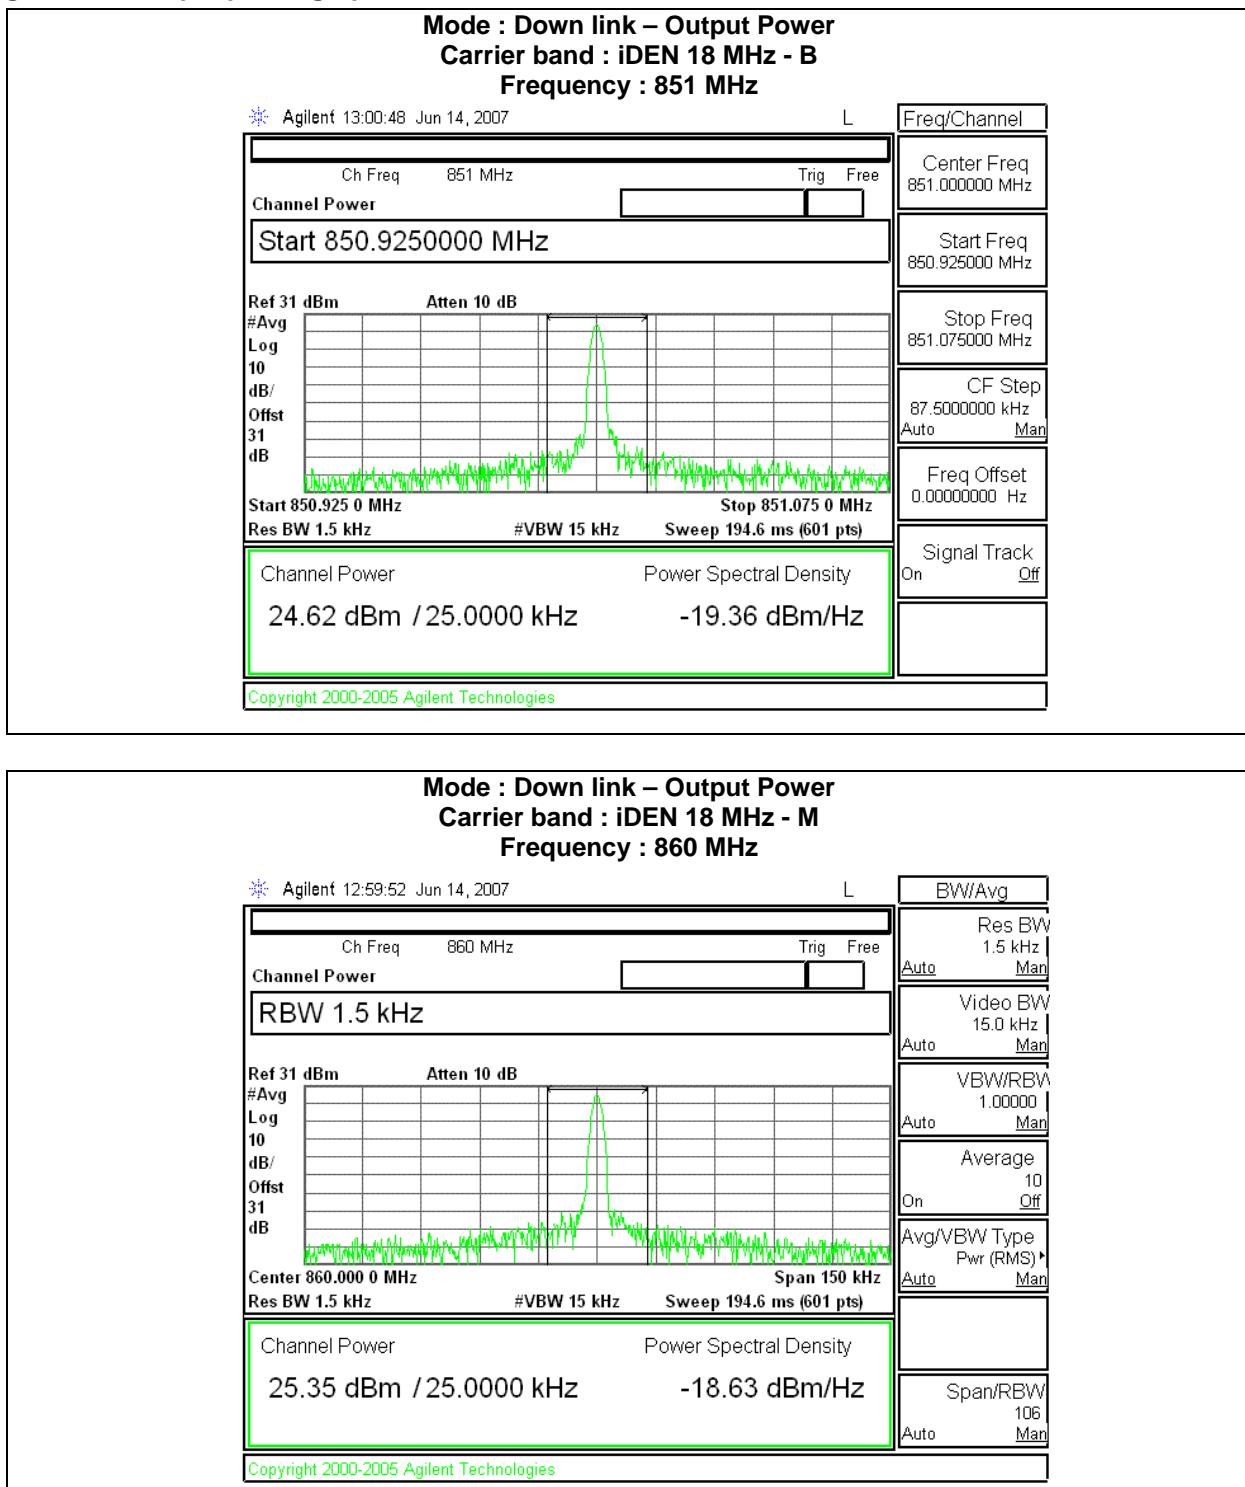


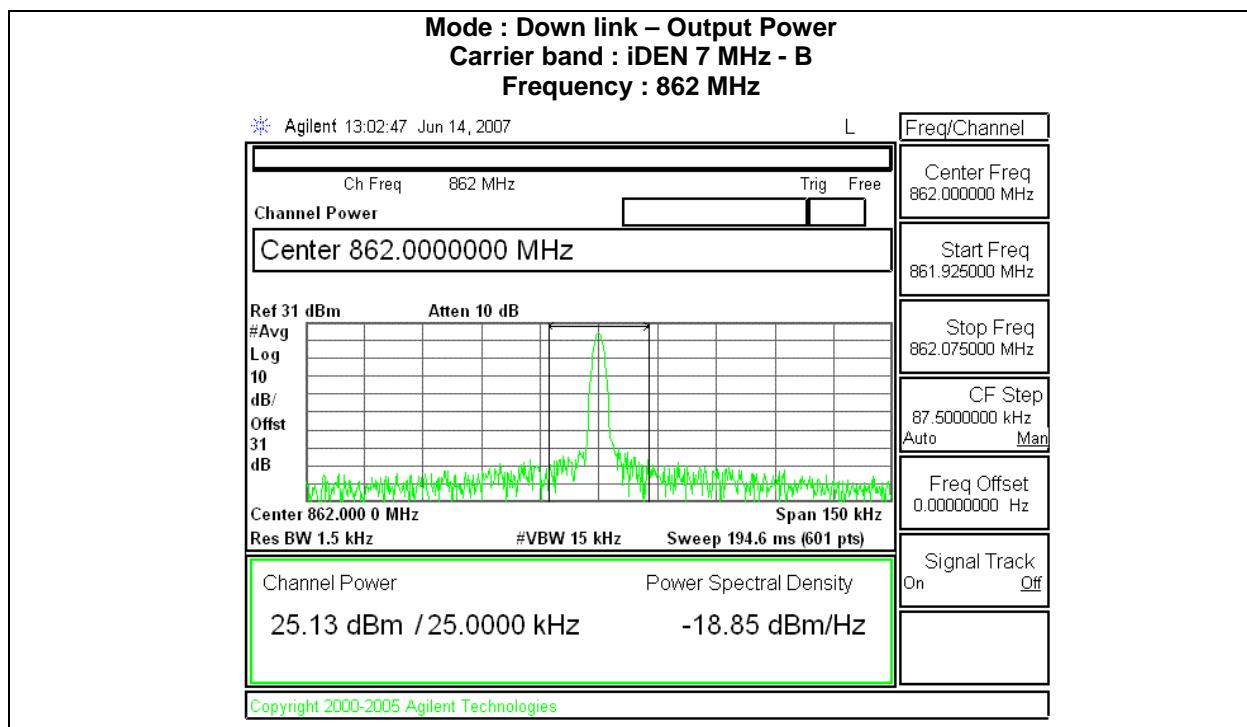
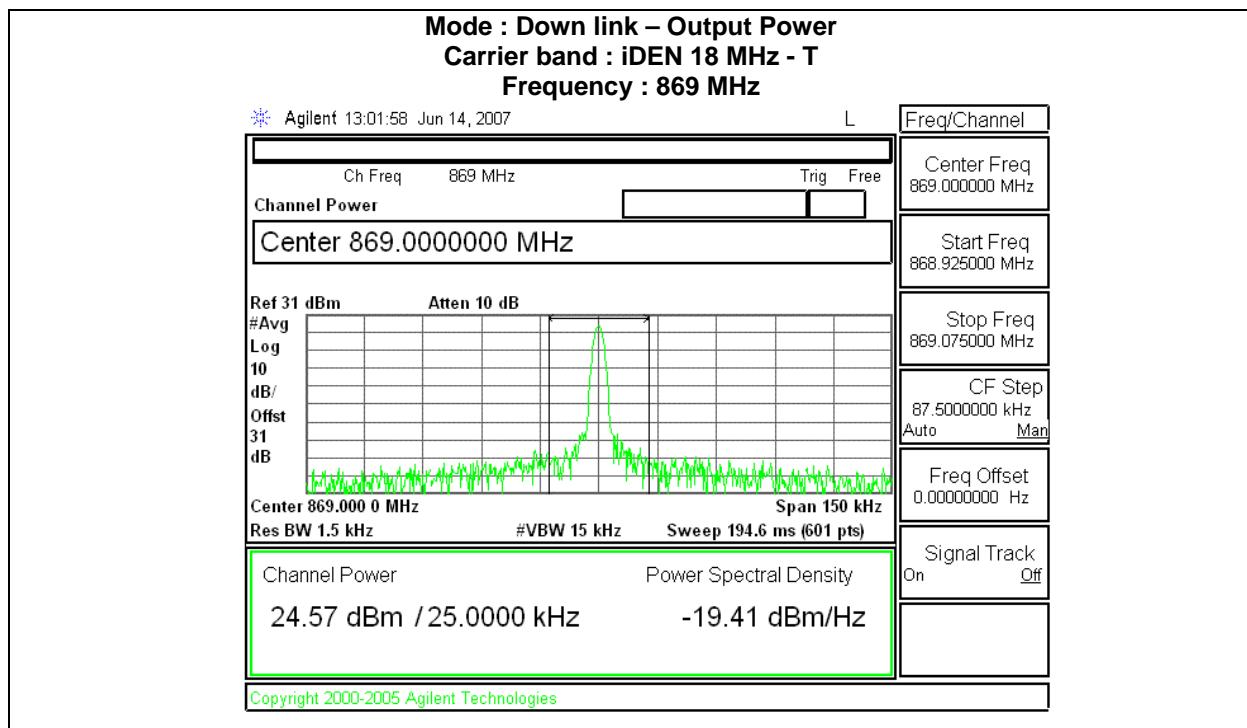


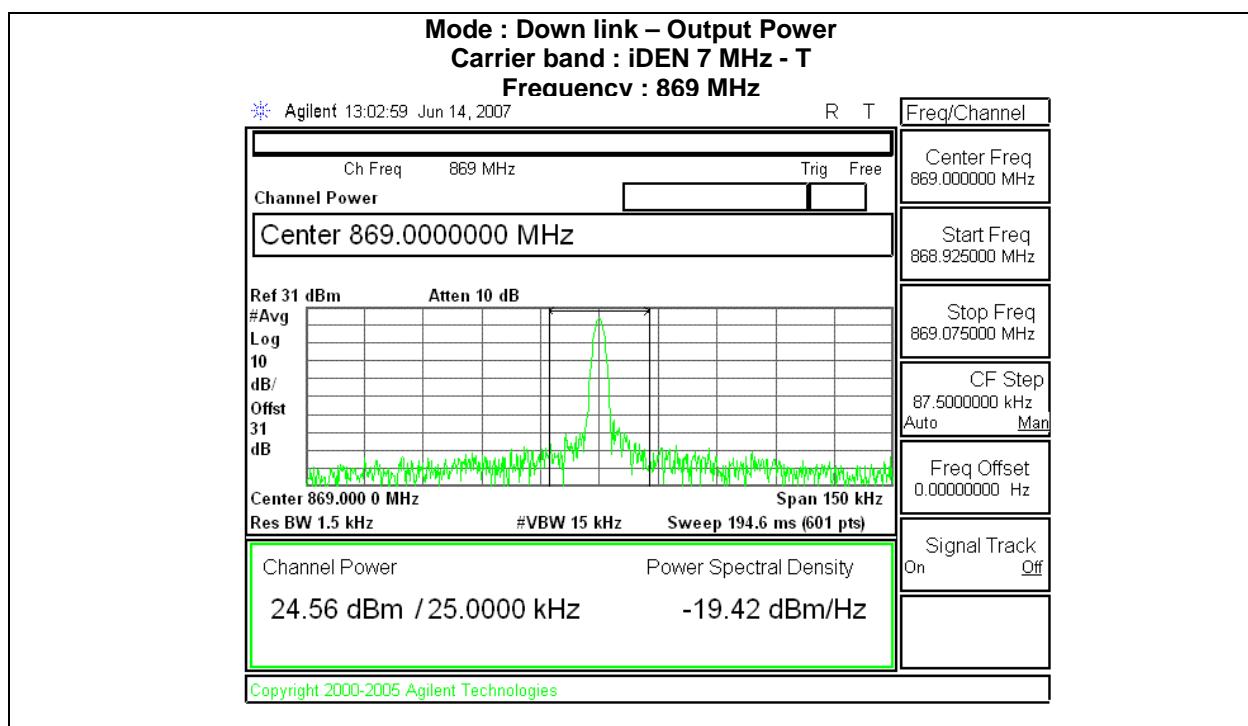
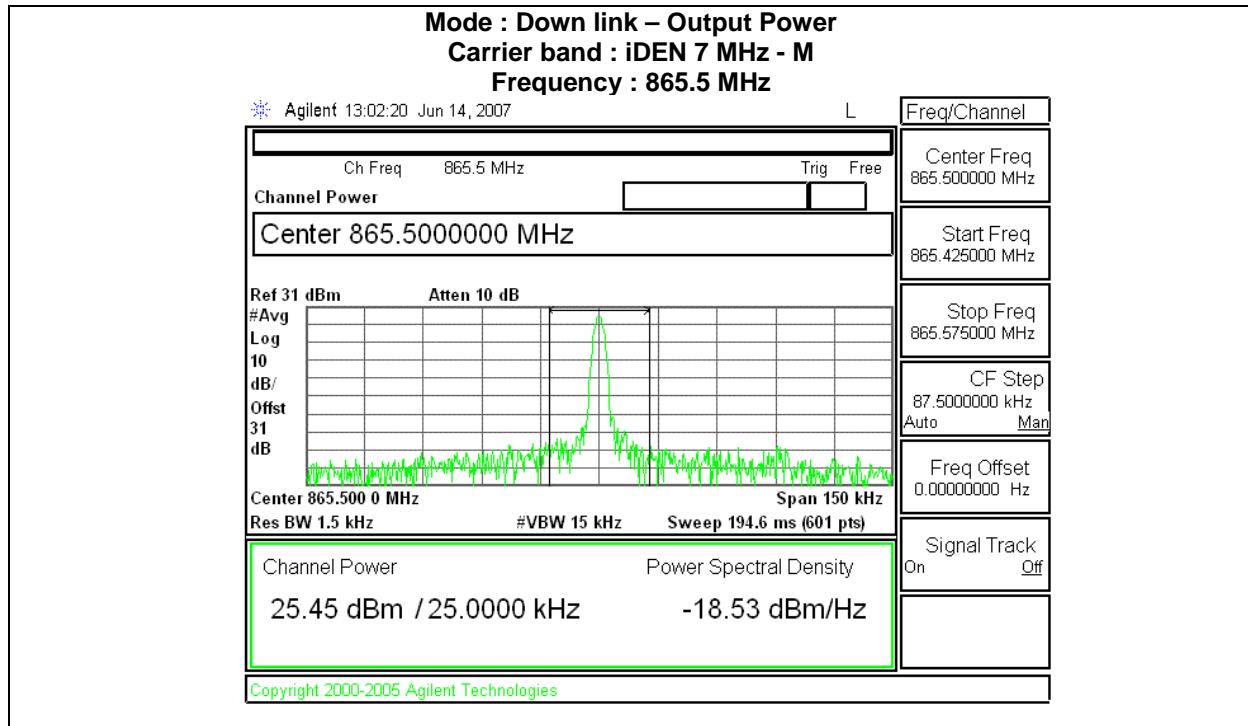


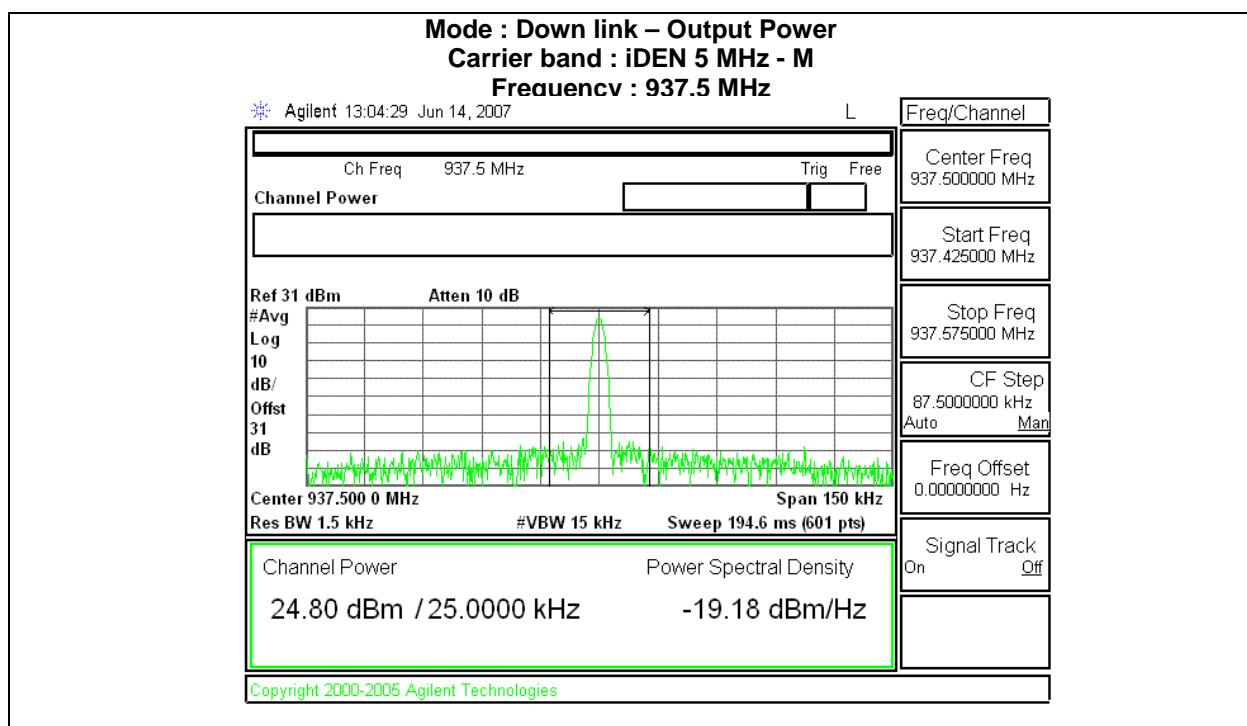
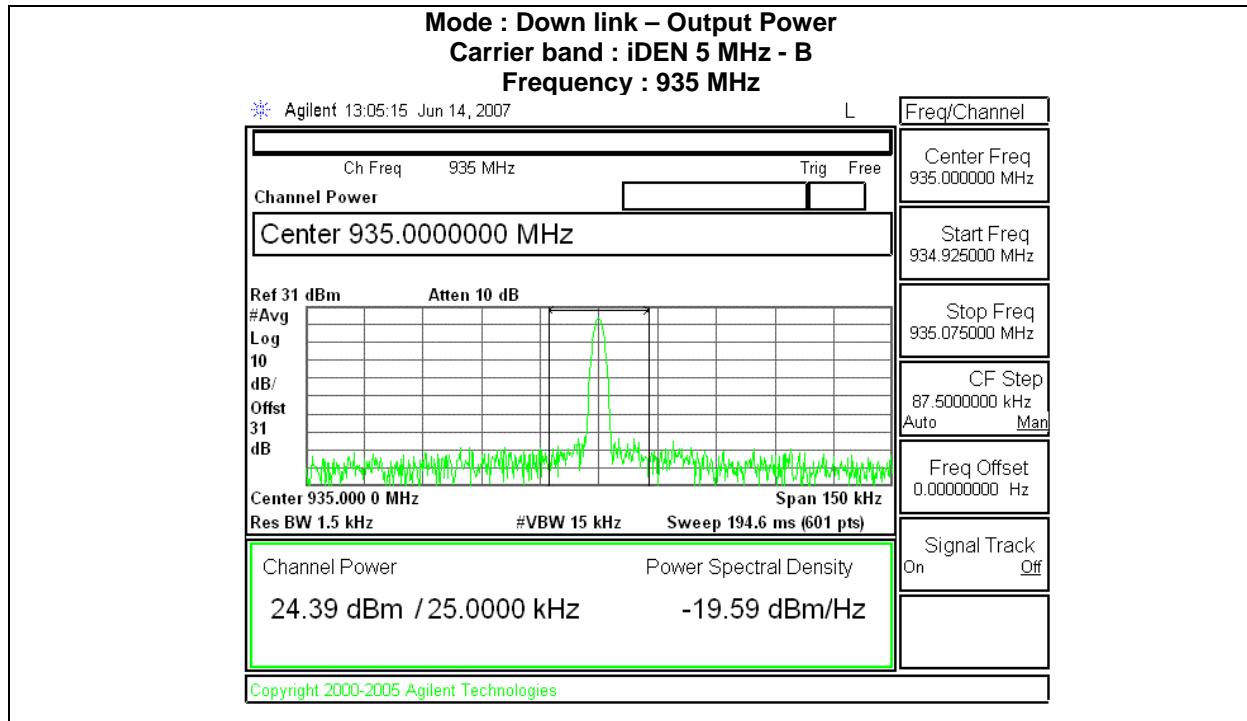


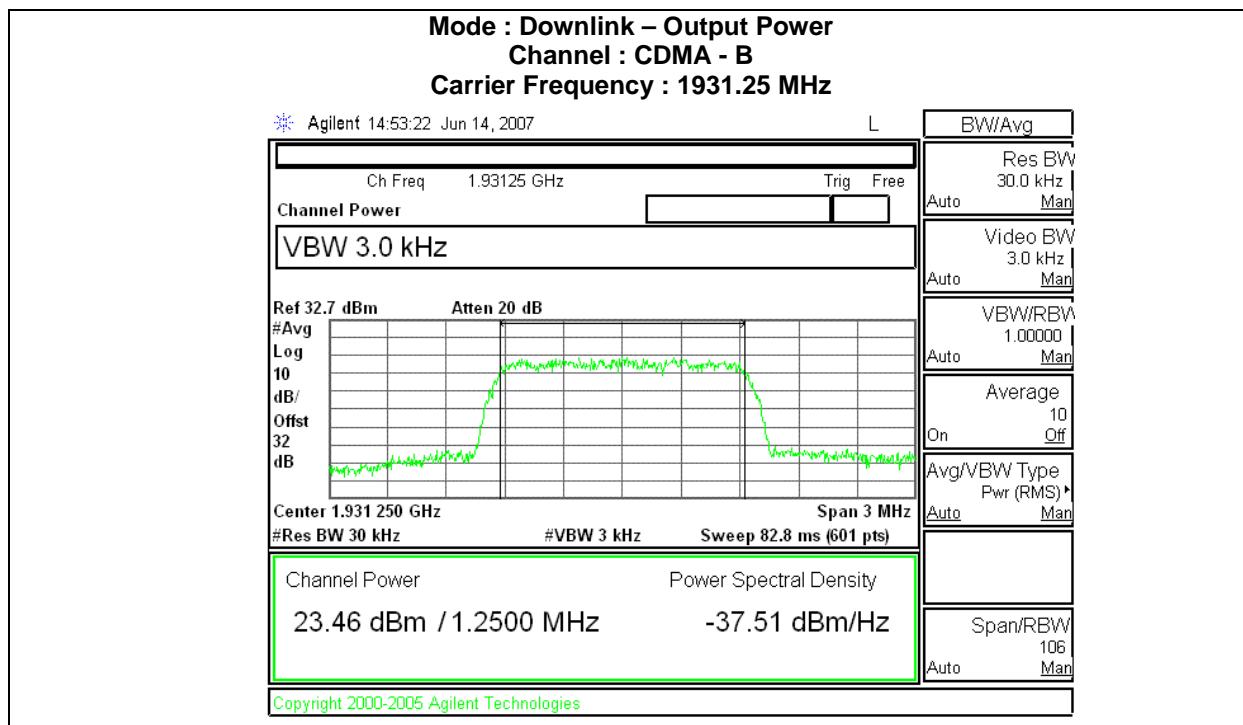
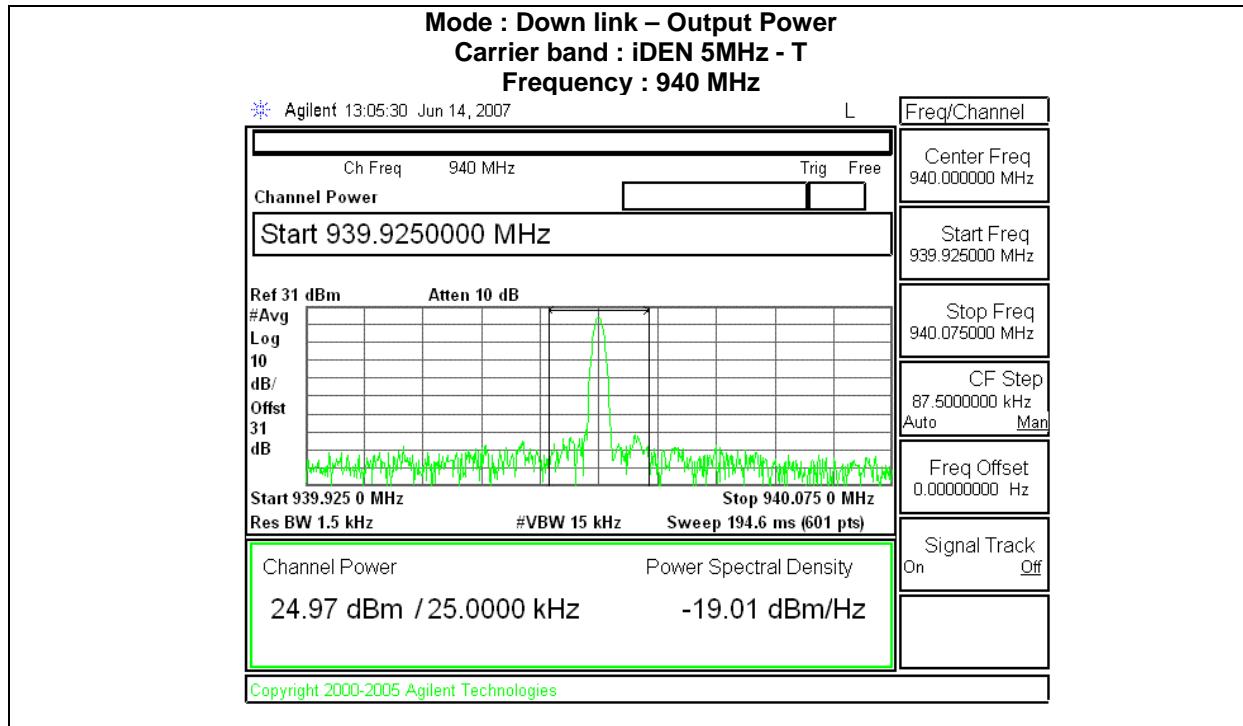


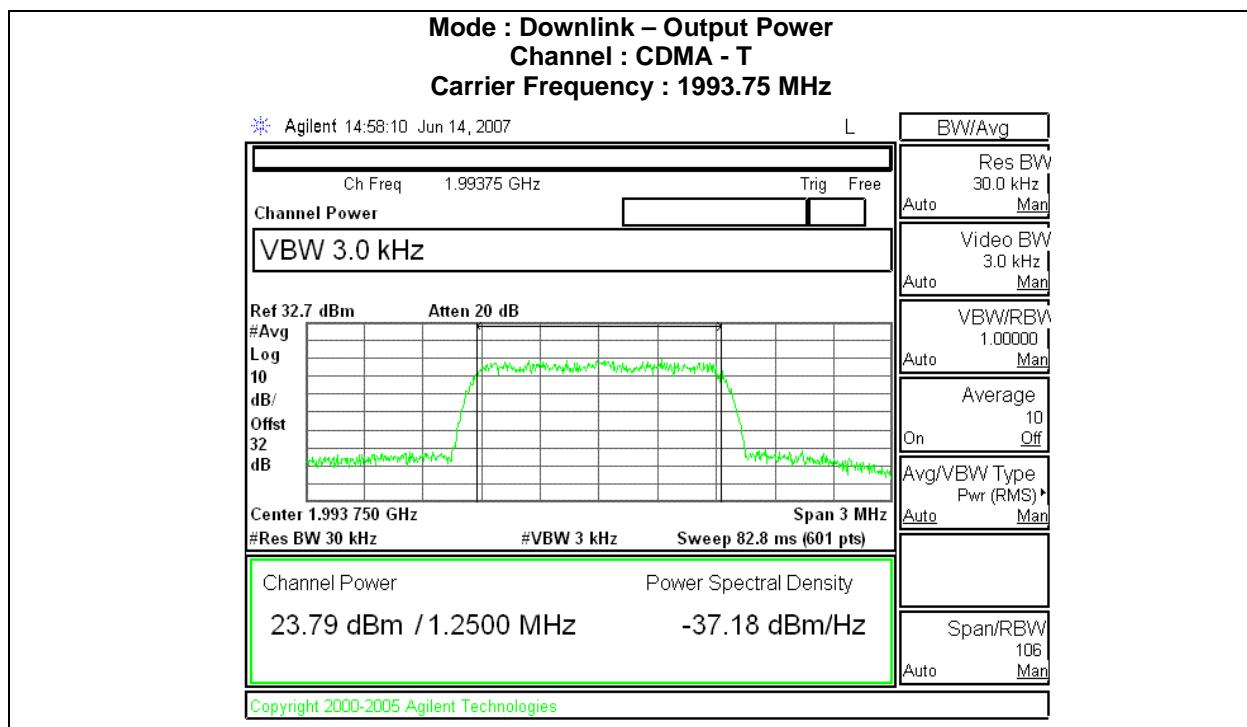
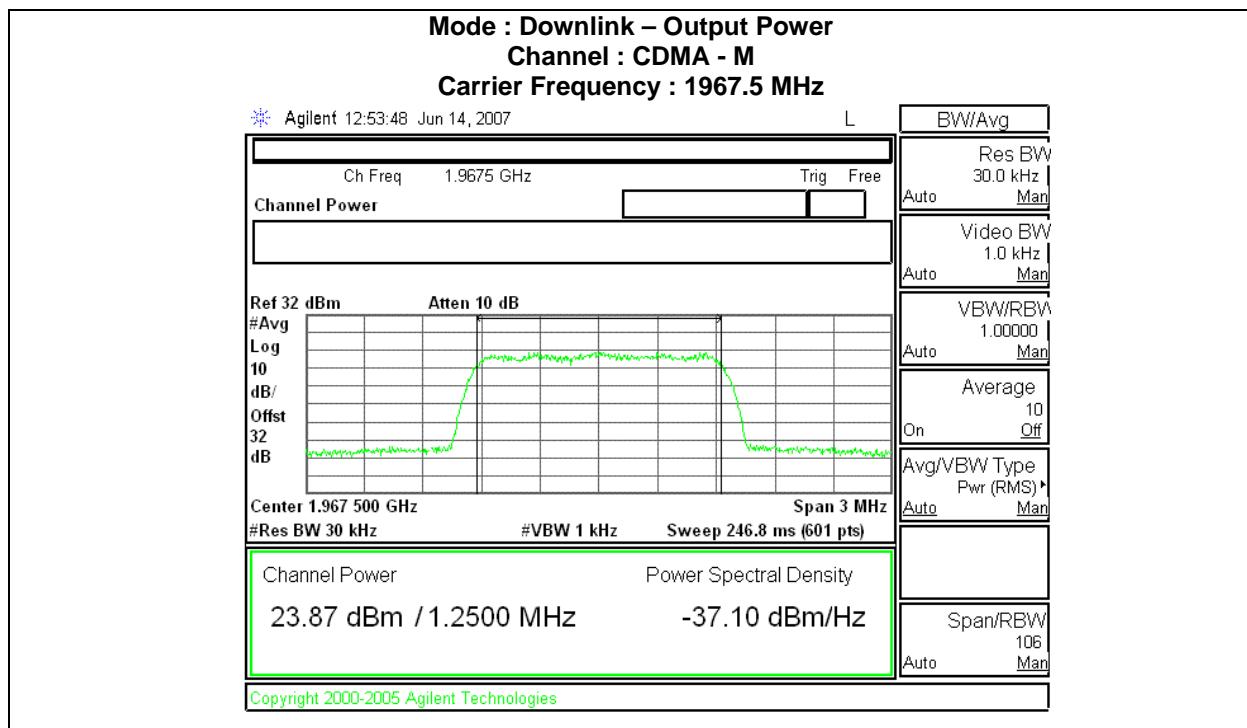


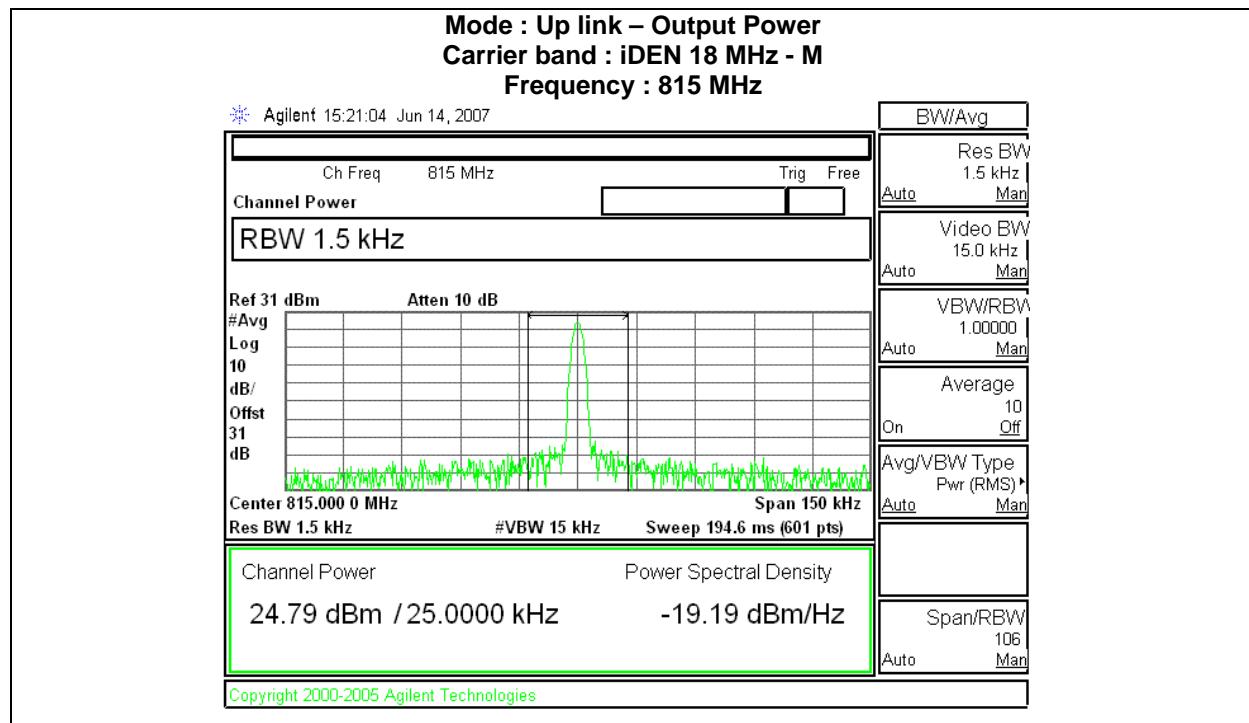
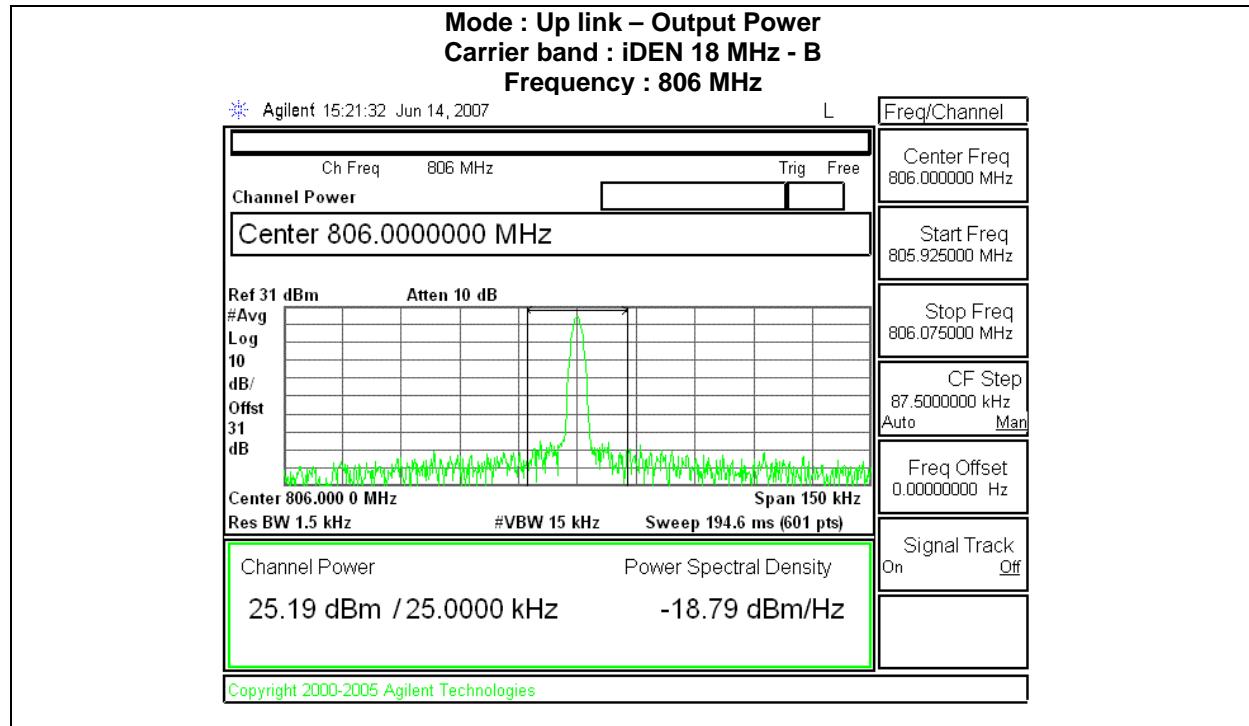


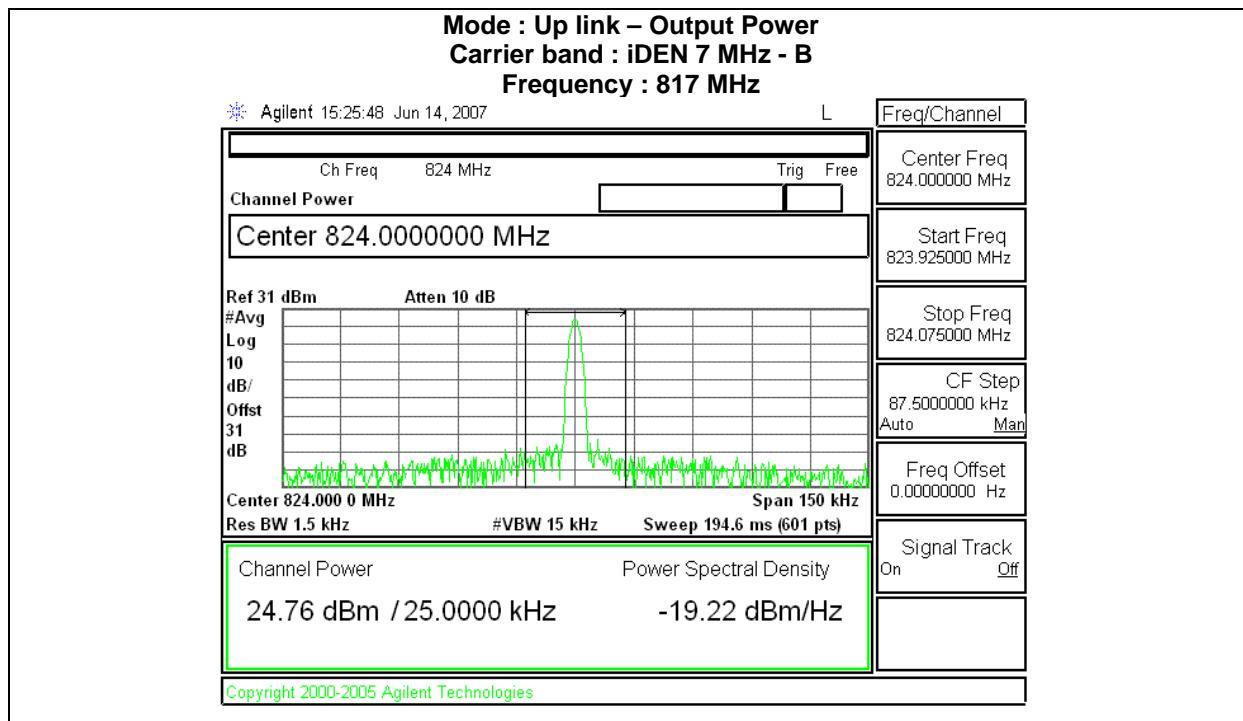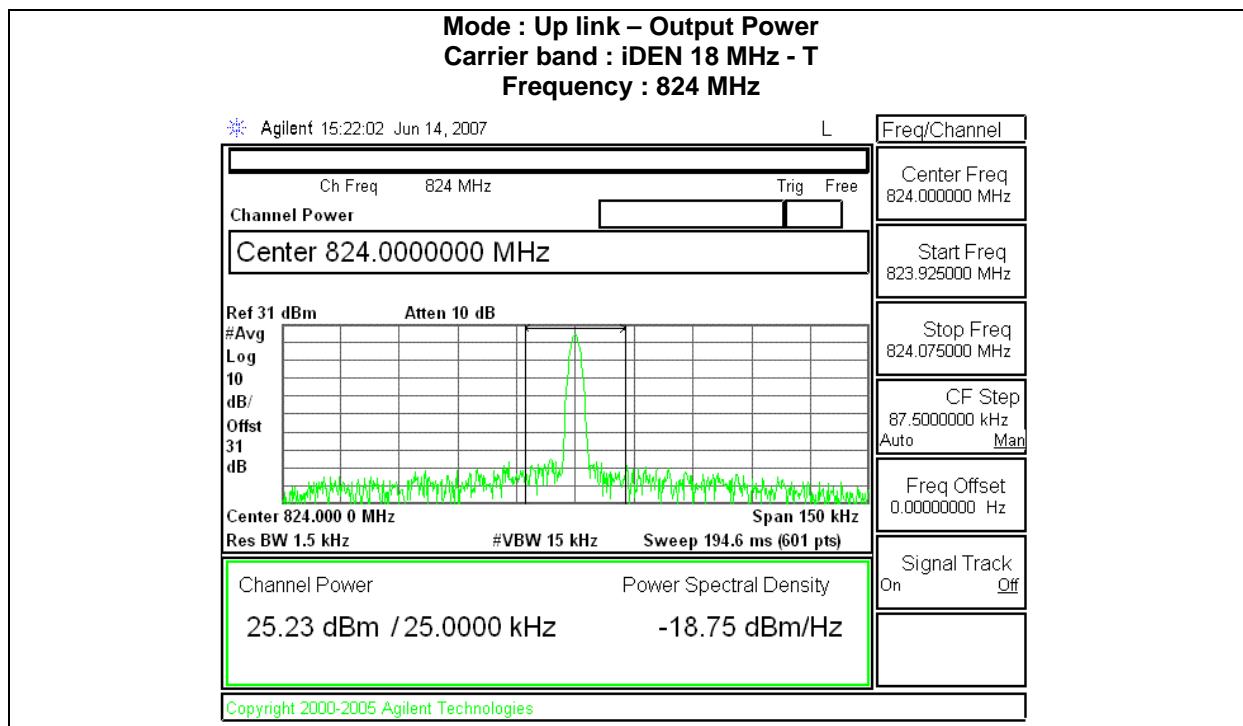

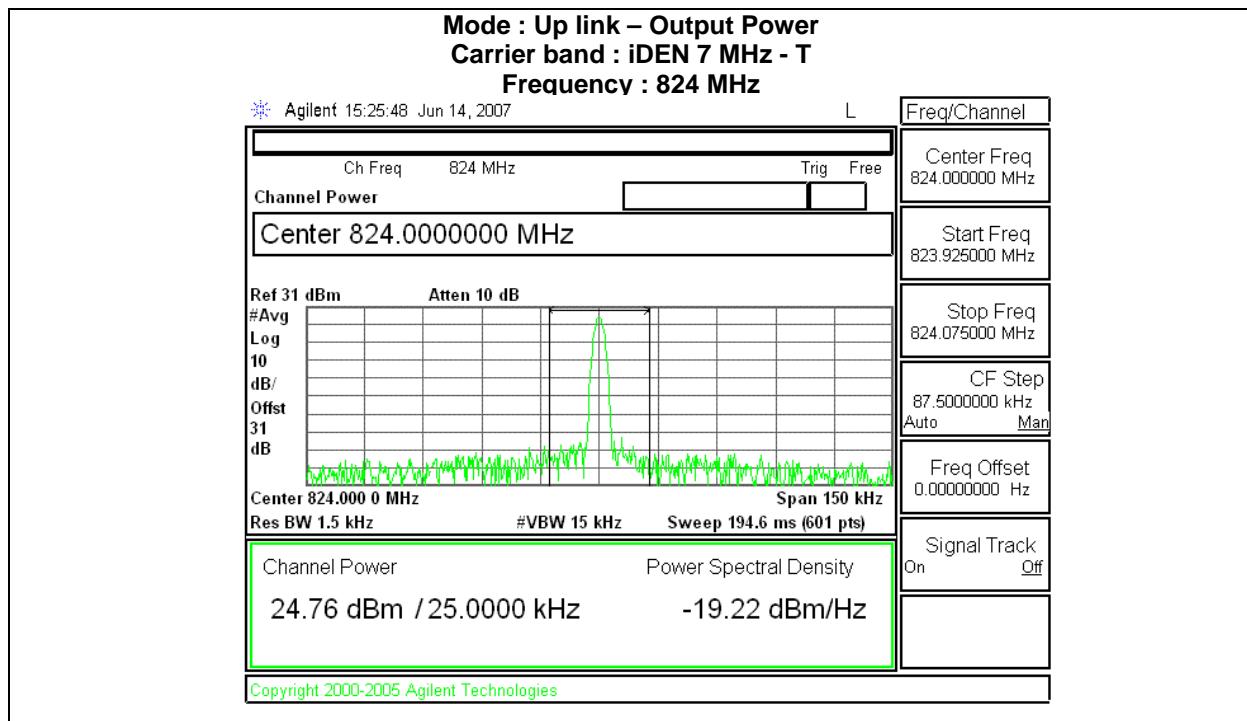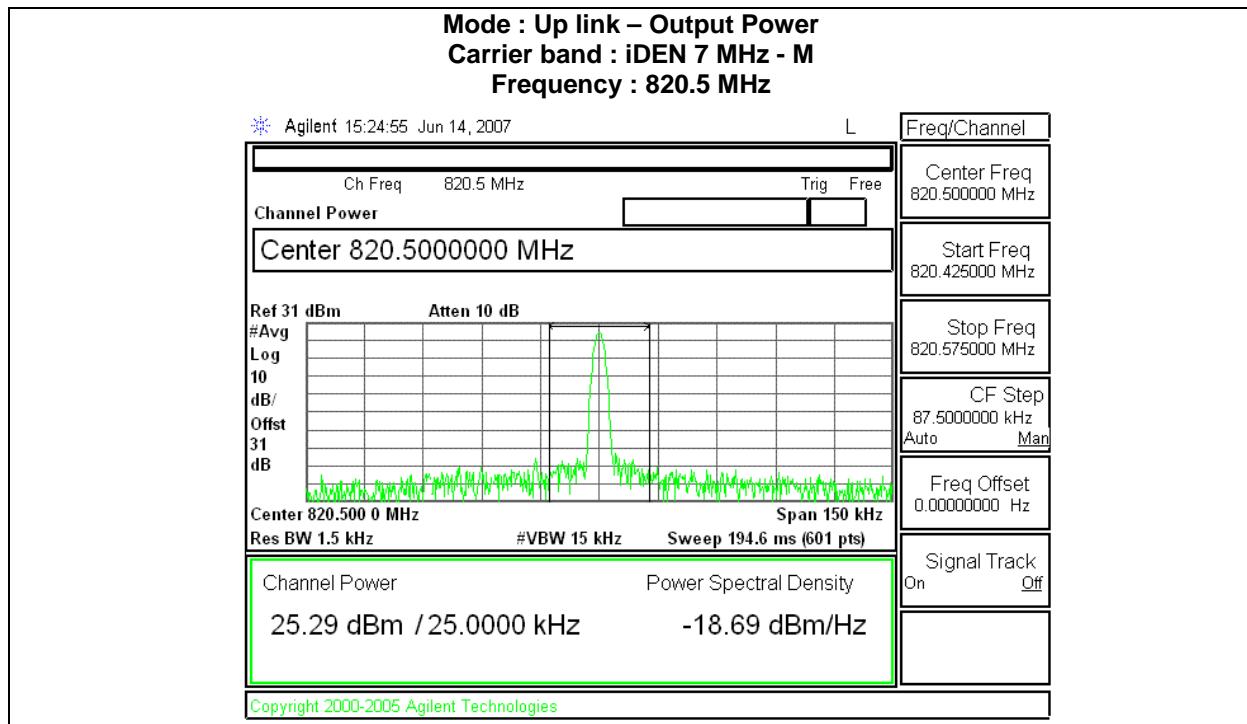

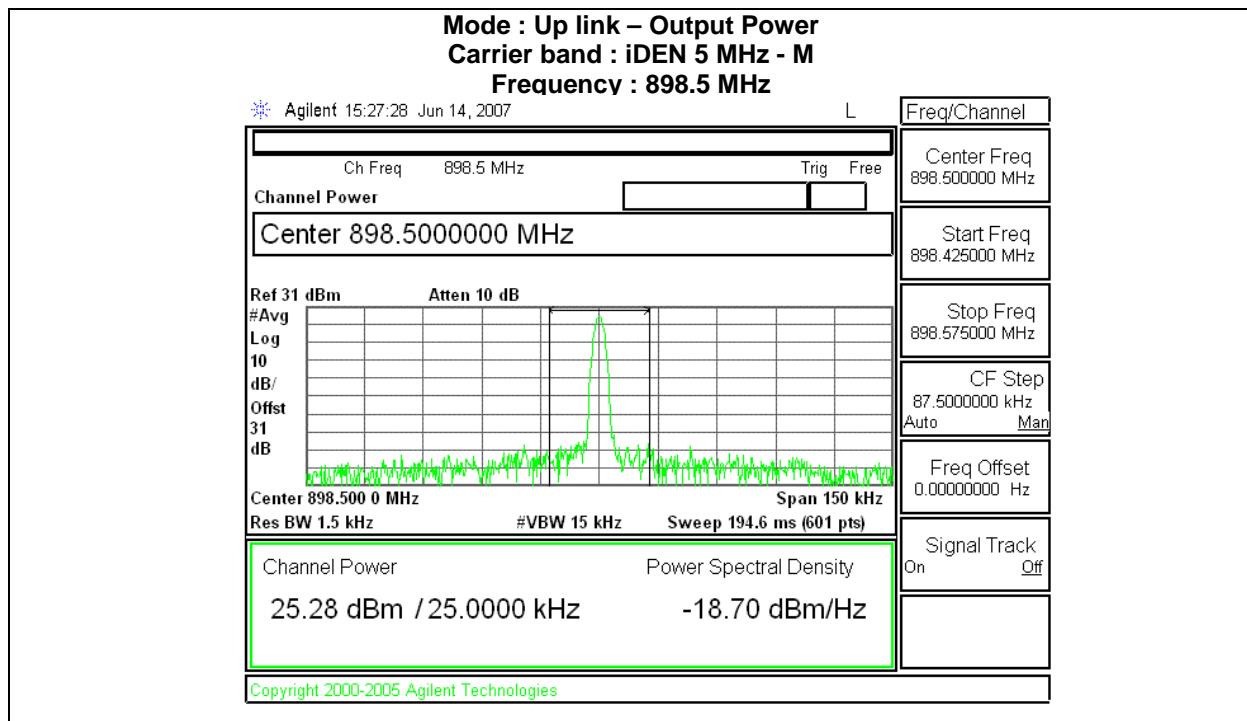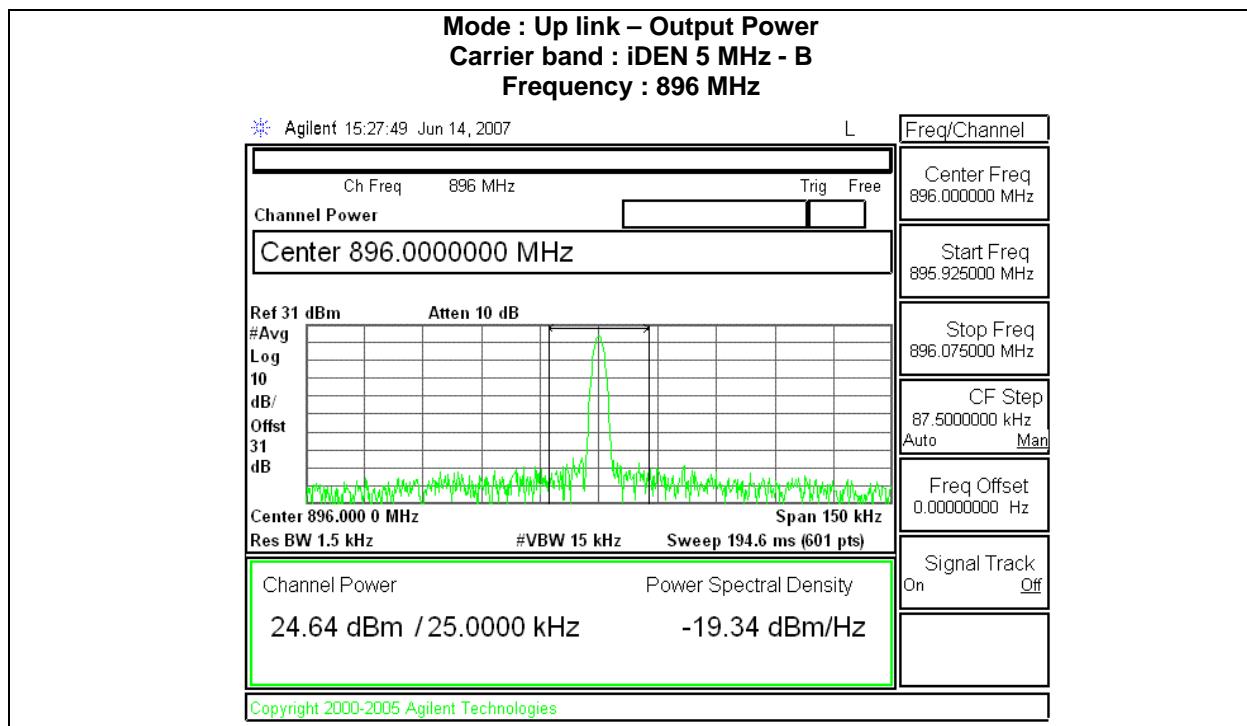

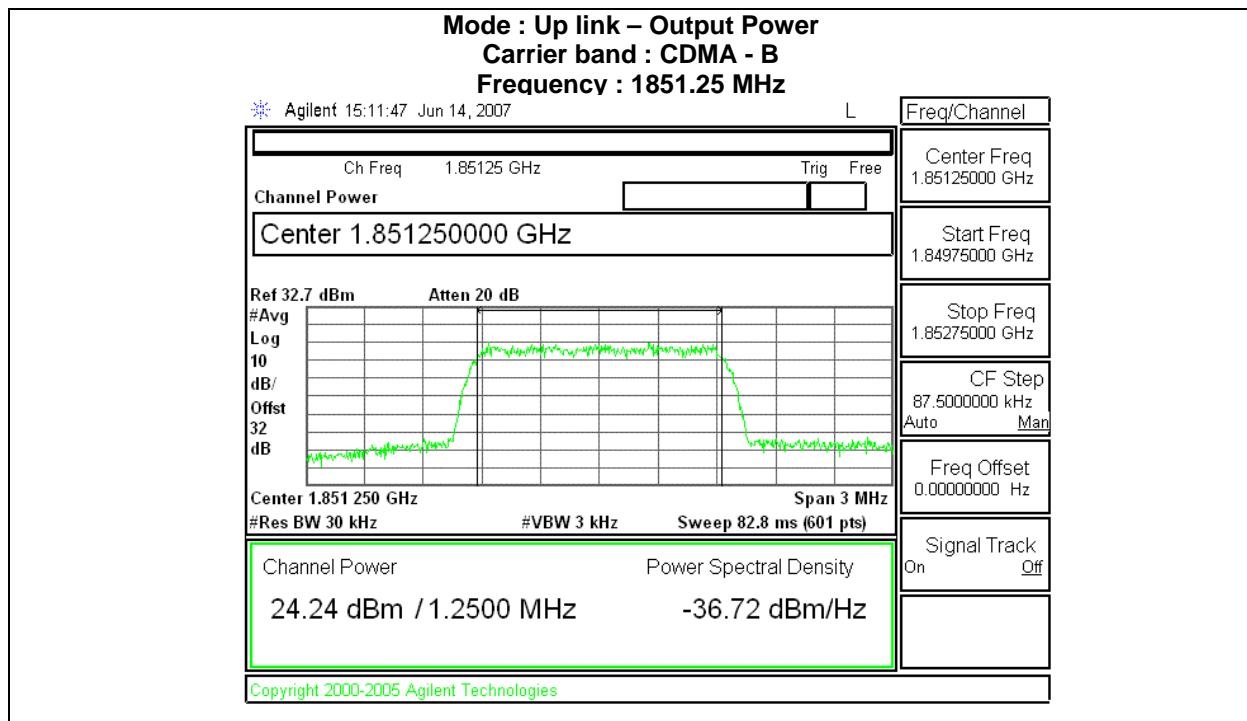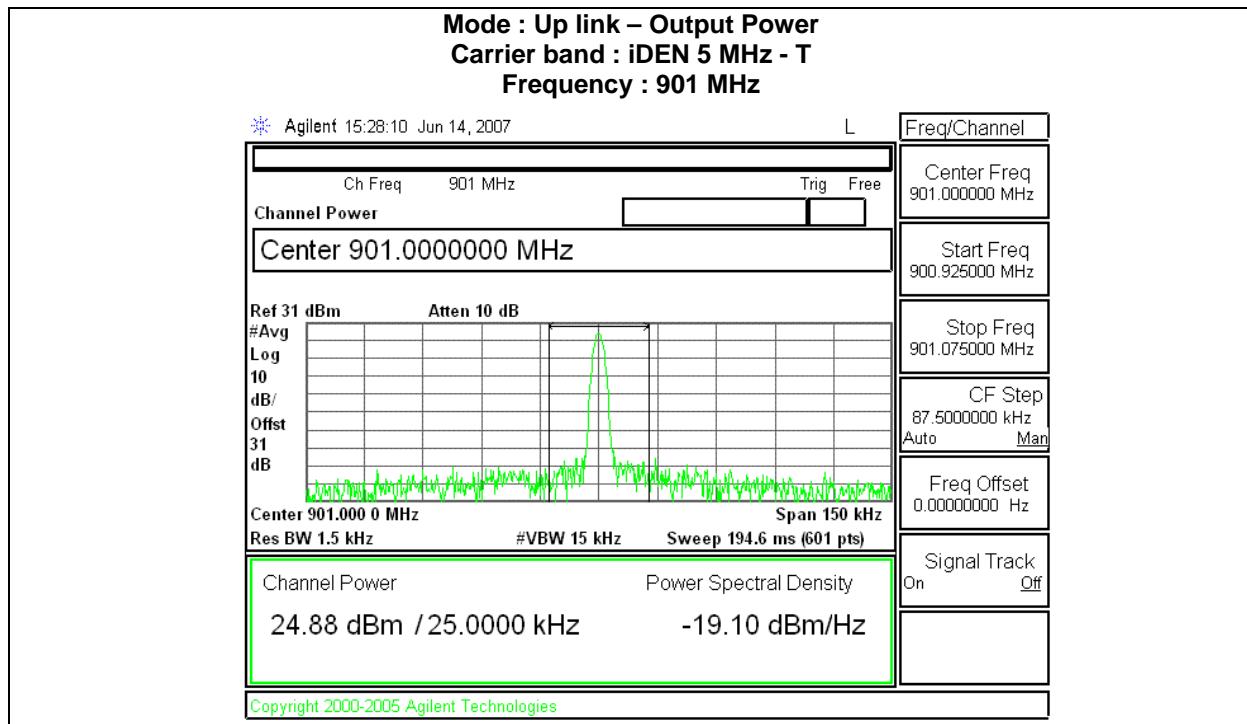

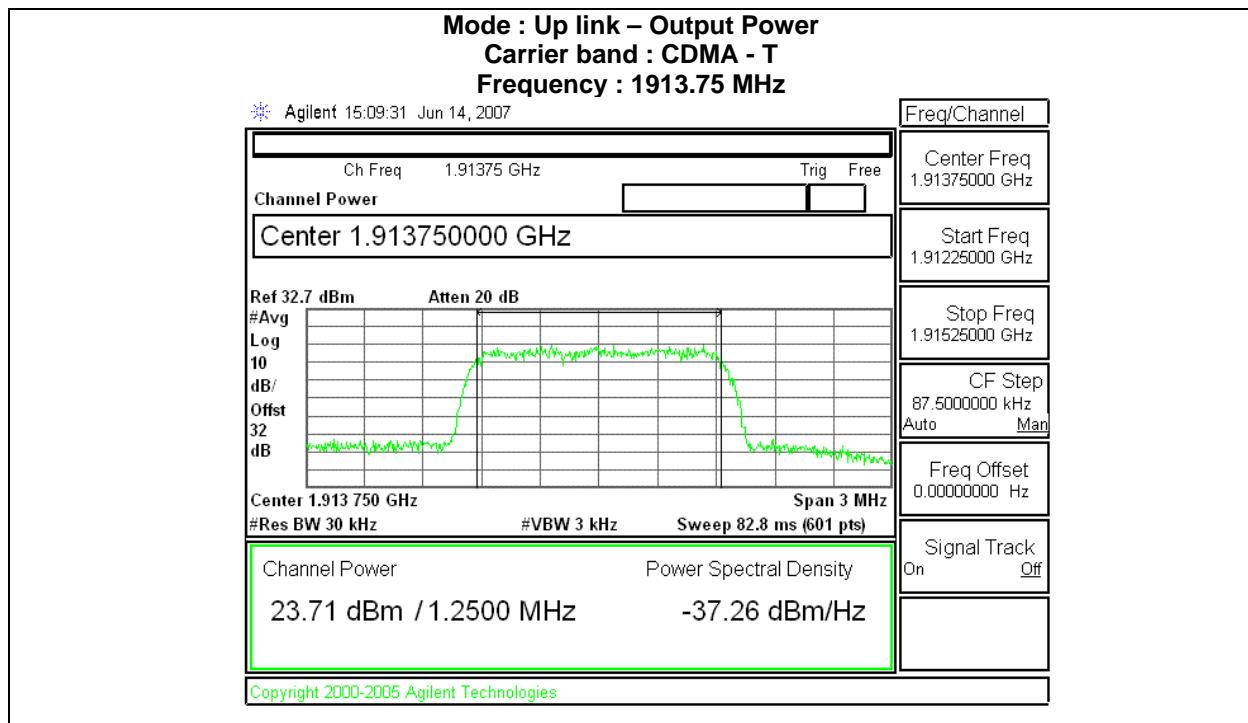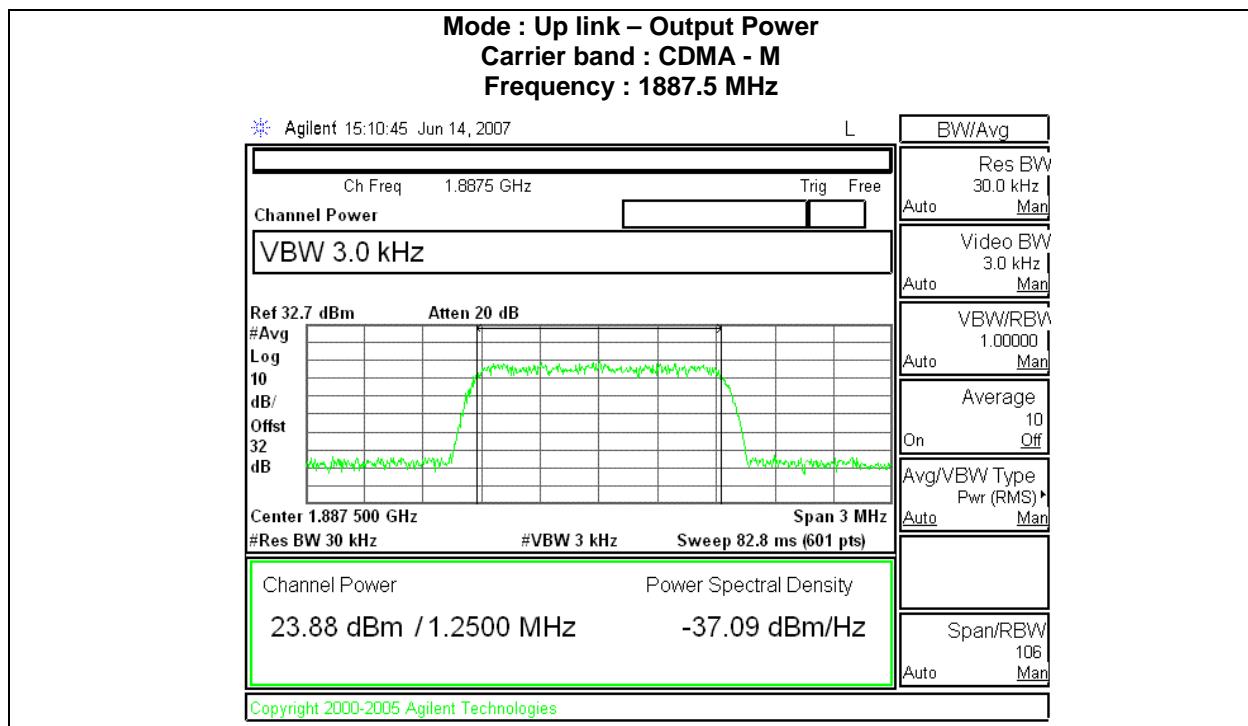

### 3.4 Test Conditions and Results – Occupied Bandwidth

Test Description	Measurements were made in the laboratory environment. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The modulated carrier signal with maximum RF level was applied to the down and up link input of the repeater and resulting output was compared against the original signal.			
Basic Standard	47 CFR § 2.1049,			
<b>Occupied Bandwidth Limits</b>				
According to the FCC 2-11-04/EAB/RF, Input and output signals were compared to verify that there was no any degradation to the signal due to amplification and conversion from the repeater using an RBW of 300 Hz or 1% of the emission bandwidth.				
Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C		
	Relative Humidity	10 to 90 %		
Parameters recorded during the test	Laboratory Ambient Temperature	23 °C		
	Relative Humidity	40 %		

#### Occupied Bandwidth Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1	3, 4	3, 4
Supplementary information: None		

#### Occupied Bandwidth Spectrum Analyzer Settings

Span (MHz)	Resolution Bandwidth (MHz)	Occupied Bandwidth Requirements	
		dBc	%
50 kHz	470 Hz	-26	99
Supplementary information: 99% bandwidth was applied.			

#### Occupied Bandwidth Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/212	2006-05-12	2007-05-12
Spectrum Analyzer	Agilent	E4440A	MY44022474	2006-11-06	2007-11-06
Fixed Attenuator	H.P	8498A	3318A10568		

**Table 4 Occupied Bandwidth measured results**


Carrier Band	UP LINK Bandwidth (kHz)		
	Frequency (MHz)	Input channel	Output channel
iDEN 18 MHz	806	17.67	17.64
	815	17.56	17.61
	824	17.74	17.77
iDEN 7 MHz	817	17.60	17.62
	820.5	17.32	17.49
	824	17.74	17.74
iDEN 5 MHz	896	17.62	17.69
	898.5	17.82	17.70
	901	17.63	17.72
CDMA	1851.25	1.26	1.28
	1887.50	1.26	1.27
	1913.75	1.27	1.28

Supplementary information: Modulation signal 16-QAM/ CDMA, 99% bandwidth


Carrier Band	DOWN LINK Bandwidth (kHz)		
	Frequency (MHz)	Input channel	Output channel
iDEN 18 MHz	851	17.81	17.46
	860	17.67	17.19
	869	17.54	17.60
iDEN 7 MHz	862	17.50	17.06
	865.5	17.87	17.60
	869	17.54	17.96
iDEN 5 MHz	935	17.31	17.39
	937.5	17.50	17.46
	940	17.72	17.21
CDMA	1931.25	1.27	1.27
	1967.50	1.27	1.27
	1993.75	1.27	1.28

Supplementary information: Modulation signal 16-QAM/CDMA, 99% bandwidth


**Figure 5 Occupied Bandwidth Graph**

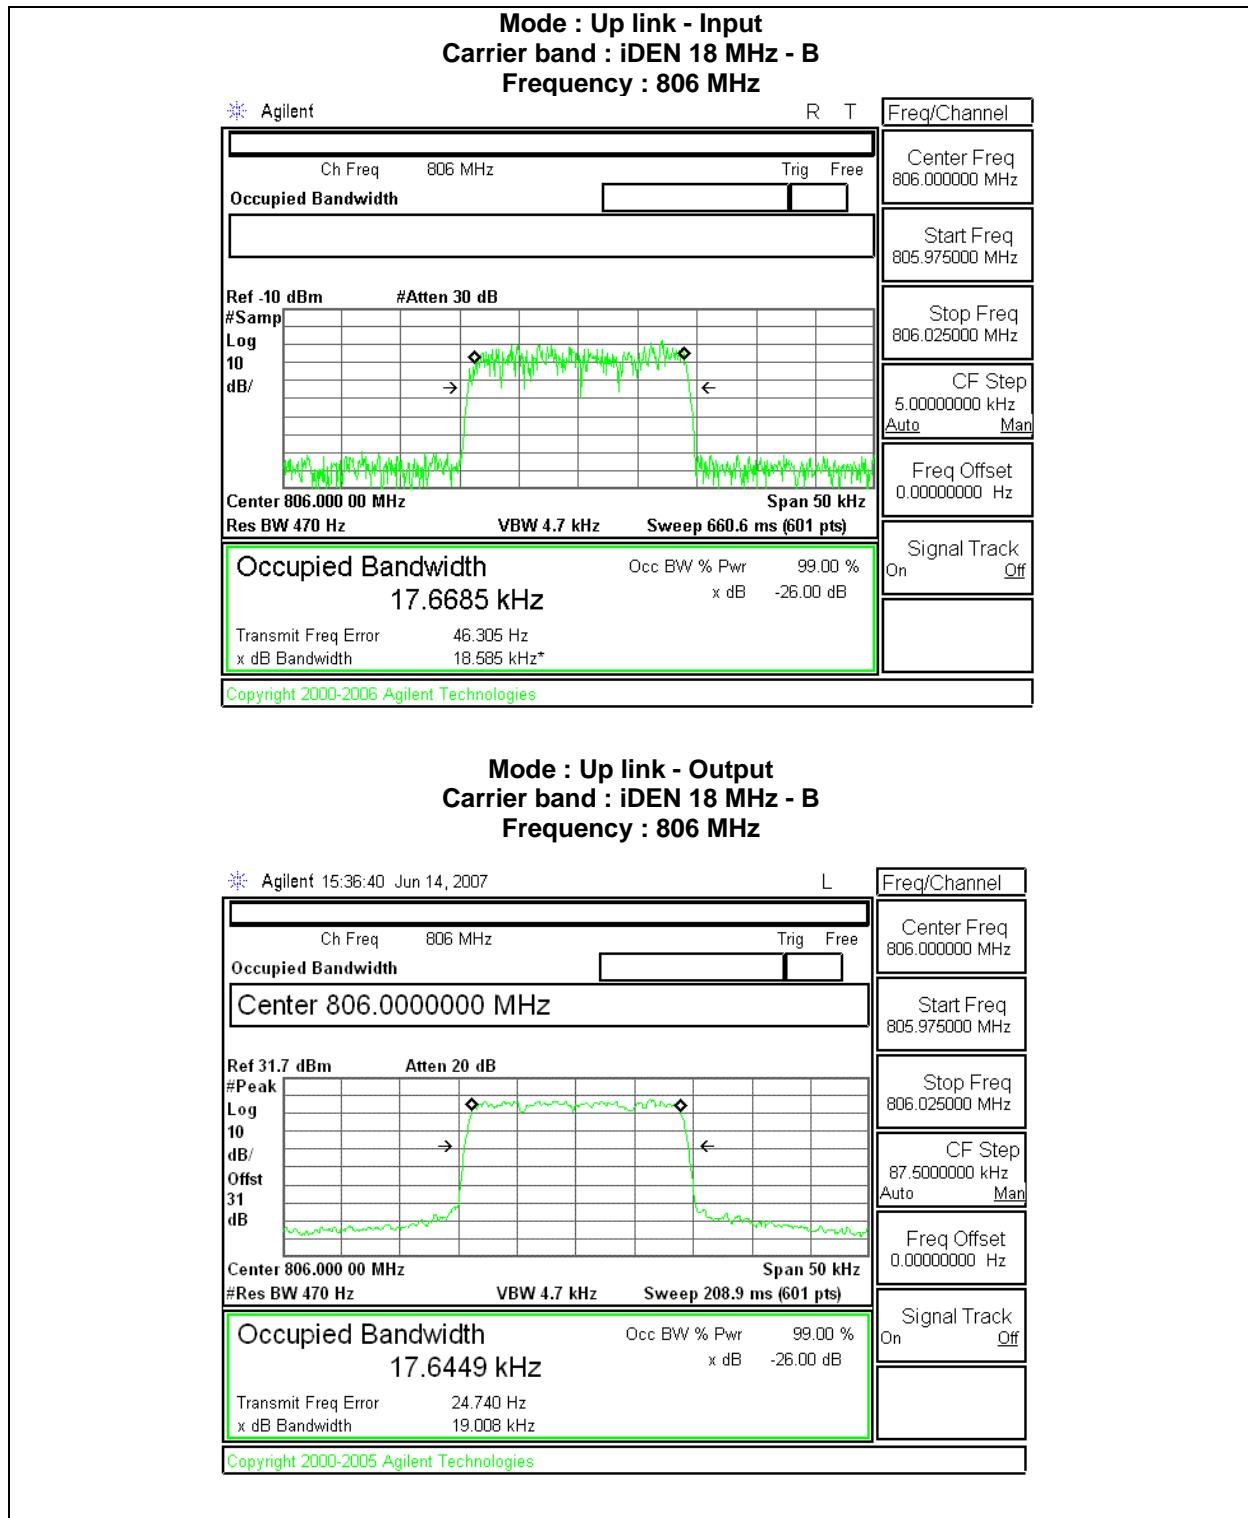


**Mode : Up link - Input  
Carrier band : iDEN 18 MHz - M  
Frequency : 815 MHz**

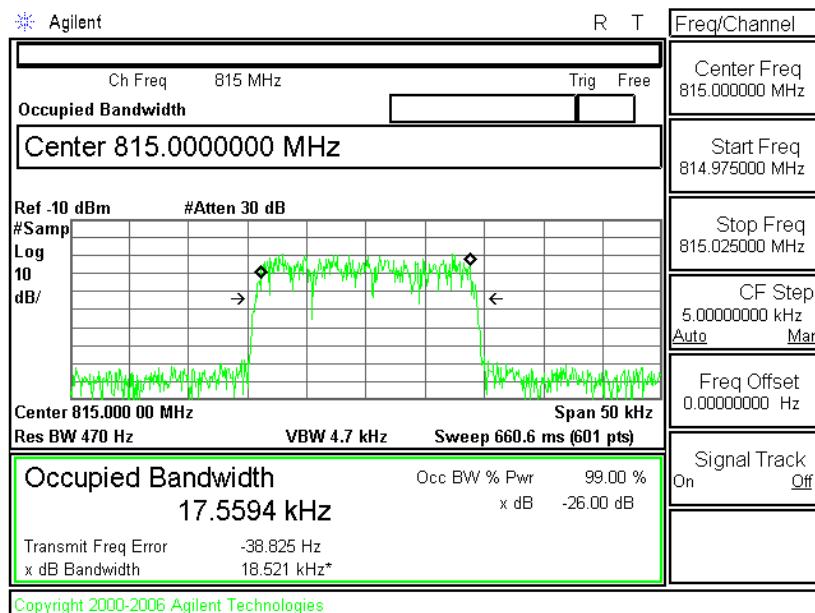


**Mode : Up link - Output  
Carrier band : iDEN 18 MHz - M  
Frequency : 815 MHz**

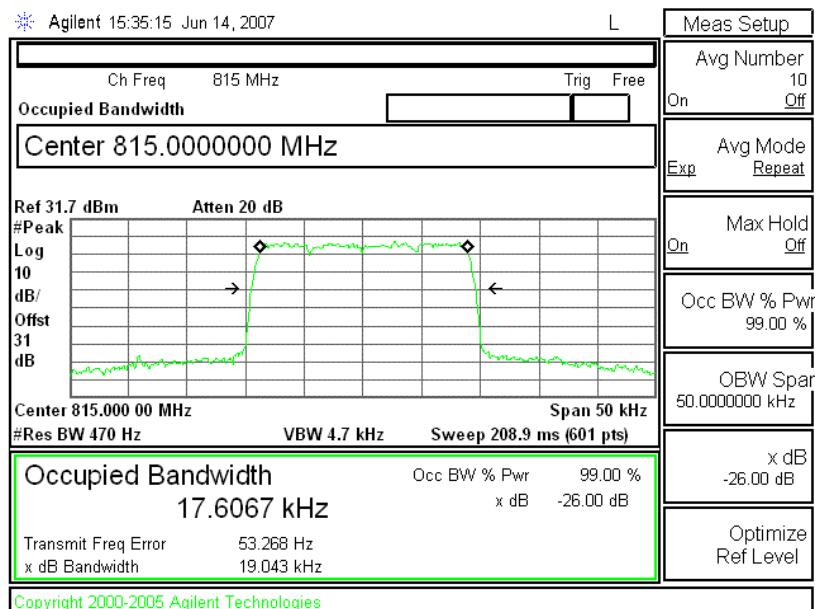


**Mode : Up link - Input  
Carrier band : iDEN 18 MHz - T  
Frequency : 824 MHz**

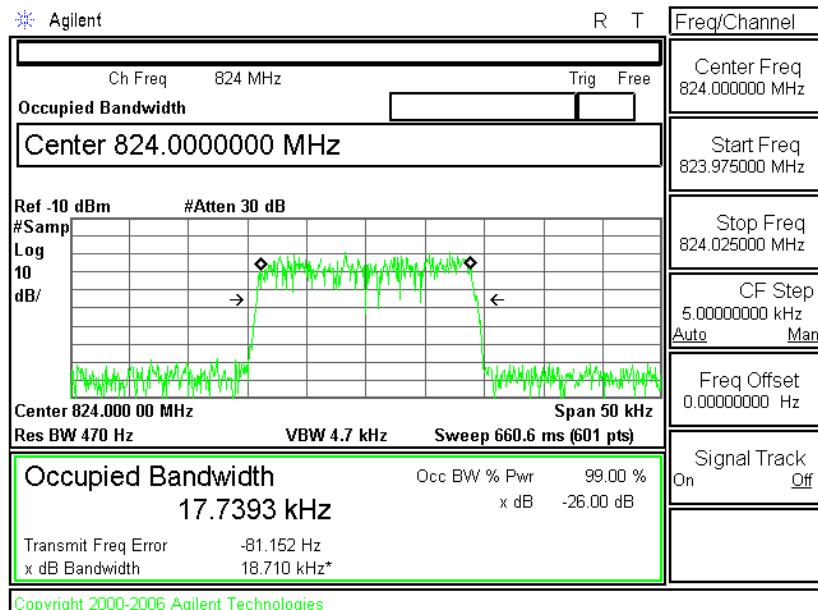


**Mode : Up link - Output  
Carrier band : iDEN 18 MHz  
Frequency : 824 MHz**

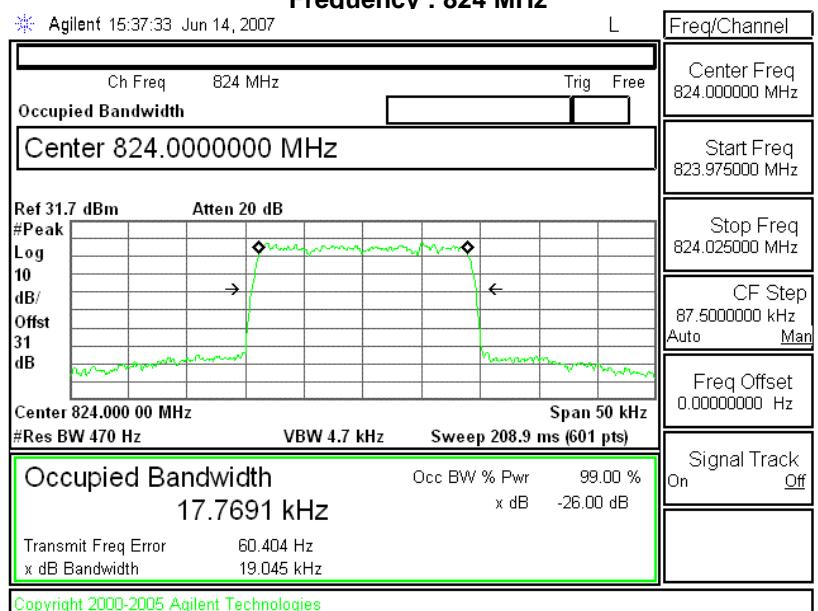


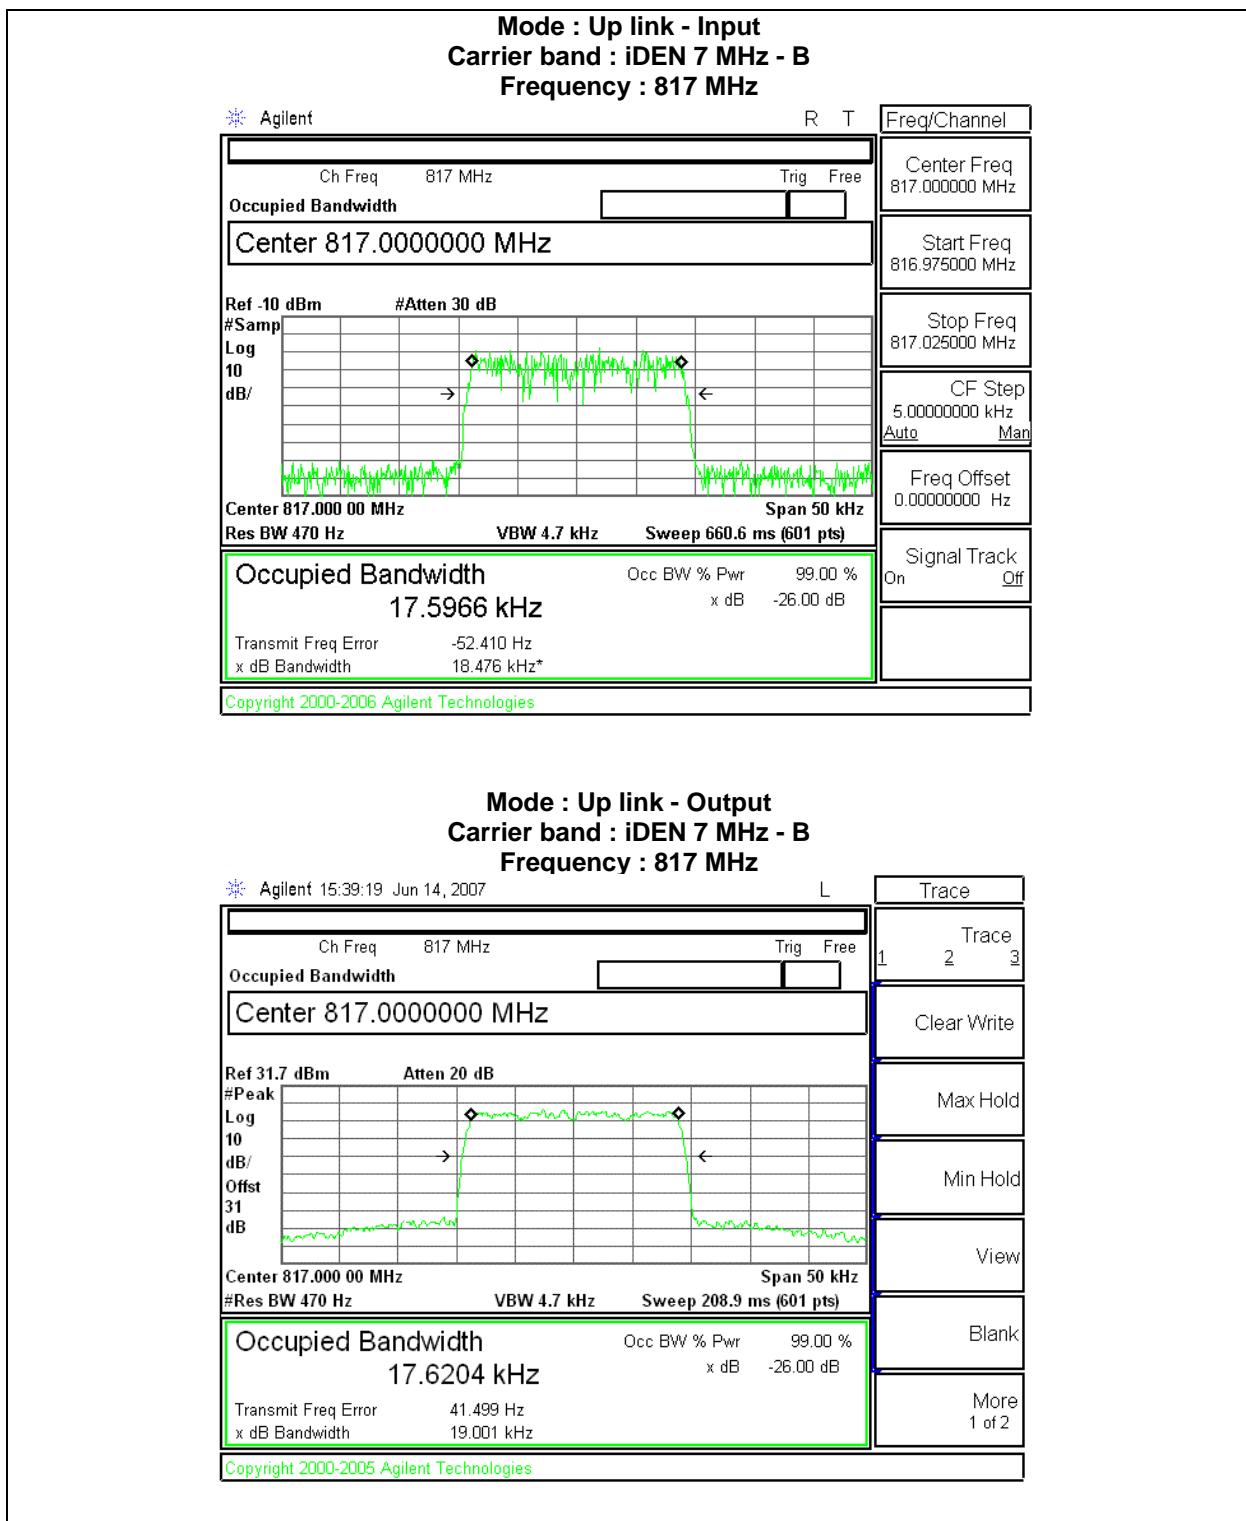


**Mode : Up link - Input**  
**Carrier band : iDEN 7 MHz - M**  
**Frequency : 820.5 MHz**

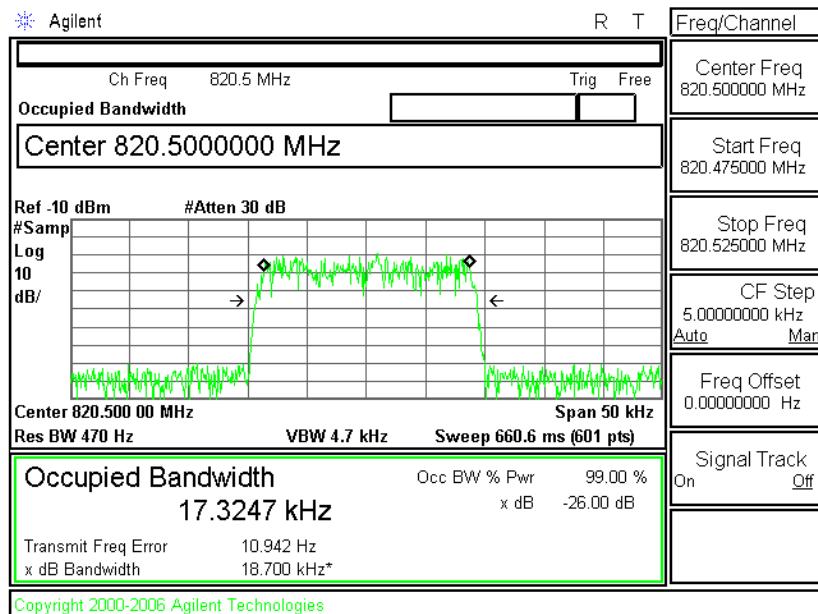


**Mode : Up link - Output**  
**Carrier band : iDEN 7 MHz - M**  
**Frequency : 820.5 MHz**

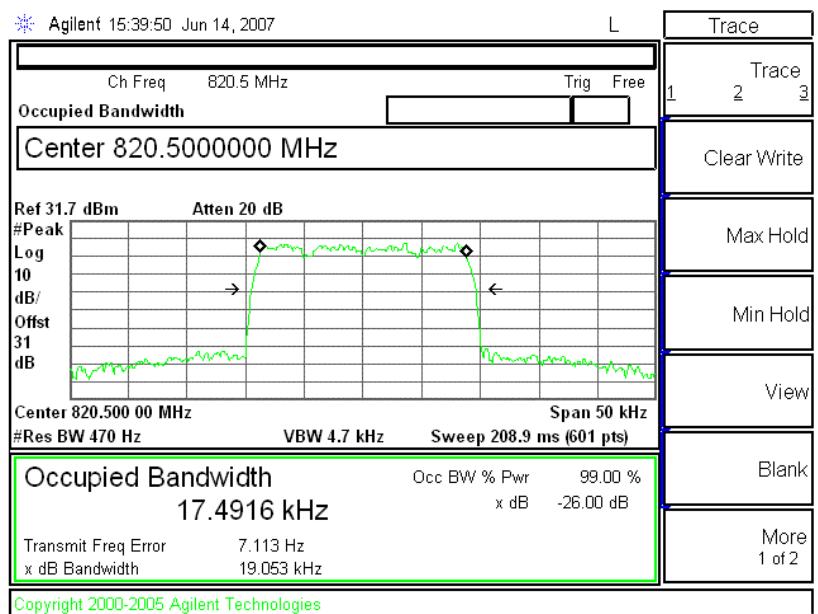


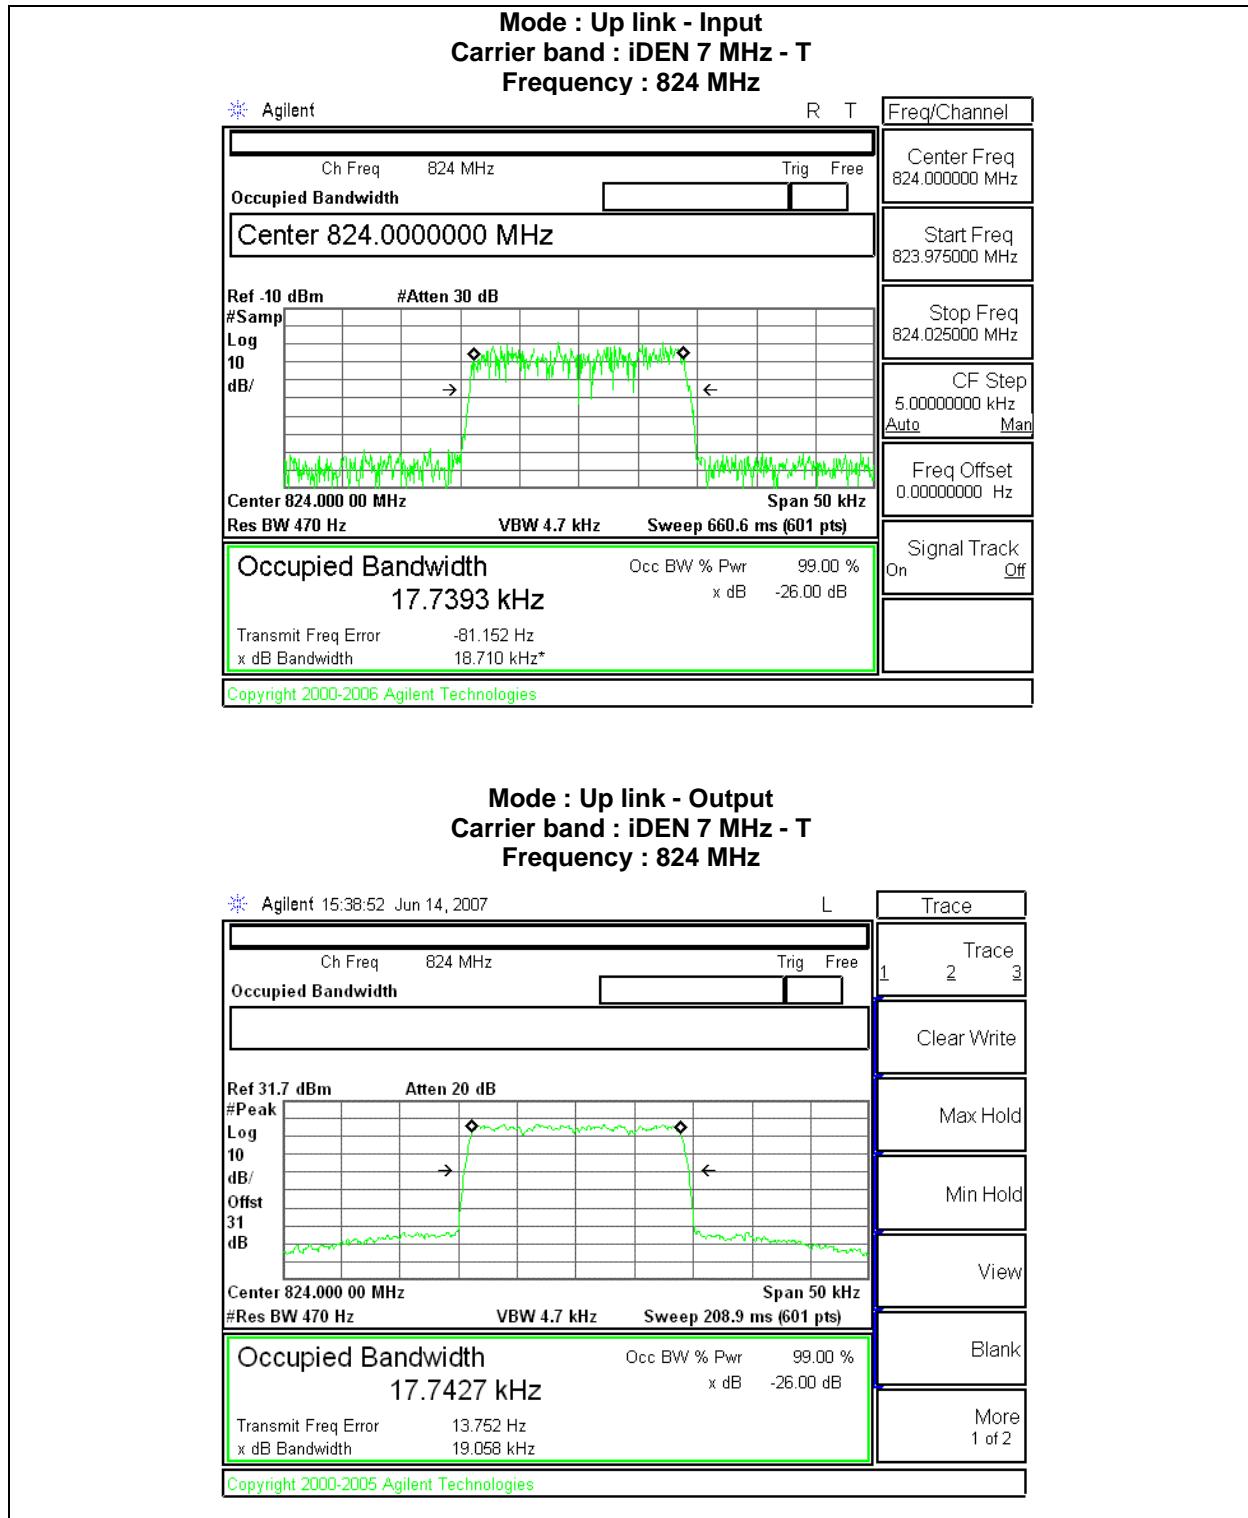



**Mode : Up link - Input**  
**Carrier band : iDEN 5 MHz - B**  
**Frequency : 896 MHz**

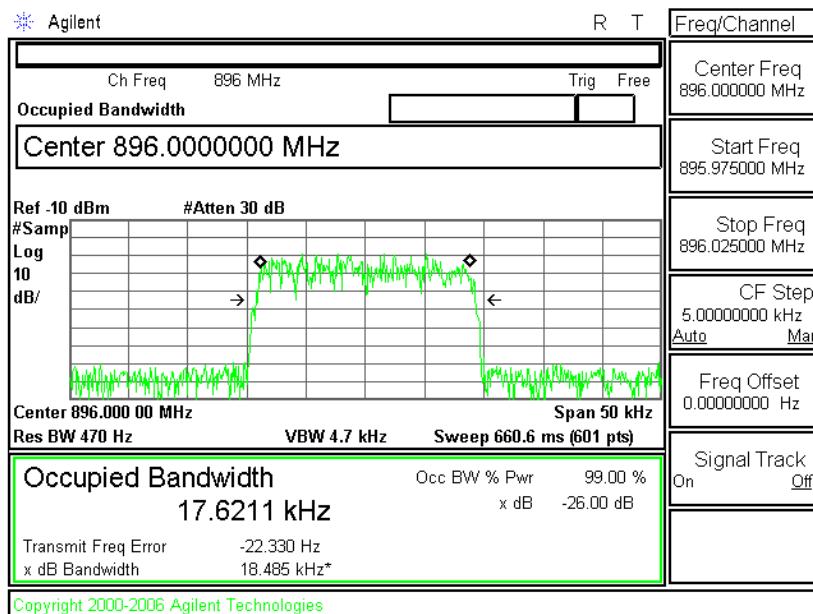



**Mode : Up link - Output**  
**Carrier band : iDEN 5 MHz - B**  
**Frequency : 896 MHz**

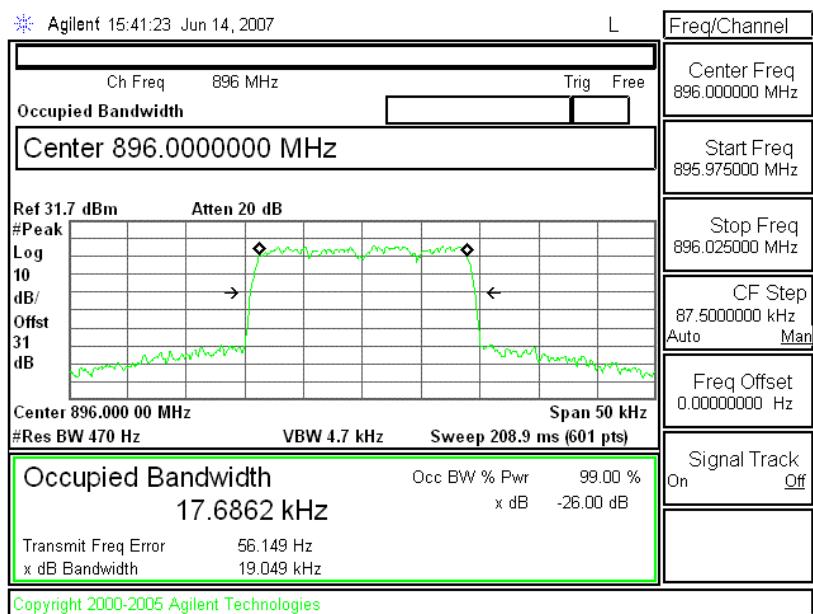



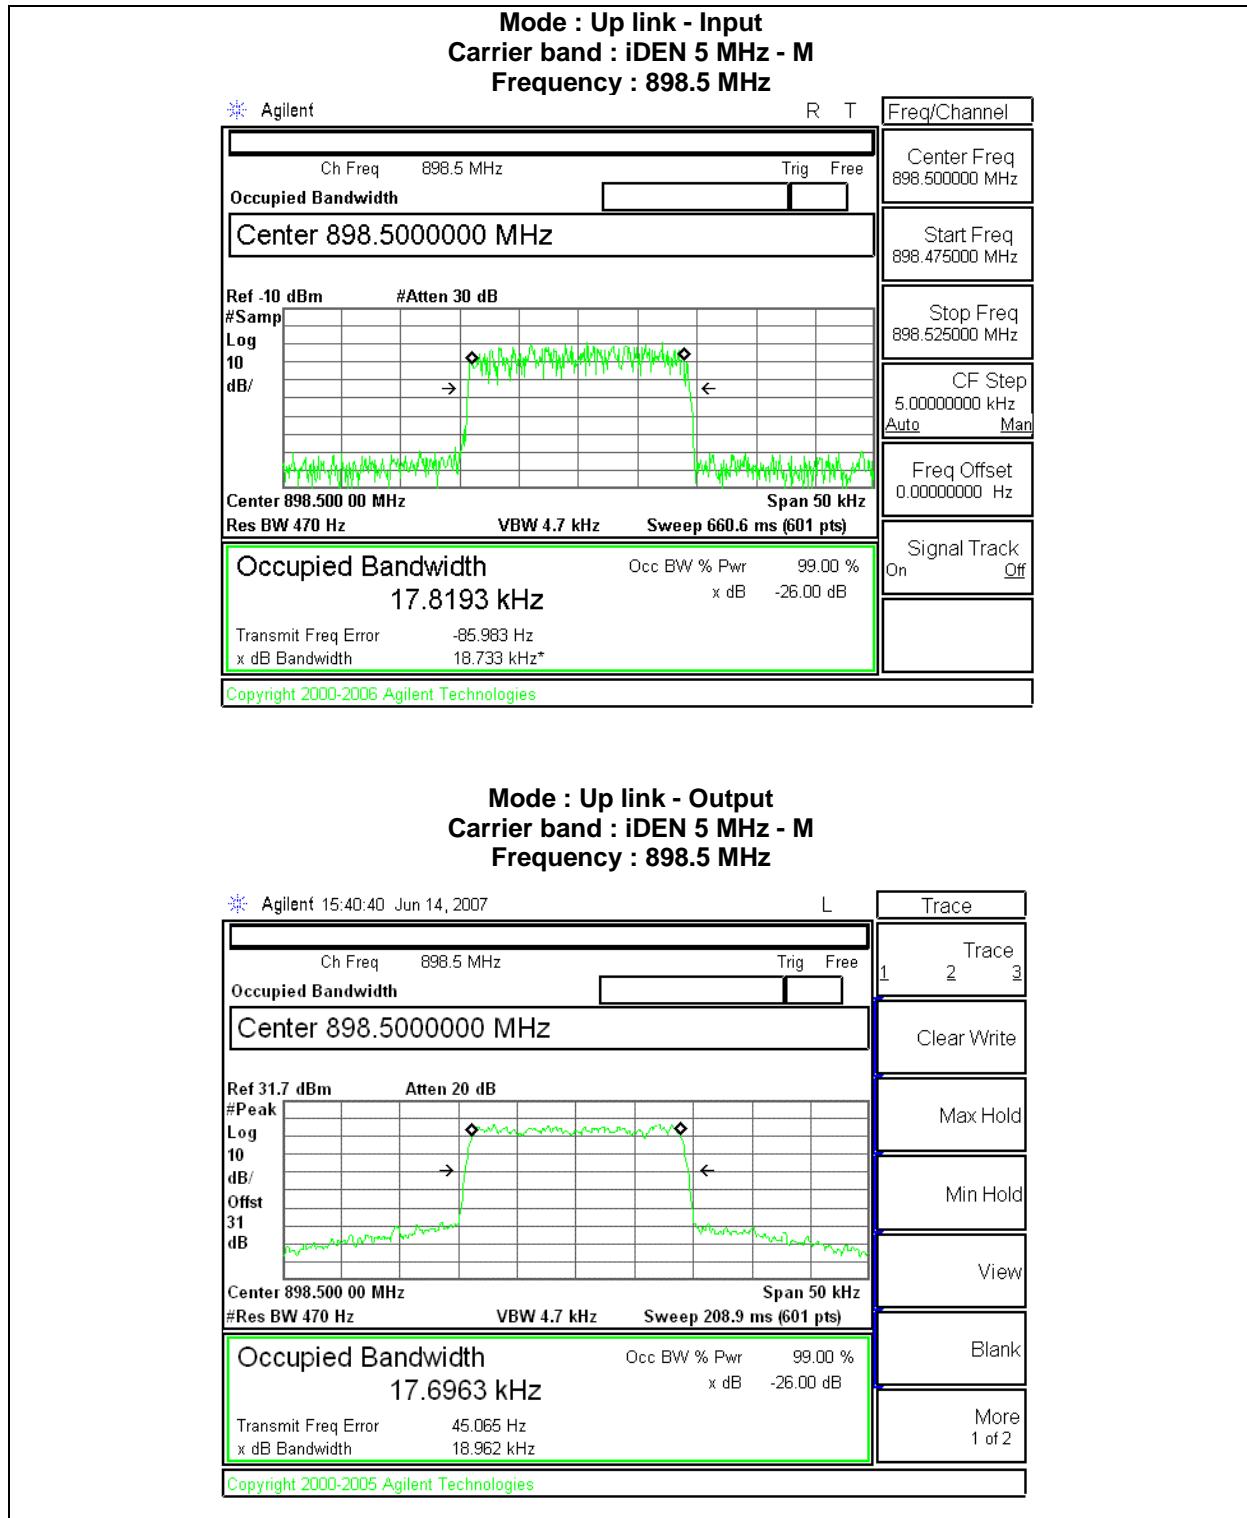


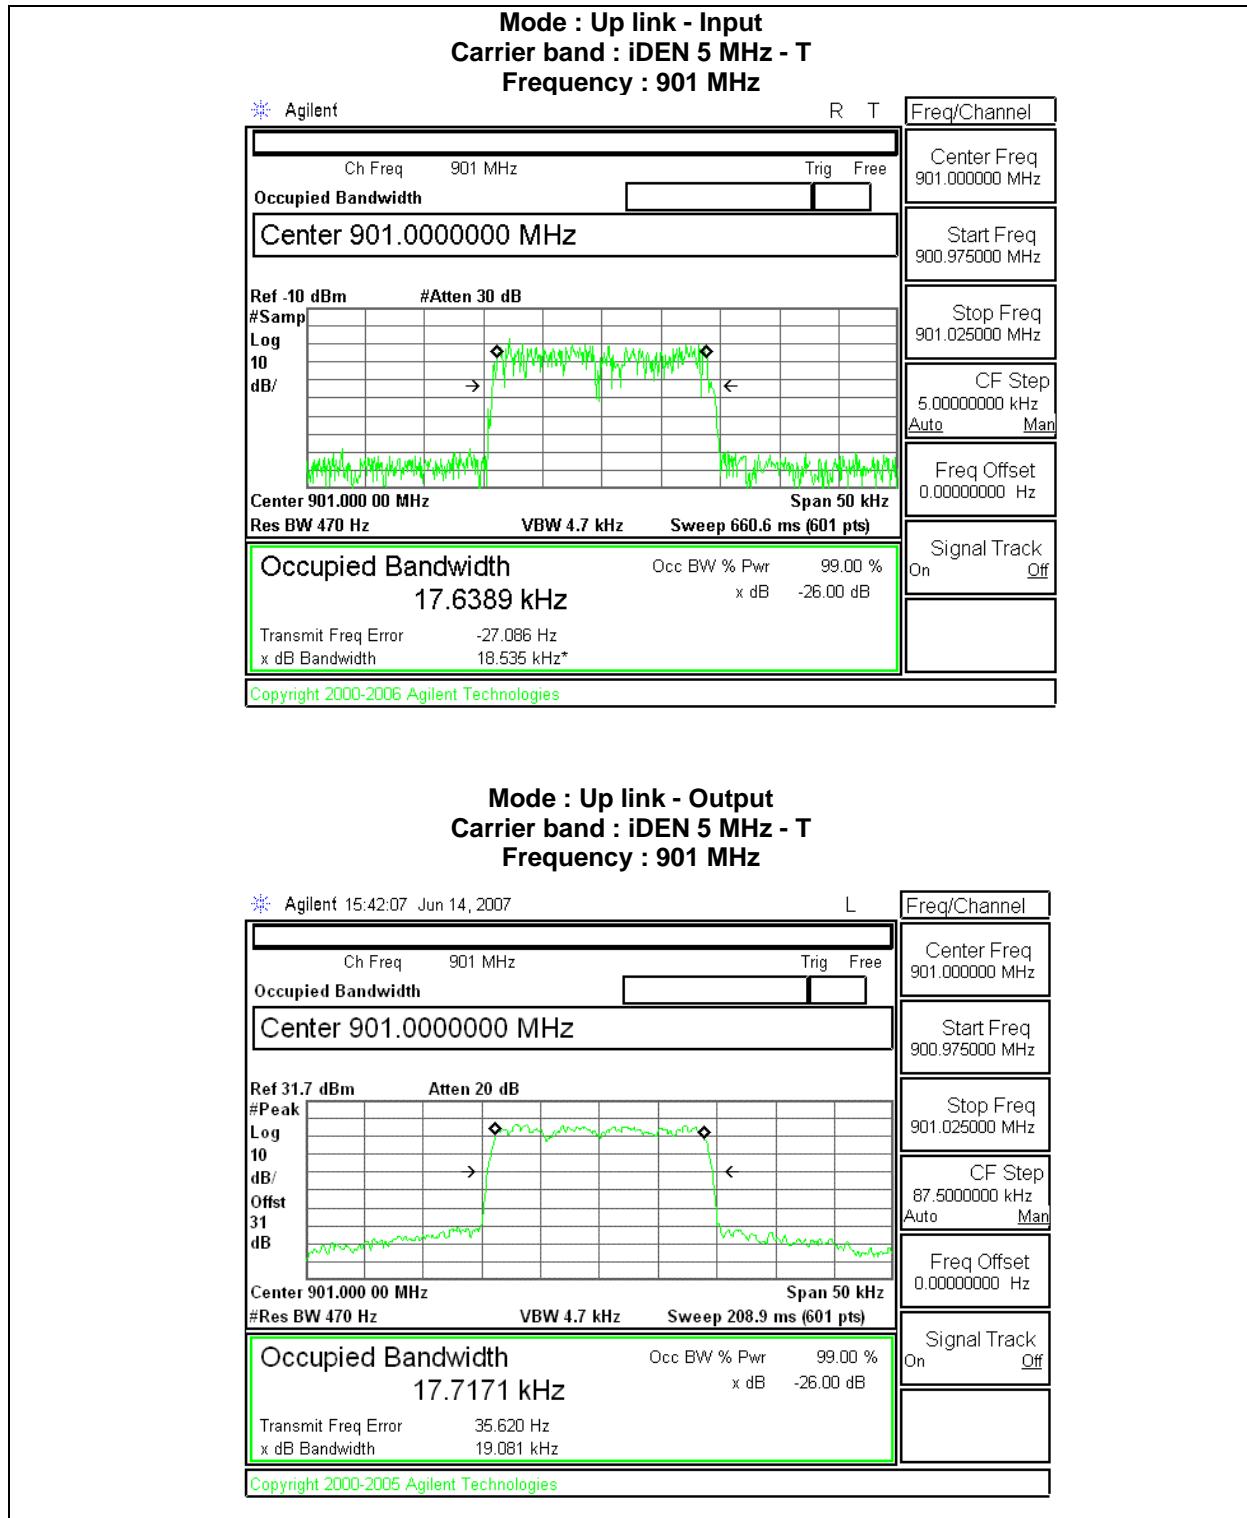


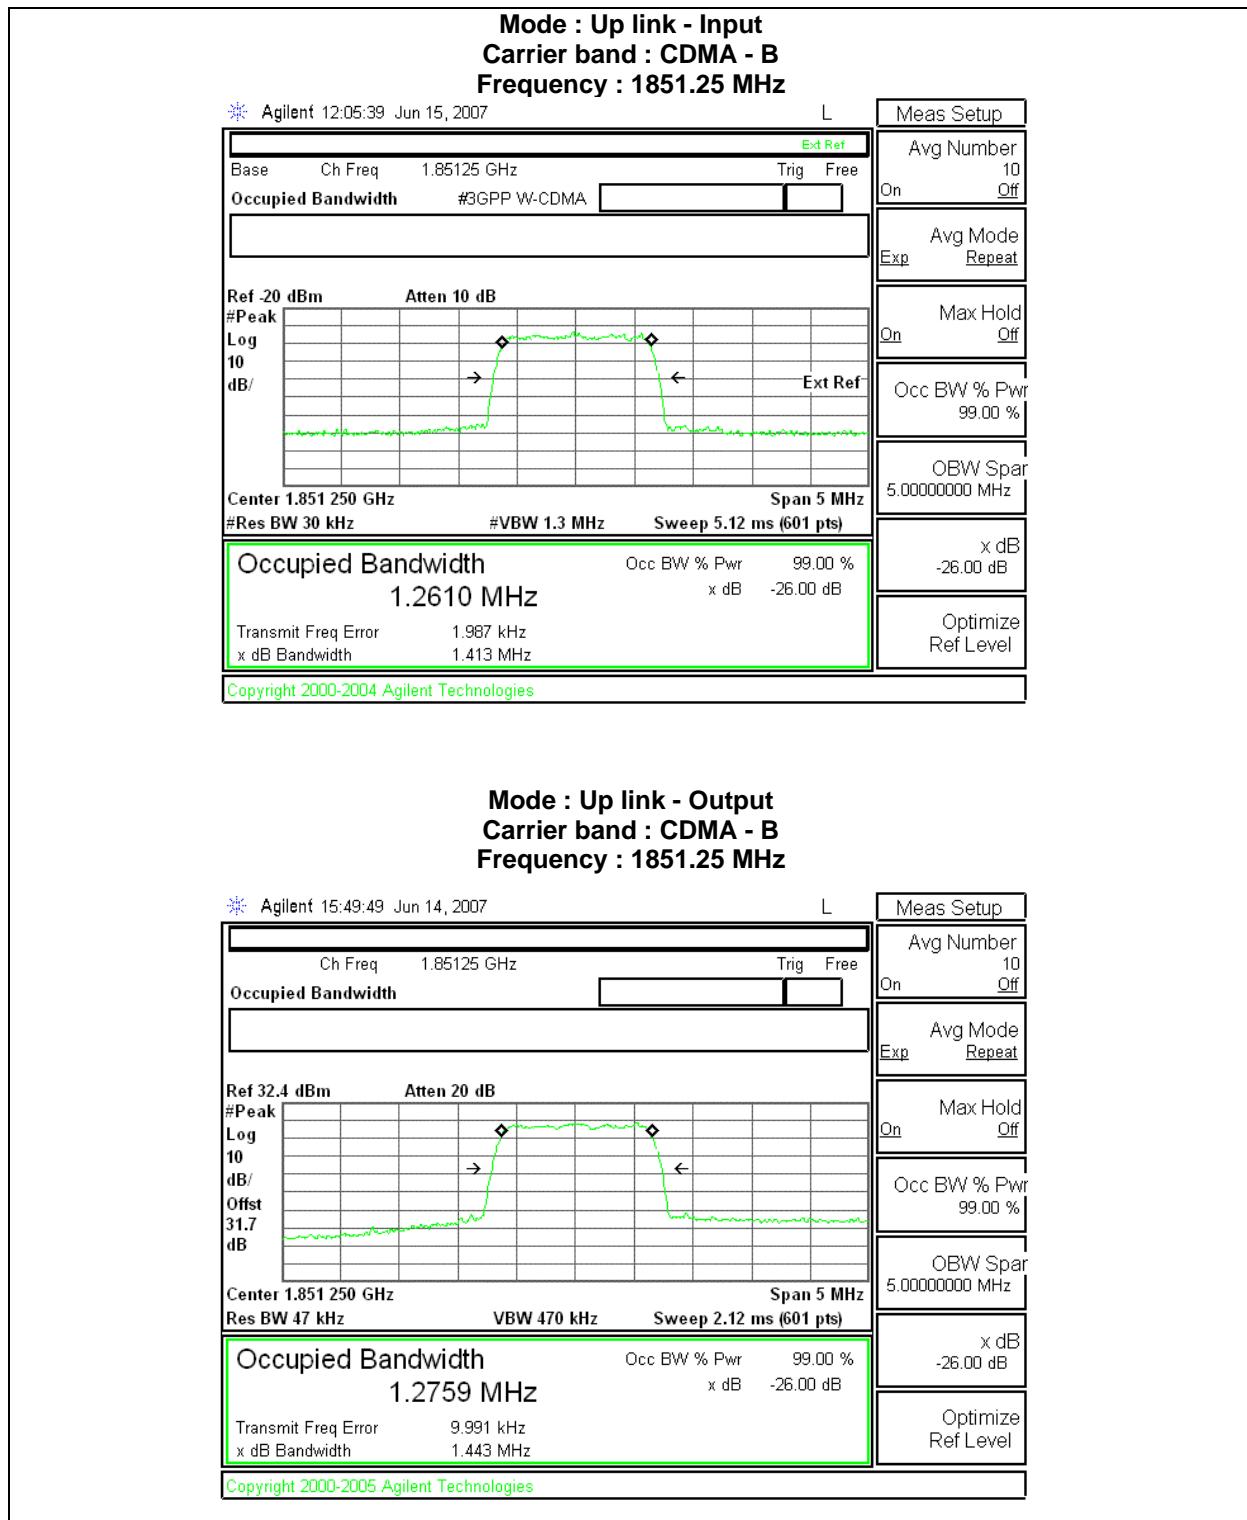


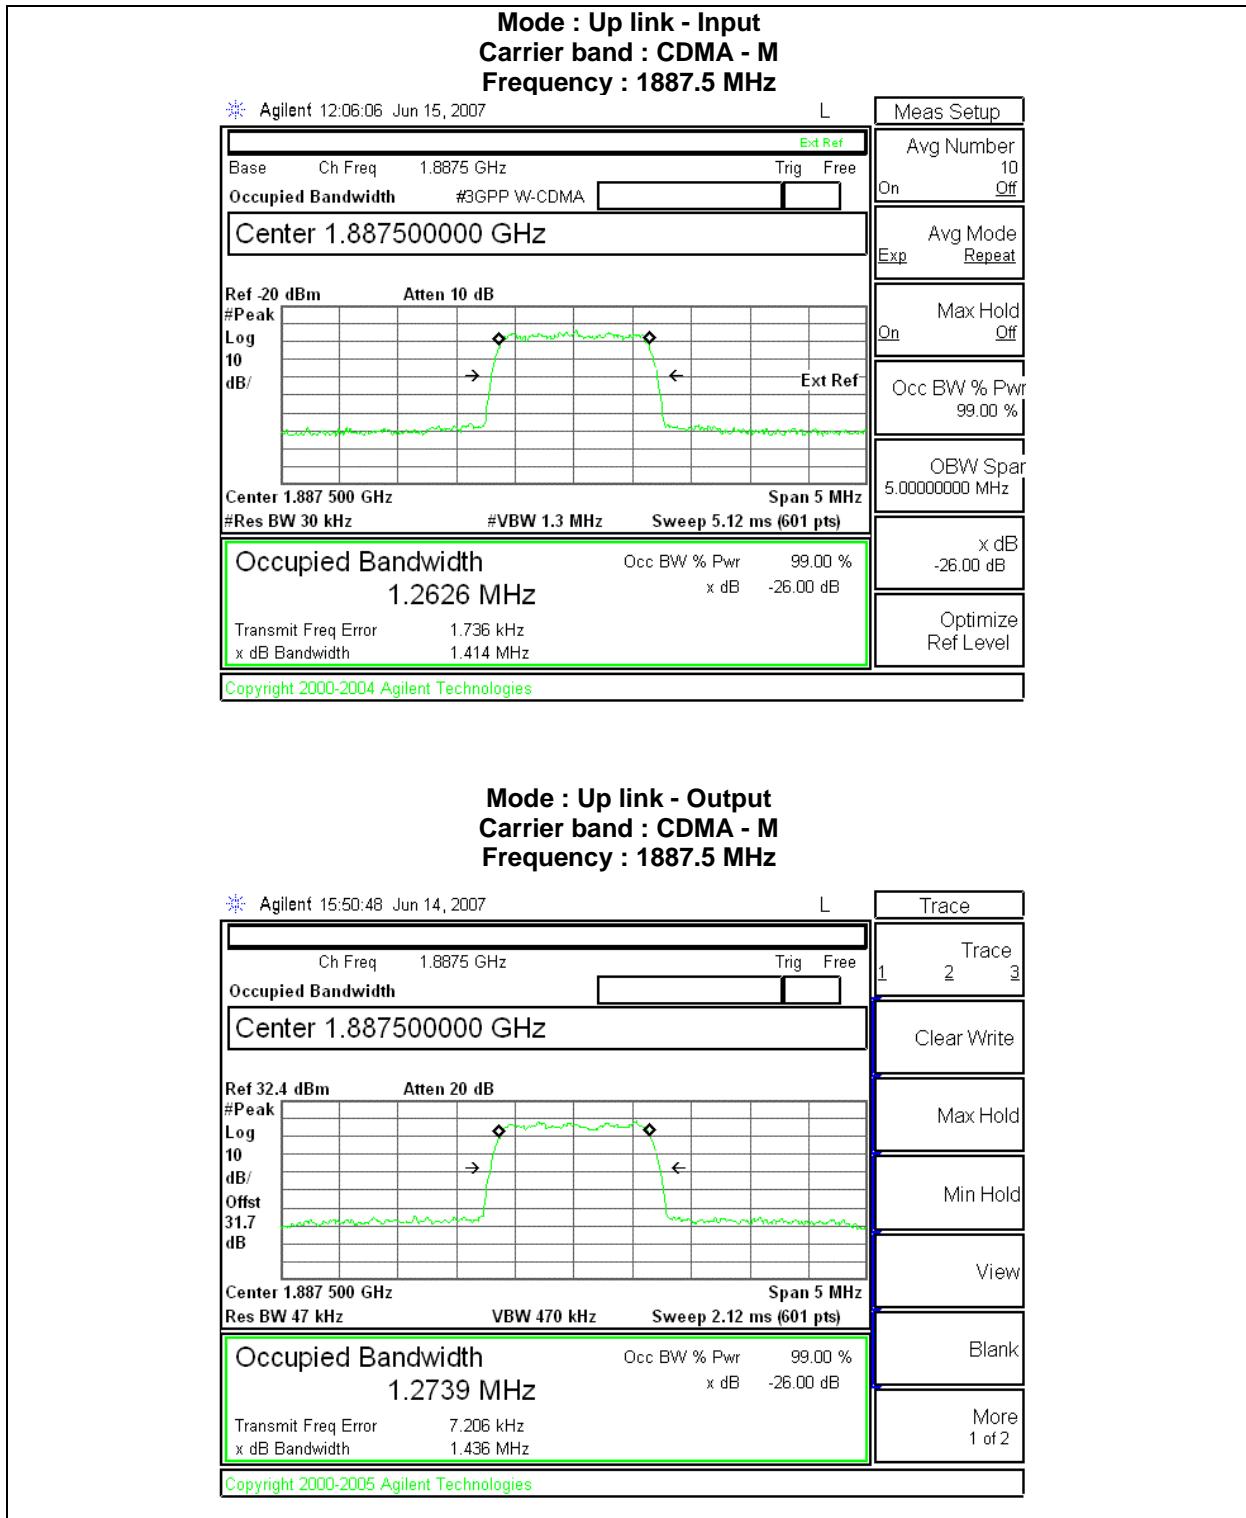


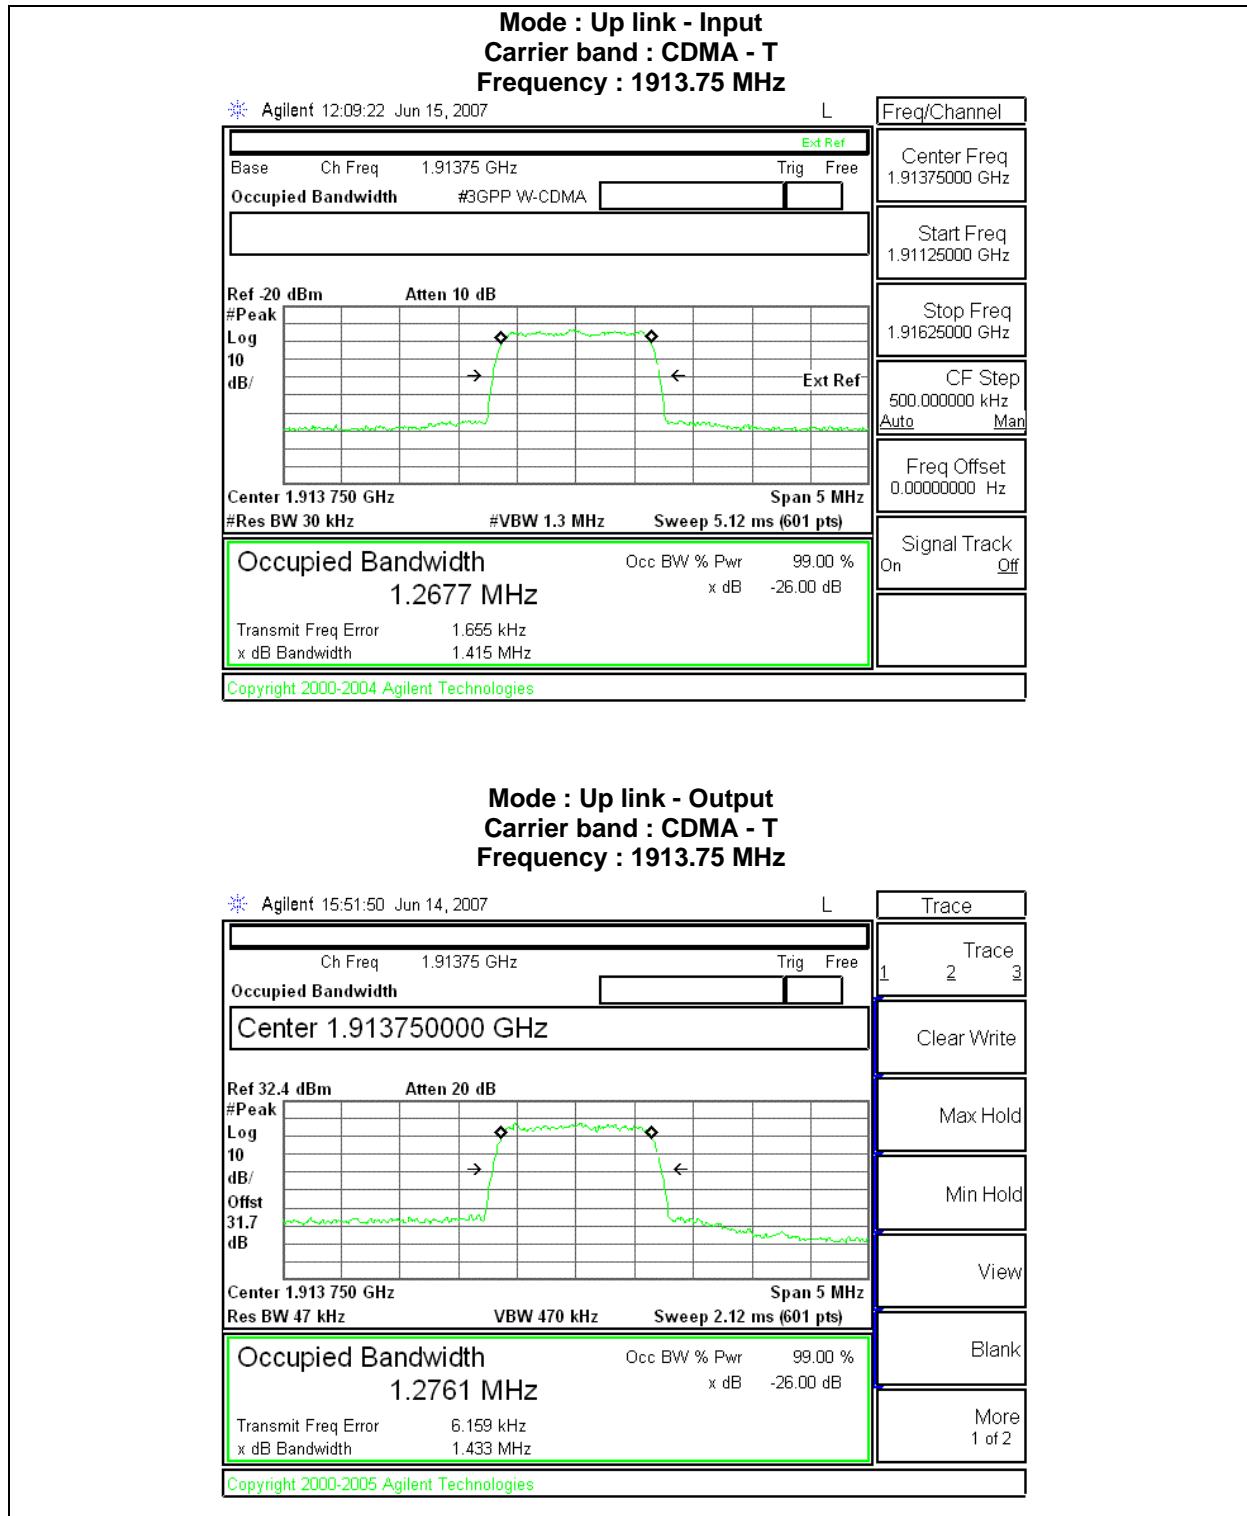


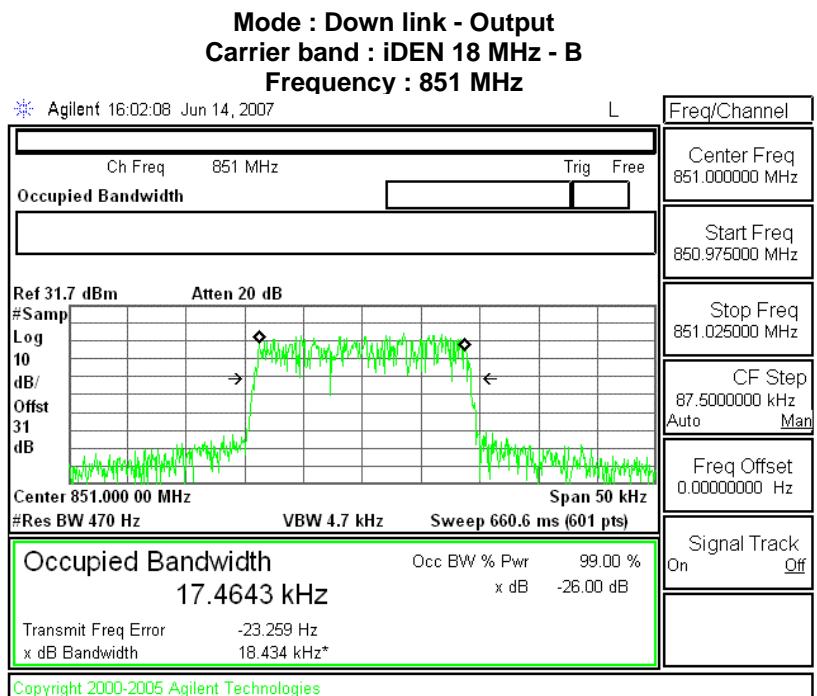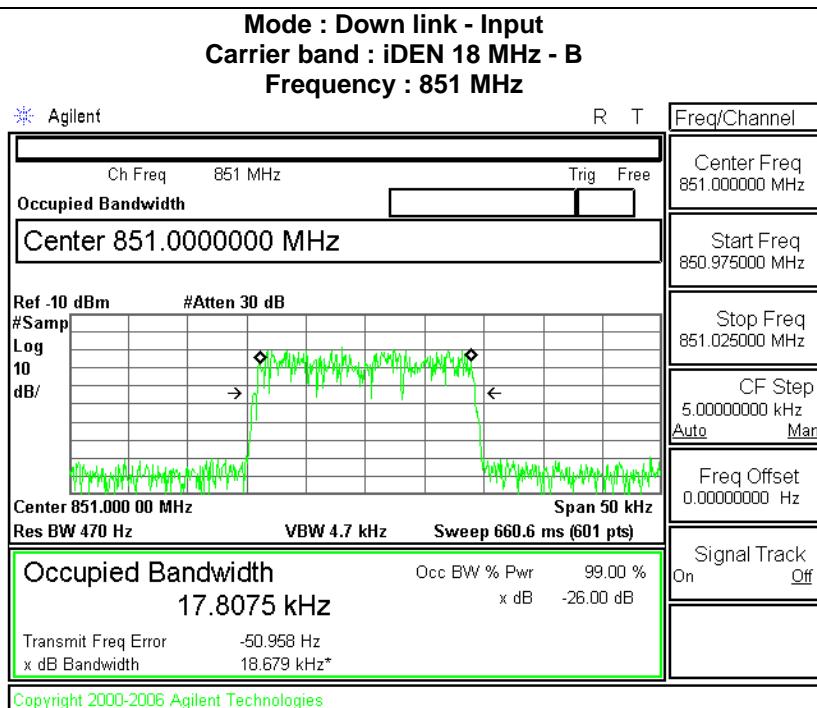


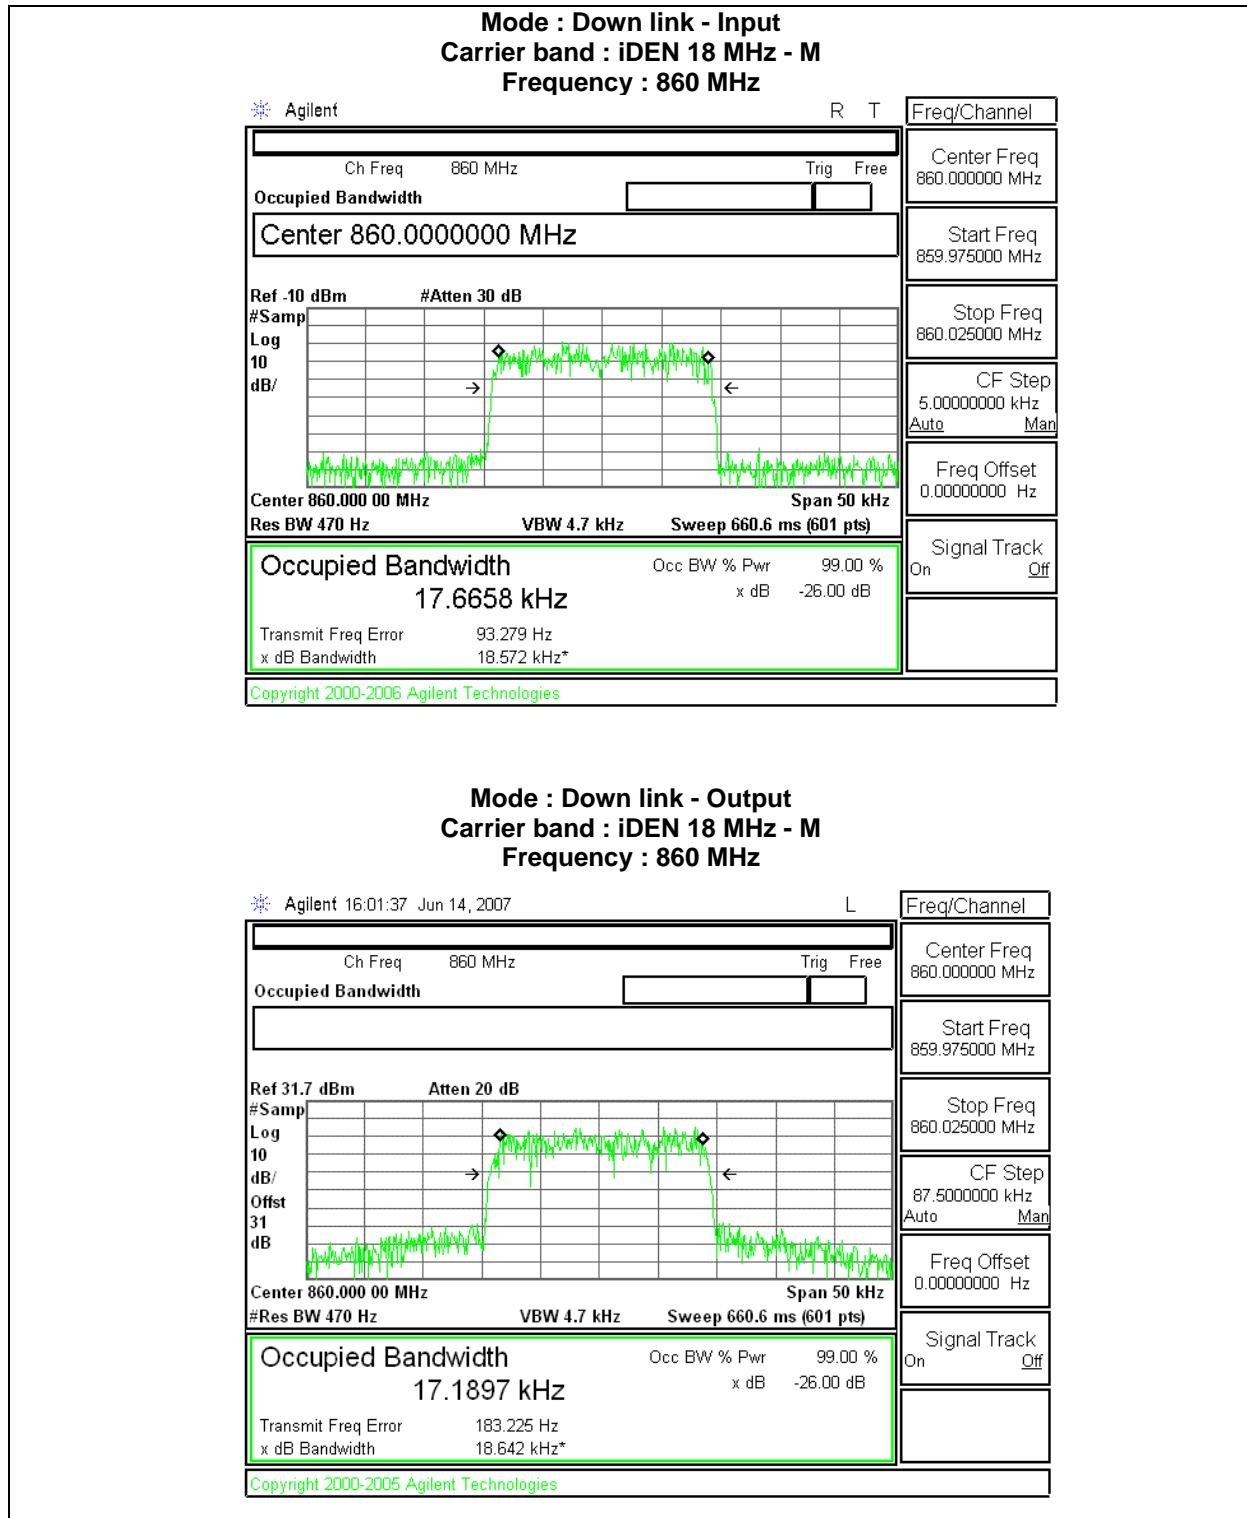


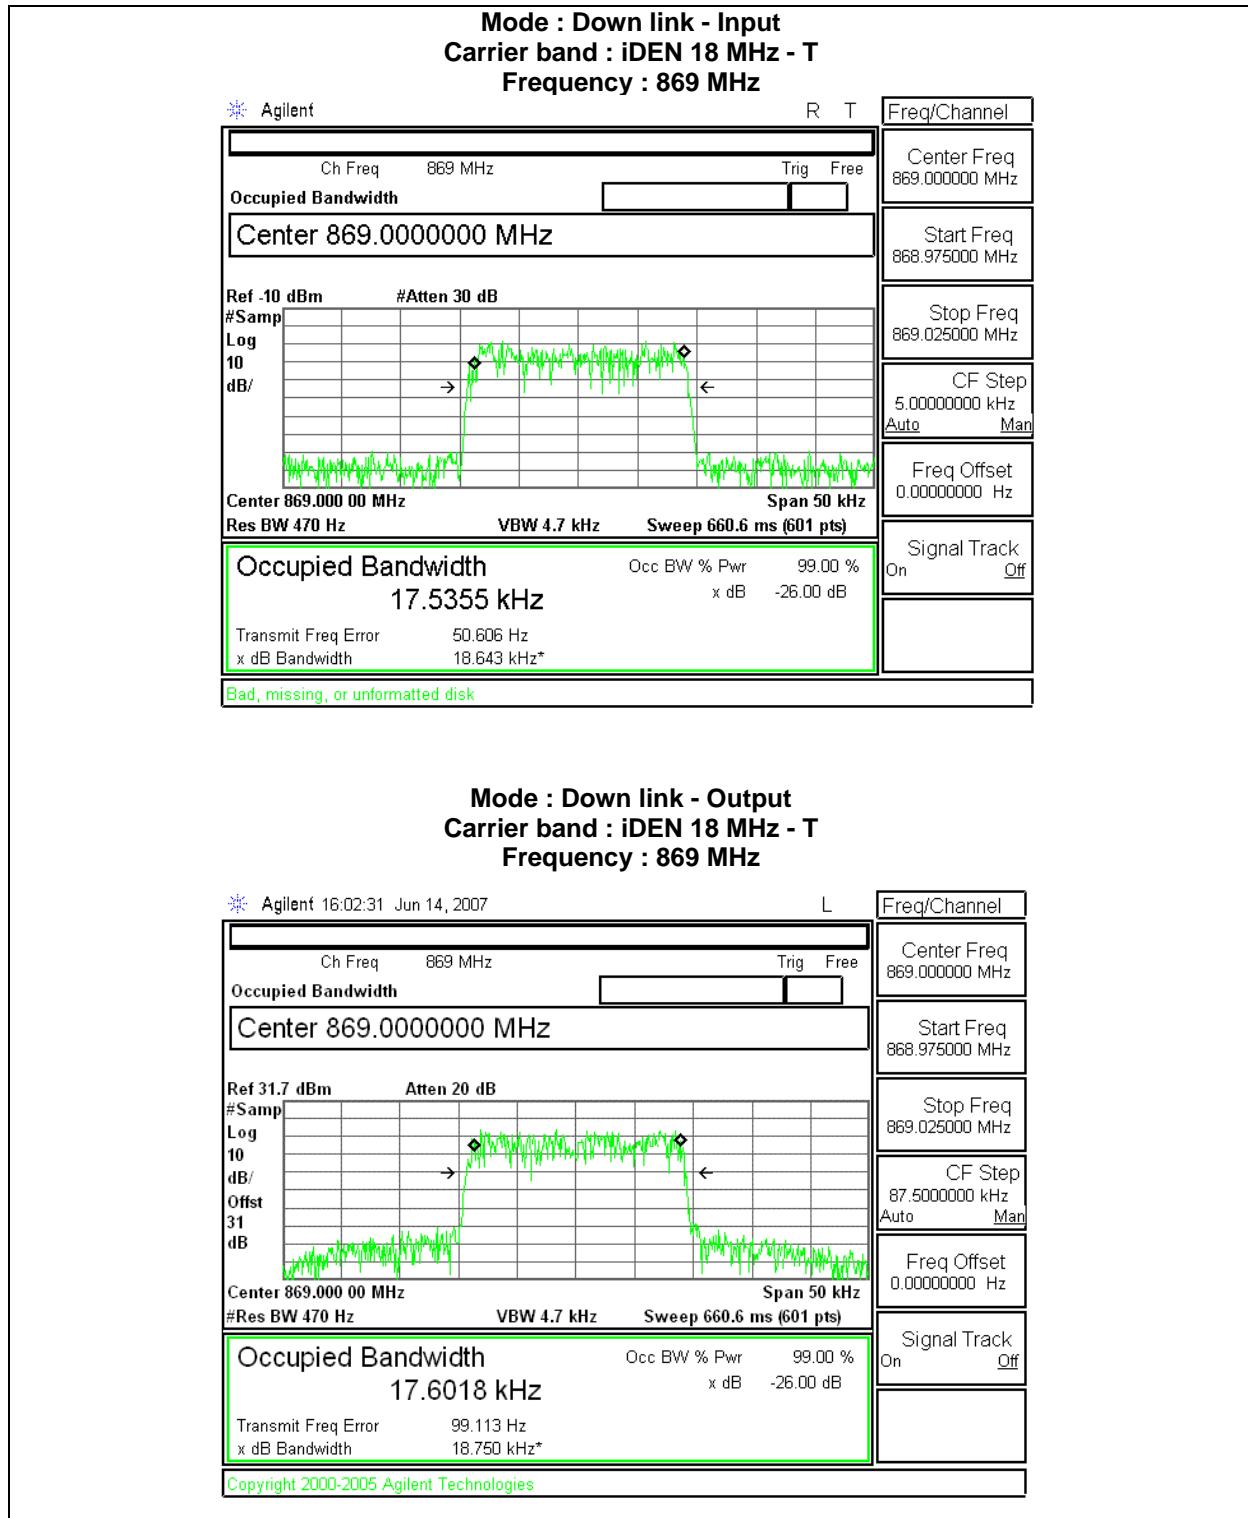

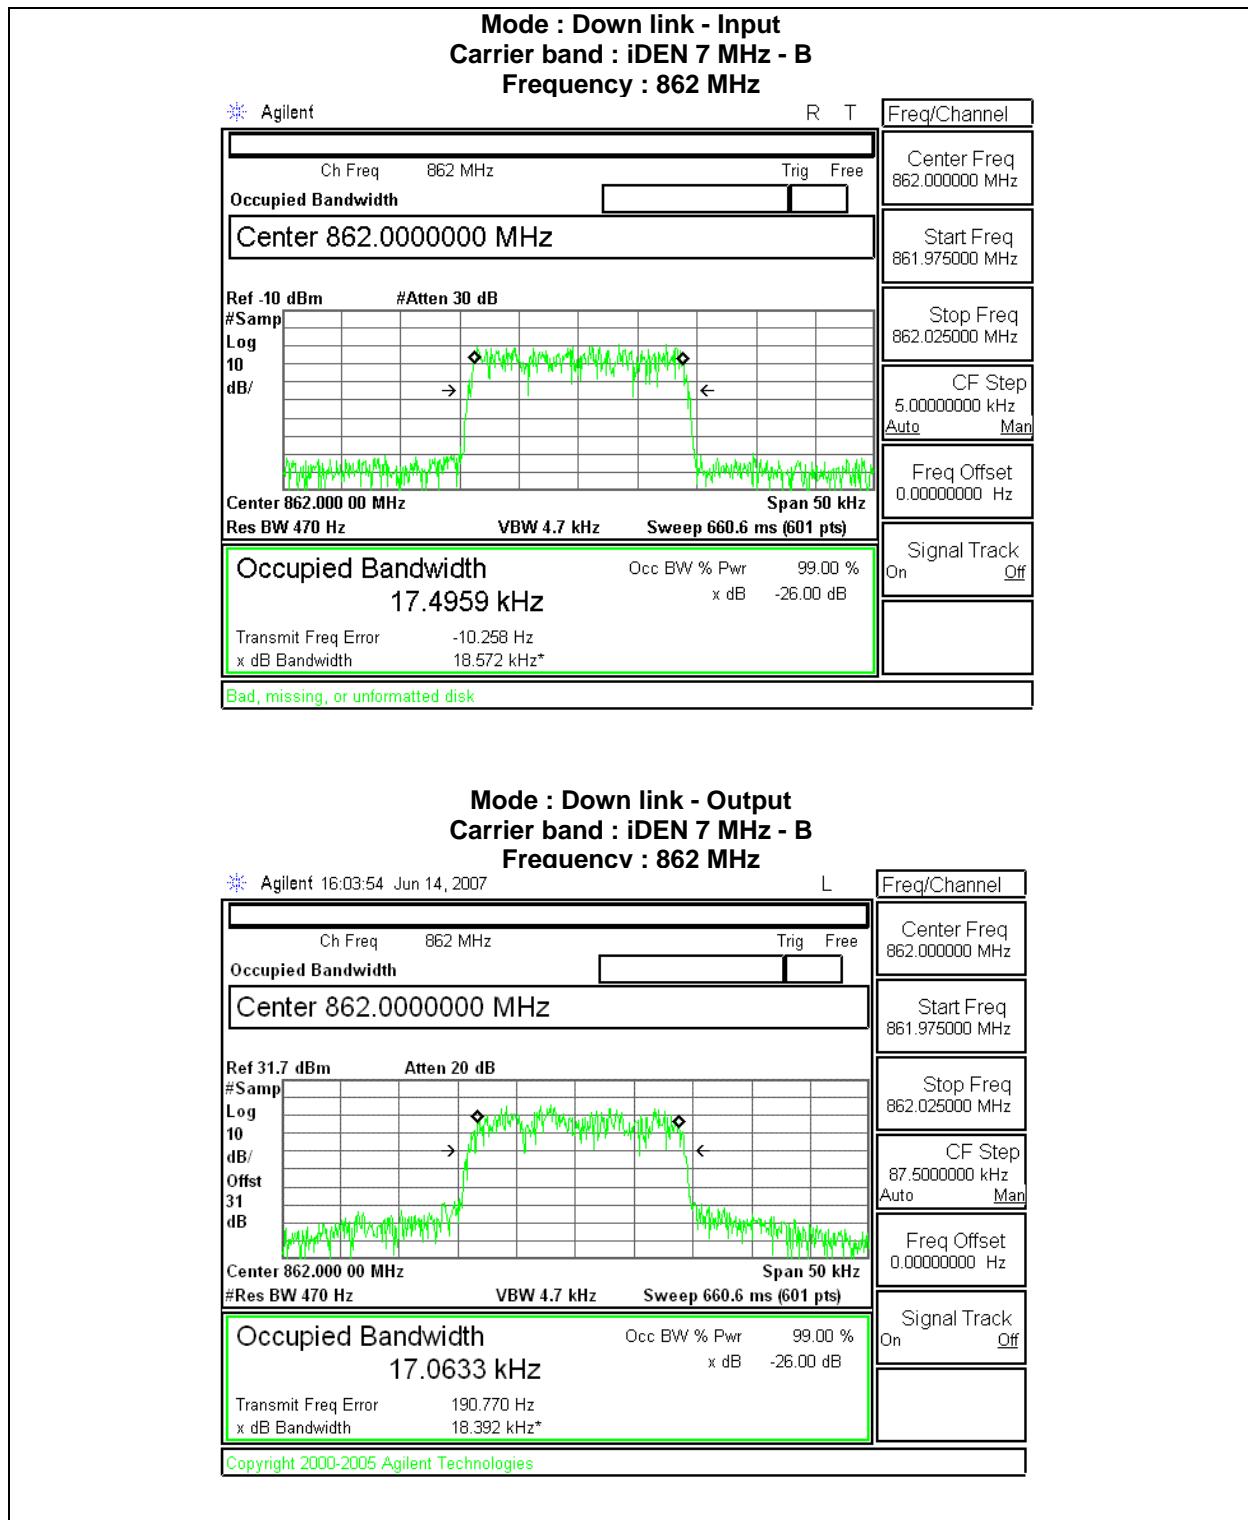


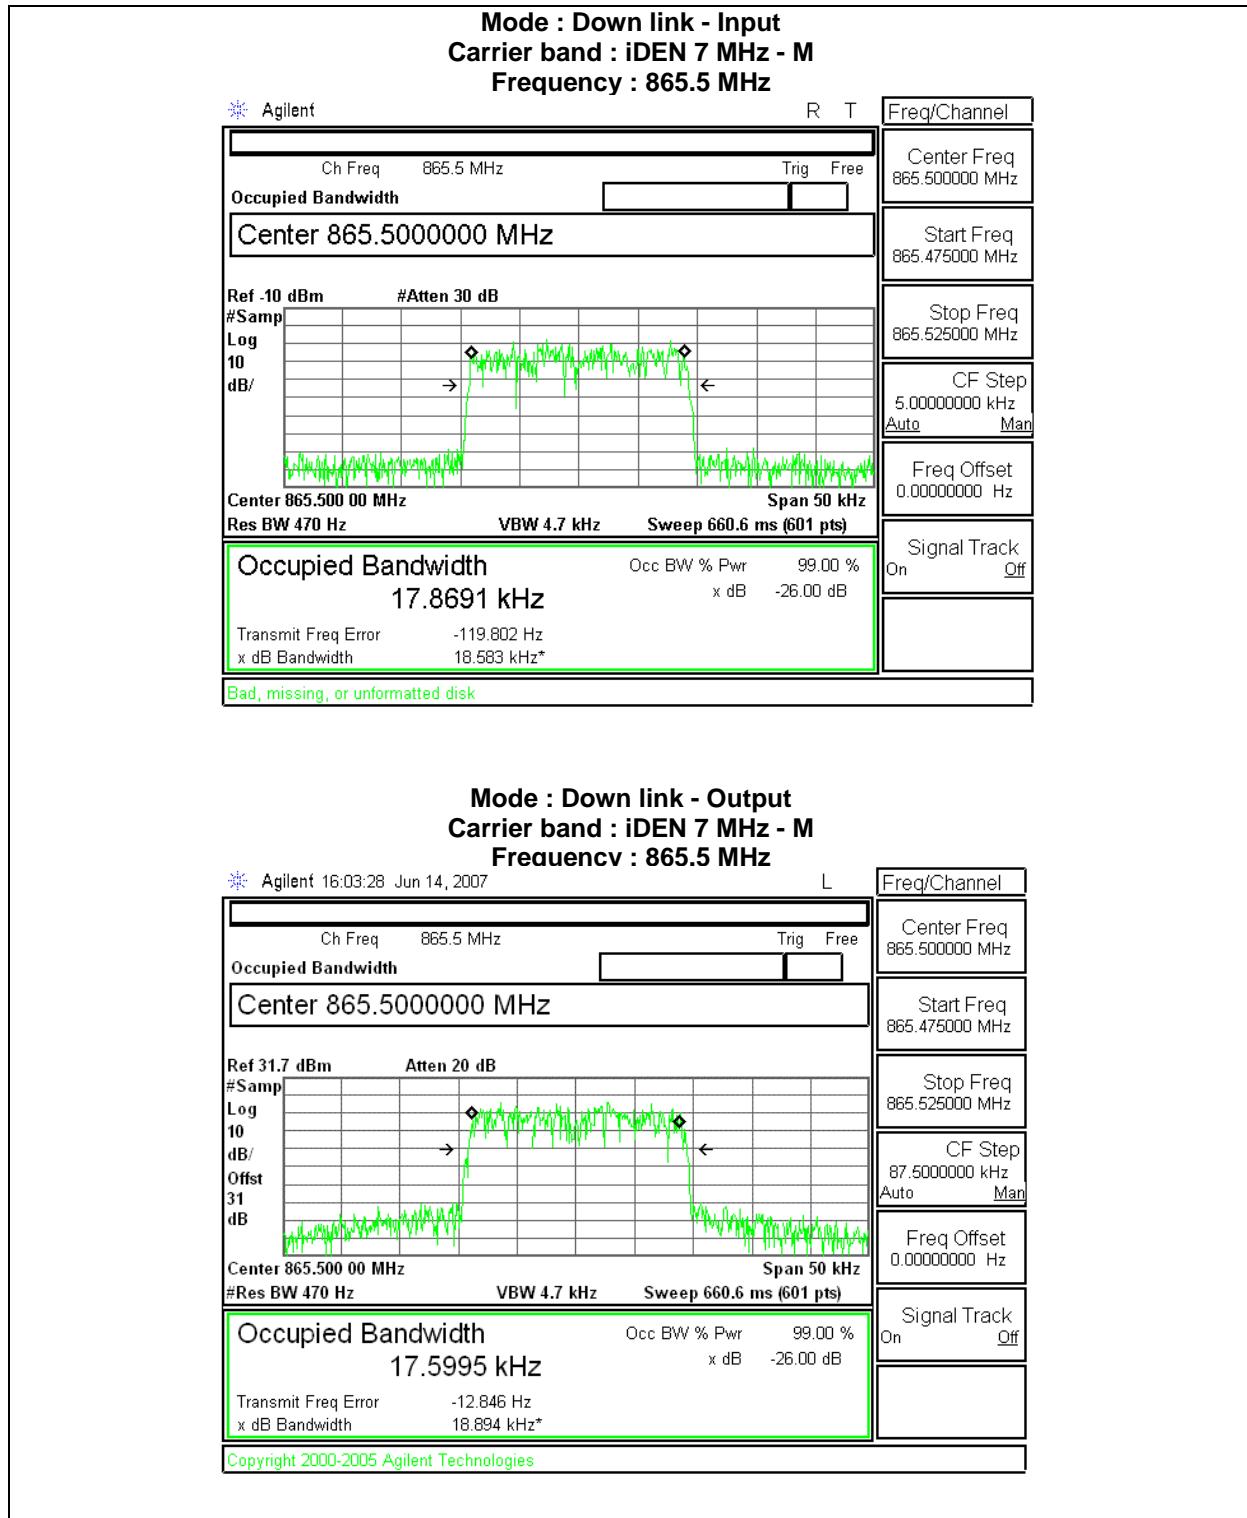

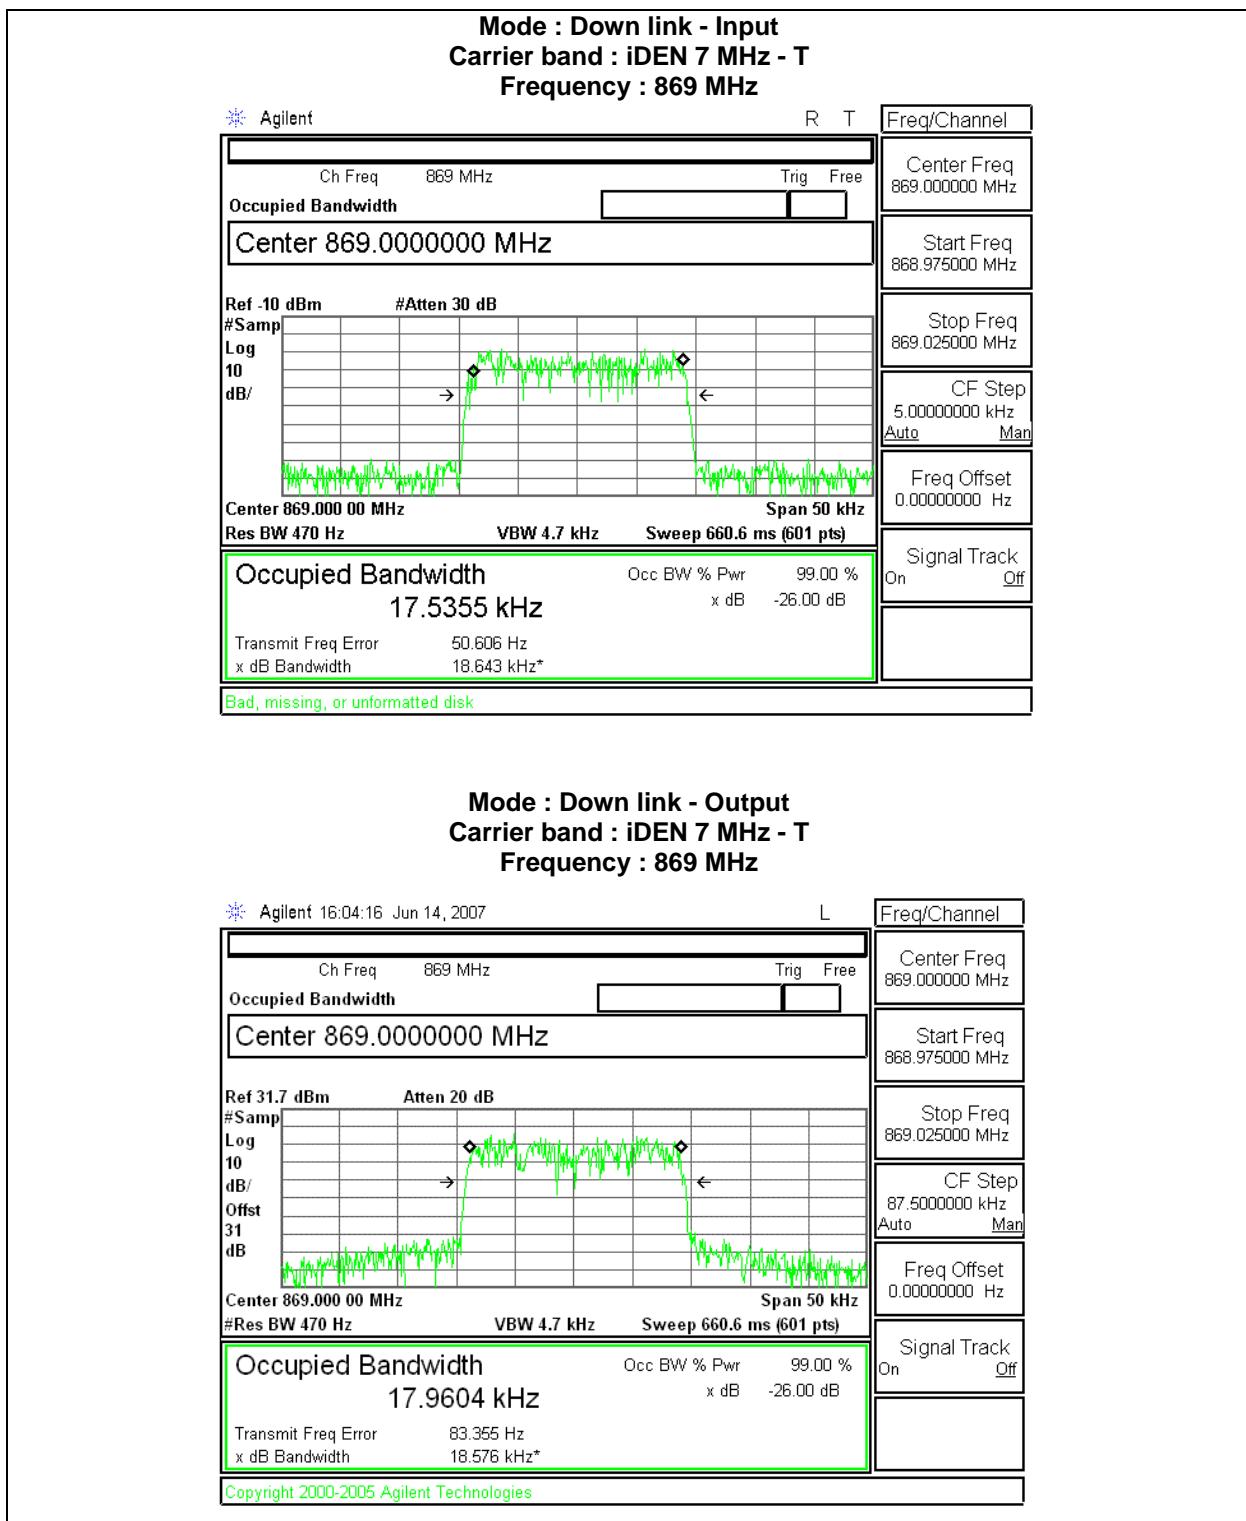


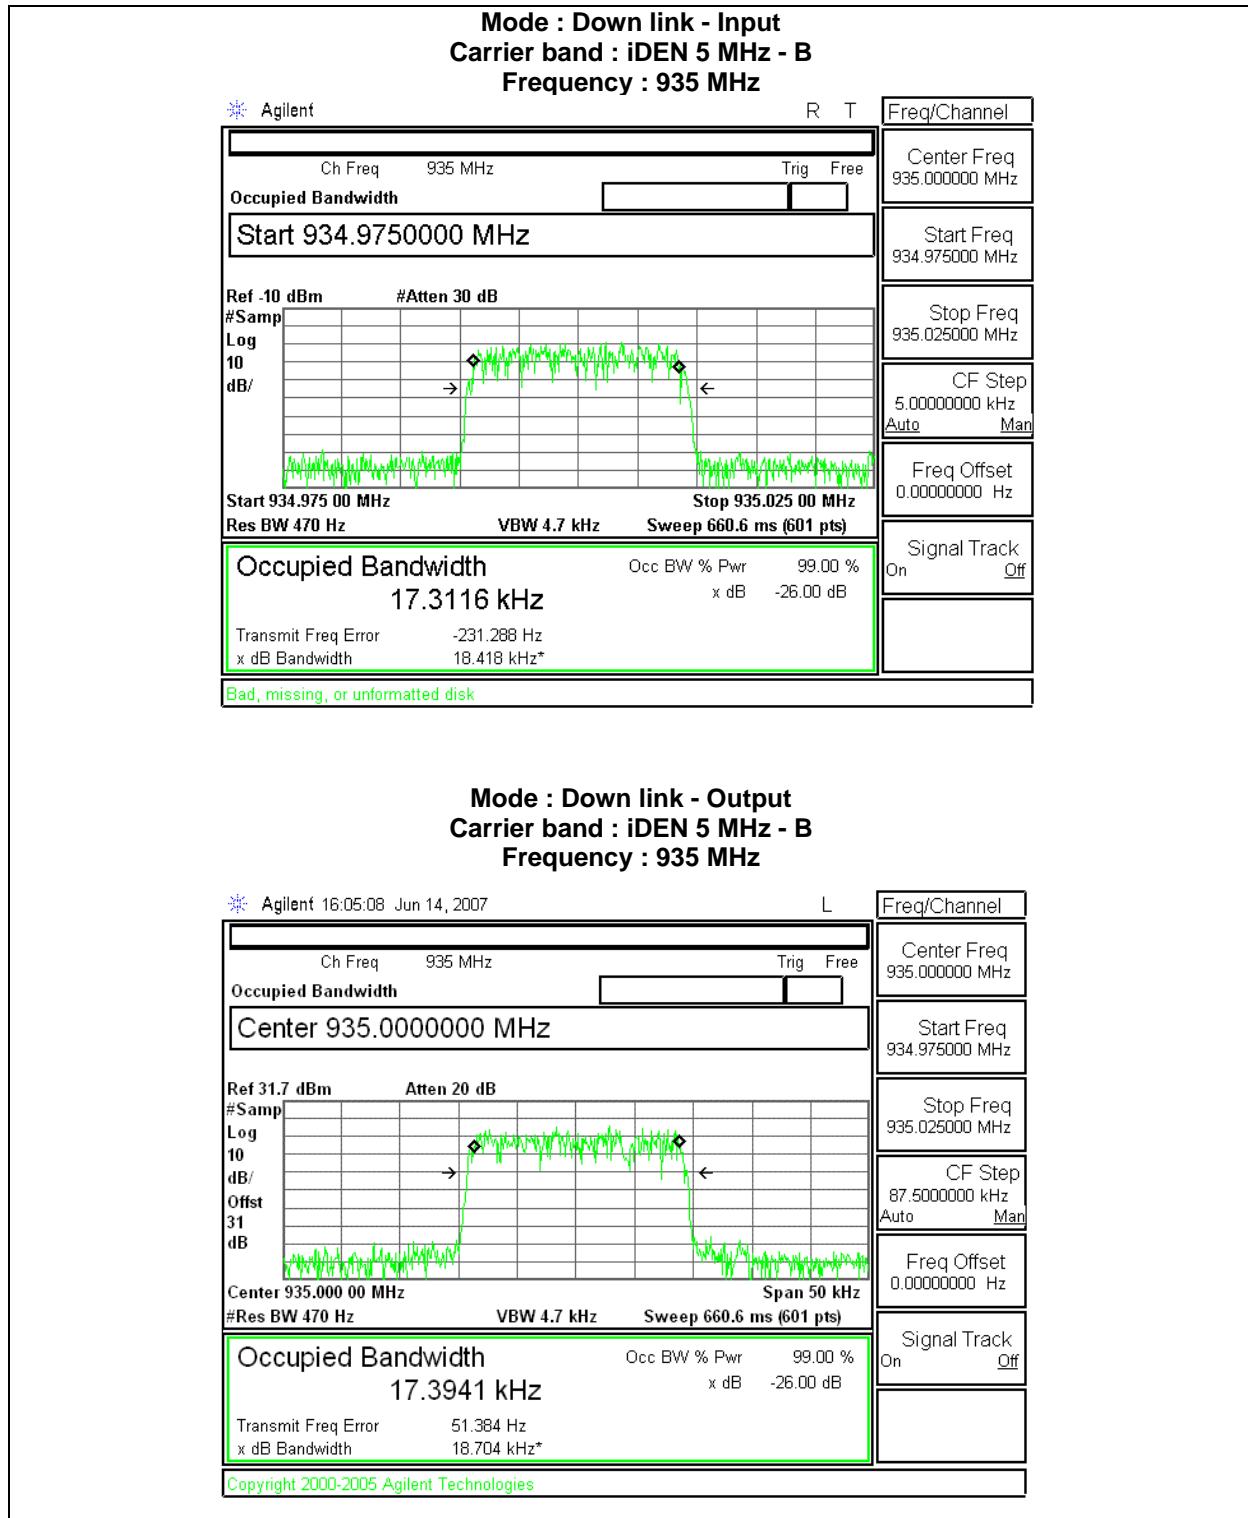



**Mode : Down link - Input**  
**Carrier band : iDEN 5 MHz - M**  
**Frequency : 937.5 MHz**

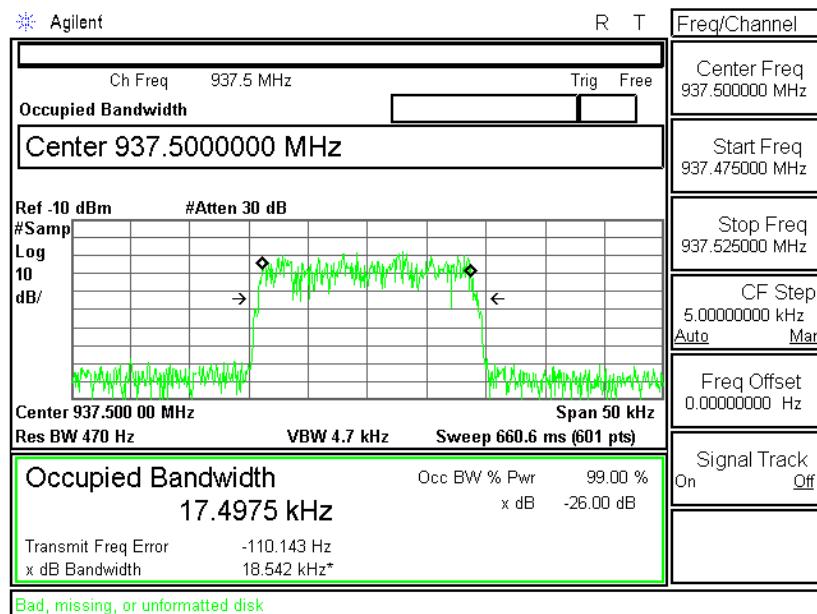



**Mode : Down link - Output**  
**Carrier band : iDEN 5 MHz - M**  
**Frequency : 937.5 MHz**

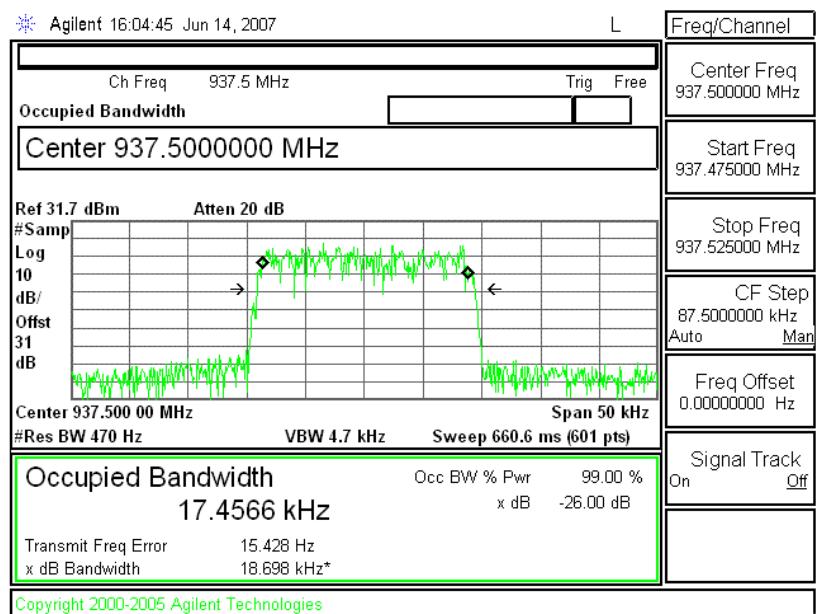

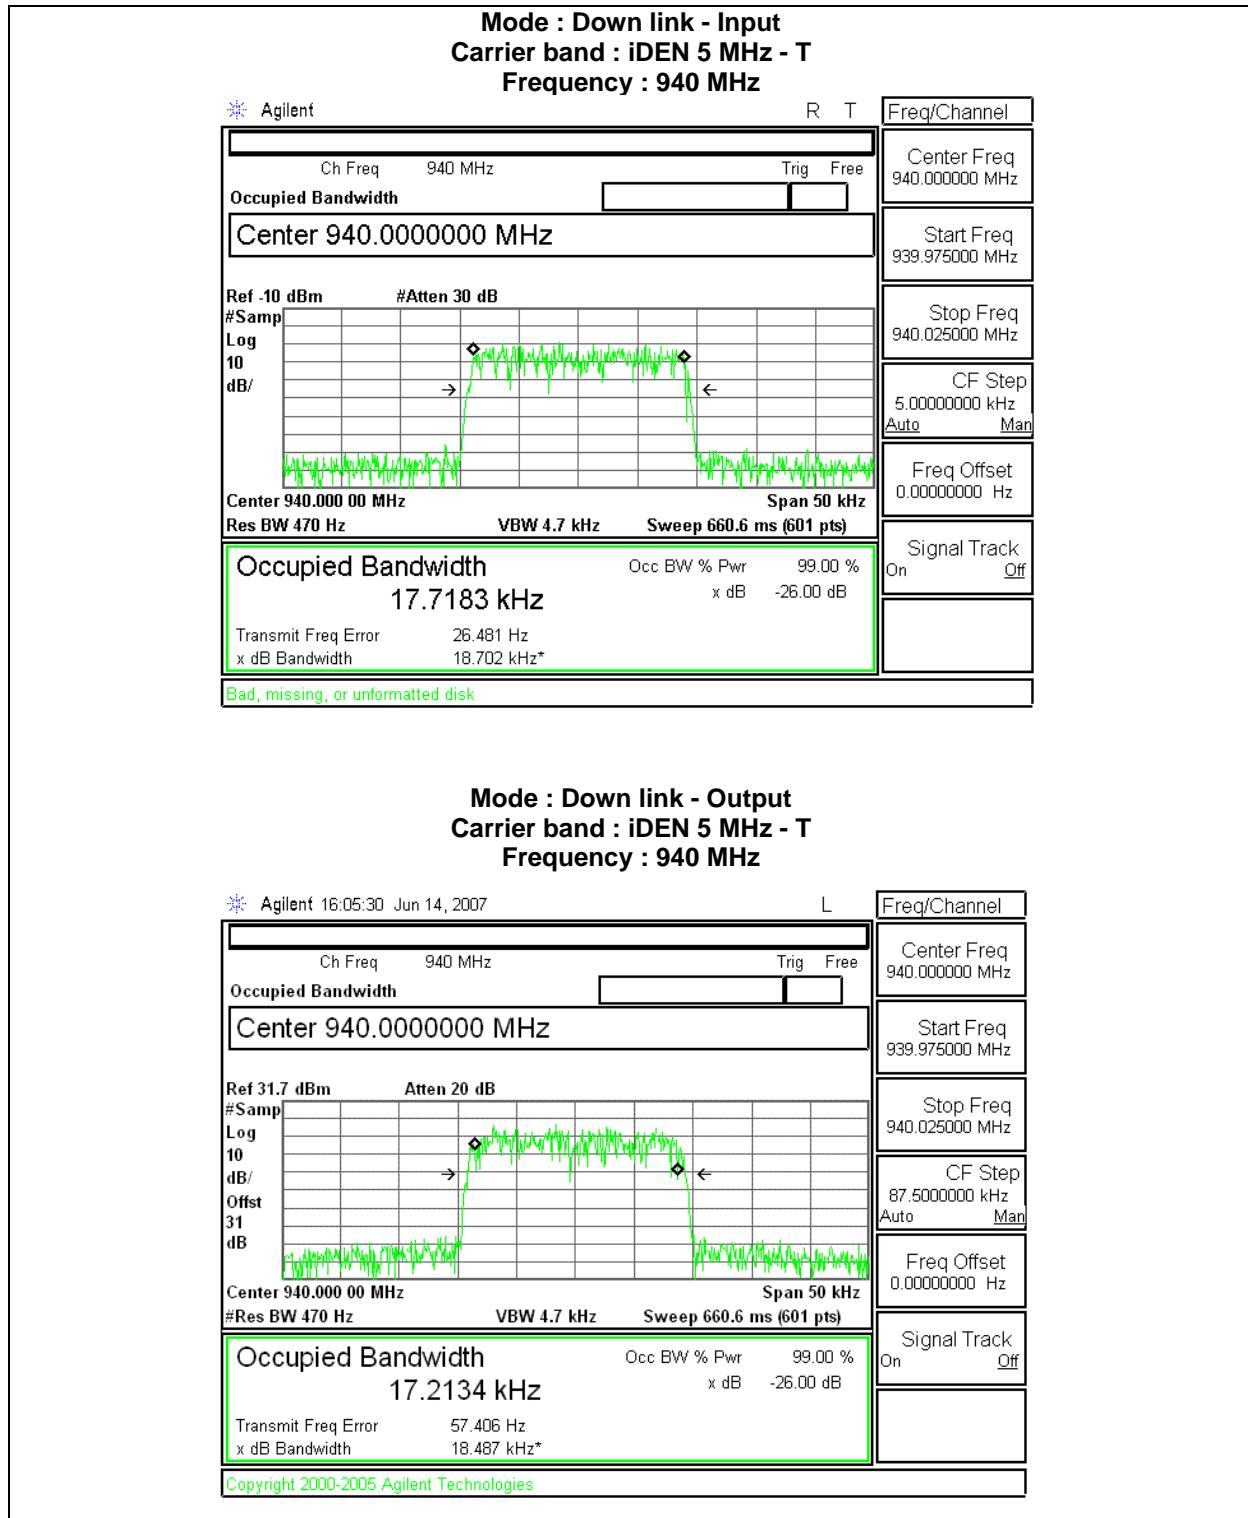

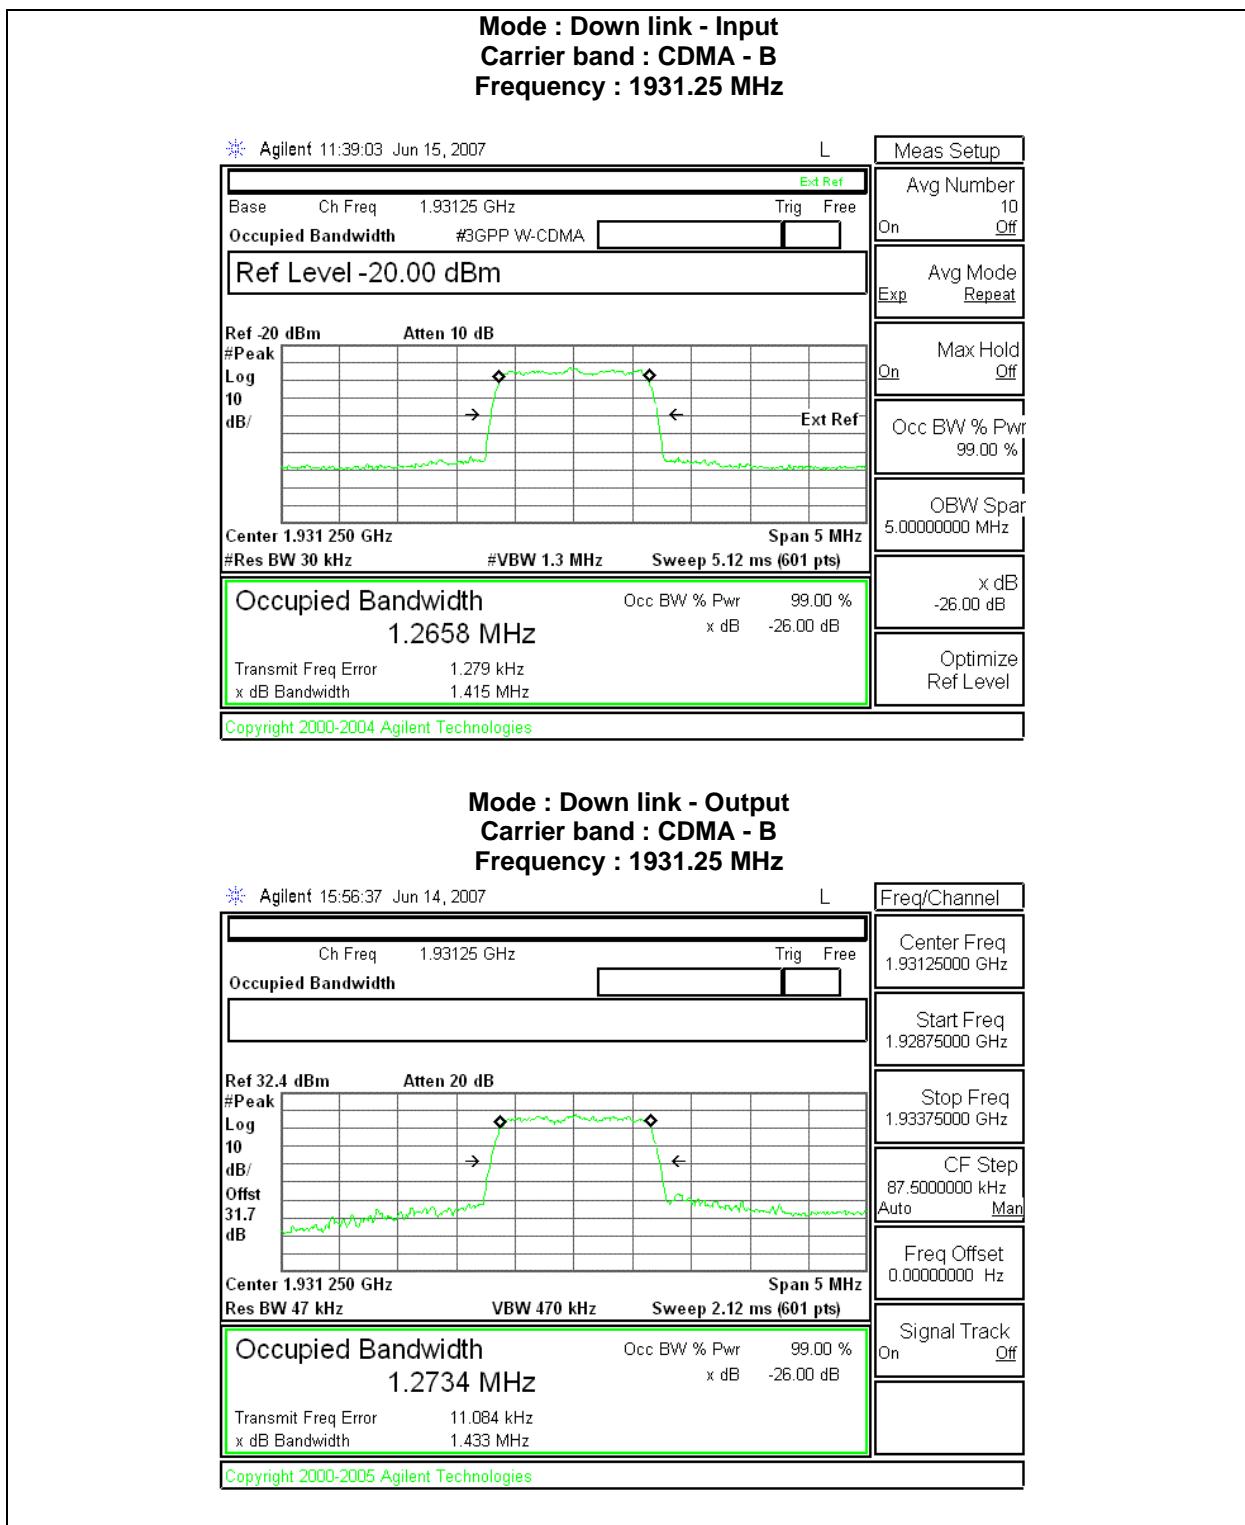

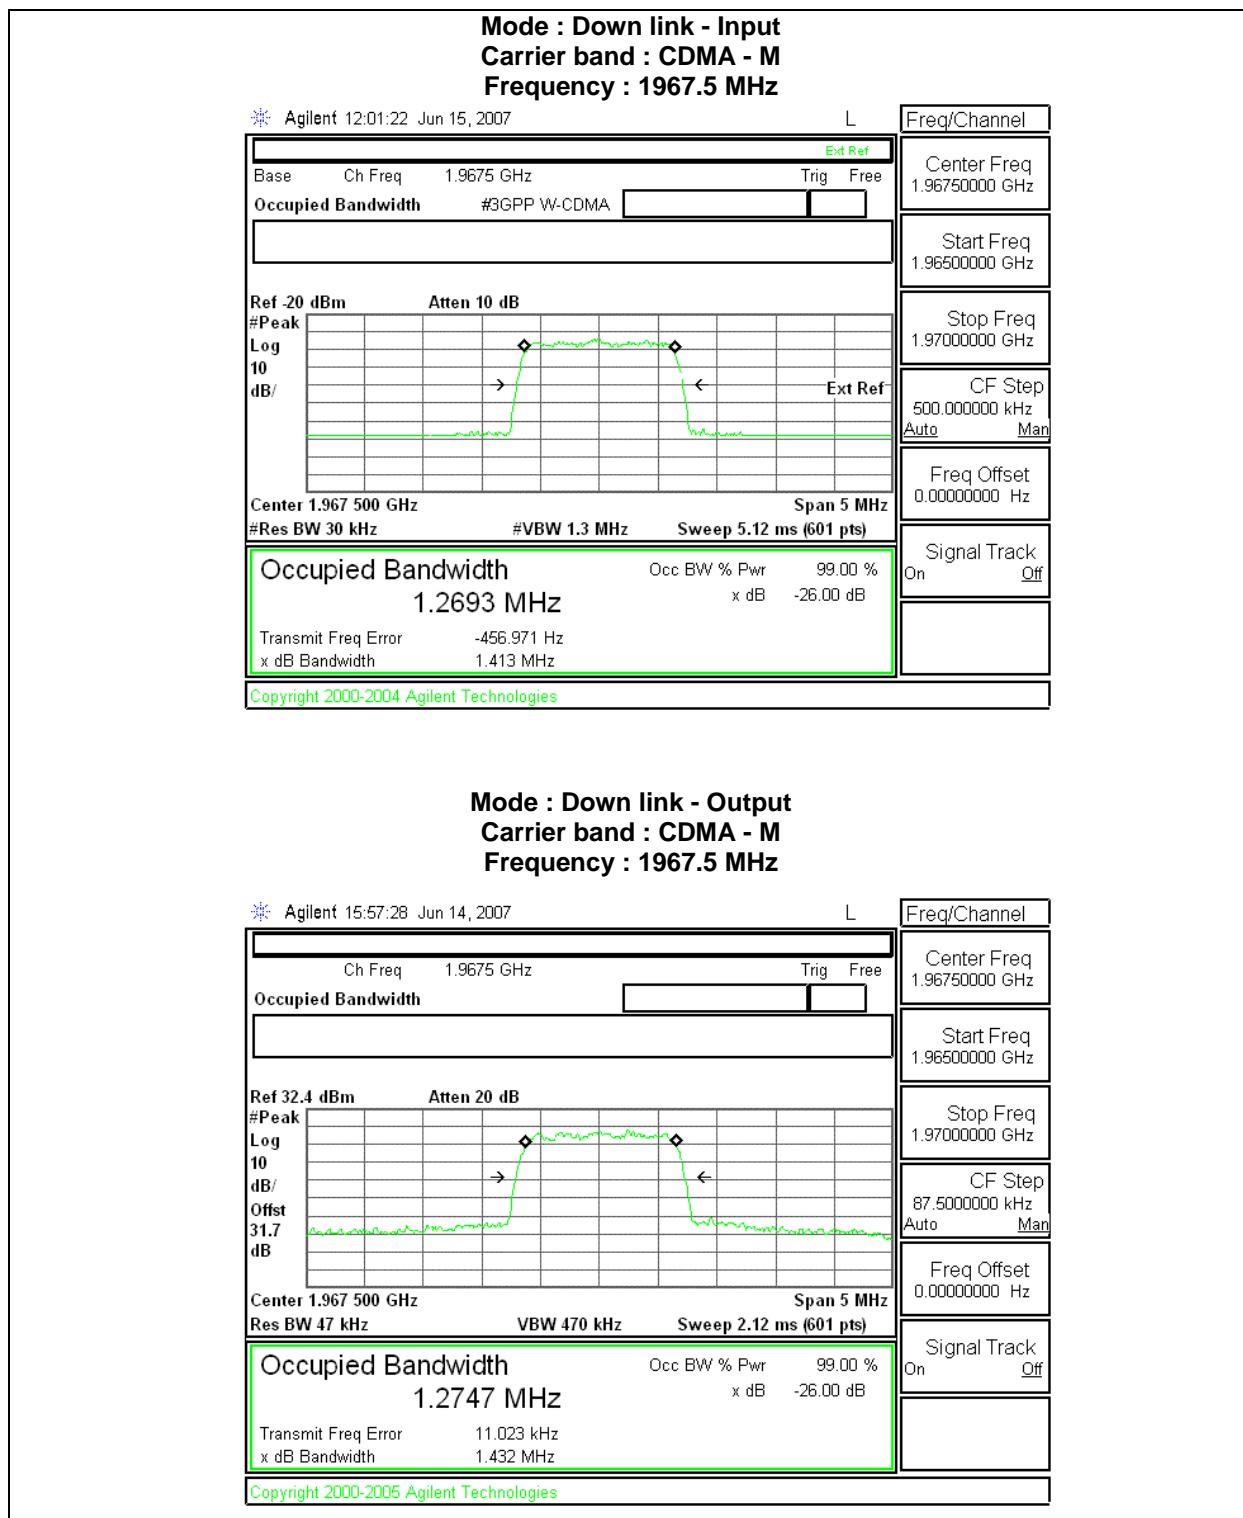

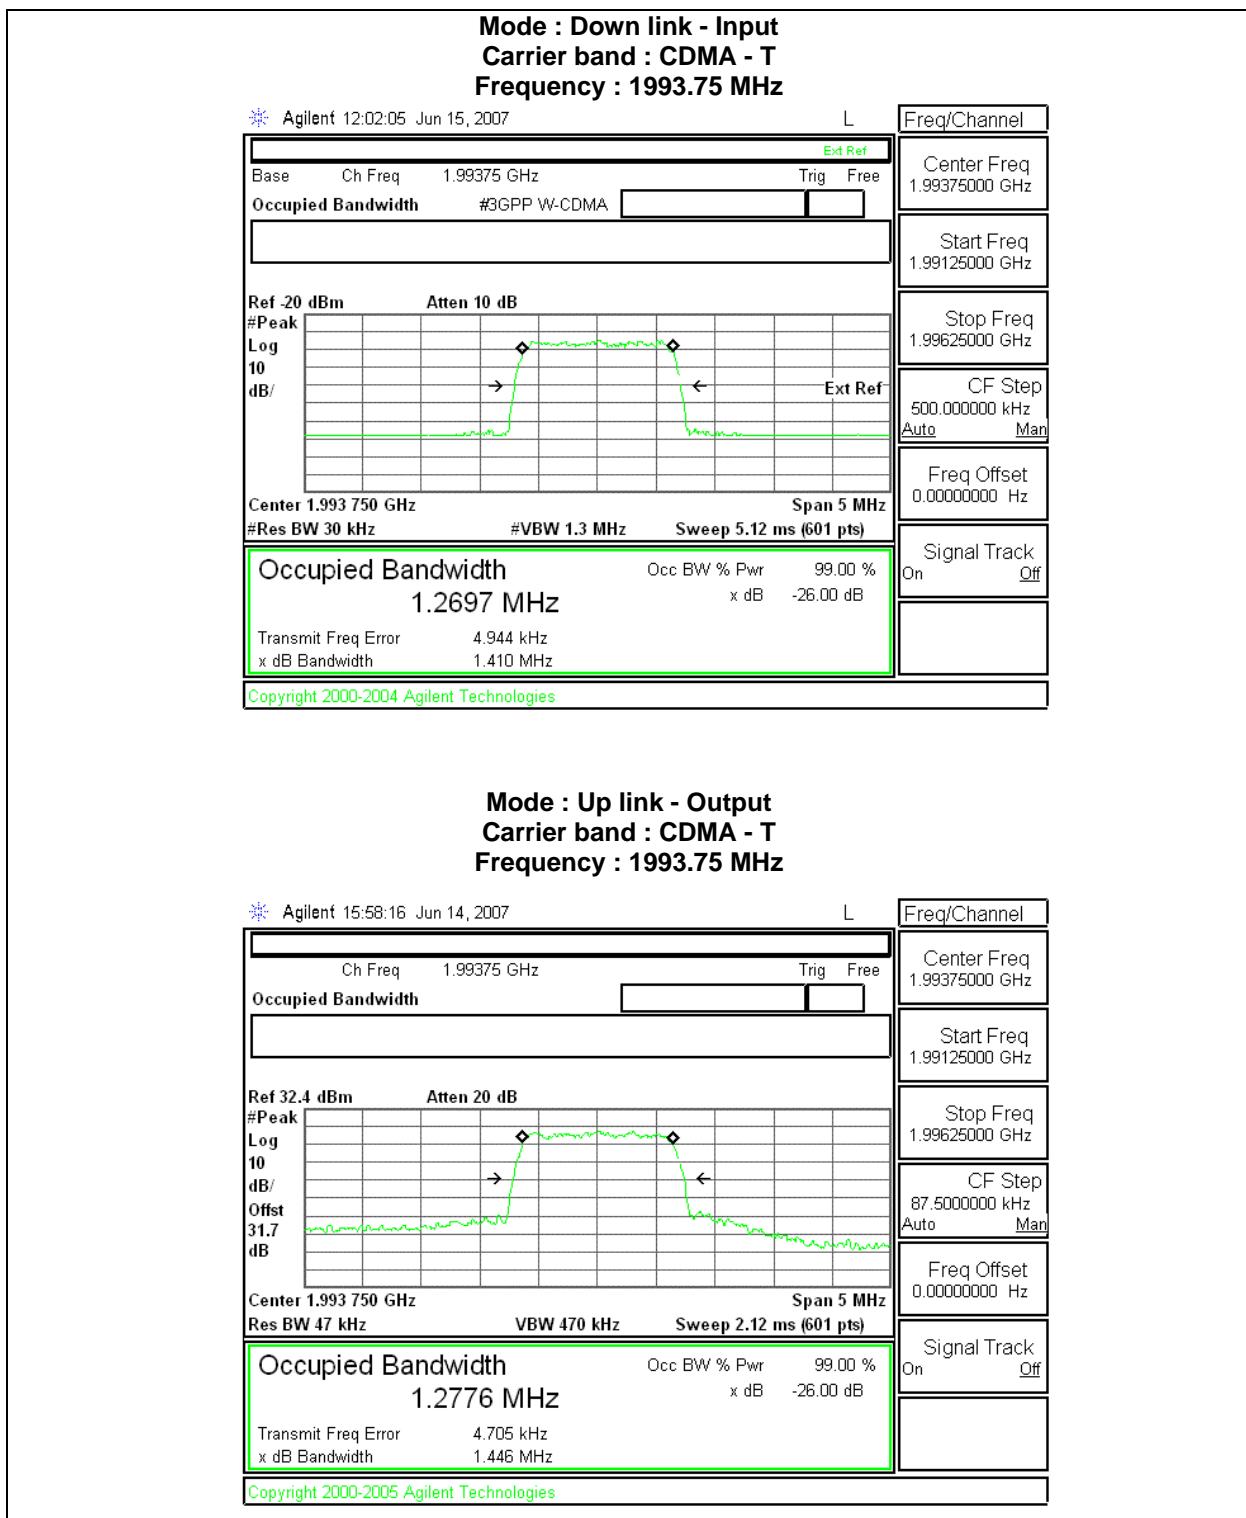

### 3.5 Test Conditions and Results – Emission Mask

Test Description	Measurements were made in the laboratory environment. Emission mask measurement was made using a direct connection between RF output of the EUT and spectrum analyzer. Measurement has been performed with the EUT set to maximum output level at low, mid and high channel frequencies.
Basic Standard	47 CFR § 2.1049,
<b>Occupied Bandwidth Limits</b>	
1. § 90.691 Emission Mask Requirements for EA-Based Systems – 25 kHz Channel Spacing – 800 MHz Operation 0 – 12.5 kHz : 0 dBc 12.5 – 37.5 kHz : $116 + 10\log_{10}(F/6.1)$ dB 37.5 kHz - : 43 plus $10\log_{10}(P)$ dB 2. § 90.669 Emission Limits – 25 kHz Channel Spacing – 900 MHz Operation On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 plus $10\log_{10}(P)$ dB or 80 dB, whichever is the lesser attenuation.	

#### Emission Mask Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1	3, 4	3, 4
Supplementary information: None		

#### Emission Mask Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/212	2006-05-12	2007-05-12
Spectrum Analyzer	Agilent	E4440A	MY44022474	2006-11-06	2007-11-06
Fixed Attenuator	H.P	8498A	3318A10568		

**Table 5 Emission Mask measured results**

**Table 5-1 Uplink results**

Carrier Band	UP LINK Bandwidth (kHz)		
	Frequency (MHz)	Emission mask	Results
iDEN 18 MHz	806	§ 90.691	Pass
	815	§ 90.691	Pass
	824	§ 90.691	Pass
iDEN 7 MHz	817	§ 90.691	Pass
	820.5	§ 90.691	Pass
	824	§ 90.691	Pass
iDEN 5 MHz	896	§ 90.669	Pass
	898.5	§ 90.669	Pass
	901	§ 90.669	Pass


Supplementary information: Modulation signal 16-QAM, 99% bandwidth  
-Measurement was made on iDEN mode only


**Table 5-2 Downlink results**


Carrier Band	DOWN LINK Bandwidth (kHz)		
	Frequency (MHz)	Input channel	Results
iDEN 18 MHz	851	§ 90.691	Pass
	860	§ 90.691	Pass
	869	§ 90.691	Pass
iDEN 7 MHz	862	§ 90.691	Pass
	865.5	§ 90.691	Pass
	869	§ 90.691	Pass
iDEN 5 MHz	935	§ 90.669	Pass
	937.5	§ 90.669	Pass
	940	§ 90.669	Pass


Supplementary information: Modulation signal 16-QAM, 99% bandwidth  
-Measurement was made on iDEN mode only


**Figure 3 Emission Mask Plots**

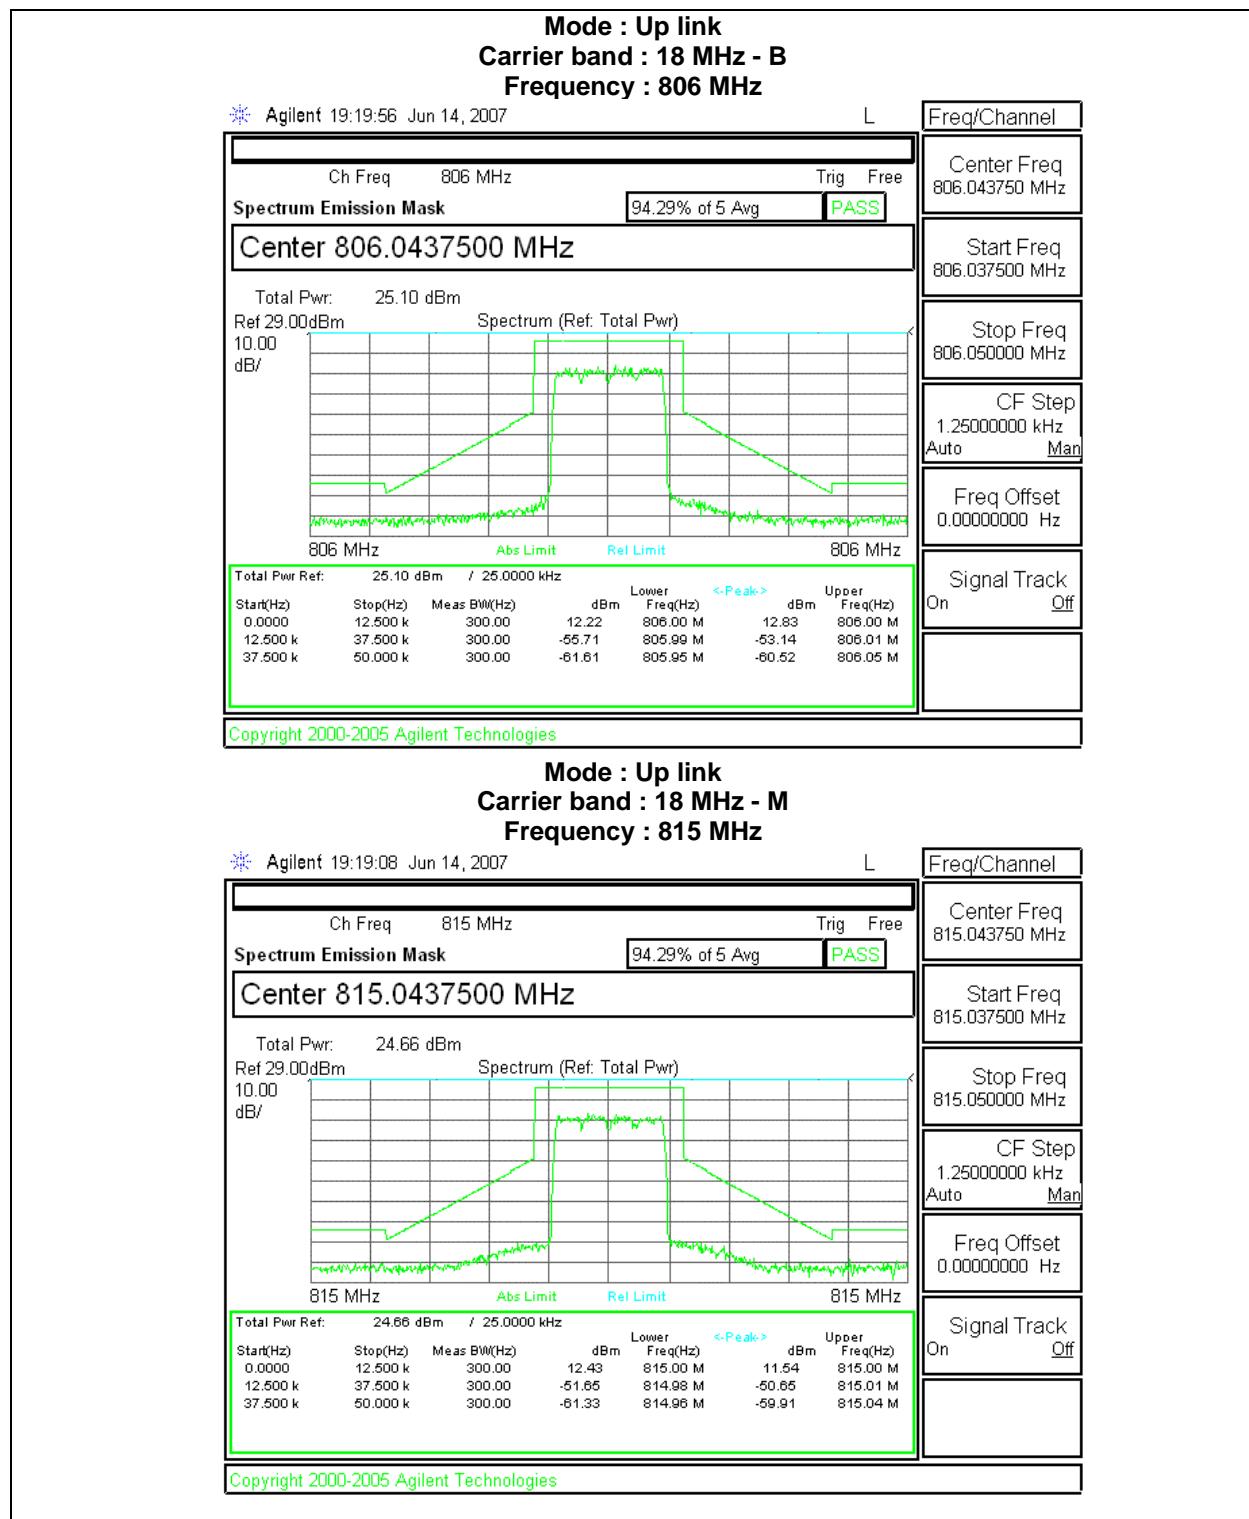

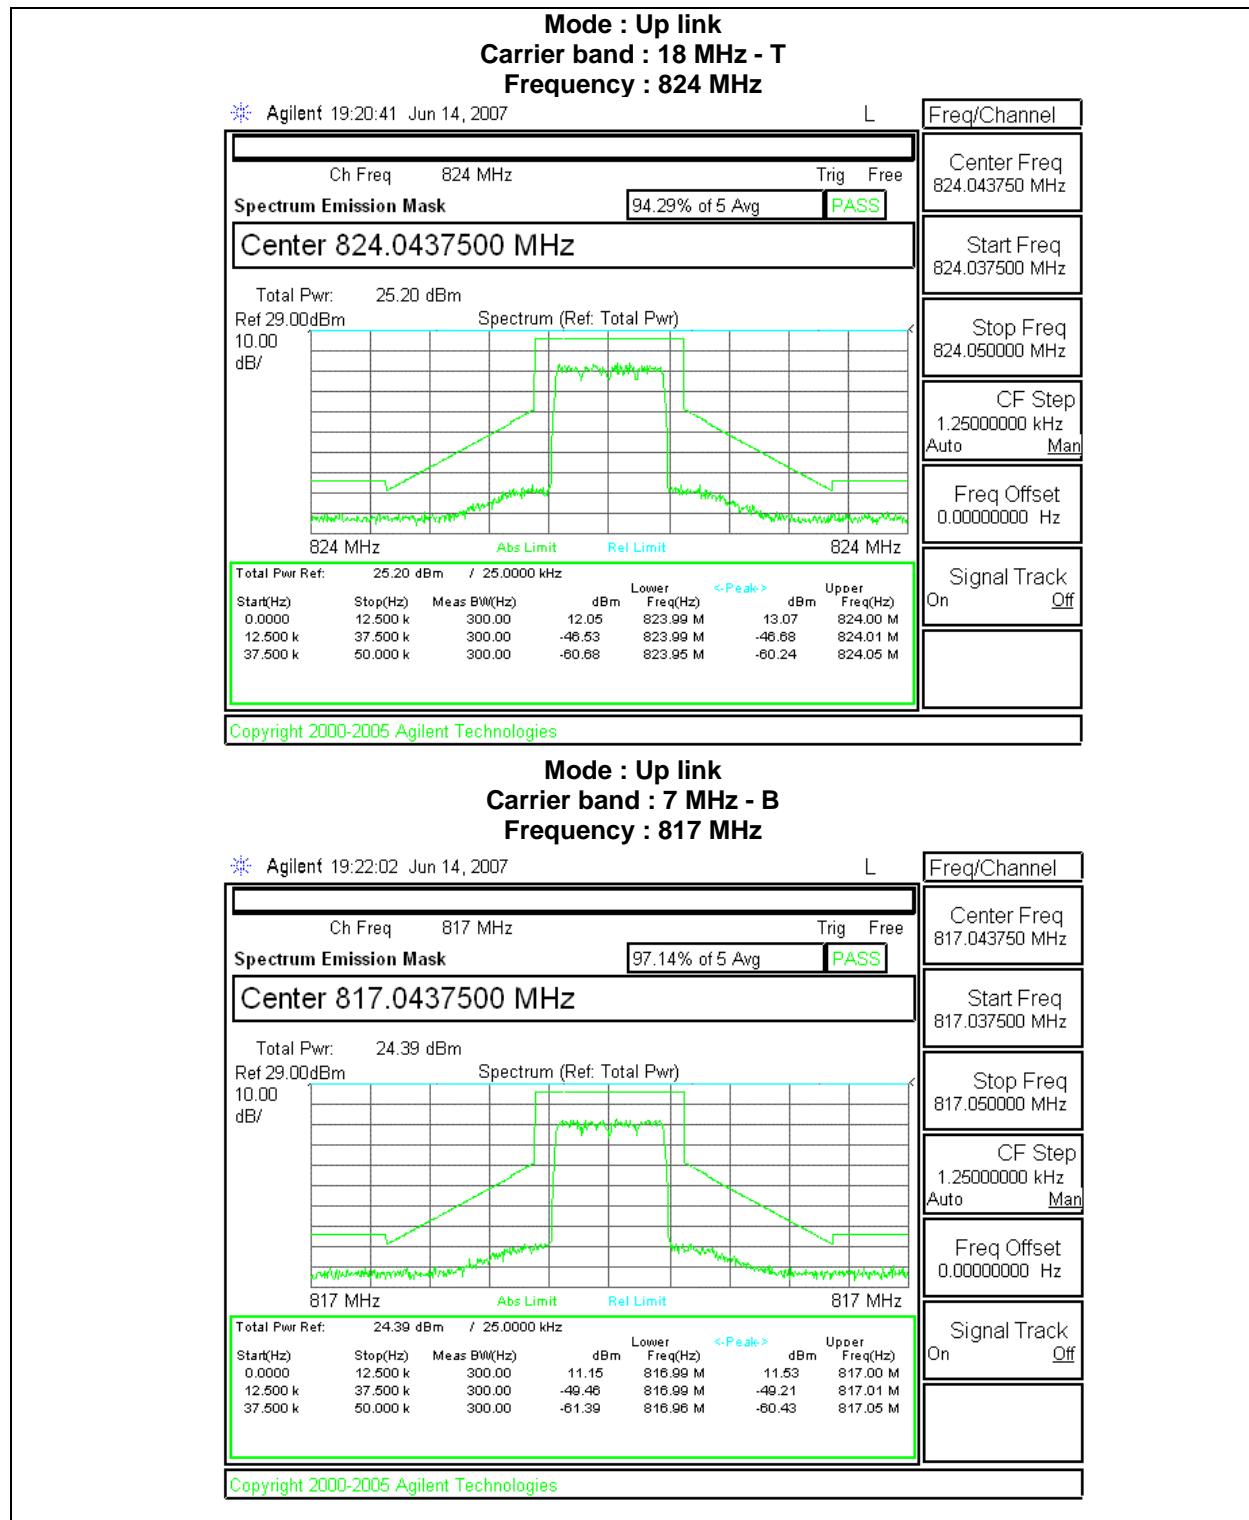


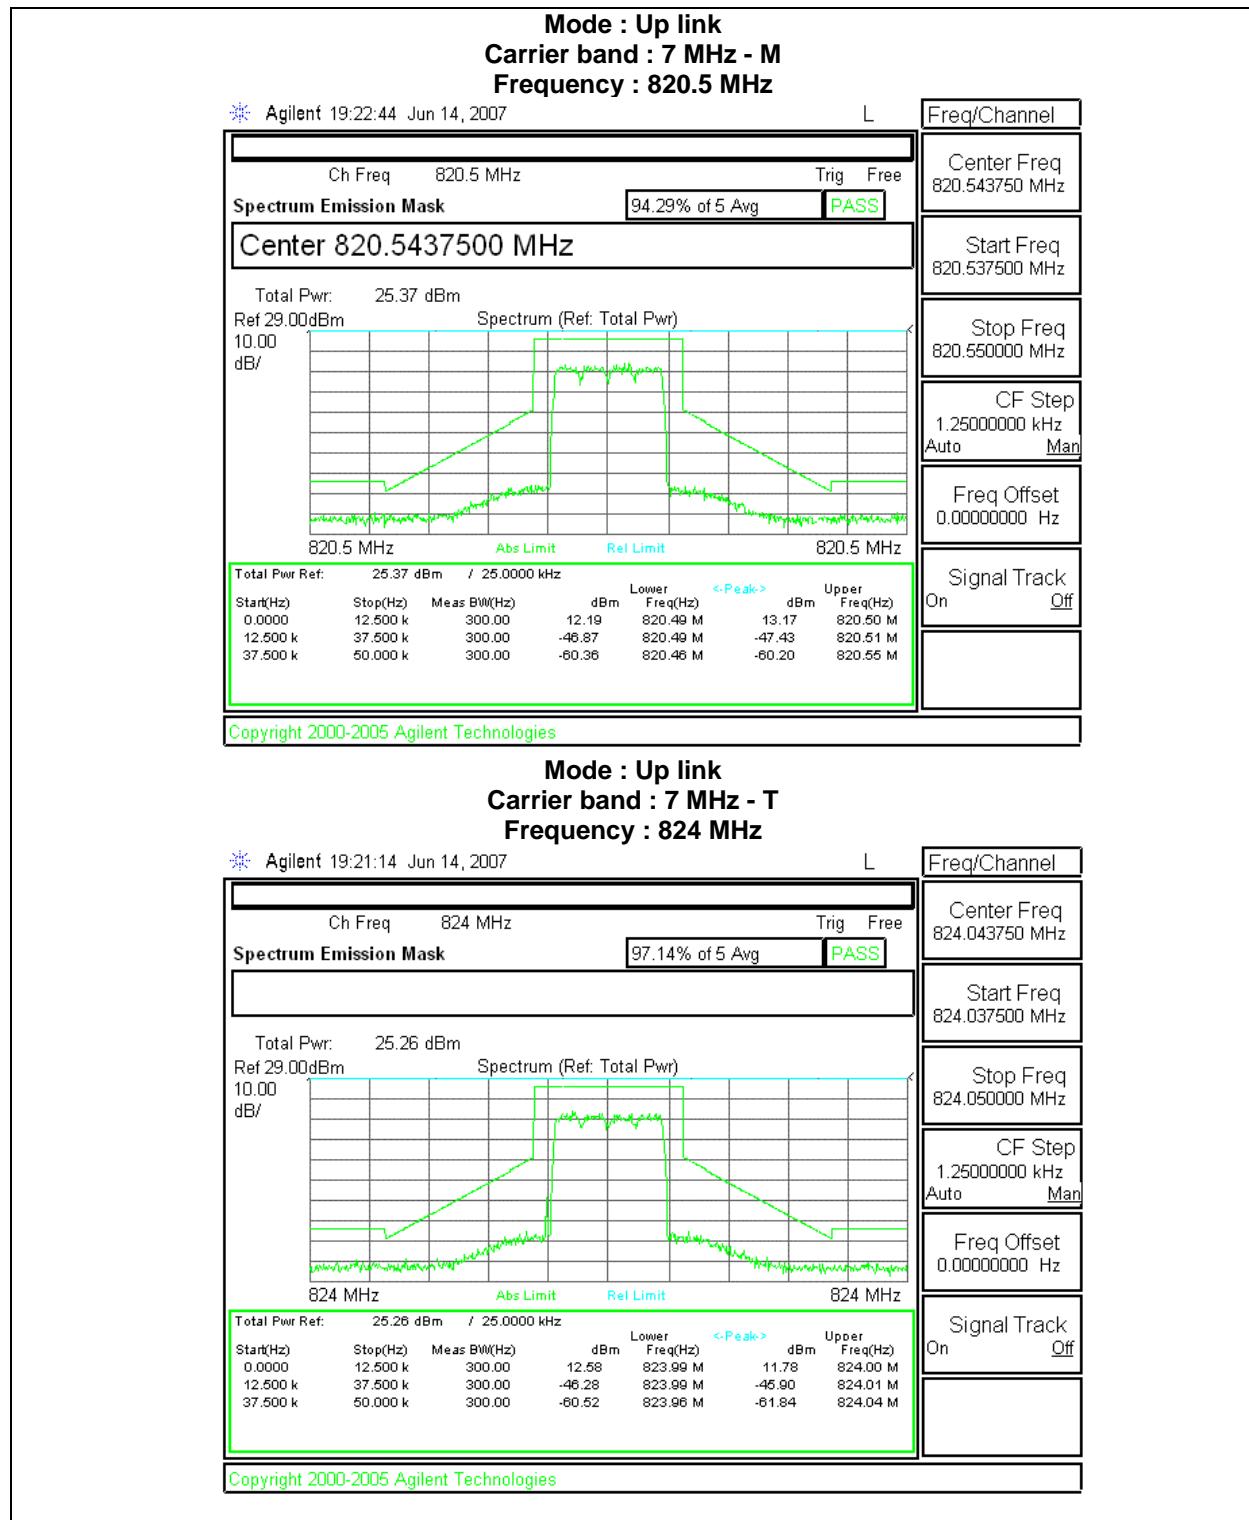

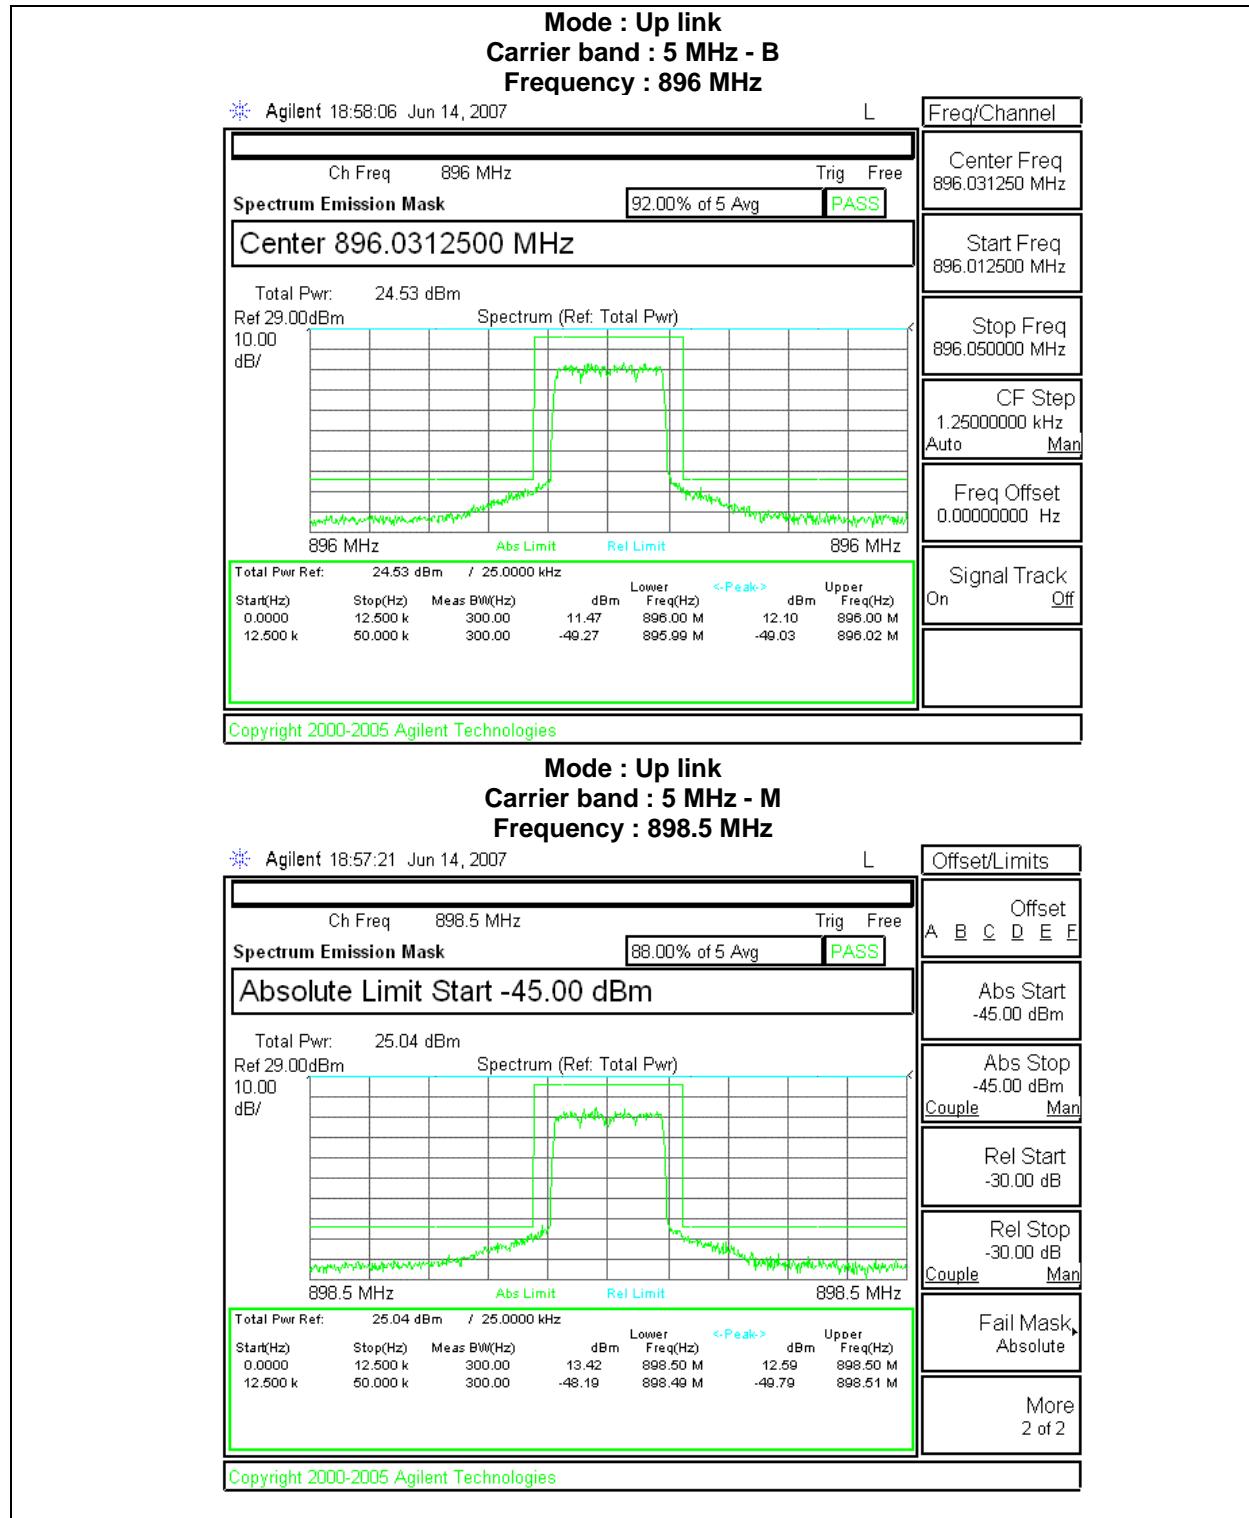


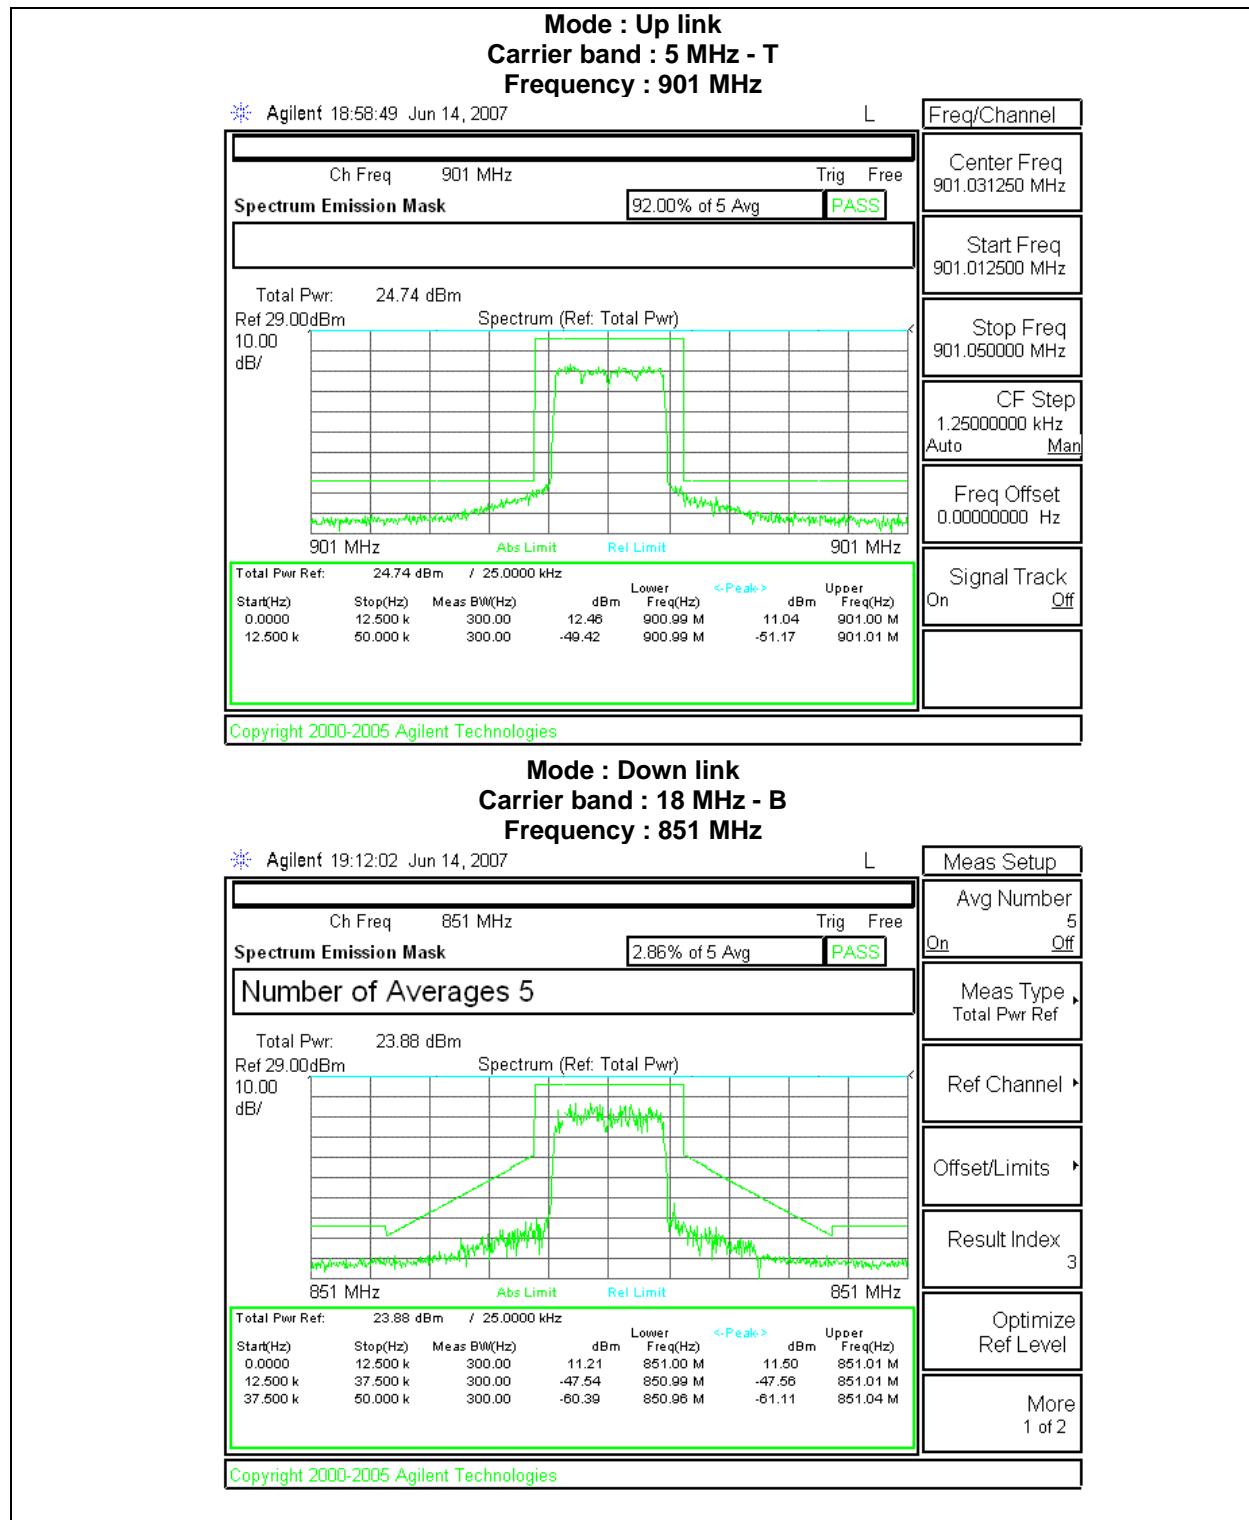



**Mode : Down link**  
**Carrier band : 18 MHz - M**  
**Frequency : 860 MHz**

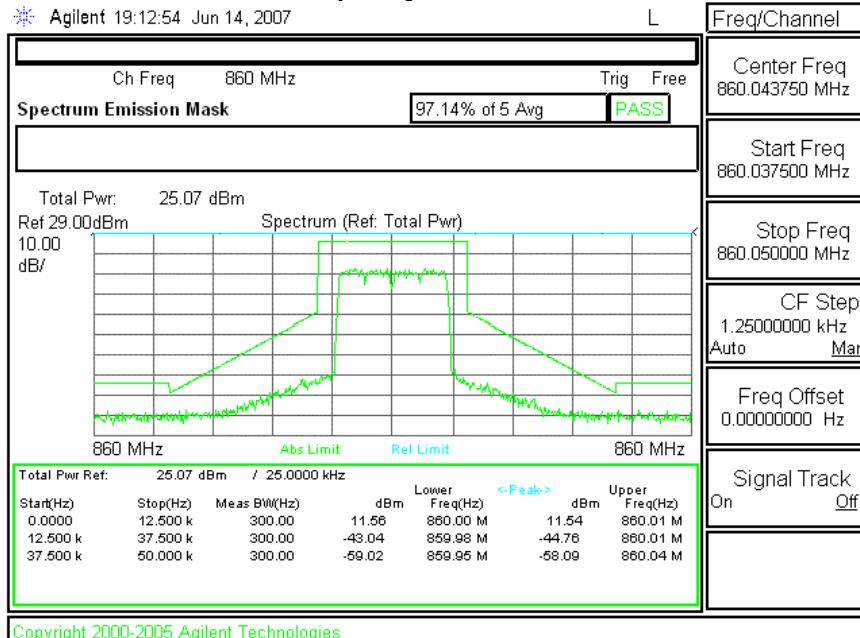


**Mode : Down link**  
**Carrier band : 18 MHz - T**  
**Frequency : 869 MHz**

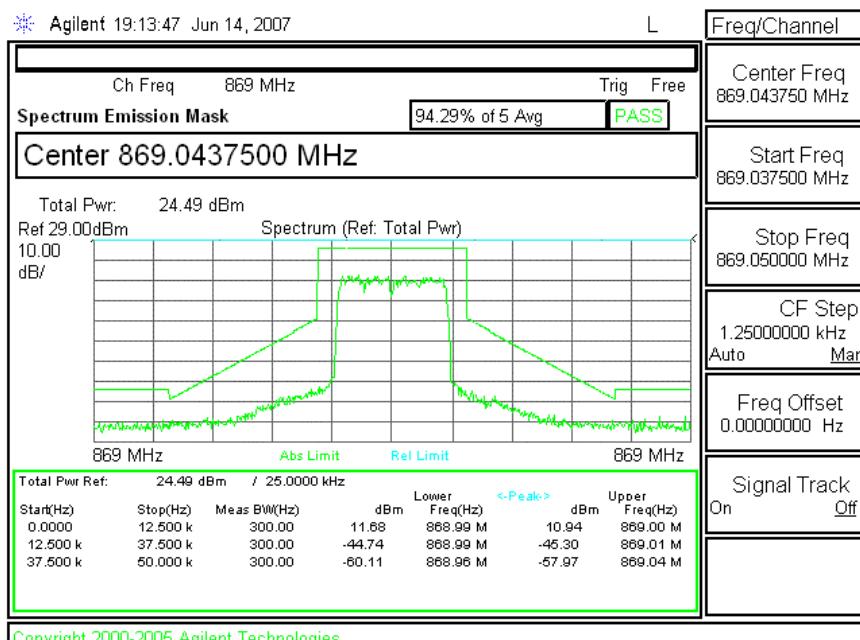

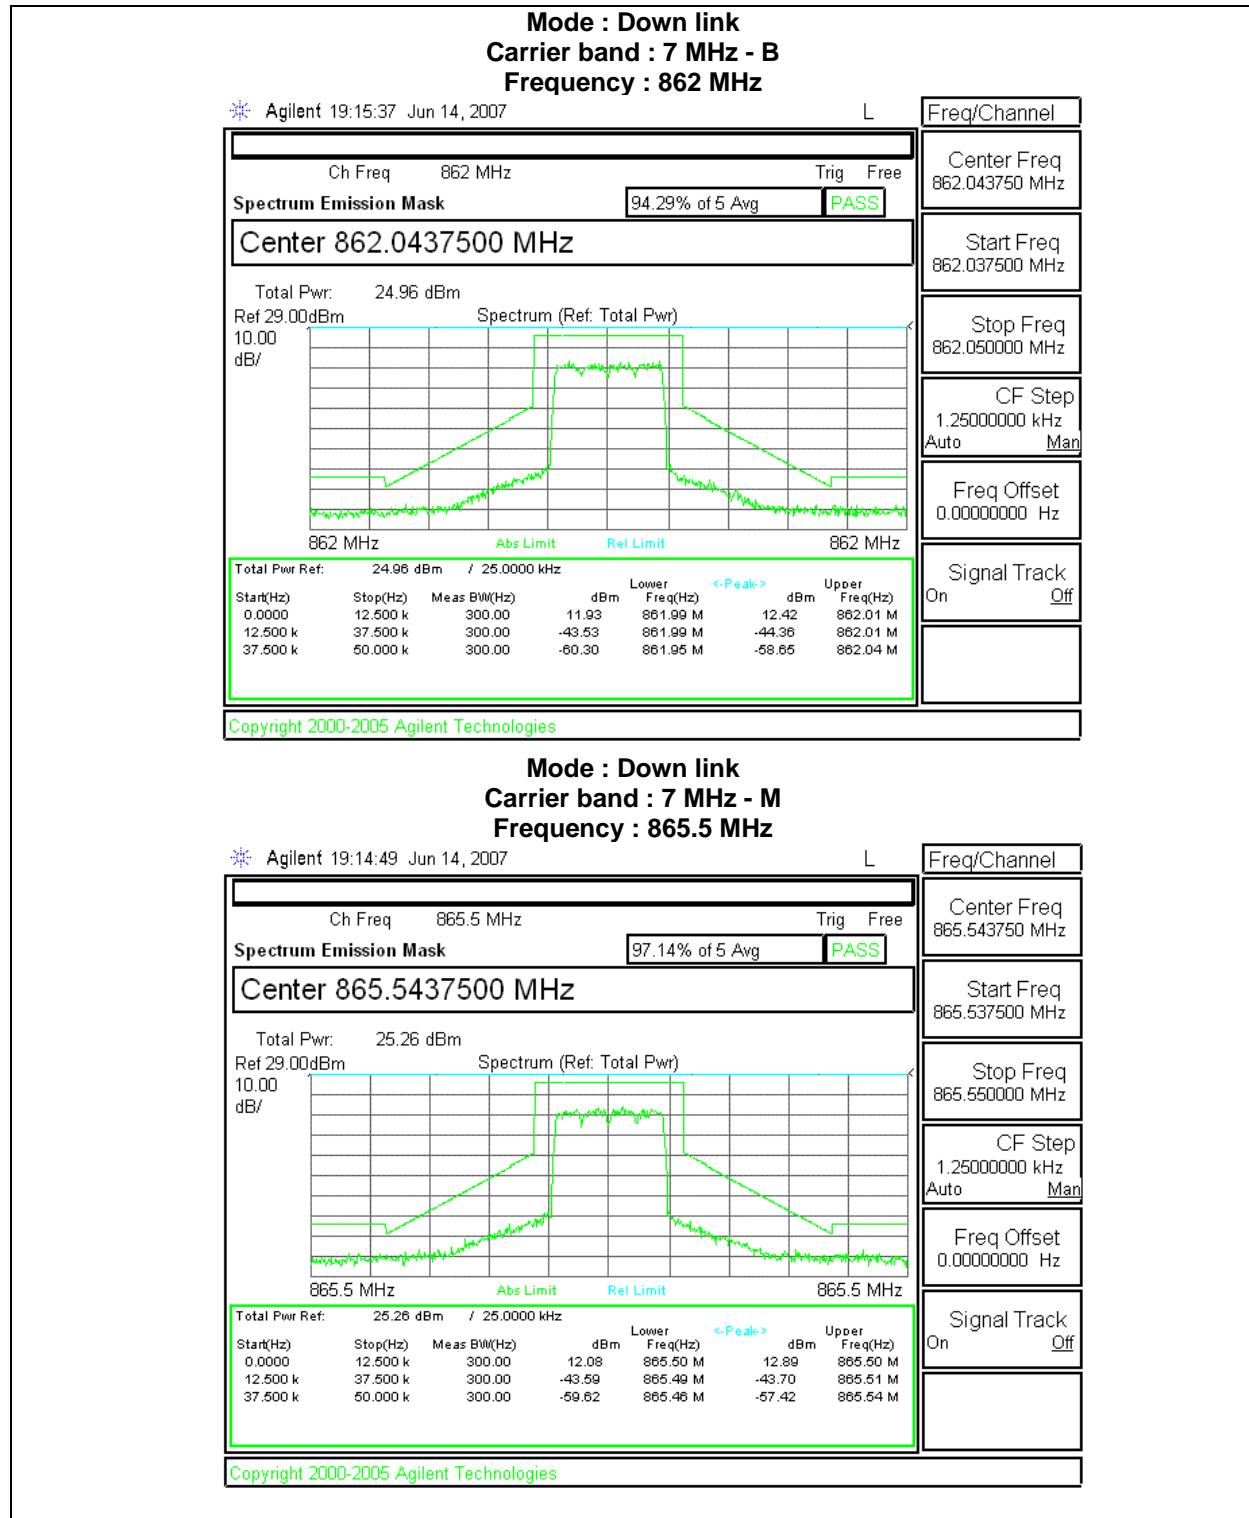

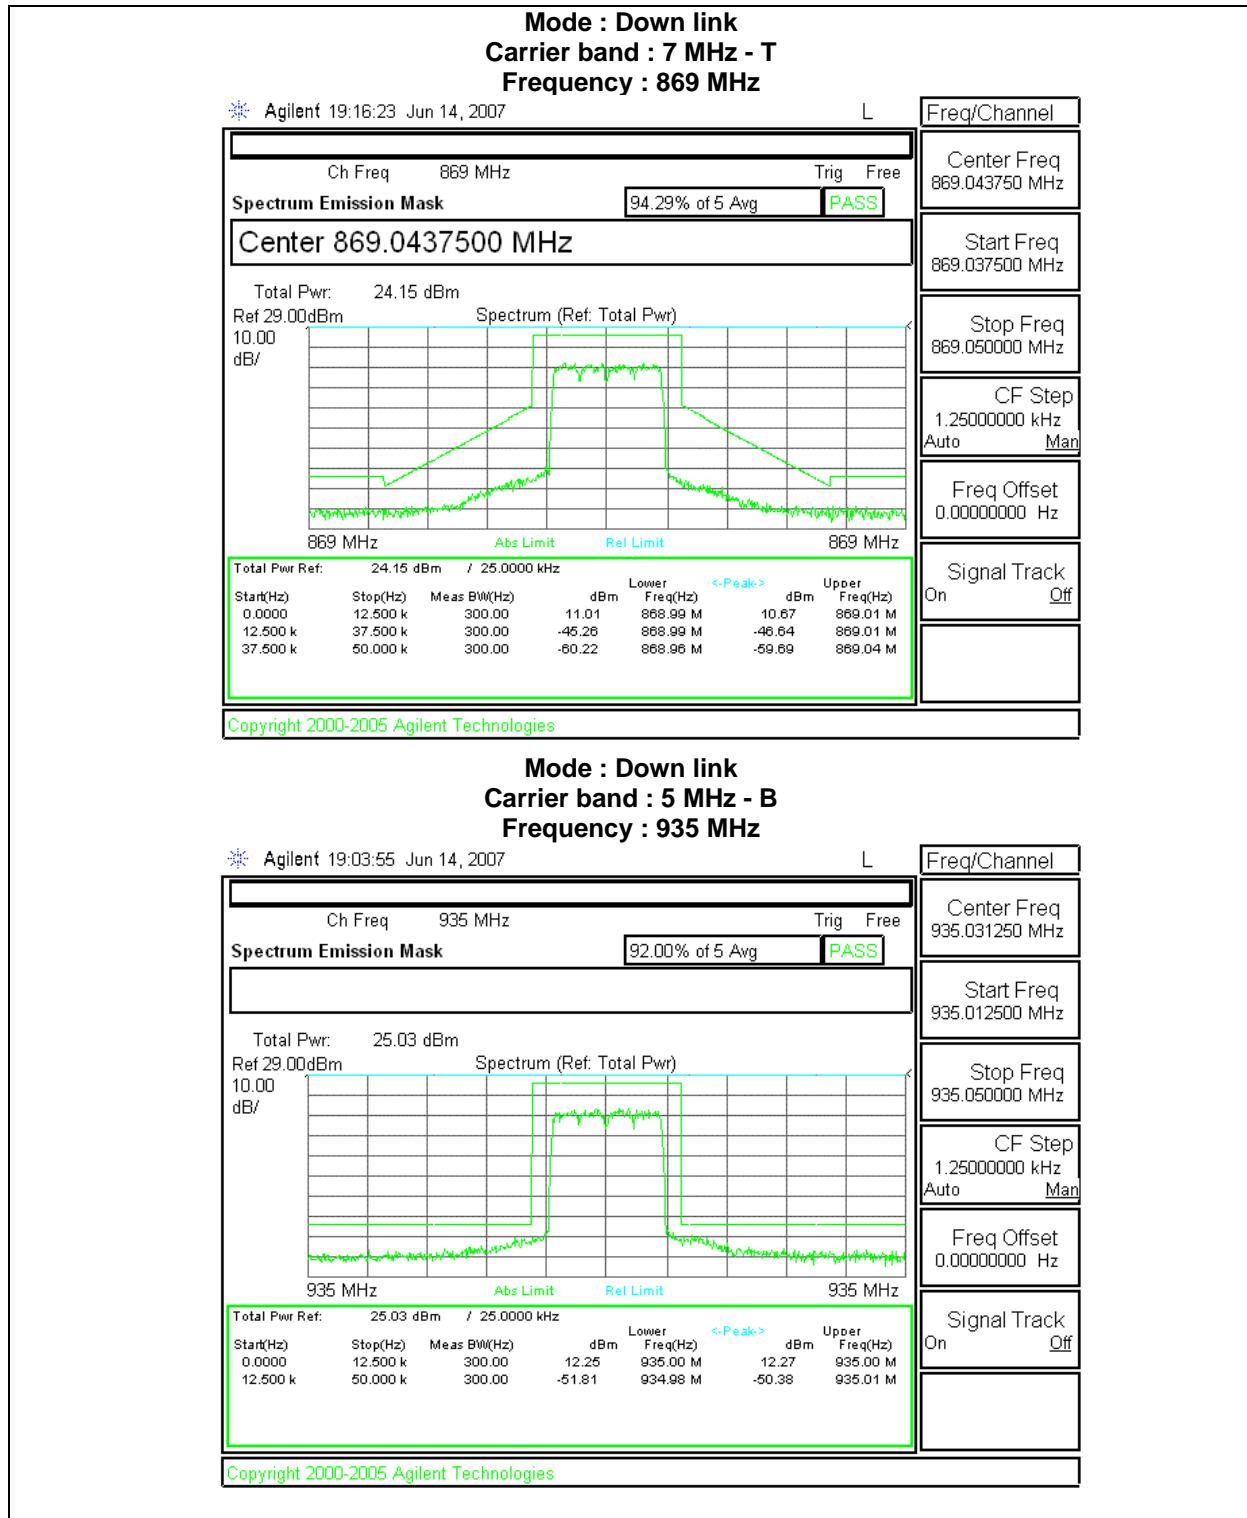

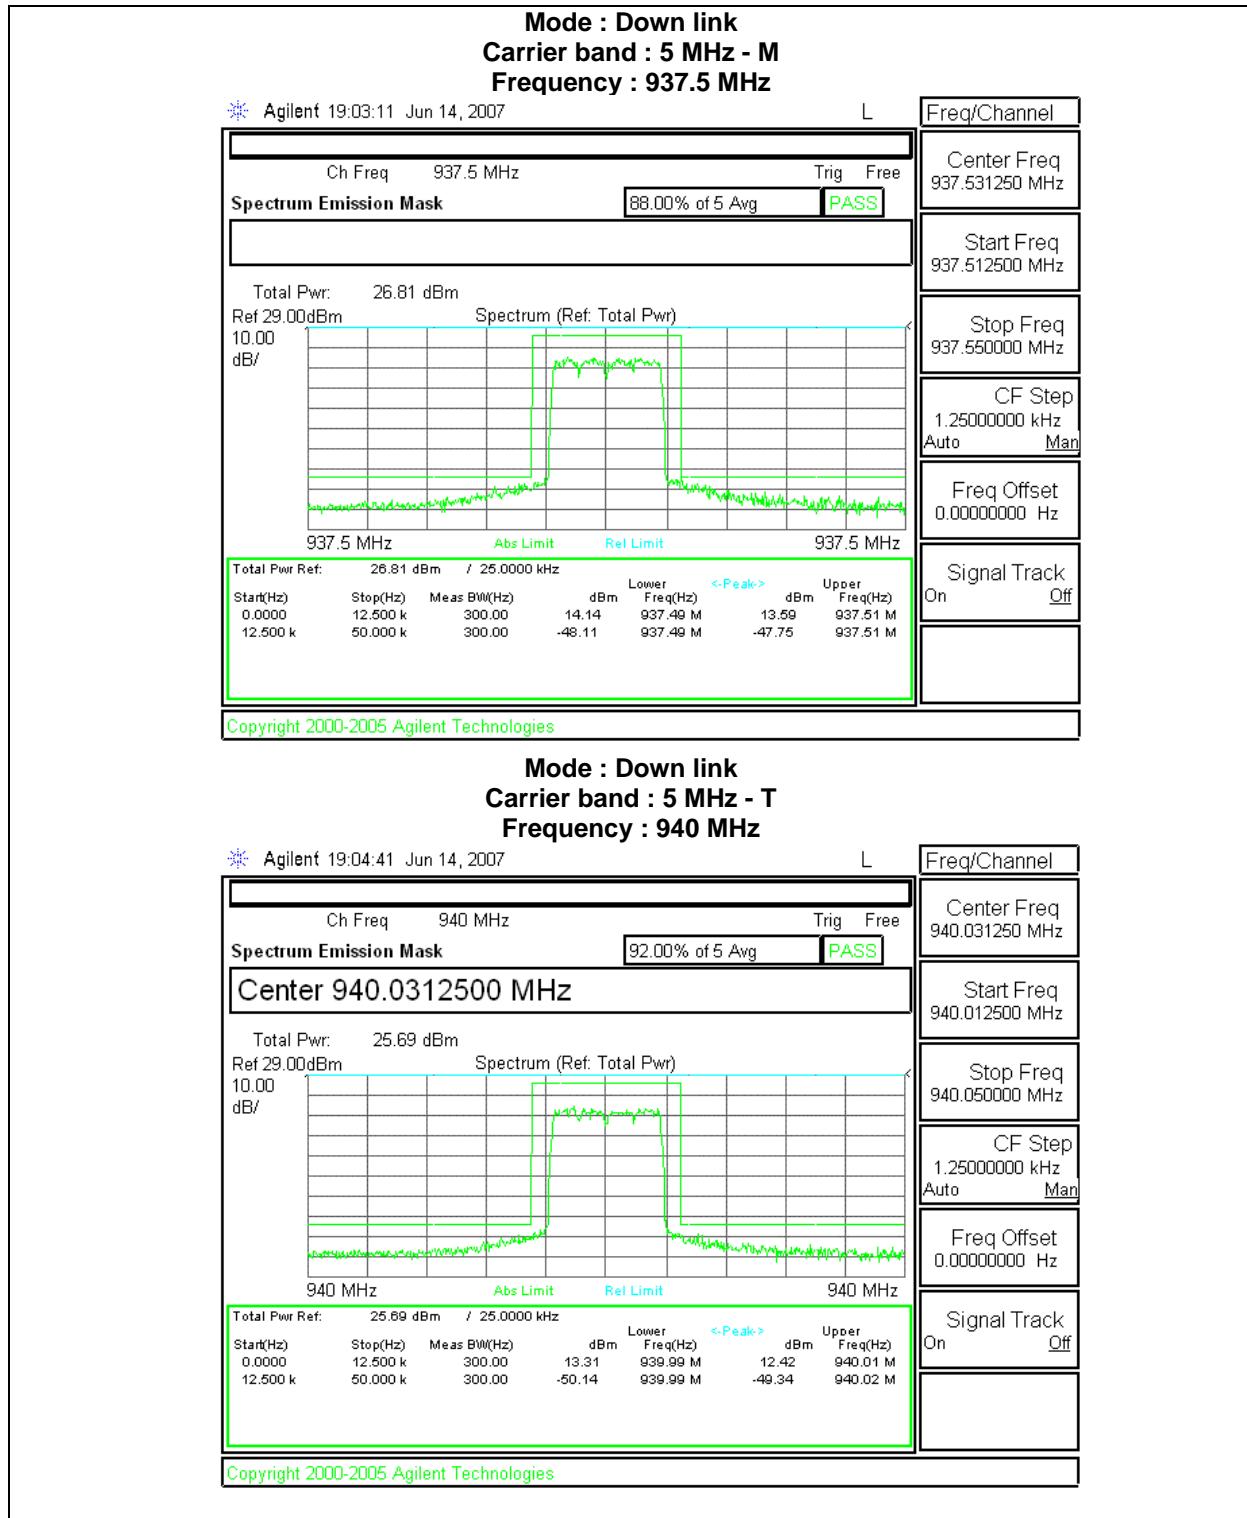

### 3.6 Test Conditions and Results – Spurious Emission at Antenna Terminal

Test Description	Measurements were made in the laboratory environment. Conducted spurious emission measurement was made using a direct connection between RF output of the EUT and spectrum analyzer. A modulated carrier signal from the generator was applied to the both uplink and down link port of the EUT. Measurement has been performed with the EUT set to maximum output level at low, mid and high channel frequencies. The spectrum was investigated from 30 MHz to 10 <sup>th</sup> harmonics of carrier.  Inter-modulation requirements were performed with two modulated carriers set at 1 MHz deviation. One carrier was set at the band edge of both Uplink and Downlink and other carrier was set at 1 MHz deviation from the first carrier.			
Basic Standard	47 CFR § 2.1051, § 90.210 & § 90.669, § 24.238			
<b>Spurious Emission Limits</b>				
<p>§ 90.210 &amp; § 90.669 Emission limit : On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power(P) by at least <math>43 + 10\log_{10}(P)</math> dB or 80 dB, whichever is the lesser attenuation.</p> <p>§ 24.238 Emission limitations for Broadband PCS equipment Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</p>				

#### Conducted Spurious Emission Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1	3, 4	3, 4
Supplementary information: None		

#### Conducted spurious emission Spectrum Analyzer Settings

Frequency Range (MHz)	Resolution Bandwidth	Resolution Bandwidth
30 MHz ~ 1 GHz	100 kHz	300 kHz
1 GHz ~ 10 GHz	1 MHz	3 MHz
Supplementary information:		

### Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Signal Generator	Aeroflex	IFR3413	341006/212	2006-05-12	2007-05-12
Spectrum Analyzer	Agilent	E4440A	MY44022474	2006-11-06	2007-11-06
Fixed Attenuator	H.P	8498A	3318A10568		

**Table 6 Antenna terminal Conducted spurious emission results**

#### Up Link mode

Carrier Band	Tuned Frequency (MHz)	Loss offset (dB)	Spurious emission measured (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	806	32.8	-36.62	-13	23.62
	815	32.8	-36.59	-13	23.59
	824	32.8	-36.38	-13	23.38
iDEN 7 MHz	817	32.8	-36.38	-13	23.38
	820.5	32.8	-36.38	-13	23.38
	824	32.8	-36.53	-13	23.53
iDEN 5 MHz	896	32.8	-36.66	-13	23.66
	898.5	32.8	-36.54	-13	23.54
	901	32.8	-36.37	-13	23.37
CDMA	1851.25	32.8	-36.69	-13	23.69
	1887.5	32.8	-36.20	-13	23.20
	1913.75	32.8	-36.41	-13	23.41

#### Supplementary information:

- Carrier signal was modulated with iDEN 16-QAM / CDMA. Power measurement : Peak power measured
- For each tuned carrier frequency, the maximum spurious emissions detected were recorded.

#### Up Link Two carrier Intermodulation

Carrier Band	Tuned Frequency (MHz)	Loss offset (dB)	Spurious emission measured (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	Low edge	32.8	-39.95	-13	26.95
	High edge	32.8	-51.08	-13	38.08
iDEN 7 MHz	Low edge	32.8	-42.09	-13	29.09
	High edge	32.8	-54.11	-13	41.11
iDEN 5 MHz	Low edge	32.8	-37.90	-13	24.90
	High edge	32.8	-48.59	-13	35.59
CDMA	Low edge	32.8	-38.48	-13	25.48
	High edge	32.8	-42.31	-13	29.31

#### Supplementary information:

- Carrier signal was modulated with iDEN 16-QAM/CDMA, Power measurement : Peak power measured
- For each tuned carrier frequency, the maximum spurious emission detected was recorded.


**Down link mode**


Carrier Band	Tuned Frequency (MHz)	Loss offset (dB)	Spurious emission measured (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	851	32.8	-36.48	-13	-12.33
	860	32.8	-36.79	-13	-13.49
	869	32.8	-36.86	-13	-10.34
iDEN 7 MHz	862	32.8	-36.59	-13	-11.50
	865.5	32.8	-36.60	-13	-13.23
	869	32.8	-36.59	-13	-10.20
iDEN 5 MHz	935	32.8	-36.76	-13	-14.52
	937.5	32.8	-36.91	-13	-13.28
	940	32.8	-36.48	-13	-14.29
CDMA	1931.25	32.8	-36.48	-13	44.11
	1967.5	32.8	-36.60	-13	42.70
	1993.75	32.8	-36.35	-13	32.34
Supplementary information:					
<ul style="list-style-type: none"> <li>- Carrier signal was modulated with iDEN 16-QAM/CDMA, Power measurement : Peak power measured</li> <li>- For each tuned carrier frequency, the maximum spurious emission detected was recorded.</li> </ul>					


**Down Link Two carrier Intermodulation**


Carrier Band	Tuned Frequency (MHz)	Loss offset (dB)	Spurious emission measured (dBm)	Limit (dBm)	Margin (dB)
iDEN 18 MHz	Low edge	32.8	-40.24	-13	-15.61
	High edge	32.8	-41.02	-13	-18.90
iDEN 7 MHz	Low edge	32.8	-38.28	-13	-17.56
	High edge	32.8	-40.68	-13	-18.73
iDEN 5 MHz	Low edge	32.8	-41.72	-13	-17.10
	High edge	32.8	-37.69	-13	-20.83
CDMA	Low edge	32.8	-39.09		
	High edge	32.8	-42.25		
Supplementary information:					
<ul style="list-style-type: none"> <li>- Carrier signal was modulated with iDEN 16-QAM/CDMA, Power measurement : Peak power measured</li> <li>- For each tuned carrier frequency, the maximum spurious emission detected was recorded.</li> </ul>					


Figure 7 Conducted Spurious Emission plots at Antenna terminal

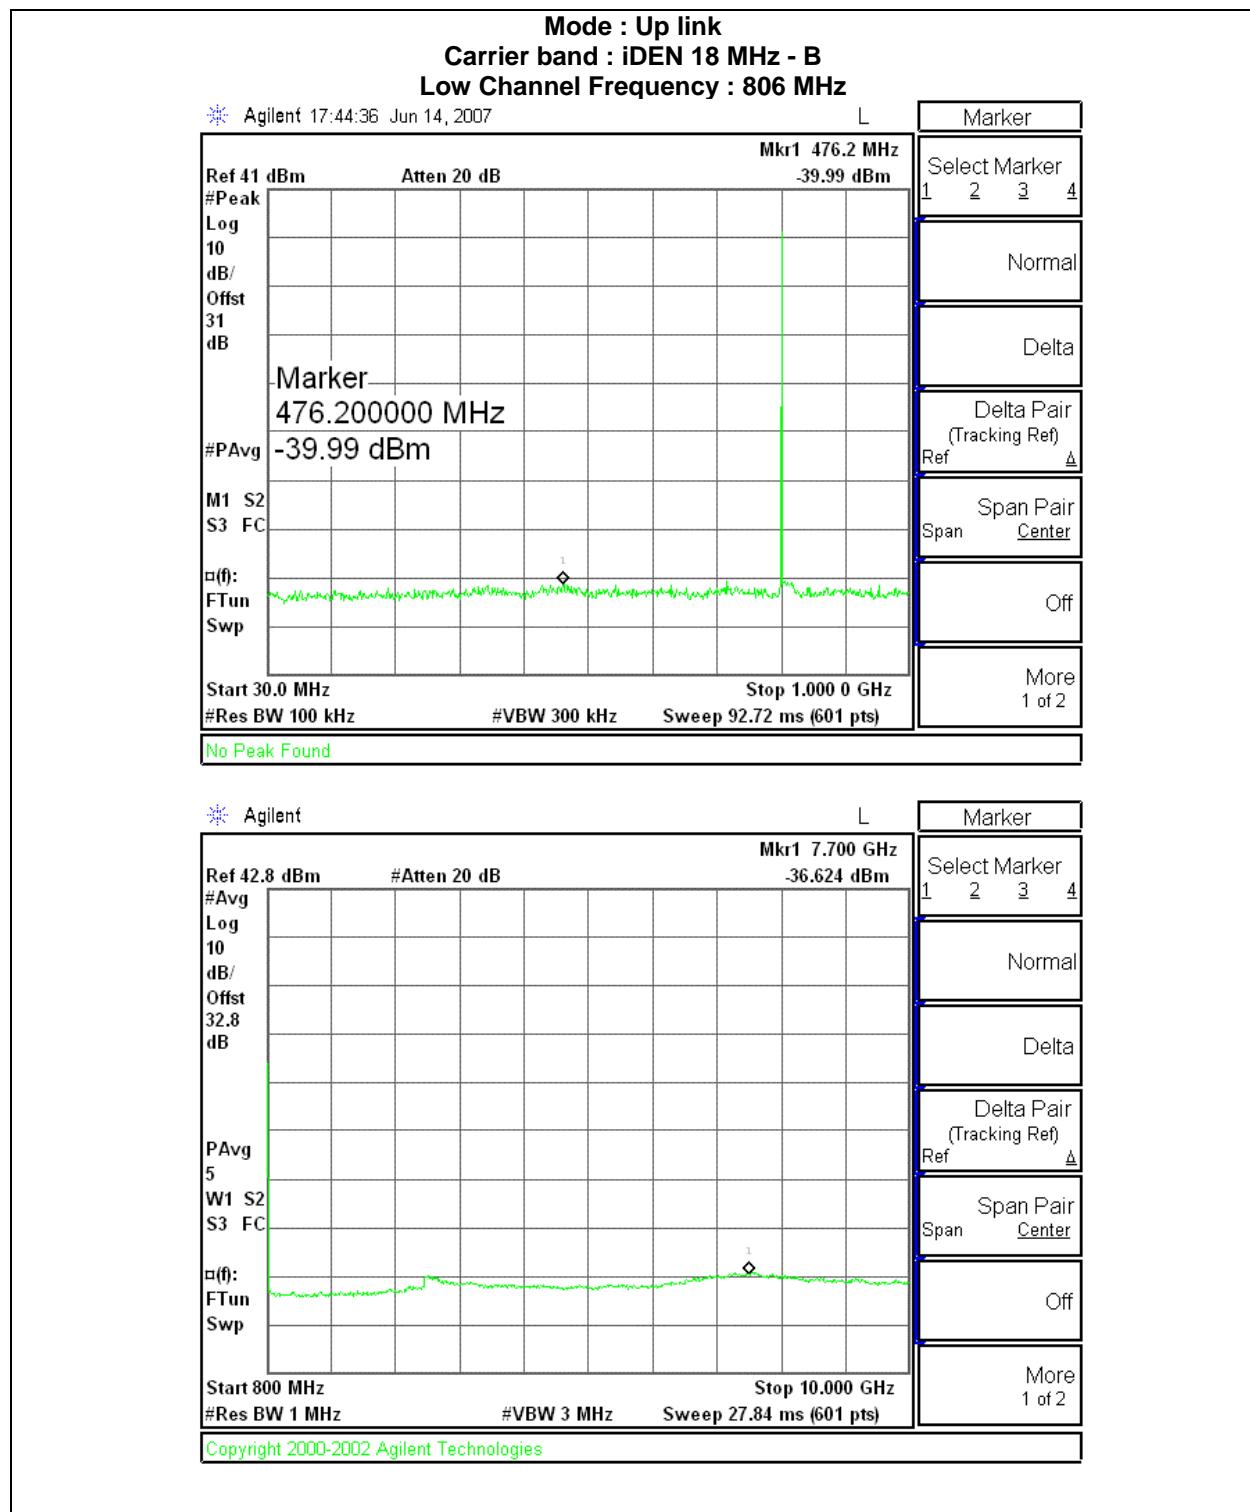


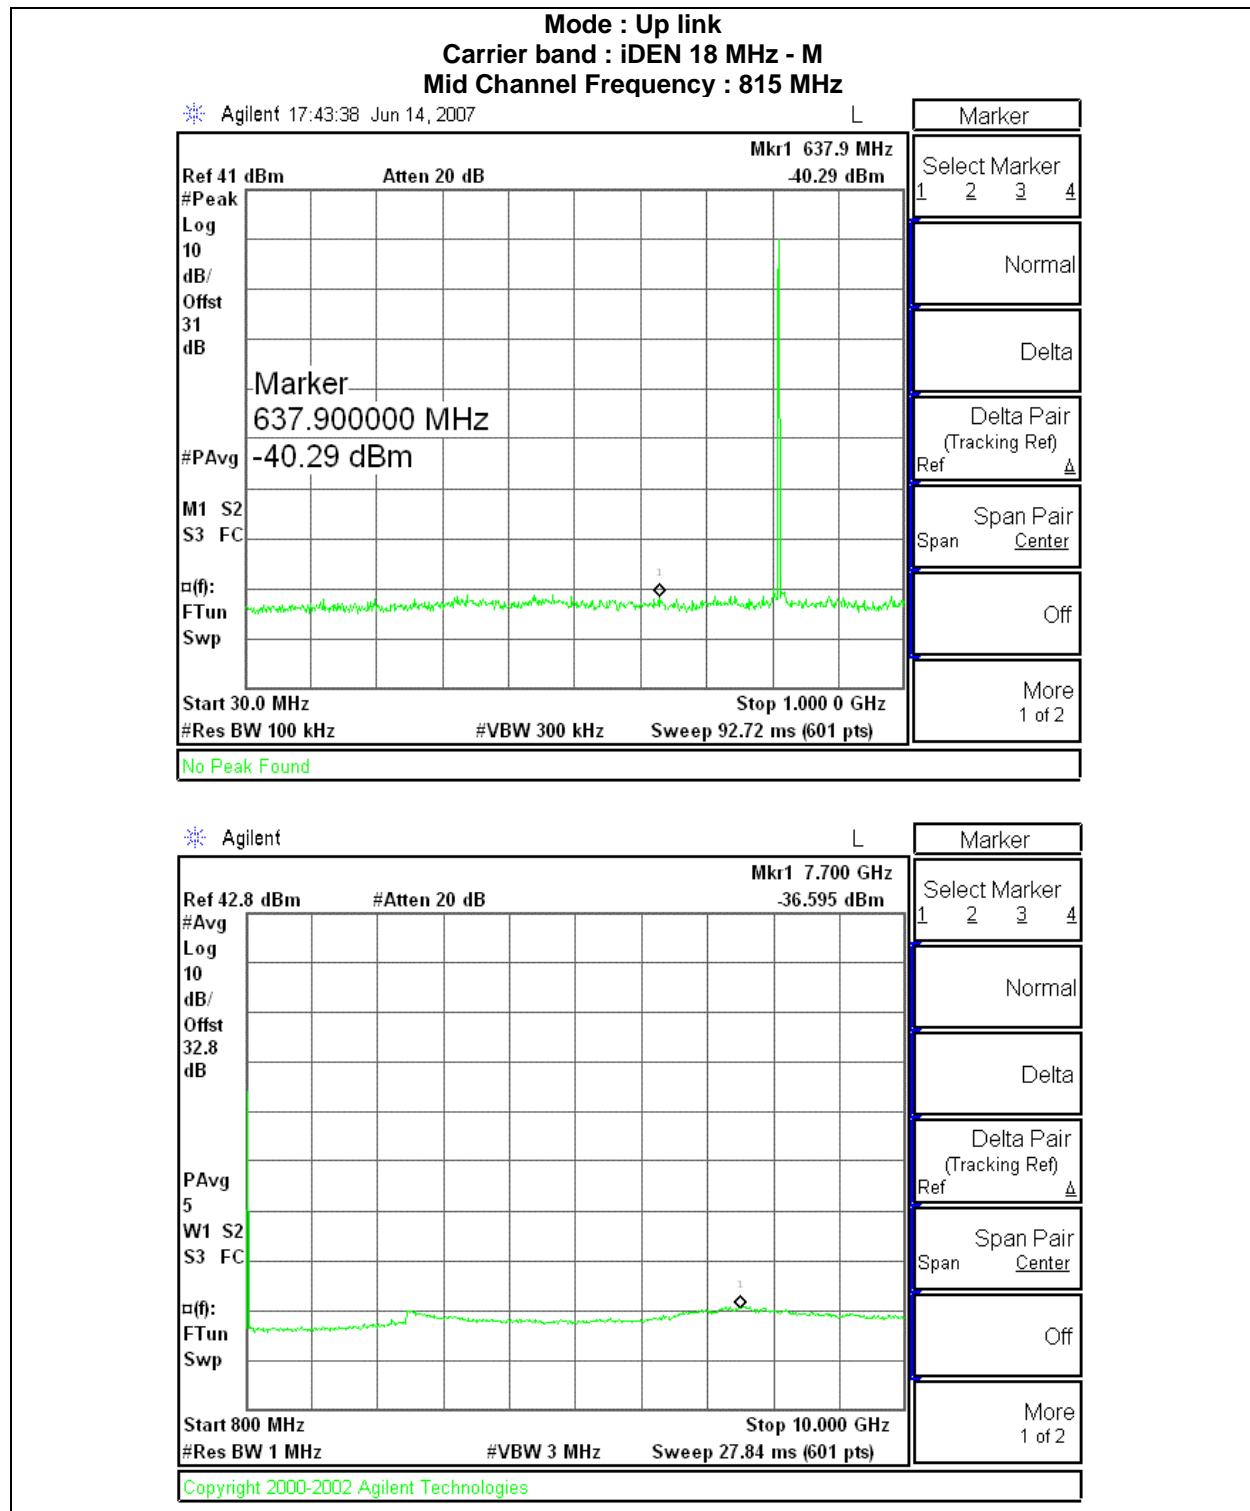


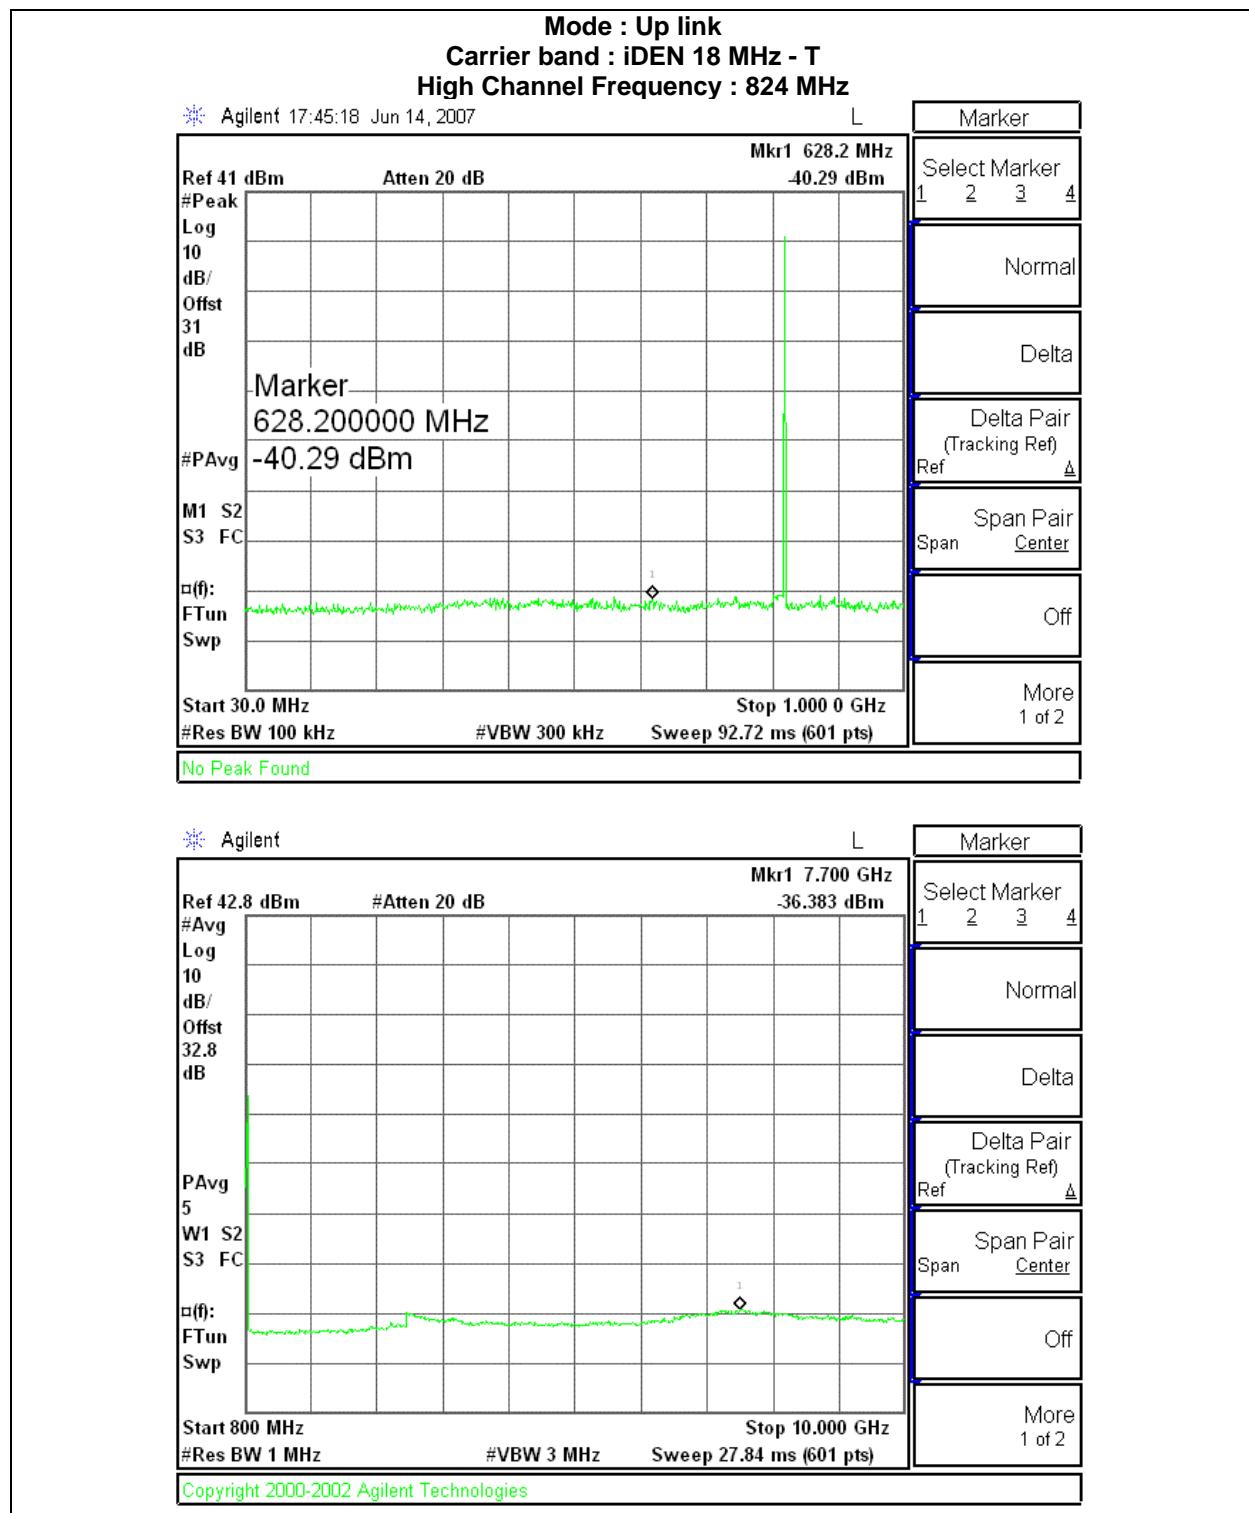


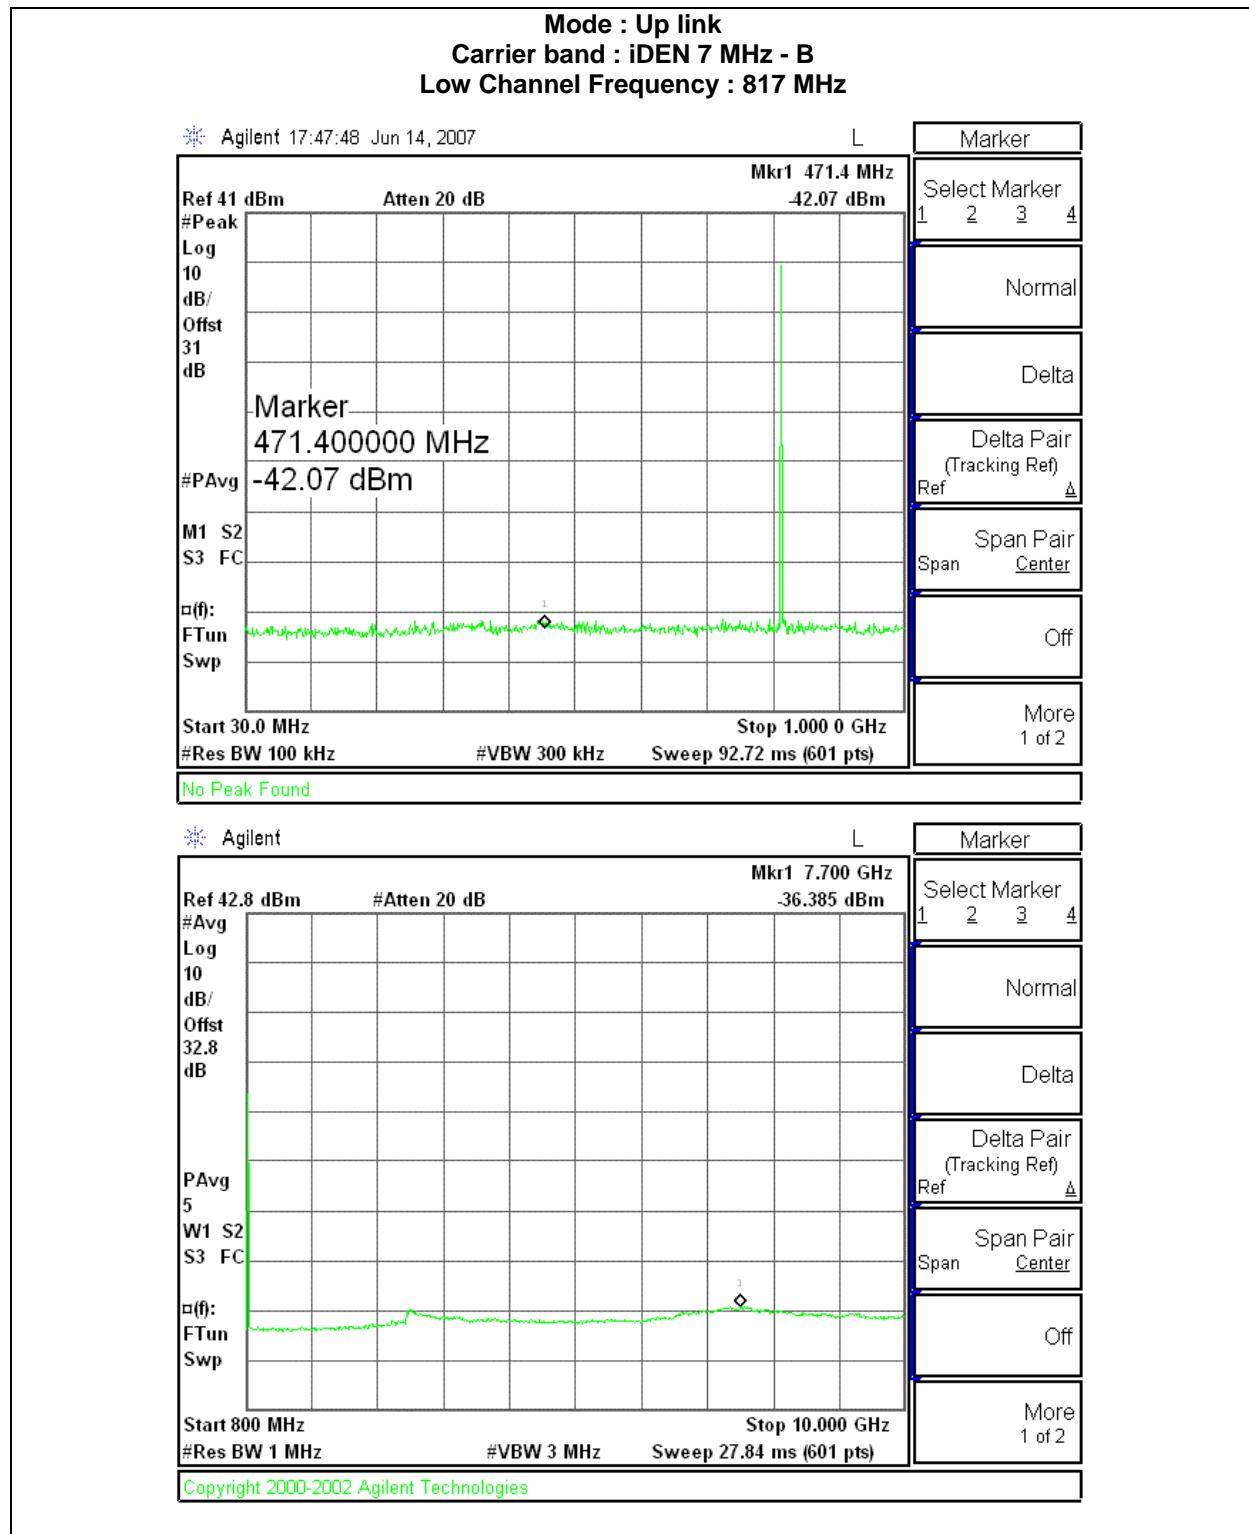


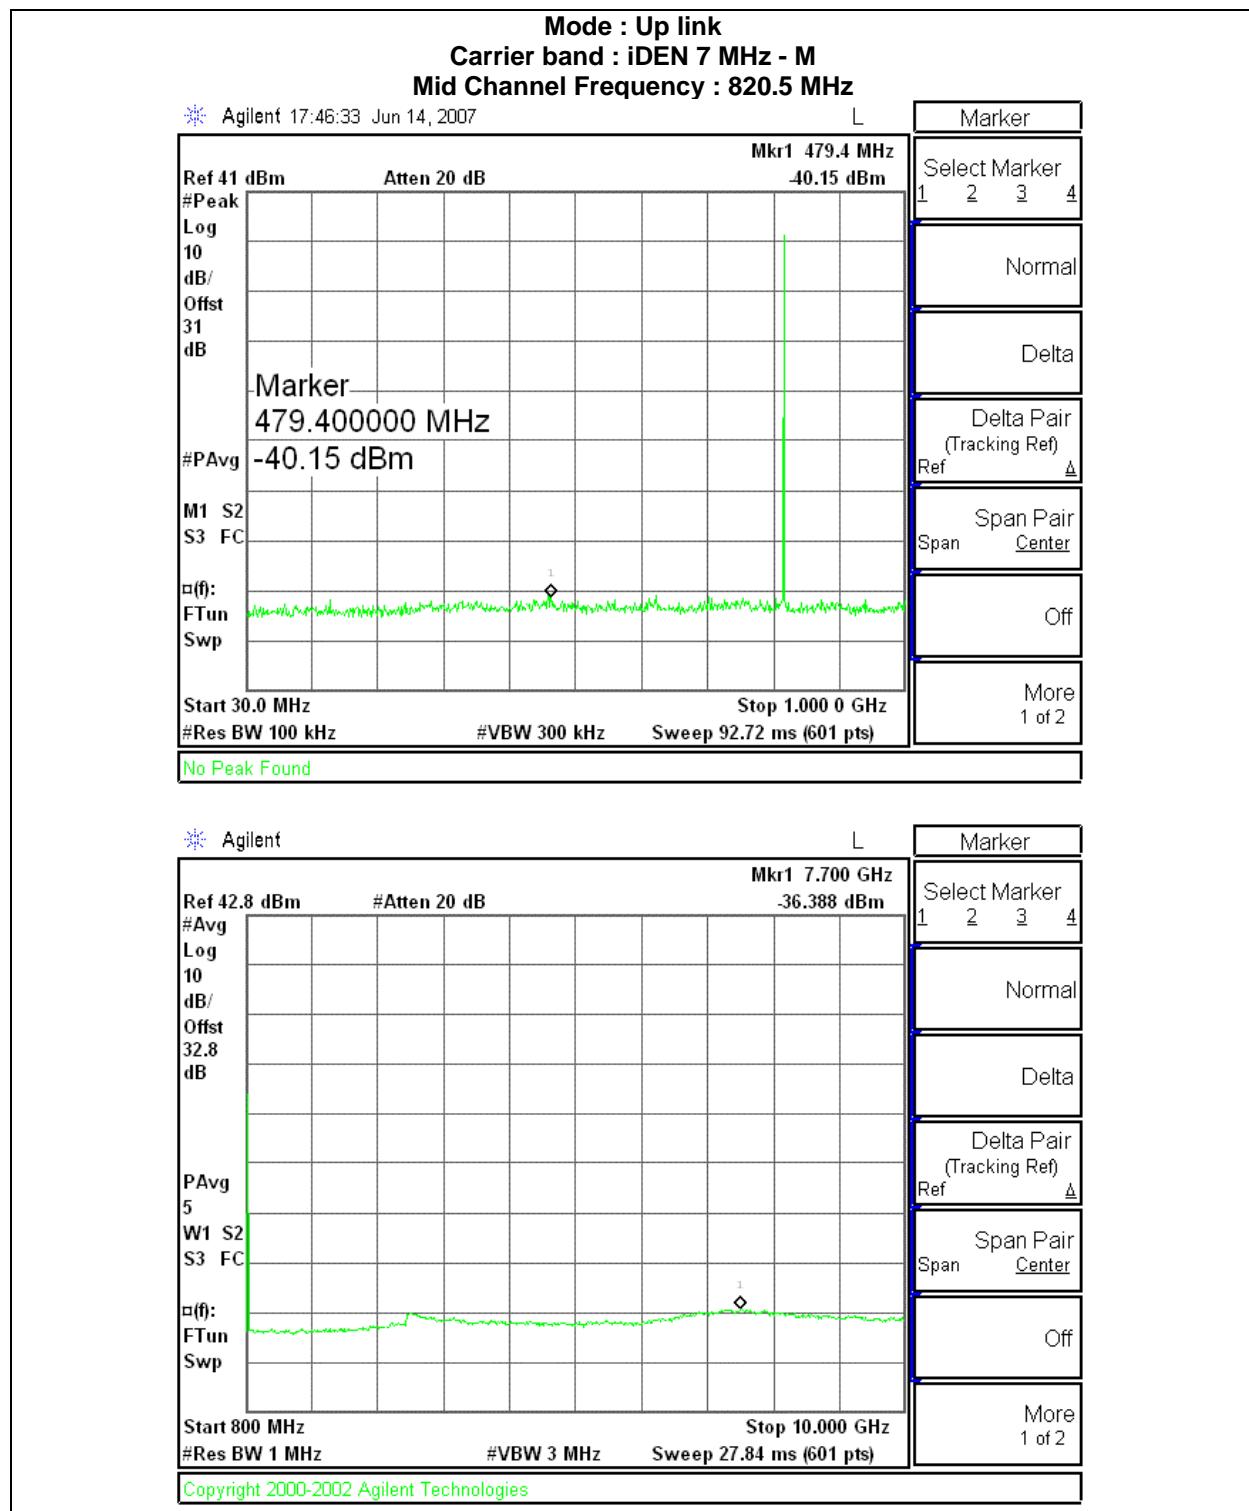


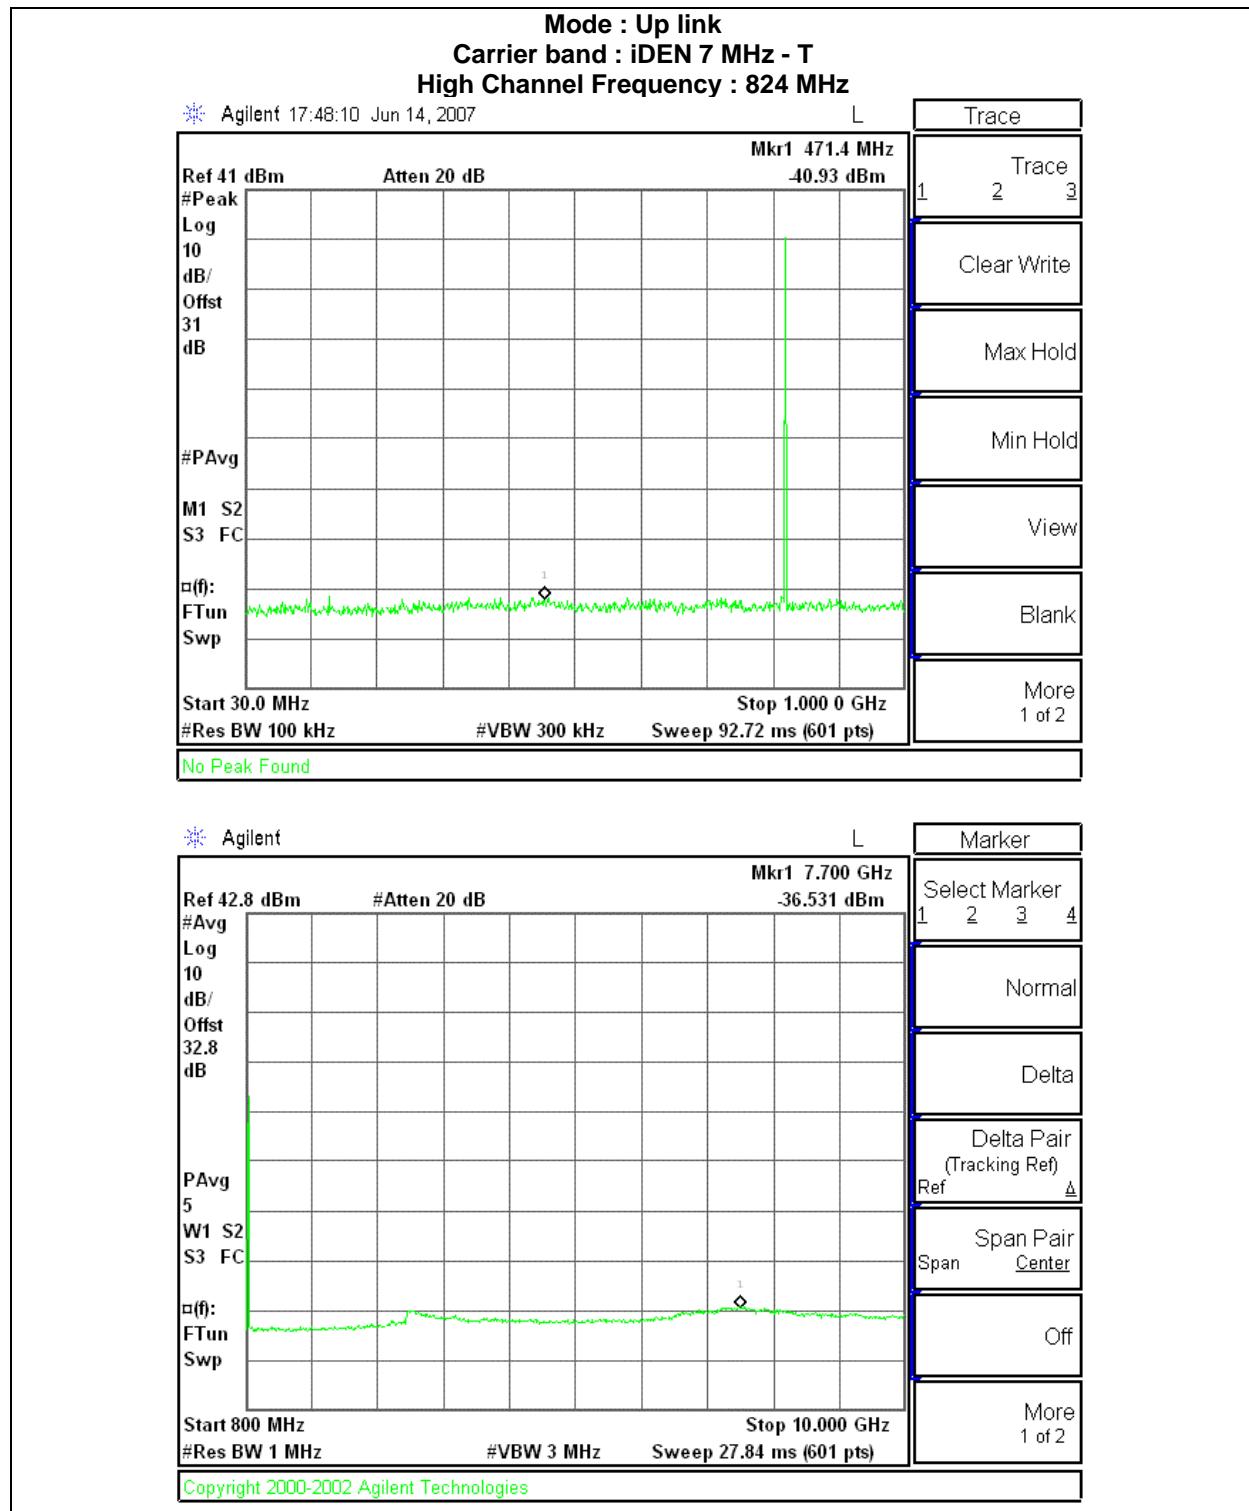


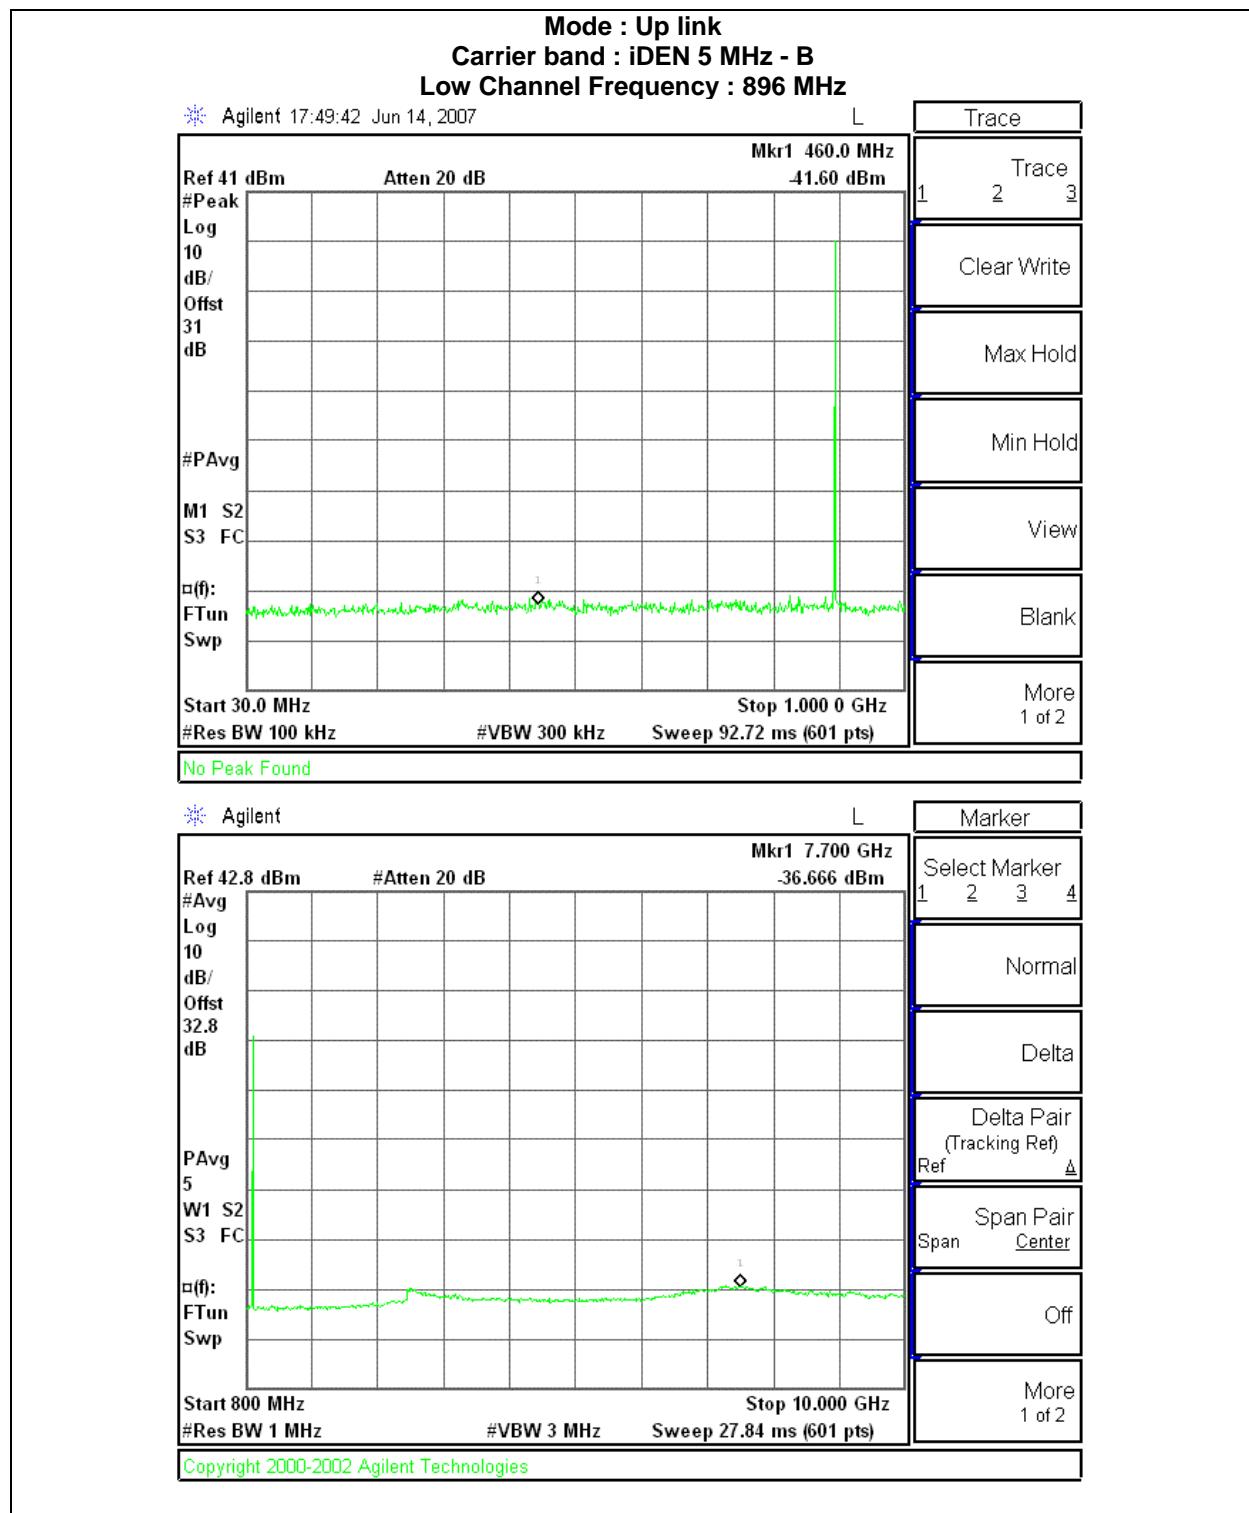


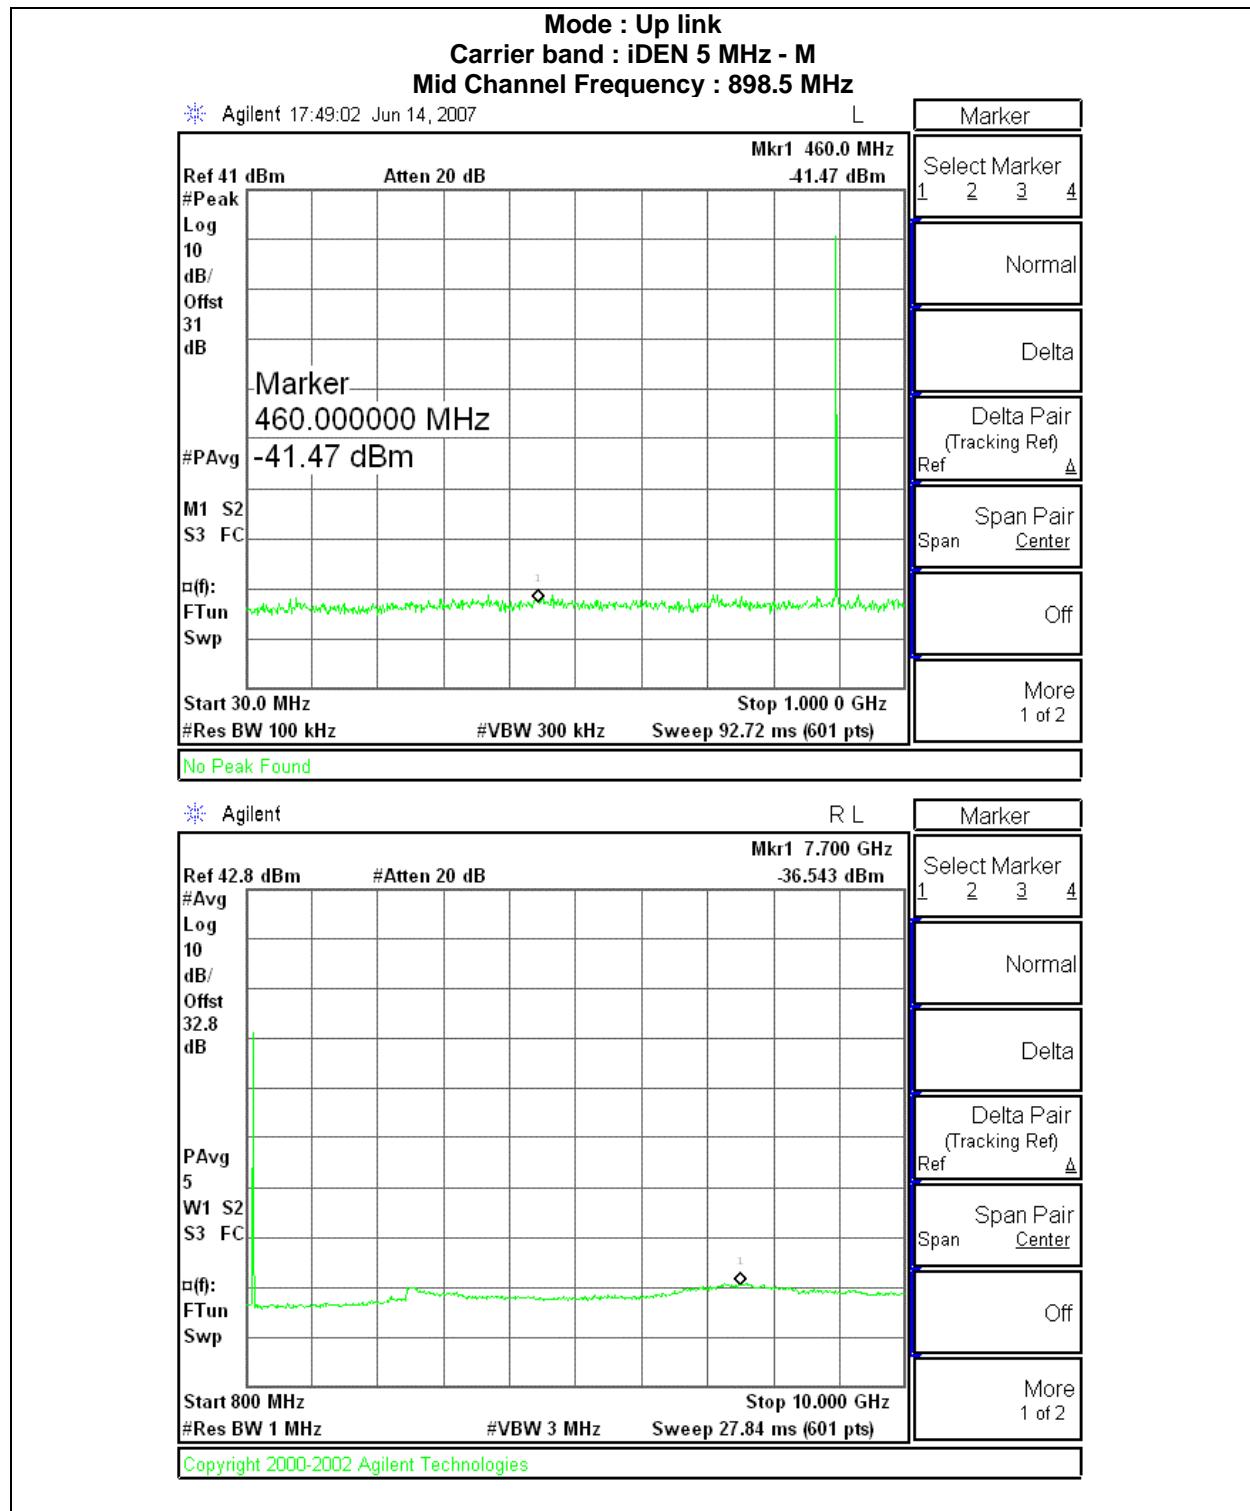


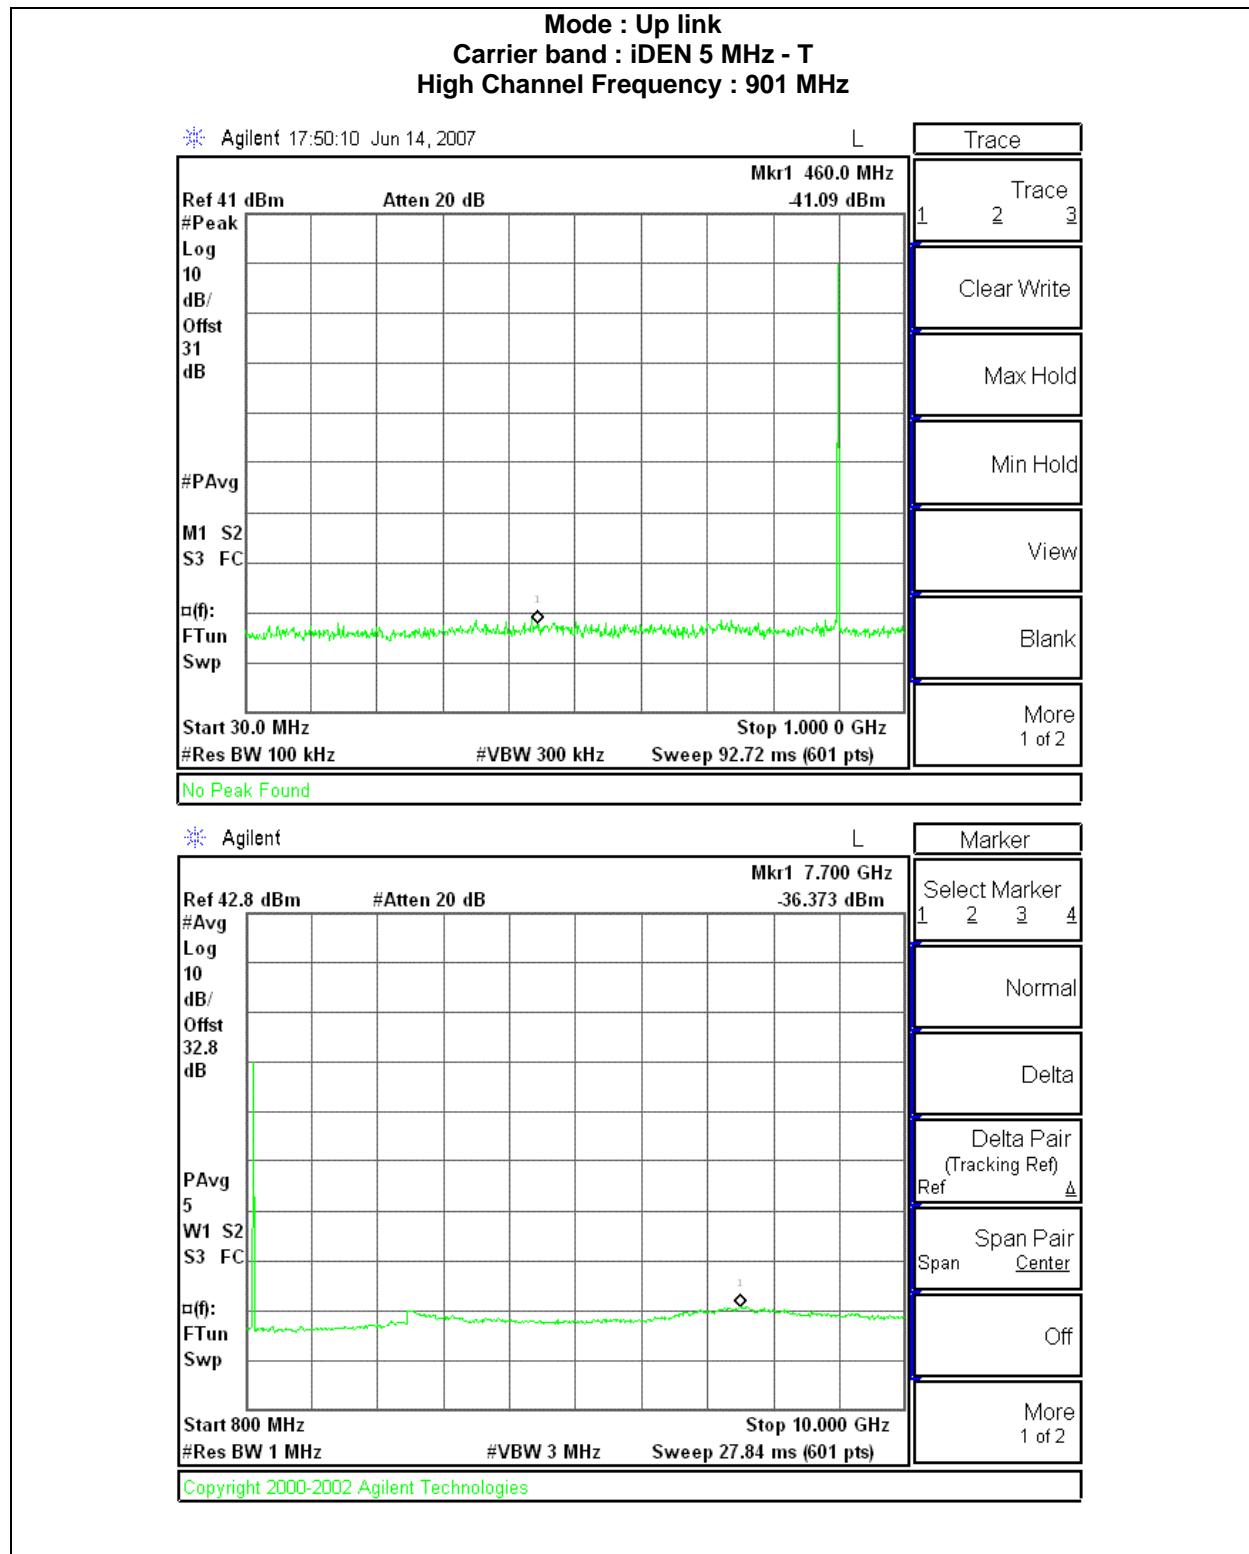


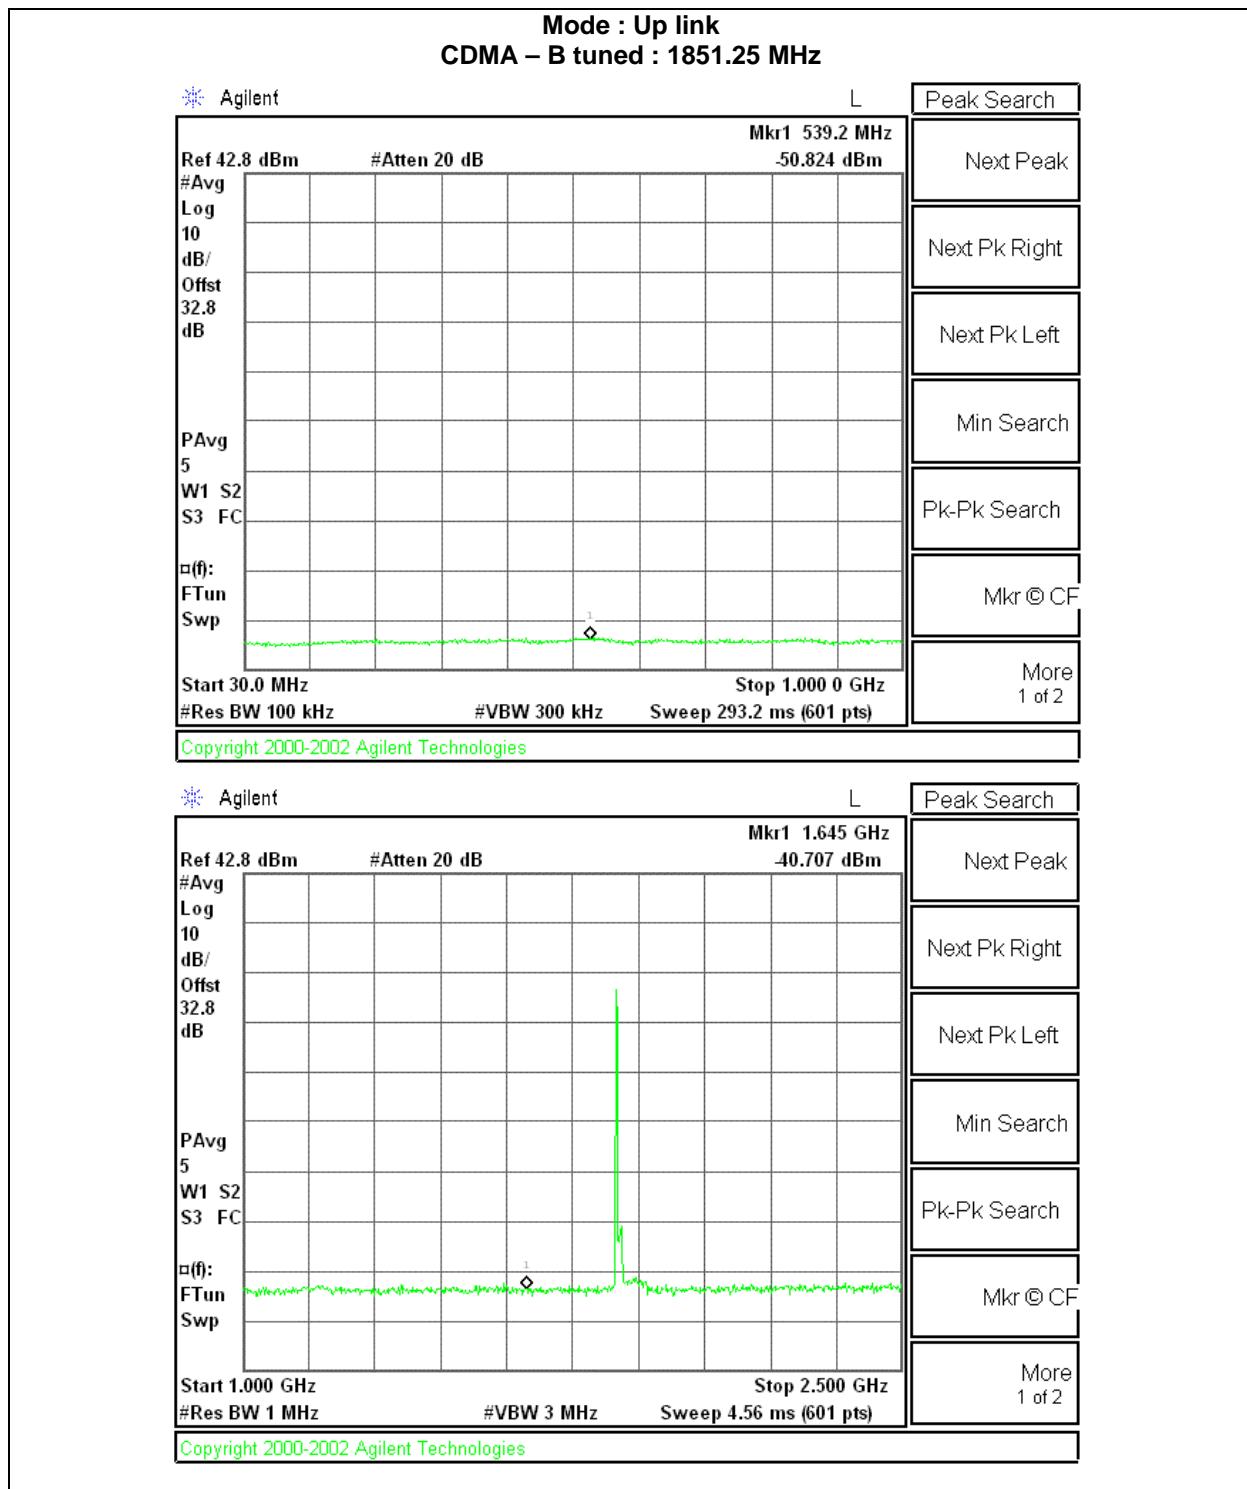


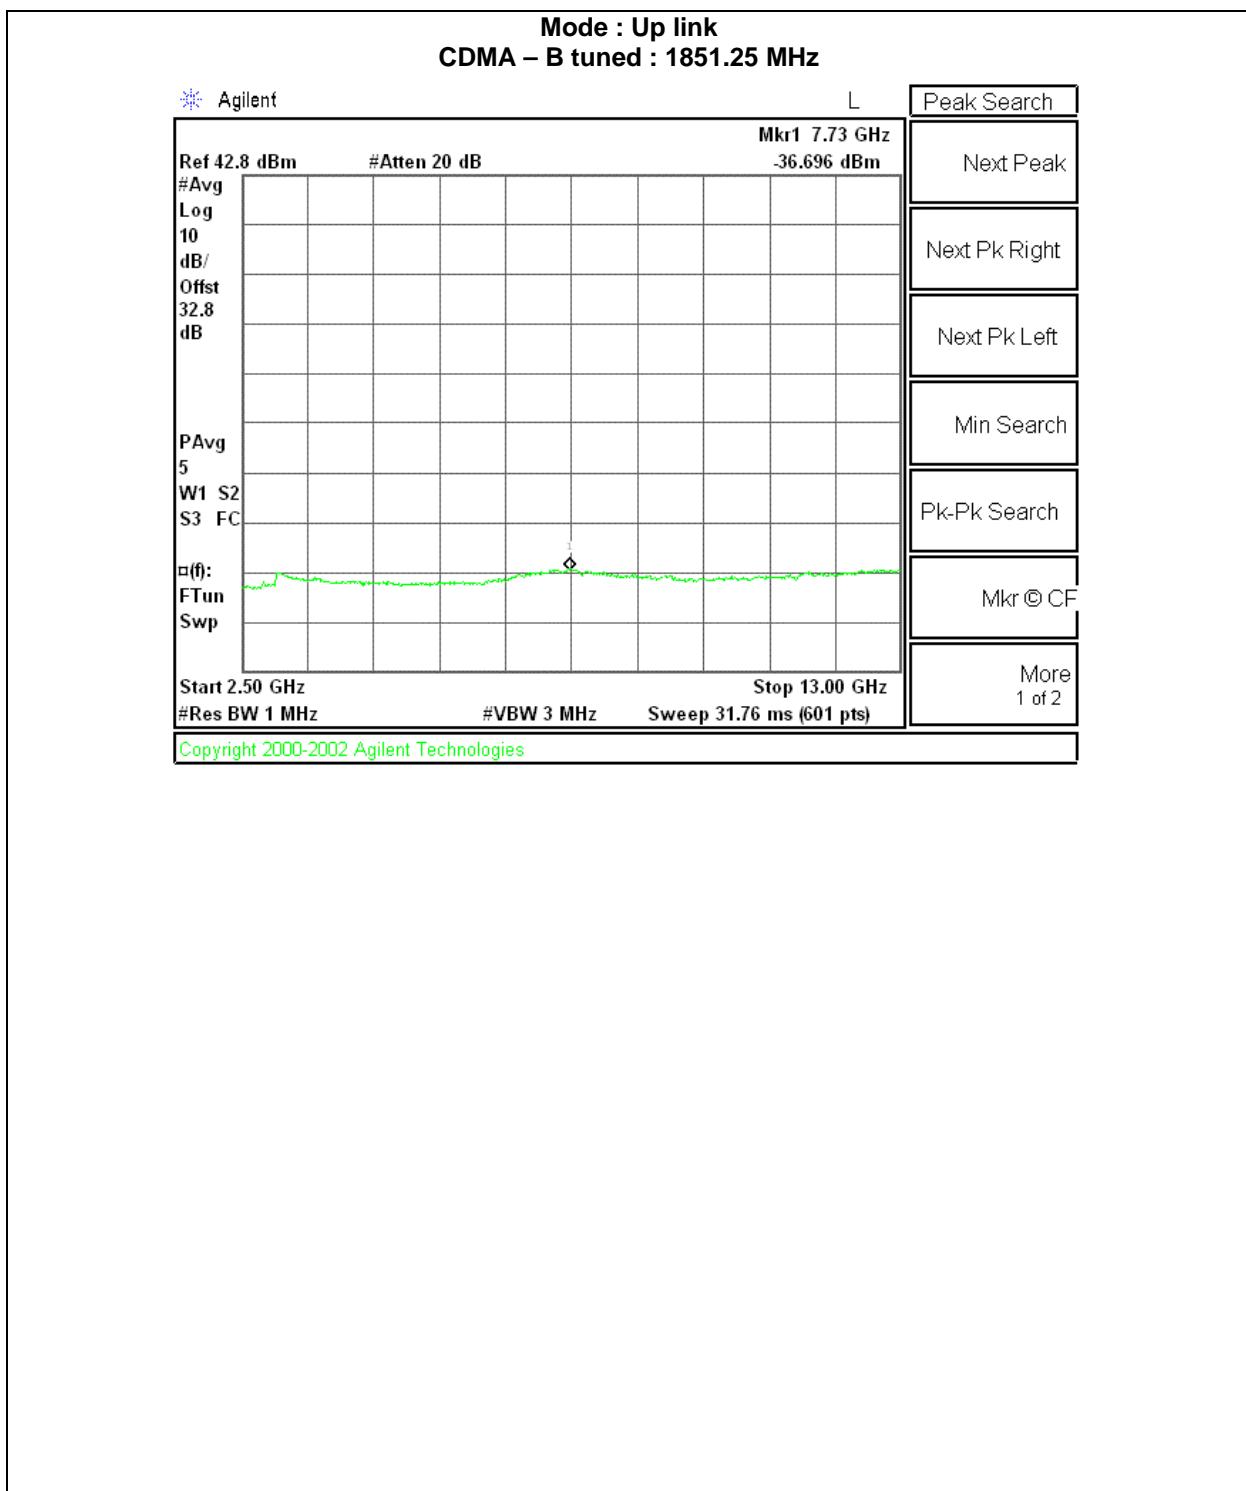


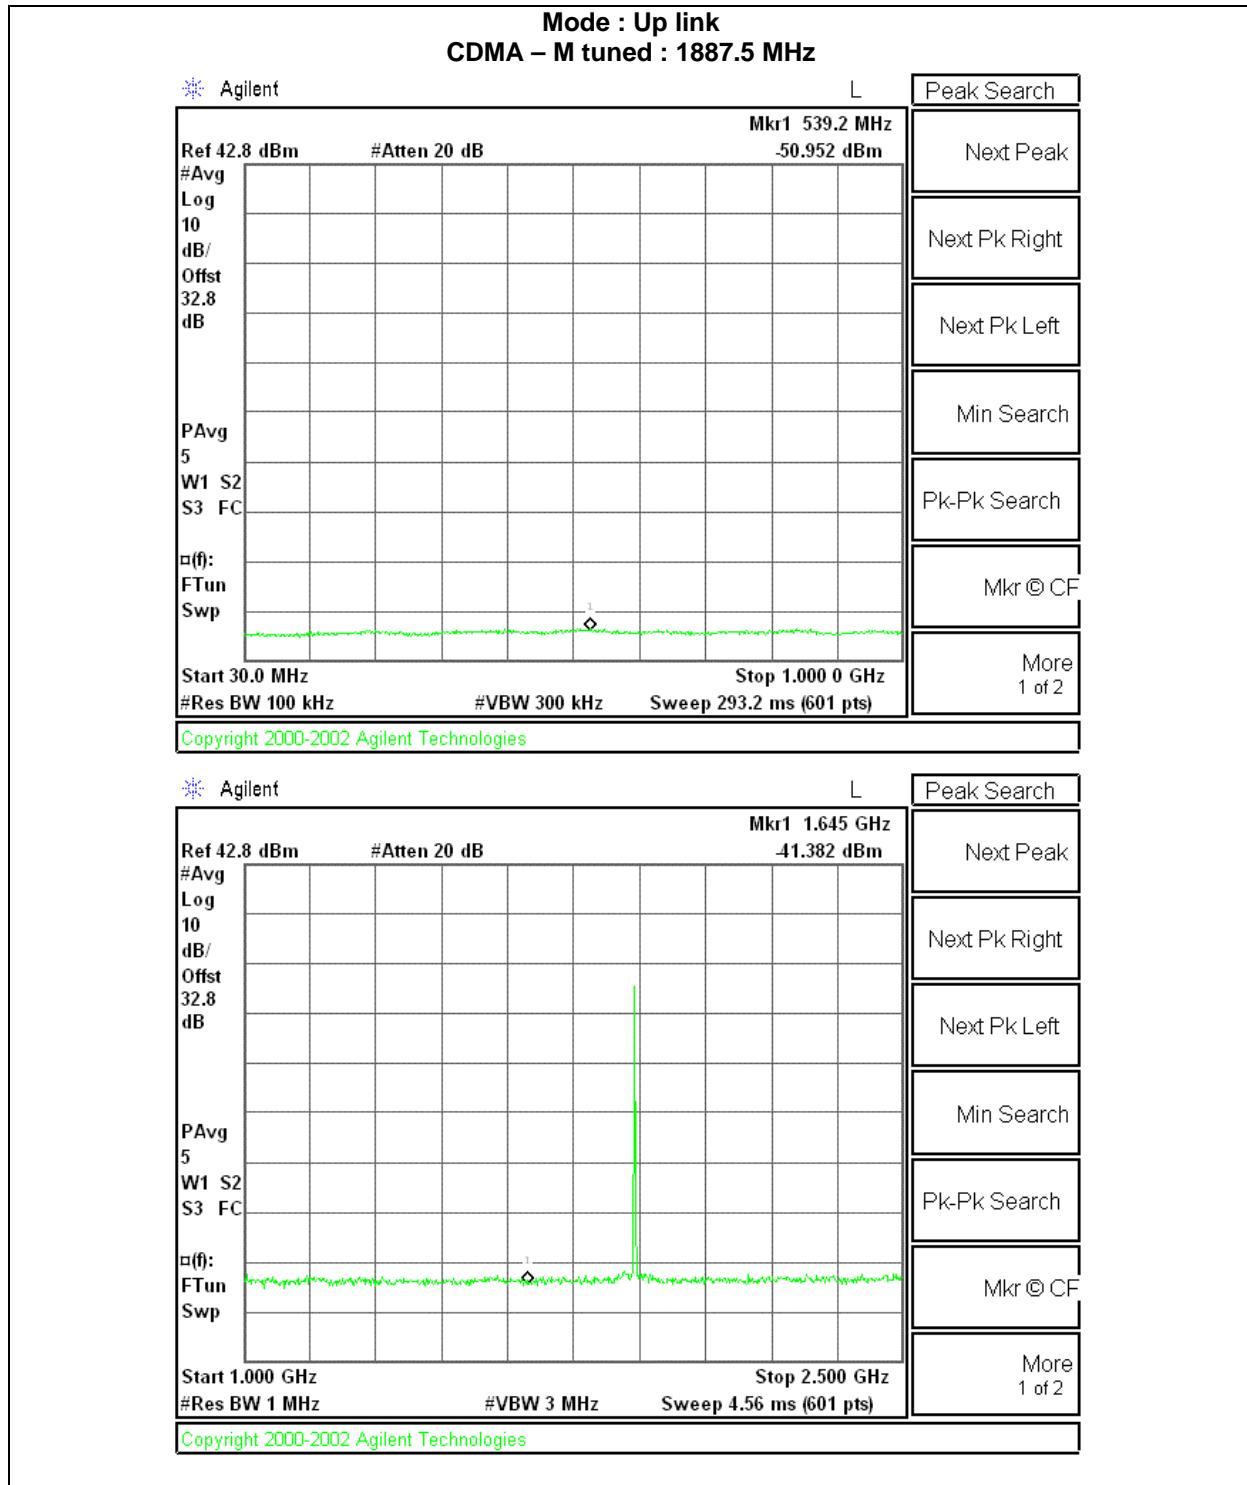

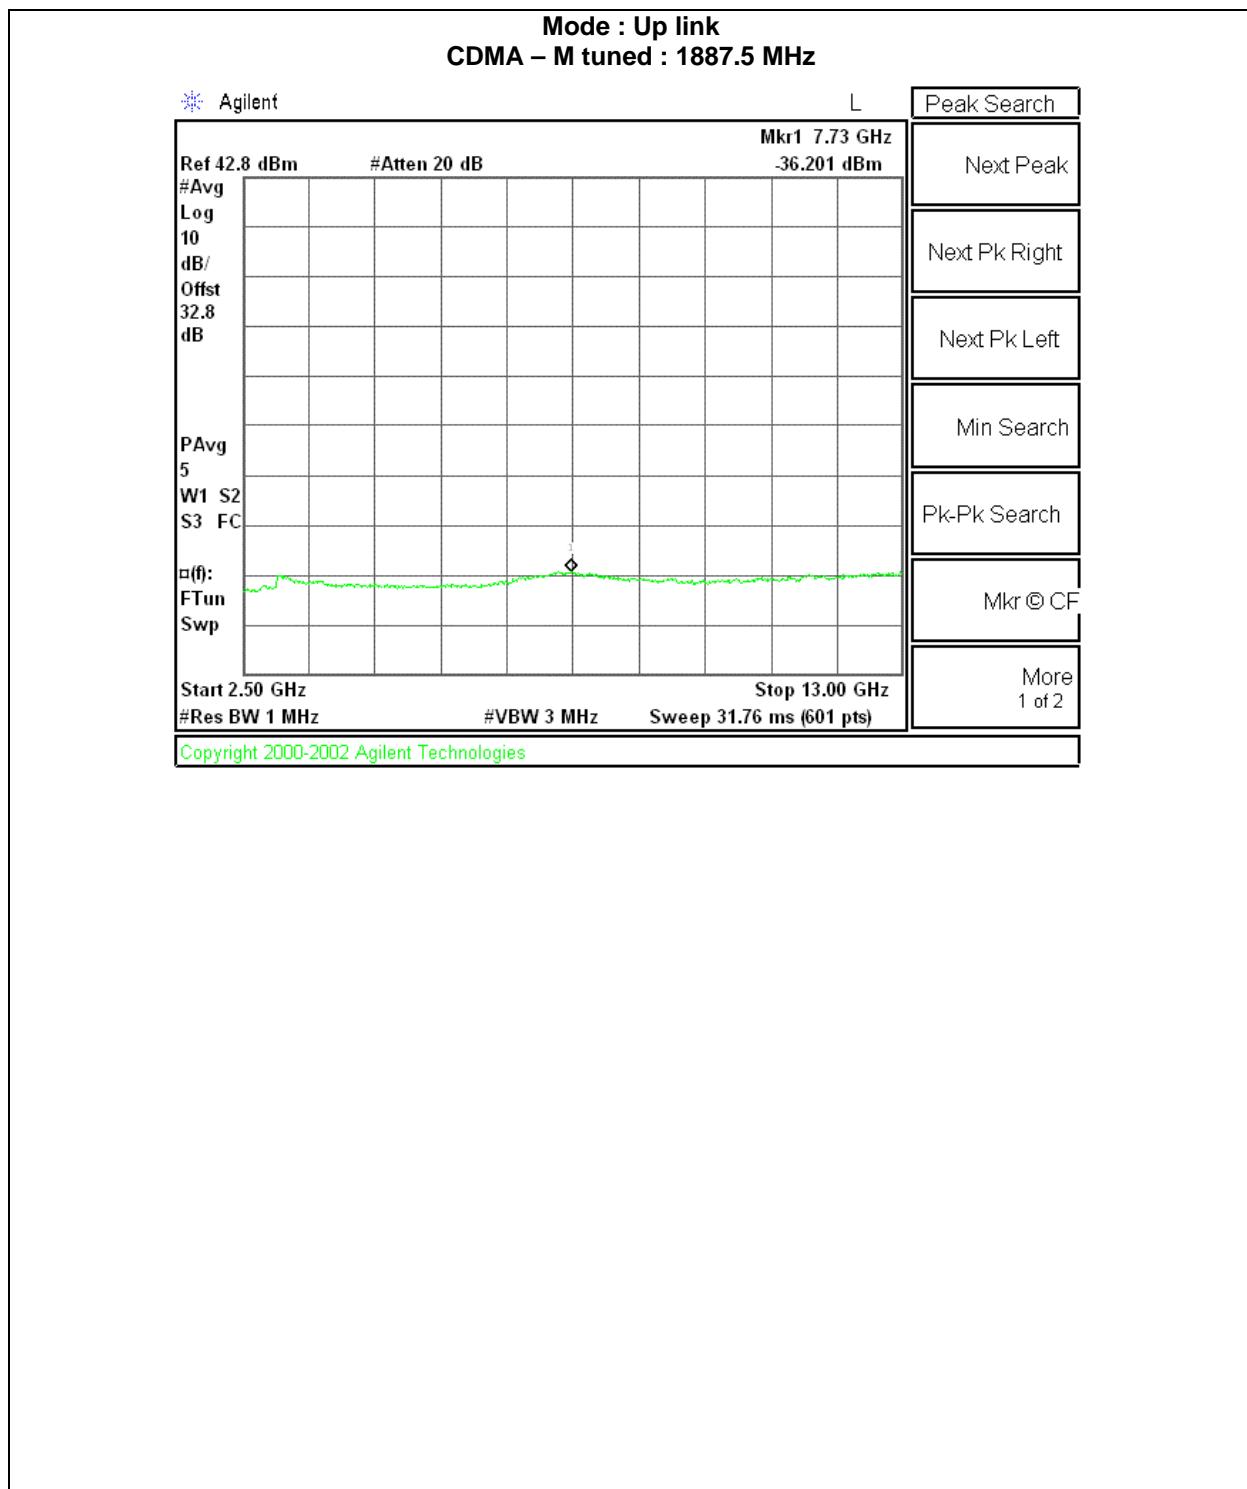


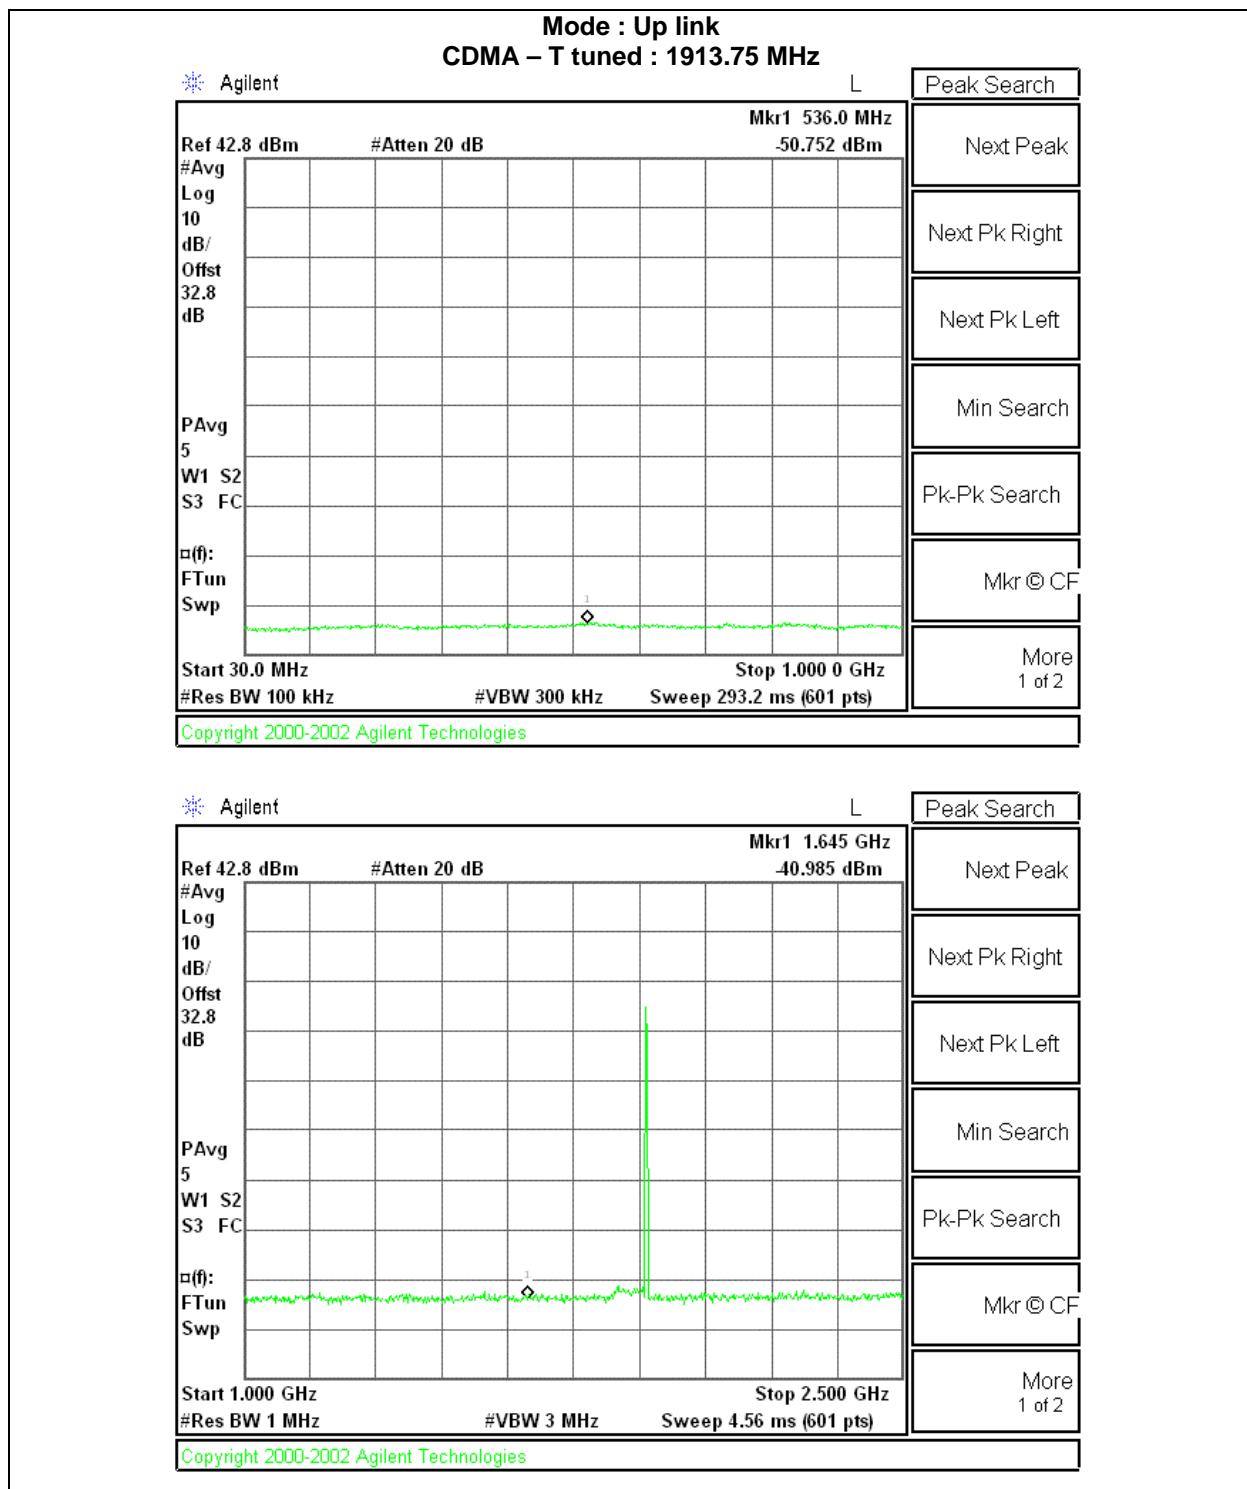

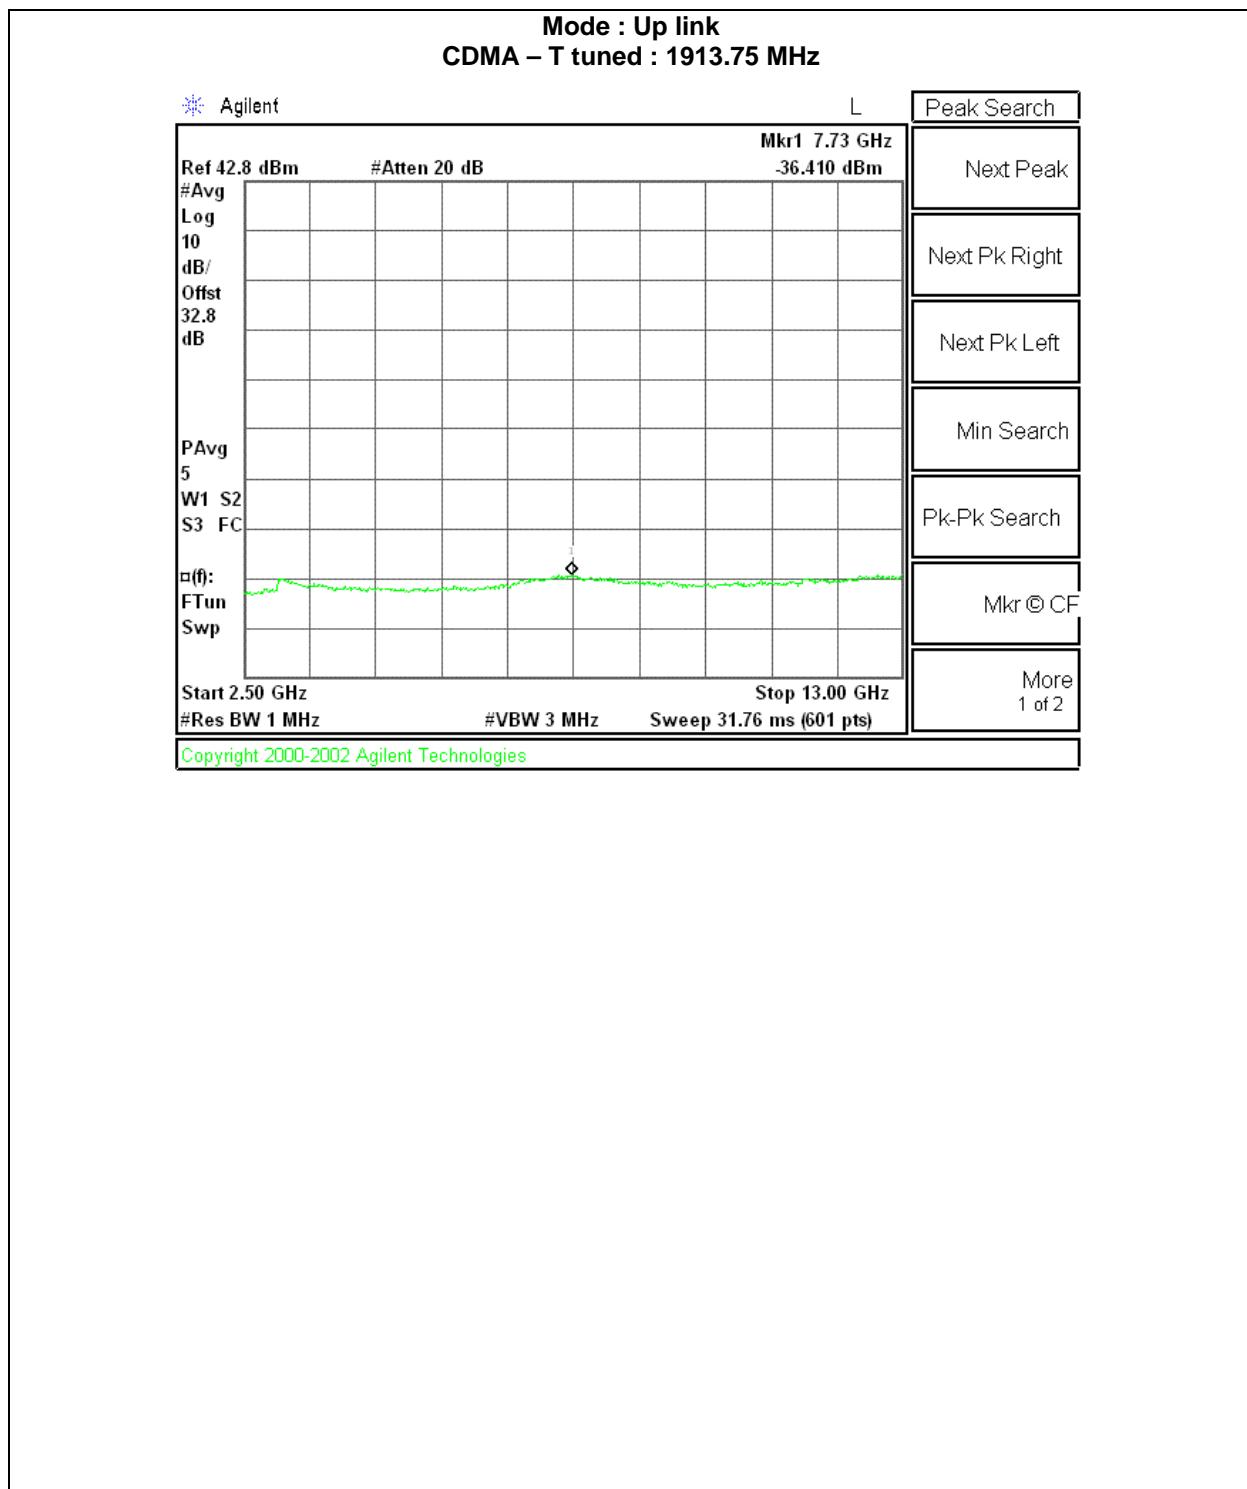


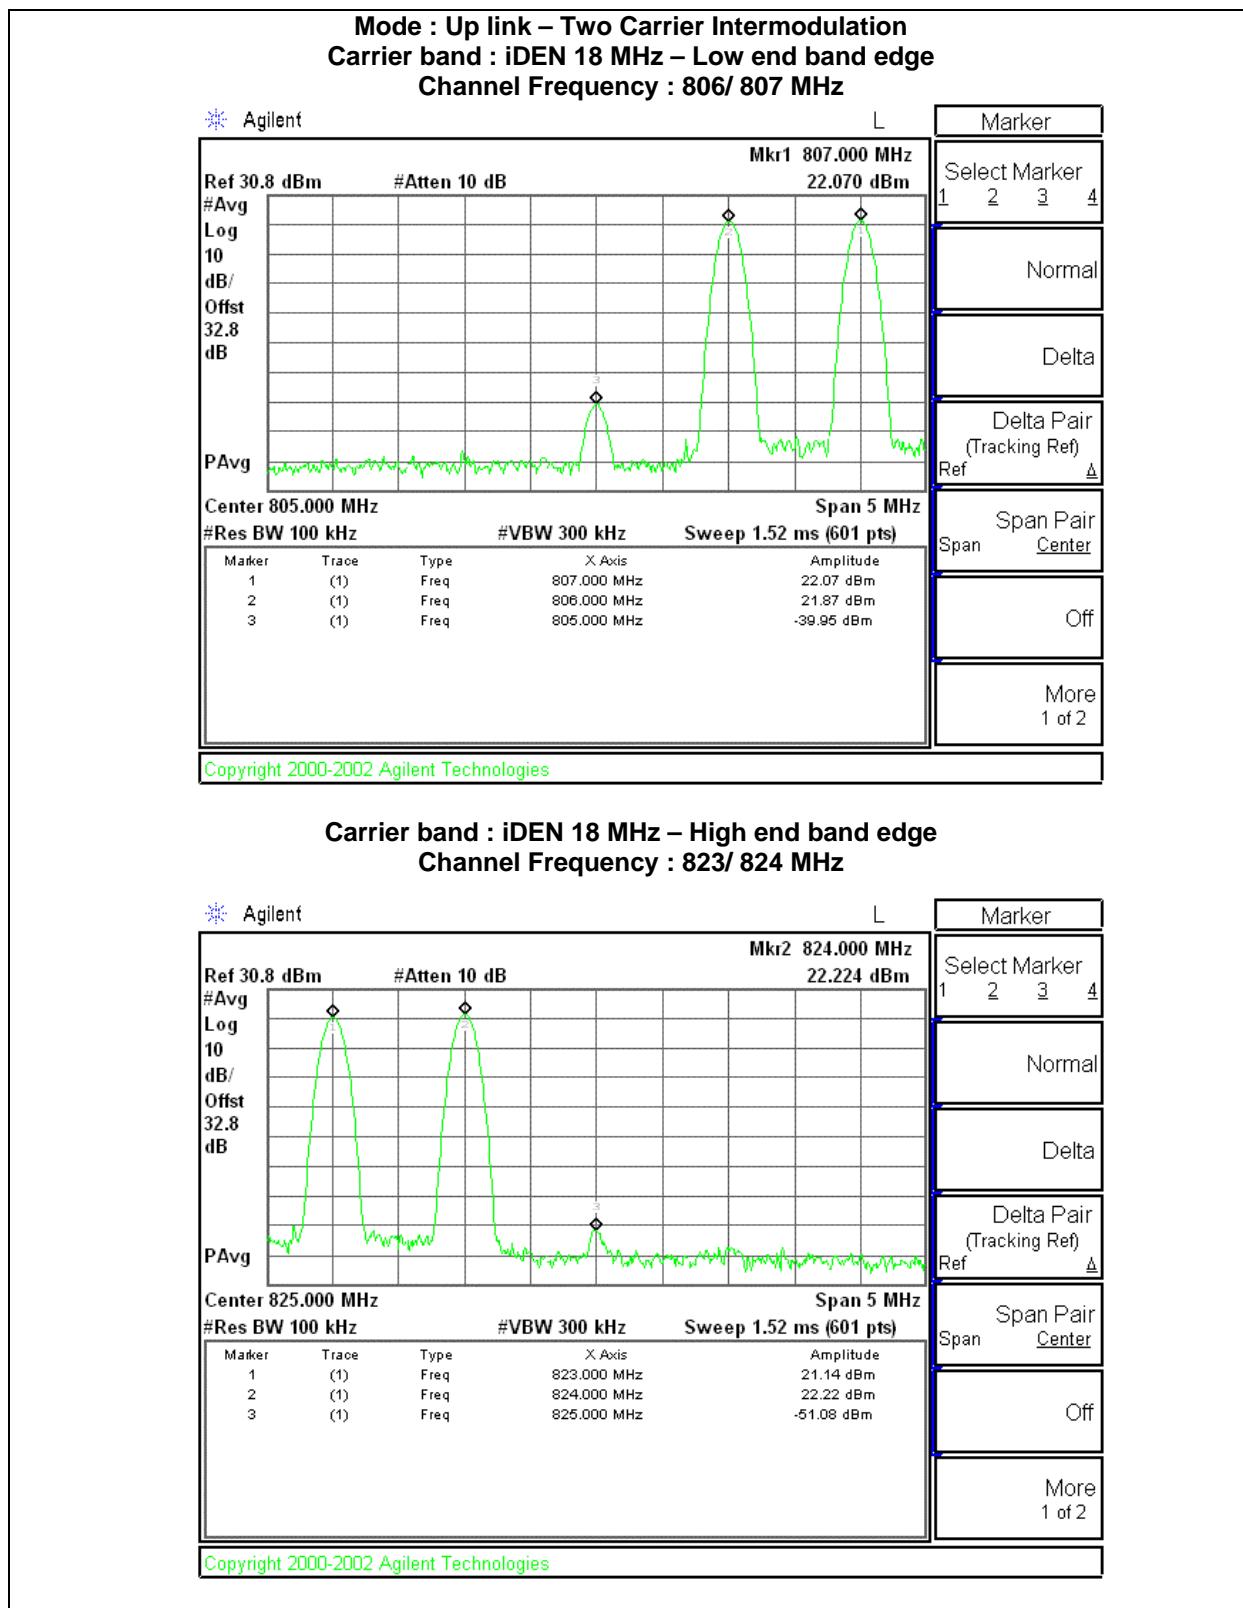


Mode : Up link – Two Carrier Intermodulation  
Carrier band : iDEN 7 MHz – Low end band edge  
Channel Frequency : 817/ 818 MHz

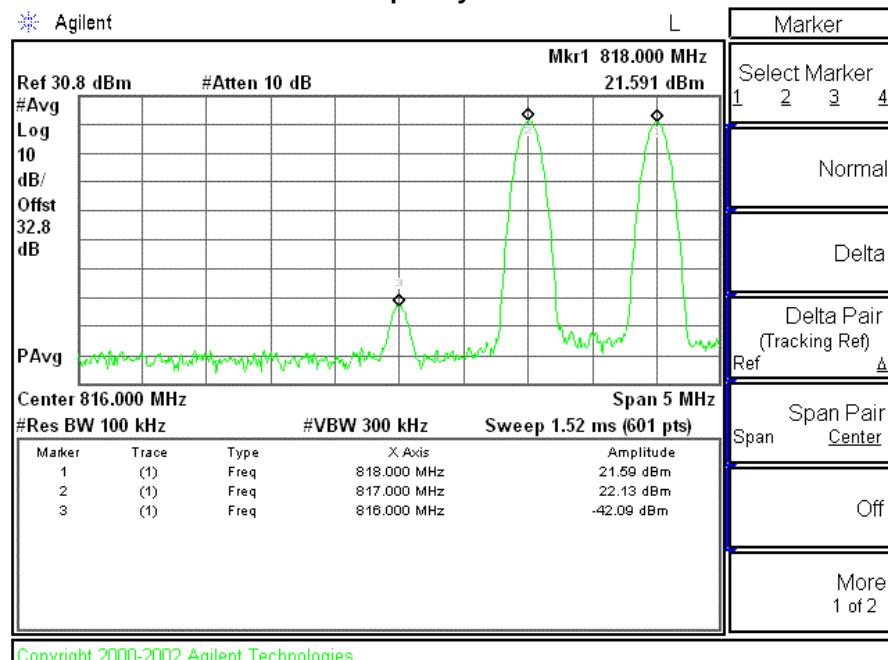


Carrier band : iDEN 7 MHz – High end band edge  
Channel Frequency : 823/ 824 MHz

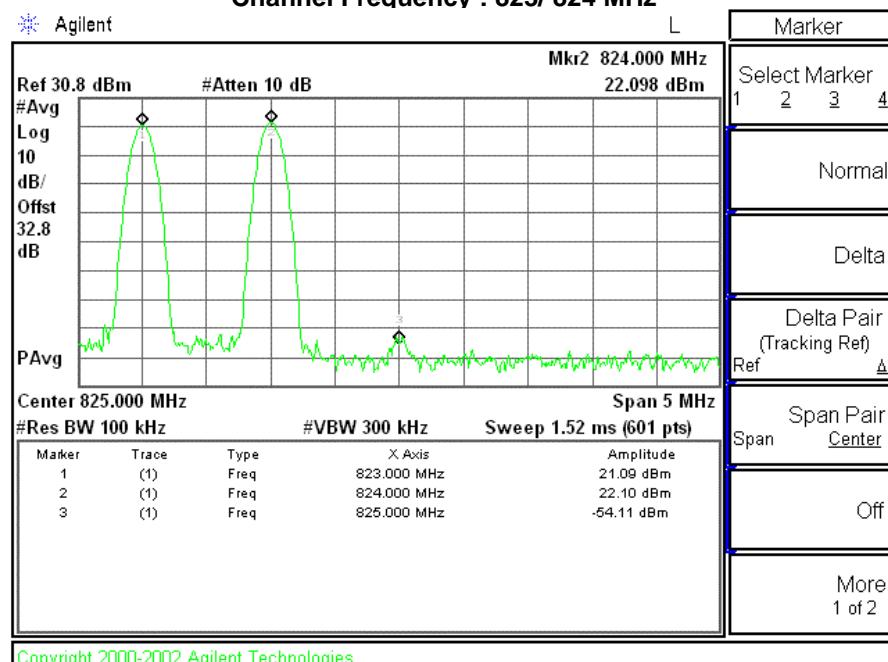


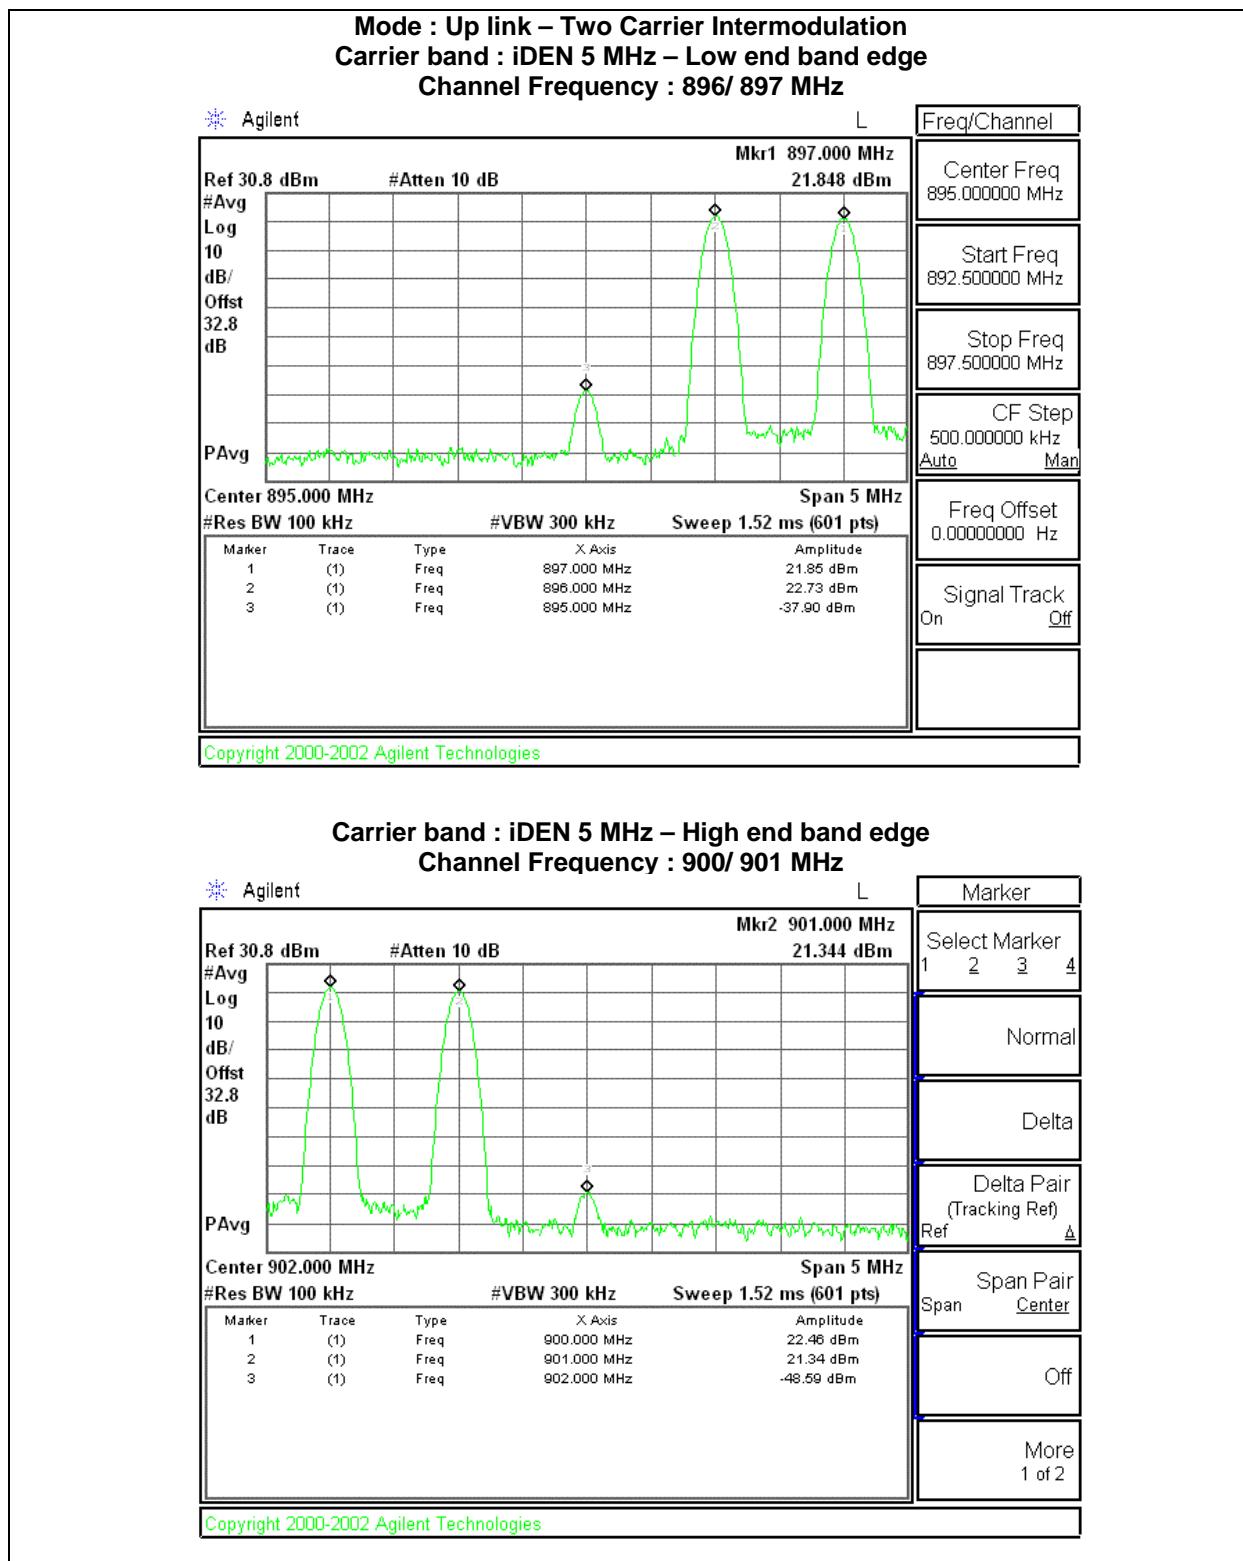


**Mode : Up link – Two Carrier Intermodulation**  
**Carrier band : CDMA – Low Channel band edge**

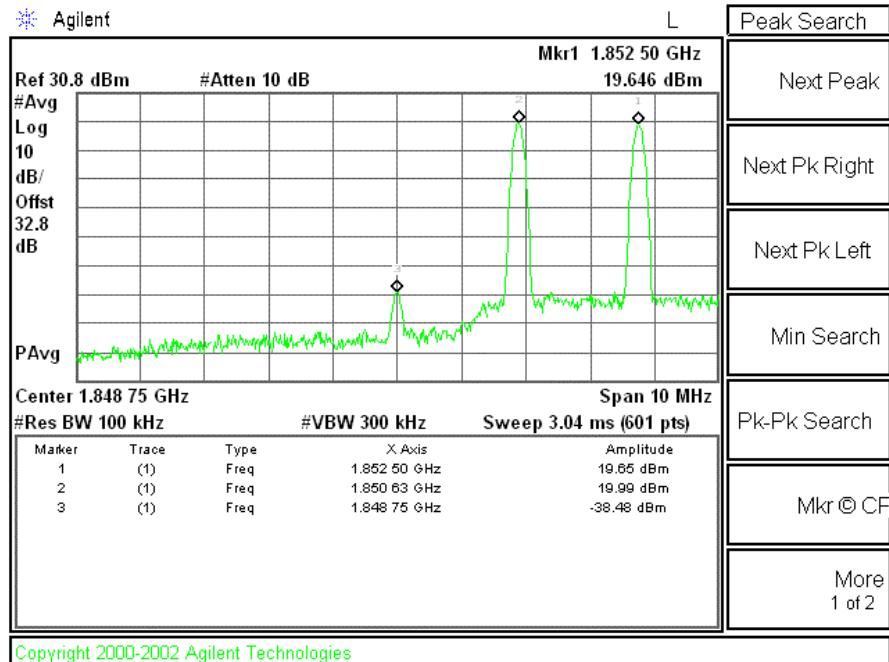


**Mode : Up link – Two Carrier Intermodulation**  
**Carrier band : CDMA – High Channel band edge**

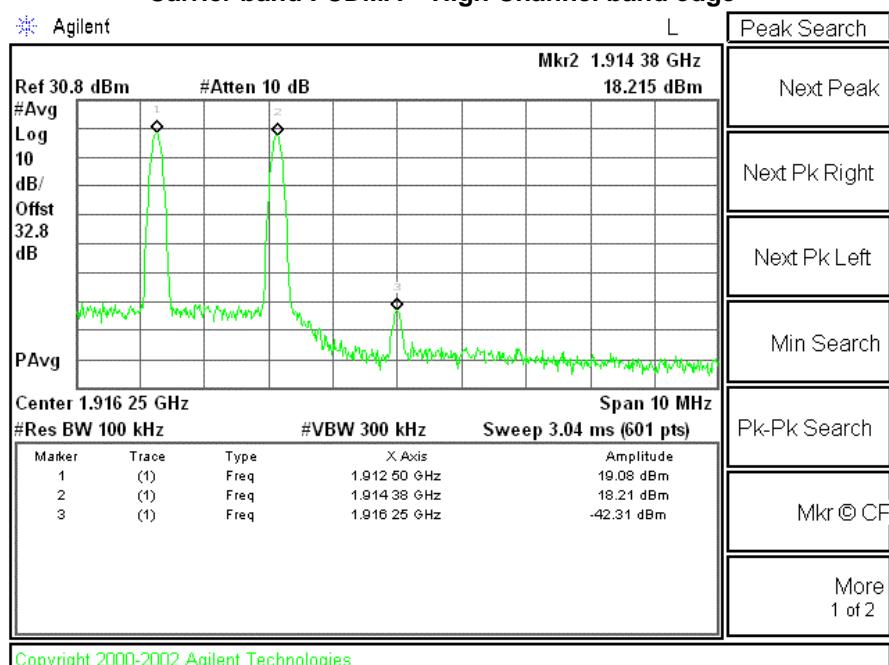


**Mode : Up link – Out of band Rejection**  
**Carrier band : iDEN 18 MHz**


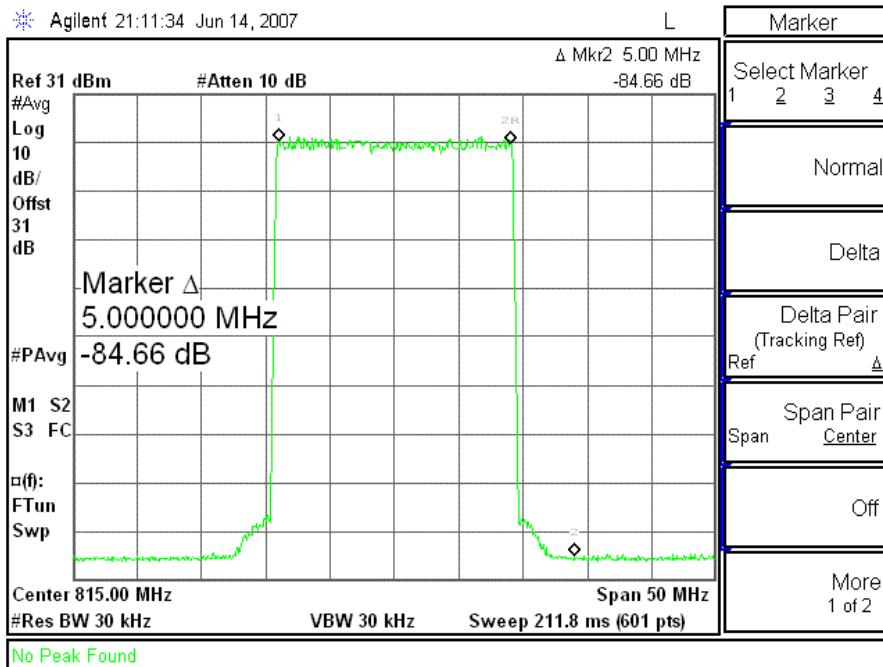



**Mode : Up link – Out of band Rejection**  
**Carrier band : iDEN 7 MHz**

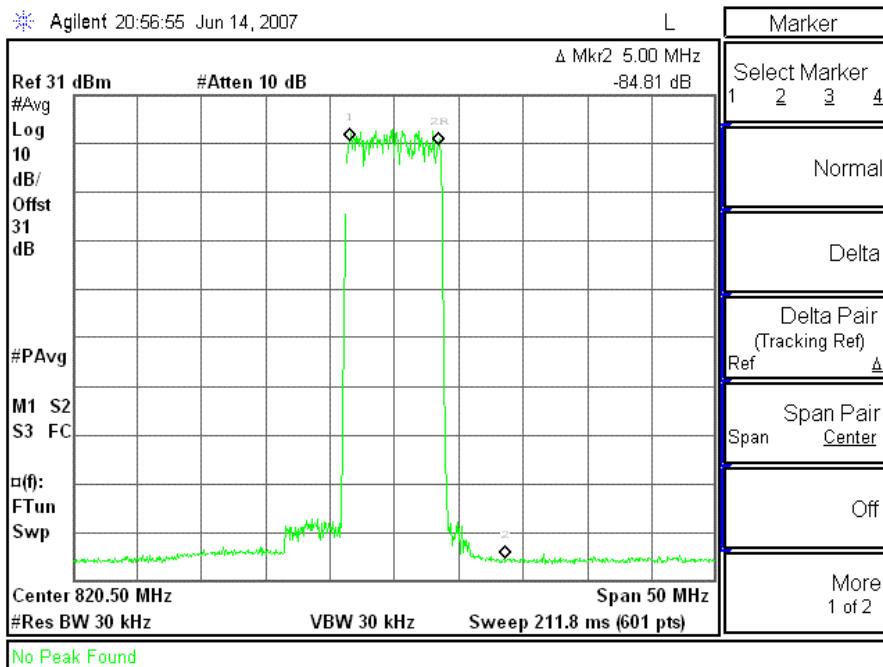


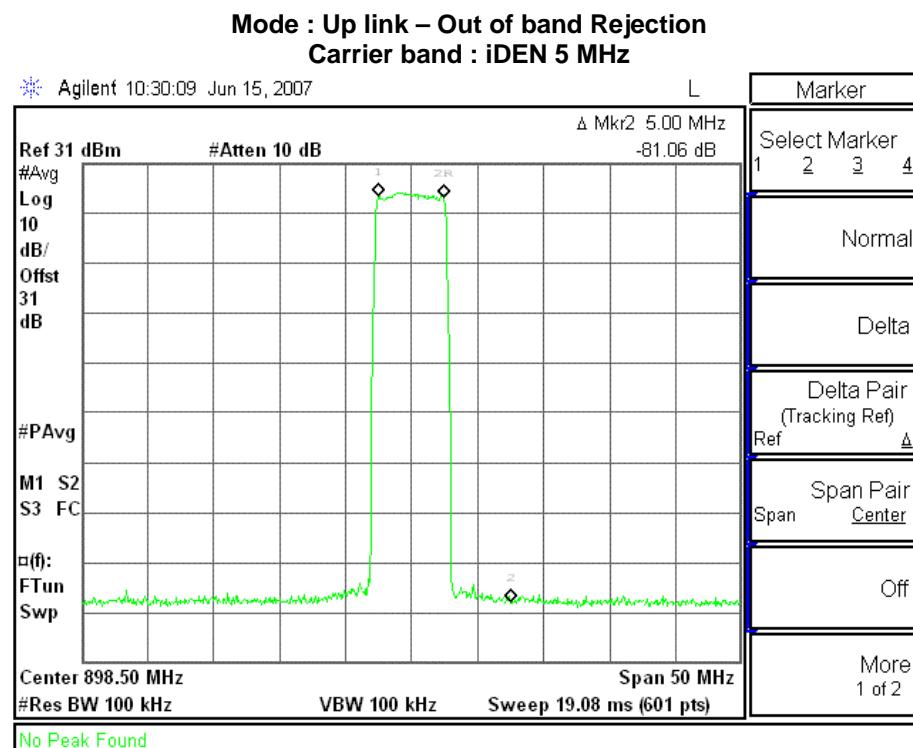



Mode : Up link – Out of band Rejection  
Carrier band : CDMA

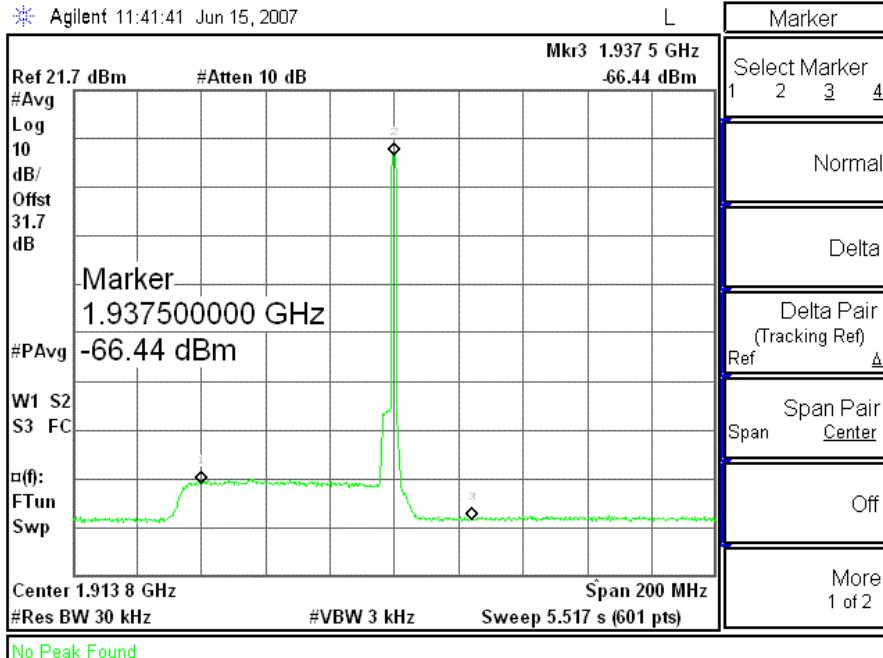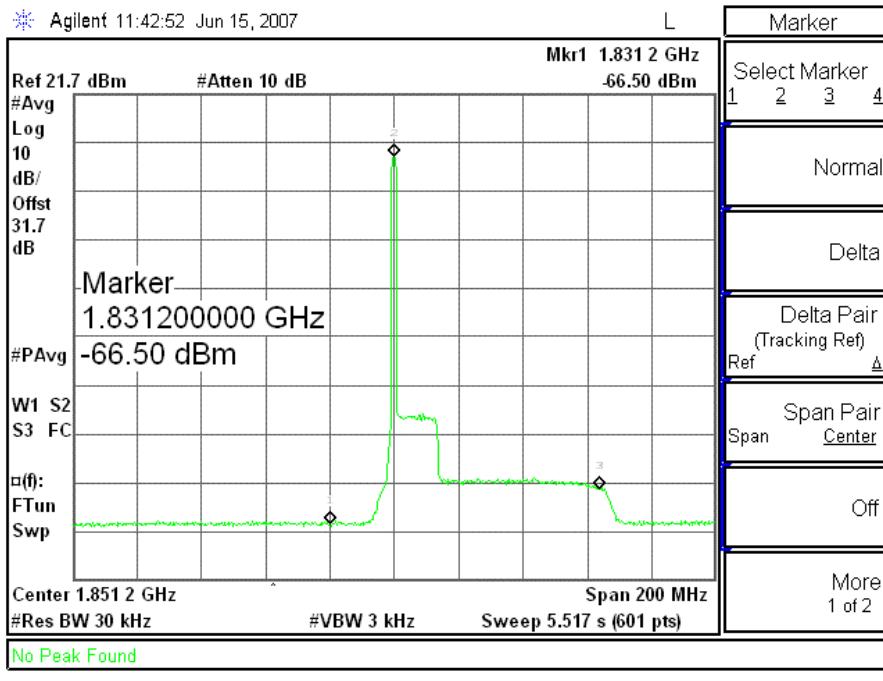


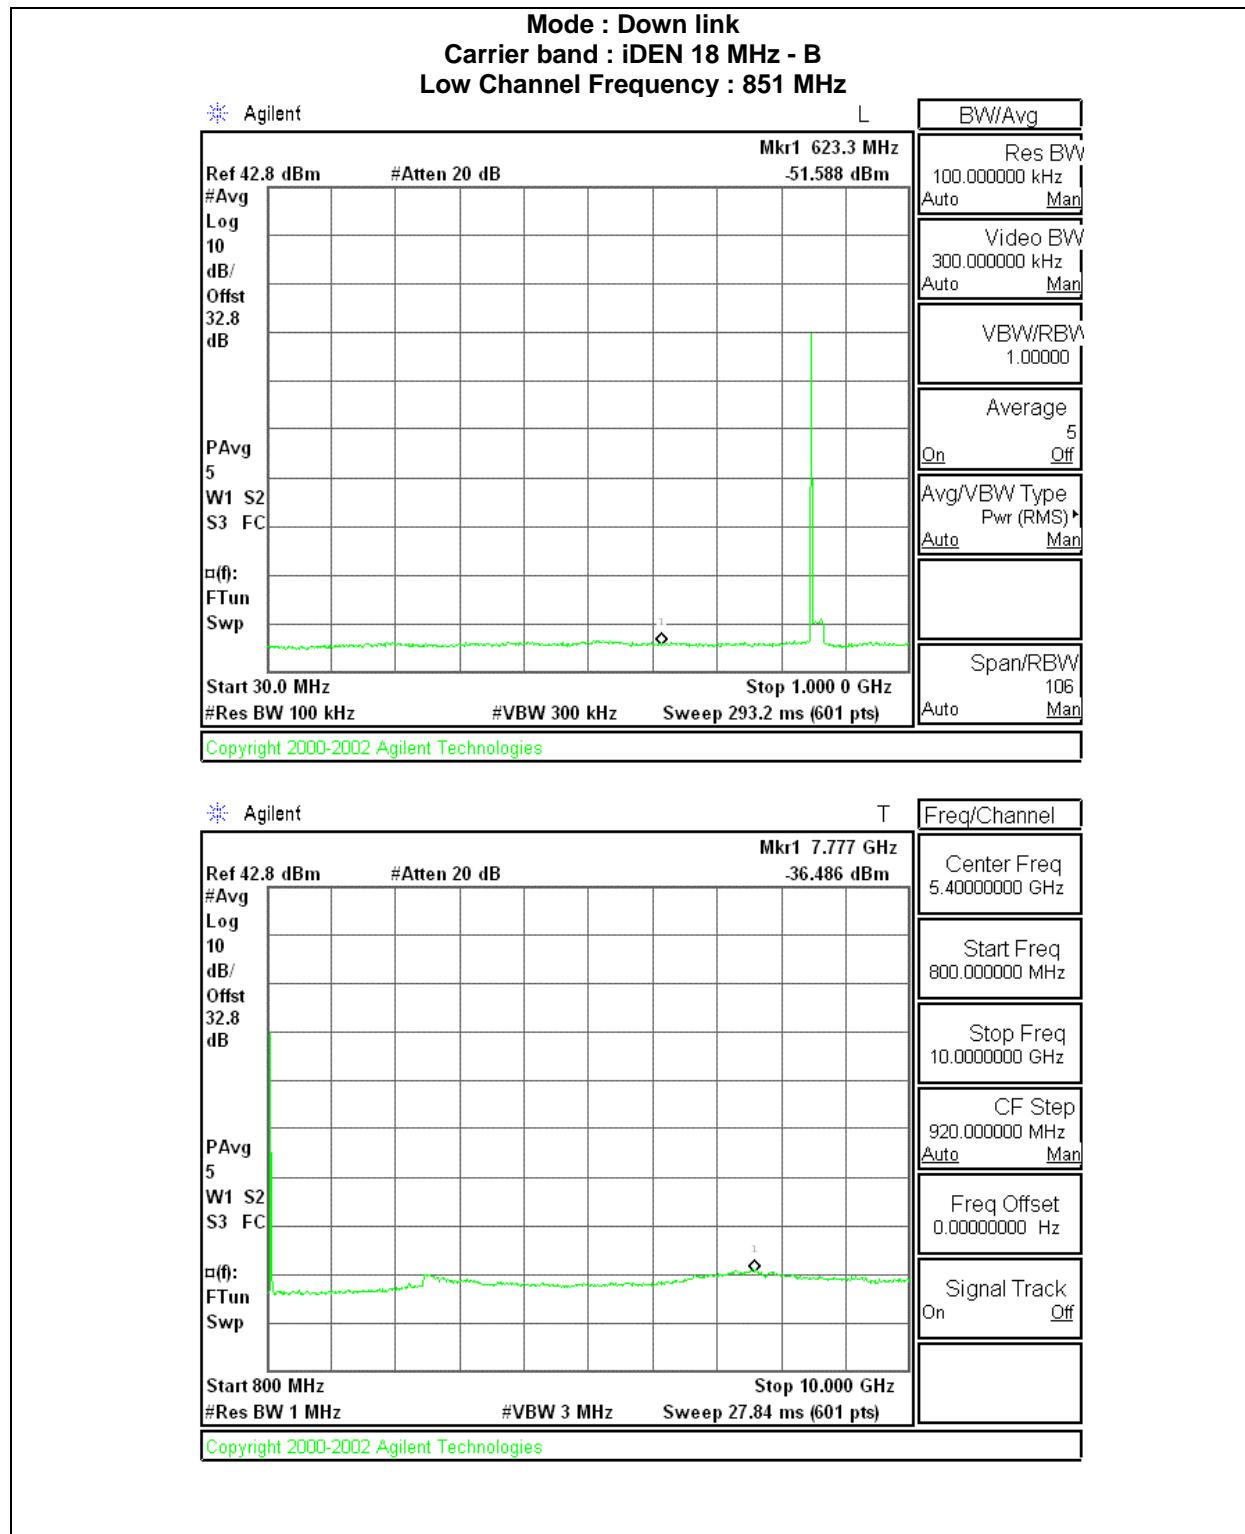


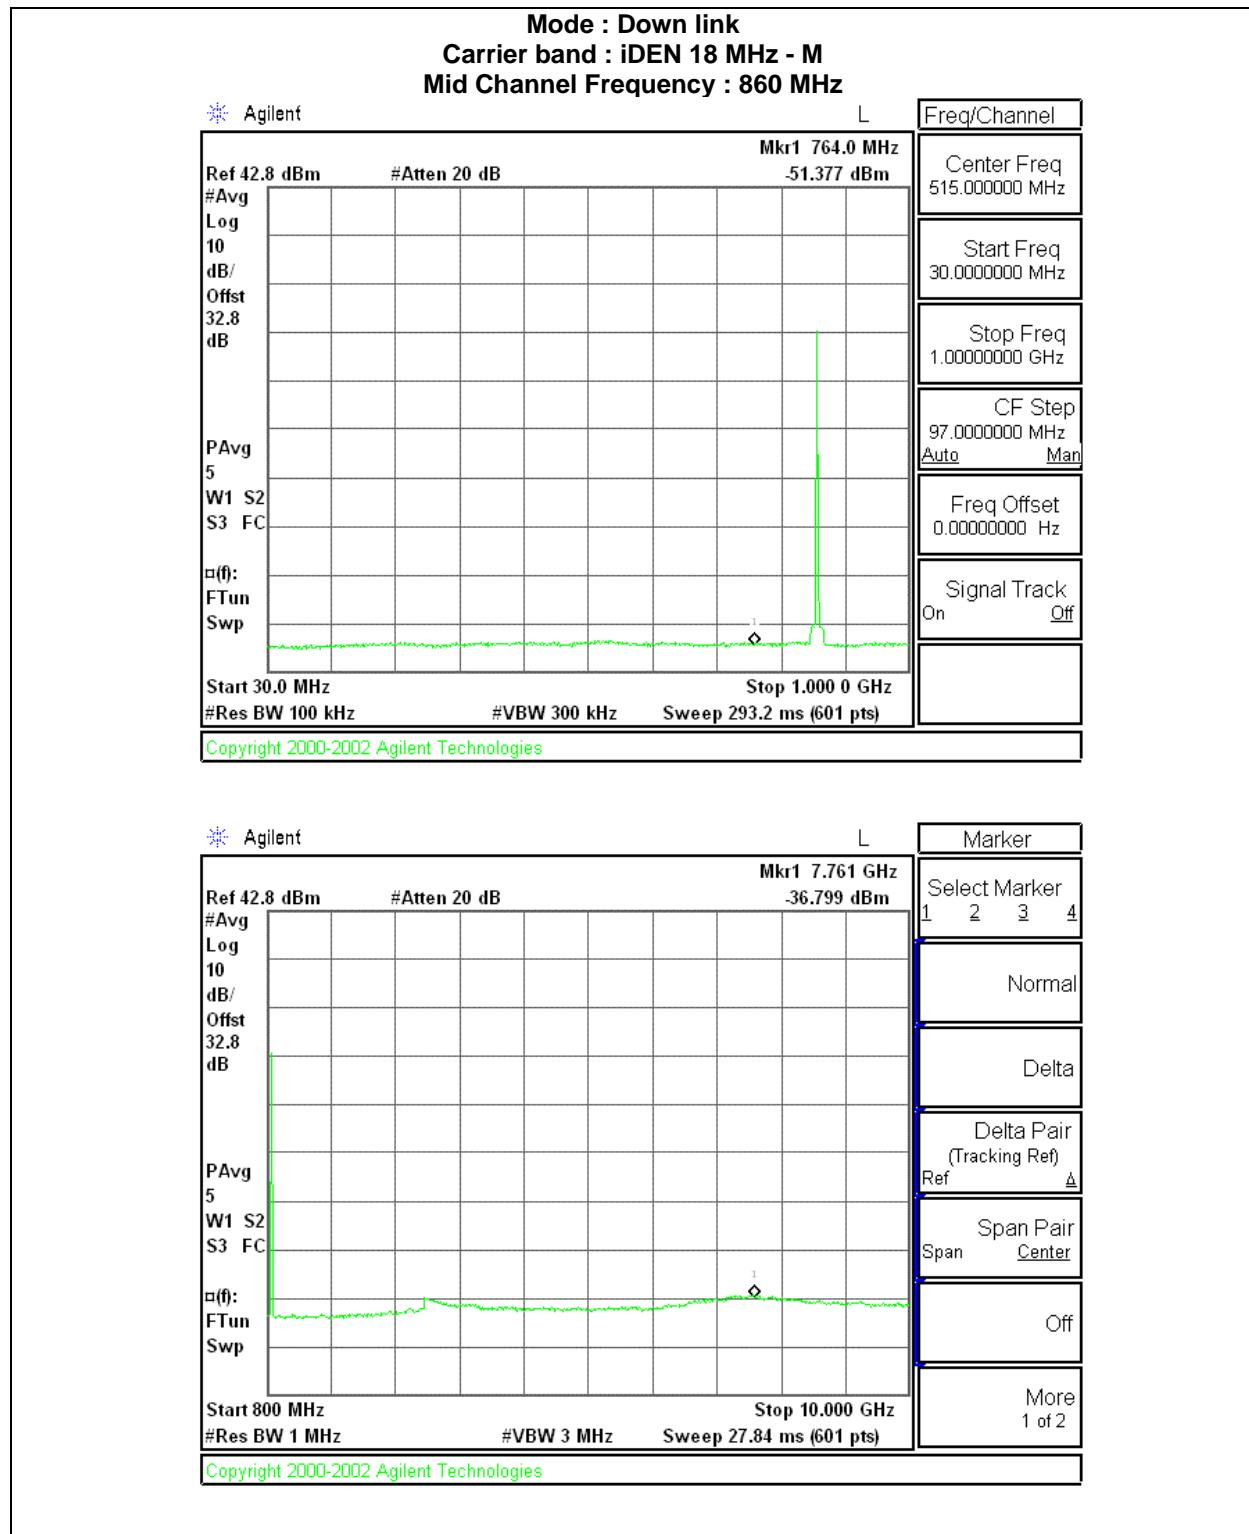


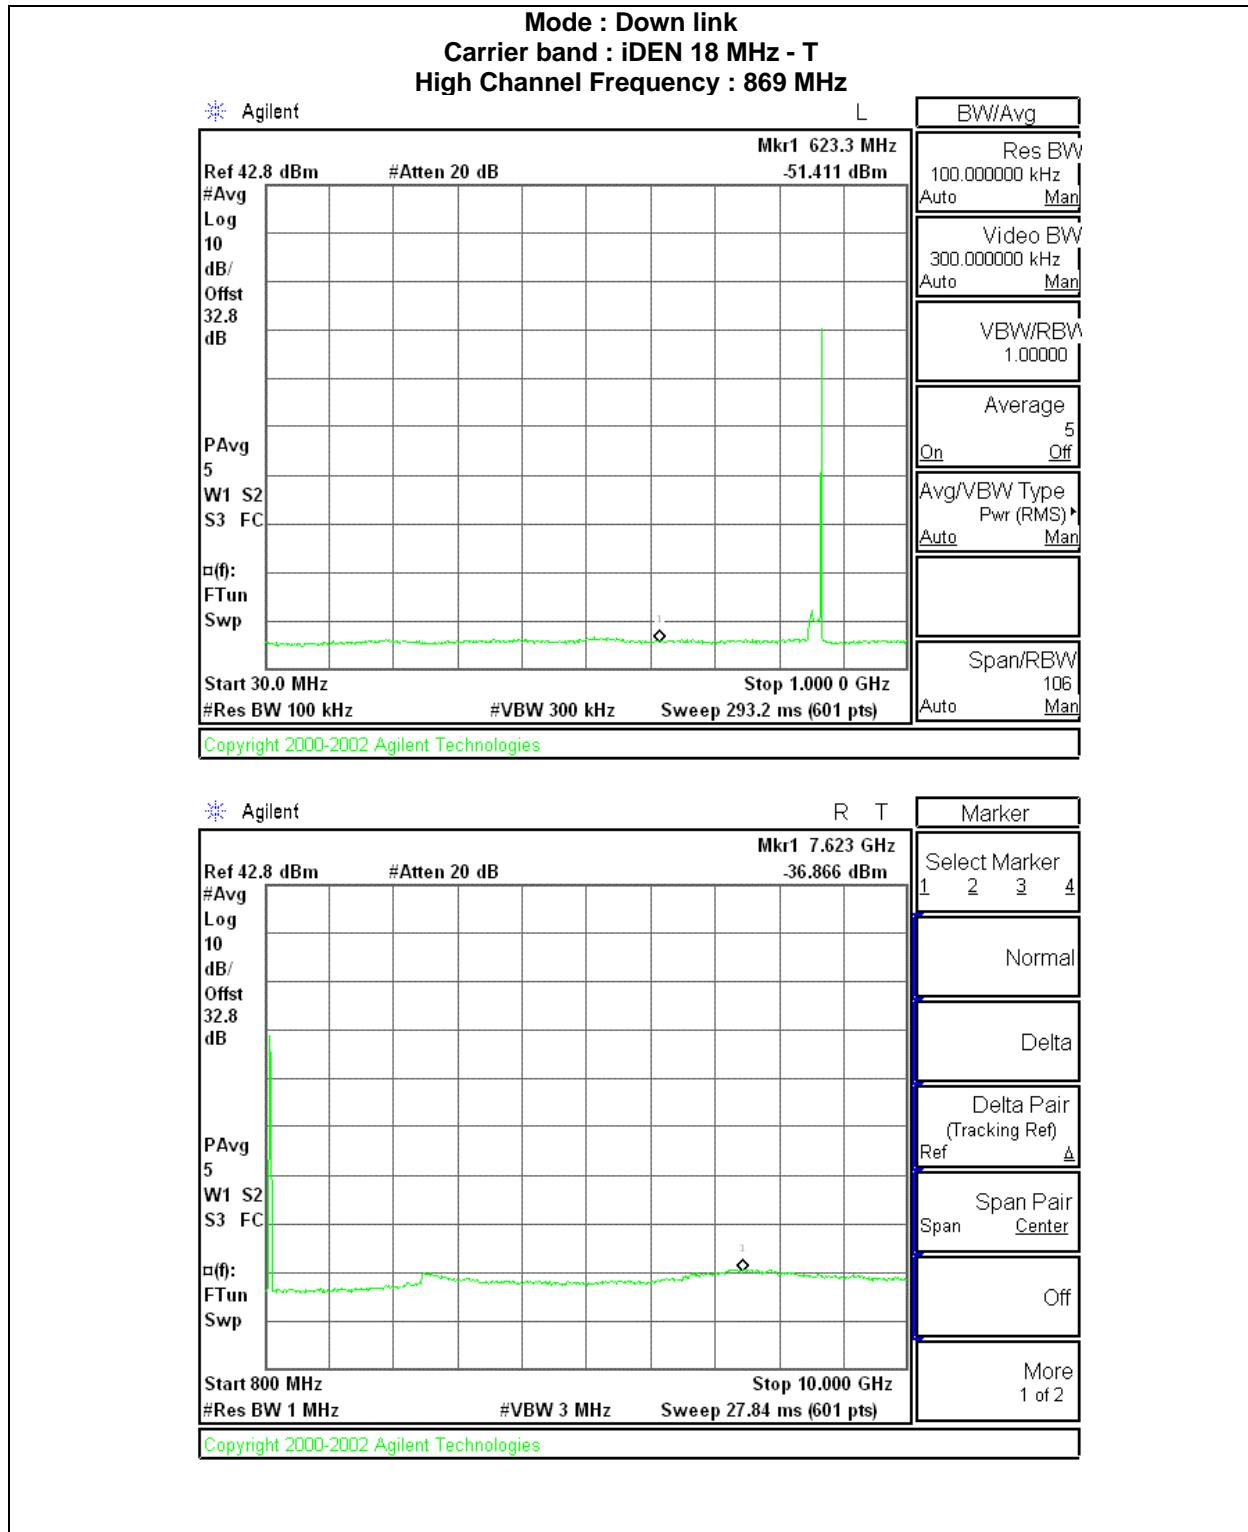


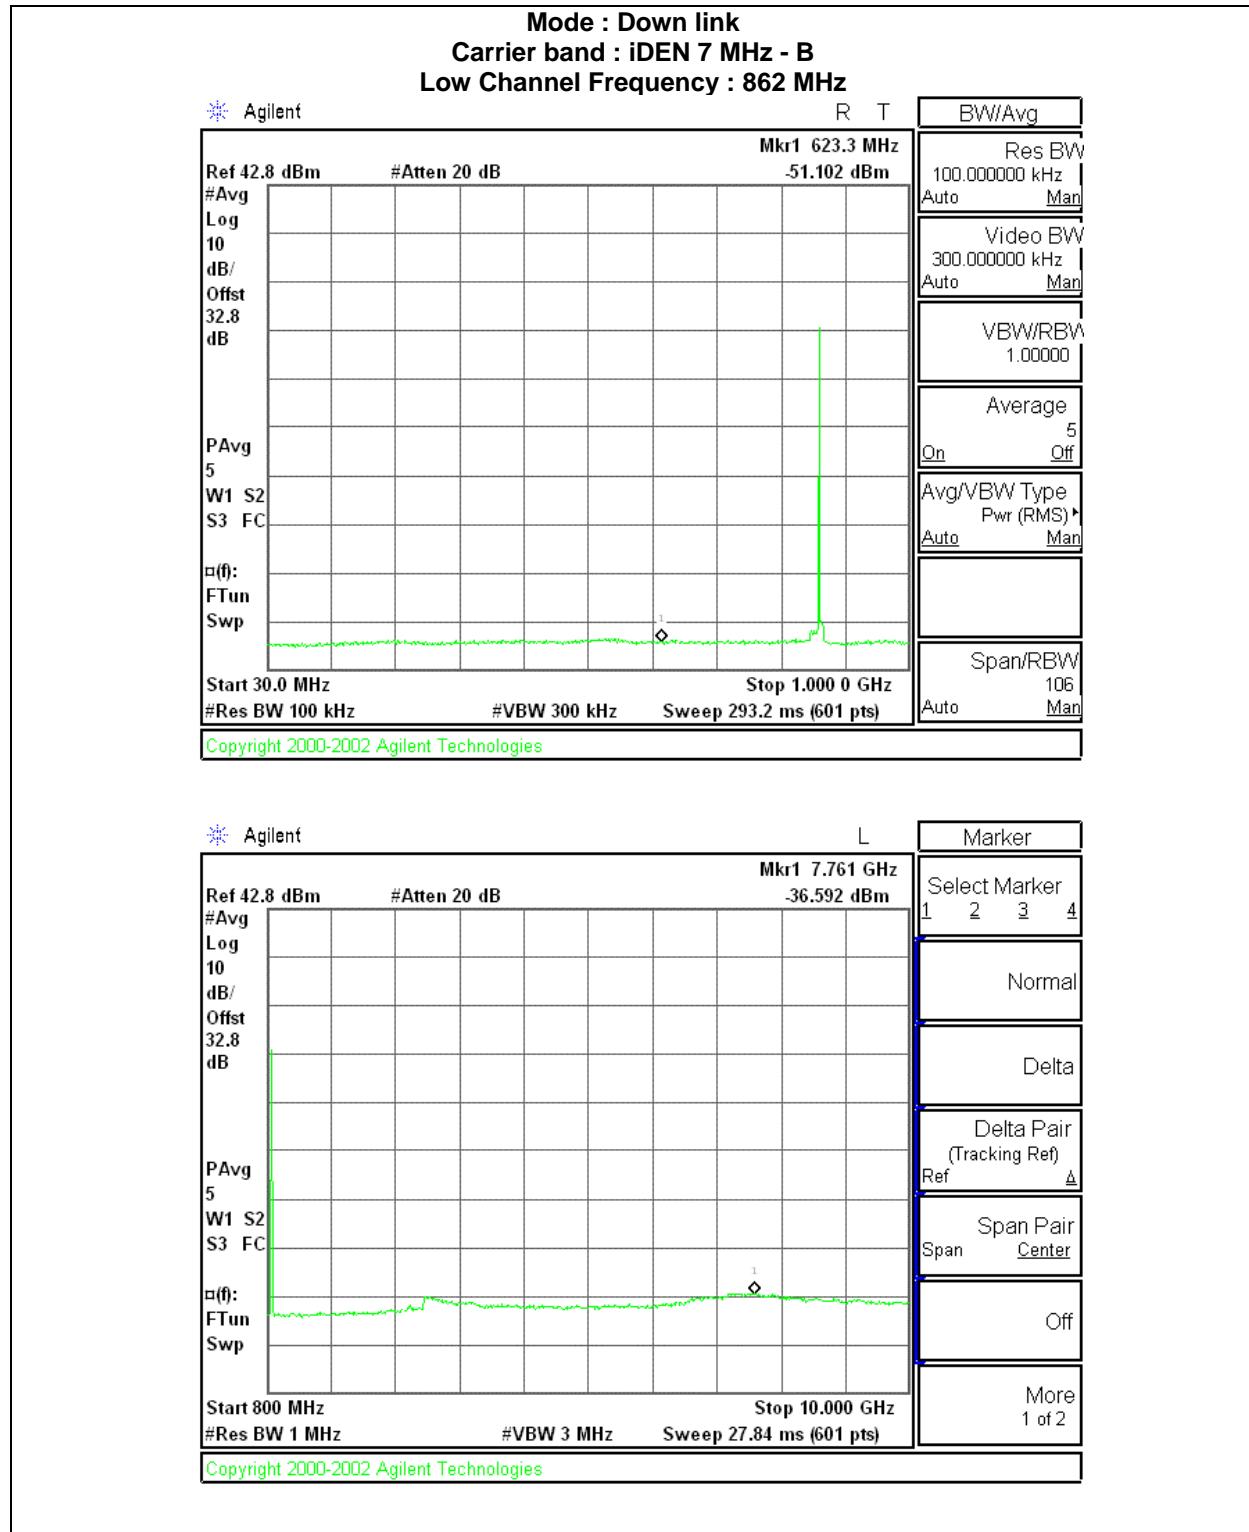


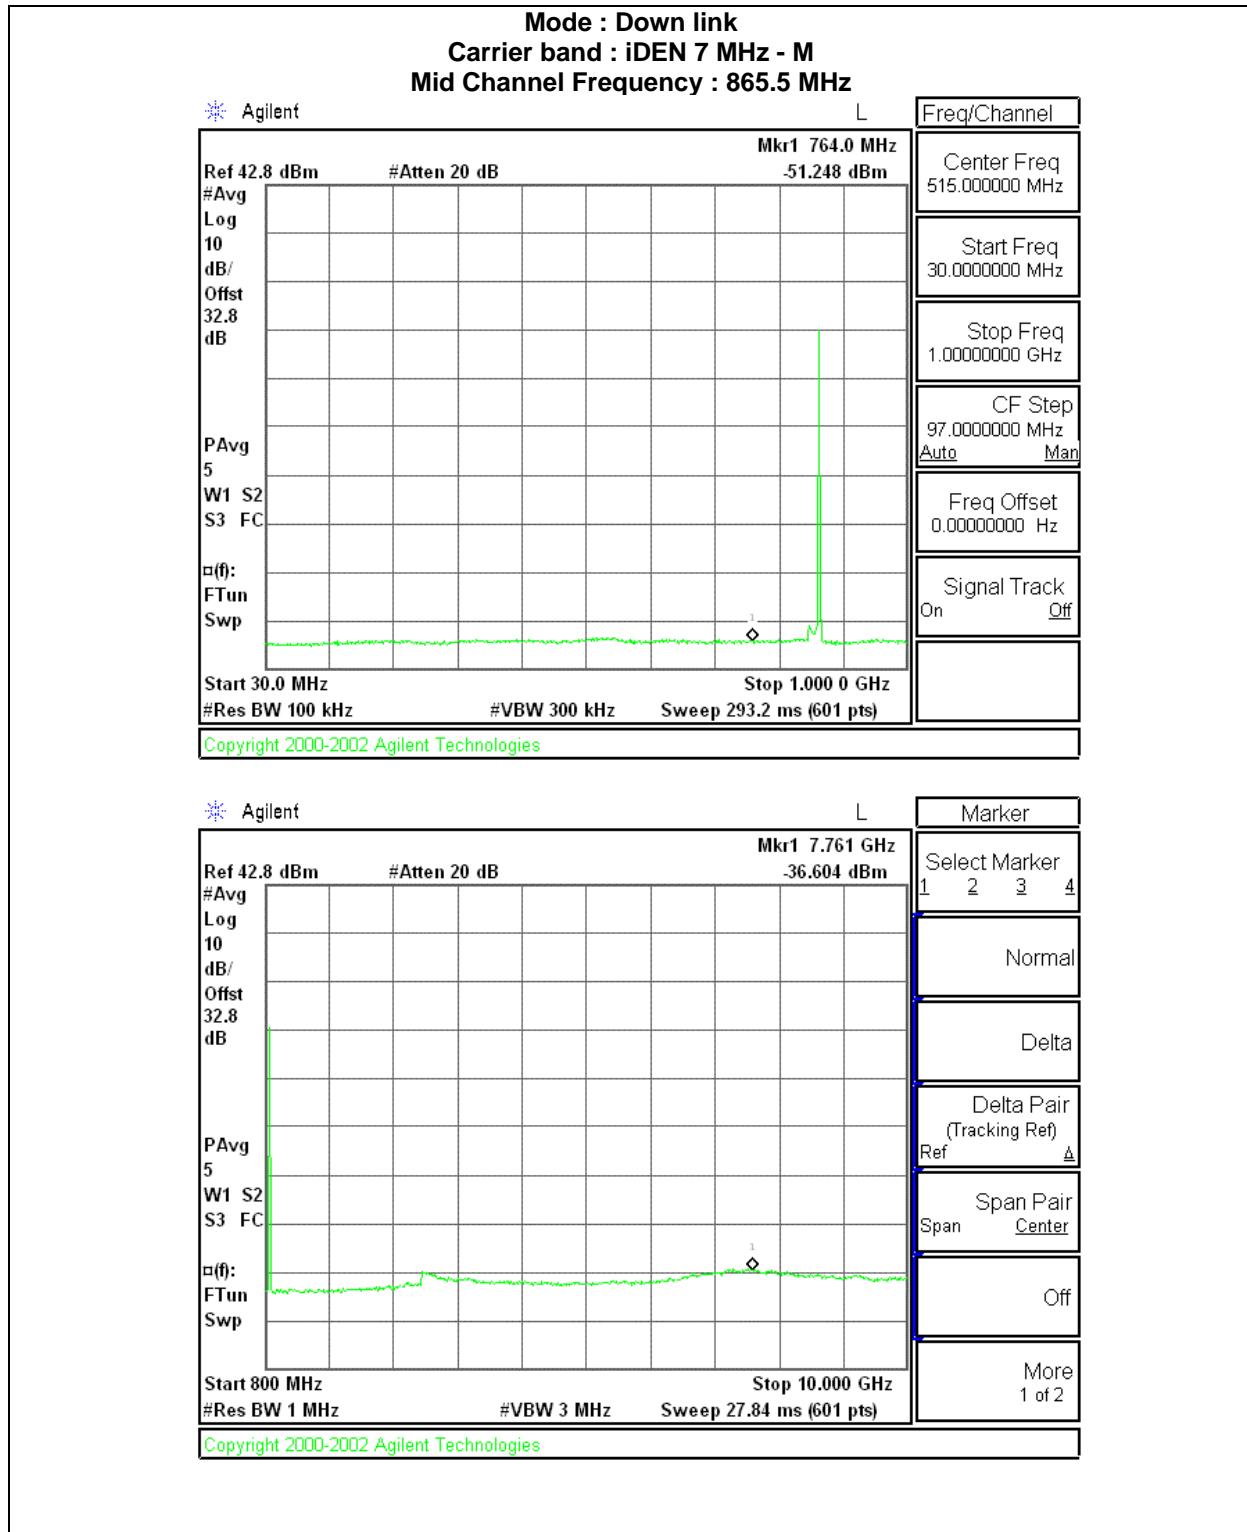

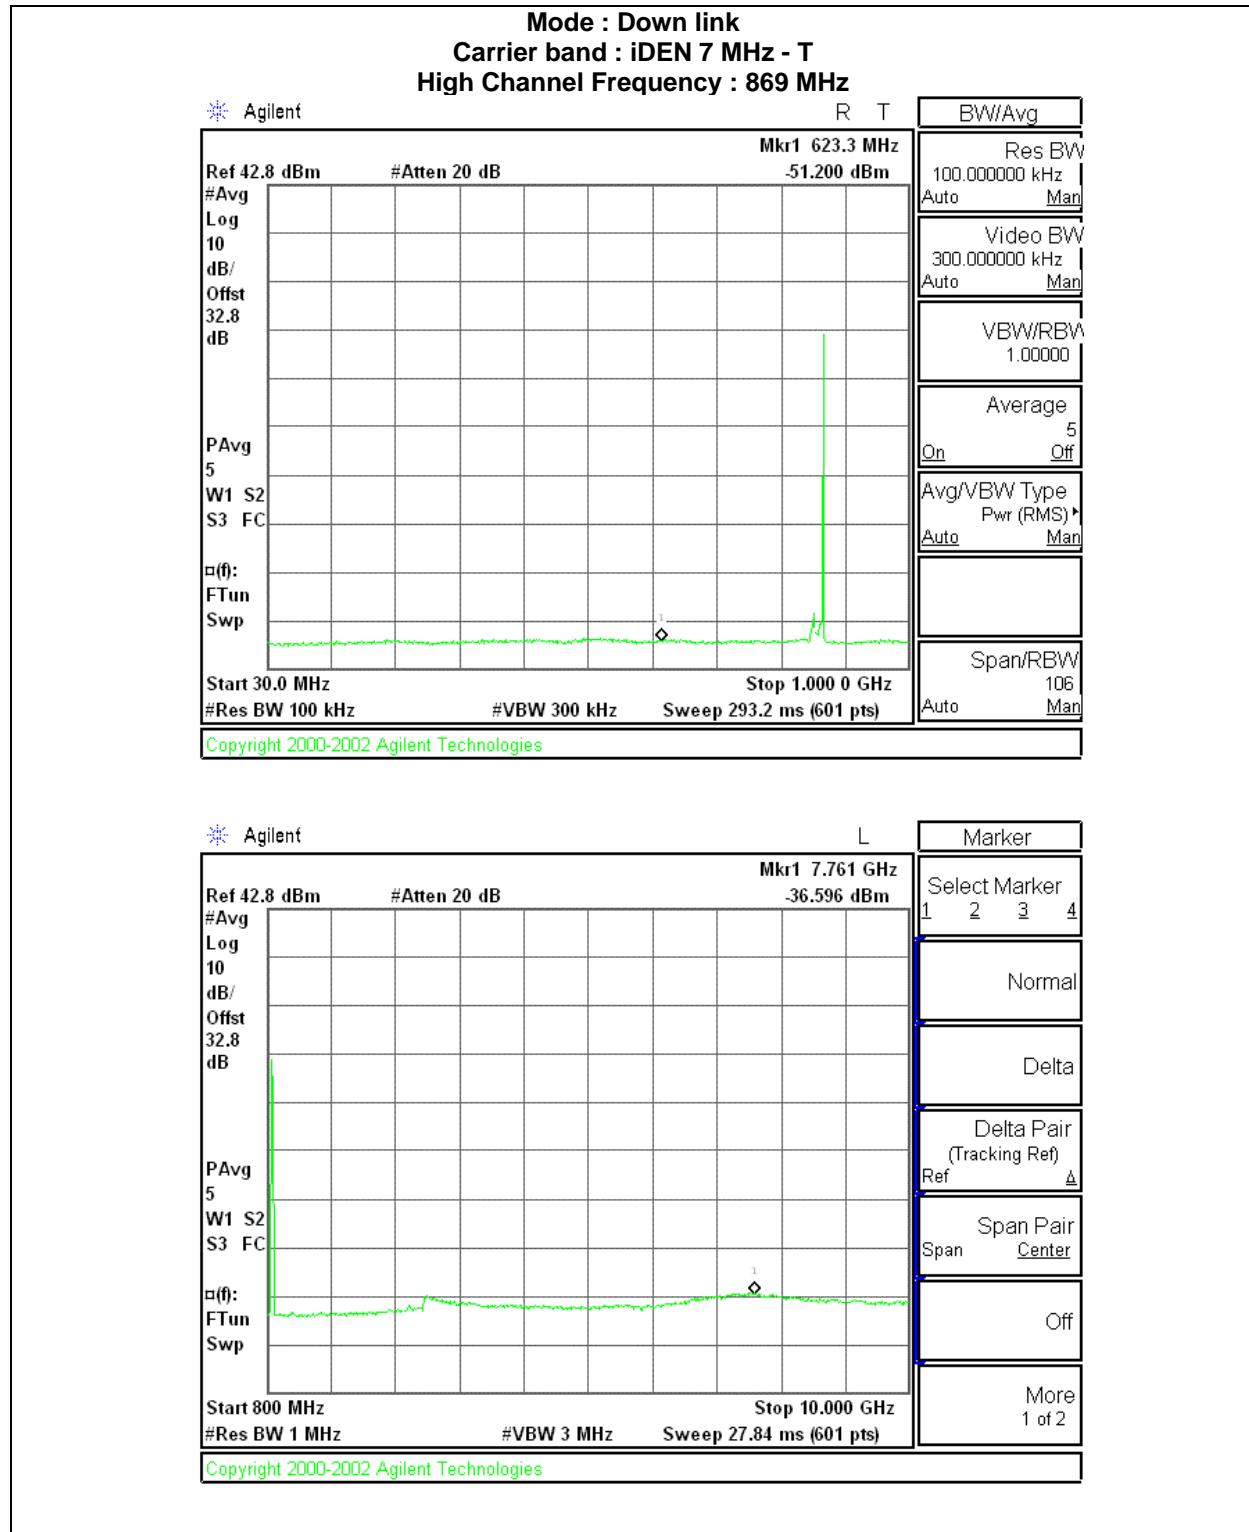


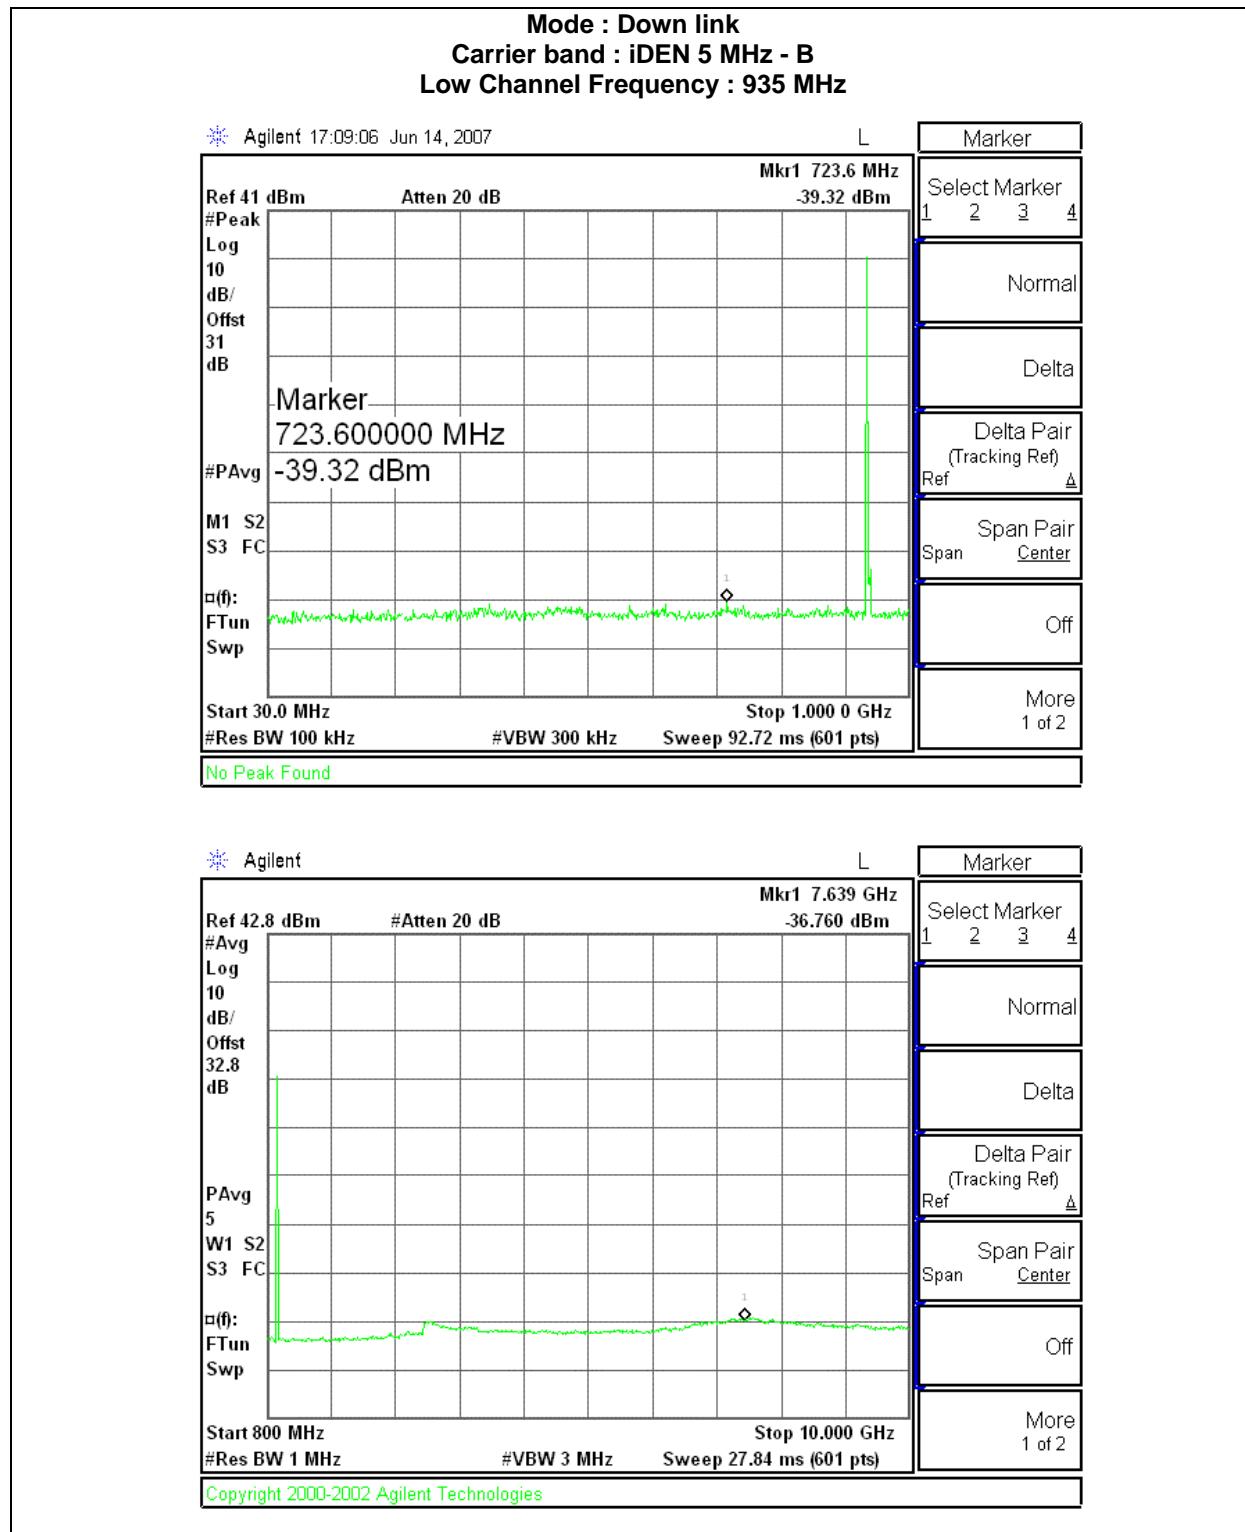

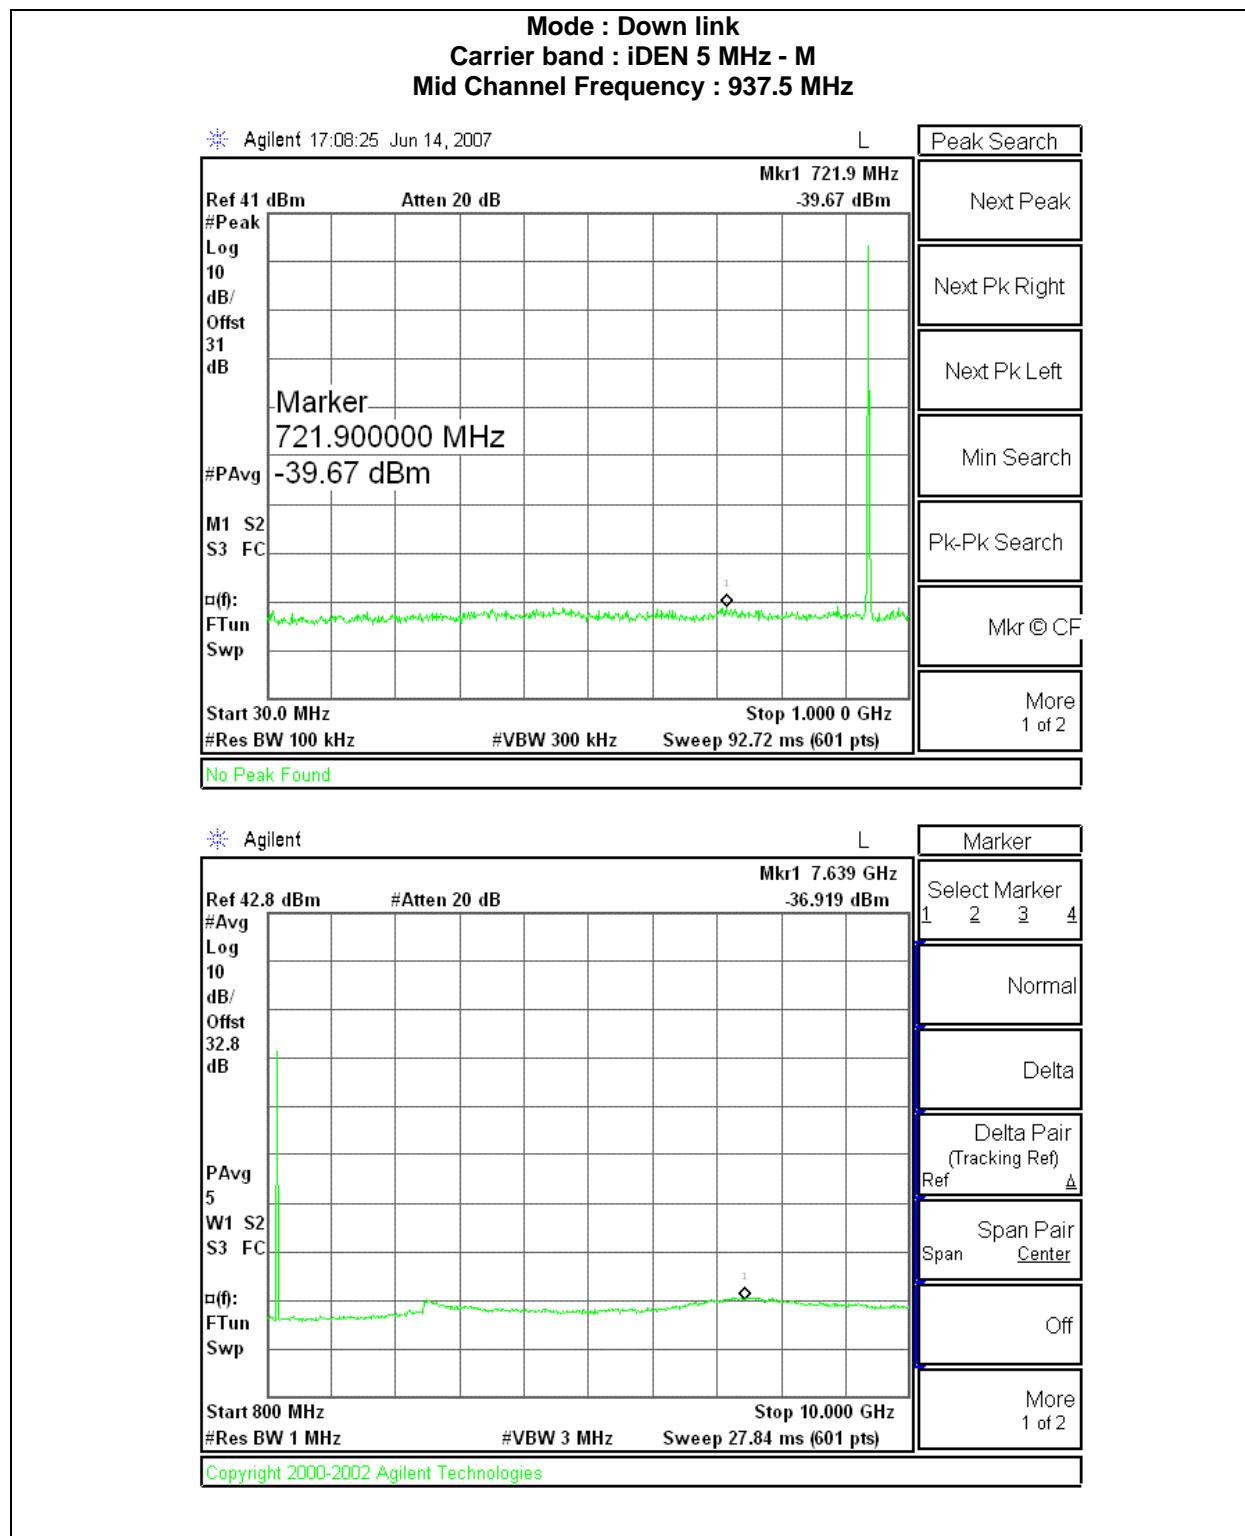


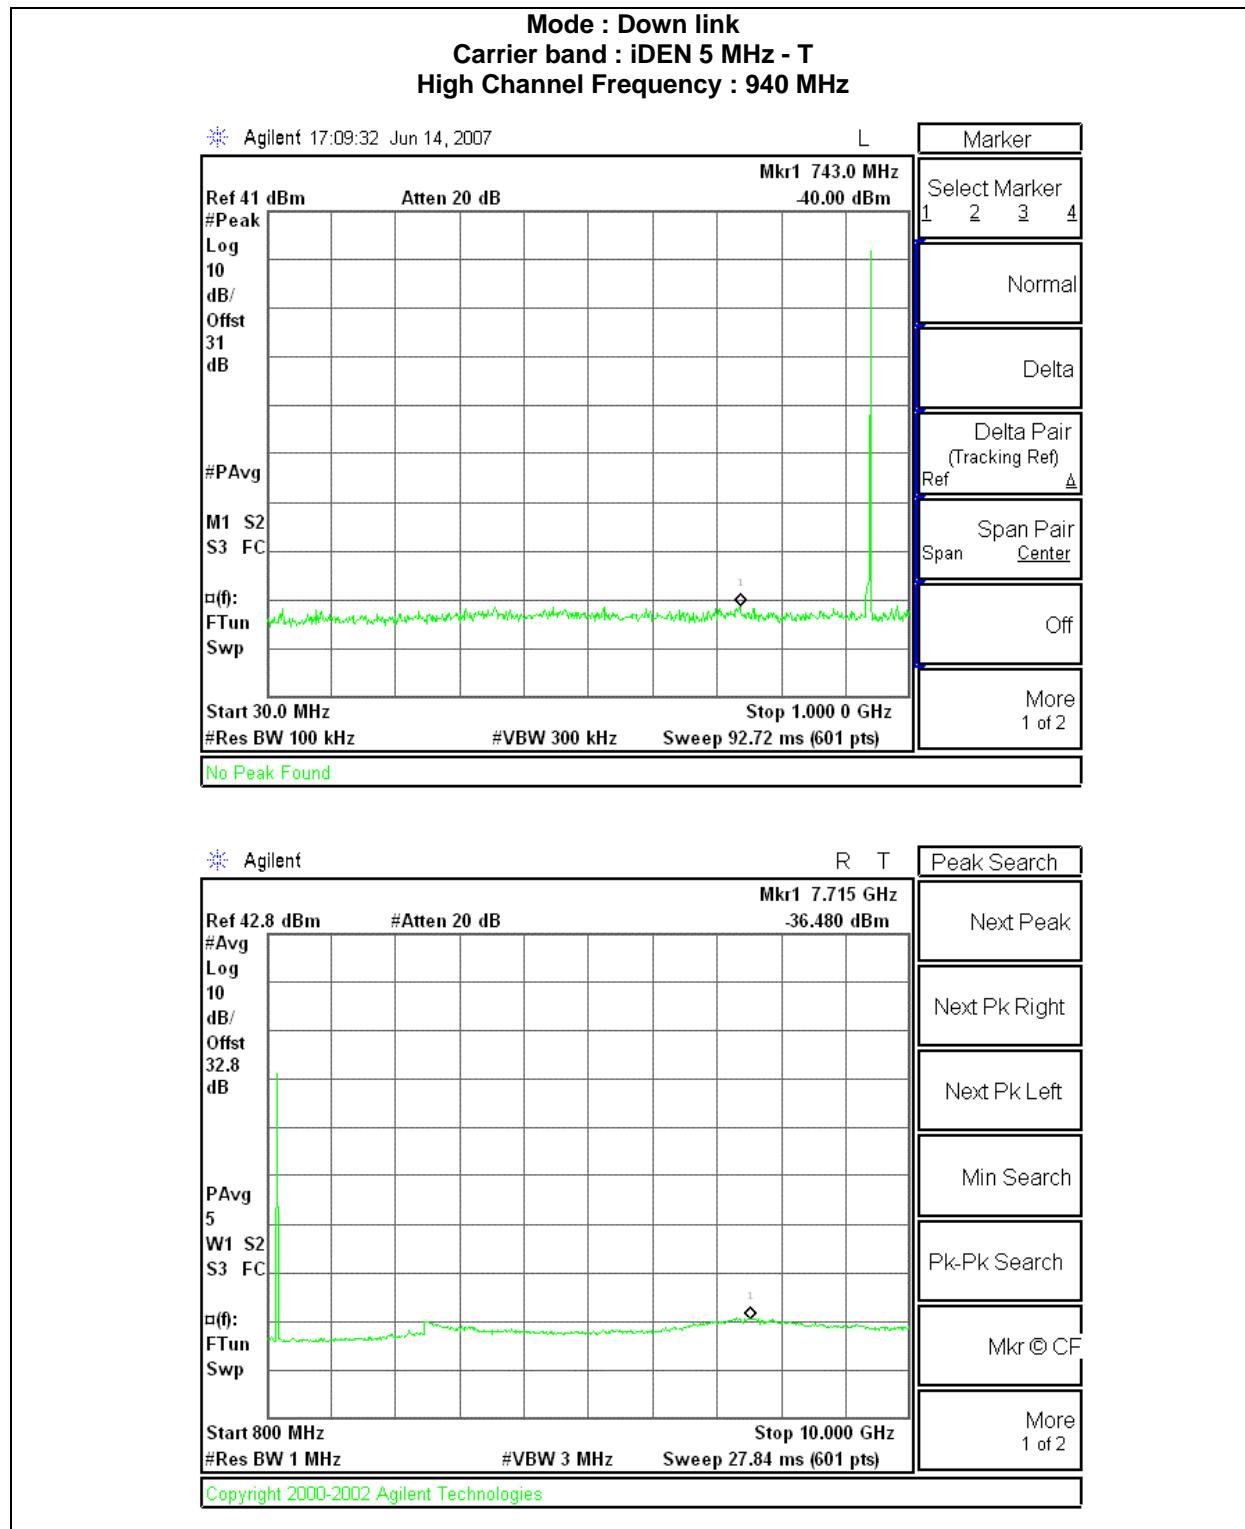



**Mode : Down link – Two Carrier Intermodulation**  
**Carrier band : iDEN 18 MHz – Low channel band edge**  
**Channel Frequency : 850/ 851 MHz**

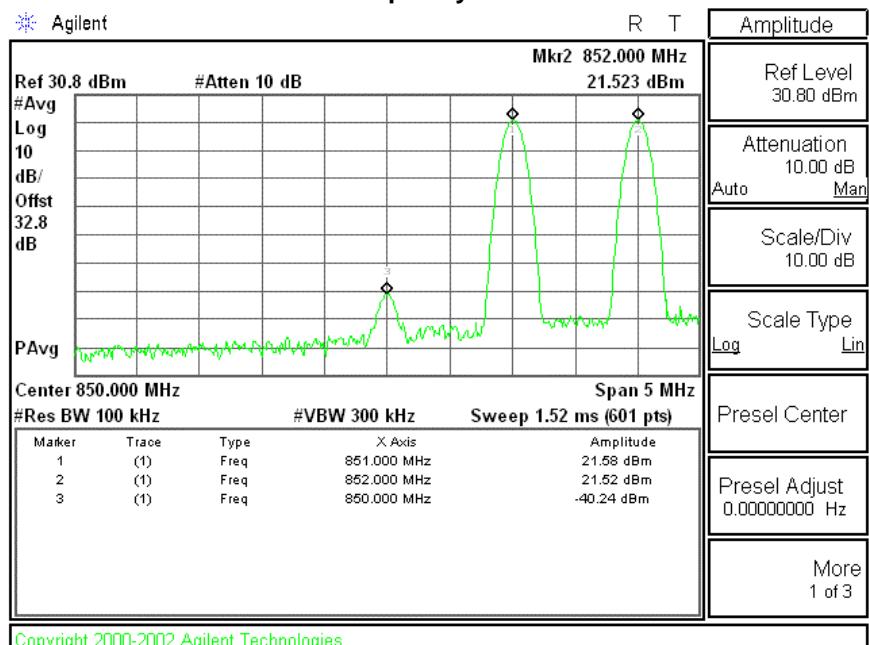


**Carrier band : iDEN 18 MHz – High channel band edge**  
**Channel Frequency : 868/ 869 MHz**

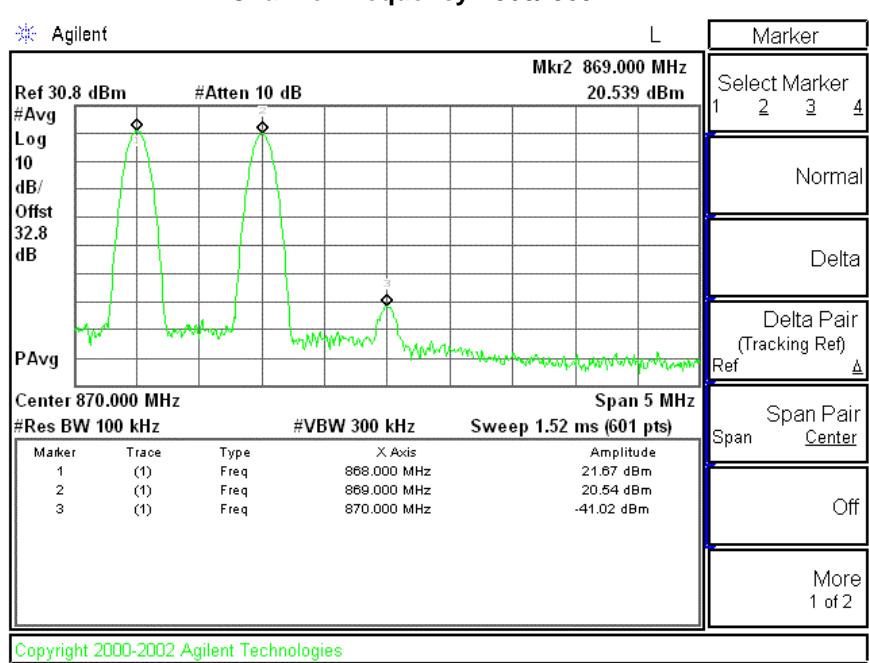

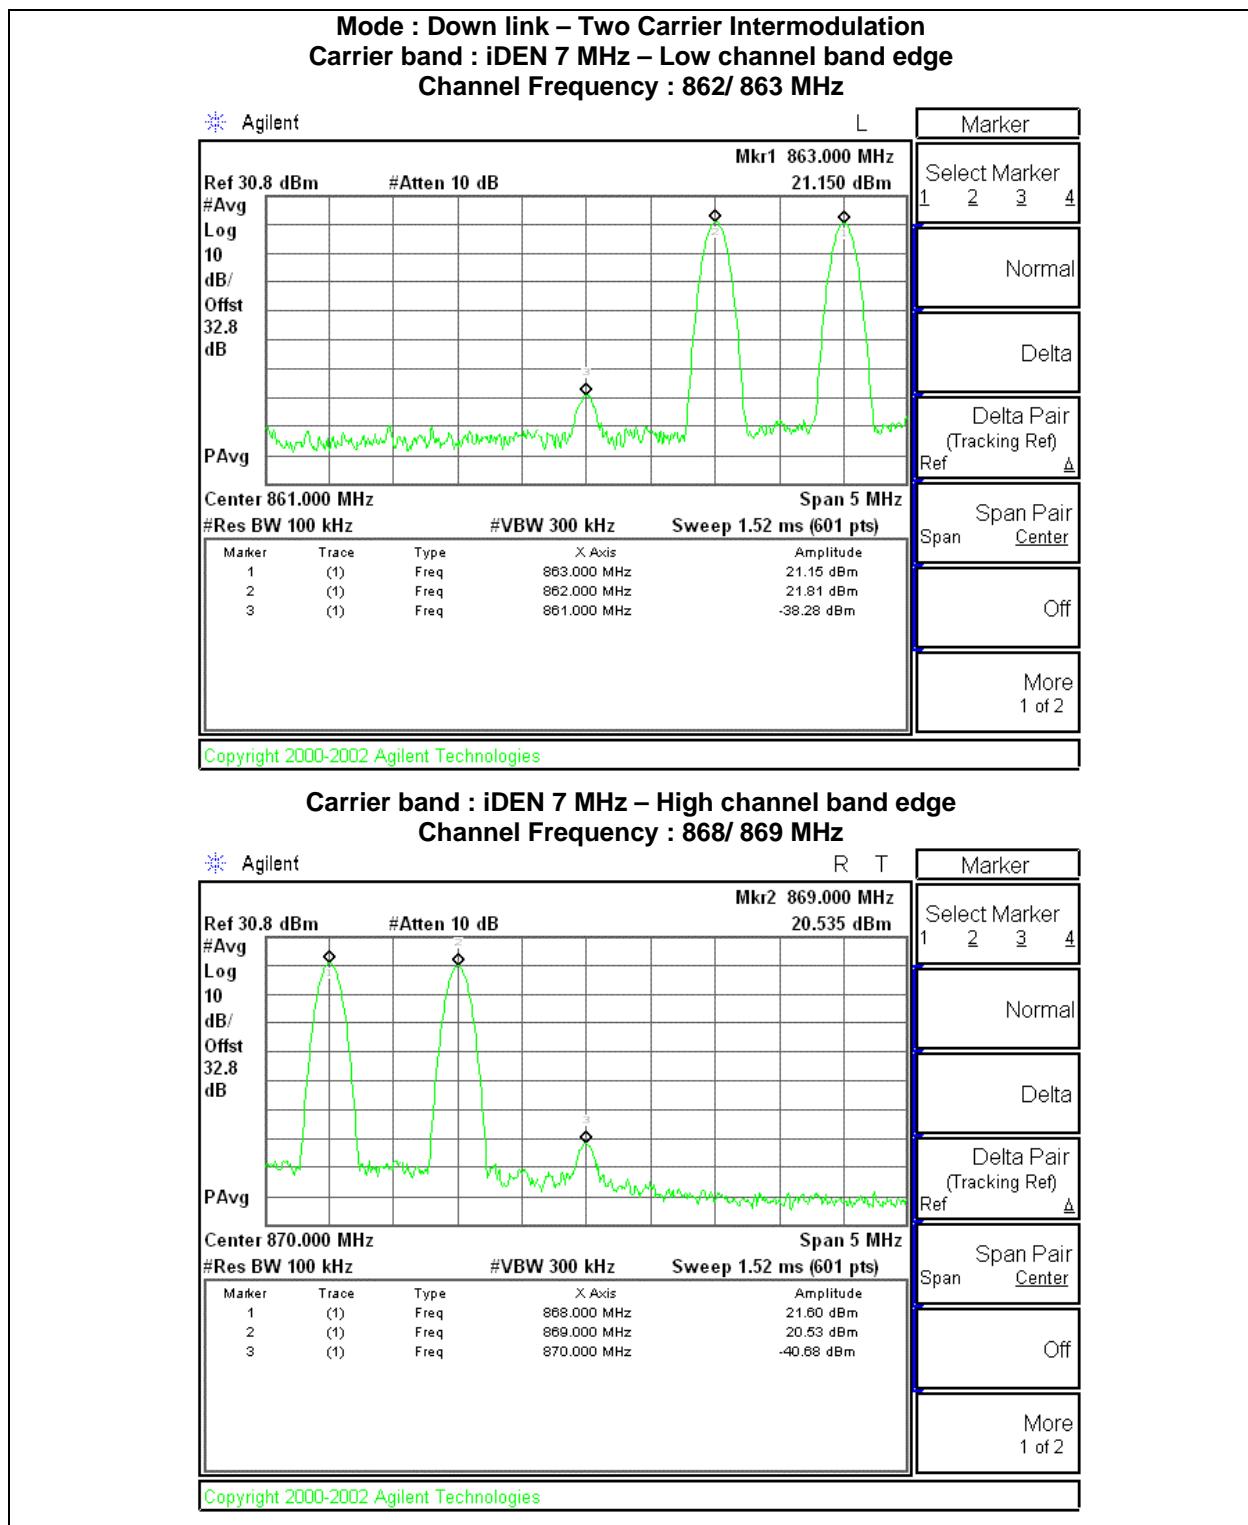


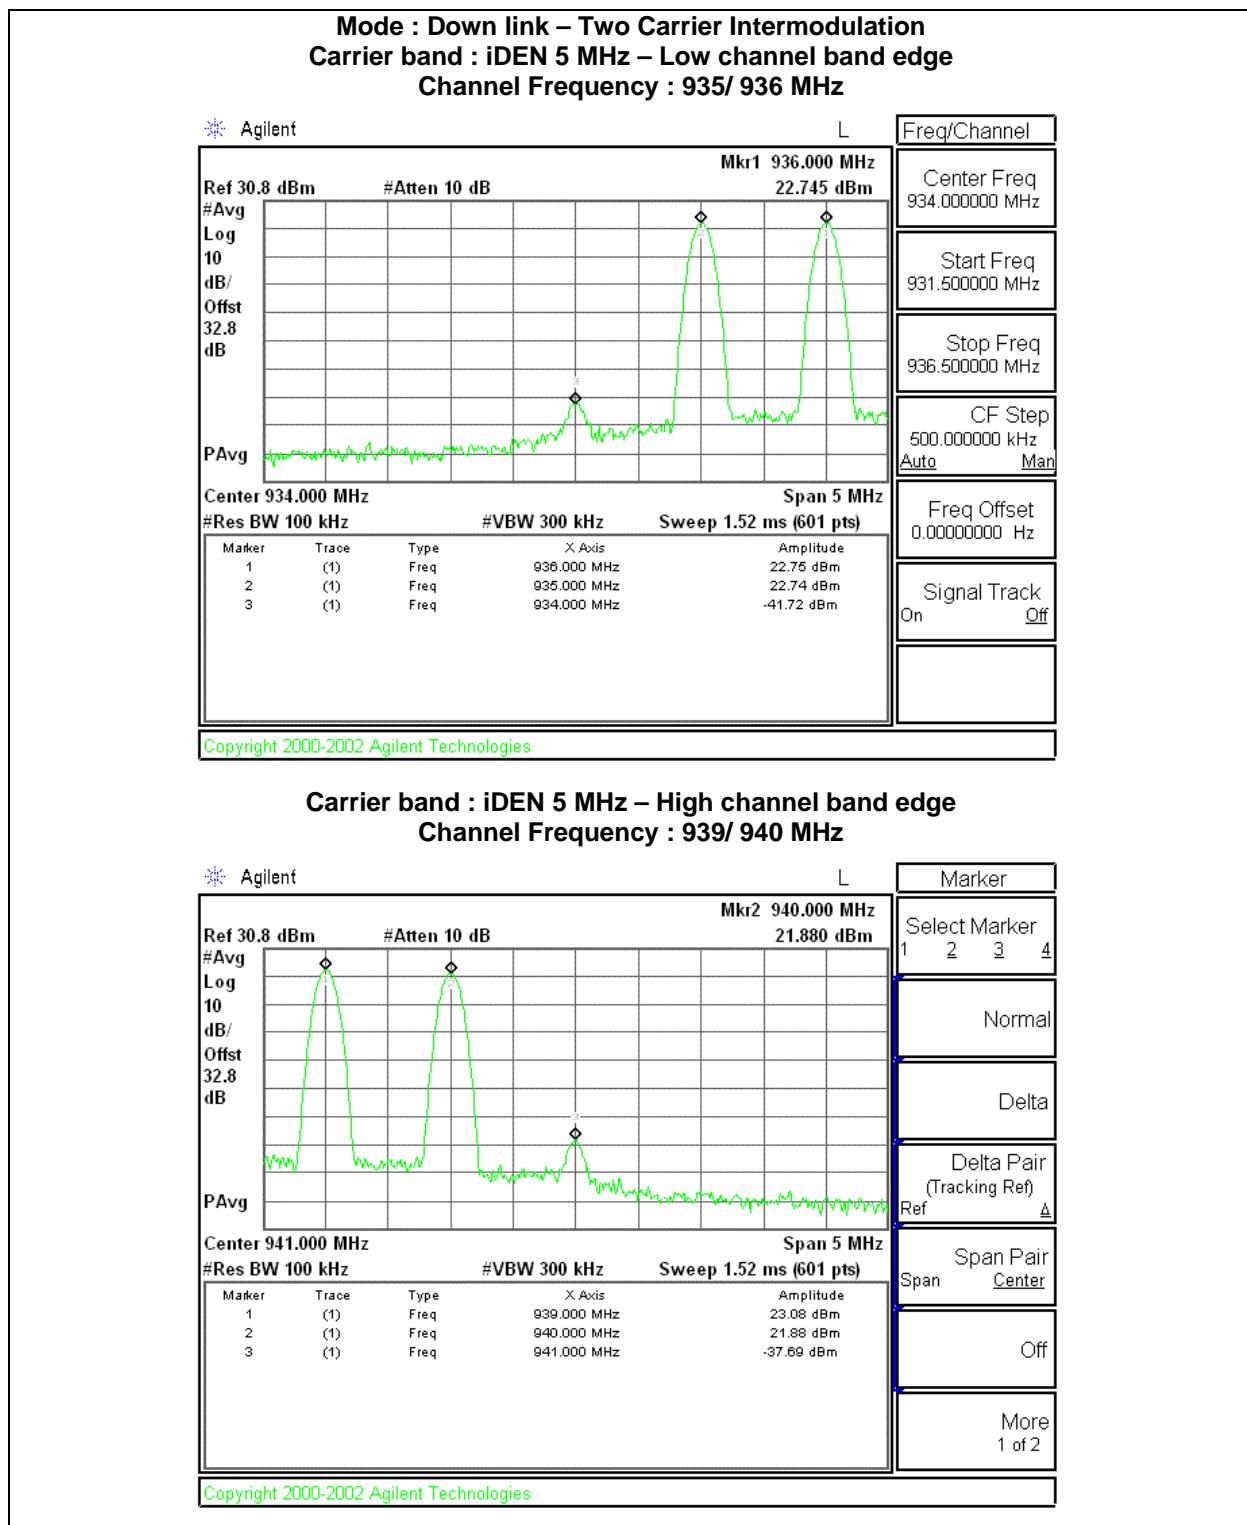



**Mode : Down link – Two Carrier Intermodulation**  
**Carrier band : CDMA – Low channel band edge**

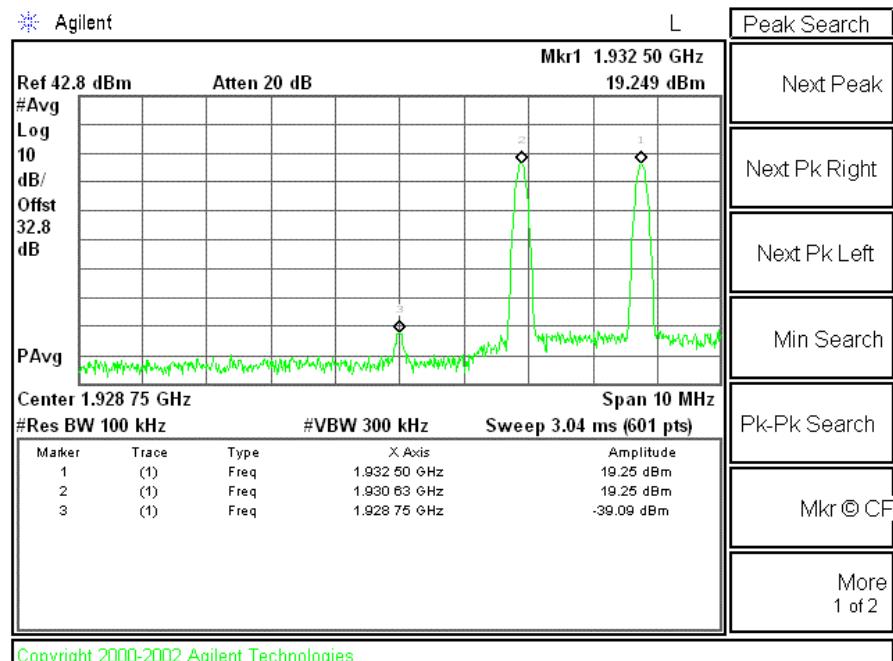


**Mode : Down link – Two Carrier Intermodulation**  
**Carrier band : CDMA – High channel band edge**

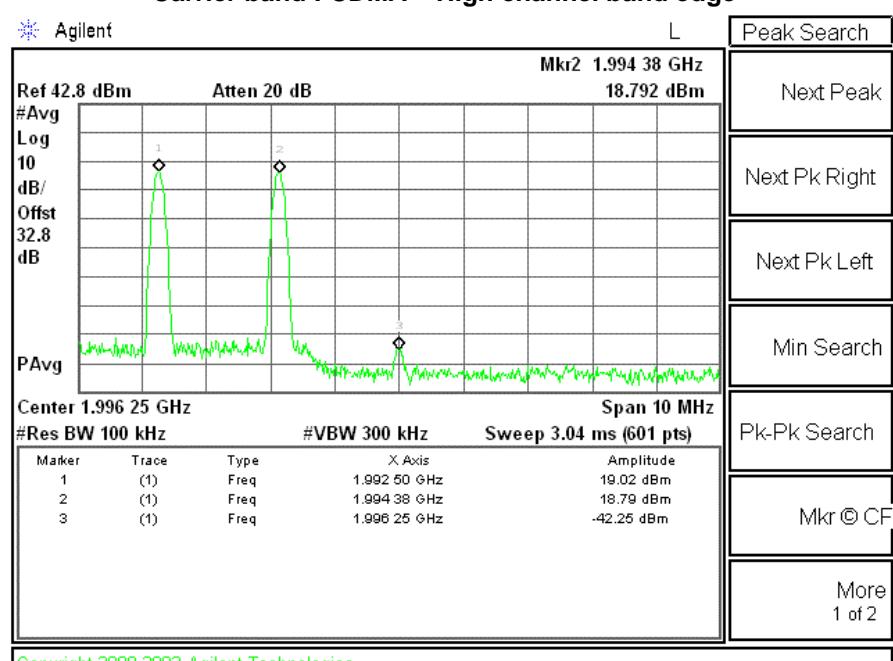

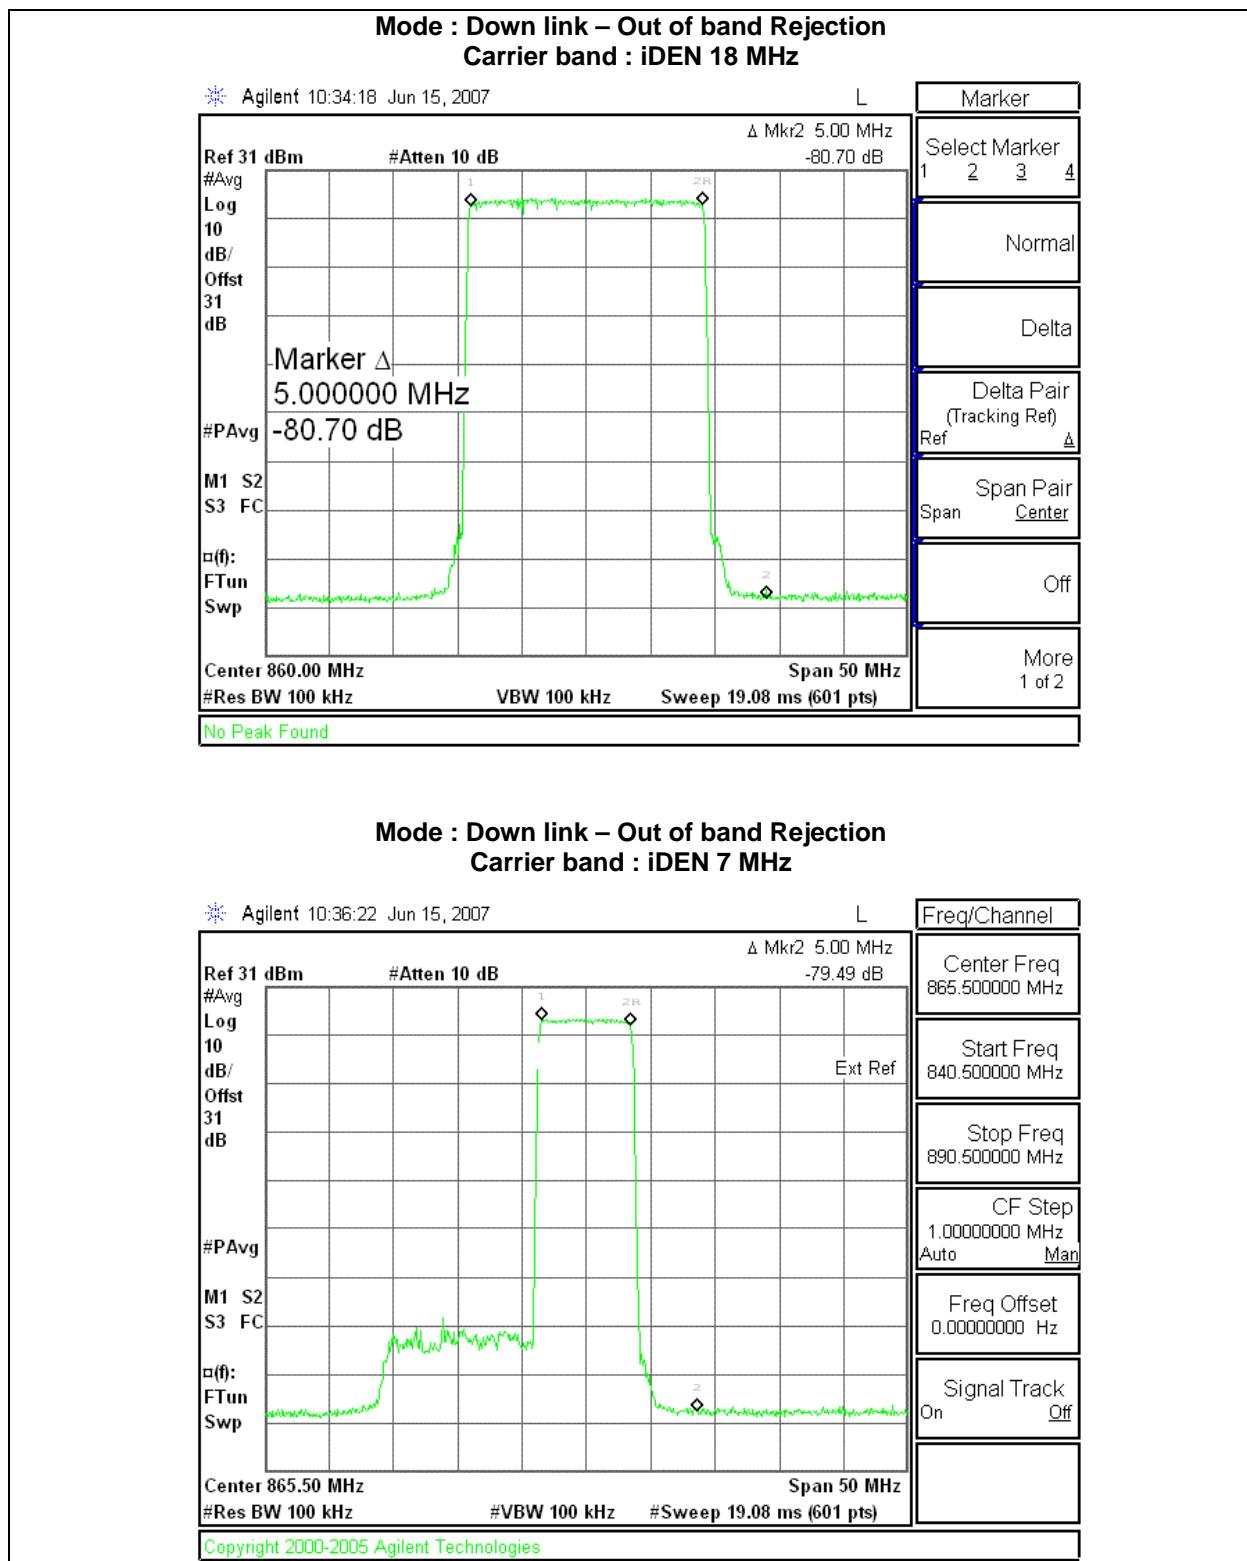

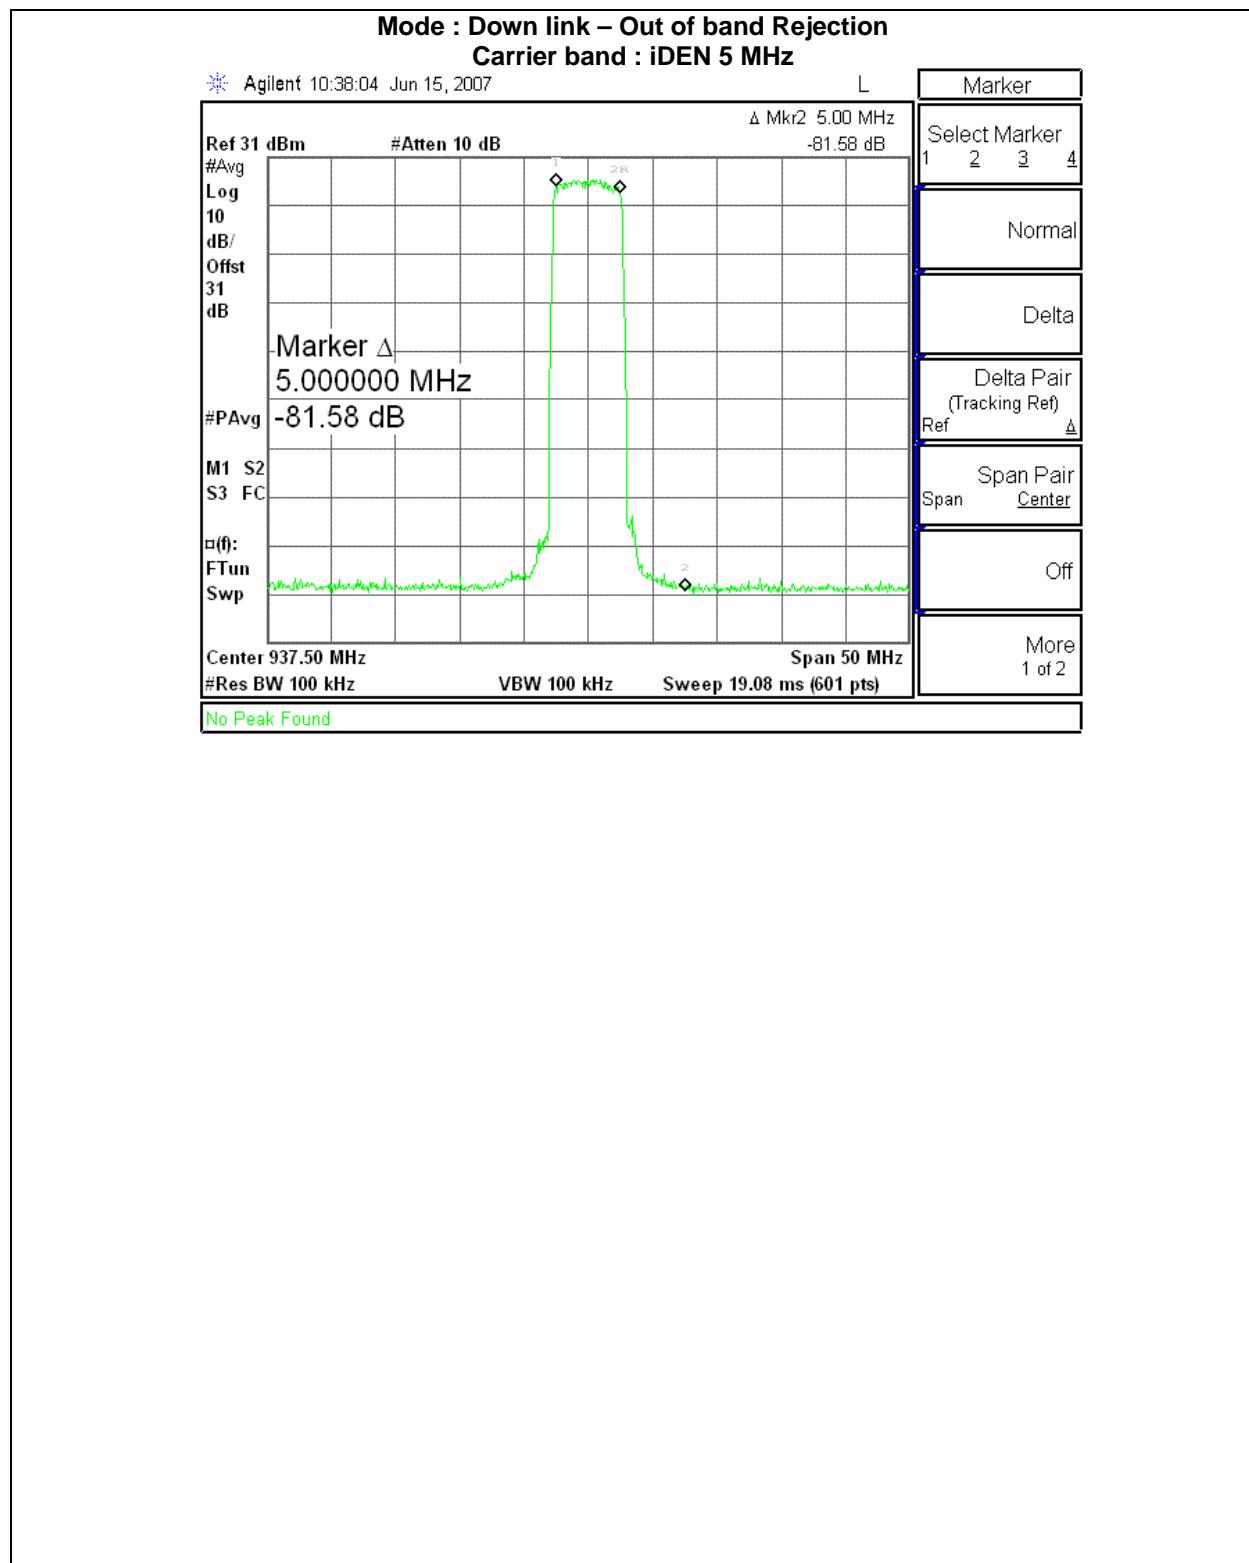

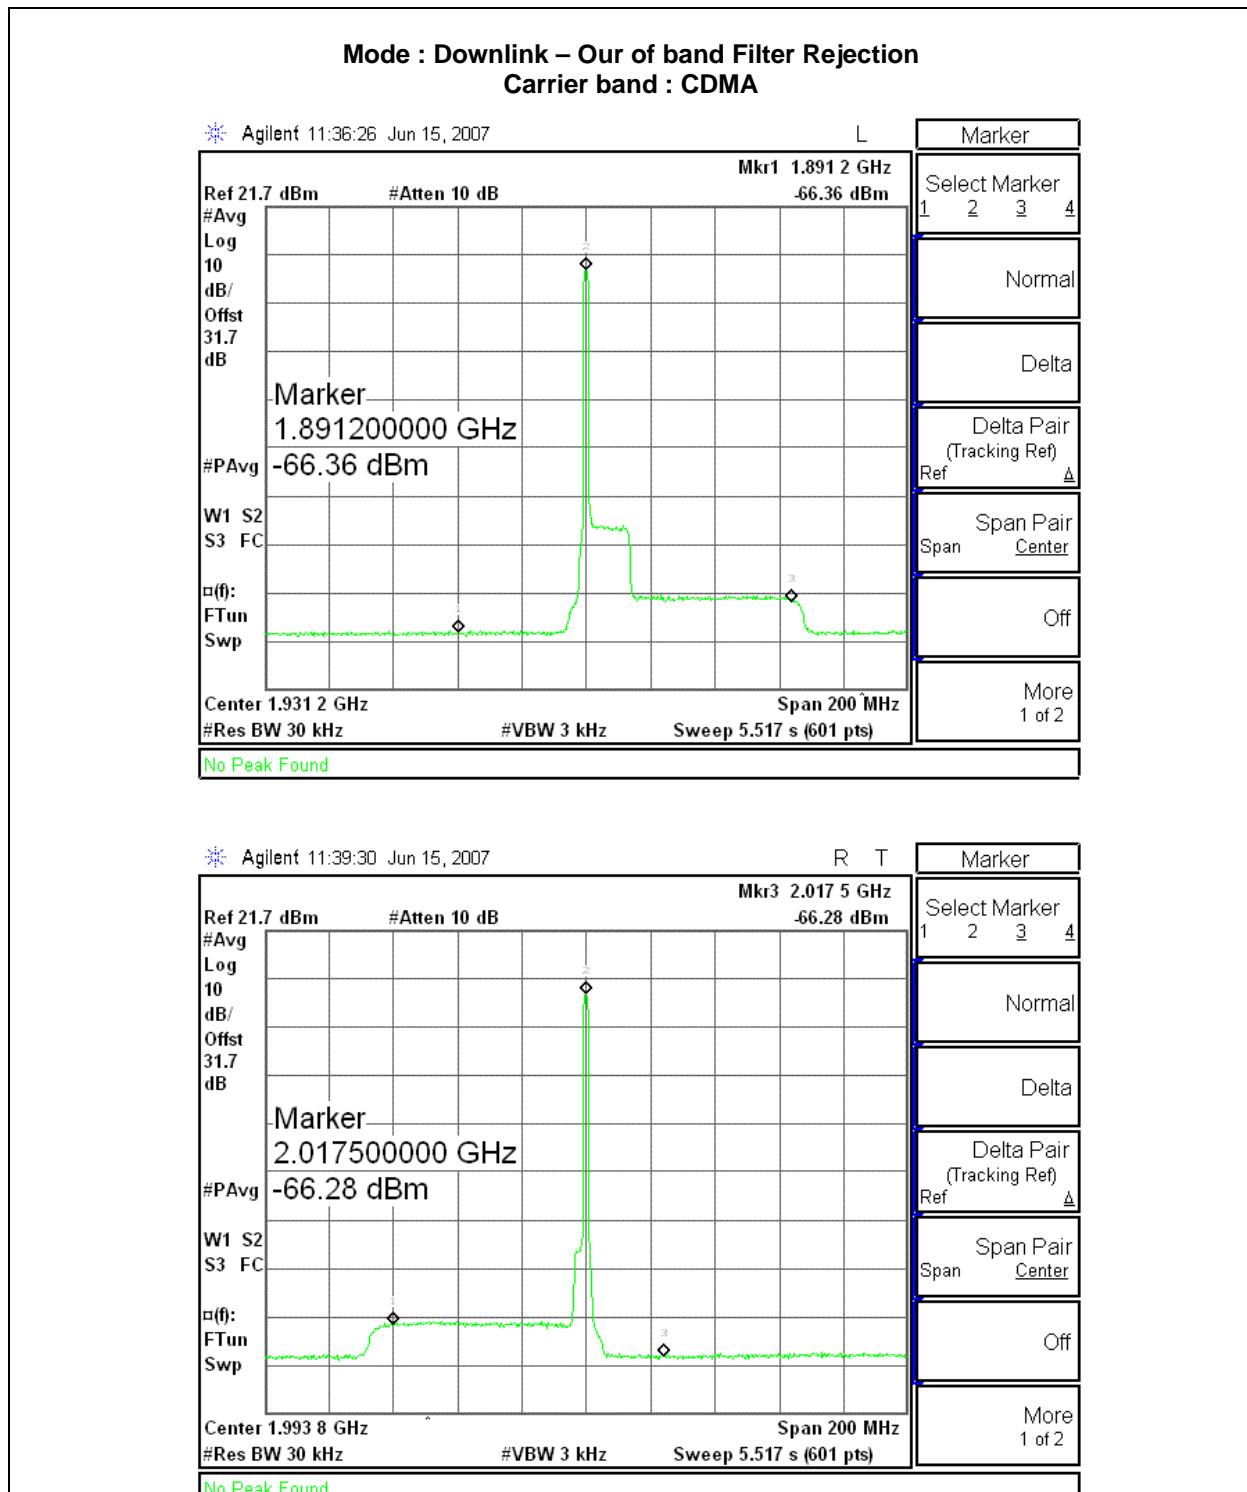

### 3.7 Test Conditions and Results – Radiated Spurious Emission

Test Description	Measurements were made in a 10-meter open field test site that complies to CISPR 16/ANSI C63.4. Preliminary (peak) measurements were performed at semi-anechoic chamber with an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters in accordance with procedure of substitution method specified in TIA/EIA-603-A-2003. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. The maximum EIRP of the emission was up to 10 <sup>th</sup> harmonics.			
Basic Standard	TIA/EIA/603-A-2003			
<b>Radiated Spurious Emission LIMITS</b>				
<p>§ 90.210 &amp; § 90.669 Emission limit : On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power(P) by at least <math>43 + 10\log_{10}(P)</math> dB or 80 dB, whichever is the lesser attenuation.</p>				
<p>§ 24.238 Emission limitations for Broadband PCS equipment (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</p>				
Parameters required prior to the test	Laboratory Ambient Temperature	10 to 40 °C		
	Relative Humidity	10 to 90 %		
Parameters recorded during the test	Laboratory Ambient Temperature	27 °C		
	Relative Humidity	47 %		
	Frequency range	Measurement Point		
Fully configured sample scanned over the following frequency range	1GHz – 10GHz	(3 meter measurement distance)		
<b>Limits – EIRP</b>				
Frequency (MHz)	Limit (dBm EIRP)			
	Peak	Average		
Harmonics up to 10 <sup>th</sup>	-13	NA		
Supplementary information:				

### Conducted spurious emission Spectrum Analyzer Settings

Frequency Range (MHz)	Resolution Bandwidth	Resolution Bandwidth
1 GHz ~ 10 GHz	1 MHz	3 MHz
Supplementary information: Peak measurement		



### Radiated Emissions EUT Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See Section 2.6)
1	3, 4	3, 4
Supplementary information: The EUT operating on modes specified in Section 2.7 have been investigated and final measurement was made at the worst case condition.		

### Radiated Emissions Test Equipment

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Bilog Antenna	Schwarzbwck	VULB9160	9160-3122	2006-12-29	2007-12-29
Test Receiver	Rohde & Schwarz	ESVN30	832854/010	2005-06-22	2006-06-22
Signal Generator	Aeroflex	IFR3413	341006/012	2006-09-26	2007-09-26
Horn Antenna	Schwarzbeck	BBHA 9120D	234	2007-02-08	2008-02-08
Test Receiver	Rohde & Schwarz	ESPI	100063	2006-11-09	2007-11-09

**Figure 8 Test setup for Spurious Radiated Emissions**

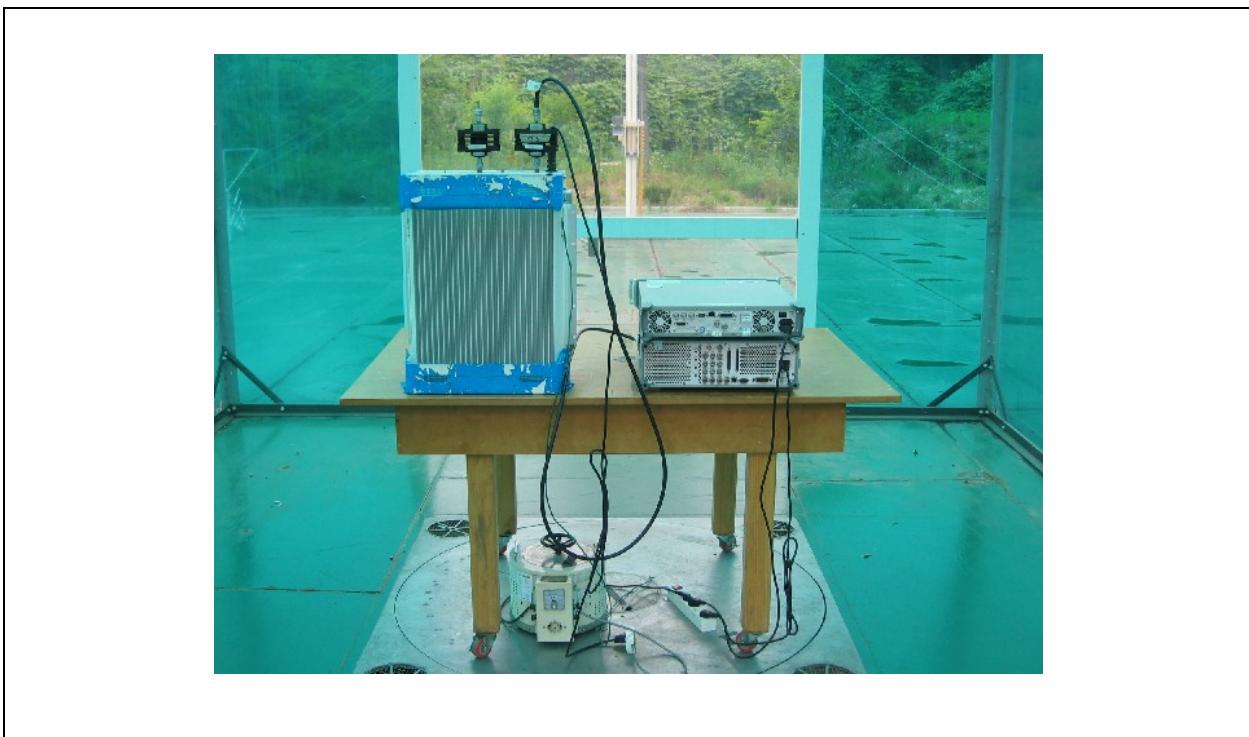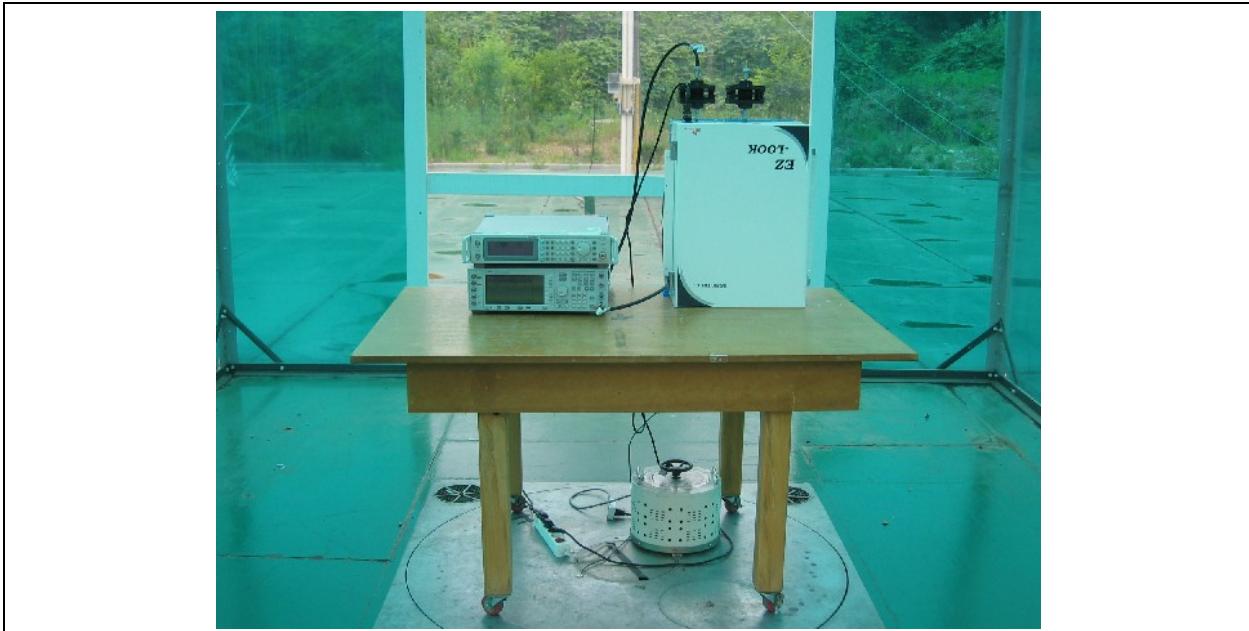

**Table 7 Spurious Radiated Emissions Data Points**

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk/QP)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Gain/Loss Factor (dB)	Transducer Factor (dB/m)	Level dBuV/m	Limit 1 dBuV/m	Margin (dB)
<p>Supplementary information: <b>No emissions were detected within 20dB below the permitted limit.</b></p>										

### 3.8 Test Conditions and Results – Frequency Stability

Test Description	For Temperature Frequency Stability, measurements were made with the product placed in an environmental chamber and the temperature varied from -30°C to +50°C at the normal supply voltage. The frequency drift of the fundamental frequency was measured with a spectrum analyzer. For Power Supply Frequency Stability, measurements were made in a laboratory environment and the supply voltage varied from 85% to 115%. The ambient temperature was 20°C.
Basic Standard	47 CFR § 2.1055, § 90.213, § 24.135, 24.235
<b>Frequency Stability Limits</b>	
<p>§ 90.213 +/- 1 ppm of the Operating Frequency Tuned</p> <p>§ 24.135 Frequency stability (a) The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±1 ppm of the center frequency over a temperature variation of -30°C to +50°C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C.</p>	

#### Frequency Stability Configuration Settings

Power Interface Mode # (See Section 2.4)	EUT Configurations Mode # (See Section 2.9)	EUT Operation Mode # (See 2.6)
1,2,3	3, 4	3, 4
Supplementary information: - No modulation, - Before the testing, the signal generator and spectrum analyzer were synchronized by using the external sync. Frequency measurement was made by spectrum analyzer - Reference temperature : 20°C		

#### Frequency Stability Test Equipment

Description	Manufacturer	Model	Identifier
Temperature chamber	NeingYoul	NY-THR	13200
Temperature Recorder	Yokogawa	SR-1006	-
Signal Generator	Aeroflex	IFR3413	341006/212
Spectrum Analyzer	Agilent	E4440A	MY44022474
Fixed Attenuator	H.P	8498A	3318A10568

**Table 8 Frequency Stability Test results**

**Table 8-1. Frequency Stability with variation of Ambient Temperature – iDEN Uplink**

Carrier Band	Temperature (°C)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
iDEN 18 MHz	50	815,000,000.000	815,000,000.000	0.000000	1.0
	40	815,000,000.000	814,999,999.993	-0.000009	1.0
	30	815,000,000.000	814,999,999.997	-0.000004	1.0
	20	Reference			
	10	815,000,000.000	814,999,999.996	-0.000005	1.0
	0	815,000,000.000	815,000,000.000	0.000000	1.0
	-10	815,000,000.000	815,000,000.002	0.000002	1.0
	-20	815,000,000.000	814,999,999.999	-0.000001	1.0
	-30	815,000,000.000	814,999,999.998	-0.000002	1.0
	50	820,500,000.000	820,499,999.999	-0.000001	1.0
iDEN 7 MHz	40	820,500,000.000	820,500,000.000	0.000000	1.0
	30	820,500,000.000	820,500,000.004	0.000005	1.0
	20	Reference			
	10	820,500,000.000	820,500,000.004	0.000005	1.0
	0	820,500,000.000	820,500,000.003	0.000004	1.0
	-10	820,500,000.000	820,500,000.007	0.000009	1.0
	-20	820,500,000.000	820,499,999.997	-0.000004	1.0
	-30	820,500,000.000	820,500,000.003	0.000004	1.0
	50	898,500,000.000	898,499,999.995	-0.000006	1.0
	40	898,500,000.000	898,500,000.003	0.000003	1.0
iDEN 5 MHz	30	898,500,000.000	898,500,000.004	0.000004	1.0
	20	Reference			
	10	898,500,000.000	898,499,999.998	-0.000002	1.0
	0	898,500,000.000	898,500,000.002	0.000002	1.0
	-10	898,500,000.000	898,499,999.997	-0.000003	1.0
	-20	898,500,000.000	898,500,000.002	0.000002	1.0
	-30	898,500,000.000	898,500,000.003	0.000003	1.0

**Table 8-2. Frequency Stability with variation of Input voltage - iDEN Uplink**

Carier Band	Input voltage (V)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
iDEN 18 MHz	102 Vac	815,000,000.000	814,999,999.995	-0.000006	1.0
	138 Vac	815,000,000.000	814,999,999.996	-0.000005	1.0
iDEN 7 MHz	102 Vac	820,500,000.000	820,499,999.999	-0.000001	1.0
	138 Vac	820,500,000.000	820,499,999.999	-0.000001	1.0
iDEN 5 MHz	102 Vac	898,500,000.000	898,499,999.998	-0.000002	1.0
	138 Vac	898,500,000.000	898,499,999.996	-0.000004	1.0

**Table 8-3. Frequency Stability with variation of Ambient Temperature - iDEN Downlink**

Carrier Band	Temperature (°C)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
iDEN 18 MHz Mid channel tuned	50	860,000,000.000	859,999,999.996	-0.000005	1.0
	40	860,000,000.000	859,999,999.999	-0.000001	1.0
	30	860,000,000.000	860,000,000.003	0.000003	1.0
	20	Reference			
	10	860,000,000.000	859,999,999.999	-0.000001	1.0
	0	860,000,000.000	859,999,999.999	-0.000001	1.0
	-10	860,000,000.000	859,999,999.999	-0.000001	1.0
	-20	860,000,000.000	860,000,000.001	0.000001	1.0
	-30	860,000,000.000	859,999,999.997	-0.000003	1.0
	50	865,500,000.000	865,499,999.998	-0.000002	1.0
iDEN 7 MHz Mid channel tuned	40	865,500,000.000	865,500,000.000	0.000000	1.0
	30	865,500,000.000	865,500,000.003	0.000003	1.0
	20	Reference			
	10	865,500,000.000	865,499,999.998	-0.000002	1.0
	0	865,500,000.000	865,499,999.999	-0.000001	1.0
	-10	865,500,000.000	865,500,000.001	0.000001	1.0
	-20	865,500,000.000	865,499,999.998	-0.000002	1.0
	-30	865,500,000.000	865,500,000.000	0.000000	1.0
	50	937,500,000.000	937,500,000.004	0.000004	1.0
	40	937,500,000.000	937,499,999.996	-0.000004	1.0
iDEN 5 MHz Mid channel tuned	30	937,500,000.000	937,499,999.996	-0.000004	1.0
	20	Reference			
	10	937,500,000.000	937,500,000.005	0.000005	1.0
	0	937,500,000.000	937,500,000.003	0.000003	1.0
	-10	937,500,000.000	937,500,000.002	0.000002	1.0
	-20	937,500,000.000	937,500,000.003	0.000003	1.0
	-30	937,500,000.000	937,500,000.004	0.000004	1.0

**Table 8-4. Frequency Stability with variation of Input voltage - iDEN Downlink**

Carrier Band	Input voltage (V)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
iDEN 18 MHz Mid channel	102 Vac	860,000,000.000	860,000,000.002	0.000002	1.0
	138 Vac	860,000,000.000	859,999,999.998	-0.000002	1.0
iDEN 7 MHz Mid channel	102 Vac	865,500,000.000	865,499,999.994	-0.000007	1.0
	138 Vac	865,500,000.000	865,500,000.000	0.000000	1.0
iDEN 5 MHz Mid channel	102 Vac	937,500,000.000	937,500,000.001	0.000001	1.0
	138 Vac	937,500,000.000	937,500,000.002	0.000002	1.0

**Table 8-5. Frequency Stability with variation of Ambient Temperature - CDMA**

Carrier Band	Temperature (°C)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
Uplink Mid channel tuned	50	1,887,500,000.000	1,887,499,999.991	-0.000005	1.0
	40	1,887,500,000.000	1,887,499,999.995	-0.000003	1.0
	30	1,887,500,000.000	1,887,499,999.995	-0.000003	1.0
	20		Reference		
	10	1,887,500,000.000	1,887,500,000.009	0.000005	1.0
	0	1,887,500,000.000	1,887,500,000.009	0.000005	1.0
	-10	1,887,500,000.000	1,887,499,999.999	-0.000001	1.0
	-20	1,887,500,000.000	1,887,500,000.003	0.000002	1.0
	-30	1,887,500,000.000	1,887,499,999.995	-0.000003	1.0
	50	1,967,500,000.000	1,967,500,000.001	0.000001	1.0
Downlink Mid channel tuned	40	1,967,500,000.000	1,967,499,999.995	-0.000003	1.0
	30	1,967,500,000.000	1,967,499,999.998	-0.000001	1.0
	20		Reference		
	10	1,967,500,000.000	1,967,499,999.998	-0.000001	1.0
	0	1,967,500,000.000	1,967,499,999.995	-0.000003	1.0
	-10	1,967,500,000.000	1,967,499,999.989	-0.000006	1.0
	-20	1,967,500,000.000	1,967,499,999.998	-0.000001	1.0
	-30	1,967,500,000.000	1,967,500,000.002	0.000001	1.0

**Table 8-6. Frequency Stability with variation of Input voltage - CDMA**

Carrier Band	Input voltage (V)	Assigned Frequency (Hz)	Measured Frequency (Hz)	Drift (ppm)	Limit (ppm)
Uplink Mid channel	102 Vac	1,887,500,000.000	1,887,500,000.001	0.000001	1.0
	138 Vac	1,887,500,000.000	1,887,500,000.005	0.000003	1.0
Downlink Mid channel	102 Vac	1,967,500,000.000	1,967,499,999.995	-0.000003	1.0
	138 Vac	1,967,500,000.000	1,967,500,000.006	0.000003	1.0