

Date: 2007-10-24 Page 1 of 14

No. : HM160212

Applicant (BUV001): SRM Entertainment LTD.

1250 Greenwood Avenue Suite #5 Jenkintown, PA 19046

United States

Manufacturer: SRM Entertainment LTD.

1250 Greenwood Avenue Suite #5 Jenkintown, PA 19046

United States

Description of Samples: Product: Tactical 2 Way Communicators

Brand Name: SRM Entertainment LTD.

Model Number: #17252

FCC ID: VB4SRM17252

Date Samples Received: 2007-10-05, 2007-10-17

Date Tested: 2007-10-10 to 2007-10-17

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-24 Page 2 of 14

No. : HM160212

Photographs

CONTENT:

| | Cover | Page 1 of 14 Page 2 of 14 |
|------------|---|------------------------------|
| <u>1.0</u> | General Details | |
| 1.1 | Test Laboratory | Page 3 of 14 |
| 1.2 | Applicant Details Applicant Manufacturer | Page 3 of 14 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 4 of 14 |
| 1.4 | Date of Order | Page 4 of 14 |
| 1.5 | Submitted Samples | Page 4 of 14 |
| 1.6 | Test Duration | Page 4 of 14 |
| 1.7 | Country of Origin | Page 4 of 14 |
| <u>2.0</u> | Technical Details | |
| 2.1 | Investigations Requested | Page 5 of 14 |
| 2.2 | Test Standards and Results Summary | Page 5 of 14 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 6-9 of 14 |
| 3.2 | Bandwidth Measurement | Page 10-11 of 14 |
| | Appendix A | |
| | List of Measurement Equipment | Page 12 of 14 |
| | Appendix B | |

Page 13-14 of 14



Date: 2007-10-24 Page 3 of 14

No. : HM160212

<u>1.0</u> **General Details**

Test Laboratory 1.1

The Hong Kong Standards and Testing Centre Ltd. **EMC Laboratory** 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 **Applicant Details Applicant**

SRM Entertainment LTD. 1250 Greenwood Avenue Suite #5 Jenkintown, PA 19046 United States

Manufacturer

SRM Entertainment LTD. 1250 Greenwood Avenue Suite #5 Jenkintown, PA 19046 United States



Date: 2007-10-24 Page 4 of 14

No. : HM160212

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Tactical 2 Way Communicators
Manufacturer: SRM Entertainment LTD.
Brand Name: SRM Entertainment LTD.

Model Number: #17252

Input Voltage: 9Vd.c. ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a SRM Entertainment LTD., Tactical 2 Way Communicators. The transmitter is a button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by microphone, and type is amplitude modulation.

1.4 Date of Order

2007-10-05, 2007-10-17

1.5 Submitted Sample(s):

4 Samples

1.6 Test Duration

2007-10-10 to 2007-10-17

1.7 Country of Origin

N/A

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-24 Page 5 of 14

No. : HM160212

2.0 Technical Details

Investigations Requested 2.1

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15:2006 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

| EMISSION Results Summary | | | | | | | | |
|--|---|-----------------|----------|-------------|--------|--|--|--|
| Test Condition | Test Condition Test Requirement Test Method Class / Test Result | | | | | | | |
| | | | Severity | Pass | Failed | | | |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.235 | ANSI C63.4:2003 | N/A | \boxtimes | | | | |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2003 | N/A | | | | | |

Note: N/A - Not Applicable



Date: 2007-10-24 Page 6 of 14

No. : HM160212

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47 CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-10-17
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

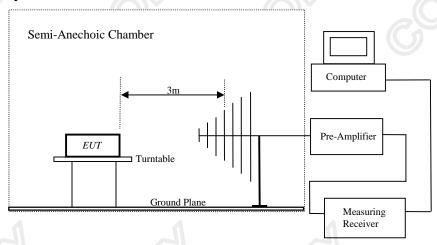

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-24 Page 7 of 14

No. : HM160212

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

| Frequency Range of | Field Strength of | Field Strength of | |
|--------------------|----------------------|----------------------|--|
| Fundamental | Fundamental Emission | Fundamental Emission | |
| (0) | [Peak] | [Average] | |
| [MHz] | $[\mu V/m]$ | $[\mu V/m]$ | |
| 49.82-49.90 | 100,000 | 10,000 | |

Results of Tx Mode: PASS

| Field Strength of Fundamental Emissions | | | | | | | | |
|---|------------|------------|--------|-------|-----------|------------|--|--|
| | Peak Value | | | | | | | |
| Frequency | Measured | Correction | Field | Field | Limit @3m | E-Field | | |
| Level @3m Factor Strength Strength Pola | | | | | | Polarity | | |
| MHz | dΒμV | dB/m | dBμV/m | μV/m | μV/m | | | |
| 49.86 | 35.1 | 9.6 | 44.7 | 171.8 | 100,000 | Horizontal | | |

| Field Strength of Fundamental Emissions | | | | | | | | |
|---|---|-----|------|------|--------|------------|--|--|
| 4 | Avreage Value | | | | | | | |
| Frequency | Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | |
| | Level @3m Factor Strength Strength | | | | | Polarity | | |
| MHz | MHz dBμV dB/m dBμV/m μV/m | | | | | | | |
| 49.86 | 27.8 | 9.6 | 37.4 | 74.1 | 10,000 | Horizontal | | |

Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =3MHz Video Bandwidth =1Hz

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-24 Page 8 of 14

No. : HM160212

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range [MHz] | Quasi-Peak Limits [µV/m] |
|--------------------------|--------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

| Radiated Emissions Ouasi-Peak | | | | | | | | | |
|---|-----------|--------|----------|----------|------|------------|--|--|--|
| Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | | | |
| | Level @3m | Factor | Strength | Strength | 0. | Polarity | | | |
| MHz | dΒμV | dB/m | dBμV/m | μV/m | μV/m | | | | |
| 99.72 | 20.9 | 10.1 | 31.0 | 35.5 | 150 | Horizontal | | | |
| 149.58 | < 1.0 | 10.2 | < 11.2 | < 3.6 | 150 | Vertical | | | |
| 199.44 | < 1.0 | 11.5 | < 12.5 | < 4.2 | 150 | Vertical | | | |
| 249.30 | < 1.0 | 15.9 | < 16.9 | < 7.0 | 200 | Vertical | | | |
| 299.16 | < 1.0 | 16.9 | < 17.9 | < 7.9 | 200 | Vertical | | | |
| 349.02 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 200 | Vertical | | | |
| 398.88 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 200 | Vertical | | | |
| 448.74 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 200 | Vertical | | | |
| 498.60 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 200 | Vertical | | | |

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

30MHz to 1GHz Calculated measurement uncertainty 5.2dB



Date: 2007-10-24 Page 9 of 14

No. : HM160212

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range [MHz] | Quasi-Peak Limits [μV/m] |
|--------------------------|-----------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Rx Mode: PASS

| Radiated Emissions | | | | | | | | |
|--------------------|---|------|------------|------|------|------------|--|--|
| | | | Quasi-Peak | | | | | |
| Frequency | Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | |
| | Level @3m Factor Strength Strength Polarity | | | | | | | |
| MHz | dΒμV | dB/m | dBµV/m | μV/m | μV/m | | | |
| 48.60 | 25.1 | 10.1 | 35.2 | 57.5 | 100 | Horizontal | | |
| 97.10 | 15.5 | 10.0 | 25.5 | 18.8 | 150 | Horizontal | | |
| 339.50 | 12.6 | 16.9 | 29.5 | 29.9 | 200 | Horizontal | | |

Remark:

Calculated measurement uncertainty 30MHz to 1GHz 5.2dB



Date: 2007-10-24 Page 10 of 14

No. : HM160212

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-10-17 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-10-24 Page 11 of 14

No. : HM160212

Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range | 20dB Bandwidth | FCC Limits |
|-----------------|----------------|--------------------|
| [MHz] | [KHz] | [MHz] |
| 49.86 | 21.04 | within 49.82-49.90 |

20dB Bandwidth of Fundamental Emission

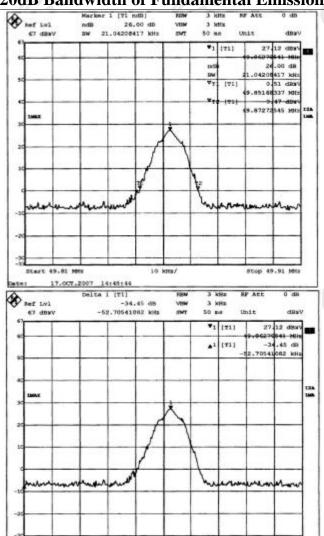

Start 49.81 MHz

17.007.2007 14:46:14

Stop 49.91 Miz

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date: 2007-10-24 Page 12 of 14

No. : HM160212

Appendix A

List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|-------------------------------|-----------------|-----------|------------|-------------|------------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 2006/12/29 | 2007/12/29 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 2006/12/29 | 2007/12/29 |
| EM009 | QUASIPEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 2006/12/29 | 2007/12/29 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 2006/12/29 | 2007/12/29 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 2006/12/29 | 2007/12/29 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 2006/12/29 | 2007/12/29 |
| EM020 | HORN ANTENNA | ETS-LINGGREN | 3115 | 4032 | 2006/07/11 | 2008/07/11 |
| EM022 | LOOP ANTENNA | ETS-LINGGREN | 6502 | 1189-2424 | 2006/07/26 | 2008/07/26 |
| EM181 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB 7 | 100072 | 22007/06/08 | 2008/06/08 |
| EM215 | MULTIDEVICE CONTROLER | ETS-LINGGREN | 2090 | 00024676 | N/A | N/A |
| EM216 | MINI MAST SYSTEM | ETS-LINGGREN | 2075 | 00026842 | N/A | N/A |
| EM217 | ELECTRIC POWERED TURNTABLE | ETS-LINGGREN | 2088 | 00029144 | N/A | N/A |
| EM218 | ANECHOIC CHAMBER | ETS-LINGGREN | FACT-3 | - | 2007/05/02 | 2008/05/02 |
| EM219 | BICONILOG ANTENNA | ETS-LINGGREN | 3142C | 00029071 | 2006/02/01 | 2008/02/01 |
| EM229 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB 40 | 100248 | 2007/07/11 | 2008/07/11 |

Remarks:-

Corrective Maintenance CM

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2007-10-24 Page 13 of 14

No. : HM160212

Appendix B


Photographs of EUT



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





Date: 2007-10-24 Page 14 of 14

No. : HM160212

Photographs of EUT



***** End of Test Report *****