

COMMUNICATION CERTIFICATION LABORATORY

1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report

Certification

Test Of: 303MAD21V

FCC ID: VBC303MAD21V

Test Specification:

FCC PART 15, Subpart C

Test Report Serial No: 590

Applicant:

Martin Doors
2828 South 900 West
Salt Lake City, UT 84119

Dates of Test:

January 10, 2007

February 7, 2007

March 6, 2007

March 28 & 29, 2007

April 19, 2007

May 8, 2007

Issue Date: May 30, 2007

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Communication Certification Laboratory to determine compliance of the device described below with the certification requirements of FCC Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Martin Doors
- Manufacturer: Lighting Tech Co., Ltd.
- Trade Name: Stinger
- Model Number: 303MAD21V
- FCC ID: VBC303MAD21V

On this 30th day of May 2007, I, individually, and for Communication Certification Laboratory, certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has accredited the Communication Certification Laboratory EMC testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

COMMUNICATION CERTIFICATION LABORATORY



Tested by: Norman P. Hansen
EMC Technician

TABLE OF CONTENTS

| | |
|---|----|
| SECTION 1.0 CLIENT INFORMATION..... | 4 |
| SECTION 2.0 EQUIPMENT UNDER TEST (EUT)..... | 5 |
| SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES..... | 6 |
| SECTION 5.0 SUMMARY OF TEST RESULTS..... | 11 |
| SECTION 6.0 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS..... | 12 |
| APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT..... | 17 |
| APPENDIX 2 PHOTOGRAPHS..... | 19 |
| APPENDIX 3 MANUFACTURER'S CERTIFICATION OF EUT OPERATION..... | 26 |

SECTION 1.0 CLIENT INFORMATION

1.1 Client Information:

Company Name: Martin Doors
2828 South 900 West
Salt Lake City, UT 84119

Contact Name: Scott Wall
Title: Parts Department Manager

1.2 Manufacturer:

Company Name: Lighting Tech Co., LTD
4F, No. 124 Hua Chen Rd.
Hsing Chuang City, Taipei Hsien
Taiwan, R.O.C.

Contact Name: N. J. Duan
Title: General Manager

SECTION 2.0 EQUIPMENT UNDER TEST (EUT)**2.1 Identification of EUT:**

Trade Name: Stinger
Model Number: 303MAD21V
Serial Number: None
Options Fitted: N/A
Country of Manufacture: Taiwan

2.2 Description of EUT:

The Stinger 303MAD21V is a visor transmitter operating at 303.8 MHz. The 303MAD21V is designed to be used with garage door opener receivers using 303.8 MHz. The transmitter is powered by an alkaline 23A battery and has an expected life of about 12-18 months.

2.3 Modification Incorporated/Special Accessories on EUT:

The following modifications were made to the 303MAD21V by the Client during testing to comply with the specification. These modifications will be implemented during manufacturing.

1. C3 was removed
2. C5 was removed
3. C6, a 2pF capacitor, was added from Transistor Q1 base to emitter.

Signature: _____

Typed Name: Scott Wall

Title: Parts Department Manager

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)

Applicable Sections: §15.203 Antenna Requirement
§15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

Purpose of Test: The tests were performed to demonstrate Initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.231

(a) The provision of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmission to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

(b) In addition to the provisions of §15.205, the field strength of emission from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|--------------------------------|--|---|
| 40.66 - 40.70 | 2,250 | 225 |
| 70 -130 | 1,250 | 125 |
| 130 - 174 | 1,250 to 3,750 ** | 125 to 375 ** |
| 174 - 260 | 3,750 | 375 |
| 260 - 470 | 3,750 to 12,500 ** | 375 to 1,250 ** |
| Above 470 | 12,500 | 1,250 |

** Linear interpolations

[Where F is the frequency in MHZ, the formula for calculating the maximum permitted field strengths are as follows: for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

(1) the above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based

on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provision in §15.35 for averaging pulsed emission and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

- (3) The limits on the field strength of the spurious emission in the above table are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.
- (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
- (d) For devices operation within the frequency band 40.66-40.70 MHz, the bandwidth of the emission shall be confined within the band edges and the frequency tolerance of the carrier shall be $\pm 0.01\%$. This frequency tolerance shall be maintained for a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation on the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided that intentional radiator complies with the provisions of paragraphs (b) through (d) of this section except the field strength table in paragraph (b) of this section is replaced by the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|--------------------------------|--|---|
| 40.66 - 40.70 | 1,000 | 100 |
| 70 -130 | 500 | 50 |
| 130 - 174 | 500 to 1,500 ** | 50 to 150 ** |
| 174 - 260 | 1,500 | 150 |
| 260 - 470 | 1,500 to 5,000 ** | 150 to 500 ** |
| Above 470 | 5,000 | 500 |

** Linear interpolations

[Where F is the frequency in MHZ, the formula for calculating the maximum permitted field strengths are as follows: for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $22.72727(F) - 2454.545$; for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $16.6667(F) - 2833.333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent periods between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

3.3 Test Procedure

The line conducted and radiated emissions testing was performed according to the procedures in ANSI C63.4 (2003). Testing was performed at CCL's Wanship open area test site #2, located at 550 West Wanship Road, Wanship, UT. This site has been fully described in a report submitted to the FCC, and was accepted in a letter dated June 6, 2006 (90504).

CCL participates in the National Voluntary Laboratory Accreditation Program (NVLAP) and has been accredited under NVLAP Lab Code:100272-0, which is effective until September 30, 2007.

SECTION 4.0 OPERATION OF EUT DURING TESTING**4.1 Operating Environment:**

Power Supply: 12 volt alkaline battery (A23)

4.2 Operating Modes:

The 303MAD21V was tested when placed vertically, horizontal on edge, and horizontally flat on the EUT table. The worst-case emissions were with the 303MAD21V placed horizontally flat on the EUT table with the button held down so the EUT would constantly transmit. See the photos in Appendix 2 of this report.

4.3 EUT Exercise Software:

No software was required.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC PART 15, Subpart C****5.1.1 Summary of Tests:**

| Section | Test Performed | Frequency Range (MHz) | Result |
|------------|---------------------|-----------------------|----------------|
| 15.203 | Antenna Requirement | N/A | Complied |
| 15.231 (a) | Periodic Operation | 303.8 | Complied |
| 15.231 (b) | Radiated Emissions | 30 to 3038 | Complied |
| 15.231 (c) | Bandwidth | 303.8 | Complied |
| 15.231 (d) | Frequency Stability | 40.66 to 40.70 | Not Applicable |
| 15.231 (e) | Radiated Emissions | 30 to 3038 | Not Applicable |

5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.

SECTION 6.0 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 15.203****Demonstration of Compliance:**


The antenna is an etched portion of the PCB and can not be replaced by the user.

RESULT

The EUT complied with the requirements of this section.

6.2.2 §15.231 (a)**Demonstration of Compliance:**

1. A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. The plot below shows the transmitter button depressed to activate the transmitter and then immediately released.

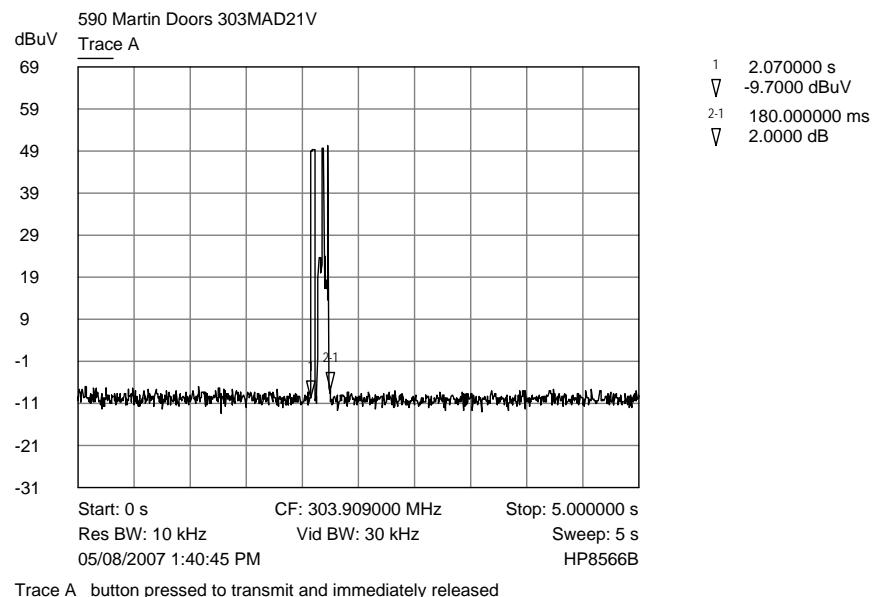

2. The 303MAD21V cannot be automatically activated. The 303MAD21V only transmits if manually activated.
3. The 303MAD21V does not transmit at regular predetermined intervals. The 303MAD21V only transmits if manually activated.

RESULT

In the configuration tested, the EUT complied with the requirements of this section.

6.2.3 §15.231 (b) Radiated Emissions**Demonstration of Compliance:**

The 303MAD21V operates at 303.8 MHz, therefore; the field strength of the fundamental must be less than 5575 μ V/m (74.9 dB μ V/m) at 3 meters. The maximum permitted field strength of any unwanted emission must be 20 dB below the maximum allowable fundamental field strength (54.9 dB μ V/m).

Emissions in the restricted bands of §15.205 must meet the limits specified in §15.209.

Measurement Data Fundamental and Harmonic Emissions:

The frequency range from 30 MHz to the tenth harmonic of the highest fundamental frequency was investigated to measure any radiated emissions.

A diagram of the test configuration and test equipment used is enclosed in Appendix 1.

Pulsed Emission Averaging Factor

The 303MAD21V transmitter is a pulsed emission device; therefore, the method of §15.35 for averaging a pulsed emission may be used. The 303MAD21V did not exhibit a consistent pulse train and the widest pulse width setting could not be verified; therefore, no averaging factor was used.

Radiated Interference Level Data - (Vertical Polarity)

| Frequency MHz | Detector | Receiver Reading dB μ V | Average Factor dB | Correction Factor dB | Field Strength dB μ V/m | Limit dB μ V/m | Delta dB |
|------------------|----------|-----------------------------------|-------------------------|----------------------------|-----------------------------------|-----------------------|-------------|
| 303.8 | Peak | 35.2 | 0.0 | 15.3 | 50.5 | 74.9 | -24.4 |
| 607.6 | Peak | 8.1 | 0.0 | 24.2 | 32.3 | 54.9 | -22.6 |
| 911.4 | Peak | 6.2 | 0.0 | 28.4 | 34.6 | 54.9 | -20.3 |
| 1215.2* | Peak | 5.6 | 0.0 | 28.3 | 33.9 | 54.0 | -20.1 |
| 1519.0* | Peak | 8.6 | 0.0 | 29.7 | 38.3 | 54.0 | -15.7 |
| 1822.8 | Peak | 7.6 | 0.0 | 31.1 | 38.7 | 54.9 | -16.2 |
| 2126.6 | Peak | 6.7 | 0.0 | 32.0 | 38.7 | 54.9 | -16.2 |
| 2430.4 | Peak | 6.0 | 0.0 | 33.1 | 39.1 | 54.9 | -15.8 |
| 2734.2* | Peak | 7.6 | 0.0 | 33.8 | 41.4 | 54.0 | -12.6 |
| 3038.0 | Peak | 5.9 | 0.0 | 34.6 | 39.8 | 54.9 | -15.1 |

Radiated Interference Level Data - (Horizontal Polarity)

| Frequency MHz | Detector | Receiver Reading dB μ V | Average Factor dB | Correction Factor dB | Field Strength dB μ V/m | Limit dB μ V/m | Delta dB |
|------------------|----------|-----------------------------------|-------------------------|----------------------------|-----------------------------------|-----------------------|-------------|
| 303.8 | Peak | 37.5 | 0.0 | 15.3 | 52.8 | 74.9 | -22.1 |
| 607.6 | Peak | 12.4 | 0.0 | 24.2 | 36.6 | 54.9 | -18.3 |
| 911.4 | Peak | 6.1 | 0.0 | 28.4 | 34.5 | 54.9 | -20.4 |
| 1215.2* | Peak | 5.9 | 0.0 | 28.3 | 34.2 | 54.0 | -19.8 |
| 1519.0* | Peak | 8.4 | 0.0 | 29.7 | 38.1 | 54.0 | -15.9 |
| 1822.8 | Peak | 6.9 | 0.0 | 31.1 | 38.0 | 54.9 | -16.9 |
| 2126.6 | Peak | 7.1 | 0.0 | 32.0 | 39.1 | 54.9 | -15.8 |
| 2430.4 | Peak | 5.2 | 0.0 | 33.1 | 38.3 | 54.9 | -16.6 |
| 2734.2* | Peak | 6.8 | 0.0 | 33.8 | 40.6 | 54.0 | -13.4 |
| 3038.0 | Peak | 7.2 | 0.0 | 34.6 | 41.8 | 54.9 | -13.1 |

Sample Field Strength Calculation:

The field strength is calculated by adding the Correction Factor (Antenna Factor + Cable Factor) and the Average Factor to the measured level of the receiver. The receiver amplitude reading is compensated for any amplifier gain.

The basic equation with a sample calculation is shown below:

FS = RA + CF + AV Where

FS = Field Strength

RA = Receiver Amplitude Reading

CF = Correction Factor (Antenna Factor + Cable Factor)

AV = Averaging Factor


Assume a receiver reading of 44.2 dB μ V is obtained from the receiver, with an average factor of -8.6 dB and a correction factor of 17.5 dB. The field strength is calculated by adding the correction factor and the average factor, giving a field strength of 53.1 dB μ V/m, $FS = 44.2 + 17.5 + (-8.6) = 53.1$ dB μ V/m

RESULT

In the configuration tested, the EUT complied with the requirements of this section.

6.2.4 §15.231 (c) Bandwidth**Demonstration of Compliance:**

The bandwidth of the emission must not be wider than 0.25% of the center frequency. The center frequency is 303.8 MHz, therefore the bandwidth must not be wider than 759.5 kHz. The 303MAD21V bandwidth was 36.0 kHz, therefore it meets the bandwidth requirements. See spectrum analyzer plot below.

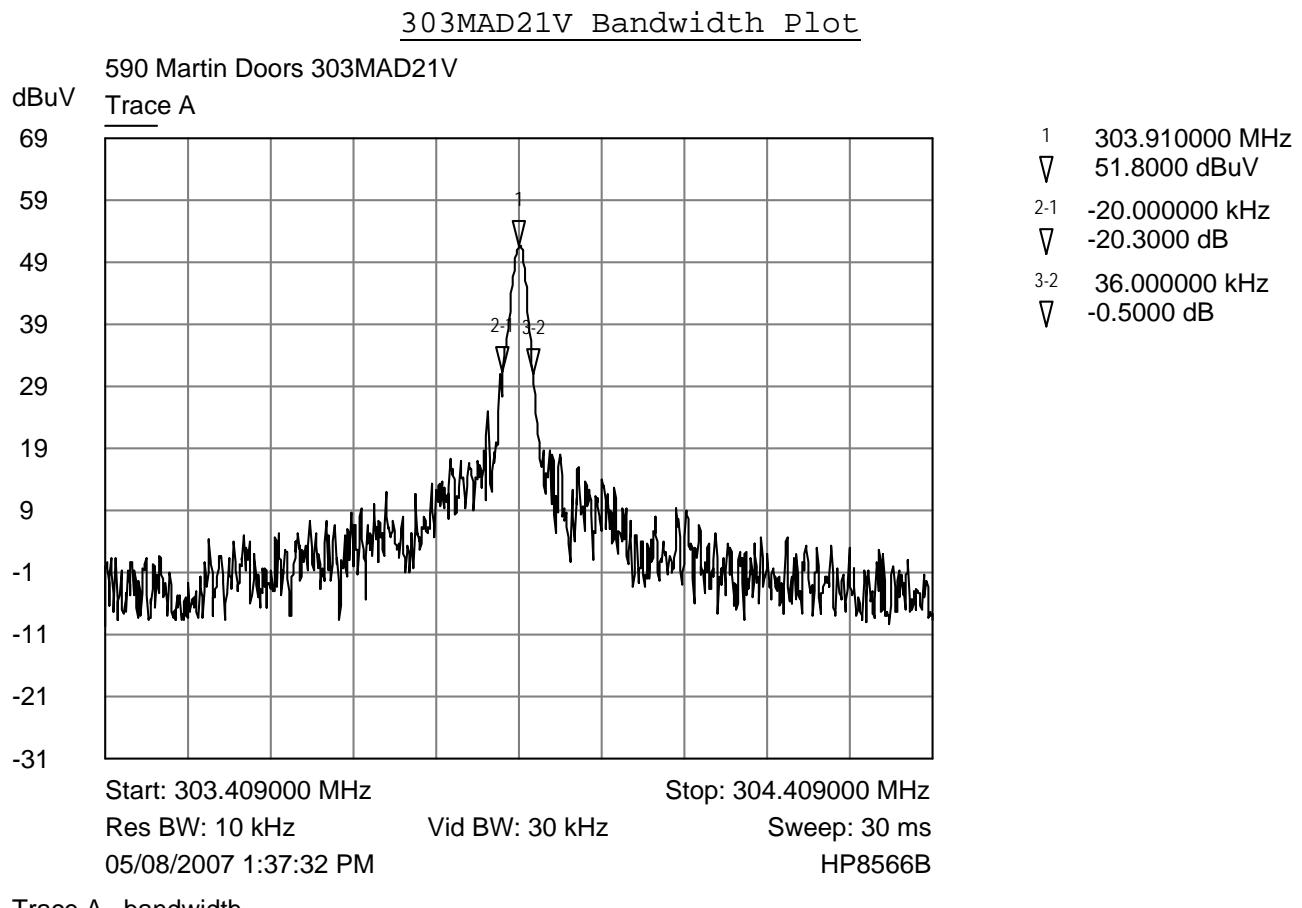**RESULT**

In the configuration tested, the EUT complied with the requirements of this section.

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT**Radiated Emissions:**

The radiated emissions from the intentional radiator were measured using a spectrum analyzer. The resolution bandwidth was set at 100 kHz and the video bandwidth was set at 300 kHz. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range 1 GHz to 3.2 GHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the intentional radiator was varied to find the maximum radiated emission. The intentional radiator was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop intentional radiator is measured on a non-conducting table 0.8 meter above the ground plane. The table is placed on a turntable which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

| Type of Equipment | Manufacturer | Model Number | Serial Number | Date of Last Calibration |
|--------------------------------|-----------------|--------------------|---------------|--------------------------|
| Wanship Open Area Test Site #2 | CCL | N/A | N/A | 10/25/2006 |
| Test Software | CCL | Radiated Emissions | Revision 1.3 | N/A |
| Spectrum Analyzer | Hewlett Packard | 8566B | 2230A01711 | 10/28/2006 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | 2043A00137 | 10/10/2006 |
| Biconilog Antenna | EMCO | 3142 | 9601-1009 | 10/19/2006 |
| Double Ridged Guide Antenna | EMCO | 3115 | 9604-4779 | 05/26/2005 |
| High Frequency Amplifier | Hewlett Packard | 8449B | 3008A00990 | 05/25/2005 |

| Type of Equipment | Manufacturer | Model Number | Serial Number | Date of Last Calibration |
|--|-----------------|--------------|---------------|--------------------------|
| 3 Meter Radiated Emissions Cable Wanship Site #2 | CCL | Cable K | N/A | 12/26/2006 |
| Pre/Power-Amplifier | Hewlett Packard | 8447F | 3113A05161 | 09/06/2006 |
| 6 dB Attenuator | Hewlett Packard | 8491A | 32835 | 12/26/2006 |

An independent calibration laboratory or CCL personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

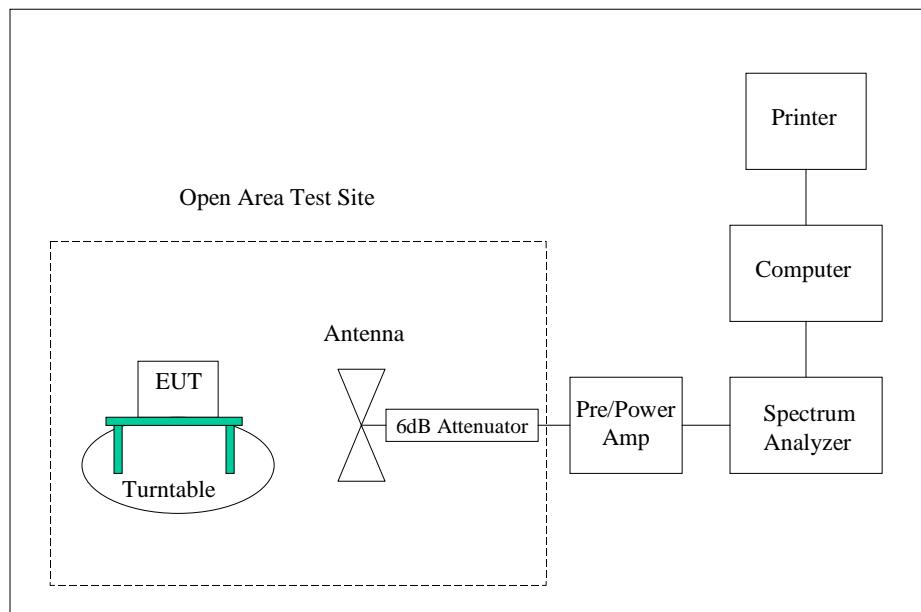

APPENDIX 2 PHOTOGRAPHS

View of the Radiated Emission Test Setup
(Vertical Alignment)



View of the Radiated Emission Test Setup
(Horizontal Face Alignment)



View of the Radiated Emission Test Setup
(Horizontal Flat Alignment)




Front View of the EUT




Back View of the EUT



View of the Component Side of the PCB

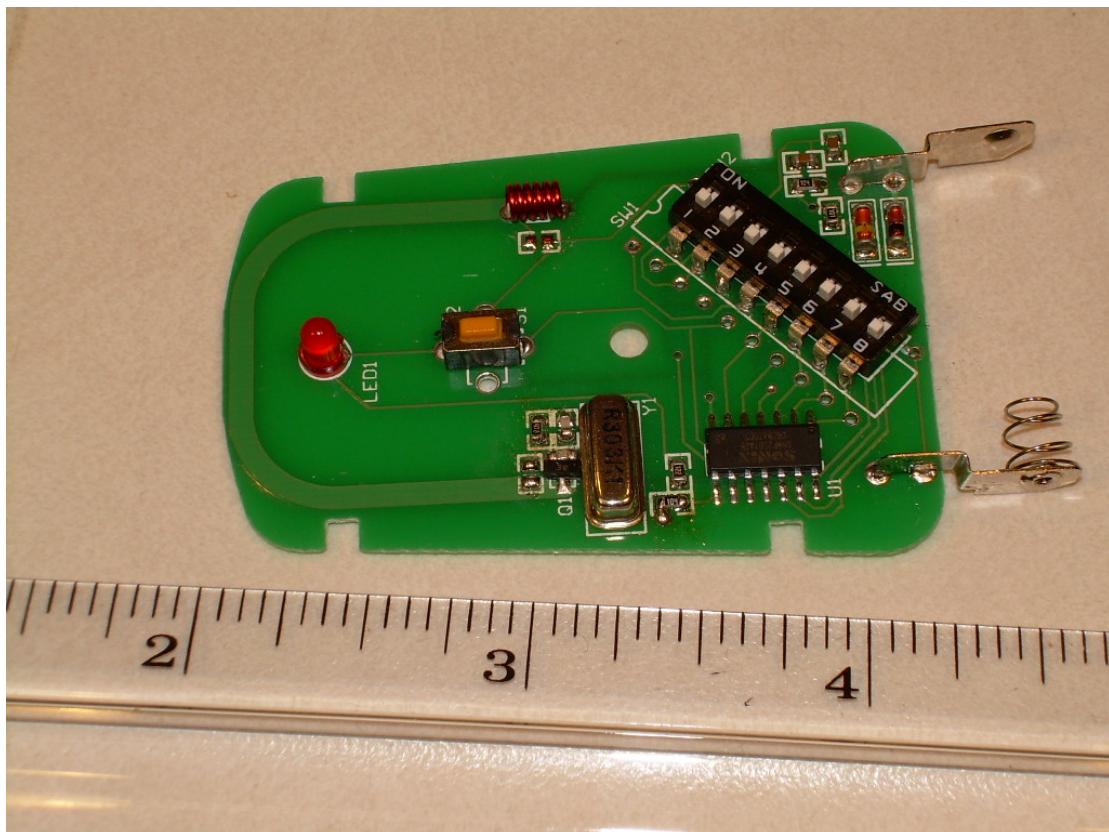

View of the Trace Side of the PCB

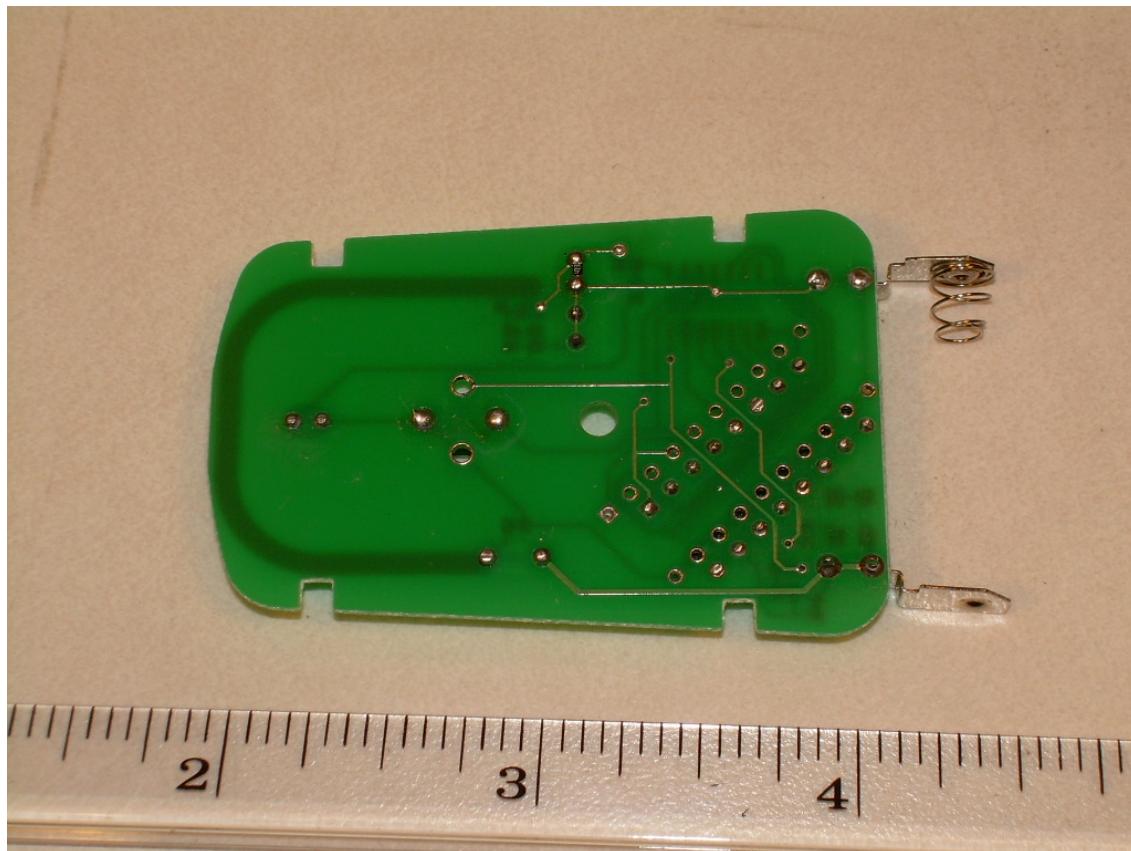

APPENDIX 3 MANUFACTURER'S CERTIFICATION OF EUT OPERATION

LIGHTING TECHNOLOGY CO., LTD./萊電科技
4f. No.124 Hua Chen Rd. Hsing Chuang City Taipei Taiwan. Zip242
TEL:886-2-899-13100/ 2 FAX:886-899-13102 Cell:886-972-173493
EMAIL:lightech@ms15.hinet.net website:www.lightingtech.com.tw

Refer no.:Lt051107

Date: 2007/5/11

To Whom It May Concern:

This is to confirm that the Martin Visor 303 MHz sample we sent for FCC test on April 25th and UPS tracking number H673 0445475 is an operational transmitter.

Shall you have any additional question in regard to it, please feel free to contact us anytime.

**Sincerely Yours.
Lighting Technology.**


N.J. Duan.
General Manager.

