



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

	19917.51	-21.68	compliant
64QAM-Modulation ANT1			
	19919.21	-21.75	compliant
64QAM-Modulation ANT2			
	19853.11	-21.99	compliant
64QAM-Modulation ANT3			
	19779.66	-21.86	compliant
64QAM-Modulation ANT4			
	19845.76	-22.07	compliant
256QAM-Modulation ANT1			
	19918.64	-22.28	compliant
256QAM-Modulation ANT2			
	19919.21	-21.83	compliant
256QAM-Modulation ANT3			
	19912.43	-21.91	compliant
256QAM-Modulation ANT4			
	19916.38	-22.12	compliant
Measurement Uncertainty:		$f < 1.0\text{GHz}: \pm 1.1\text{dB},$ $1.0\text{GHz} \leq f < 3.6\text{GHz}: \pm 1.2\text{dB},$ $3.6\text{GHz} \leq f < 8.0\text{GHz}: \pm 1.6\text{dB},$ $8.0\text{GHz} \leq f: \pm 1.9\text{dB}$	

Table 20 Spurious Emissions (15 MHz Channel BW)

Config D Lower band edge:

Carrier Frequency: 1940.0 MHz			
Frequency Range [MHz]	Emission Frequency [MHz]	Maximum Emission Level [dBm]	Result
QPSK-Modulation ANT1			
	1929.99	-32.37	compliant
QPSK-Modulation ANT2			
	1930.00	-32.30	compliant
QPSK-Modulation ANT3			
	1930.00	-31.86	compliant
QPSK-Modulation ANT4			
	1929.99	-31.66	compliant
16QAM-Modulation ANT1			
	1930.00	-32.33	compliant
16QAM-Modulation ANT2			
	1929.99	-32.19	compliant

FCC 47 CFR part 24 (2018)

10. Apr 2019
Page 34 of 113



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

16QAM-Modulation ANT3			
	1929.99	-31.56	compliant
16QAM-Modulation ANT4			
	1930.00	-31.35	compliant
64QAM-Modulation ANT1			
	1930.00	-32.33	compliant
64QAM-Modulation ANT2			
	1930.00	-32.44	compliant
64QAM-Modulation ANT3			
	1929.98	-31.62	compliant
64QAM-Modulation ANT4			
	1929.99	-31.34	compliant
256QAM-Modulation ANT1			
	1929.99	-31.78	compliant
256QAM-Modulation ANT2			
	1929.98	-32.65	compliant
256QAM-Modulation ANT3			
	1929.98	-31.88	compliant
256QAM-Modulation ANT4			
	1930.00	-31.39	compliant
Measurement Uncertainty:		$f < 1.0\text{GHz}: \pm 1.1\text{dB},$ $1.0\text{GHz} \leq f < 3.6\text{GHz}: \pm 1.2\text{dB},$ $3.6\text{GHz} \leq f < 8.0\text{GHz}: \pm 1.6\text{dB},$ $8.0\text{GHz} \leq f: \pm 1.9\text{dB}$	

Table 21 Spurious Emissions (Lower band edge) (20 MHz CH BW)

Config D Upper band edge:

Carrier Frequency: 1985.0 MHz			
Frequency Range [MHz]	Emission Frequency [MHz]	Maximum Emission Level [dBm]	Result
QPSK-Modulation ANT1			
	1995.02	-31.15	compliant
QPSK-Modulation ANT2			
	1995.00	-31.71	compliant
QPSK-Modulation ANT3			
	1995.01	-32.16	compliant
QPSK-Modulation ANT4			
	1995.00	-31.69	compliant
16QAM-Modulation ANT1			
	1995.01	-31.42	compliant



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

16QAM-Modulation ANT2			
	1995.00	-32.09	compliant
16QAM-Modulation ANT3			
	1995.00	-31.99	compliant
16QAM-Modulation ANT4			
	1995.00	-31.64	compliant
64QAM-Modulation ANT1			
	1995.00	-31.28	compliant
64QAM-Modulation ANT2			
	1995.01	-32.10	compliant
64QAM-Modulation ANT3			
	1995.00	-31.89	compliant
64QAM-Modulation ANT4			
	1995.00	-31.32	compliant
256QAM-Modulation ANT1			
	1995.01	-30.65	compliant
256QAM-Modulation ANT2			
	1995.02	-31.96	compliant
256QAM-Modulation ANT3			
	1995.00	-31.63	compliant
256QAM-Modulation ANT4			
	1995.00	-31.06	compliant
		$f < 1.0\text{GHz}: \pm 1.1\text{dB},$ $1.0\text{GHz} \leq f < 3.6\text{GHz}: \pm 1.2\text{dB},$ Measurement Uncertainty: $3.6\text{GHz} \leq f < 8.0\text{GHz}: \pm 1.6\text{dB},$ $8.0\text{GHz} \leq f: \pm 1.9\text{dB}$	

Table 22 Spurious Emissions (Upper band edge) (20 MHz CH BW)

Config D Spurious emissions:

Carrier Frequency: 1962.5 MHz			
Frequency Range [MHz]	Emission Frequency [MHz]	Maximum Emission Level [dBm]	Result
QPSK-Modulation ANT1			
0.009 – 19950	19925.42	-21.84	compliant
QPSK-Modulation ANT2			
	19914.69	-21.77	compliant
QPSK-Modulation ANT3			
	19912.99	-21.59	compliant
QPSK-Modulation ANT4			
	19914.69	-21.84	compliant



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

16QAM-Modulation ANT1			
	19921.47	-21.98	compliant
16QAM-Modulation ANT2			
	19918.64	-21.75	compliant
16QAM-Modulation ANT3			
	19846.89	-21.84	compliant
16QAM-Modulation ANT4			
	19916.95	-21.93	compliant
64QAM-Modulation ANT1			
	19921.47	-21.98	compliant
64QAM-Modulation ANT2			
	19924.29	-21.82	compliant
64QAM-Modulation ANT3			
	19915.25	-21.79	compliant
64QAM-Modulation ANT4			
	19923.16	-21.88	compliant
256QAM-Modulation ANT1			
	19920.90	-21.62	compliant
256QAM-Modulation ANT2			
	19921.47	-21.91	compliant
256QAM-Modulation ANT3			
	19915.25	-21.79	compliant
256QAM-Modulation ANT4			
	19509.60	-21.65	compliant
Measurement Uncertainty:		$f < 1.0\text{GHz}$: $\pm 1.1\text{dB}$, $1.0\text{GHz} \leq f < 3.6\text{GHz}$: $\pm 1.2\text{dB}$, $3.6\text{GHz} \leq f < 8.0\text{GHz}$: $\pm 1.6\text{dB}$, $8.0\text{GHz} \leq f$: $\pm 1.9\text{dB}$	

Table 23 Spurious Emissions (20 MHz Channel BW)

The measured conducted emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

Test Report No:
TYPEAPPR-1508717799-
611



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

The limit of -13 dBm has been calculated to correspond 84.4 dB ($\mu\text{V/m}$). Spurious emissions closer than 20 dB to the limit was measured with average detector.

According to § 2.1057, all emissions from the lowest radio frequency generated in the equipment, without going below 9 kHz, up to the 10th harmonic were investigated.

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The EUT was replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator $G_{\text{Antenna}}[\text{dBi}]$. This antenna was fed with a signal at the spurious frequency $P_{\text{Gen}}[\text{dBm}]$. The level of the signal was adjusted to repeat the previously measured level. The resulting

EIRP is the signal level fed to the reference antenna corrected for gain referenced to an isotropic.

The formula below was used to calculate the EIRP of the EUT.

$$P_{\text{EIRP}}[\text{dBm}] = P_{\text{Gen}}[\text{dBm}] - L_{\text{Cable}}[\text{dB}] + G_{\text{Antenna}}[\text{dBi}]$$

Worst case detected emission levels are reported in the following table (refer to spectral plots included on pages 96 for details). The antenna factor and cable loss is according to the manufacturer's specification.

Measured laboratory room temperature and humidity during the tests				
Date	Temperature Min-Max:		Humidity Min-Max:	
31 March – 2 April 2019	22.5 °C	23.3 °C	14.2 RH%	19.5 RH%

Config A, B, C, D:

Carrier Frequency: 1962.5MHz			
Frequency Range [MHz]	Frequency Range [MHz]	Frequency Range [MHz]	Frequency Range [MHz]
QPSK-Modulation TX1			
30 - 19950	More than 20dB below limit -13dBm		Compliant
Measurement Uncertainty:			±5.8dB

Table 24 Field Strength of Spurious Radiation (20 MHz Channel BW)

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

5. TEST DATA AND SCREENSHOTS

5.1 Part List of the RF Measurement Test Equipment

No.	Test Equipment	Manufacturer & Type	Serial Number	Calibration date	Calibration due	Test No.
1	Signal Analyzer	Rohde & Schwarz: FSV 30	100781	07/2018	07/2019	1, 2, 3, 4
2	Signal Analyzer	Rohde & Schwarz: FSW 43	104600	10/2018	10/2019	1, 2, 3, 4
3	Vector Network Analyzer	Rohde & Schwarz: ZVA40	100146	07/2018	07/2019	1, 2, 3, 4
4	Vector Network Analyzer	Rohde & Schwarz: ZVL13	101177	07/2018	07/2019	1, 2, 3, 4
5	Calibration Unit	Rohde & Schwarz: ZV-Z54	100125	7/2018	7/2019	1, 2, 3, 4
6	Multimeter	Fluke 83	65870302	01/2019	01/2020	1, 2, 3, 4
7	Humidity and Temperature Indicator	Vaisala: HMI 31	P3730008	01/2019	01/2020	1, 2, 3, 4
8	DC Power Supply	Sorensen SGI80/188D-1AAA	0525A00545	cnn	-	1, 2, 3, 4
9	Attenuator	SHX-DTS 100G-20dB-24G-3.5mm(F,F)-B	14111101	cnn	-	1, 2, 3, 4
10	EMI Test Receiver	R&S ESU40	100262/040	07/2018	07/2019	5
11	Horn Antenna	ETS-Lindgren 3116C-PA	150635	11/2018	11/2019	5
12	Horn Antenna	ETS-Lindgren ETS3115	6346	07/2018	08/2019	5
13	Bilog Antenna	Schaffner Chase CBL6112	2003	07/2018	07/2019	5
14	Humidity and temperature meter	Vaisala HM31	P3730008	03/2018	03/2019	5
15	Mast Controller	Maturo NCD/180 2	17210416	cnn	-	5
16	4 meter mast	Maturo TAM4.0-E	086/172109 15	cnn	-	5
17	Anechoic Chamber	S&MC	B83317-C6019	09/2016	09/2019	5
18	Amplifier	Miteq 4FSX4	902638	cnn	-	5

Table 25 Part List of the RF Measurement Test Equipment



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

5.2 Spectral Plots

5.2.1. Test No. 2: Modulation Characteristics

No additional measurements are required for the modulation characteristics. Please refer to test no. 3, occupied bandwidth on page 18.

Screenshots below shows information about the modulations I/Q constellation form and modulation information table, displaying error to ideal modulation symbols.

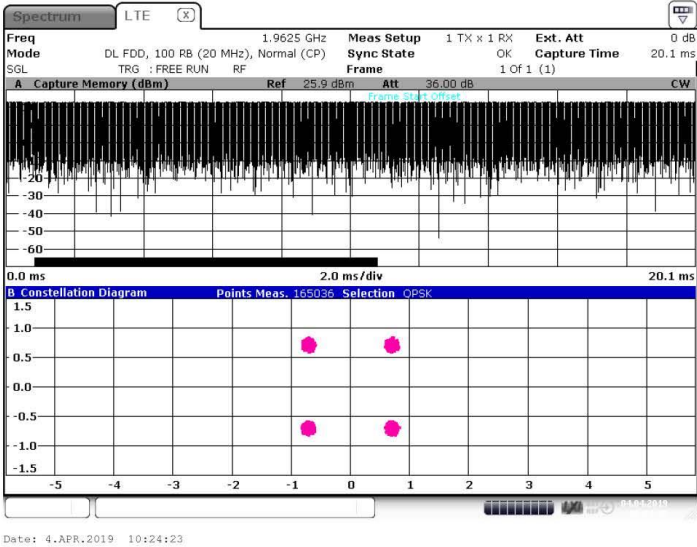


Figure 3 I/Q constellation diagram with capture buffer – QPSK (1962.5 MHz) (20MHz Channel BW)

Test Report No:
TYPEAPPR-1508717799-
611



Spectrum **LTE** **(X)**

Freq Mode 1.9625 GHz **Meas Setup** 1 TX x 1 RX **Ext. Att** 0 dB
Mode DL FDD, 100 RB (20 MHz), Normal (CP) **Sync State** OK **Capture Time** 20.1 ms
SGL TRG : FREE RUN RF **Frame** 1 Of 1 (1) **CW**

A Capture Memory (dBm) Ref 25.9 dBm Att 36.00 dB

0.0 ms 2.0 ms/div 20.1 ms

B Constellation Diagram Points Meas. 90000 Selection 16QAM

1.5
1.0
0.5
0.0
-0.5
-1.0
-1.5

-5 -4 -3 -2 -1 0 1 2 3 4 5

Date: 4.APR.2019 10:46:22

47 CFR part 24 (2018)

10. Apr 2019
Page 42 of 113



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

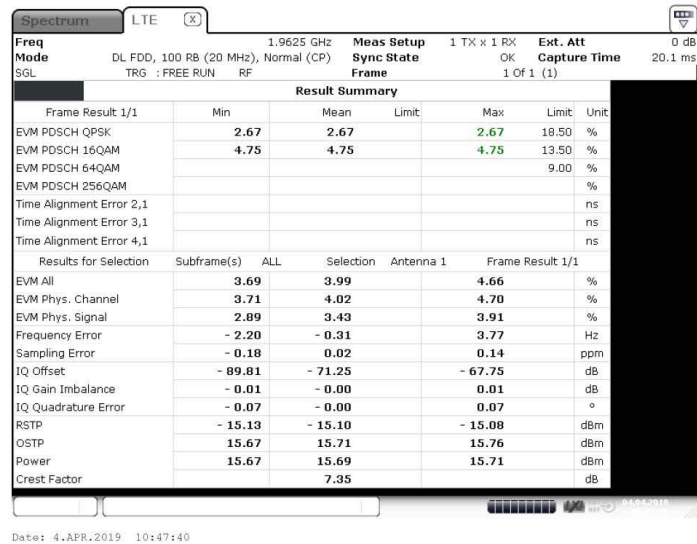


Figure 6 I/Q constellation table with I/Q error – 16QAM (1962.5 MHz) (20MHz Channel BW)

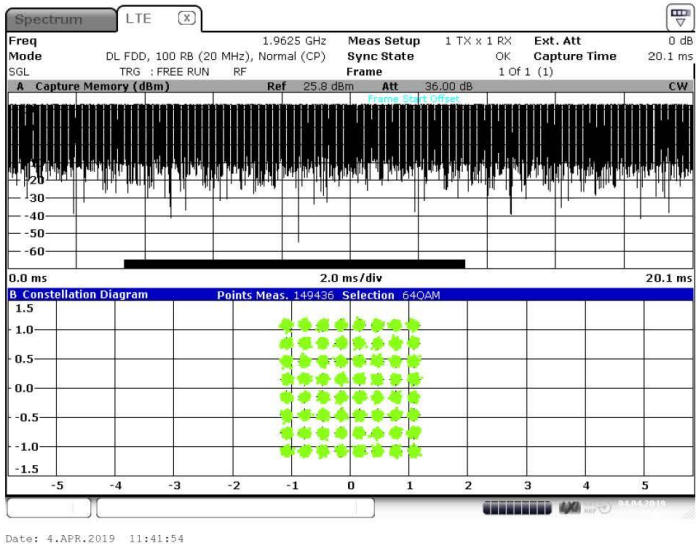


Figure 7 I/Q constellation diagram with capture buffer – 64QAM (1962.5 MHz) (20MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

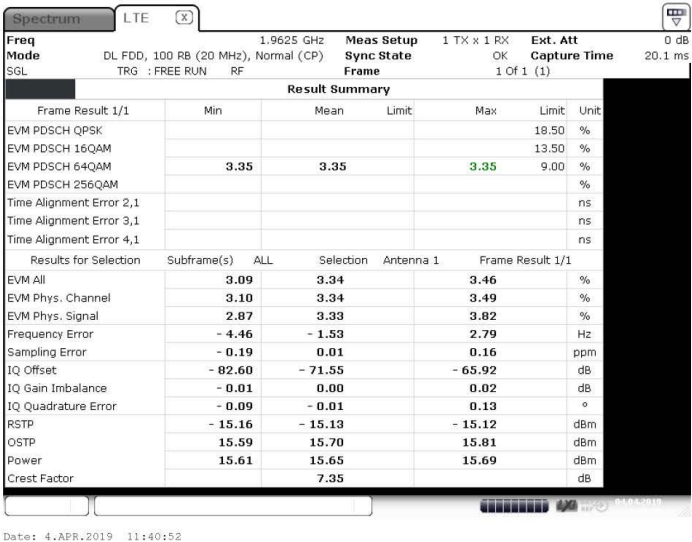


Figure 8 I/Q constellation table with I/Q error – 64QAM (1962.5 MHz) (20MHz Channel BW)

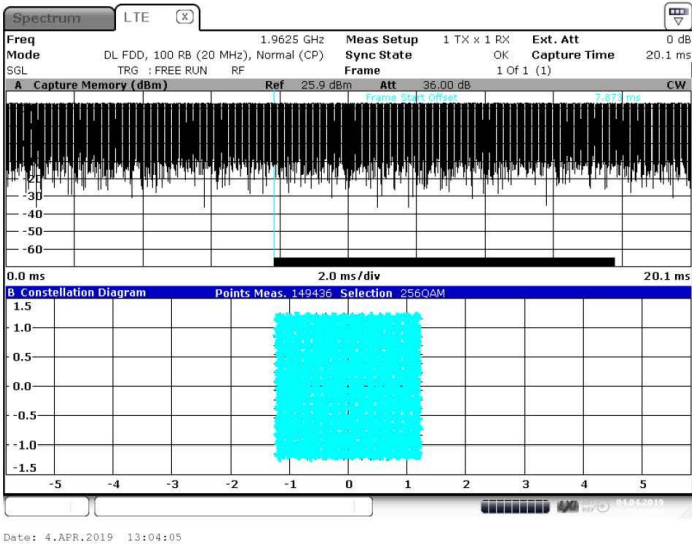


Figure 9 I/Q constellation diagram with capture buffer – 256QAM (1962.5 MHz) (20MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

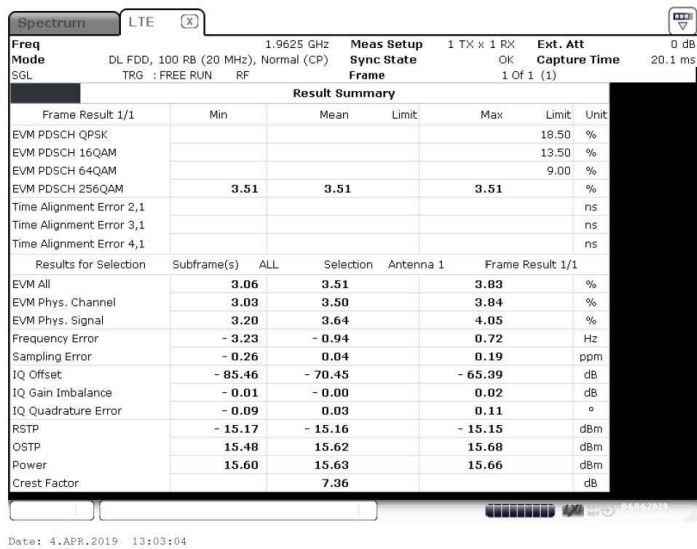


Figure 10 I/Q constellation table with I/Q error – 256QAM (1962.5 MHz)
(20MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

5.2.2. Test No. 3: Occupied Bandwidth

The value ‘Occ Bw’ is the measured occupied bandwidth.

Config A ANT1:

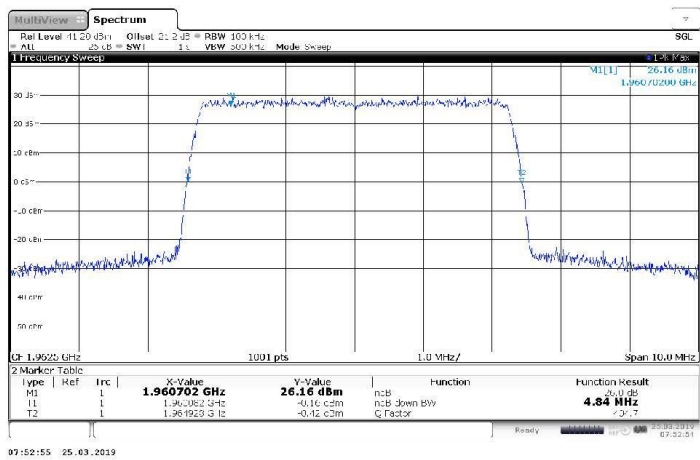


Figure 11 Occupied Bandwidth – QPSK (1962.5 MHz) (5MHz Channel BW)

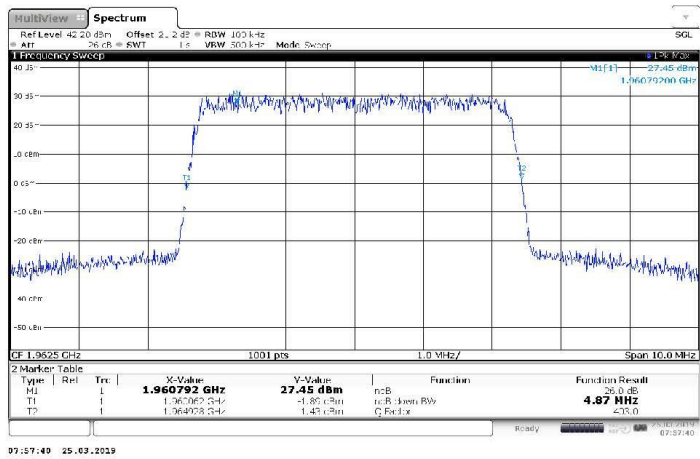


Figure 12 Occupied Bandwidth – 16QAM (1962.5 MHz) (5MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

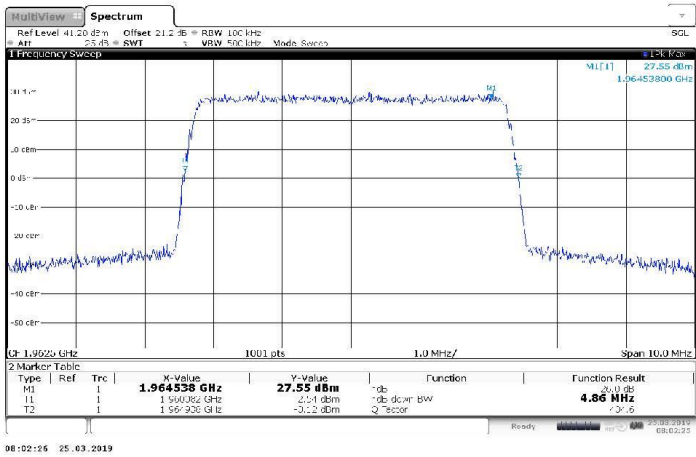


Figure 13 Occupied Bandwidth – 64QAM (1962.5 MHz) (5MHz Channel BW)

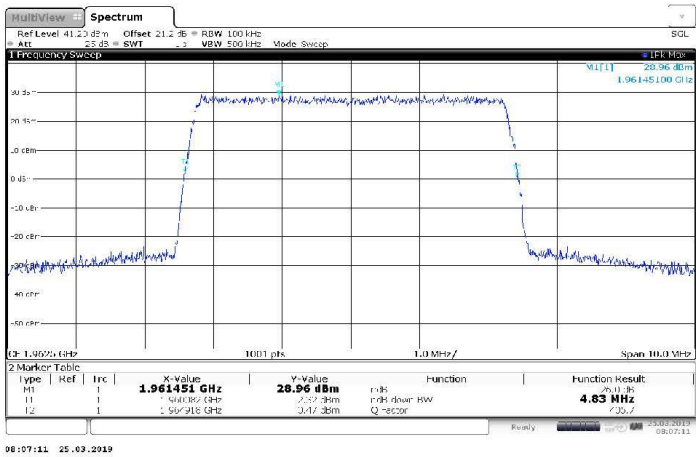


Figure 14 Occupied Bandwidth – 256QAM (1962.5 MHz) (5MHz Channel BW)

Config B ANT1:



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

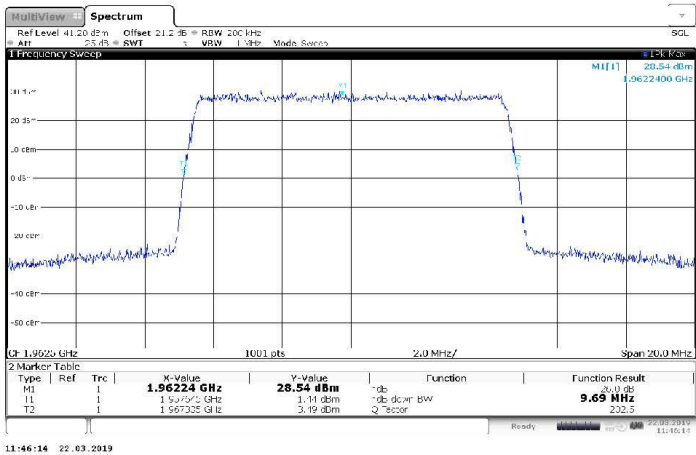


Figure 15 Occupied Bandwidth – QPSK (1962.5 MHz) (10MHz Channel BW)

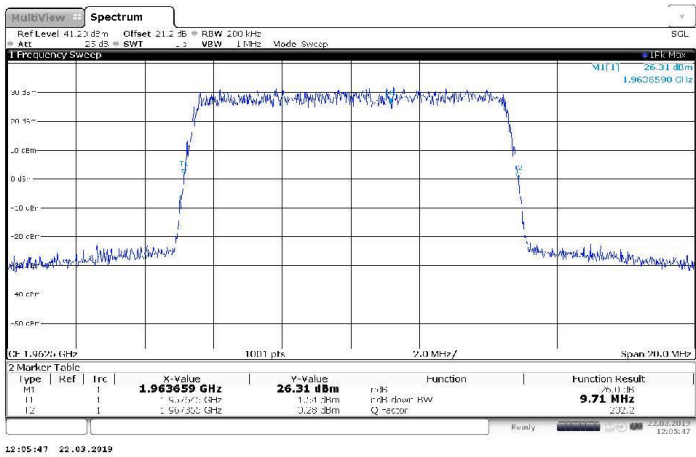


Figure 16 Occupied Bandwidth – 16QAM (1962.5 MHz) (10MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

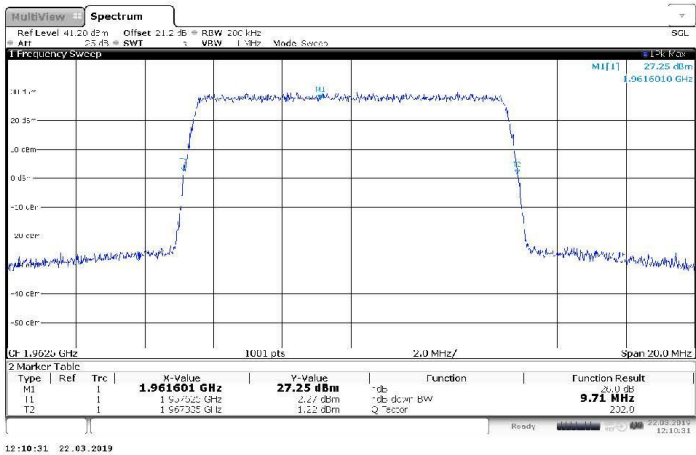


Figure 17 Occupied Bandwidth – 64QAM (1962.5 MHz) (10MHz Channel BW)

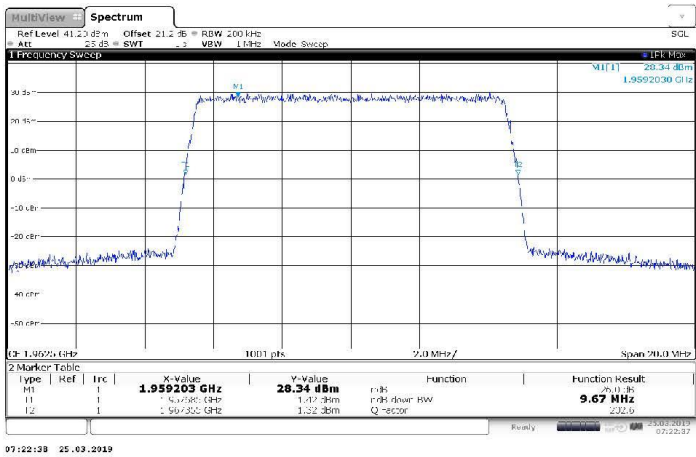


Figure 18 Occupied Bandwidth – 256QAM (1962.5 MHz) (10MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

Config C ANT1:

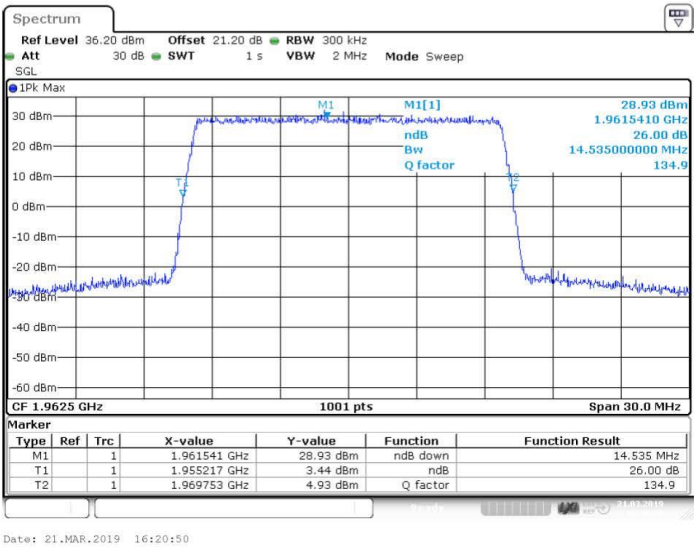


Figure 19 Occupied Bandwidth – QPSK (1962.5 MHz) (15MHz Channel BW)

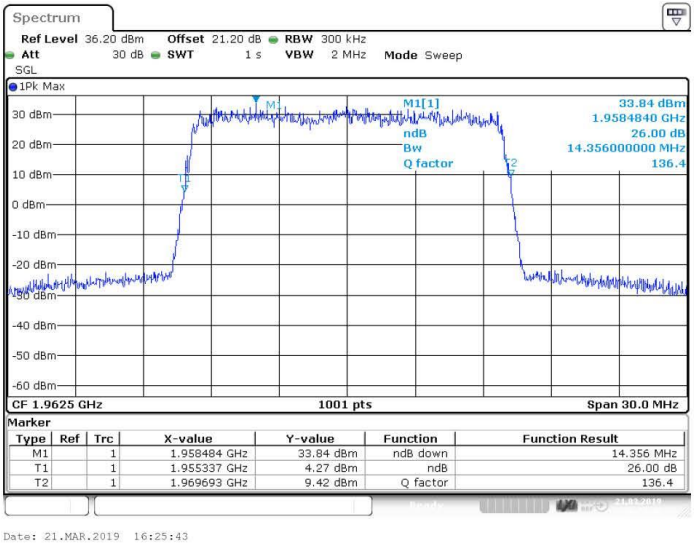


Figure 20 Occupied Bandwidth – 16QAM (1962.5 MHz) (15MHz Channel BW)



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

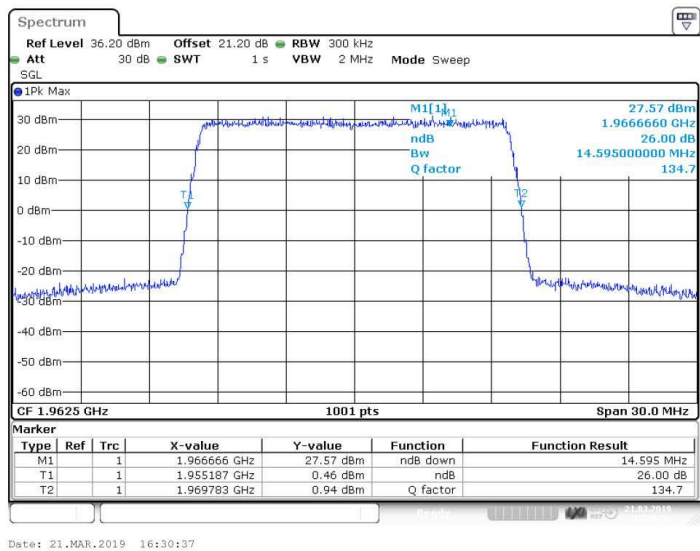


Figure 21 Occupied Bandwidth – 64QAM (1962.5 MHz) (15MHz Channel BW)

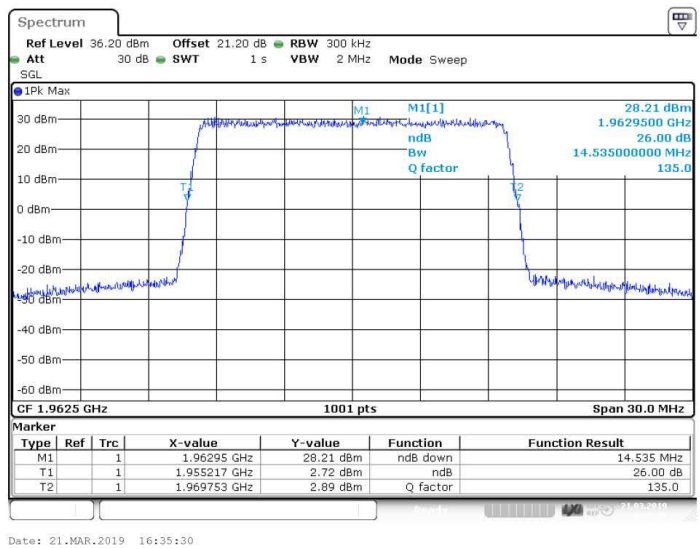


Figure 22 Occupied Bandwidth – 256QAM (1962.5 MHz) (15MHz Channel BW)

Config D ANT1:



FCC ID:
VBNAHFB-01

Test Report No:
TYPEAPPR-1508717799-
611

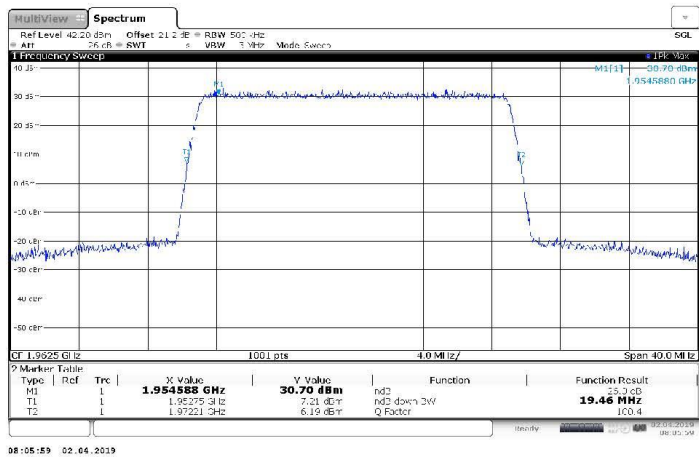


Figure 23 Occupied Bandwidth – QPSK (1962.5 MHz) (20MHz Channel BW)

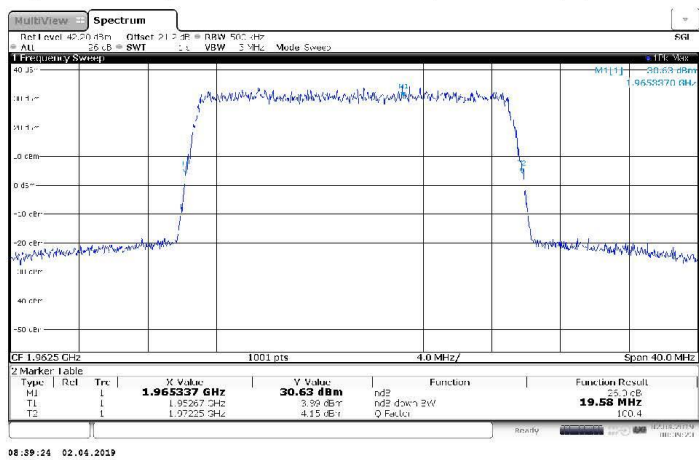


Figure 24 Occupied Bandwidth – 16QAM (1962.5 MHz) (20MHz Channel BW)